ckb-next

beta-v0.2.8 at branch testing

Generated by Doxygen 1.8.6

Sat Feb 3 2018 14:44:07

Contents

1 README 1

2 Building ckb 9

3 cbk Improvements Roadmap 11

4 DAEMON 13

5 Todo List 21

6 Deprecated List 23

7 Namespace Index 25

7.1 Namespace List . . . 25

8 Hierarchical Index 27

8.1 Class Hierarchy . . . 27

9 Data Structure Index 31

9.1 Data Structures . . . 31

10 File Index 35

10.1 File List . . . 35

11 Namespace Documentation 39

11.1 Ui Namespace Reference . . . 39

12 Data Structure Documentation 41

12.1 AnimAddDialog Class Reference . . . 41

12.1.1 Detailed Description . . . 42

12.1.2 Constructor & Destructor Documentation . . . 42

12.1.2.1 AnimAddDialog . . . 43

12.1.2.2 ~AnimAddDialog . . . 43

12.1.3 Member Function Documentation . . . 43

12.1.3.1 chosenPreset . . . 43

12.1.3.2 chosenScript . . . 44

12.1.3.3 on_animBox_activated . . . 44
12.1.3.4 on_presetBox_activated . . . 45
12.1.3.5 on_previewBox_clicked . . . 46
12.1.4 Field Documentation . . . 46
12.1.4.1 _keys . . . 46
12.1.4.2 _light . . . 46
12.1.4.3 scripts . . . 46
12.1.4.4 showPreview . . . 47
12.1.4.5 ui . . . 47
12.2 Ui::AnimAddDialog Class Reference . . . 47
12.2.1 Detailed Description . . . 48
12.2.2 Member Function Documentation . . . 48
12.2.2.1 retranslateUi . . . 48
12.2.2.2 setupUi . . . 49
12.2.3 Field Documentation . . . 50
12.2.3.1 animBox . . . 50
12.2.3.2 buttonBox . . . 51
12.2.3.3 gridLayout . . . 51
12.2.3.4 horizontalLayout . . . 51
12.2.3.5 horizontalSpacer . . . 51
12.2.3.6 horizontalSpacer_2 . . . 51
12.2.3.7 label . . . 51
12.2.3.8 label_2 . . . 51
12.2.3.9 presetBox . . . 51
12.2.3.10 previewBox . . . 51
12.2.3.11 verticalSpacer_2 . . . 52
12.2.3.12 verticalSpacer_3 . . . 52
12.3 AnimScript Class Reference . . . 52
12.3.1 Detailed Description . . . 56
12.3.2 Data Structure Documentation . . . 56
12.3.2.1 struct AnimScript::Param . . . 56
12.3.3 Member Typedef Documentation . . . 57
12.3.3.1 PresetValue . . . 57
12.3.4 Constructor & Destructor Documentation . . . 57
12.3.4.1 ~AnimScript . . . 57
12.3.4.2 AnimScript . . . 57
12.3.4.3 AnimScript . . . 58
12.3.5 Member Function Documentation . . . 58
12.3.5.1 advance . . . 58
12.3.5.2 author . . . 58

12.3.5.3 begin . . . 59
12.3.5.4 colors . . . 60
12.3.5.5 copy . . . 60
12.3.5.6 copyright . . . 61
12.3.5.7 count . . . 61
12.3.5.8 description . . . 62
12.3.5.9 end . . . 62
12.3.5.10 frame . . . 63
12.3.5.11 guid . . . 64
12.3.5.12 hasFrame . . . 64
12.3.5.13 hasKeypress . . . 65
12.3.5.14 hasParam . . . 65
12.3.5.15 init . . . 66
12.3.5.16 keypress . . . 67
12.3.5.17 license . . . 68
12.3.5.18 list . . . 68
12.3.5.19 load . . . 69
12.3.5.20 name . . . 72
12.3.5.21 param . . . 72
12.3.5.22 parameters . . . 73
12.3.5.23 paramIterator . . . 74
12.3.5.24 path . . . 74
12.3.5.25 preset . . . 75
12.3.5.26 presets . . . 75
12.3.5.27 printParams . . . 75
12.3.5.28 readProcess . . . 76
12.3.5.29 retrigger . . . 77
12.3.5.30 scan . . . 78
12.3.5.31 setDuration . . . 79
12.3.5.32 stop . . . 79
12.3.5.33 version . . . 80
12.3.5.34 year . . . 80
12.3.6 Field Documentation . . . 81
12.3.6.1 _colorBuffer . . . 81
12.3.6.2 _colors . . . 81
12.3.6.3 _info . . . 81
12.3.6.4 _keys . . . 81
12.3.6.5 _map . . . 81
12.3.6.6 _paramValues . . . 81
12.3.6.7 _path . . . 81

12.3.6.8 _presets . . . 82
12.3.6.9 _presetValues . . . 82
12.3.6.10 durationMsec . . . 82
12.3.6.11 firstFrame . . . 82
12.3.6.12 inFrame . . . 82
12.3.6.13 initialized . . . 82
12.3.6.14 KP_NAME . . . 82
12.3.6.15 KP_NONE . . . 82
12.3.6.16 KP_POSITION . . . 82
12.3.6.17 lastFrame . . . 83
12.3.6.18 minX . . . 83
12.3.6.19 minY . . . 83
12.3.6.20 process . . . 83
12.3.6.21 readAnyFrame . . . 83
12.3.6.22 readFrame . . . 83
12.3.6.23 repeatMsec . . . 83
12.3.6.24 scripts . . . 83
12.3.6.25 stopped . . . 83
12.4 Ui::AnimSettingDialog Class Reference . . . 84
12.4.1 Detailed Description . . . 86
12.4.2 Member Function Documentation . . . 86
12.4.2.1 retranslateUi . . . 86
12.4.2.2 setupUi . . . 87
12.4.3 Field Documentation . . . 91
12.4.3.1 animName . . . 91
12.4.3.2 buttonBox . . . 91
12.4.3.3 delayBox . . . 91
12.4.3.4 gridLayout . . . 92
12.4.3.5 gridLayout_2 . . . 92
12.4.3.6 horizontalSpacer . . . 92
12.4.3.7 horizontalSpacer_2 . . . 92
12.4.3.8 horizontalSpacer_3 . . . 92
12.4.3.9 horizontalSpacer_4 . . . 92
12.4.3.10 horizontalSpacer_5 . . . 92
12.4.3.11 horizontalSpacer_6 . . . 92
12.4.3.12 infoTab . . . 92
12.4.3.13 kpDelayBox . . . 93
12.4.3.14 kpModeStopBox . . . 93
12.4.3.15 kpReleaseBox . . . 93
12.4.3.16 kpRepeatBox . . . 93

12.4.3.17 kpRepeatLabel . . . 93
12.4.3.18 kpRepeatLabel_2 . . . 93
12.4.3.19 label . . . 93
12.4.3.20 label_10 . . . 93
12.4.3.21 label_11 . . . 93
12.4.3.22 label_12 . . . 94
12.4.3.23 label_13 . . . 94
12.4.3.24 label_2 . . . 94
12.4.3.25 label_3 . . . 94
12.4.3.26 label_4 . . . 94
12.4.3.27 label_5 . . . 94
12.4.3.28 label_6 . . . 94
12.4.3.29 label_7 . . . 94
12.4.3.30 label_8 . . . 94
12.4.3.31 label_9 . . . 95
12.4.3.32 line . . . 95
12.4.3.33 line_2 . . . 95
12.4.3.34 repeatBox . . . 95
12.4.3.35 repeatLabel . . . 95
12.4.3.36 repeatLabel_2 . . . 95
12.4.3.37 sAuthorLabel . . . 95
12.4.3.38 sDescLabel . . . 95
12.4.3.39 settingsGrid . . . 95
12.4.3.40 settingTab . . . 96
12.4.3.41 sLicenseLabel . . . 96
12.4.3.42 sNameLabel . . . 96
12.4.3.43 sVerLabel . . . 96
12.4.3.44 sYearLabel . . . 96
12.4.3.45 tabWidget . . . 96
12.4.3.46 timeGrid . . . 96
12.4.3.47 timeTab . . . 96
12.4.3.48 verticalSpacer . . . 96
12.4.3.49 verticalSpacer_2 . . . 97
12.4.3.50 verticalSpacer_3 . . . 97
12.5 AnimSettingDialog Class Reference . . . 97
12.5.1 Detailed Description . . . 100
12.5.2 Constructor & Destructor Documentation . . . 100
12.5.2.1 AnimSettingDialog . . . 100
12.5.2.2 ~AnimSettingDialog . . . 105
12.5.3 Member Function Documentation . . . 105

12.5.3.1 angleDialChanged . . . 106
12.5.3.2 angleSpinnerChanged . . . 106
12.5.3.3 hLine . . . 107
12.5.3.4 name . . . 108
12.5.3.5 newDuration . . . 108
12.5.3.6 on_delayBox_valueChanged . . . 109
12.5.3.7 on_kpDelayBox_valueChanged . . . 110
12.5.3.8 on_kpReleaseBox_stateChanged . . . 110
12.5.3.9 on_kpRepeatBox_valueChanged . . . 111
12.5.3.10 on_repeatBox_valueChanged . . . 112
12.5.3.11 updateParam . . . 112
12.5.3.12 updateStops . . . 115
12.5.4 Field Documentation . . . 116
12.5.4.1 _anim . . . 116
12.5.4.2 angleDialMapper . . . 116
12.5.4.3 angleSpinnerMapper . . . 116
12.5.4.4 angleSpinners . . . 117
12.5.4.5 hasRepeat . . . 117
12.5.4.6 kpStopCheck . . . 117
12.5.4.7 lastDuration . . . 117
12.5.4.8 settingWidgets . . . 117
12.5.4.9 stopCheck . . . 117
12.5.4.10 ui . . . 117
12.5.4.11 updateMapper . . . 117
12.6 AutoRun Class Reference . . . 118
12.6.1 Detailed Description . . . 118
12.6.2 Member Function Documentation . . . 118
12.6.2.1 available . . . 118
12.6.2.2 disable . . . 119
12.6.2.3 enable . . . 119
12.6.2.4 isEnabled . . . 120
12.6.2.5 once . . . 121
12.7 CkbSettings Class Reference . . . 122
12.7.1 Detailed Description . . . 124
12.7.2 Constructor & Destructor Documentation . . . 124
12.7.2.1 CkbSettings . . . 124
12.7.2.2 CkbSettings . . . 124
12.7.2.3 CkbSettings . . . 125
12.7.2.4 ~CkbSettings . . . 125
12.7.3 Member Function Documentation . . . 125

12.7.3.1 beginGroup . . . 125
12.7.3.2 childGroups . . . 125
12.7.3.3 childKeys . . . 126
12.7.3.4 cleanUp . . . 127
12.7.3.5 contains . . . 128
12.7.3.6 containsGroup . . . 128
12.7.3.7 endGroup . . . 129
12.7.3.8 get . . . 129
12.7.3.9 isBusy . . . 130
12.7.3.10 pwd . . . 131
12.7.3.11 pwd . . . 132
12.7.3.12 remove . . . 133
12.7.3.13 set . . . 133
12.7.3.14 setValue . . . 135
12.7.3.15 value . . . 135
12.7.4 Field Documentation . . . 136
12.7.4.1 backing . . . 136
12.7.4.2 groups . . . 136
12.7.4.3 removeCache . . . 137
12.7.4.4 writeCache . . . 137
12.8 CkbSettingsWriter Class Reference . . . 137
12.8.1 Detailed Description . . . 138
12.8.2 Constructor & Destructor Documentation . . . 138
12.8.2.1 CkbSettingsWriter . . . 138
12.8.2.2 ∼CkbSettingsWriter . . . 139
12.8.3 Member Function Documentation . . . 139
12.8.3.1 run . . . 139
12.8.4 Field Documentation . . . 139
12.8.4.1 _backing . . . 139
12.8.4.2 _removals . . . 139
12.8.4.3 _updates . . . 139
12.9 ColorButton Class Reference . . . 139
12.9.1 Detailed Description . . . 142
12.9.2 Constructor & Destructor Documentation . . . 142
12.9.2.1 ColorButton . . . 142
12.9.3 Member Function Documentation . . . 142
12.9.3.1 allowAlpha . . . 142
12.9.3.2 allowAlpha . . . 143
12.9.3.3 bigIcons . . . 143
12.9.3.4 bigIcons . . . 144

12.9.3.5 color . . . 144
12.9.3.6 color . . . 145
12.9.3.7 colorChanged . . . 146
12.9.3.8 pickColor . . . 146
12.9.3.9 setLabel . . . 147
12.9.3.10 setLabel . . . 147
12.9.3.11 updateImage . . . 147
12.9.4 Field Documentation . . . 148
12.9.4.1 _alpha . . . 148
12.9.4.2 _bigIcons . . . 148
12.9.4.3 _color . . . 148
12.9.4.4 _setLabel . . . 148
12.10 ColorMap Class Reference . . . 149
12.10.1 Detailed Description . . . 150
12.10.2 Constructor & Destructor Documentation . . . 150
12.10.2.1 ColorMap . . . 150
12.10.2.2 ~ColorMap . . . 150
12.10.2.3 ColorMap . . . 150
12.10.3 Member Function Documentation . . . 151
12.10.3.1 alloc . . . 151
12.10.3.2 clear . . . 151
12.10.3.3 colorForName . . . 152
12.10.3.4 colorForName . . . 153
12.10.3.5 colors . . . 153
12.10.3.6 colors . . . 154
12.10.3.7 count . . . 154
12.10.3.8 deAlloc . . . 154
12.10.3.9 init . . . 155
12.10.3.10 keyNames . . . 156
12.10.3.11 operator= . . . 156
12.10.4 Field Documentation . . . 157
12.10.4.1 _colors . . . 157
12.10.4.2 _count . . . 157
12.10.4.3 _keyNames . . . 157
12.10.4.4 _mapCount . . . 157
12.11 Ui::ExtraSettingsWidget Class Reference . . . 157
12.11.1 Detailed Description . . . 159
12.11.2 Member Function Documentation . . . 160
12.11.2.1 retranslateUi . . . 160
12.11.2.2 setupUi . . . 161

12.11.3 Field Documentation . . . 165
12.11.3.1 animCountLabel . . . 165
12.11.3.2 animPathLabel . . . 165
12.11.3.3 animScanButton . . . 165
12.11.3.4 brightnessBox . . . 165
12.11.3.5 buttonBox . . . 165
12.11.3.6 delayBox . . . 165
12.11.3.7 ditherBox . . . 165
12.11.3.8 fpsBox . . . 165
12.11.3.9 fpsWarnLabel . . . 166
12.11.3.10 gridLayout . . . 166
12.11.3.11 horizontalLayout . . . 166
12.11.3.12 horizontalLayout_2 . . . 166
12.11.3.13 horizontalSpacer . . . 166
12.11.3.14 horizontalSpacer_2 . . . 166
12.11.3.15 horizontalSpacer_3 . . . 166
12.11.3.16 label . . . 166
12.11.3.17 label_10 . . . 166
12.11.3.18 label_11 . . . 167
12.11.3.19 label_2 . . . 167
12.11.3.20 label_3 . . . 167
12.11.3.21 label_5 . . . 167
12.11.3.22 label_6 . . . 167
12.11.3.23 line . . . 167
12.11.3.24 line_2 . . . 167
12.11.3.25 line_3 . . . 167
12.11.3.26 mAccelBox . . . 167
12.11.3.27 osxLabel . . . 168
12.11.3.28 osxLine . . . 168
12.11.3.29 sAccelBox . . . 168
12.11.3.30 sSpeedBox . . . 168
12.11.3.31 sSpeedWidget . . . 168
12.11.3.32 trayBox . . . 168
12.11.3.33 verticalSpacer . . . 168
12.11.3.34 verticalSpacer_10 . . . 168
12.11.3.35 verticalSpacer_11 . . . 168
12.11.3.36 verticalSpacer_2 . . . 169
12.11.3.37 verticalSpacer_3 . . . 169
12.11.3.38 verticalSpacer_4 . . . 169
12.11.3.39 verticalSpacer_5 . . . 169

12.11.3.40 verticalSpacer_6 . . . 169
12.11.3.41 verticalSpacer_7 . . . 169
12.11.3.42 verticalSpacer_8 . . . 169
12.11.3.43 verticalSpacer_9 . . . 169
12.12 ExtraSettingsWidget Class Reference . . . 170
12.12.1 Detailed Description . . . 171
12.12.2 Constructor & Destructor Documentation . . . 172
12.12.2.1 ExtraSettingsWidget . . . 172
12.12.2.2 ~ExtraSettingsWidget . . . 173
12.12.3 Member Function Documentation . . . 173
12.12.3.1 on_animScanButton_clicked . . . 173
12.12.3.2 on_brightnessBox_clicked . . . 174
12.12.3.3 on_delayBox_clicked . . . 174
12.12.3.4 on_ditherBox_clicked . . . 175
12.12.3.5 on_fpsBox_valueChanged . . . 175
12.12.3.6 on_mAccelBox_clicked . . . 175
12.12.3.7 on_sAccelBox_clicked . . . 176
12.12.3.8 on_sSpeedBox_valueChanged . . . 176
12.12.3.9 on_trayBox_clicked . . . 177
12.12.3.10 pollUpdates . . . 177
12.12.4 Field Documentation . . . 178
12.12.4.1 ui . . . 178
12.13 KbFirmware::FW Struct Reference . . . 178
12.13.1 Detailed Description . . . 179
12.13.2 Constructor & Destructor Documentation . . . 179
12.13.2.1 FW . . . 179
12.13.3 Field Documentation . . . 179
12.13.3.1 ckbVersion . . . 179
12.13.3.2 fileName . . . 179
12.13.3.3 fwVersion . . . 179
12.13.3.4 hash . . . 179
12.13.3.5 url . . . 179
12.14 FwUpgradeDialog Class Reference . . . 179
12.14.1 Detailed Description . . . 181
12.14.2 Constructor & Destructor Documentation . . . 181
12.14.2.1 FwUpgradeDialog . . . 181
12.14.2.2 ~FwUpgradeDialog . . . 182
12.14.3 Member Function Documentation . . . 182
12.14.3.1 cleanBlob . . . 182
12.14.3.2 closeEvent . . . 183

12.14.3.3 exec . . . 183
12.14.3.4 fwUpdateFinished . . . 184
12.14.3.5 fwUpdateProgress . . . 185
12.14.3.6 on_actionButton_clicked . . . 185
12.14.3.7 on_cancelButton_clicked . . . 186
12.14.3.8 removeDev . . . 186
12.14.3.9 saveBlob . . . 187
12.14.4 Field Documentation . . . 187
12.14.4.1 blob . . . 187
12.14.4.2 evLoop . . . 187
12.14.4.3 exitSuccess . . . 187
12.14.4.4 kb . . . 187
12.14.4.5 savePath . . . 188
12.14.4.6 ui . . . 188
12.15 Ui::FwUpgradeDialog Class Reference . . . 188
12.15.1 Detailed Description . . . 189
12.15.2 Member Function Documentation . . . 190
12.15.2.1 retranslateUi . . . 190
12.15.2.2 setupUi . . . 190
12.15.3 Field Documentation . . . 192
12.15.3.1 actionButton . . . 192
12.15.3.2 cancelButton . . . 192
12.15.3.3 curLabel . . . 192
12.15.3.4 devLabel . . . 192
12.15.3.5 gridLayout . . . 193
12.15.3.6 gridLayout_2 . . . 193
12.15.3.7 horizontalSpacer . . . 193
12.15.3.8 horizontalSpacer_2 . . . 193
12.15.3.9 horizontalSpacer_3 . . . 193
12.15.3.10 horizontalSpacer_4 . . . 193
12.15.3.11 label_2 . . . 193
12.15.3.12 label_4 . . . 193
12.15.3.13 newLabel . . . 193
12.15.3.14 progressBar . . . 194
12.15.3.15 statusLabel . . . 194
12.16 GradientButton Class Reference . . . 194
12.16.1 Detailed Description . . . 195
12.16.2 Constructor & Destructor Documentation . . . 196
12.16.2.1 GradientButton . . . 196
12.16.3 Member Function Documentation . . . 196

12.16.3.1 fromString . . . 196
12.16.3.2 gradientChanged . . . 197
12.16.3.3 pickGradient . . . 197
12.16.3.4 toString . . . 198
12.16.3.5 updateImage . . . 199
12.16.4 Field Documentation . . . 200
12.16.4.1 _alpha . . . 200
12.16.4.2 _stops . . . 200
12.17 Ui::GradientDialog Class Reference . . . 200
12.17.1 Detailed Description . . . 202
12.17.2 Member Function Documentation . . . 202
12.17.2.1 retranslateUi . . . 202
12.17.2.2 setupUi . . . 203
12.17.3 Field Documentation . . . 205
12.17.3.1 buttonBox . . . 205
12.17.3.2 gridLayout . . . 205
12.17.3.3 gridLayout_2 . . . 205
12.17.3.4 gridLayout_3 . . . 206
12.17.3.5 groupBox_2 . . . 206
12.17.3.6 horizontalLayout . . . 206
12.17.3.7 horizontalLayout_2 . . . 206
12.17.3.8 horizontalSpacer . . . 206
12.17.3.9 horizontalSpacer_2 . . . 206
12.17.3.10 horizontalSpacer_3 . . . 206
12.17.3.11 label . . . 206
12.17.3.12 label_2 . . . 206
12.17.3.13 presetDelete . . . 207
12.17.3.14 presetList . . . 207
12.17.3.15 presetName . . . 207
12.17.3.16 presetSave . . . 207
12.17.3.17 stopBox . . . 207
12.17.3.18 stopColor . . . 207
12.17.3.19 stopOpacity . . . 207
12.17.3.20 stopPos . . . 207
12.17.3.21 verticalSpacer . . . 208
12.17.3.22 verticalSpacer_2 . . . 208
12.17.3.23 widget . . . 208
12.18 GradientDialog Class Reference . . . 208
12.18.1 Detailed Description . . . 211
12.18.2 Constructor & Destructor Documentation . . . 211

12.18.2.1 GradientDialog . . . 211
12.18.2.2 ~GradientDialog . . . 212
12.18.3 Member Function Documentation . . . 212
12.18.3.1 addPreset . . . 212
12.18.3.2 colorChanged . . . 213
12.18.3.3 currentChanged . . . 213
12.18.3.4 getGradient . . . 214
12.18.3.5 makeIcon . . . 215
12.18.3.6 on_presetDelete_clicked . . . 216
12.18.3.7 on_presetList_currentItemChanged . . . 216
12.18.3.8 on_presetName_textEdited . . . 217
12.18.3.9 on_presetSave_clicked . . . 217
12.18.3.10 on_stopOpacity_valueChanged . . . 218
12.18.3.11 on_stopPos_valueChanged . . . 218
12.18.3.12 setPreset . . . 219
12.18.3.13 updatePresets . . . 220
12.18.4 Field Documentation . . . 220
12.18.4.1 currentPreset . . . 220
12.18.4.2 presets . . . 221
12.18.4.3 ui . . . 221
12.19 GradientDialogWidget Class Reference . . . 221
12.19.1 Detailed Description . . . 224
12.19.2 Constructor & Destructor Documentation . . . 224
12.19.2.1 GradientDialogWidget . . . 224
12.19.3 Member Function Documentation . . . 224
12.19.3.1 colorAt . . . 224
12.19.3.2 current . . . 225
12.19.3.3 currentChanged . . . 225
12.19.3.4 fillRect . . . 225
12.19.3.5 makeStops . . . 226
12.19.3.6 mouseMoveEvent . . . 227
12.19.3.7 mousePressEvent . . . 228
12.19.3.8 mouseReleaseEvent . . . 229
12.19.3.9 moveCurrent . . . 229
12.19.3.10 paintEvent . . . 230
12.19.3.11 selectedStop . . . 231
12.19.3.12 selectionColors . . . 232
12.19.3.13 setCurrentColor . . . 233
12.19.3.14 setStops . . . 233
12.19.3.15 stopCount . . . 234

12.19.3.16 stopRect . . . 235
12.19.3.17 stops . . . 235
12.19.4 Field Documentation . . . 236
12.19.4.1 _colors . . . 236
12.19.4.2 _current . . . 236
12.19.4.3 _stops . . . 236
12.19.4.4 selected . . . 236
12.19.4.5 selectedOffset . . . 236
12.19.4.6 selectedPos . . . 236
12.20 JlCompress Class Reference . . . 237
12.20.1 Detailed Description . . . 238
12.20.2 Member Function Documentation . . . 238
12.20.2.1 compressDir . . . 238
12.20.2.2 compressFile . . . 239
12.20.2.3 compressFile . . . 240
12.20.2.4 compressFiles . . . 242
12.20.2.5 compressSubDir . . . 244
12.20.2.6 extractDir . . . 246
12.20.2.7 extractFile . . . 248
12.20.2.8 extractFile . . . 250
12.20.2.9 extractFiles . . . 251
12.20.2.10 getFileList . . . 252
12.20.2.11 removeFile . . . 254
12.21 Kb Class Reference . . . 255
12.21.1 Detailed Description . . . 260
12.21.2 Constructor & Destructor Documentation . . . 260
12.21.2.1 ~Kb . . . 260
12.21.2.2 Kb . . . 261
12.21.3 Member Function Documentation . . . 263
12.21.3.1 appendProfile . . . 263
12.21.3.2 autoSave . . . 263
12.21.3.3 currentBind . . . 263
12.21.3.4 currentLight . . . 264
12.21.3.5 currentMode . . . 265
12.21.3.6 currentPerf . . . 265
12.21.3.7 currentProfile . . . 266
12.21.3.8 deleteHw . . . 266
12.21.3.9 deletePrevious . . . 267
12.21.3.10 dither . . . 267
12.21.3.11 dither . . . 268

12.21.3.12find . . . 268
12.21.3.13frameRate . . . 269
12.21.3.14frameRate . . . 269
12.21.3.15frameUpdate . . . 270
12.21.3.16fwUpdate . . . 271
12.21.3.17fwUpdateFinished . . . 272
12.21.3.18fwUpdateProgress . . . 272
12.21.3.19getKeyMap . . . 273
12.21.3.20getMacroNumber . . . 273
12.21.3.21getMacroPath . . . 274
12.21.3.22hwProfile . . . 274
12.21.3.23hwProfile . . . 274
12.21.3.24hwSave . . . 275
12.21.3.25indexOf . . . 276
12.21.3.26infoUpdated . . . 277
12.21.3.27isKeyboard . . . 277
12.21.3.28isMouse . . . 278
12.21.3.29isOpen . . . 279
12.21.3.30layout . . . 279
12.21.3.31layout . . . 280
12.21.3.32load . . . 280
12.21.3.33macroDelay . . . 281
12.21.3.34macroDelay . . . 281
12.21.3.35matches . . . 282
12.21.3.36modeChanged . . . 282
12.21.3.37model . . . 283
12.21.3.38modeRenamed . . . 283
12.21.3.39mouseAccel . . . 283
12.21.3.40mouseAccel . . . 284
12.21.3.41needsSave . . . 284
12.21.3.42newMode . . . 284
12.21.3.43newMode . . . 285
12.21.3.44newProfile . . . 286
12.21.3.45newProfile . . . 286
12.21.3.46profileAdded . . . 287
12.21.3.47profileChanged . . . 287
12.21.3.48profileRenamed . . . 288
12.21.3.49profiles . . . 288
12.21.3.50profiles . . . 289
12.21.3.51readNotify . . . 289

12.21.3.52 run . . . 293
12.21.3.53 save . . . 294
12.21.3.54 scrollSpeed . . . 295
12.21.3.55 scrollSpeed . . . 295
12.21.3.56 setCurrentMode . . . 296
12.21.3.57 setCurrentMode . . . 296
12.21.3.58 setCurrentMode . . . 297
12.21.3.59 setCurrentProfile . . . 298
12.21.3.60 updateLayout . . . 299
12.21.3.61 writeProfileHeader . . . 300
12.21.4 Friends And Related Function Documentation . . . 301
12.21.4.1 KbManager . . . 301
12.21.5 Field Documentation . . . 301
12.21.5.1 _currentMode . . . 301
12.21.5.2 _currentProfile . . . 301
12.21.5.3 _delay . . . 301
12.21.5.4 _dither . . . 301
12.21.5.5 _frameRate . . . 301
12.21.5.6 _hwProfile . . . 302
12.21.5.7 _layout . . . 302
12.21.5.8 _model . . . 302
12.21.5.9 _mouseAccel . . . 302
12.21.5.10 _needsSave . . . 302
12.21.5.11 _profiles . . . 302
12.21.5.12 _scrollSpeed . . . 302
12.21.5.13 cmd . . . 302
12.21.5.14 cmdpath . . . 302
12.21.5.15 devpath . . . 303
12.21.5.16 features . . . 303
12.21.5.17 firmware . . . 303
12.21.5.18 fwUpdPath . . . 303
12.21.5.19 hwLoading . . . 303
12.21.5.20 HWMODE_MAX . . . 303
12.21.5.21 hwModeCount . . . 303
12.21.5.22 iState . . . 303
12.21.5.23 lastAutoSave . . . 303
12.21.5.24 macroNumber . . . 304
12.21.5.25 macroPath . . . 304
12.21.5.26 monochrome . . . 304
12.21.5.27 notifyNumber . . . 304

12.21.5.28 notifyPath . . . 304
12.21.5.29 pollrate . . . 304
12.21.5.30 prefsPath . . . 304
12.21.5.31 prevMode . . . 304
12.21.5.32 prevProfile . . . 304
12.21.5.33 usbModel . . . 305
12.21.5.34 usbSerial . . . 305
12.22 KbAnim Class Reference . . . 305
12.22.1 Detailed Description . . . 308
12.22.2 Member Enumeration Documentation . . . 308
12.22.2.1 Mode . . . 308
12.22.3 Constructor & Destructor Documentation . . . 309
12.22.3.1 KbAnim . . . 309
12.22.3.2 KbAnim . . . 310
12.22.3.3 KbAnim . . . 311
12.22.4 Member Function Documentation . . . 311
12.22.4.1 blend . . . 311
12.22.4.2 catchUp . . . 313
12.22.4.3 commitParams . . . 314
12.22.4.4 effectiveParams . . . 315
12.22.4.5 guid . . . 315
12.22.4.6 hasParameter . . . 316
12.22.4.7 isActive . . . 316
12.22.4.8 isRunning . . . 316
12.22.4.9 keypress . . . 317
12.22.4.10 keys . . . 318
12.22.4.11 keys . . . 319
12.22.4.12 map . . . 319
12.22.4.13 map . . . 320
12.22.4.14 mode . . . 320
12.22.4.15 mode . . . 320
12.22.4.16 name . . . 321
12.22.4.17 name . . . 321
12.22.4.18 needsSave . . . 321
12.22.4.19 newId . . . 322
12.22.4.20 opacity . . . 322
12.22.4.21 opacity . . . 322
12.22.4.22 parameter . . . 323
12.22.4.23 parameter . . . 323
12.22.4.24 reInit . . . 324

12.22.4.25 resetParams . . . 324
12.22.4.26 save . . . 325
12.22.4.27 script . . . 326
12.22.4.28 scriptName . . . 326
12.22.4.29 stop . . . 327
12.22.4.30 trigger . . . 328
12.22.4.31 updateParams . . . 329
12.22.5 Field Documentation . . . 330
12.22.5.1 _guid . . . 330
12.22.5.2 _isActive . . . 330
12.22.5.3 _isActiveKp . . . 330
12.22.5.4 _keys . . . 330
12.22.5.5 _map . . . 330
12.22.5.6 _mode . . . 330
12.22.5.7 _name . . . 330
12.22.5.8 _needsSave . . . 331
12.22.5.9 _opacity . . . 331
12.22.5.10 _parameters . . . 331
12.22.5.11 _script . . . 331
12.22.5.12 _scriptGuid . . . 331
12.22.5.13 _scriptName . . . 331
12.22.5.14 _tempParameters . . . 331
12.22.5.15 kpRepeatMsec . . . 331
12.22.5.16 kpRepeatTime . . . 331
12.22.5.17 kpStopTime . . . 332
12.22.5.18 repeatKey . . . 332
12.22.5.19 repeatMsec . . . 332
12.22.5.20 repeatTime . . . 332
12.22.5.21 stopTime . . . 332
12.23 Ui::KbAnimWidget Class Reference . . . 332
12.23.1 Detailed Description . . . 334
12.23.2 Member Function Documentation . . . 334
12.23.2.1 retranslateUi . . . 334
12.23.2.2 setupUi . . . 335
12.23.3 Field Documentation . . . 338
12.23.3.1 aCopyLabel . . . 338
12.23.3.2 aMissingLabel . . . 338
12.23.3.3 aMissingPage . . . 338
12.23.3.4 aNameLabel . . . 338
12.23.3.5 animList . . . 338

12.23.3.6 animPage . . . 339
12.23.3.7 aVerLabel . . . 339
12.23.3.8 blendBox . . . 339
12.23.3.9 deleteButton . . . 339
12.23.3.10 gridLayout . . . 339
12.23.3.11 gridLayout_2 . . . 339
12.23.3.12 gridLayout_3 . . . 339
12.23.3.13 gridLayout_4 . . . 339
12.23.3.14 horizontalLayout . . . 339
12.23.3.15 horizontalSpacer . . . 340
12.23.3.16 horizontalSpacer_2 . . . 340
12.23.3.17 horizontalSpacer_3 . . . 340
12.23.3.18 horizontalSpacer_4 . . . 340
12.23.3.19 horizontalSpacer_5 . . . 340
12.23.3.20 keyButton . . . 340
12.23.3.21 label_5 . . . 340
12.23.3.22 label_6 . . . 340
12.23.3.23 label_7 . . . 340
12.23.3.24 nameBox . . . 341
12.23.3.25 noAnimLabel . . . 341
12.23.3.26 noSelPage . . . 341
12.23.3.27 opacityBox . . . 341
12.23.3.28 propertyButton . . . 341
12.23.3.29 selectionStack . . . 341
12.23.3.30 verticalLayout . . . 341
12.23.3.31 verticalSpacer . . . 341
12.23.3.32 verticalSpacer_2 . . . 341
12.23.3.33 verticalSpacer_3 . . . 342
12.24 KbAnimWidget Class Reference . . . 342
12.24.1 Detailed Description . . . 344
12.24.2 Constructor & Destructor Documentation . . . 344
12.24.2.1 KbAnimWidget . . . 344
12.24.2.2 ~KbAnimWidget . . . 345
12.24.3 Member Function Documentation . . . 345
12.24.3.1 addAnim . . . 345
12.24.3.2 animChanged . . . 346
12.24.3.3 clearSelection . . . 347
12.24.3.4 didUpdateSelection . . . 347
12.24.3.5 duplicateAnim . . . 348
12.24.3.6 on_animList_currentItemChanged . . . 349

12.24.3.7 on_animList_customContextMenuRequested . . . 349
12.24.3.8 on_animList_itemChanged . . . 350
12.24.3.9 on_blendBox_activated . . . 350
12.24.3.10 on_deleteButton_clicked . . . 351
12.24.3.11 on_keyButton_clicked . . . 352
12.24.3.12 on_nameBox_textEdited . . . 352
12.24.3.13 on_opacityBox_valueChanged . . . 353
12.24.3.14 on_propertyButton_clicked . . . 353
12.24.3.15 refreshList . . . 354
12.24.3.16 reorderAnims . . . 355
12.24.3.17 setCurrent . . . 356
12.24.3.18 setLight . . . 357
12.24.3.19 setSelectedKeys . . . 358
12.24.4 Field Documentation . . . 359
12.24.4.1 animations . . . 359
12.24.4.2 current . . . 359
12.24.4.3 light . . . 359
12.24.4.4 noReorder . . . 359
12.24.4.5 selectedKeys . . . 359
12.24.4.6 ui . . . 359
12.25 KbBind Class Reference . . . 360
12.25.1 Detailed Description . . . 363
12.25.2 Constructor & Destructor Documentation . . . 363
12.25.2.1 KbBind . . . 363
12.25.2.2 KbBind . . . 363
12.25.3 Member Function Documentation . . . 364
12.25.3.1 action . . . 364
12.25.3.2 bindAction . . . 365
12.25.3.3 defaultAction . . . 365
12.25.3.4 devParent . . . 366
12.25.3.5 didLoad . . . 366
12.25.3.6 friendlyActionName . . . 367
12.25.3.7 friendlyName . . . 367
12.25.3.8 getMacroNumber . . . 368
12.25.3.9 getMacroPath . . . 369
12.25.3.10 globalRemap . . . 369
12.25.3.11 handleNotificationChannel . . . 370
12.25.3.12 isISO . . . 371
12.25.3.13 isKeyboard . . . 371
12.25.3.14 isMouse . . . 371

12.25.3.15 keyEvent . . . 372
12.25.3.16 layoutChanged . . . 373
12.25.3.17 light . . . 374
12.25.3.18 load . . . 374
12.25.3.19 loadGlobalRemap . . . 375
12.25.3.20 map . . . 376
12.25.3.21 map . . . 377
12.25.3.22 modeParent . . . 377
12.25.3.23 needsSave . . . 378
12.25.3.24 noAction . . . 378
12.25.3.25 noAction . . . 378
12.25.3.26 perf . . . 379
12.25.3.27 resetAction . . . 380
12.25.3.28 resetAction . . . 380
12.25.3.29 save . . . 381
12.25.3.30 saveGlobalRemap . . . 382
12.25.3.31 setAction . . . 383
12.25.3.32 setAction . . . 384
12.25.3.33 setGlobalRemap . . . 384
12.25.3.34 setNeedsUpdate . . . 385
12.25.3.35 update . . . 385
12.25.3.36 updated . . . 387
12.25.3.37 winLock . . . 387
12.25.3.38 winLock . . . 388
12.25.4 Friends And Related Function Documentation . . . 388
12.25.4.1 KeyAction . . . 388
12.25.5 Field Documentation . . . 388
12.25.5.1 _bind . . . 388
12.25.5.2 _devParent . . . 388
12.25.5.3 _globalRemap . . . 388
12.25.5.4 _map . . . 388
12.25.5.5 _needsSave . . . 388
12.25.5.6 _needsUpdate . . . 388
12.25.5.7 _winLock . . . 389
12.25.5.8 globalRemapTime . . . 389
12.25.5.9 lastCmd . . . 389
12.25.5.10 lastGlobalRemapTime . . . 389
12.26 Ui::KbBindWidget Class Reference . . . 389
12.26.1 Detailed Description . . . 391
12.26.2 Member Function Documentation . . . 391

12.26.2.1 retranslateUi . . . 391
12.26.2.2 setupUi . . . 392
12.26.3 Field Documentation . . . 394
12.26.3.1 copyButton . . . 394
12.26.3.2 gridLayout . . . 394
12.26.3.3 gridLayout_2 . . . 394
12.26.3.4 horizontalLayout_2 . . . 394
12.26.3.5 horizontalSpacer . . . 394
12.26.3.6 horizontalSpacer_2 . . . 395
12.26.3.7 keyWidget . . . 395
12.26.3.8 label . . . 395
12.26.3.9 label_2 . . . 395
12.26.3.10line . . . 395
12.26.3.11line_2 . . . 395
12.26.3.12rbWidget . . . 395
12.26.3.13resetButton . . . 395
12.26.3.14selectLabel . . . 395
12.26.3.15verticalLayout . . . 396
12.26.3.16verticalSpacer . . . 396
12.26.3.17widget . . . 396
12.27KbBindWidget Class Reference . . . 396
12.27.1 Detailed Description . . . 398
12.27.2 Constructor & Destructor Documentation . . . 399
12.27.2.1 KbBindWidget . . . 399
12.27.2.2 ∼KbBindWidget . . . 399
12.27.3 Member Function Documentation . . . 400
12.27.3.1 newLayout . . . 400
12.27.3.2 newSelection . . . 401
12.27.3.3 on_copyButton_clicked . . . 402
12.27.3.4 on_resetButton_clicked . . . 403
12.27.3.5 setBind . . . 404
12.27.3.6 updateBind . . . 405
12.27.3.7 updateSelDisplay . . . 406
12.27.4 Field Documentation . . . 407
12.27.4.1 bind . . . 407
12.27.4.2 currentSelection . . . 407
12.27.4.3 profile . . . 408
12.27.4.4 ui . . . 408
12.28KbFirmware Class Reference . . . 408
12.28.1 Detailed Description . . . 410

12.28.2 Member Enumeration Documentation . . . 411
12.28.2.1 anonymous enum . . . 411
12.28.3 Constructor & Destructor Documentation . . . 411
12.28.3.1 KbFirmware . . . 411
12.28.3.2 ~KbFirmware . . . 411
12.28.4 Member Function Documentation . . . 411
12.28.4.1 _checkUpdates . . . 411
12.28.4.2 _fileForBoard . . . 412
12.28.4.3 _latestForBoard . . . 413
12.28.4.4 checkUpdates . . . 414
12.28.4.5 dataForBoard . . . 414
12.28.4.6 downloaded . . . 415
12.28.4.7 downloadFinished . . . 415
12.28.4.8 hasDownloaded . . . 416
12.28.4.9 initManager . . . 416
12.28.4.10 processDownload . . . 417
12.28.4.11 versionForBoard . . . 418
12.28.5 Field Documentation . . . 419
12.28.5.1 fwTable . . . 419
12.28.5.2 fwTableHash . . . 419
12.28.5.3 hasGPG . . . 419
12.28.5.4 instance . . . 419
12.28.5.5 lastCheck . . . 419
12.28.5.6 lastFinished . . . 419
12.28.5.7 networkManager . . . 420
12.28.5.8 tableDownload . . . 420
12.29 KbLight Class Reference . . . 420
12.29.1 Detailed Description . . . 423
12.29.2 Member Typedef Documentation . . . 424
12.29.2.1 AnimList . . . 424
12.29.3 Constructor & Destructor Documentation . . . 424
12.29.3.1 KbLight . . . 424
12.29.3.2 KbLight . . . 424
12.29.3.3 ~KbLight . . . 425
12.29.4 Member Function Documentation . . . 425
12.29.4.1 addAnim . . . 425
12.29.4.2 animKeypress . . . 426
12.29.4.3 animList . . . 426
12.29.4.4 animList . . . 427
12.29.4.5 base . . . 427

12.29.4.6 close . . . 428
12.29.4.7 color . . . 429
12.29.4.8 color . . . 430
12.29.4.9 colorMap . . . 430
12.29.4.10 didLoad . . . 431
12.29.4.11 dimming . . . 431
12.29.4.12 dimming . . . 431
12.29.4.13 duplicateAnim . . . 432
12.29.4.14 findAnim . . . 433
12.29.4.15 findAnimIdx . . . 433
12.29.4.16 frameDisplayed . . . 434
12.29.4.17 frameUpdate . . . 434
12.29.4.18 isStarted . . . 436
12.29.4.19 load . . . 436
12.29.4.20 map . . . 438
12.29.4.21 map . . . 438
12.29.4.22 needsSave . . . 439
12.29.4.23 open . . . 440
12.29.4.24 previewAnim . . . 440
12.29.4.25 printRGB . . . 441
12.29.4.26 rebuildBaseMap . . . 442
12.29.4.27 resetIndicators . . . 443
12.29.4.28 restartAnimation . . . 443
12.29.4.29 save . . . 444
12.29.4.30 setIndicator . . . 445
12.29.4.31 shareDimming . . . 446
12.29.4.32 shareDimming . . . 446
12.29.4.33 stopPreview . . . 446
12.29.4.34 updated . . . 447
12.29.5 Field Documentation . . . 447
12.29.5.1 _animList . . . 447
12.29.5.2 _animMap . . . 448
12.29.5.3 _colorMap . . . 448
12.29.5.4 _dimming . . . 448
12.29.5.5 _indicatorList . . . 448
12.29.5.6 _indicatorMap . . . 448
12.29.5.7 _map . . . 448
12.29.5.8 _needsMapRefresh . . . 448
12.29.5.9 _needsSave . . . 448
12.29.5.10 _previewAnim . . . 448

12.29.5.11 _qColorMap . . . 449
12.29.5.12 _start . . . 449
12.29.5.13 lastFrameSignal . . . 449
12.29.5.14 MAX_DIM . . . 449
12.30 Ui::KbLightWidget Class Reference . . . 449
12.30.1 Detailed Description . . . 451
12.30.2 Member Function Documentation . . . 451
12.30.2.1 retranslateUi . . . 451
12.30.2.2 setupUi . . . 452
12.30.3 Field Documentation . . . 455
12.30.3.1 animButton . . . 455
12.30.3.2 animWidget . . . 455
12.30.3.3 bgButton . . . 455
12.30.3.4 brightnessBox . . . 455
12.30.3.5 gridLayout . . . 455
12.30.3.6 gridLayout_2 . . . 455
12.30.3.7 gridLayout_4 . . . 455
12.30.3.8 horizontalLayout . . . 456
12.30.3.9 horizontalLayout_2 . . . 456
12.30.3.10 horizontalLayout_3 . . . 456
12.30.3.11 horizontalSpacer_3 . . . 456
12.30.3.12 horizontalSpacer_4 . . . 456
12.30.3.13 horizontalSpacer_5 . . . 456
12.30.3.14 horizontalSpacer_6 . . . 456
12.30.3.15 keyWidget . . . 456
12.30.3.16 label . . . 457
12.30.3.17 label_2 . . . 457
12.30.3.18 label_3 . . . 457
12.30.3.19 line . . . 457
12.30.3.20 line_2 . . . 457
12.30.3.21 selLabel . . . 457
12.30.3.22 showAnimBox . . . 457
12.30.3.23 verticalLayout . . . 457
12.30.3.24 verticalSpacer_2 . . . 457
12.30.3.25 verticalSpacer_3 . . . 458
12.30.3.26 widget . . . 458
12.31 KbLightWidget Class Reference . . . 458
12.31.1 Detailed Description . . . 460
12.31.2 Constructor & Destructor Documentation . . . 460
12.31.2.1 KbLightWidget . . . 460

12.31.2.2 ~KbLightWidget . . . 461
12.31.3 Member Function Documentation . . . 461
12.31.3.1 changeAnim . . . 461
12.31.3.2 changeAnimKeys . . . 461
12.31.3.3 changeColor . . . 462
12.31.3.4 newSelection . . . 463
12.31.3.5 on_animButton_clicked . . . 464
12.31.3.6 on_bgButton_clicked . . . 465
12.31.3.7 on_brightnessBox_activated . . . 465
12.31.3.8 on_showAnimBox_clicked . . . 466
12.31.3.9 setLight . . . 466
12.31.3.10 setMonochrome . . . 468
12.31.3.11 toggleSidelight . . . 468
12.31.3.12 updateLight . . . 469
12.31.4 Field Documentation . . . 470
12.31.4.1 currentSelection . . . 470
12.31.4.2 light . . . 470
12.31.4.3 ui . . . 470
12.32 KbManager Class Reference . . . 471
12.32.1 Detailed Description . . . 473
12.32.2 Constructor & Destructor Documentation . . . 473
12.32.2.1 KbManager . . . 473
12.32.3 Member Function Documentation . . . 474
12.32.3.1 ckbDaemonVersion . . . 474
12.32.3.2 ckbDaemonVersionF . . . 474
12.32.3.3 ckbGuiVersion . . . 475
12.32.3.4 ckbGuiVersionF . . . 475
12.32.3.5 devices . . . 476
12.32.3.6 eventTimer . . . 476
12.32.3.7 fps . . . 476
12.32.3.8 init . . . 477
12.32.3.9 kbConnected . . . 478
12.32.3.10 kbDisconnected . . . 478
12.32.3.11 kbManager . . . 478
12.32.3.12 parseVersionString . . . 479
12.32.3.13 scanKeyboards . . . 479
12.32.3.14 scanTimer . . . 481
12.32.3.15 stop . . . 481
12.32.3.16 versionUpdated . . . 482
12.32.4 Field Documentation . . . 482

12.32.4.1 _daemonVersion . . . 482
12.32.4.2 _devices . . . 482
12.32.4.3 _eventTimer . . . 482
12.32.4.4 _guiVersion . . . 483
12.32.4.5 _kbManager . . . 483
12.32.4.6 _scanTimer . . . 483
12.33 KbMode Class Reference . . . 483
12.33.1 Detailed Description . . . 486
12.33.2 Constructor & Destructor Documentation . . . 486
12.33.2.1 KbMode . . . 486
12.33.2.2 KbMode . . . 487
12.33.2.3 KbMode . . . 487
12.33.2.4 ~KbMode . . . 488
12.33.3 Member Function Documentation . . . 488
12.33.3.1 bind . . . 488
12.33.3.2 doUpdate . . . 489
12.33.3.3 id . . . 489
12.33.3.4 id . . . 489
12.33.3.5 keyMap . . . 490
12.33.3.6 light . . . 491
12.33.3.7 name . . . 491
12.33.3.8 name . . . 491
12.33.3.9 needsSave . . . 492
12.33.3.10 newId . . . 492
12.33.3.11 perf . . . 493
12.33.3.12 save . . . 494
12.33.3.13 setNeedsSave . . . 494
12.33.3.14 setNeedsUpdate . . . 495
12.33.3.15 updated . . . 495
12.33.4 Field Documentation . . . 496
12.33.4.1 _bind . . . 496
12.33.4.2 _id . . . 496
12.33.4.3 _light . . . 496
12.33.4.4 _name . . . 496
12.33.4.5 _needsSave . . . 496
12.33.4.6 _perf . . . 496
12.34 KbPerf Class Reference . . . 497
12.34.1 Detailed Description . . . 500
12.34.2 Member Enumeration Documentation . . . 500
12.34.2.1 height . . . 500

12.34.2.2 i_hw . . . 501
12.34.2.3 indicator . . . 501
12.34.3 Constructor & Destructor Documentation . . . 501
12.34.3.1 KbPerf . . . 501
12.34.3.2 KbPerf . . . 502
12.34.4 Member Function Documentation . . . 503
12.34.4.1 _curDpi . . . 503
12.34.4.2 angleSnap . . . 503
12.34.4.3 angleSnap . . . 504
12.34.4.4 applyIndicators . . . 504
12.34.4.5 bind . . . 505
12.34.4.6 curDpi . . . 506
12.34.4.7 curDpi . . . 506
12.34.4.8 curDpi . . . 507
12.34.4.9 curDpiIdx . . . 508
12.34.4.10 curDpiIdx . . . 508
12.34.4.11 didLoad . . . 508
12.34.4.12 dpi . . . 509
12.34.4.13 dpi . . . 509
12.34.4.14 dpi . . . 510
12.34.4.15 dpiColor . . . 510
12.34.4.16 dpiColor . . . 511
12.34.4.17 dpiDown . . . 511
12.34.4.18 dpiEnabled . . . 512
12.34.4.19 dpiEnabled . . . 512
12.34.4.20 dpiIndicator . . . 512
12.34.4.21 dpiIndicator . . . 513
12.34.4.22 dpiUp . . . 513
12.34.4.23 getIndicator . . . 514
12.34.4.24 iOpacity . . . 514
12.34.4.25 iOpacity . . . 515
12.34.4.26 liftHeight . . . 515
12.34.4.27 liftHeight . . . 515
12.34.4.28 light . . . 515
12.34.4.29 lightIndicator . . . 516
12.34.4.30 load . . . 517
12.34.4.31 modeParent . . . 519
12.34.4.32 needsSave . . . 519
12.34.4.33 operator= . . . 519
12.34.4.34 popDpi . . . 520

12.34.4.35 pushDpi . . . 521
12.34.4.36 pushDpi . . . 521
12.34.4.37 pushSniper . . . 522
12.34.4.38 save . . . 523
12.34.4.39 setIndicator . . . 524
12.34.4.40 setNeedsUpdate . . . 524
12.34.4.41 settingsUpdated . . . 525
12.34.4.42 sniperDpi . . . 525
12.34.4.43 sniperDpi . . . 526
12.34.4.44 sniperDpi . . . 526
12.34.4.45 update . . . 527
12.34.5 Field Documentation . . . 528
12.34.5.1 _angleSnap . . . 528
12.34.5.2 _dpiIndicator . . . 528
12.34.5.3 _iOpacity . . . 528
12.34.5.4 _liftHeight . . . 528
12.34.5.5 _needsSave . . . 528
12.34.5.6 _needsUpdate . . . 529
12.34.5.7 DPI_COUNT . . . 529
12.34.5.8 DPI_MAX . . . 529
12.34.5.9 DPI_MIN . . . 529
12.34.5.10 dpiClr . . . 529
12.34.5.11 dpiCurIdx . . . 529
12.34.5.12 dpiCurX . . . 529
12.34.5.13 dpiCurY . . . 529
12.34.5.14 dpiLastIdx . . . 529
12.34.5.15 dpiOn . . . 530
12.34.5.16 dpiX . . . 530
12.34.5.17 dpiY . . . 530
12.34.5.18 HW_I_COUNT . . . 530
12.34.5.19 hwlType . . . 530
12.34.5.20 I_COUNT . . . 530
12.34.5.21 iColor . . . 530
12.34.5.22 iEnable . . . 530
12.34.5.23 light100Color . . . 530
12.34.5.24 muteNAColor . . . 531
12.34.5.25 OTHER . . . 531
12.34.5.26 pushedDpis . . . 531
12.34.5.27 runningPushIdx . . . 531
12.34.5.28 SNIPER . . . 531

12.35 KbProfile Class Reference . . . 531
12.35.1 Detailed Description . . . 534
12.35.2 Member Typedef Documentation . . . 534
12.35.2.1 ModeList . . . 534
12.35.3 Constructor & Destructor Documentation . . . 534
12.35.3.1 KbProfile . . . 534
12.35.3.2 KbProfile . . . 535
12.35.3.3 KbProfile . . . 535
12.35.4 Member Function Documentation . . . 536
12.35.4.1 append . . . 536
12.35.4.2 currentMode . . . 536
12.35.4.3 currentMode . . . 537
12.35.4.4 find . . . 537
12.35.4.5 id . . . 538
12.35.4.6 id . . . 538
12.35.4.7 indexOf . . . 539
12.35.4.8 insert . . . 539
12.35.4.9 keyMap . . . 540
12.35.4.10 keyMap . . . 540
12.35.4.11 modeCount . . . 541
12.35.4.12 modes . . . 541
12.35.4.13 modes . . . 542
12.35.4.14 move . . . 542
12.35.4.15 name . . . 543
12.35.4.16 name . . . 543
12.35.4.17 needsSave . . . 544
12.35.4.18 newId . . . 544
12.35.4.19 removeAll . . . 545
12.35.4.20 save . . . 546
12.35.4.21 setNeedsSave . . . 547
12.35.4.22 setNeedsUpdate . . . 547
12.35.5 Field Documentation . . . 548
12.35.5.1 _currentMode . . . 548
12.35.5.2 _id . . . 548
12.35.5.3 _keyMap . . . 548
12.35.5.4 _modes . . . 548
12.35.5.5 _name . . . 548
12.35.5.6 _needsSave . . . 548
12.36 KbProfileDialog Class Reference . . . 549
12.36.1 Detailed Description . . . 550

12.36.2 Constructor & Destructor Documentation . . . 551
12.36.2.1 KbProfileDialog . . . 551
12.36.2.2 ~KbProfileDialog . . . 551
12.36.3 Member Function Documentation . . . 551
12.36.3.1 addNewProfileItem . . . 551
12.36.3.2 on_profileList_currentItemChanged . . . 552
12.36.3.3 on_profileList_customContextMenuRequested . . . 552
12.36.3.4 on_profileList_itemChanged . . . 554
12.36.3.5 on_profileList_itemClicked . . . 555
12.36.3.6 profileList_reordered . . . 556
12.36.3.7 repopulate . . . 556
12.36.4 Field Documentation . . . 557
12.36.4.1 device . . . 557
12.36.4.2 GUID . . . 558
12.36.4.3 NEW_FLAG . . . 558
12.36.4.4 ui . . . 558
12.37 Ui::KbProfileDialog Class Reference . . . 558
12.37.1 Detailed Description . . . 560
12.37.2 Member Function Documentation . . . 560
12.37.2.1 retranslateUi . . . 560
12.37.2.2 setupUi . . . 561
12.37.3 Field Documentation . . . 562
12.37.3.1 buttonBox . . . 562
12.37.3.2 gridLayout . . . 562
12.37.3.3 horizontalSpacer . . . 562
12.37.3.4 horizontalSpacer_2 . . . 562
12.37.3.5 profileList . . . 562
12.38 KbWidget Class Reference . . . 563
12.38.1 Detailed Description . . . 565
12.38.2 Constructor & Destructor Documentation . . . 565
12.38.2.1 KbWidget . . . 565
12.38.2.2 ~KbWidget . . . 567
12.38.3 Member Function Documentation . . . 567
12.38.3.1 addNewModeItem . . . 567
12.38.3.2 devUpdate . . . 568
12.38.3.3 modeChanged . . . 568
12.38.3.4 modeIcon . . . 570
12.38.3.5 modesList_reordered . . . 571
12.38.3.6 modeUpdate . . . 572
12.38.3.7 name . . . 572

12.38.3.8 on_fwUpdButton_clicked . . . 573
12.38.3.9 on_hwSaveButton_clicked . . . 574
12.38.3.10 on_modesList_currentItemChanged . . . 575
12.38.3.11 on_modesList_customContextMenuRequested . . . 576
12.38.3.12 on_modesList_itemChanged . . . 578
12.38.3.13 on_modesList_itemClicked . . . 578
12.38.3.14 on_profileBox_activated . . . 579
12.38.3.15 on_tabWidget_currentChanged . . . 579
12.38.3.16 profileChanged . . . 580
12.38.3.17 showFirstTab . . . 581
12.38.3.18 showFwUpdate . . . 581
12.38.3.19 showLastTab . . . 582
12.38.3.20 updateFwButton . . . 582
12.38.3.21 updateProfileList . . . 583
12.38.4 Field Documentation . . . 584
12.38.4.1 currentMode . . . 584
12.38.4.2 device . . . 584
12.38.4.3 GUID . . . 585
12.38.4.4 hasShownNewFW . . . 585
12.38.4.5 lastAutoSave . . . 585
12.38.4.6 NEW_FLAG . . . 585
12.38.4.7 ui . . . 585
12.39 Ui::KbWidget Class Reference . . . 585
12.39.1 Detailed Description . . . 587
12.39.2 Member Function Documentation . . . 587
12.39.2.1 retranslateUi . . . 587
12.39.2.2 setupUi . . . 588
12.39.3 Field Documentation . . . 591
12.39.3.1 bindTab . . . 591
12.39.3.2 bindWidget . . . 591
12.39.3.3 devTab . . . 591
12.39.3.4 fwLabel . . . 591
12.39.3.5 fwUpdButton . . . 592
12.39.3.6 fwUpdLabel . . . 592
12.39.3.7 fwUpdLayout . . . 592
12.39.3.8 gridLayout . . . 592
12.39.3.9 gridLayout_2 . . . 592
12.39.3.10 gridLayout_3 . . . 592
12.39.3.11 gridLayout_4 . . . 592
12.39.3.12 gridLayout_5 . . . 592

12.39.3.13 gridLayout_7 . . . 592
12.39.3.14 horizontalSpacer_2 . . . 593
12.39.3.15 horizontalSpacer_3 . . . 593
12.39.3.16 hwSaveButton . . . 593
12.39.3.17 kPerfTab . . . 593
12.39.3.18 kPerfWidget . . . 593
12.39.3.19 label_3 . . . 593
12.39.3.20 label_4 . . . 593
12.39.3.21 label_9 . . . 593
12.39.3.22 lightTab . . . 593
12.39.3.23 lightWidget . . . 594
12.39.3.24 modesList . . . 594
12.39.3.25 mPerfTab . . . 594
12.39.3.26 mPerfWidget . . . 594
12.39.3.27 pollLabel . . . 594
12.39.3.28 pollLabel2 . . . 594
12.39.3.29 profileBox . . . 594
12.39.3.30 serialLabel . . . 594
12.39.3.31 tabWidget . . . 594
12.39.3.32 verticalSpacer . . . 595
12.40 Key Struct Reference . . . 595
12.40.1 Detailed Description . . . 596
12.40.2 Member Function Documentation . . . 596
12.40.2.1 friendlyName . . . 596
12.40.2.2 operator bool . . . 596
12.40.2.3 operator! . . . 597
12.40.2.4 storageName . . . 597
12.40.3 Field Documentation . . . 597
12.40.3.1 _friendlyName . . . 597
12.40.3.2 _storageName . . . 597
12.40.3.3 hasLed . . . 597
12.40.3.4 hasScan . . . 597
12.40.3.5 height . . . 598
12.40.3.6 name . . . 598
12.40.3.7 width . . . 598
12.40.3.8 x . . . 598
12.40.3.9 y . . . 598
12.41 KeyAction Class Reference . . . 598
12.41.1 Detailed Description . . . 602
12.41.2 Member Enumeration Documentation . . . 602

12.41.2.1 Type . . . 602
12.41.3 Constructor & Destructor Documentation . . . 603
12.41.3.1 KeyAction . . . 603
12.41.3.2 KeyAction . . . 603
12.41.3.3 ~KeyAction . . . 603
12.41.3.4 KeyAction . . . 603
12.41.4 Member Function Documentation . . . 603
12.41.4.1 adjustDisplay . . . 603
12.41.4.2 animAction . . . 604
12.41.4.3 animInfo . . . 605
12.41.4.4 defaultAction . . . 605
12.41.4.5 dpiAction . . . 606
12.41.4.6 dpiInfo . . . 607
12.41.4.7 driverName . . . 607
12.41.4.8 friendlyName . . . 608
12.41.4.9 isAnim . . . 609
12.41.4.10 isDPI . . . 610
12.41.4.11 isMacro . . . 610
12.41.4.12 isMedia . . . 610
12.41.4.13 isMouse . . . 611
12.41.4.14 isNormal . . . 611
12.41.4.15 isProgram . . . 612
12.41.4.16 isSpecial . . . 612
12.41.4.17 isUnbound . . . 613
12.41.4.18 isValidMacro . . . 613
12.41.4.19 keyEvent . . . 614
12.41.4.20 keyRelease . . . 617
12.41.4.21 lightAction . . . 617
12.41.4.22 lockAction . . . 618
12.41.4.23 macroAction . . . 618
12.41.4.24 macroContent . . . 619
12.41.4.25 macroDisplay . . . 619
12.41.4.26 macroFullLine . . . 620
12.41.4.27 macroLine . . . 621
12.41.4.28 macroTiming . . . 621
12.41.4.29 modeAction . . . 622
12.41.4.30 noAction . . . 623
12.41.4.31 operator QString . . . 623
12.41.4.32 operator= . . . 623
12.41.4.33 programAction . . . 623

12.41.4.34 programInfo . . . 623
12.41.4.35 specialInfo . . . 624
12.41.4.36 type . . . 625
12.41.4.37 value . . . 625
12.41.5 Field Documentation . . . 625
12.41.5.1 _value . . . 625
12.41.5.2 DPI_CUSTOM . . . 626
12.41.5.3 DPI_DOWN . . . 626
12.41.5.4 DPI_SNIPER . . . 626
12.41.5.5 DPI_UP . . . 626
12.41.5.6 LIGHT_DOWN . . . 626
12.41.5.7 LIGHT_DOWN_WRAP . . . 626
12.41.5.8 LIGHT_UP . . . 626
12.41.5.9 LIGHT_UP_WRAP . . . 626
12.41.5.10 LOCK_OFF . . . 626
12.41.5.11 LOCK_ON . . . 627
12.41.5.12 LOCK_TOGGLE . . . 627
12.41.5.13 MODE_NEXT . . . 627
12.41.5.14 MODE_NEXT_WRAP . . . 627
12.41.5.15 MODE_PREV . . . 627
12.41.5.16 MODE_PREV_WRAP . . . 627
12.41.5.17 preProgram . . . 627
12.41.5.18 PROGRAM_PR_INDEF . . . 627
12.41.5.19 PROGRAM_PR_KPSTOP . . . 627
12.41.5.20 PROGRAM_PR_KRSTOP . . . 628
12.41.5.21 PROGRAM_PR_MULTI . . . 628
12.41.5.22 PROGRAM_RE_INDEF . . . 628
12.41.5.23 PROGRAM_RE_KPSTOP . . . 628
12.41.5.24 PROGRAM_RE_MULTI . . . 628
12.41.5.25 relProgram . . . 628
12.41.5.26 sniperValue . . . 628
12.42 KeyMap Class Reference . . . 628
12.42.1 Detailed Description . . . 631
12.42.2 Member Enumeration Documentation . . . 631
12.42.2.1 Layout . . . 631
12.42.2.2 Model . . . 631
12.42.3 Constructor & Destructor Documentation . . . 632
12.42.3.1 KeyMap . . . 632
12.42.3.2 KeyMap . . . 632
12.42.4 Member Function Documentation . . . 633

12.42.4.1 byPosition . . . 633
12.42.4.2 contains . . . 633
12.42.4.3 count . . . 634
12.42.4.4 friendlyName . . . 634
12.42.4.5 fromName . . . 636
12.42.4.6 fromStorage . . . 636
12.42.4.7 getLayout . . . 637
12.42.4.8 getLayout . . . 638
12.42.4.9 getModel . . . 638
12.42.4.10 getModel . . . 639
12.42.4.11 height . . . 639
12.42.4.12 isISO . . . 639
12.42.4.13 isISO . . . 640
12.42.4.14 isKeyboard . . . 640
12.42.4.15 isKeyboard . . . 641
12.42.4.16 isMouse . . . 642
12.42.4.17 isMouse . . . 642
12.42.4.18 key . . . 643
12.42.4.19 keys . . . 643
12.42.4.20 layout . . . 644
12.42.4.21 layoutNames . . . 644
12.42.4.22 locale . . . 645
12.42.4.23 map . . . 646
12.42.4.24 model . . . 646
12.42.4.25 modelHeight . . . 647
12.42.4.26 modelWidth . . . 647
12.42.4.27 name . . . 647
12.42.4.28 operator const QHash< QString, Key > & . . . 648
12.42.4.29 operator[] . . . 648
12.42.4.30 positions . . . 648
12.42.4.31 strLayout . . . 649
12.42.4.32 strModel . . . 649
12.42.4.33 toStorage . . . 650
12.42.4.34 width . . . 650
12.42.5 Field Documentation . . . 651
12.42.5.1 _keys . . . 651
12.42.5.2 keyHeight . . . 651
12.42.5.3 keyLayout . . . 651
12.42.5.4 keyModel . . . 651
12.42.5.5 keyWidth . . . 651

12.43 KeyWidget Class Reference . . . 651
12.43.1 Detailed Description . . . 654
12.43.2 Member Typedef Documentation . . . 654
12.43.2.1 BindMap . . . 654
12.43.3 Member Enumeration Documentation . . . 655
12.43.3.1 anonymous enum . . . 655
12.43.4 Constructor & Destructor Documentation . . . 655
12.43.4.1 KeyWidget . . . 655
12.43.5 Member Function Documentation . . . 655
12.43.5.1 bindMap . . . 655
12.43.5.2 bindMap . . . 656
12.43.5.3 clearAnimation . . . 656
12.43.5.4 clearSelection . . . 656
12.43.5.5 colorMap . . . 657
12.43.5.6 colorMap . . . 657
12.43.5.7 displayColorMap . . . 657
12.43.5.8 drawInfo . . . 658
12.43.5.9 map . . . 658
12.43.5.10 map . . . 659
12.43.5.11 monochrome . . . 659
12.43.5.12 monochrome . . . 660
12.43.5.13 mouseMoveEvent . . . 660
12.43.5.14 mousePressEvent . . . 661
12.43.5.15 mouseReleaseEvent . . . 662
12.43.5.16 paintEvent . . . 663
12.43.5.17 rgbMode . . . 668
12.43.5.18 rgbMode . . . 669
12.43.5.19 selectAll . . . 669
12.43.5.20 selectionChanged . . . 670
12.43.5.21 setAnimation . . . 670
12.43.5.22 setAnimationToSelection . . . 671
12.43.5.23 setSelection . . . 671
12.43.5.24 sidelightToggled . . . 672
12.43.6 Field Documentation . . . 672
12.43.6.1 _bindMap . . . 672
12.43.6.2 _colorMap . . . 673
12.43.6.3 _displayColorMap . . . 673
12.43.6.4 _indicators . . . 673
12.43.6.5 _monochrome . . . 673
12.43.6.6 _rgbMode . . . 673

12.43.6.7 animation . . . 673
12.43.6.8 keyMap . . . 673
12.43.6.9 mouseCurrentX . . . 673
12.43.6.10 mouseCurrentY . . . 673
12.43.6.11 mouseDownMode . . . 674
12.43.6.12 mouseDownX . . . 674
12.43.6.13 mouseDownY . . . 674
12.43.6.14 newSelection . . . 674
12.43.6.15 selection . . . 674
12.44 Ui::KPerfWidget Class Reference . . . 674
12.44.1 Detailed Description . . . 678
12.44.2 Member Function Documentation . . . 678
12.44.2.1 retranslateUi . . . 678
12.44.2.2 setupUi . . . 679
12.44.3 Field Documentation . . . 686
12.44.3.1 capsBox . . . 686
12.44.3.2 capsColorOff . . . 686
12.44.3.3 capsColorOn . . . 686
12.44.3.4 copyButton . . . 686
12.44.3.5 gridLayout . . . 686
12.44.3.6 horizontalLayout . . . 686
12.44.3.7 horizontalLayout_2 . . . 686
12.44.3.8 horizontalSpacer . . . 687
12.44.3.9 horizontalSpacer_2 . . . 687
12.44.3.10 horizontalSpacer_3 . . . 687
12.44.3.11 horizontalSpacer_4 . . . 687
12.44.3.12 horizontalSpacer_5 . . . 687
12.44.3.13 horizontalSpacer_6 . . . 687
12.44.3.14 horizontalSpacer_7 . . . 687
12.44.3.15 horizontalSpacer_8 . . . 687
12.44.3.16 intensityBox . . . 687
12.44.3.17 k95Label1 . . . 688
12.44.3.18 k95Label2 . . . 688
12.44.3.19 k95Label3 . . . 688
12.44.3.20 k95Label4 . . . 688
12.44.3.21 k95Label5 . . . 688
12.44.3.22 k95Label6 . . . 688
12.44.3.23 k95Line . . . 688
12.44.3.24 k95Spacer . . . 688
12.44.3.25 label . . . 688

12.44.3.26 label_10 . . . 689
12.44.3.27 label_11 . . . 689
12.44.3.28 label_12 . . . 689
12.44.3.29 label_14 . . . 689
12.44.3.30 label_15 . . . 689
12.44.3.31 label_16 . . . 689
12.44.3.32 label_17 . . . 689
12.44.3.33 label_18 . . . 689
12.44.3.34 label_19 . . . 689
12.44.3.35 label_2 . . . 690
12.44.3.36 label_20 . . . 690
12.44.3.37 label_21 . . . 690
12.44.3.38 label_22 . . . 690
12.44.3.39 label_23 . . . 690
12.44.3.40 label_24 . . . 690
12.44.3.41 label_3 . . . 690
12.44.3.42 label_4 . . . 690
12.44.3.43 label_5 . . . 690
12.44.3.44 label_6 . . . 691
12.44.3.45 label_7 . . . 691
12.44.3.46 label_8 . . . 691
12.44.3.47 lightBox . . . 691
12.44.3.48 lightColor1 . . . 691
12.44.3.49 lightColor2 . . . 691
12.44.3.50 lightColor3 . . . 691
12.44.3.51 line . . . 691
12.44.3.52 line_2 . . . 691
12.44.3.53 line_3 . . . 692
12.44.3.54 lockBox . . . 692
12.44.3.55 lockColorOff . . . 692
12.44.3.56 lockColorOn . . . 692
12.44.3.57 macroBox . . . 692
12.44.3.58 macroColorOff . . . 692
12.44.3.59 macroColorOn . . . 692
12.44.3.60 modeBox . . . 692
12.44.3.61 modeColorOff . . . 692
12.44.3.62 modeColorOn . . . 693
12.44.3.63 muteBox . . . 693
12.44.3.64 muteColorNA . . . 693
12.44.3.65 muteColorOff . . . 693

12.44.3.66 muteColorOn . . . 693
12.44.3.67 numBox . . . 693
12.44.3.68 numColorOff . . . 693
12.44.3.69 numColorOn . . . 693
12.44.3.70 scrollBox . . . 693
12.44.3.71 scrollColorOff . . . 694
12.44.3.72 scrollColorOn . . . 694
12.44.3.73 verticalSpacer . . . 694
12.44.3.74 verticalSpacer_2 . . . 694
12.44.3.75 verticalSpacer_3 . . . 694
12.44.3.76 verticalSpacer_4 . . . 694
12.45 KPerfWidget Class Reference . . . 694
12.45.1 Detailed Description . . . 697
12.45.2 Data Structure Documentation . . . 697
12.45.2.1 struct KPerfWidget::IndicatorUi . . . 697
12.45.3 Member Typedef Documentation . . . 698
12.45.3.1 i_hw . . . 699
12.45.3.2 indicator . . . 699
12.45.4 Member Enumeration Documentation . . . 699
12.45.4.1 HwMode . . . 699
12.45.5 Constructor & Destructor Documentation . . . 699
12.45.5.1 KPerfWidget . . . 699
12.45.5.2 ~KPerfWidget . . . 701
12.45.6 Member Function Documentation . . . 701
12.45.6.1 mode2Raw . . . 701
12.45.6.2 on_copyButton_clicked . . . 702
12.45.6.3 on_intensityBox_valueChanged . . . 703
12.45.6.4 raw2Mode . . . 703
12.45.6.5 setPerf . . . 704
12.45.6.6 uiUpdated . . . 705
12.45.7 Field Documentation . . . 706
12.45.7.1 HW_I_COUNT . . . 706
12.45.7.2 I_COUNT . . . 707
12.45.7.3 indicators . . . 707
12.45.7.4 k95Widgets . . . 707
12.45.7.5 perf . . . 707
12.45.7.6 profile . . . 707
12.45.7.7 ui . . . 707
12.45.7.8 updateMapper . . . 707
12.46 Ui::LayoutDialog Class Reference . . . 707

12.46.1 Detailed Description . . . 709
12.46.2 Member Function Documentation . . . 709
12.46.2.1 retranslateUi . . . 709
12.46.2.2 setupUi . . . 710
12.46.3 Field Documentation . . . 711
12.46.3.1 buttonBox . . . 711
12.46.3.2 comboBox . . . 711
12.46.3.3 gridLayout . . . 711
12.46.3.4 horizontalSpacer . . . 711
12.46.3.5 horizontalSpacer_2 . . . 711
12.46.3.6 label . . . 712
12.46.3.7 label_2 . . . 712
12.46.3.8 verticalSpacer . . . 712
12.46.3.9 verticalSpacer_2 . . . 712
12.46.3.10 verticalSpacer_3 . . . 712
12.46.3.11 verticalSpacer_4 . . . 712
12.47 LayoutDialog Class Reference . . . 712
12.47.1 Detailed Description . . . 714
12.47.2 Constructor & Destructor Documentation . . . 714
12.47.2.1 LayoutDialog . . . 714
12.47.2.2 ~LayoutDialog . . . 714
12.47.3 Member Function Documentation . . . 715
12.47.3.1 selected . . . 715
12.47.4 Field Documentation . . . 715
12.47.4.1 ui . . . 715
12.48 MacroReader Class Reference . . . 715
12.48.1 Detailed Description . . . 717
12.48.2 Constructor & Destructor Documentation . . . 718
12.48.2.1 MacroReader . . . 718
12.48.2.2 MacroReader . . . 718
12.48.2.3 ~MacroReader . . . 718
12.48.3 Member Function Documentation . . . 718
12.48.3.1 startWorkInAThread . . . 718
12.48.4 Field Documentation . . . 719
12.48.4.1 macroReaderThread . . . 719
12.49 MacroReaderThread Class Reference . . . 719
12.49.1 Detailed Description . . . 721
12.49.2 Constructor & Destructor Documentation . . . 721
12.49.2.1 MacroReaderThread . . . 721
12.49.3 Member Function Documentation . . . 722

12.49.3.1 readMacro . . . 722
12.49.3.2 run . . . 722
12.49.4 Field Documentation . . . 723
12.49.4.1 macroBox . . . 723
12.49.4.2 macroNumber . . . 723
12.49.4.3 macroPath . . . 723
12.49.4.4 macroText . . . 723
12.50 Ui::MainWindow Class Reference . . . 723
12.50.1 Detailed Description . . . 725
12.50.2 Member Function Documentation . . . 725
12.50.2.1 retranslateUi . . . 725
12.50.2.2 setupUi . . . 725
12.50.3 Field Documentation . . . 726
12.50.3.1 actionAbout . . . 726
12.50.3.2 actionExit . . . 726
12.50.3.3 centralWidget . . . 727
12.50.3.4 gridLayout . . . 727
12.50.3.5 tabWidget . . . 727
12.51 MainWindow Class Reference . . . 727
12.51.1 Detailed Description . . . 730
12.51.2 Constructor & Destructor Documentation . . . 730
12.51.2.1 MainWindow . . . 730
12.51.2.2 ~MainWindow . . . 731
12.51.3 Member Function Documentation . . . 732
12.51.3.1 addDevice . . . 732
12.51.3.2 checkFwUpdates . . . 733
12.51.3.3 cleanup . . . 733
12.51.3.4 closeEvent . . . 734
12.51.3.5 iconClicked . . . 735
12.51.3.6 quitApp . . . 735
12.51.3.7 removeDevice . . . 736
12.51.3.8 showFwUpdateNotification . . . 736
12.51.3.9 showWindow . . . 737
12.51.3.10 stateChange . . . 738
12.51.3.11 timerTick . . . 738
12.51.3.12 toggleTrayIcon . . . 739
12.51.3.13 updateVersion . . . 740
12.51.4 Field Documentation . . . 741
12.51.4.1 closeAction . . . 741
12.51.4.2 kbWidgets . . . 741

12.51.4.3 mainWindow . . . 741
12.51.4.4 restoreAction . . . 741
12.51.4.5 settingsWidget . . . 741
12.51.4.6 trayIcon . . . 741
12.51.4.7 trayIconMenu . . . 741
12.51.4.8 ui . . . 742
12.52Ui::ModeSelectDialog Class Reference . . . 742
12.52.1 Detailed Description . . . 743
12.52.2 Member Function Documentation . . . 743
12.52.2.1 retranslateUi . . . 743
12.52.2.2 setupUi . . . 744
12.52.3 Field Documentation . . . 745
12.52.3.1 buttonBox . . . 745
12.52.3.2 gridLayout . . . 745
12.52.3.3 label . . . 745
12.52.3.4 modeList . . . 745
12.52.3.5 selAllButton . . . 745
12.52.3.6 selNoneButton . . . 746
12.53ModeSelectDialog Class Reference . . . 746
12.53.1 Detailed Description . . . 747
12.53.2 Constructor & Destructor Documentation . . . 748
12.53.2.1 ModeSelectDialog . . . 748
12.53.2.2 ∼ModeSelectDialog . . . 748
12.53.3 Member Function Documentation . . . 748
12.53.3.1 on_selAllButton_clicked . . . 748
12.53.3.2 on_selNoneButton_clicked . . . 749
12.53.3.3 selection . . . 749
12.53.4 Field Documentation . . . 749
12.53.4.1 _modeList . . . 749
12.53.4.2 ui . . . 749
12.54Ui::MPerfWidget Class Reference . . . 750
12.54.1 Detailed Description . . . 752
12.54.2 Member Function Documentation . . . 753
12.54.2.1 retranslateUi . . . 753
12.54.2.2 setupUi . . . 754
12.54.3 Field Documentation . . . 761
12.54.3.1 aSnapBox . . . 761
12.54.3.2 copyButton . . . 761
12.54.3.3 eBox1 . . . 761
12.54.3.4 eBox2 . . . 762

12.54.3.5 eBox3 . . . 762
12.54.3.6 eBox4 . . . 762
12.54.3.7 eBox5 . . . 762
12.54.3.8 gridLayout . . . 762
12.54.3.9 horizontalLayout . . . 762
12.54.3.10 horizontalLayout_2 . . . 762
12.54.3.11 horizontalLayout_4 . . . 762
12.54.3.12 horizontalSpacer . . . 762
12.54.3.13 horizontalSpacer_2 . . . 763
12.54.3.14 horizontalSpacer_3 . . . 763
12.54.3.15 horizontalSpacer_4 . . . 763
12.54.3.16 horizontalSpacer_5 . . . 763
12.54.3.17 horizontalSpacer_6 . . . 763
12.54.3.18 horizontalSpacer_7 . . . 763
12.54.3.19 iButton0 . . . 763
12.54.3.20 iButton1 . . . 763
12.54.3.21 iButton2 . . . 763
12.54.3.22 iButton3 . . . 764
12.54.3.23 iButton4 . . . 764
12.54.3.24 iButton5 . . . 764
12.54.3.25 iButtonO . . . 764
12.54.3.26 indicBox . . . 764
12.54.3.27 label . . . 764
12.54.3.28 label_11 . . . 764
12.54.3.29 label_12 . . . 764
12.54.3.30 label_13 . . . 764
12.54.3.31 label_14 . . . 765
12.54.3.32 label_15 . . . 765
12.54.3.33 label_2 . . . 765
12.54.3.34 label_25 . . . 765
12.54.3.35 label_3 . . . 765
12.54.3.36 label_4 . . . 765
12.54.3.37 label_5 . . . 765
12.54.3.38 label_6 . . . 765
12.54.3.39 label_7 . . . 765
12.54.3.40 label_8 . . . 766
12.54.3.41 lHeightBox . . . 766
12.54.3.42 line . . . 766
12.54.3.43 line_2 . . . 766
12.54.3.44 line_3 . . . 766

12.54.3.45 spinBox . . . 766
12.54.3.46 verticalLayout . . . 766
12.54.3.47 verticalSpacer . . . 766
12.54.3.48 verticalSpacer_2 . . . 766
12.54.3.49 verticalSpacer_3 . . . 767
12.54.3.50 xBox0 . . . 767
12.54.3.51 xBox1 . . . 767
12.54.3.52 xBox2 . . . 767
12.54.3.53 xBox3 . . . 767
12.54.3.54 xBox4 . . . 767
12.54.3.55 xBox5 . . . 767
12.54.3.56 xSlider0 . . . 767
12.54.3.57 xSlider1 . . . 767
12.54.3.58 xSlider2 . . . 768
12.54.3.59 xSlider3 . . . 768
12.54.3.60 xSlider4 . . . 768
12.54.3.61 xSlider5 . . . 768
12.54.3.62 xyBox . . . 768
12.54.3.63 yBox0 . . . 768
12.54.3.64 yBox1 . . . 768
12.54.3.65 yBox2 . . . 768
12.54.3.66 yBox3 . . . 768
12.54.3.67 yBox4 . . . 769
12.54.3.68 yBox5 . . . 769
12.54.3.69 ySlider0 . . . 769
12.54.3.70 ySlider1 . . . 769
12.54.3.71 ySlider2 . . . 769
12.54.3.72 ySlider3 . . . 769
12.54.3.73 ySlider4 . . . 769
12.54.3.74 ySlider5 . . . 769
12.55 MPerfWidget Class Reference . . . 769
12.55.1 Detailed Description . . . 772
12.55.2 Data Structure Documentation . . . 772
12.55.2.1 struct MPerfWidget::DpiUi . . . 772
12.55.3 Constructor & Destructor Documentation . . . 773
12.55.3.1 MPerfWidget . . . 773
12.55.3.2 ~MPerfWidget . . . 775
12.55.4 Member Function Documentation . . . 775
12.55.4.1 boxXChanged . . . 775
12.55.4.2 boxYChanged . . . 776

12.55.4.3 colorChanged . . . 777
12.55.4.4 colorClicked . . . 778
12.55.4.5 enableChanged . . . 778
12.55.4.6 on_aSnapBox_clicked . . . 779
12.55.4.7 on_copyButton_clicked . . . 779
12.55.4.8 on_indicBox_clicked . . . 780
12.55.4.9 on_lHeightBox_activated . . . 780
12.55.4.10 on_spinBox_valueChanged . . . 781
12.55.4.11 on_xyBox_clicked . . . 781
12.55.4.12 setPerf . . . 782
12.55.4.13 sliderXMoved . . . 783
12.55.4.14 sliderYMoved . . . 784
12.55.5 Field Documentation . . . 785
12.55.5.1 _xyLink . . . 785
12.55.5.2 boxXMapper . . . 785
12.55.5.3 boxYMapper . . . 785
12.55.5.4 buttonMapper1 . . . 785
12.55.5.5 buttonMapper2 . . . 786
12.55.5.6 colorLink . . . 786
12.55.5.7 DPI_COUNT . . . 786
12.55.5.8 DPI_MAX . . . 786
12.55.5.9 DPI_MIN . . . 786
12.55.5.10 enableMapper . . . 786
12.55.5.11 isSetting . . . 786
12.55.5.12 perf . . . 786
12.55.5.13 profile . . . 786
12.55.5.14 sliderXMapper . . . 786
12.55.5.15 sliderYMapper . . . 787
12.55.5.16 stages . . . 787
12.55.5.17 ui . . . 787
12.56 GradientDialog::Preset Struct Reference . . . 787
12.56.1 Detailed Description . . . 788
12.56.2 Constructor & Destructor Documentation . . . 788
12.56.2.1 Preset . . . 788
12.56.2.2 Preset . . . 788
12.56.2.3 Preset . . . 788
12.56.3 Field Documentation . . . 788
12.56.3.1 builtIn . . . 788
12.56.3.2 gradient . . . 788
12.56.3.3 name . . . 789

12.57 QDialog Class Reference . . . 789
12.58 QIODevice Class Reference . . . 790
12.59 QIODevice_descriptor Struct Reference . . . 791
12.59.1 Detailed Description . . . 791
12.59.2 Constructor & Destructor Documentation . . . 791
12.59.2.1 QIODevice_descriptor . . . 791
12.59.3 Field Documentation . . . 791
12.59.3.1 pos . . . 791
12.60 QListWidget Class Reference . . . 792
12.61 QMainWindow Class Reference . . . 793
12.62 QObject Class Reference . . . 794
12.63 QPushButton Class Reference . . . 795
12.64 QThread Class Reference . . . 796
12.65 QuaAdler32 Class Reference . . . 797
12.65.1 Detailed Description . . . 798
12.65.2 Constructor & Destructor Documentation . . . 799
12.65.2.1 QuaAdler32 . . . 799
12.65.3 Member Function Documentation . . . 799
12.65.3.1 calculate . . . 799
12.65.3.2 reset . . . 799
12.65.3.3 update . . . 800
12.65.3.4 value . . . 800
12.65.4 Field Documentation . . . 800
12.65.4.1 checksum . . . 800
12.66 QuaChecksum32 Class Reference . . . 800
12.66.1 Detailed Description . . . 802
12.66.2 Member Function Documentation . . . 802
12.66.2.1 calculate . . . 802
12.66.2.2 reset . . . 802
12.66.2.3 update . . . 802
12.66.2.4 value . . . 802
12.67 QuaCrc32 Class Reference . . . 803
12.67.1 Detailed Description . . . 804
12.67.2 Constructor & Destructor Documentation . . . 805
12.67.2.1 QuaCrc32 . . . 805
12.67.3 Member Function Documentation . . . 805
12.67.3.1 calculate . . . 805
12.67.3.2 reset . . . 805
12.67.3.3 update . . . 806
12.67.3.4 value . . . 806

12.67.4 Field Documentation . . . 806
12.67.4.1 checksum . . . 806
12.68 QuaGzipFile Class Reference . . . 806
12.68.1 Detailed Description . . . 809
12.68.2 Constructor & Destructor Documentation . . . 809
12.68.2.1 QuaGzipFile . . . 809
12.68.2.2 QuaGzipFile . . . 809
12.68.2.3 QuaGzipFile . . . 810
12.68.2.4 ~QuaGzipFile . . . 810
12.68.2.5 QuaGzipFile . . . 810
12.68.3 Member Function Documentation . . . 810
12.68.3.1 close . . . 810
12.68.3.2 flush . . . 811
12.68.3.3 getFileName . . . 811
12.68.3.4 isSequential . . . 811
12.68.3.5 open . . . 811
12.68.3.6 open . . . 812
12.68.3.7 operator= . . . 812
12.68.3.8 readData . . . 812
12.68.3.9 setFileName . . . 812
12.68.3.10 writeData . . . 813
12.68.4 Field Documentation . . . 813
12.68.4.1 d . . . 813
12.69 QuaZIODevice Class Reference . . . 813
12.69.1 Detailed Description . . . 816
12.69.2 Constructor & Destructor Documentation . . . 816
12.69.2.1 QuaZIODevice . . . 816
12.69.2.2 ~QuaZIODevice . . . 816
12.69.3 Member Function Documentation . . . 816
12.69.3.1 close . . . 816
12.69.3.2 flush . . . 817
12.69.3.3 getIoDevice . . . 818
12.69.3.4 isSequential . . . 818
12.69.3.5 open . . . 818
12.69.3.6 readData . . . 819
12.69.3.7 writeData . . . 820
12.69.4 Field Documentation . . . 820
12.69.4.1 d . . . 820
12.70 QuaZip Class Reference . . . 821
12.70.1 Detailed Description . . . 823

12.70.2 Member Enumeration Documentation . . . 824
12.70.2.1 CaseSensitivity . . . 824
12.70.2.2 Constants . . . 824
12.70.2.3 Mode . . . 824
12.70.3 Constructor & Destructor Documentation . . . 825
12.70.3.1 QuaZip . . . 825
12.70.3.2 QuaZip . . . 825
12.70.3.3 QuaZip . . . 825
12.70.3.4 QuaZip . . . 825
12.70.3.5 ∼QuaZip . . . 825
12.70.4 Member Function Documentation . . . 826
12.70.4.1 close . . . 826
12.70.4.2 convertCaseSensitivity . . . 827
12.70.4.3 getComment . . . 828
12.70.4.4 getCommentCodec . . . 828
12.70.4.5 getCurrentFileInfo . . . 829
12.70.4.6 getCurrentFileInfo . . . 830
12.70.4.7 getCurrentFileName . . . 831
12.70.4.8 getEntriesCount . . . 832
12.70.4.9 getFileInfoList . . . 833
12.70.4.10 getFileInfoList64 . . . 834
12.70.4.11 getFileNameCodec . . . 834
12.70.4.12 getFileNameList . . . 835
12.70.4.13 getIoDevice . . . 835
12.70.4.14 getMode . . . 835
12.70.4.15 getUnzFile . . . 836
12.70.4.16 getZipError . . . 837
12.70.4.17 getZipFile . . . 838
12.70.4.18 getZipName . . . 838
12.70.4.19 goToFirstFile . . . 839
12.70.4.20 goToNextFile . . . 840
12.70.4.21 hasCurrentFile . . . 841
12.70.4.22 isAutoClose . . . 841
12.70.4.23 isDataDescriptorWritingEnabled . . . 841
12.70.4.24 isOpen . . . 842
12.70.4.25 isZip64Enabled . . . 842
12.70.4.26 open . . . 843
12.70.4.27 operator= . . . 846
12.70.4.28 setAutoClose . . . 846
12.70.4.29 setComment . . . 847

12.70.4.30 setCommentCodec . . . 847
12.70.4.31 setCommentCodec . . . 847
12.70.4.32 setCurrentFile . . . 848
12.70.4.33 setDataDescriptorWritingEnabled . . . 849
12.70.4.34 setDefaultFileNameCodec . . . 850
12.70.4.35 setDefaultFileNameCodec . . . 851
12.70.4.36 setFileNameCodec . . . 851
12.70.4.37 setFileNameCodec . . . 851
12.70.4.38 setIoDevice . . . 851
12.70.4.39 setZip64Enabled . . . 852
12.70.4.40 setZipName . . . 852
12.70.5 Friends And Related Function Documentation . . . 853
12.70.5.1 QuaZipPrivate . . . 853
12.70.6 Field Documentation . . . 853
12.70.6.1 p . . . 853
12.71 QuaZipDir Class Reference . . . 853
12.71.1 Detailed Description . . . 856
12.71.2 Constructor & Destructor Documentation . . . 856
12.71.2.1 QuaZipDir . . . 856
12.71.2.2 QuaZipDir . . . 856
12.71.2.3 ~QuaZipDir . . . 857
12.71.3 Member Function Documentation . . . 857
12.71.3.1 caseSensitivity . . . 857
12.71.3.2 cd . . . 857
12.71.3.3 cdUp . . . 859
12.71.3.4 count . . . 859
12.71.3.5 dirName . . . 860
12.71.3.6 entryInfoList . . . 860
12.71.3.7 entryInfoList . . . 861
12.71.3.8 entryInfoList64 . . . 861
12.71.3.9 entryInfoList64 . . . 862
12.71.3.10 entryList . . . 862
12.71.3.11 entryList . . . 863
12.71.3.12 exists . . . 863
12.71.3.13 exists . . . 864
12.71.3.14 filePath . . . 865
12.71.3.15 filter . . . 866
12.71.3.16 isRoot . . . 866
12.71.3.17 nameFilters . . . 866
12.71.3.18 operator!= . . . 867

12.71.3.19 operator= . . . 867
12.71.3.20 operator== . . . 867
12.71.3.21 operator[] . . . 867
12.71.3.22 path . . . 868
12.71.3.23 relativeFilePath . . . 868
12.71.3.24 setCaseSensitivity . . . 868
12.71.3.25 setFilter . . . 869
12.71.3.26 setNameFilters . . . 869
12.71.3.27 setPath . . . 869
12.71.3.28 setSorting . . . 870
12.71.3.29 sorting . . . 870
12.71.4 Field Documentation . . . 870
12.71.4.1 d . . . 870
12.72 QuaZipFile Class Reference . . . 871
12.72.1 Detailed Description . . . 873
12.72.2 Sequential or random-access? . . . 874
12.72.3 Constructor & Destructor Documentation . . . 874
12.72.3.1 QuaZipFile . . . 874
12.72.3.2 QuaZipFile . . . 874
12.72.3.3 QuaZipFile . . . 874
12.72.3.4 QuaZipFile . . . 874
12.72.3.5 QuaZipFile . . . 875
12.72.3.6 QuaZipFile . . . 875
12.72.3.7 ~QuaZipFile . . . 876
12.72.4 Member Function Documentation . . . 876
12.72.4.1 atEnd . . . 876
12.72.4.2 bytesAvailable . . . 877
12.72.4.3 close . . . 877
12.72.4.4 csize . . . 878
12.72.4.5 getActualFileName . . . 879
12.72.4.6 getCaseSensitivity . . . 880
12.72.4.7 getFileInfo . . . 880
12.72.4.8 getFileInfo . . . 881
12.72.4.9 getFileName . . . 882
12.72.4.10 getZip . . . 882
12.72.4.11 getZipError . . . 882
12.72.4.12 getZipName . . . 883
12.72.4.13 isRaw . . . 883
12.72.4.14 isSequential . . . 884
12.72.4.15 open . . . 884

12.72.4.16 open . . . 885
12.72.4.17 open . . . 885
12.72.4.18 open . . . 886
12.72.4.19 operator= . . . 888
12.72.4.20 pos . . . 888
12.72.4.21 readData . . . 889
12.72.4.22 setFileName . . . 890
12.72.4.23 setZip . . . 890
12.72.4.24 setZipName . . . 891
12.72.4.25 size . . . 891
12.72.4.26 usize . . . 892
12.72.4.27 writeData . . . 893
12.72.5 Friends And Related Function Documentation . . . 893
12.72.5.1 QuaZipFilePrivate . . . 894
12.72.6 Field Documentation . . . 894
12.72.6.1 p . . . 894
12.73 QuaZipFileInfo Struct Reference . . . 894
12.73.1 Detailed Description . . . 895
12.73.2 Member Function Documentation . . . 895
12.73.2.1 getPermissions . . . 895
12.73.3 Field Documentation . . . 896
12.73.3.1 comment . . . 896
12.73.3.2 compressedSize . . . 896
12.73.3.3 crc . . . 896
12.73.3.4 dateTime . . . 896
12.73.3.5 diskNumberStart . . . 896
12.73.3.6 externalAttr . . . 896
12.73.3.7 extra . . . 896
12.73.3.8 flags . . . 897
12.73.3.9 internalAttr . . . 897
12.73.3.10 method . . . 897
12.73.3.11 name . . . 897
12.73.3.12 uncompressedSize . . . 897
12.73.3.13 versionCreated . . . 897
12.73.3.14 versionNeeded . . . 897
12.74 QuaZipFileInfo64 Struct Reference . . . 897
12.74.1 Detailed Description . . . 899
12.74.2 Member Function Documentation . . . 899
12.74.2.1 getNTFSaTime . . . 899
12.74.2.2 getNTFScTime . . . 900

12.74.2.3 getNTFSmTime . . . 900
12.74.2.4 getPermissions . . . 901
12.74.2.5 isEncrypted . . . 902
12.74.2.6 toQuaZipFileInfo . . . 902
12.74.3 Field Documentation . . . 903
12.74.3.1 comment . . . 903
12.74.3.2 compressedSize . . . 903
12.74.3.3 crc . . . 903
12.74.3.4 dateTime . . . 903
12.74.3.5 diskNumberStart . . . 903
12.74.3.6 externalAttr . . . 904
12.74.3.7 extra . . . 904
12.74.3.8 flags . . . 904
12.74.3.9 internalAttr . . . 904
12.74.3.10 method . . . 904
12.74.3.11 name . . . 904
12.74.3.12 uncompressedSize . . . 904
12.74.3.13 versionCreated . . . 904
12.74.3.14 versionNeeded . . . 904
12.75 QuaZipFilePrivate Class Reference . . . 905
12.75.1 Detailed Description . . . 906
12.75.2 Constructor & Destructor Documentation . . . 906
12.75.2.1 QuaZipFilePrivate . . . 906
12.75.2.2 QuaZipFilePrivate . . . 906
12.75.2.3 QuaZipFilePrivate . . . 906
12.75.2.4 QuaZipFilePrivate . . . 907
12.75.2.5 ~QuaZipFilePrivate . . . 907
12.75.3 Member Function Documentation . . . 907
12.75.3.1 resetZipError . . . 907
12.75.3.2 setZipError . . . 907
12.75.4 Friends And Related Function Documentation . . . 908
12.75.4.1 QuaZipFile . . . 908
12.75.5 Field Documentation . . . 908
12.75.5.1 caseSensitivity . . . 908
12.75.5.2 crc . . . 908
12.75.5.3 fileName . . . 908
12.75.5.4 internal . . . 909
12.75.5.5 q . . . 909
12.75.5.6 raw . . . 909
12.75.5.7 uncompressedSize . . . 909

12.75.5.8 writePos . . . 909
12.75.5.9 zip . . . 909
12.75.5.10zipError . . . 909
12.76QuaZipNewInfo Struct Reference . . . 910
12.76.1 Detailed Description . . . 911
12.76.2 Constructor & Destructor Documentation . . . 911
12.76.2.1 QuaZipNewInfo . . . 911
12.76.2.2 QuaZipNewInfo . . . 911
12.76.2.3 QuaZipNewInfo . . . 912
12.76.2.4 QuaZipNewInfo . . . 913
12.76.3 Member Function Documentation . . . 913
12.76.3.1 setFileDateTime . . . 913
12.76.3.2 setFileNTFSaTime . . . 913
12.76.3.3 setFileNTFScTime . . . 914
12.76.3.4 setFileNTFSmTime . . . 915
12.76.3.5 setFileNTFSTimes . . . 916
12.76.3.6 setFilePermissions . . . 916
12.76.3.7 setPermissions . . . 917
12.76.4 Field Documentation . . . 917
12.76.4.1 comment . . . 917
12.76.4.2 dateTime . . . 917
12.76.4.3 externalAttr . . . 918
12.76.4.4 extraGlobal . . . 918
12.76.4.5 extraLocal . . . 918
12.76.4.6 internalAttr . . . 918
12.76.4.7 name . . . 918
12.76.4.8 uncompressedSize . . . 918
12.77QuaZipPrivate Class Reference . . . 918
12.77.1 Detailed Description . . . 920
12.77.2 Constructor & Destructor Documentation . . . 920
12.77.2.1 QuaZipPrivate . . . 920
12.77.2.2 QuaZipPrivate . . . 921
12.77.2.3 QuaZipPrivate . . . 921
12.77.3 Member Function Documentation . . . 921
12.77.3.1 addCurrentFileToDirectoryMap . . . 921
12.77.3.2 clearDirectoryMap . . . 922
12.77.3.3 getDefaultFileNameCodec . . . 923
12.77.3.4 getFileInfoList . . . 923
12.77.3.5 goToFirstUnmappedFile . . . 924
12.77.4 Friends And Related Function Documentation . . . 925

12.77.4.1 QuaZip . . . 925
12.77.5 Field Documentation . . . 925
12.77.5.1 "@4 . . . 925
12.77.5.2 autoClose . . . 925
12.77.5.3 comment . . . 925
12.77.5.4 commentCodec . . . 925
12.77.5.5 dataDescriptorWritingEnabled . . . 926
12.77.5.6 defaultFileNameCodec . . . 926
12.77.5.7 directoryCaseInsensitive . . . 926
12.77.5.8 directoryCaseSensitive . . . 926
12.77.5.9 fileNameCodec . . . 926
12.77.5.10 hasCurrentFile_f . . . 926
12.77.5.11 ioDevice . . . 926
12.77.5.12 lastMappedDirectoryEntry . . . 926
12.77.5.13 mode . . . 926
12.77.5.14 q . . . 927
12.77.5.15 zip64 . . . 927
12.77.5.16 zipError . . . 927
12.77.5.17 zipName . . . 927
12.78 QWidget Class Reference . . . 927
12.79 Ui::RebindWidget Class Reference . . . 928
12.79.1 Detailed Description . . . 931
12.79.2 Member Function Documentation . . . 931
12.79.2.1 retranslateUi . . . 931
12.79.2.2 setupUi . . . 934
12.79.3 Field Documentation . . . 944
12.79.3.1 actionTab . . . 944
12.79.3.2 animBox . . . 944
12.79.3.3 animButton . . . 944
12.79.3.4 animKrBox . . . 945
12.79.3.5 animOnceBox . . . 945
12.79.3.6 animTab . . . 945
12.79.3.7 applyButton . . . 945
12.79.3.8 btnClearMacro . . . 945
12.79.3.9 btnStartMacro . . . 945
12.79.3.10 btnStopMacro . . . 945
12.79.3.11 cancelButton . . . 945
12.79.3.12 delayButtons . . . 945
12.79.3.13 dpiBox . . . 946
12.79.3.14 dpiButton . . . 946

12.79.3.15 dpiCustLabel . . . 946
12.79.3.16 dpiCustXBox . . . 946
12.79.3.17 dpiCustYBox . . . 946
12.79.3.18 dpiWarning . . . 946
12.79.3.19 fnBox . . . 946
12.79.3.20 fnButton . . . 946
12.79.3.21 gridLayout . . . 947
12.79.3.22 gridLayout_10 . . . 947
12.79.3.23 gridLayout_2 . . . 947
12.79.3.24 gridLayout_3 . . . 947
12.79.3.25 gridLayout_4 . . . 947
12.79.3.26 gridLayout_5 . . . 947
12.79.3.27 gridLayout_8 . . . 947
12.79.3.28 groupBox_2 . . . 947
12.79.3.29 groupBox_3 . . . 947
12.79.3.30 groupBox_4 . . . 948
12.79.3.31 horizontalLayout . . . 948
12.79.3.32 horizontalLayout_2 . . . 948
12.79.3.33 horizontalLayout_3 . . . 948
12.79.3.34 horizontalSpacer . . . 948
12.79.3.35 horizontalSpacer_10 . . . 948
12.79.3.36 horizontalSpacer_11 . . . 948
12.79.3.37 horizontalSpacer_12 . . . 948
12.79.3.38 horizontalSpacer_13 . . . 948
12.79.3.39 horizontalSpacer_14 . . . 949
12.79.3.40 horizontalSpacer_15 . . . 949
12.79.3.41 horizontalSpacer_16 . . . 949
12.79.3.42 horizontalSpacer_17 . . . 949
12.79.3.43 horizontalSpacer_18 . . . 949
12.79.3.44 horizontalSpacer_19 . . . 949
12.79.3.45 horizontalSpacer_2 . . . 949
12.79.3.46 horizontalSpacer_20 . . . 949
12.79.3.47 horizontalSpacer_21 . . . 949
12.79.3.48 horizontalSpacer_22 . . . 950
12.79.3.49 horizontalSpacer_23 . . . 950
12.79.3.50 horizontalSpacer_24 . . . 950
12.79.3.51 horizontalSpacer_25 . . . 950
12.79.3.52 horizontalSpacer_26 . . . 950
12.79.3.53 horizontalSpacer_3 . . . 950
12.79.3.54 horizontalSpacer_4 . . . 950

12.79.3.55 horizontalSpacer_5 . . . 950
12.79.3.56 horizontalSpacer_6 . . . 950
12.79.3.57 horizontalSpacer_7 . . . 951
12.79.3.58 horizontalSpacer_8 . . . 951
12.79.3.59 horizontalSpacer_9 . . . 951
12.79.3.60 keyTab . . . 951
12.79.3.61 label . . . 951
12.79.3.62 layoutWidget . . . 951
12.79.3.63 layoutWidget1 . . . 951
12.79.3.64 layoutWidget2 . . . 951
12.79.3.65 layoutWidget_2 . . . 951
12.79.3.66 lbl_macro . . . 952
12.79.3.67 lightBox . . . 952
12.79.3.68 lightButton . . . 952
12.79.3.69 lightWrapBox . . . 952
12.79.3.70 lockBox . . . 952
12.79.3.71 lockButton . . . 952
12.79.3.72 macroTab . . . 952
12.79.3.73 mb2Box . . . 952
12.79.3.74 mb2Button . . . 953
12.79.3.75 mbBox . . . 953
12.79.3.76 mbButton . . . 953
12.79.3.77 mediaBox . . . 953
12.79.3.78 mediaButton . . . 953
12.79.3.79 modBox . . . 953
12.79.3.80 modButton . . . 953
12.79.3.81 modeBox . . . 953
12.79.3.82 modeButton . . . 954
12.79.3.83 modeWrapBox . . . 954
12.79.3.84 mouseTab . . . 954
12.79.3.85 numBox . . . 954
12.79.3.86 numButton . . . 954
12.79.3.87 programKpBox . . . 954
12.79.3.88 programKpButton . . . 954
12.79.3.89 programKpExtra . . . 955
12.79.3.90 programKpModeBox . . . 955
12.79.3.91 programKpSIBox . . . 955
12.79.3.92 programKrBox . . . 955
12.79.3.93 programKrButton . . . 955
12.79.3.94 programKrExtra . . . 955

12.79.3.95 programKrModeBox . . . 955
12.79.3.96 programKrSlBox . . . 955
12.79.3.97 programTab . . . 956
12.79.3.98 progTipLabel . . . 956
12.79.3.99 pteMacroBox . . . 956
12.79.3.100 pteMacroComment . . . 956
12.79.3.101 pteMacroText . . . 956
12.79.3.102 rb_delay_asTyped . . . 956
12.79.3.103 rb_delay_default . . . 956
12.79.3.104 rb_delay_no . . . 956
12.79.3.105 resetButton . . . 957
12.79.3.106 tabWidget . . . 957
12.79.3.107 txtBuffer . . . 957
12.79.3.108 typingBox . . . 957
12.79.3.109 typingButton . . . 957
12.79.3.110 unbindButton . . . 957
12.79.3.111 verticalLayout . . . 957
12.79.3.112 verticalLayout_2 . . . 957
12.79.3.113 verticalSpacer . . . 958
12.79.3.114 verticalSpacer_10 . . . 958
12.79.3.115 verticalSpacer_11 . . . 958
12.79.3.116 verticalSpacer_2 . . . 958
12.79.3.117 verticalSpacer_3 . . . 958
12.79.3.118 verticalSpacer_4 . . . 958
12.79.3.119 verticalSpacer_5 . . . 958
12.79.3.120 verticalSpacer_6 . . . 958
12.79.3.121 verticalSpacer_7 . . . 958
12.79.3.122 verticalSpacer_8 . . . 959
12.79.3.123 wheelBox . . . 959
12.79.3.124 wheelButton . . . 959
12.80 RebindWidget Class Reference . . . 959
12.80.1 Detailed Description . . . 963
12.80.2 Constructor & Destructor Documentation . . . 963
12.80.2.1 RebindWidget . . . 963
12.80.2.2 ~RebindWidget . . . 964
12.80.3 Member Function Documentation . . . 964
12.80.3.1 applyChanges . . . 964
12.80.3.2 convertMacroBox . . . 966
12.80.3.3 helpStatus . . . 967
12.80.3.4 on_animBox_currentIndexChanged . . . 968

12.80.3.5 on_animButton_clicked . . . 968
12.80.3.6 on_applyButton_clicked . . . 969
12.80.3.7 on_btnClearMacro_clicked . . . 969
12.80.3.8 on_btnStartMacro_clicked . . . 970
12.80.3.9 on_btnStopMacro_clicked . . . 970
12.80.3.10 on_cancelButton_clicked . . . 971
12.80.3.11 on_dpiBox_currentIndexChanged . . . 972
12.80.3.12 on_dpiButton_clicked . . . 973
12.80.3.13 on_fnBox_currentIndexChanged . . . 973
12.80.3.14 on_fnButton_clicked . . . 973
12.80.3.15 on_lightBox_currentIndexChanged . . . 974
12.80.3.16 on_lightButton_clicked . . . 974
12.80.3.17 on_lockBox_currentIndexChanged . . . 974
12.80.3.18 on_lockButton_clicked . . . 975
12.80.3.19 on_mb2Box_currentIndexChanged . . . 975
12.80.3.20 on_mb2Button_clicked . . . 975
12.80.3.21 on_mbBox_currentIndexChanged . . . 975
12.80.3.22 on_mbButton_clicked . . . 976
12.80.3.23 on_mediaBox_currentIndexChanged . . . 976
12.80.3.24 on_mediaButton_clicked . . . 976
12.80.3.25 on_modBox_currentIndexChanged . . . 977
12.80.3.26 on_modButton_clicked . . . 977
12.80.3.27 on_modeBox_currentIndexChanged . . . 977
12.80.3.28 on_modeButton_clicked . . . 978
12.80.3.29 on_numBox_currentIndexChanged . . . 978
12.80.3.30 on_numButton_clicked . . . 978
12.80.3.31 on_programKpBox_textChanged . . . 978
12.80.3.32 on_programKpButton_clicked . . . 979
12.80.3.33 on_programKpSIBox_clicked . . . 979
12.80.3.34 on_programKrBox_textChanged . . . 979
12.80.3.35 on_programKrButton_clicked . . . 980
12.80.3.36 on_programKrSIBox_clicked . . . 980
12.80.3.37 on_pteMacroBox_textChanged . . . 980
12.80.3.38 on_rb_delay_asTyped_toggled . . . 981
12.80.3.39 on_rb_delay_default_toggled . . . 981
12.80.3.40 on_rb_delay_no_toggled . . . 982
12.80.3.41 on_resetButton_clicked . . . 982
12.80.3.42 on_typingBox_currentIndexChanged . . . 983
12.80.3.43 on_typingButton_clicked . . . 983
12.80.3.44 on_unbindButton_clicked . . . 983

12.80.3.45 on_wheelBox_currentIndexChanged . . . 984
12.80.3.46 on_wheelButton_clicked . . . 984
12.80.3.47 setBind . . . 984
12.80.3.48 setBox . . . 987
12.80.3.49 setCorrectRadioButton . . . 988
12.80.3.50 setSelection . . . 989
12.80.4 Field Documentation . . . 992
12.80.4.1 bind . . . 993
12.80.4.2 fnKeys . . . 993
12.80.4.3 macReader . . . 993
12.80.4.4 mediaKeys . . . 993
12.80.4.5 modKeys . . . 993
12.80.4.6 mouseExtKeys . . . 993
12.80.4.7 mouseKeys . . . 993
12.80.4.8 numKeys . . . 993
12.80.4.9 profile . . . 993
12.80.4.10 selection . . . 994
12.80.4.11 TAB_ANIM . . . 994
12.80.4.12 TAB_KB . . . 994
12.80.4.13 TAB_MACRO . . . 994
12.80.4.14 TAB_MOUSE . . . 994
12.80.4.15 TAB_PROGRAM . . . 994
12.80.4.16 TAB_SPECIAL . . . 994
12.80.4.17 typingKeys . . . 994
12.80.4.18 ui . . . 994
12.80.4.19 wheelKeys . . . 995
12.81 RListWidget Class Reference . . . 995
12.81.1 Detailed Description . . . 996
12.81.2 Constructor & Destructor Documentation . . . 997
12.81.2.1 RListWidget . . . 997
12.81.3 Member Function Documentation . . . 997
12.81.3.1 change . . . 997
12.81.3.2 enter . . . 998
12.81.3.3 orderChanged . . . 998
12.81.3.4 rescanItems . . . 999
12.81.3.5 timerTick . . . 999
12.81.4 Field Documentation . . . 1000
12.81.4.1 currentData . . . 1000
12.81.4.2 DATA_ROLE . . . 1000
12.81.4.3 dragged . . . 1000

12.81.4.4 previousItems . . . 1000
12.81.4.5 reorderTimer . . . 1000
12.82SettingsWidget Class Reference . . . 1000
12.82.1 Detailed Description . . . 1003
12.82.2 Constructor & Destructor Documentation . . . 1003
12.82.2.1 SettingsWidget . . . 1003
12.82.2.2 ~SettingsWidget . . . 1004
12.82.3 Member Function Documentation . . . 1004
12.82.3.1 on_altBox_activated . . . 1005
12.82.3.2 on_autoFWBox_clicked . . . 1005
12.82.3.3 on_capsBox_activated . . . 1005
12.82.3.4 on_ctrlBox_activated . . . 1006
12.82.3.5 on_extraButton_clicked . . . 1006
12.82.3.6 on_layoutBox_activated . . . 1006
12.82.3.7 on_loginItemBox_clicked . . . 1007
12.82.3.8 on_pushButton_clicked . . . 1007
12.82.3.9 on_shiftBox_activated . . . 1007
12.82.3.10on_winBox_activated . . . 1008
12.82.3.11pollUpdates . . . 1008
12.82.3.12setStatus . . . 1008
12.82.3.13setVersion . . . 1009
12.82.3.14showLayoutDialog . . . 1009
12.82.3.15updateModifiers . . . 1010
12.82.4 Friends And Related Function Documentation . . . 1011
12.82.4.1 MainWindow . . . 1011
12.82.5 Field Documentation . . . 1011
12.82.5.1 extra . . . 1011
12.82.5.2 ui . . . 1011
12.83Ui::SettingsWidget Class Reference . . . 1012
12.83.1 Detailed Description . . . 1014
12.83.2 Member Function Documentation . . . 1014
12.83.2.1 retranslateUi . . . 1014
12.83.2.2 setupUi . . . 1015
12.83.3 Field Documentation . . . 1019
12.83.3.1 altBox . . . 1019
12.83.3.2 altLabel . . . 1019
12.83.3.3 autoFWBox . . . 1019
12.83.3.4 capsBox . . . 1019
12.83.3.5 capsLabel . . . 1020
12.83.3.6 ctrlBox . . . 1020

12.83.3.7 ctrlLabel . . . 1020
12.83.3.8 devicesLabel . . . 1020
12.83.3.9 extraButton . . . 1020
12.83.3.10 gridLayout . . . 1020
12.83.3.11 gridLayout_3 . . . 1020
12.83.3.12 gridLayout_5 . . . 1020
12.83.3.13 horizontalLayout . . . 1020
12.83.3.14 horizontalLayout_2 . . . 1021
12.83.3.15 horizontalSpacer . . . 1021
12.83.3.16 horizontalSpacer_10 . . . 1021
12.83.3.17 horizontalSpacer_2 . . . 1021
12.83.3.18 horizontalSpacer_7 . . . 1021
12.83.3.19 horizontalSpacer_9 . . . 1021
12.83.3.20 label . . . 1021
12.83.3.21 label_2 . . . 1021
12.83.3.22 label_3 . . . 1021
12.83.3.23 label_5 . . . 1022
12.83.3.24 label_6 . . . 1022
12.83.3.25 label_8 . . . 1022
12.83.3.26 layoutBox . . . 1022
12.83.3.27 line . . . 1022
12.83.3.28 line_2 . . . 1022
12.83.3.29 line_3 . . . 1022
12.83.3.30 loginItemBox . . . 1022
12.83.3.31 pushButton . . . 1022
12.83.3.32 shiftBox . . . 1023
12.83.3.33 shiftLabel . . . 1023
12.83.3.34 versionLabel . . . 1023
12.83.3.35 verticalSpacer . . . 1023
12.83.3.36 verticalSpacer_10 . . . 1023
12.83.3.37 verticalSpacer_2 . . . 1023
12.83.3.38 verticalSpacer_3 . . . 1023
12.83.3.39 verticalSpacer_4 . . . 1023
12.83.3.40 verticalSpacer_5 . . . 1023
12.83.3.41 verticalSpacer_6 . . . 1024
12.83.3.42 verticalSpacer_7 . . . 1024
12.83.3.43 verticalSpacer_8 . . . 1024
12.83.3.44 winBox . . . 1024
12.83.3.45 winLabel . . . 1024
12.84 SGroup Class Reference . . . 1024

12.84.1 Detailed Description . . . 1026
12.84.2 Constructor & Destructor Documentation . . . 1026
12.84.2.1 SGroup . . . 1026
12.84.2.2 ~SGroup . . . 1026
12.84.3 Field Documentation . . . 1026
12.84.3.1 _settings . . . 1026
12.85 Ui_AnimAddDialog Class Reference . . . 1027
12.85.1 Detailed Description . . . 1028
12.85.2 Member Function Documentation . . . 1028
12.85.2.1 retranslateUi . . . 1028
12.85.2.2 setupUi . . . 1028
12.85.3 Field Documentation . . . 1030
12.85.3.1 animBox . . . 1030
12.85.3.2 buttonBox . . . 1030
12.85.3.3 gridLayout . . . 1030
12.85.3.4 horizontalLayout . . . 1030
12.85.3.5 horizontalSpacer . . . 1030
12.85.3.6 horizontalSpacer_2 . . . 1031
12.85.3.7 label . . . 1031
12.85.3.8 label_2 . . . 1031
12.85.3.9 presetBox . . . 1031
12.85.3.10 previewBox . . . 1031
12.85.3.11 verticalSpacer_2 . . . 1031
12.85.3.12 verticalSpacer_3 . . . 1031
12.86 Ui_AnimSettingDialog Class Reference . . . 1031
12.86.1 Detailed Description . . . 1034
12.86.2 Member Function Documentation . . . 1034
12.86.2.1 retranslateUi . . . 1034
12.86.2.2 setupUi . . . 1035
12.86.3 Field Documentation . . . 1038
12.86.3.1 animName . . . 1038
12.86.3.2 buttonBox . . . 1038
12.86.3.3 delayBox . . . 1039
12.86.3.4 gridLayout . . . 1039
12.86.3.5 gridLayout_2 . . . 1039
12.86.3.6 horizontalSpacer . . . 1039
12.86.3.7 horizontalSpacer_2 . . . 1039
12.86.3.8 horizontalSpacer_3 . . . 1039
12.86.3.9 horizontalSpacer_4 . . . 1039
12.86.3.10 horizontalSpacer_5 . . . 1039

12.86.3.11horizontalSpacer_6 . . . 1039
12.86.3.12nfoTab . . . 1040
12.86.3.13kpDelayBox . . . 1040
12.86.3.14kpModeStopBox . . . 1040
12.86.3.15kpReleaseBox . . . 1040
12.86.3.16kpRepeatBox . . . 1040
12.86.3.17kpRepeatLabel . . . 1040
12.86.3.18kpRepeatLabel_2 . . . 1040
12.86.3.19abel . . . 1040
12.86.3.20abel_10 . . . 1040
12.86.3.21label_11 . . . 1041
12.86.3.22abel_12 . . . 1041
12.86.3.23abel_13 . . . 1041
12.86.3.24abel_2 . . . 1041
12.86.3.25abel_3 . . . 1041
12.86.3.26abel_4 . . . 1041
12.86.3.27label_5 . . . 1041
12.86.3.28abel_6 . . . 1041
12.86.3.29abel_7 . . . 1041
12.86.3.30abel_8 . . . 1042
12.86.3.31label_9 . . . 1042
12.86.3.32ine . . . 1042
12.86.3.33ine_2 . . . 1042
12.86.3.34repeatBox . . . 1042
12.86.3.35repeatLabel . . . 1042
12.86.3.36repeatLabel_2 . . . 1042
12.86.3.37sAuthorLabel . . . 1042
12.86.3.38sDescLabel . . . 1042
12.86.3.39settingsGrid . . . 1043
12.86.3.40settingTab . . . 1043
12.86.3.41sLicenseLabel . . . 1043
12.86.3.42sNameLabel . . . 1043
12.86.3.43sVerLabel . . . 1043
12.86.3.44sYearLabel . . . 1043
12.86.3.45tabWidget . . . 1043
12.86.3.46timeGrid . . . 1043
12.86.3.47timeTab . . . 1043
12.86.3.48verticalSpacer . . . 1044
12.86.3.49verticalSpacer_2 . . . 1044
12.86.3.50verticalSpacer_3 . . . 1044

12.87 Ui_ExtraSettingsWidget Class Reference . . . 1044
12.87.1 Detailed Description . . . 1046
12.87.2 Member Function Documentation . . . 1047
12.87.2.1 retranslateUi . . . 1047
12.87.2.2 setupUi . . . 1048
12.87.3 Field Documentation . . . 1051
12.87.3.1 animCountLabel . . . 1051
12.87.3.2 animPathLabel . . . 1052
12.87.3.3 animScanButton . . . 1052
12.87.3.4 brightnessBox . . . 1052
12.87.3.5 buttonBox . . . 1052
12.87.3.6 delayBox . . . 1052
12.87.3.7 ditherBox . . . 1052
12.87.3.8 fpsBox . . . 1052
12.87.3.9 fpsWarnLabel . . . 1052
12.87.3.10 gridLayout . . . 1052
12.87.3.11 horizontalLayout . . . 1053
12.87.3.12 horizontalLayout_2 . . . 1053
12.87.3.13 horizontalSpacer . . . 1053
12.87.3.14 horizontalSpacer_2 . . . 1053
12.87.3.15 horizontalSpacer_3 . . . 1053
12.87.3.16 label . . . 1053
12.87.3.17 label_10 . . . 1053
12.87.3.18 label_11 . . . 1053
12.87.3.19 label_2 . . . 1053
12.87.3.20 label_3 . . . 1054
12.87.3.21 label_5 . . . 1054
12.87.3.22 label_6 . . . 1054
12.87.3.23 line . . . 1054
12.87.3.24 line_2 . . . 1054
12.87.3.25 line_3 . . . 1054
12.87.3.26 mAccelBox . . . 1054
12.87.3.27 osxLabel . . . 1054
12.87.3.28 osxLine . . . 1054
12.87.3.29 sAccelBox . . . 1055
12.87.3.30 sSpeedBox . . . 1055
12.87.3.31 sSpeedWidget . . . 1055
12.87.3.32 trayBox . . . 1055
12.87.3.33 verticalSpacer . . . 1055
12.87.3.34 verticalSpacer_10 . . . 1055

12.87.3.35 verticalSpacer_11 . . . 1055
12.87.3.36 verticalSpacer_2 . . . 1055
12.87.3.37 verticalSpacer_3 . . . 1055
12.87.3.38 verticalSpacer_4 . . . 1056
12.87.3.39 verticalSpacer_5 . . . 1056
12.87.3.40 verticalSpacer_6 . . . 1056
12.87.3.41 verticalSpacer_7 . . . 1056
12.87.3.42 verticalSpacer_8 . . . 1056
12.87.3.43 verticalSpacer_9 . . . 1056
12.88 Ui_FwUpgradeDialog Class Reference . . . 1056
12.88.1 Detailed Description . . . 1058
12.88.2 Member Function Documentation . . . 1058
12.88.2.1 retranslateUi . . . 1058
12.88.2.2 setupUi . . . 1059
12.88.3 Field Documentation . . . 1060
12.88.3.1 actionButton . . . 1060
12.88.3.2 cancelButton . . . 1061
12.88.3.3 curLabel . . . 1061
12.88.3.4 devLabel . . . 1061
12.88.3.5 gridLayout . . . 1061
12.88.3.6 gridLayout_2 . . . 1061
12.88.3.7 horizontalSpacer . . . 1061
12.88.3.8 horizontalSpacer_2 . . . 1061
12.88.3.9 horizontalSpacer_3 . . . 1061
12.88.3.10 horizontalSpacer_4 . . . 1061
12.88.3.11 label_2 . . . 1062
12.88.3.12 label_4 . . . 1062
12.88.3.13 newLabel . . . 1062
12.88.3.14 progressBar . . . 1062
12.88.3.15 statusLabel . . . 1062
12.89 Ui_GradientDialog Class Reference . . . 1062
12.89.1 Detailed Description . . . 1064
12.89.2 Member Function Documentation . . . 1064
12.89.2.1 retranslateUi . . . 1064
12.89.2.2 setupUi . . . 1065
12.89.3 Field Documentation . . . 1067
12.89.3.1 buttonBox . . . 1067
12.89.3.2 gridLayout . . . 1067
12.89.3.3 gridLayout_2 . . . 1067
12.89.3.4 gridLayout_3 . . . 1067

12.89.3.5 groupBox_2 . . . 1068
12.89.3.6 horizontalLayout . . . 1068
12.89.3.7 horizontalLayout_2 . . . 1068
12.89.3.8 horizontalSpacer . . . 1068
12.89.3.9 horizontalSpacer_2 . . . 1068
12.89.3.10 horizontalSpacer_3 . . . 1068
12.89.3.11 label . . . 1068
12.89.3.12 label_2 . . . 1068
12.89.3.13 presetDelete . . . 1068
12.89.3.14 presetList . . . 1069
12.89.3.15 presetName . . . 1069
12.89.3.16 presetSave . . . 1069
12.89.3.17 stopBox . . . 1069
12.89.3.18 stopColor . . . 1069
12.89.3.19 stopOpacity . . . 1069
12.89.3.20 stopPos . . . 1069
12.89.3.21 verticalSpacer . . . 1069
12.89.3.22 verticalSpacer_2 . . . 1069
12.89.3.23 widget . . . 1070
12.90 Ui_KbAnimWidget Class Reference . . . 1070
12.90.1 Detailed Description . . . 1072
12.90.2 Member Function Documentation . . . 1072
12.90.2.1 retranslateUi . . . 1072
12.90.2.2 setupUi . . . 1072
12.90.3 Field Documentation . . . 1075
12.90.3.1 aCopyLabel . . . 1075
12.90.3.2 aMissingLabel . . . 1075
12.90.3.3 aMissingPage . . . 1075
12.90.3.4 aNameLabel . . . 1075
12.90.3.5 animList . . . 1075
12.90.3.6 animPage . . . 1076
12.90.3.7 aVerLabel . . . 1076
12.90.3.8 blendBox . . . 1076
12.90.3.9 deleteButton . . . 1076
12.90.3.10 gridLayout . . . 1076
12.90.3.11 gridLayout_2 . . . 1076
12.90.3.12 gridLayout_3 . . . 1076
12.90.3.13 gridLayout_4 . . . 1076
12.90.3.14 horizontalLayout . . . 1077
12.90.3.15 horizontalSpacer . . . 1077

12.90.3.16 horizontalSpacer_2 . . . 1077
12.90.3.17 horizontalSpacer_3 . . . 1077
12.90.3.18 horizontalSpacer_4 . . . 1077
12.90.3.19 horizontalSpacer_5 . . . 1077
12.90.3.20 keyButton . . . 1077
12.90.3.21 label_5 . . . 1077
12.90.3.22 label_6 . . . 1077
12.90.3.23 label_7 . . . 1078
12.90.3.24 nameBox . . . 1078
12.90.3.25 noAnimLabel . . . 1078
12.90.3.26 noSelPage . . . 1078
12.90.3.27 opacityBox . . . 1078
12.90.3.28 propertyButton . . . 1078
12.90.3.29 selectionStack . . . 1078
12.90.3.30 verticalLayout . . . 1078
12.90.3.31 verticalSpacer . . . 1078
12.90.3.32 verticalSpacer_2 . . . 1079
12.90.3.33 verticalSpacer_3 . . . 1079
12.91 Ui_KbBindWidget Class Reference . . . 1079
12.91.1 Detailed Description . . . 1080
12.91.2 Member Function Documentation . . . 1081
12.91.2.1 retranslateUi . . . 1081
12.91.2.2 setupUi . . . 1081
12.91.3 Field Documentation . . . 1083
12.91.3.1 copyButton . . . 1083
12.91.3.2 gridLayout . . . 1083
12.91.3.3 gridLayout_2 . . . 1083
12.91.3.4 horizontalLayout_2 . . . 1084
12.91.3.5 horizontalSpacer . . . 1084
12.91.3.6 horizontalSpacer_2 . . . 1084
12.91.3.7 keyWidget . . . 1084
12.91.3.8 label . . . 1084
12.91.3.9 label_2 . . . 1084
12.91.3.10 line . . . 1084
12.91.3.11 line_2 . . . 1084
12.91.3.12 rbWidget . . . 1084
12.91.3.13 resetButton . . . 1085
12.91.3.14 selectLabel . . . 1085
12.91.3.15 verticalLayout . . . 1085
12.91.3.16 verticalSpacer . . . 1085

12.91.3.17 widget . . . 1085
12.92 Ui_KbLightWidget Class Reference . . . 1085
12.92.1 Detailed Description . . . 1087
12.92.2 Member Function Documentation . . . 1087
12.92.2.1 retranslateUi . . . 1087
12.92.2.2 setupUi . . . 1088
12.92.3 Field Documentation . . . 1090
12.92.3.1 animButton . . . 1090
12.92.3.2 animWidget . . . 1091
12.92.3.3 bgButton . . . 1091
12.92.3.4 brightnessBox . . . 1091
12.92.3.5 gridLayout . . . 1091
12.92.3.6 gridLayout_2 . . . 1091
12.92.3.7 gridLayout_4 . . . 1091
12.92.3.8 horizontalLayout . . . 1091
12.92.3.9 horizontalLayout_2 . . . 1091
12.92.3.10 horizontalLayout_3 . . . 1091
12.92.3.11 horizontalSpacer_3 . . . 1092
12.92.3.12 horizontalSpacer_4 . . . 1092
12.92.3.13 horizontalSpacer_5 . . . 1092
12.92.3.14 horizontalSpacer_6 . . . 1092
12.92.3.15 keyWidget . . . 1092
12.92.3.16 label . . . 1092
12.92.3.17 label_2 . . . 1092
12.92.3.18 label_3 . . . 1092
12.92.3.19 line . . . 1092
12.92.3.20 line_2 . . . 1093
12.92.3.21 selLabel . . . 1093
12.92.3.22 showAnimBox . . . 1093
12.92.3.23 verticalLayout . . . 1093
12.92.3.24 verticalSpacer_2 . . . 1093
12.92.3.25 verticalSpacer_3 . . . 1093
12.92.3.26 widget . . . 1093
12.93 Ui_KbProfileDialog Class Reference . . . 1093
12.93.1 Detailed Description . . . 1095
12.93.2 Member Function Documentation . . . 1095
12.93.2.1 retranslateUi . . . 1095
12.93.2.2 setupUi . . . 1095
12.93.3 Field Documentation . . . 1096
12.93.3.1 buttonBox . . . 1096

12.93.3.2 gridLayout . . . 1096
12.93.3.3 horizontalSpacer . . . 1097
12.93.3.4 horizontalSpacer_2 . . . 1097
12.93.3.5 profileList . . . 1097
12.94 Ui_KbWidget Class Reference . . . 1097
12.94.1 Detailed Description . . . 1099
12.94.2 Member Function Documentation . . . 1099
12.94.2.1 retranslateUi . . . 1099
12.94.2.2 setupUi . . . 1100
12.94.3 Field Documentation . . . 1103
12.94.3.1 bindTab . . . 1103
12.94.3.2 bindWidget . . . 1103
12.94.3.3 devTab . . . 1103
12.94.3.4 fwLabel . . . 1103
12.94.3.5 fwUpdButton . . . 1103
12.94.3.6 fwUpdLabel . . . 1104
12.94.3.7 fwUpdLayout . . . 1104
12.94.3.8 gridLayout . . . 1104
12.94.3.9 gridLayout_2 . . . 1104
12.94.3.10 gridLayout_3 . . . 1104
12.94.3.11 gridLayout_4 . . . 1104
12.94.3.12 gridLayout_5 . . . 1104
12.94.3.13 gridLayout_7 . . . 1104
12.94.3.14 horizontalSpacer_2 . . . 1104
12.94.3.15 horizontalSpacer_3 . . . 1105
12.94.3.16 hwSaveButton . . . 1105
12.94.3.17 kPerfTab . . . 1105
12.94.3.18 kPerfWidget . . . 1105
12.94.3.19 label_3 . . . 1105
12.94.3.20 label_4 . . . 1105
12.94.3.21 label_9 . . . 1105
12.94.3.22 lightTab . . . 1105
12.94.3.23 lightWidget . . . 1105
12.94.3.24 modesList . . . 1106
12.94.3.25 mPerfTab . . . 1106
12.94.3.26 mPerfWidget . . . 1106
12.94.3.27 pollLabel . . . 1106
12.94.3.28 pollLabel2 . . . 1106
12.94.3.29 profileBox . . . 1106
12.94.3.30 serialLabel . . . 1106

12.94.3.31 tabWidget . . . 1106
12.94.3.32 verticalSpacer . . . 1106
12.95 Ui_KPerfWidget Class Reference . . . 1107
12.95.1 Detailed Description . . . 1110
12.95.2 Member Function Documentation . . . 1110
12.95.2.1 retranslateUi . . . 1110
12.95.2.2 setupUi . . . 1111
12.95.3 Field Documentation . . . 1117
12.95.3.1 capsBox . . . 1117
12.95.3.2 capsColorOff . . . 1118
12.95.3.3 capsColorOn . . . 1118
12.95.3.4 copyButton . . . 1118
12.95.3.5 gridLayout . . . 1118
12.95.3.6 horizontalLayout . . . 1118
12.95.3.7 horizontalLayout_2 . . . 1118
12.95.3.8 horizontalSpacer . . . 1118
12.95.3.9 horizontalSpacer_2 . . . 1118
12.95.3.10 horizontalSpacer_3 . . . 1118
12.95.3.11 horizontalSpacer_4 . . . 1119
12.95.3.12 horizontalSpacer_5 . . . 1119
12.95.3.13 horizontalSpacer_6 . . . 1119
12.95.3.14 horizontalSpacer_7 . . . 1119
12.95.3.15 horizontalSpacer_8 . . . 1119
12.95.3.16 intensityBox . . . 1119
12.95.3.17 k95Label1 . . . 1119
12.95.3.18 k95Label2 . . . 1119
12.95.3.19 k95Label3 . . . 1119
12.95.3.20 k95Label4 . . . 1120
12.95.3.21 k95Label5 . . . 1120
12.95.3.22 k95Label6 . . . 1120
12.95.3.23 k95Line . . . 1120
12.95.3.24 k95Spacer . . . 1120
12.95.3.25 label . . . 1120
12.95.3.26 label_10 . . . 1120
12.95.3.27 label_11 . . . 1120
12.95.3.28 label_12 . . . 1120
12.95.3.29 label_14 . . . 1121
12.95.3.30 label_15 . . . 1121
12.95.3.31 label_16 . . . 1121
12.95.3.32 label_17 . . . 1121

12.95.3.33 label_18 . . . 1121
12.95.3.34 label_19 . . . 1121
12.95.3.35 label_2 . . . 1121
12.95.3.36 label_20 . . . 1121
12.95.3.37 label_21 . . . 1121
12.95.3.38 label_22 . . . 1122
12.95.3.39 label_23 . . . 1122
12.95.3.40 label_24 . . . 1122
12.95.3.41 label_3 . . . 1122
12.95.3.42 label_4 . . . 1122
12.95.3.43 label_5 . . . 1122
12.95.3.44 label_6 . . . 1122
12.95.3.45 label_7 . . . 1122
12.95.3.46 label_8 . . . 1122
12.95.3.47 lightBox . . . 1123
12.95.3.48 lightColor1 . . . 1123
12.95.3.49 lightColor2 . . . 1123
12.95.3.50 lightColor3 . . . 1123
12.95.3.51 line . . . 1123
12.95.3.52 line_2 . . . 1123
12.95.3.53 line_3 . . . 1123
12.95.3.54 lockBox . . . 1123
12.95.3.55 lockColorOff . . . 1123
12.95.3.56 lockColorOn . . . 1124
12.95.3.57 macroBox . . . 1124
12.95.3.58 macroColorOff . . . 1124
12.95.3.59 macroColorOn . . . 1124
12.95.3.60 modeBox . . . 1124
12.95.3.61 modeColorOff . . . 1124
12.95.3.62 modeColorOn . . . 1124
12.95.3.63 muteBox . . . 1124
12.95.3.64 muteColorNA . . . 1124
12.95.3.65 muteColorOff . . . 1125
12.95.3.66 muteColorOn . . . 1125
12.95.3.67 numBox . . . 1125
12.95.3.68 numColorOff . . . 1125
12.95.3.69 numColorOn . . . 1125
12.95.3.70 scrollBox . . . 1125
12.95.3.71 scrollColorOff . . . 1125
12.95.3.72 scrollColorOn . . . 1125

12.95.3.73 verticalSpacer . . . 1125
12.95.3.74 verticalSpacer_2 . . . 1126
12.95.3.75 verticalSpacer_3 . . . 1126
12.95.3.76 verticalSpacer_4 . . . 1126
12.96 Ui_LayoutDialog Class Reference . . . 1126
12.96.1 Detailed Description . . . 1128
12.96.2 Member Function Documentation . . . 1128
12.96.2.1 retranslateUi . . . 1128
12.96.2.2 setupUi . . . 1128
12.96.3 Field Documentation . . . 1130
12.96.3.1 buttonBox . . . 1130
12.96.3.2 comboBox . . . 1130
12.96.3.3 gridLayout . . . 1130
12.96.3.4 horizontalSpacer . . . 1130
12.96.3.5 horizontalSpacer_2 . . . 1130
12.96.3.6 label . . . 1131
12.96.3.7 label_2 . . . 1131
12.96.3.8 verticalSpacer . . . 1131
12.96.3.9 verticalSpacer_2 . . . 1131
12.96.3.10 verticalSpacer_3 . . . 1131
12.96.3.11 verticalSpacer_4 . . . 1131
12.97 Ui_MainWindow Class Reference . . . 1131
12.97.1 Detailed Description . . . 1133
12.97.2 Member Function Documentation . . . 1133
12.97.2.1 retranslateUi . . . 1133
12.97.2.2 setupUi . . . 1133
12.97.3 Field Documentation . . . 1134
12.97.3.1 actionAbout . . . 1134
12.97.3.2 actionExit . . . 1134
12.97.3.3 centralWidget . . . 1134
12.97.3.4 gridLayout . . . 1135
12.97.3.5 tabWidget . . . 1135
12.98 Ui_ModeSelectDialog Class Reference . . . 1135
12.98.1 Detailed Description . . . 1136
12.98.2 Member Function Documentation . . . 1136
12.98.2.1 retranslateUi . . . 1136
12.98.2.2 setupUi . . . 1137
12.98.3 Field Documentation . . . 1138
12.98.3.1 buttonBox . . . 1138
12.98.3.2 gridLayout . . . 1138

12.98.3.3 label . . . 1138
12.98.3.4 modeList . . . 1138
12.98.3.5 selAllButton . . . 1138
12.98.3.6 selNoneButton . . . 1139
12.99 Ui_MPerfWidget Class Reference . . . 1139
12.99.1 Detailed Description . . . 1141
12.99.2 Member Function Documentation . . . 1142
12.99.2.1 retranslateUi . . . 1142
12.99.2.2 setupUi . . . 1143
12.99.3 Field Documentation . . . 1150
12.99.3.1 aSnapBox . . . 1150
12.99.3.2 copyButton . . . 1150
12.99.3.3 eBox1 . . . 1150
12.99.3.4 eBox2 . . . 1150
12.99.3.5 eBox3 . . . 1150
12.99.3.6 eBox4 . . . 1151
12.99.3.7 eBox5 . . . 1151
12.99.3.8 gridLayout . . . 1151
12.99.3.9 horizontalLayout . . . 1151
12.99.3.10 horizontalLayout_2 . . . 1151
12.99.3.11 horizontalLayout_4 . . . 1151
12.99.3.12 horizontalSpacer . . . 1151
12.99.3.13 horizontalSpacer_2 . . . 1151
12.99.3.14 horizontalSpacer_3 . . . 1151
12.99.3.15 horizontalSpacer_4 . . . 1152
12.99.3.16 horizontalSpacer_5 . . . 1152
12.99.3.17 horizontalSpacer_6 . . . 1152
12.99.3.18 horizontalSpacer_7 . . . 1152
12.99.3.19 iButton0 . . . 1152
12.99.3.20 iButton1 . . . 1152
12.99.3.21 iButton2 . . . 1152
12.99.3.22 iButton3 . . . 1152
12.99.3.23 iButton4 . . . 1152
12.99.3.24 iButton5 . . . 1153
12.99.3.25 iButtonO . . . 1153
12.99.3.26 indicBox . . . 1153
12.99.3.27 label . . . 1153
12.99.3.28 label_11 . . . 1153
12.99.3.29 label_12 . . . 1153
12.99.3.30 label_13 . . . 1153

12.99.3.31 label_14 . . . 1153
12.99.3.32 label_15 . . . 1153
12.99.3.33 label_2 . . . 1154
12.99.3.34 label_25 . . . 1154
12.99.3.35 label_3 . . . 1154
12.99.3.36 label_4 . . . 1154
12.99.3.37 label_5 . . . 1154
12.99.3.38 label_6 . . . 1154
12.99.3.39 label_7 . . . 1154
12.99.3.40 label_8 . . . 1154
12.99.3.41 llHeightBox . . . 1154
12.99.3.42 line . . . 1155
12.99.3.43 line_2 . . . 1155
12.99.3.44 line_3 . . . 1155
12.99.3.45 spinBox . . . 1155
12.99.3.46 verticalLayout . . . 1155
12.99.3.47 verticalSpacer . . . 1155
12.99.3.48 verticalSpacer_2 . . . 1155
12.99.3.49 verticalSpacer_3 . . . 1155
12.99.3.50 xBox0 . . . 1155
12.99.3.51 xBox1 . . . 1156
12.99.3.52 xBox2 . . . 1156
12.99.3.53 xBox3 . . . 1156
12.99.3.54 xBox4 . . . 1156
12.99.3.55 xBox5 . . . 1156
12.99.3.56 xSlider0 . . . 1156
12.99.3.57 xSlider1 . . . 1156
12.99.3.58 xSlider2 . . . 1156
12.99.3.59 xSlider3 . . . 1156
12.99.3.60 xSlider4 . . . 1157
12.99.3.61 xSlider5 . . . 1157
12.99.3.62 xyBox . . . 1157
12.99.3.63 yBox0 . . . 1157
12.99.3.64 yBox1 . . . 1157
12.99.3.65 yBox2 . . . 1157
12.99.3.66 yBox3 . . . 1157
12.99.3.67 yBox4 . . . 1157
12.99.3.68 yBox5 . . . 1157
12.99.3.69 ySlider0 . . . 1158
12.99.3.70 ySlider1 . . . 1158

12.99.3.71 ySlider2 . . . 1158
12.99.3.72 ySlider3 . . . 1158
12.99.3.73 ySlider4 . . . 1158
12.99.3.74 ySlider5 . . . 1158
12.100 Ui_RebindWidget Class Reference . . . 1158
12.100.1 Detailed Description . . . 1162
12.100.2 Member Function Documentation . . . 1162
12.100.2.1 retranslateUi . . . 1162
12.100.2.2 setupUi . . . 1164
12.100.3 Field Documentation . . . 1174
12.100.3.1 actionTab . . . 1174
12.100.3.2 animBox . . . 1174
12.100.3.3 animButton . . . 1174
12.100.3.4 animKrBox . . . 1175
12.100.3.5 animOnceBox . . . 1175
12.100.3.6 animTab . . . 1175
12.100.3.7 applyButton . . . 1175
12.100.3.8 btnClearMacro . . . 1175
12.100.3.9 btnStartMacro . . . 1175
12.100.3.10 btnStopMacro . . . 1175
12.100.3.11 cancelButton . . . 1175
12.100.3.12 delayButtons . . . 1175
12.100.3.13 dpiBox . . . 1176
12.100.3.14 dpiButton . . . 1176
12.100.3.15 dpiCustLabel . . . 1176
12.100.3.16 dpiCustXBox . . . 1176
12.100.3.17 dpiCustYBox . . . 1176
12.100.3.18 dpiWarning . . . 1176
12.100.3.19 fnBox . . . 1176
12.100.3.20 fnButton . . . 1176
12.100.3.21 gridLayout . . . 1177
12.100.3.22 gridLayout_10 . . . 1177
12.100.3.23 gridLayout_2 . . . 1177
12.100.3.24 gridLayout_3 . . . 1177
12.100.3.25 gridLayout_4 . . . 1177
12.100.3.26 gridLayout_5 . . . 1177
12.100.3.27 gridLayout_8 . . . 1177
12.100.3.28 groupBox_2 . . . 1177
12.100.3.29 groupBox_3 . . . 1177
12.100.3.30 groupBox_4 . . . 1178

12.100.3.31 HorizontalLayout . . . 1178
12.100.3.32 HorizontalLayout_2 . . . 1178
12.100.3.33 HorizontalLayout_3 . . . 1178
12.100.3.34 HorizontalSpacer . . . 1178
12.100.3.35 HorizontalSpacer_10 . . . 1178
12.100.3.36 HorizontalSpacer_11 . . . 1178
12.100.3.37 HorizontalSpacer_12 . . . 1178
12.100.3.38 HorizontalSpacer_13 . . . 1178
12.100.3.39 HorizontalSpacer_14 . . . 1179
12.100.3.40 HorizontalSpacer_15 . . . 1179
12.100.3.41 HorizontalSpacer_16 . . . 1179
12.100.3.42 HorizontalSpacer_17 . . . 1179
12.100.3.43 HorizontalSpacer_18 . . . 1179
12.100.3.44 HorizontalSpacer_19 . . . 1179
12.100.3.45 HorizontalSpacer_2 . . . 1179
12.100.3.46 HorizontalSpacer_20 . . . 1179
12.100.3.47 HorizontalSpacer_21 . . . 1179
12.100.3.48 HorizontalSpacer_22 . . . 1180
12.100.3.49 HorizontalSpacer_23 . . . 1180
12.100.3.50 HorizontalSpacer_24 . . . 1180
12.100.3.51 HorizontalSpacer_25 . . . 1180
12.100.3.52 HorizontalSpacer_26 . . . 1180
12.100.3.53 HorizontalSpacer_3 . . . 1180
12.100.3.54 HorizontalSpacer_4 . . . 1180
12.100.3.55 HorizontalSpacer_5 . . . 1180
12.100.3.56 HorizontalSpacer_6 . . . 1180
12.100.3.57 HorizontalSpacer_7 . . . 1181
12.100.3.58 HorizontalSpacer_8 . . . 1181
12.100.3.59 HorizontalSpacer_9 . . . 1181
12.100.3.60 KeyTab . . . 1181
12.100.3.61 label . . . 1181
12.100.3.62 layoutWidget . . . 1181
12.100.3.63 layoutWidget1 . . . 1181
12.100.3.64 layoutWidget2 . . . 1181
12.100.3.65 layoutWidget_2 . . . 1181
12.100.3.66 lcl_macro . . . 1182
12.100.3.67 lightBox . . . 1182
12.100.3.68 lightButton . . . 1182
12.100.3.69 lightWrapBox . . . 1182
12.100.3.70 lockBox . . . 1182

12.100.3.71 lockButton . . . 1182
12.100.3.72 macroTab . . . 1182
12.100.3.73 mb2Box . . . 1182
12.100.3.74 mb2Button . . . 1183
12.100.3.75 mbBox . . . 1183
12.100.3.76 mbButton . . . 1183
12.100.3.77 mediaBox . . . 1183
12.100.3.78 mediaButton . . . 1183
12.100.3.79 modBox . . . 1183
12.100.3.80 modButton . . . 1183
12.100.3.81 modeBox . . . 1183
12.100.3.82 modeButton . . . 1184
12.100.3.83 modeWrapBox . . . 1184
12.100.3.84 mouseTab . . . 1184
12.100.3.85 numBox . . . 1184
12.100.3.86 numButton . . . 1184
12.100.3.87 programKpBox . . . 1184
12.100.3.88 programKpButton . . . 1184
12.100.3.89 programKpExtra . . . 1184
12.100.3.90 programKpModeBox . . . 1184
12.100.3.91 programKpSIBox . . . 1185
12.100.3.92 programKrBox . . . 1185
12.100.3.93 programKrButton . . . 1185
12.100.3.94 programKrExtra . . . 1185
12.100.3.95 programKrModeBox . . . 1185
12.100.3.96 programKrSIBox . . . 1185
12.100.3.97 programTab . . . 1185
12.100.3.98 progTipLabel . . . 1185
12.100.3.99 pteMacroBox . . . 1186
12.100.3.100 pteMacroComment . . . 1186
12.100.3.101 pteMacroText . . . 1186
12.100.3.102 rb_delay_asTyped . . . 1186
12.100.3.103 rb_delay_default . . . 1186
12.100.3.104 rb_delay_no . . . 1186
12.100.3.105 resetButton . . . 1186
12.100.3.106 rgbWidget . . . 1186
12.100.3.107 txtBuffer . . . 1187
12.100.3.108 typingBox . . . 1187
12.100.3.109 typingButton . . . 1187
12.100.3.110 unbindButton . . . 1187

12.100.3.11 verticalLayout . . . 1187
12.100.3.12 verticalLayout_2 . . . 1187
12.100.3.13 verticalSpacer . . . 1187
12.100.3.14 verticalSpacer_10 . . . 1187
12.100.3.15 verticalSpacer_11 . . . 1187
12.100.3.16 verticalSpacer_2 . . . 1188
12.100.3.17 verticalSpacer_3 . . . 1188
12.100.3.18 verticalSpacer_4 . . . 1188
12.100.3.19 verticalSpacer_5 . . . 1188
12.100.3.20 verticalSpacer_6 . . . 1188
12.100.3.21 verticalSpacer_7 . . . 1188
12.100.3.22 verticalSpacer_8 . . . 1188
12.100.3.23 wheelBox . . . 1188
12.100.3.24 wheelButton . . . 1188
12.101 Ui_SettingsWidget Class Reference . . . 1189
12.101.1 Detailed Description . . . 1191
12.101.2 Member Function Documentation . . . 1191
12.101.2.1 retranslateUi . . . 1191
12.101.2.2 setupUi . . . 1192
12.101.3 Field Documentation . . . 1196
12.101.3.1 altBox . . . 1196
12.101.3.2 altLabel . . . 1196
12.101.3.3 autoFWBox . . . 1196
12.101.3.4 capsBox . . . 1196
12.101.3.5 capsLabel . . . 1196
12.101.3.6 ctrlBox . . . 1196
12.101.3.7 ctrlLabel . . . 1196
12.101.3.8 devicesLabel . . . 1197
12.101.3.9 extraButton . . . 1197
12.101.3.10 gridLayout . . . 1197
12.101.3.11 gridLayout_3 . . . 1197
12.101.3.12 gridLayout_5 . . . 1197
12.101.3.13 horizontalLayout . . . 1197
12.101.3.14 horizontalLayout_2 . . . 1197
12.101.3.15 horizontalSpacer . . . 1197
12.101.3.16 horizontalSpacer_10 . . . 1197
12.101.3.17 horizontalSpacer_2 . . . 1198
12.101.3.18 horizontalSpacer_7 . . . 1198
12.101.3.19 horizontalSpacer_9 . . . 1198
12.101.3.20 label . . . 1198

12.101.3.21 label_2 . . . 1198
12.101.3.22 label_3 . . . 1198
12.101.3.23 label_5 . . . 1198
12.101.3.24 label_6 . . . 1198
12.101.3.25 label_8 . . . 1198
12.101.3.26 layoutBox . . . 1199
12.101.3.27 line . . . 1199
12.101.3.28 line_2 . . . 1199
12.101.3.29 line_3 . . . 1199
12.101.3.30 loginItemBox . . . 1199
12.101.3.31 pushButton . . . 1199
12.101.3.32 shiftBox . . . 1199
12.101.3.33 shiftLabel . . . 1199
12.101.3.34 versionLabel . . . 1199
12.101.3.35 verticalSpacer . . . 1200
12.101.3.36 verticalSpacer_10 . . . 1200
12.101.3.37 verticalSpacer_2 . . . 1200
12.101.3.38 verticalSpacer_3 . . . 1200
12.101.3.39 verticalSpacer_4 . . . 1200
12.101.3.40 verticalSpacer_5 . . . 1200
12.101.3.41 verticalSpacer_6 . . . 1200
12.101.3.42 verticalSpacer_7 . . . 1200
12.101.3.43 verticalSpacer_8 . . . 1200
12.101.3.44 winBox . . . 1201
12.101.3.45 winLabel . . . 1201
12.102 UsbId Struct Reference . . . 1201
12.102.1 Detailed Description . . . 1202
12.102.2 Constructor & Destructor Documentation . . . 1202
12.102.2.1 UsbId . . . 1202
12.102.2.2 UsbId . . . 1202
12.102.2.3 UsbId . . . 1202
12.102.3 Member Function Documentation . . . 1202
12.102.3.1 guidString . . . 1202
12.102.3.2 guidString . . . 1203
12.102.3.3 hwModifiedString . . . 1203
12.102.3.4 hwModifiedString . . . 1203
12.102.3.5 modifiedString . . . 1204
12.102.3.6 modifiedString . . . 1204
12.102.3.7 newGuid . . . 1204
12.102.3.8 newModified . . . 1205

12.102.4 Field Documentation . . . 1205
12.102.4.1 guid . . . 1205
12.102.4.2 hwModified . . . 1205
12.102.4.3 modified . . . 1205

13 File Documentation **1207**

13.1 BUILD.md File Reference . . . 1207
13.2 DAEMON.md File Reference . . . 1207
13.3 README.md File Reference . . . 1207
13.4 ROADMAP.md File Reference . . . 1207
13.5 src/ckb/animadddialog.cpp File Reference . . . 1207
13.6 src/ckb/animadddialog.h File Reference . . . 1207
13.7 src/ckb/animscript.cpp File Reference . . . 1208
13.7.1 Function Documentation . . . 1209
13.7.1.1 urlParam . . . 1209
13.7.2 Variable Documentation . . . 1209
13.7.2.1 ONE_DAY . . . 1209
13.8 src/ckb/animscript.h File Reference . . . 1210
13.8.1 Data Structure Documentation . . . 1210
13.8.1.1 struct AnimScript::Param . . . 1210
13.9 src/ckb/animsettingdialog.cpp File Reference . . . 1211
13.9.1 Function Documentation . . . 1212
13.9.1.1 angleFlip . . . 1212
13.10 src/ckb/animsettingdialog.h File Reference . . . 1213
13.11 src/ckb/autorun.cpp File Reference . . . 1213
13.11.1 Variable Documentation . . . 1214
13.11.1.1 settingPath . . . 1214
13.12 src/ckb/autorun.h File Reference . . . 1214
13.13 src/ckb/ckb-anim.h File Reference . . . 1215
13.13.1 Data Structure Documentation . . . 1217
13.13.1.1 struct ckb_key . . . 1217
13.13.1.2 struct ckb_runctx . . . 1218
13.13.1.3 struct ckb_gradient . . . 1219
13.13.2 Macro Definition Documentation . . . 1220
13.13.2.1 CKB_CONTAINER . . . 1220
13.13.2.2 CKB_COPYRIGHT . . . 1220
13.13.2.3 CKB_DESCRIPTION . . . 1220
13.13.2.4 CKB_DOWN . . . 1220
13.13.2.5 CKB_GRAD_MAX . . . 1221
13.13.2.6 CKB_GUID . . . 1221

13.13.2.7 CKB_KEYCLEAR . . . 1221
13.13.2.8 CKB_KEYNAME_MAX . . . 1221
13.13.2.9 CKB_KP_NAME . . . 1221
13.13.2.10 CKB_KP_NONE . . . 1221
13.13.2.11 CKB_KP_POSITION . . . 1221
13.13.2.12 CKB_KPMODE . . . 1221
13.13.2.13 CKB_LICENSE . . . 1221
13.13.2.14 CKB_LIVEPARAMS . . . 1221
13.13.2.15 CKB_MAX_WORD . . . 1221
13.13.2.16 CKB_NAME . . . 1222
13.13.2.17 CKB_PARAM . . . 1222
13.13.2.18 CKB_PARAM_AGRADIENT . . . 1222
13.13.2.19 CKB_PARAM_ANGLE . . . 1222
13.13.2.20 CKB_PARAM_ARGB . . . 1222
13.13.2.21 CKB_PARAM_BOOL . . . 1222
13.13.2.22 CKB_PARAM_DOUBLE . . . 1222
13.13.2.23 CKB_PARAM_GRADIENT . . . 1222
13.13.2.24 CKB_PARAM_LABEL . . . 1222
13.13.2.25 CKB_PARAM_LONG . . . 1222
13.13.2.26 CKB_PARAM_RGB . . . 1223
13.13.2.27 CKB_PARAM_STRING . . . 1223
13.13.2.28 CKB_PARSE_AGRADIENT . . . 1223
13.13.2.29 CKB_PARSE_ANGLE . . . 1223
13.13.2.30 CKB_PARSE_ARGB . . . 1223
13.13.2.31 CKB_PARSE_BOOL . . . 1223
13.13.2.32 CKB_PARSE_DOUBLE . . . 1223
13.13.2.33 CKB_PARSE_GRADIENT . . . 1223
13.13.2.34 CKB_PARSE_LONG . . . 1223
13.13.2.35 CKB_PARSE_RGB . . . 1223
13.13.2.36 CKB_PARSE_STRING . . . 1224
13.13.2.37 CKB_PREEMPT . . . 1224
13.13.2.38 CKB_PRESET_END . . . 1224
13.13.2.39 CKB_PRESET_PARAM . . . 1224
13.13.2.40 CKB_PRESET_START . . . 1224
13.13.2.41 CKB_REAL_ANGLE . . . 1224
13.13.2.42 CKB_REPEAT . . . 1224
13.13.2.43 CKB_TIME_ABSOLUTE . . . 1224
13.13.2.44 CKB_TIME_DURATION . . . 1224
13.13.2.45 CKB_TIMEMODE . . . 1224
13.13.2.46 CKB_UP . . . 1224

13.13.2.47 CKB_VERSION . . . 1224
13.13.2.48 FALSE . . . 1225
13.13.2.49 M_PI . . . 1225
13.13.2.50 TRUE . . . 1225
13.13.3 Function Documentation . . . 1225
13.13.3.1 ckb_alpha_blend . . . 1225
13.13.3.2 ckb_frame . . . 1225
13.13.3.3 ckb_getline . . . 1225
13.13.3.4 ckb_grad_color . . . 1226
13.13.3.5 ckb_info . . . 1227
13.13.3.6 ckb_init . . . 1227
13.13.3.7 ckb_keypress . . . 1227
13.13.3.8 ckb_parameter . . . 1228
13.13.3.9 ckb_read_params . . . 1228
13.13.3.10 ckb_scan_grad . . . 1229
13.13.3.11 ckb_start . . . 1229
13.13.3.12 ckb_time . . . 1230
13.13.3.13 main . . . 1230
13.13.3.14 printurl . . . 1232
13.13.3.15 urldecode . . . 1233
13.14 src/ckb/ckbsettings.cpp File Reference . . . 1234
13.14.1 Macro Definition Documentation . . . 1234
13.14.1.1 lockMutex . . . 1234
13.14.1.2 lockMutexCache . . . 1235
13.14.1.3 lockMutexStatic . . . 1235
13.14.1.4 lockMutexStatic2 . . . 1235
13.14.2 Function Documentation . . . 1235
13.14.2.1 cacheWritesInProgress . . . 1235
13.14.2.2 globalSettings . . . 1235
13.14.2.3 settingsCacheMutex . . . 1236
13.14.2.4 settingsMutex . . . 1236
13.14.3 Variable Documentation . . . 1236
13.14.3.1 _globalSettings . . . 1236
13.14.3.2 globalCache . . . 1236
13.14.3.3 globalThread . . . 1236
13.15 src/ckb/ckbsettings.h File Reference . . . 1236
13.16 src/ckb/ckbsettingswriter.cpp File Reference . . . 1237
13.16.1 Macro Definition Documentation . . . 1238
13.16.1.1 lockMutex . . . 1238
13.16.1.2 lockMutexCache . . . 1238

13.16.1.3 lockMutexStatic . . . 1238
13.16.1.4 lockMutexStatic2 . . . 1238
13.16.2 Variable Documentation . . . 1239
13.16.2.1 cacheWritesInProgress . . . 1239
13.16.2.2 settingsCacheMutex . . . 1239
13.16.2.3 settingsMutex . . . 1239
13.17 src/ckb/ckbsettingswriter.h File Reference . . . 1239
13.18 src/ckb/colorbutton.cpp File Reference . . . 1239
13.19 src/ckb/colorbutton.h File Reference . . . 1240
13.20 src/ckb/colormap.cpp File Reference . . . 1241
13.20.1 Function Documentation . . . 1241
13.20.1.1 qs_strcmp . . . 1241
13.21 src/ckb/colormap.h File Reference . . . 1242
13.21.1 Typedef Documentation . . . 1243
13.21.1.1 QColorMap . . . 1243
13.21.1.2 QColorMapIterator . . . 1243
13.21.1.3 QMutableColorMapIterator . . . 1243
13.22 src/ckb/extrasettingswidget.cpp File Reference . . . 1243
13.22.1 Variable Documentation . . . 1243
13.22.1.1 lastSharedDimming . . . 1243
13.23 src/ckb/extrasettingswidget.h File Reference . . . 1244
13.24 src/ckb/fwupgradedialog.cpp File Reference . . . 1244
13.24.1 Data Structure Documentation . . . 1245
13.24.1.1 struct KbId . . . 1245
13.24.2 Function Documentation . . . 1246
13.24.2.1 DIALOG_HEIGHT_MAX . . . 1246
13.24.2.2 verifyFw . . . 1246
13.24.3 Variable Documentation . . . 1247
13.24.3.1 DIALOG_HEIGHT_MIN . . . 1247
13.24.3.2 DIALOG_WIDTH . . . 1247
13.24.3.3 ids . . . 1247
13.25 src/ckb/fwupgradedialog.h File Reference . . . 1247
13.26 src/ckb/gradientbutton.cpp File Reference . . . 1248
13.27 src/ckb/gradientbutton.h File Reference . . . 1249
13.28 src/ckb/gradientdialog.cpp File Reference . . . 1250
13.28.1 Variable Documentation . . . 1250
13.28.1.1 prefsPath . . . 1250
13.29 src/ckb/gradientdialog.h File Reference . . . 1250
13.30 src/ckb/gradientdialogwidget.cpp File Reference . . . 1251
13.31 src/ckb/gradientdialogwidget.h File Reference . . . 1251

13.32 src/ckb/kb.cpp File Reference . . . 1252
13.32.1 Variable Documentation . . . 1253
13.32.1.1 activeDevices . . . 1253
13.32.1.2 notifyPathMutex . . . 1253
13.32.1.3 notifyPaths . . . 1253
13.33 src/ckb/kb.h File Reference . . . 1253
13.34 src/ckb/kbanim.cpp File Reference . . . 1254
13.34.1 Typedef Documentation . . . 1255
13.34.1.1 blendFunc . . . 1255
13.34.2 Function Documentation . . . 1255
13.34.2.1 blendAdd . . . 1255
13.34.2.2 blendDivide . . . 1255
13.34.2.3 blendMultiply . . . 1255
13.34.2.4 blendNormal . . . 1256
13.34.2.5 blendSubtract . . . 1256
13.34.3 Variable Documentation . . . 1256
13.34.3.1 functions . . . 1256
13.35 src/ckb/kbanim.h File Reference . . . 1256
13.36 src/ckb/kbanimwidget.cpp File Reference . . . 1257
13.37 src/ckb/kbanimwidget.h File Reference . . . 1257
13.38 src/ckb/kbbind.cpp File Reference . . . 1258
13.39 src/ckb/kbbind.h File Reference . . . 1259
13.40 src/ckb/kbbindwidget.cpp File Reference . . . 1260
13.41 src/ckb/kbbindwidget.h File Reference . . . 1260
13.42 src/ckb/kbfirmware.cpp File Reference . . . 1261
13.42.1 Function Documentation . . . 1262
13.42.1.1 tableName . . . 1262
13.42.2 Variable Documentation . . . 1262
13.42.2.1 AUTO_CHECK_TIME . . . 1262
13.43 src/ckb/kbfirmware.h File Reference . . . 1262
13.44 src/ckb/kblight.cpp File Reference . . . 1263
13.44.1 Function Documentation . . . 1264
13.44.1.1 lToS . . . 1264
13.44.1.2 monoRgb . . . 1265
13.44.1.3 sToL . . . 1265
13.44.2 Variable Documentation . . . 1266
13.44.2.1 _shareDimming . . . 1266
13.44.2.2 activeLights . . . 1266
13.45 src/ckb/kblight.h File Reference . . . 1266
13.46 src/ckb/kblightwidget.cpp File Reference . . . 1267

13.47 src/ckb/kblightwidget.h File Reference . . . 1267
13.48 src/ckb/kbmanager.cpp File Reference . . . 1268
13.48.1 Variable Documentation . . . 1269
13.48.1.1 devpath . . . 1269
13.49 src/ckb/kbmanager.h File Reference . . . 1269
13.49.1 Macro Definition Documentation . . . 1270
13.49.1.1 DAEMON_UNAVAILABLE_STR . . . 1270
13.50 src/ckb/kbmode.cpp File Reference . . . 1270
13.51 src/ckb/kbmode.h File Reference . . . 1270
13.52 src/ckb/kbperf.cpp File Reference . . . 1271
13.52.1 Macro Definition Documentation . . . 1271
13.52.1.1 map_last . . . 1271
13.53 src/ckb/kbperf.h File Reference . . . 1271
13.54 src/ckb/kbprofile.cpp File Reference . . . 1272
13.55 src/ckb/kbprofile.h File Reference . . . 1273
13.56 src/ckb/kbprofiledialog.cpp File Reference . . . 1273
13.57 src/ckb/kbprofiledialog.h File Reference . . . 1274
13.58 src/ckb/kbwidget.cpp File Reference . . . 1275
13.59 src/ckb/kbwidget.h File Reference . . . 1275
13.60 src/ckb/keyaction.cpp File Reference . . . 1276
13.60.1 Variable Documentation . . . 1277
13.60.1.1 ANIM_KRSTOP . . . 1277
13.60.1.2 ANIM_ONCE . . . 1277
13.61 src/ckb/keyaction.h File Reference . . . 1277
13.62 src/ckb/keymap.cpp File Reference . . . 1278
13.62.1 Data Structure Documentation . . . 1279
13.62.1.1 struct KeyPatch . . . 1279
13.62.2 Macro Definition Documentation . . . 1280
13.62.2.1 ANSI_ENTER_H . . . 1280
13.62.2.2 ANSI_ENTER_W . . . 1280
13.62.2.3 ANSI_ENTER_X . . . 1280
13.62.2.4 ANSI_ENTER_Y . . . 1280
13.62.2.5 ANSI_LSHIFT_W . . . 1281
13.62.2.6 ANSI_LSHIFT_X . . . 1281
13.62.2.7 K65_HEIGHT . . . 1281
13.62.2.8 K65_TOP_COUNT . . . 1281
13.62.2.9 K65_WIDTH . . . 1281
13.62.2.10 K70_HEIGHT . . . 1281
13.62.2.11 K70_WIDTH . . . 1281
13.62.2.12 K70_X_START . . . 1281

13.62.2.13 K95_HEIGHT . . . 1281
13.62.2.14 K95_WIDTH . . . 1281
13.62.2.15 KEYCOUNT_K95 . . . 1282
13.62.2.16 KEYCOUNT_M65 . . . 1282
13.62.2.17 KEYCOUNT_SABRE . . . 1282
13.62.2.18 KEYCOUNT_SCIM . . . 1282
13.62.2.19 KSTRAFE_HEIGHT . . . 1282
13.62.2.20 KSTRAFE_WIDTH . . . 1282
13.62.2.21 KSTRAFE_X_START . . . 1282
13.62.2.22 M65_HEIGHT . . . 1282
13.62.2.23 M65_WIDTH . . . 1282
13.62.2.24 N_LAYOUTS . . . 1283
13.62.2.25 N_MODELS . . . 1283
13.62.2.26 NS . . . 1283
13.62.2.27 patch . . . 1283
13.62.2.28 PATCH_COUNT . . . 1283
13.62.2.29 SABRE_HEIGHT . . . 1283
13.62.2.30 SABRE_WIDTH . . . 1283
13.62.2.31 SCIM_HEIGHT . . . 1283
13.62.2.32 SCIM_WIDTH . . . 1283
13.62.3 Function Documentation . . . 1283
13.62.3.1 _patch . . . 1283
13.62.3.2 getMap . . . 1284
13.62.3.3 patchANSI . . . 1286
13.62.3.4 patchISO . . . 1287
13.62.4 Variable Documentation . . . 1287
13.62.4.1 K65TopRow . . . 1287
13.62.4.2 K95BaseMap . . . 1287
13.62.4.3 K95Keys . . . 1288
13.62.4.4 KStrafeKeys . . . 1288
13.62.4.5 M65Keys . . . 1289
13.62.4.6 patchDE . . . 1289
13.62.4.7 patchDK . . . 1289
13.62.4.8 patchDvorak . . . 1289
13.62.4.9 patchES . . . 1290
13.62.4.10 patchEU . . . 1290
13.62.4.11 patchFR . . . 1290
13.62.4.12 patchIT . . . 1290
13.62.4.13 patchMX . . . 1290
13.62.4.14 patchNO . . . 1291

13.62.4.15 patchSE . . . 1291
13.62.4.16 SabreKeys . . . 1291
13.62.4.17 ScimKeys . . . 1291
13.62.4.18 standardMaps . . . 1292
13.63 src/ckb/keymap.h File Reference . . . 1292
13.64 src/ckb/keywidget.cpp File Reference . . . 1292
13.64.1 Function Documentation . . . 1293
13.64.1.1 monoRgb . . . 1293
13.64.2 Variable Documentation . . . 1294
13.64.2.1 KEY_SIZE . . . 1294
13.64.2.2 m65Overlay . . . 1294
13.64.2.3 sabOverlay . . . 1294
13.64.2.4 scimOverlay . . . 1294
13.65 src/ckb/keywidget.h File Reference . . . 1294
13.66 src/ckb/kperfwidget.cpp File Reference . . . 1295
13.67 src/ckb/kperfwidget.h File Reference . . . 1296
13.67.1 Data Structure Documentation . . . 1296
13.67.1.1 struct KPerfWidget::IndicatorUi . . . 1297
13.68 src/ckb/layoutdialog.cpp File Reference . . . 1298
13.69 src/ckb/layoutdialog.h File Reference . . . 1298
13.70 src/ckb/macroreader.cpp File Reference . . . 1299
13.71 src/ckb/macroreader.h File Reference . . . 1299
13.72 src/ckb/main.cpp File Reference . . . 1300
13.72.1 Macro Definition Documentation . . . 1301
13.72.1.1 SHMEM_SIZE . . . 1301
13.72.1.2 SHMEM_SIZE_V015 . . . 1302
13.72.2 Enumeration Type Documentation . . . 1302
13.72.2.1 CommandLineParseResults . . . 1302
13.72.3 Function Documentation . . . 1302
13.72.3.1 appShare . . . 1302
13.72.3.2 isRunning . . . 1302
13.72.3.3 main . . . 1303
13.72.3.4 parseCommandLine . . . 1305
13.72.3.5 pidActive . . . 1306
13.73 src/ckb/mainwindow.cpp File Reference . . . 1307
13.73.1 Variable Documentation . . . 1307
13.73.1.1 appShare . . . 1307
13.73.1.2 configLabel . . . 1307
13.74 src/ckb/mainwindow.h File Reference . . . 1307
13.75 src/ckb/media.h File Reference . . . 1308

13.75.1 Macro Definition Documentation . . . 1309
13.75.1.1 ENUM_C . . . 1309
13.75.1.2 ENUM_END_C . . . 1309
13.75.1.3 EXTERN_C . . . 1309
13.75.2 Enumeration Type Documentation . . . 1309
13.75.2.1 muteState . . . 1309
13.75.3 Function Documentation . . . 1309
13.75.3.1 getMuteState . . . 1309
13.76 src/ckb/media_linux.cpp File Reference . . . 1310
13.76.1 Function Documentation . . . 1311
13.76.1.1 getMuteState . . . 1311
13.76.2 Variable Documentation . . . 1311
13.76.2.1 muteProcess . . . 1311
13.77 src/ckb/media_mac.m File Reference . . . 1311
13.77.1 Function Documentation . . . 1312
13.77.1.1 disableAppNap . . . 1312
13.77.1.2 getMuteState . . . 1312
13.78 src/ckb/modeselectdialog.cpp File Reference . . . 1313
13.79 src/ckb/modeselectdialog.h File Reference . . . 1313
13.80 src/ckb/mperfwidget.cpp File Reference . . . 1314
13.80.1 Macro Definition Documentation . . . 1315
13.80.1.1 SET_END . . . 1315
13.80.1.2 SET_START . . . 1315
13.80.2 Function Documentation . . . 1315
13.80.2.1 dpiExp . . . 1315
13.80.2.2 dpiLog . . . 1316
13.80.2.3 dpiRound . . . 1316
13.80.3 Variable Documentation . . . 1316
13.80.3.1 DPI_BASE . . . 1316
13.80.3.2 xyLinkPath . . . 1317
13.81 src/ckb/mperfwidget.h File Reference . . . 1317
13.81.1 Data Structure Documentation . . . 1318
13.81.1.1 struct MPerfWidget::DpiUi . . . 1318
13.82 src/ckb/quazip/crypt.h File Reference . . . 1319
13.82.1 Macro Definition Documentation . . . 1320
13.82.1.1 CRC32 . . . 1320
13.82.1.2 zdecode . . . 1320
13.82.1.3 zencode . . . 1320
13.82.2 Function Documentation . . . 1320
13.82.2.1 decrypt_byte . . . 1320

13.82.2.2 init_keys . . . 1320
13.82.2.3 update_keys . . . 1321
13.83 src/ckb/quazip/ioapi.h File Reference . . . 1322
13.83.1 Data Structure Documentation . . . 1324
13.83.1.1 struct zlib_filefunc_def_s . . . 1324
13.83.1.2 struct zlib_filefunc64_def_s . . . 1324
13.83.1.3 struct zlib_filefunc64_32_def_s . . . 1325
13.83.2 Macro Definition Documentation . . . 1325
13.83.2.1 __USE_FILE_OFFSET64 . . . 1325
13.83.2.2 __USE_LARGEFILE64 . . . 1325
13.83.2.3 _FILE_OFFSET_BIT . . . 1326
13.83.2.4 _LARGEFILE64_SOURCE . . . 1326
13.83.2.5 OF . . . 1326
13.83.2.6 ZCALLBACK . . . 1326
13.83.2.7 ZCLOSE64 . . . 1326
13.83.2.8 ZERROR64 . . . 1326
13.83.2.9 ZFAKECLOSE64 . . . 1326
13.83.2.10 ZLIB_FILEFUNC_MODE_CREATE . . . 1326
13.83.2.11 ZLIB_FILEFUNC_MODE_EXISTING . . . 1326
13.83.2.12 ZLIB_FILEFUNC_MODE_READ . . . 1326
13.83.2.13 ZLIB_FILEFUNC_MODE_READWRITEFILTER . . . 1327
13.83.2.14 ZLIB_FILEFUNC_MODE_WRITE . . . 1327
13.83.2.15 ZLIB_FILEFUNC_SEEK_CUR . . . 1327
13.83.2.16 ZLIB_FILEFUNC_SEEK_END . . . 1327
13.83.2.17 ZLIB_FILEFUNC_SEEK_SET . . . 1327
13.83.2.18 ZOPEN64 . . . 1327
13.83.2.19 ZREAD64 . . . 1327
13.83.2.20 ZSEEK64 . . . 1327
13.83.2.21 ZTELL64 . . . 1328
13.83.2.22 ZWRITE64 . . . 1328
13.83.3 Typedef Documentation . . . 1328
13.83.3.1 _Z_OF . . . 1328
13.83.3.2 zlib_filefunc64_32_def . . . 1328
13.83.3.3 zlib_filefunc64_def . . . 1328
13.83.3.4 zlib_filefunc_def . . . 1328
13.83.3.5 ZPOS64_T . . . 1328
13.83.4 Function Documentation . . . 1328
13.83.4.1 _Z_OF . . . 1328
13.83.4.2 _Z_OF . . . 1328
13.83.4.3 _Z_OF . . . 1328

13.83.4.4 _Z_OF . . . 1328
13.83.4.5 _Z_OF . . . 1328
13.83.4.6 fill_zlib_filefunc64_32_def_from_filefunc32 . . . 1329
13.84 src/ckb/quazip/JlCompress.cpp File Reference . . . 1329
13.84.1 Function Documentation . . . 1330
13.84.1.1 copyData . . . 1330
13.85 src/ckb/quazip/JlCompress.h File Reference . . . 1331
13.86 src/ckb/quazip/qioapi.cpp File Reference . . . 1331
13.86.1 Macro Definition Documentation . . . 1333
13.86.1.1 SEEK_CUR . . . 1333
13.86.1.2 SEEK_END . . . 1333
13.86.1.3 SEEK_SET . . . 1333
13.86.2 Function Documentation . . . 1333
13.86.2.1 call_zopen64 . . . 1333
13.86.2.2 call_zseek64 . . . 1333
13.86.2.3 call_ztell64 . . . 1333
13.86.2.4 fill_qiodevice64_filefunc . . . 1334
13.86.2.5 fill_qiodevice_filefunc . . . 1335
13.86.2.6 fill_zlib_filefunc64_32_def_from_filefunc32 . . . 1336
13.86.2.7 qiodevice64_seek_file_func . . . 1337
13.86.2.8 qiodevice64_tell_file_func . . . 1338
13.86.2.9 qiodevice_close_file_func . . . 1338
13.86.2.10 qiodevice_error_file_func . . . 1339
13.86.2.11 qiodevice_fakeclose_file_func . . . 1339
13.86.2.12 qiodevice_open_file_func . . . 1340
13.86.2.13 qiodevice_read_file_func . . . 1341
13.86.2.14 qiodevice_seek_file_func . . . 1341
13.86.2.15 qiodevice_tell_file_func . . . 1342
13.86.2.16 qiodevice_write_file_func . . . 1343
13.87 src/ckb/quazip/quaadler32.cpp File Reference . . . 1343
13.88 src/ckb/quazip/quaadler32.h File Reference . . . 1344
13.89 src/ckb/quazip/quachecksum32.h File Reference . . . 1345
13.90 src/ckb/quazip/quacrc32.cpp File Reference . . . 1346
13.91 src/ckb/quazip/quacrc32.h File Reference . . . 1347
13.92 src/ckb/quazip/quagzipfile.cpp File Reference . . . 1348
13.93 src/ckb/quazip/quagzipfile.h File Reference . . . 1349
13.94 src/ckb/quazip/quaziodevice.cpp File Reference . . . 1350
13.94.1 Macro Definition Documentation . . . 1351
13.94.1.1 QUAZIO_INBUFSIZE . . . 1351
13.94.1.2 QUAZIO_OUTBUFSIZE . . . 1351

13.95 src/ckb/quazip/quaziodevice.h File Reference . . . 1351
13.96 src/ckb/quazip/quazip.cpp File Reference . . . 1352
13.96.1 Function Documentation . . . 1353
13.96.1.1 QuaZip_getFileInfo . . . 1353
13.96.1.2 QuaZip_getFileInfo . . . 1353
13.96.1.3 QuaZip_getFileInfo . . . 1354
13.96.1.4 QuaZip_getFileInfo . . . 1354
13.97 src/ckb/quazip/quazip.h File Reference . . . 1354
13.97.1 Macro Definition Documentation . . . 1355
13.97.1.1 UNZ_OPENERROR . . . 1355
13.98 src/ckb/quazip/quazip_global.h File Reference . . . 1355
13.98.1 Macro Definition Documentation . . . 1356
13.98.1.1 QUAZIP_EXPORT . . . 1356
13.98.1.2 QUAZIP_EXTRA_NTFS_MAGIC . . . 1356
13.98.1.3 QUAZIP_EXTRA_NTFS_TIME_MAGIC . . . 1356
13.98.1.4 UNUSED . . . 1357
13.99 src/ckb/quazip/quazipdir.cpp File Reference . . . 1357
13.99.1 Function Documentation . . . 1357
13.99.1.1 QuaZipDir_convertInfoList . . . 1357
13.99.1.2 QuaZipDir_convertInfoList . . . 1357
13.99.1.3 QuaZipDir_convertInfoList . . . 1358
13.99.1.4 QuaZipDir_getFileInfo . . . 1358
13.100 src/ckb/quazip/quazipdir.h File Reference . . . 1359
13.101 src/ckb/quazip/quazipfile.cpp File Reference . . . 1359
13.102 src/ckb/quazip/quazipfile.h File Reference . . . 1360
13.103 src/ckb/quazip/quazipfileinfo.cpp File Reference . . . 1361
13.103.1 Function Documentation . . . 1361
13.103.1.1 getNTFSTime . . . 1362
13.103.1.2 permissionsFromExternalAttr . . . 1363
13.104 src/ckb/quazip/quazipfileinfo.h File Reference . . . 1363
13.105 src/ckb/quazip/quazipnewinfo.cpp File Reference . . . 1364
13.105.1 Function Documentation . . . 1365
13.105.1.1 QuaZipNewInfo_init . . . 1365
13.105.1.2 QuaZipNewInfo_setPermissions . . . 1366
13.105.1.3 setNTFSTime . . . 1366
13.106 src/ckb/quazip/quazipnewinfo.h File Reference . . . 1368
13.107 src/ckb/quazip/unzip.c File Reference . . . 1369
13.107.1 Data Structure Documentation . . . 1372
13.107.1.1 struct unz_file_info64_internal_s . . . 1372
13.107.1.2 struct file_in_zip64_read_info_s . . . 1373

13.107.1.3 struct unz64_s . . . 1373
13.107.2 Macro Definition Documentation . . . 1374
13.107.2.1 ALLOC . . . 1374
13.107.2.2 BUFREADCOMMENT . . . 1375
13.107.2.3 CASESENSITIVITYDEFAULT_NO . . . 1375
13.107.2.4 CASESENSITIVITYDEFAULTVALUE . . . 1375
13.107.2.5 local . . . 1375
13.107.2.6 SIZECENTRALDIRITEM . . . 1375
13.107.2.7 SIZEZIPLOCALHEADER . . . 1375
13.107.2.8 STRCMPCASENOSENTIVEFUNCTION . . . 1375
13.107.2.9 TRYFREE . . . 1375
13.107.2.10 UNZ_BUFSIZE . . . 1375
13.107.2.11 UNZ_MAXFILENAMEINZIP . . . 1376
13.107.3 Typedef Documentation . . . 1376
13.107.3.1 unz_file_info64_internal . . . 1376
13.107.3.2 z_crc_t . . . 1376
13.107.4 Function Documentation . . . 1376
13.107.4.1 _Z_OF . . . 1376
13.107.4.2 _Z_OF . . . 1376
13.107.4.3 _Z_OF . . . 1376
13.107.4.4 _Z_OF . . . 1376
13.107.4.5 _Z_OF . . . 1376
13.107.4.6 strcmpcasenosensitive_internal . . . 1376
13.107.4.7 unz64local_CheckCurrentFileCoherencyHeader . . . 1376
13.107.4.8 unz64local_DosDateToTmuDate . . . 1378
13.107.4.9 unz64local_getByte . . . 1379
13.107.4.10 unz64local_GetCurrentFileInfoInternal . . . 1380
13.107.4.11 unz64local_getLong . . . 1383
13.107.4.12 unz64local_getLong64 . . . 1384
13.107.4.13 unz64local_getShort . . . 1386
13.107.4.14 unz64local_SearchCentralDir . . . 1387
13.107.4.15 unz64local_SearchCentralDir64 . . . 1388
13.107.4.16 unzClearFlags . . . 1389
13.107.4.17 unzClose . . . 1390
13.107.4.18 unzCloseCurrentFile . . . 1391
13.107.4.19 unzeof . . . 1392
13.107.4.20 unzGetCurrentFileInfo . . . 1392
13.107.4.21 unzGetCurrentFileInfo64 . . . 1393
13.107.4.22 unzGetCurrentFileZStreamPos64 . . . 1394
13.107.4.23 unzGetFilePos . . . 1394

13.107.4.24 unzGetFilePos64 . . . 1395
13.107.4.25 unzGetGlobalComment . . . 1395
13.107.4.26 unzGetGlobalInfo . . . 1396
13.107.4.27 unzGetGlobalInfo64 . . . 1396
13.107.4.28 unzGetLocalExtrafield . . . 1397
13.107.4.29 unzGetOffset . . . 1398
13.107.4.30 unzGetOffset64 . . . 1398
13.107.4.31 unzGoToFilePos . . . 1399
13.107.4.32 unzGoToFilePos64 . . . 1399
13.107.4.33 unzGoToFirstFile . . . 1400
13.107.4.34 unzGoToNextFile . . . 1401
13.107.4.35 unzLocateFile . . . 1402
13.107.4.36 unzOpen . . . 1403
13.107.4.37 unzOpen2 . . . 1403
13.107.4.38 unzOpen2_64 . . . 1404
13.107.4.39 unzOpen64 . . . 1405
13.107.4.40 unzOpenCurrentFile . . . 1406
13.107.4.41 unzOpenCurrentFile2 . . . 1406
13.107.4.42 unzOpenCurrentFile3 . . . 1406
13.107.4.43 unzOpenCurrentFilePassword . . . 1409
13.107.4.44 unzOpenInternal . . . 1410
13.107.4.45 unzReadCurrentFile . . . 1413
13.107.4.46 unzSetFlags . . . 1416
13.107.4.47 unzSetOffset . . . 1417
13.107.4.48 unzSetOffset64 . . . 1417
13.107.4.49 unzStringFileNameCompare . . . 1418
13.107.4.50 unztell . . . 1418
13.107.4.51 unztell64 . . . 1419
13.107.5 Variable Documentation . . . 1419
13.107.5.1 unz_copyright . . . 1419
13.108 src/ckb/quazip/unzip.h File Reference . . . 1420
13.108.1 Data Structure Documentation . . . 1422
13.108.1.1 struct tm_unz_s . . . 1422
13.108.1.2 struct unz_global_info64_s . . . 1422
13.108.1.3 struct unz_global_info_s . . . 1423
13.108.1.4 struct unz_file_info64_s . . . 1424
13.108.1.5 struct unz_file_info_s . . . 1425
13.108.1.6 struct unz_file_pos_s . . . 1427
13.108.1.7 struct unz64_file_pos_s . . . 1428
13.108.2 Macro Definition Documentation . . . 1428

13.108.2.1 UNZ_AUTO_CLOSE . . . 1428
13.108.2.2 UNZ_BADZIPFILE . . . 1428
13.108.2.3 UNZ_CRCERROR . . . 1428
13.108.2.4 UNZ_DEFAULT_FLAGS . . . 1429
13.108.2.5 UNZ_END_OF_LIST_OF_FILE . . . 1429
13.108.2.6 UNZ_EOF . . . 1429
13.108.2.7 UNZ_ERRNO . . . 1429
13.108.2.8 UNZ_INTERNALERROR . . . 1429
13.108.2.9 UNZ_OK . . . 1429
13.108.2.10 UNZ_PARAMERROR . . . 1429
13.108.2.11 Z_BZIP2ED . . . 1430
13.108.3 Typedef Documentation . . . 1430
13.108.3.1 tm_unz . . . 1430
13.108.3.2 unz64_file_pos . . . 1430
13.108.3.3 unz_file_info . . . 1430
13.108.3.4 unz_file_info64 . . . 1430
13.108.3.5 unz_file_pos . . . 1430
13.108.3.6 unz_global_info . . . 1430
13.108.3.7 unz_global_info64 . . . 1430
13.108.3.8 unzFile . . . 1430
13.108.4 Function Documentation . . . 1430
13.108.4.1 _Z_OF . . . 1430
13.108.4.2 _Z_OF . . . 1430
13.108.4.3 _Z_OF . . . 1430
13.108.4.4 _Z_OF . . . 1430
13.108.4.5 _Z_OF . . . 1430
13.108.4.6 _Z_OF . . . 1430
13.108.4.7 _Z_OF . . . 1430
13.108.4.8 _Z_OF . . . 1430
13.108.4.9 _Z_OF . . . 1430
13.108.4.10 _Z_OF . . . 1430
13.108.4.11 _Z_OF . . . 1431
13.108.4.12 _Z_OF . . . 1431
13.108.4.13 _Z_OF . . . 1431
13.108.4.14 _Z_OF . . . 1431
13.108.4.15 _Z_OF . . . 1431
13.108.4.16 unzClearFlags . . . 1431
13.108.4.17 unzGetFilePos . . . 1431
13.108.4.18 unzGetFilePos64 . . . 1432
13.108.4.19 unzGetOffset . . . 1432

13.108.4.20 unzGetOffset64 . . . 1433
13.108.4.21 unzGoToFilePos . . . 1433
13.108.4.22 unzGoToFilePos64 . . . 1434
13.108.4.23 unzOpenInternal . . . 1435
13.108.4.24 unzSetFlags . . . 1438
13.108.4.25 unzSetOffset . . . 1439
13.108.4.26 unzSetOffset64 . . . 1439
13.109 src/ckb/quazip/zip.c File Reference . . . 1440
13.109.1 Data Structure Documentation . . . 1443
13.109.1.1 struct linkedlist_datablock_internal_s . . . 1443
13.109.1.2 struct linkedlist_data_s . . . 1444
13.109.1.3 struct curfile64_info . . . 1445
13.109.1.4 struct zip64_internal . . . 1446
13.109.2 Macro Definition Documentation . . . 1446
13.109.2.1 ALLOC . . . 1447
13.109.2.2 BUFREADCOMMENT . . . 1447
13.109.2.3 CENTRALHEADERMAGIC . . . 1447
13.109.2.4 CRC_LOCALHEADER_OFFSET . . . 1447
13.109.2.5 DESCRIPTORHEADERMAGIC . . . 1447
13.109.2.6 ENDHEADERMAGIC . . . 1447
13.109.2.7 FLAG_LOCALHEADER_OFFSET . . . 1447
13.109.2.8 INCLUDECRYPTINGCODE_IFCRYPTALLOWED . . . 1447
13.109.2.9 local . . . 1447
13.109.2.10 LOCALHEADERMAGIC . . . 1447
13.109.2.11 MAKEULONG64 . . . 1448
13.109.2.12 SEEK_CUR . . . 1448
13.109.2.13 SEEK_END . . . 1448
13.109.2.14 SEEK_SET . . . 1448
13.109.2.15 SIZECENTRALHEADER . . . 1448
13.109.2.16 SIZEDATA_INDATABLOCK . . . 1448
13.109.2.17 TRYFREE . . . 1448
13.109.2.18 VERSIONMADEBY . . . 1448
13.109.2.19 Z_BUFSIZE . . . 1448
13.109.2.20 Z_MAXFILENAMEINZIP . . . 1448
13.109.2.21 ZIP64ENDHEADERMAGIC . . . 1449
13.109.2.22 ZIP64ENDLOCHEADERMAGIC . . . 1449
13.109.3 Typedef Documentation . . . 1449
13.109.3.1 linkedlist_data . . . 1449
13.109.3.2 linkedlist_datablock_internal . . . 1449
13.109.3.3 z_crc_t . . . 1449

13.109.4 Function Documentation . . . 1449
13.109.4.1 _Z_OF . . . 1449
13.109.4.2 _Z_OF . . . 1449
13.109.4.3 _Z_OF . . . 1449
13.109.4.4 _Z_OF . . . 1449
13.109.4.5 _Z_OF . . . 1449
13.109.4.6 _Z_OF . . . 1449
13.109.4.7 add_data_in_datablock . . . 1449
13.109.4.8 allocate_new_datablock . . . 1451
13.109.4.9 free_datablock . . . 1451
13.109.4.10 free_linkedlist . . . 1452
13.109.4.11 init_linkedlist . . . 1452
13.109.4.12 LoadCentralDirectoryRecord . . . 1453
13.109.4.13 Write_EndOfCentralDirectoryRecord . . . 1456
13.109.4.14 Write_GlobalComment . . . 1458
13.109.4.15 Write_LocalFileHeader . . . 1458
13.109.4.16 Write_Zip64EndOfCentralDirectoryLocator . . . 1460
13.109.4.17 Write_Zip64EndOfCentralDirectoryRecord . . . 1461
13.109.4.18 zip64FlushWriteBuffer . . . 1463
13.109.4.19 zip64local_getByte . . . 1463
13.109.4.20 zip64local_getLong . . . 1464
13.109.4.21 zip64local_getLong64 . . . 1465
13.109.4.22 zip64local_getShort . . . 1466
13.109.4.23 zip64local_putValue . . . 1467
13.109.4.24 zip64local_putValue_inmemory . . . 1468
13.109.4.25 zip64local_SearchCentralDir . . . 1468
13.109.4.26 zip64local_SearchCentralDir64 . . . 1469
13.109.4.27 zip64local_TmzDateToDosDate . . . 1471
13.109.4.28 zipClearFlags . . . 1472
13.109.4.29 zipClose . . . 1472
13.109.4.30 zipCloseFileInZip . . . 1474
13.109.4.31 zipCloseFileInZipRaw . . . 1475
13.109.4.32 zipCloseFileInZipRaw64 . . . 1476
13.109.4.33 zipOpen . . . 1480
13.109.4.34 zipOpen2 . . . 1480
13.109.4.35 zipOpen2_64 . . . 1481
13.109.4.36 zipOpen3 . . . 1482
13.109.4.37 zipOpen64 . . . 1484
13.109.4.38 zipOpenNewFileInZip . . . 1485
13.109.4.39 zipOpenNewFileInZip2 . . . 1485

13.109.4.40 zipOpenNewFileInZip2_64 . . . 1486
13.109.4.41 zipOpenNewFileInZip3 . . . 1486
13.109.4.42 zipOpenNewFileInZip3_64 . . . 1487
13.109.4.43 zipOpenNewFileInZip4 . . . 1487
13.109.4.44 zipOpenNewFileInZip4_64 . . . 1488
13.109.4.45 zipOpenNewFileInZip64 . . . 1492
13.109.4.46 zipRemoveExtraInfoBlock . . . 1492
13.109.4.47 zipSetFlags . . . 1493
13.109.4.48 zipWriteInFileInZip . . . 1494
13.109.5 Variable Documentation . . . 1496
13.109.5.1 zip_copyright . . . 1496
13.110 src/ckb/quazip/zip.h File Reference . . . 1496
13.110.1 Data Structure Documentation . . . 1498
13.110.1.1 struct tm_zip_s . . . 1498
13.110.1.2 struct zip_fileinfo . . . 1499
13.110.2 Macro Definition Documentation . . . 1500
13.110.2.1 APPEND_STATUS_ADDINZIP . . . 1500
13.110.2.2 APPEND_STATUS_CREATE . . . 1500
13.110.2.3 APPEND_STATUS_CREATEAFTER . . . 1501
13.110.2.4 DEF_MEM_LEVEL . . . 1501
13.110.2.5 Z_BZIP2ED . . . 1501
13.110.2.6 ZIP_AUTO_CLOSE . . . 1501
13.110.2.7 ZIP_BADZIPFILE . . . 1501
13.110.2.8 ZIP_DEFAULT_FLAGS . . . 1501
13.110.2.9 ZIP_EOF . . . 1501
13.110.2.10 ZIP_ERRNO . . . 1501
13.110.2.11 ZIP_INTERNALERROR . . . 1501
13.110.2.12 ZIP_OK . . . 1502
13.110.2.13 ZIP_PARAMERROR . . . 1502
13.110.2.14 ZIP_SEQUENTIAL . . . 1502
13.110.2.15 ZIP_WRITE_DATA_DESCRIPTOR . . . 1502
13.110.3 Typedef Documentation . . . 1502
13.110.3.1 tm_zip . . . 1502
13.110.3.2 zipcharpc . . . 1502
13.110.3.3 zipFile . . . 1502
13.110.4 Function Documentation . . . 1502
13.110.4.1 _Z_OF . . . 1502
13.110.4.2 _Z_OF . . . 1502
13.110.4.3 _Z_OF . . . 1502
13.110.4.4 _Z_OF . . . 1503

13.110.4.5 _Z_OF . . . 1503
13.110.4.6 _Z_OF . . . 1503
13.110.4.7 _Z_OF . . . 1503
13.110.4.8 _Z_OF . . . 1503
13.110.4.9 _Z_OF . . . 1503
13.110.4.10 _Z_OF . . . 1503
13.110.4.11 _Z_OF . . . 1503
13.110.4.12 _Z_OF . . . 1503
13.110.4.13 _Z_OF . . . 1503
13.110.4.14 _Z_OF . . . 1503
13.110.4.15 _Z_OF . . . 1503
13.110.4.16 _Z_OF . . . 1503
13.110.4.17 _Z_OF . . . 1503
13.110.4.18 dpClearFlags . . . 1503
13.110.4.19 dpOpen3 . . . 1504
13.110.4.20 dpSetFlags . . . 1506
13.111 src/ckb/rebindwidget.cpp File Reference . . . 1507
13.111.1 Variable Documentation . . . 1507
13.111.1.1 DPI_CUST_IDX . . . 1507
13.111.1.2 DPI_OFFSET . . . 1507
13.112 src/ckb/rebindwidget.h File Reference . . . 1507
13.113 src/ckb/release/moc_animadddialog.cpp File Reference . . . 1508
13.113.1 Data Structure Documentation . . . 1509
13.113.1.1 struct qt_meta_stringdata_AnimAddDialog_t . . . 1509
13.113.2 Macro Definition Documentation . . . 1510
13.113.2.1 QT_MOC_LITERAL . . . 1510
13.113.3 Variable Documentation . . . 1510
13.113.3.1 qt_meta_data_AnimAddDialog . . . 1510
13.113.3.2 qt_meta_stringdata_AnimAddDialog . . . 1511
13.114 src/ckb/release/moc_animscript.cpp File Reference . . . 1511
13.114.1 Data Structure Documentation . . . 1512
13.114.1.1 struct qt_meta_stringdata_AnimScript_t . . . 1512
13.114.2 Macro Definition Documentation . . . 1513
13.114.2.1 QT_MOC_LITERAL . . . 1513
13.114.3 Variable Documentation . . . 1513
13.114.3.1 qt_meta_data_AnimScript . . . 1513
13.114.3.2 qt_meta_stringdata_AnimScript . . . 1514
13.115 src/ckb/release/moc_animsettingdialog.cpp File Reference . . . 1514
13.115.1 Data Structure Documentation . . . 1515
13.115.1.1 struct qt_meta_stringdata_AnimSettingDialog_t . . . 1515

13.115.2 Macro Definition Documentation . . . 1515
13.115.2.1 QT_MOC_LITERAL . . . 1515
13.115.3 Variable Documentation . . . 1516
13.115.3.1 qt_meta_data_AnimSettingDialog . . . 1516
13.115.3.2 qt_meta_stringdata_AnimSettingDialog . . . 1516
13.116 src/ckb/release/moc_ckbsettingswriter.cpp File Reference . . . 1517
13.116.1 Data Structure Documentation . . . 1517
13.116.1.1 struct qt_meta_stringdata_CkbSettingsWriter_t . . . 1517
13.116.2 Macro Definition Documentation . . . 1518
13.116.2.1 QT_MOC_LITERAL . . . 1518
13.116.3 Variable Documentation . . . 1518
13.116.3.1 qt_meta_data_CkbSettingsWriter . . . 1518
13.116.3.2 qt_meta_stringdata_CkbSettingsWriter . . . 1519
13.117 src/ckb/release/moc_colorbutton.cpp File Reference . . . 1519
13.117.1 Data Structure Documentation . . . 1520
13.117.1.1 struct qt_meta_stringdata_ColorButton_t . . . 1520
13.117.2 Macro Definition Documentation . . . 1520
13.117.2.1 QT_MOC_LITERAL . . . 1520
13.117.3 Variable Documentation . . . 1521
13.117.3.1 qt_meta_data_ColorButton . . . 1521
13.117.3.2 qt_meta_stringdata_ColorButton . . . 1521
13.118 src/ckb/release/moc_extrasettingswidget.cpp File Reference . . . 1521
13.118.1 Data Structure Documentation . . . 1522
13.118.1.1 struct qt_meta_stringdata_ExtraSettingsWidget_t . . . 1522
13.118.2 Macro Definition Documentation . . . 1523
13.118.2.1 QT_MOC_LITERAL . . . 1523
13.118.3 Variable Documentation . . . 1523
13.118.3.1 qt_meta_data_ExtraSettingsWidget . . . 1523
13.118.3.2 qt_meta_stringdata_ExtraSettingsWidget . . . 1523
13.119 src/ckb/release/moc_fwupgradedialog.cpp File Reference . . . 1524
13.119.1 Data Structure Documentation . . . 1525
13.119.1.1 struct qt_meta_stringdata_FwUpgradeDialog_t . . . 1525
13.119.2 Macro Definition Documentation . . . 1526
13.119.2.1 QT_MOC_LITERAL . . . 1526
13.119.3 Variable Documentation . . . 1526
13.119.3.1 qt_meta_data_FwUpgradeDialog . . . 1526
13.119.3.2 qt_meta_stringdata_FwUpgradeDialog . . . 1527
13.120 src/ckb/release/moc_gradientbutton.cpp File Reference . . . 1527
13.120.1 Data Structure Documentation . . . 1528
13.120.1.1 struct qt_meta_stringdata_GradientButton_t . . . 1528

13.120.2 Macro Definition Documentation . . . 1529
13.120.2.1 QT_MOC_LITERAL . . . 1529
13.120.3 Variable Documentation . . . 1529
13.120.3.1 qt_meta_data_GradientButton . . . 1529
13.120.3.2 qt_meta_stringdata_GradientButton . . . 1530
13.121 src/ckb/release/moc_gradientdialog.cpp File Reference . . . 1530
13.121.1 Data Structure Documentation . . . 1531
13.121.1.1 struct qt_meta_stringdata_GradientDialog_t . . . 1531
13.121.2 Macro Definition Documentation . . . 1531
13.121.2.1 QT_MOC_LITERAL . . . 1531
13.121.3 Variable Documentation . . . 1532
13.121.3.1 qt_meta_data_GradientDialog . . . 1532
13.121.3.2 qt_meta_stringdata_GradientDialog . . . 1532
13.122 src/ckb/release/moc_gradientdialogwidget.cpp File Reference . . . 1533
13.122.1 Data Structure Documentation . . . 1533
13.122.1.1 struct qt_meta_stringdata_GradientDialogWidget_t . . . 1533
13.122.2 Macro Definition Documentation . . . 1534
13.122.2.1 QT_MOC_LITERAL . . . 1534
13.122.3 Variable Documentation . . . 1534
13.122.3.1 qt_meta_data_GradientDialogWidget . . . 1534
13.122.3.2 qt_meta_stringdata_GradientDialogWidget . . . 1535
13.123 src/ckb/release/moc_kb.cpp File Reference . . . 1535
13.123.1 Data Structure Documentation . . . 1536
13.123.1.1 struct qt_meta_stringdata_Kb_t . . . 1536
13.123.2 Macro Definition Documentation . . . 1537
13.123.2.1 QT_MOC_LITERAL . . . 1537
13.123.3 Variable Documentation . . . 1537
13.123.3.1 qt_meta_data_Kb . . . 1537
13.123.3.2 qt_meta_stringdata_Kb . . . 1537
13.124 src/ckb/release/moc_kbanim.cpp File Reference . . . 1538
13.124.1 Data Structure Documentation . . . 1538
13.124.1.1 struct qt_meta_stringdata_KbAnim_t . . . 1538
13.124.2 Macro Definition Documentation . . . 1539
13.124.2.1 QT_MOC_LITERAL . . . 1539
13.124.3 Variable Documentation . . . 1539
13.124.3.1 qt_meta_data_KbAnim . . . 1539
13.124.3.2 qt_meta_stringdata_KbAnim . . . 1540
13.125 src/ckb/release/moc_kbanimwidget.cpp File Reference . . . 1540
13.125.1 Data Structure Documentation . . . 1541
13.125.1.1 struct qt_meta_stringdata_KbAnimWidget_t . . . 1541

13.125.2 Macro Definition Documentation . . . 1542
13.125.2.1 QT_MOC_LITERAL . . . 1542
13.125.3 Variable Documentation . . . 1542
13.125.3.1 qt_meta_data_KbAnimWidget . . . 1542
13.125.3.2 qt_meta_stringdata_KbAnimWidget . . . 1542
13.126 src/ckb/release/moc_kbbind.cpp File Reference . . . 1543
13.126.1 Data Structure Documentation . . . 1543
13.126.1.1 struct qt_meta_stringdata_KbBind_t . . . 1543
13.126.2 Macro Definition Documentation . . . 1544
13.126.2.1 QT_MOC_LITERAL . . . 1544
13.126.3 Variable Documentation . . . 1544
13.126.3.1 qt_meta_data_KbBind . . . 1544
13.126.3.2 qt_meta_stringdata_KbBind . . . 1544
13.127 src/ckb/release/moc_kbbindwidget.cpp File Reference . . . 1545
13.127.1 Data Structure Documentation . . . 1546
13.127.1.1 struct qt_meta_stringdata_KbBindWidget_t . . . 1546
13.127.2 Macro Definition Documentation . . . 1546
13.127.2.1 QT_MOC_LITERAL . . . 1546
13.127.3 Variable Documentation . . . 1547
13.127.3.1 qt_meta_data_KbBindWidget . . . 1547
13.127.3.2 qt_meta_stringdata_KbBindWidget . . . 1547
13.128 src/ckb/release/moc_kbfirmware.cpp File Reference . . . 1547
13.128.1 Data Structure Documentation . . . 1548
13.128.1.1 struct qt_meta_stringdata_KbFirmware_t . . . 1548
13.128.2 Macro Definition Documentation . . . 1549
13.128.2.1 QT_MOC_LITERAL . . . 1549
13.128.3 Variable Documentation . . . 1549
13.128.3.1 qt_meta_data_KbFirmware . . . 1549
13.128.3.2 qt_meta_stringdata_KbFirmware . . . 1550
13.129 src/ckb/release/moc_kblight.cpp File Reference . . . 1550
13.129.1 Data Structure Documentation . . . 1551
13.129.1.1 struct qt_meta_stringdata_KbLight_t . . . 1551
13.129.2 Macro Definition Documentation . . . 1552
13.129.2.1 QT_MOC_LITERAL . . . 1552
13.129.3 Variable Documentation . . . 1552
13.129.3.1 qt_meta_data_KbLight . . . 1552
13.129.3.2 qt_meta_stringdata_KbLight . . . 1553
13.130 src/ckb/release/moc_kblightwidget.cpp File Reference . . . 1553
13.130.1 Data Structure Documentation . . . 1554
13.130.1.1 struct qt_meta_stringdata_KbLightWidget_t . . . 1554

13.130.2 Macro Definition Documentation . . . 1555
13.130.2.1 QT_MOC_LITERAL . . . 1555
13.130.3 Variable Documentation . . . 1555
13.130.3.1 qt_meta_data_KbLightWidget . . . 1555
13.130.3.2 qt_meta_stringdata_KbLightWidget . . . 1555
13.131 src/ckb/release/moc_kbmanager.cpp File Reference . . . 1556
13.131.1 Data Structure Documentation . . . 1556
13.131.1.1 struct qt_meta_stringdata_KbManager_t . . . 1556
13.131.2 Macro Definition Documentation . . . 1557
13.131.2.1 QT_MOC_LITERAL . . . 1557
13.131.3 Variable Documentation . . . 1557
13.131.3.1 qt_meta_data_KbManager . . . 1557
13.131.3.2 qt_meta_stringdata_KbManager . . . 1557
13.132 src/ckb/release/moc_kbmode.cpp File Reference . . . 1558
13.132.1 Data Structure Documentation . . . 1559
13.132.1.1 struct qt_meta_stringdata_KbMode_t . . . 1559
13.132.2 Macro Definition Documentation . . . 1559
13.132.2.1 QT_MOC_LITERAL . . . 1559
13.132.3 Variable Documentation . . . 1560
13.132.3.1 qt_meta_data_KbMode . . . 1560
13.132.3.2 qt_meta_stringdata_KbMode . . . 1560
13.133 src/ckb/release/moc_kbperf.cpp File Reference . . . 1560
13.133.1 Data Structure Documentation . . . 1561
13.133.1.1 struct qt_meta_stringdata_KbPerf_t . . . 1561
13.133.2 Macro Definition Documentation . . . 1562
13.133.2.1 QT_MOC_LITERAL . . . 1562
13.133.3 Variable Documentation . . . 1562
13.133.3.1 qt_meta_data_KbPerf . . . 1562
13.133.3.2 qt_meta_stringdata_KbPerf . . . 1563
13.134 src/ckb/release/moc_kbprofile.cpp File Reference . . . 1563
13.134.1 Data Structure Documentation . . . 1564
13.134.1.1 struct qt_meta_stringdata_KbProfile_t . . . 1564
13.134.2 Macro Definition Documentation . . . 1564
13.134.2.1 QT_MOC_LITERAL . . . 1564
13.134.3 Variable Documentation . . . 1565
13.134.3.1 qt_meta_data_KbProfile . . . 1565
13.134.3.2 qt_meta_stringdata_KbProfile . . . 1565
13.135 src/ckb/release/moc_kbprofiledialog.cpp File Reference . . . 1565
13.135.1 Data Structure Documentation . . . 1566
13.135.1.1 struct qt_meta_stringdata_KbProfileDialog_t . . . 1566

13.135.2 Macro Definition Documentation . . . 1567
13.135.2.1 QT_MOC_LITERAL . . . 1567
13.135.3 Variable Documentation . . . 1567
13.135.3.1 qt_meta_data_KbProfileDialog . . . 1567
13.135.3.2 qt_meta_stringdata_KbProfileDialog . . . 1568
13.136 src/ckb/release/moc_kbwidget.cpp File Reference . . . 1569
13.136.1 Data Structure Documentation . . . 1569
13.136.1.1 struct qt_meta_stringdata_KbWidget_t . . . 1569
13.136.2 Macro Definition Documentation . . . 1570
13.136.2.1 QT_MOC_LITERAL . . . 1570
13.136.3 Variable Documentation . . . 1570
13.136.3.1 qt_meta_data_KbWidget . . . 1570
13.136.3.2 qt_meta_stringdata_KbWidget . . . 1570
13.137 src/ckb/release/moc_keyaction.cpp File Reference . . . 1571
13.137.1 Data Structure Documentation . . . 1571
13.137.1.1 struct qt_meta_stringdata_KeyAction_t . . . 1571
13.137.2 Macro Definition Documentation . . . 1572
13.137.2.1 QT_MOC_LITERAL . . . 1572
13.137.3 Variable Documentation . . . 1572
13.137.3.1 qt_meta_data_KeyAction . . . 1572
13.137.3.2 qt_meta_stringdata_KeyAction . . . 1573
13.138 src/ckb/release/moc_keywidget.cpp File Reference . . . 1573
13.138.1 Data Structure Documentation . . . 1574
13.138.1.1 struct qt_meta_stringdata_KeyWidget_t . . . 1574
13.138.2 Macro Definition Documentation . . . 1574
13.138.2.1 QT_MOC_LITERAL . . . 1574
13.138.3 Variable Documentation . . . 1575
13.138.3.1 qt_meta_data_KeyWidget . . . 1575
13.138.3.2 qt_meta_stringdata_KeyWidget . . . 1575
13.139 src/ckb/release/moc_kperfwidget.cpp File Reference . . . 1575
13.139.1 Data Structure Documentation . . . 1576
13.139.1.1 struct qt_meta_stringdata_KPerfWidget_t . . . 1576
13.139.2 Macro Definition Documentation . . . 1577
13.139.2.1 QT_MOC_LITERAL . . . 1577
13.139.3 Variable Documentation . . . 1577
13.139.3.1 qt_meta_data_KPerfWidget . . . 1577
13.139.3.2 qt_meta_stringdata_KPerfWidget . . . 1578
13.140 src/ckb/release/moc_layoutdialog.cpp File Reference . . . 1578
13.140.1 Data Structure Documentation . . . 1579
13.140.1.1 struct qt_meta_stringdata_LayoutDialog_t . . . 1579

13.140.2 Macro Definition Documentation . . . 1580
13.140.2.1 QT_MOC_LITERAL . . . 1580
13.140.3 Variable Documentation . . . 1580
13.140.3.1 qt_meta_data_LayoutDialog . . . 1580
13.140.3.2 qt_meta_stringdata_LayoutDialog . . . 1581
13.141 src/ckb/release/moc_macroreader.cpp File Reference . . . 1581
13.141.1 Data Structure Documentation . . . 1582
13.141.1.1 struct qt_meta_stringdata_MacroReaderThread_t . . . 1582
13.141.1.2 struct qt_meta_stringdata_MacroReader_t . . . 1582
13.141.2 Macro Definition Documentation . . . 1583
13.141.2.1 QT_MOC_LITERAL . . . 1583
13.141.2.2 QT_MOC_LITERAL . . . 1583
13.141.3 Variable Documentation . . . 1583
13.141.3.1 qt_meta_data_MacroReader . . . 1584
13.141.3.2 qt_meta_data_MacroReaderThread . . . 1584
13.141.3.3 qt_meta_stringdata_MacroReader . . . 1584
13.141.3.4 qt_meta_stringdata_MacroReaderThread . . . 1584
13.142 src/ckb/release/moc_mainwindow.cpp File Reference . . . 1585
13.142.1 Data Structure Documentation . . . 1586
13.142.1.1 struct qt_meta_stringdata_MainWindow_t . . . 1586
13.142.2 Macro Definition Documentation . . . 1586
13.142.2.1 QT_MOC_LITERAL . . . 1586
13.142.3 Variable Documentation . . . 1586
13.142.3.1 qt_meta_data_MainWindow . . . 1586
13.142.3.2 qt_meta_stringdata_MainWindow . . . 1587
13.143 src/ckb/release/moc_modeselectdialog.cpp File Reference . . . 1587
13.143.1 Data Structure Documentation . . . 1587
13.143.1.1 struct qt_meta_stringdata_ModeSelectDialog_t . . . 1587
13.143.2 Macro Definition Documentation . . . 1588
13.143.2.1 QT_MOC_LITERAL . . . 1588
13.143.3 Variable Documentation . . . 1588
13.143.3.1 qt_meta_data_ModeSelectDialog . . . 1588
13.143.3.2 qt_meta_stringdata_ModeSelectDialog . . . 1589
13.144 src/ckb/release/moc_mperfwidget.cpp File Reference . . . 1589
13.144.1 Data Structure Documentation . . . 1590
13.144.1.1 struct qt_meta_stringdata_MPerfWidget_t . . . 1590
13.144.2 Macro Definition Documentation . . . 1590
13.144.2.1 QT_MOC_LITERAL . . . 1590
13.144.3 Variable Documentation . . . 1591
13.144.3.1 qt_meta_data_MPerfWidget . . . 1591

13.144.3.2 qt_meta_stringdata_MPerfWidget . . . 1591
13.145 src/ckb/release/moc_quagzipfile.cpp File Reference . . . 1592
13.145.1 Data Structure Documentation . . . 1592
13.145.1.1 struct qt_meta_stringdata_QuaGzipFile_t . . . 1592
13.145.2 Macro Definition Documentation . . . 1593
13.145.2.1 QT_MOC_LITERAL . . . 1593
13.145.3 Variable Documentation . . . 1593
13.145.3.1 qt_meta_data_QuaGzipFile . . . 1593
13.145.3.2 qt_meta_stringdata_QuaGzipFile . . . 1594
13.146 src/ckb/release/moc_quaziodevice.cpp File Reference . . . 1594
13.146.1 Data Structure Documentation . . . 1595
13.146.1.1 struct qt_meta_stringdata_QuaZIODevice_t . . . 1595
13.146.2 Macro Definition Documentation . . . 1595
13.146.2.1 QT_MOC_LITERAL . . . 1595
13.146.3 Variable Documentation . . . 1596
13.146.3.1 qt_meta_data_QuaZIODevice . . . 1596
13.146.3.2 qt_meta_stringdata_QuaZIODevice . . . 1596
13.147 src/ckb/release/moc_quazipfile.cpp File Reference . . . 1596
13.147.1 Data Structure Documentation . . . 1597
13.147.1.1 struct qt_meta_stringdata_QuaZipFile_t . . . 1597
13.147.2 Macro Definition Documentation . . . 1597
13.147.2.1 QT_MOC_LITERAL . . . 1597
13.147.3 Variable Documentation . . . 1598
13.147.3.1 qt_meta_data_QuaZipFile . . . 1598
13.147.3.2 qt_meta_stringdata_QuaZipFile . . . 1598
13.148 src/ckb/release/moc_rebindwidget.cpp File Reference . . . 1598
13.148.1 Data Structure Documentation . . . 1599
13.148.1.1 struct qt_meta_stringdata_RebindWidget_t . . . 1599
13.148.2 Macro Definition Documentation . . . 1600
13.148.2.1 QT_MOC_LITERAL . . . 1600
13.148.3 Variable Documentation . . . 1600
13.148.3.1 qt_meta_data_RebindWidget . . . 1600
13.148.3.2 qt_meta_stringdata_RebindWidget . . . 1600
13.149 src/ckb/release/moc_rlistwidget.cpp File Reference . . . 1601
13.149.1 Data Structure Documentation . . . 1601
13.149.1.1 struct qt_meta_stringdata_RListWidget_t . . . 1601
13.149.2 Macro Definition Documentation . . . 1602
13.149.2.1 QT_MOC_LITERAL . . . 1602
13.149.3 Variable Documentation . . . 1602
13.149.3.1 qt_meta_data_RListWidget . . . 1602

13.149.3.2 qt_meta_stringdata_RListWidget . . . 1602
13.150 src/ckb/release/moc_settingswidget.cpp File Reference . . . 1603
13.150.1 Data Structure Documentation . . . 1604
13.150.1.1 struct qt_meta_stringdata_SettingsWidget_t . . . 1604
13.150.2 Macro Definition Documentation . . . 1604
13.150.2.1 QT_MOC_LITERAL . . . 1604
13.150.3 Variable Documentation . . . 1605
13.150.3.1 qt_meta_data_SettingsWidget . . . 1605
13.150.3.2 qt_meta_stringdata_SettingsWidget . . . 1605
13.151 src/ckb/release/qrc_binary.cpp File Reference . . . 1605
13.151.1 Macro Definition Documentation . . . 1606
13.151.1.1 QT_RCC_MANGLE_NAMESPACE . . . 1606
13.151.1.2 QT_RCC_PREPEND_NAMESPACE . . . 1606
13.151.2 Function Documentation . . . 1606
13.151.2.1 qCleanupResources_binary . . . 1606
13.151.2.2 qInitResources_binary . . . 1607
13.151.2.3 qRegisterResourceData . . . 1607
13.151.2.4 qUnregisterResourceData . . . 1607
13.151.3 Variable Documentation . . . 1608
13.151.3.1 qt_resource_data . . . 1608
13.151.3.2 qt_resource_name . . . 1608
13.151.3.3 qt_resource_struct . . . 1608
13.152 src/ckb/release/qrc_image.cpp File Reference . . . 1608
13.152.1 Macro Definition Documentation . . . 1609
13.152.1.1 QT_RCC_MANGLE_NAMESPACE . . . 1609
13.152.1.2 QT_RCC_PREPEND_NAMESPACE . . . 1609
13.152.2 Function Documentation . . . 1609
13.152.2.1 qCleanupResources_image . . . 1609
13.152.2.2 qInitResources_image . . . 1609
13.152.2.3 qRegisterResourceData . . . 1610
13.152.2.4 qUnregisterResourceData . . . 1610
13.152.3 Variable Documentation . . . 1610
13.152.3.1 qt_resource_data . . . 1610
13.152.3.2 qt_resource_name . . . 1610
13.152.3.3 qt_resource_struct . . . 1611
13.153 src/ckb/release/qrc_text.cpp File Reference . . . 1611
13.153.1 Macro Definition Documentation . . . 1611
13.153.1.1 QT_RCC_MANGLE_NAMESPACE . . . 1611
13.153.1.2 QT_RCC_PREPEND_NAMESPACE . . . 1611
13.153.2 Function Documentation . . . 1611

13.153.2.1 qCleanupResources_text . . . 1611
13.153.2.2 qInitResources_text . . . 1612
13.153.2.3 qRegisterResourceData . . . 1612
13.153.2.4 qUnregisterResourceData . . . 1613
13.153.3 Variable Documentation . . . 1613
13.153.3.1 qt_resource_data . . . 1613
13.153.3.2 qt_resource_name . . . 1613
13.153.3.3 qt_resource_struct . . . 1613
13.154 src/ckb/rlistwidget.cpp File Reference . . . 1614
13.155 src/ckb/rlistwidget.h File Reference . . . 1614
13.156 src/ckb/settingswidget.cpp File Reference . . . 1615
13.156.1 Function Documentation . . . 1616
13.156.1.1 right . . . 1616
13.156.2 Variable Documentation . . . 1616
13.156.2.1 devpath . . . 1616
13.156.2.2 modKeys . . . 1617
13.156.2.3 modNames . . . 1617
13.157 src/ckb/settingswidget.h File Reference . . . 1617
13.158 src/ckb/ui_animadddialog.h File Reference . . . 1618
13.159 src/ckb/ui_animsettingdialog.h File Reference . . . 1619
13.160 src/ckb/ui_extrasettingswidget.h File Reference . . . 1619
13.161 src/ckb/ui_fwupgradedialog.h File Reference . . . 1620
13.162 src/ckb/ui_gradientdialog.h File Reference . . . 1621
13.163 src/ckb/ui_kbanimwidget.h File Reference . . . 1622
13.164 src/ckb/ui_kbbindwidget.h File Reference . . . 1623
13.165 src/ckb/ui_kblightwidget.h File Reference . . . 1624
13.166 src/ckb/ui_kbprofiledialog.h File Reference . . . 1625
13.167 src/ckb/ui_kbwidget.h File Reference . . . 1626
13.168 src/ckb/ui_kperfwidget.h File Reference . . . 1627
13.169 src/ckb/ui_layoutdialog.h File Reference . . . 1628
13.170 src/ckb/ui_mainwindow.h File Reference . . . 1629
13.171 src/ckb/ui_modeselectdialog.h File Reference . . . 1630
13.172 src/ckb/ui_mperfwidget.h File Reference . . . 1631
13.173 src/ckb/ui_rebindwidget.h File Reference . . . 1632
13.174 src/ckb/ui_settingswidget.h File Reference . . . 1633

Index 1635

Chapter 1

README

ckb-next: RGB Driver for Linux and OS X

ckb-next is an open-source driver for Corsair keyboards and mice. It aims to bring the features of their proprietary CUE software to the Linux and Mac operating systems. This project is currently a work in progress, but it already supports much of the same functionality, including full RGB animations. More features are coming soon. Testing and bug reports are appreciated!

Disclaimer: ckb-next is not an official Corsair product. It is licensed under the GNU General Public License (version 2) in the hope that it will be useful, but with NO WARRANTY of any kind.

What happened to the original `ckb`?

We don't know. The author of **ckb** `ccMSC` suddenly disappeared and hasn't showed up since July 2016. So the community around ckb decided to take the project over and continue its development. That's how **ckb-next** was created. Currently it's not rock solid and very easy to set up on newer systems but we are actively working on this. Nevertheless the project already incorporates a notable amount of fixes and patches in comparison to the original ckb.

Contents

- `Current Status`
- `Device Support`
- `Linux Installation`
- `OS X/macOS Installation`
- `Usage`
- `Troubleshooting`
- `Known Issues`
- `Contributing`

See also:

- https://github.com/mattanger/ckb-next/blob/master/DAEMON.md "Manual for the driver daemon"
- `ckb testing repository` (updated more frequently, but may be unstable)

Device Support

Keyboards:

- K65 RGB
- K70
- K70 RGB
- K70 LUX RGB
- K95∗
- K95 RGB
- Strafe
- Strafe RGB
- = hardware playback not supported. Settings will be saved to software only.

Mice:

- M65 RGB
- M65 PRO RGB
- Sabre RGB
- Scimitar RGB

Linux Installation

Pre-made packages:

ckb-next packages:

- Fedora 24/25, CentOS/RHEL 7 (maintained by):
  - `'johanh/ckb'` - based on `master` branch

ckb packages (deprecated):

- Arch Linux (maintained by):
  - `'aur/ckb-git'` - based on `master` branch (more stable)
  - `'aur/ckb-git-latest'` - based on `testing` branch (less stable but fresher)
- Gentoo (maintained by): `emerge -av app-misc/ckb`

If you are a package maintainer or want to discuss something with package maintainers let us know in the issues, so we can have an accountable and centralized communication about this. *If you would like to maintain a package for your favorite distro/OS, please let us know as well.*

Preparation:

ckb-next requires Qt5 (Qt 5.6 recommened for OS X), libudev, zlib, gcc, g++, and glibc.

- Ubuntu: `sudo apt-get install build-essential libudev-dev qt5-default zlib1g-dev libappindicator-dev`
- Fedora: `sudo dnf install zlib-devel qt5-qtbase-devel libgudev-devel libappindicator-de systemd-devel gcc-c++`
- Arch: `sudo pacman -S base-devel qt5-base zlib`
- Other distros: Look for `qt5` or `libqt5*-devel`

Note: If you build your own kernels, ckb-next requires the uinput flag to be enabled. It is located in `Device Drivers -> Input Device Support -> Miscellaneous devices -> User level driver support`. If you don't know what this means, you can ignore this.

Installing:

You can download ckb-next using the "Download zip" option on the right. Extract it and open the ckb-master directory. The easiest way to install ckb is to double-click the `quickinstall` script and run it in a Terminal. It will attempt to build ckb and then ask if you'd like to install/run the application. If the build doesn't succeed, or if you'd like to compile ckb manually, see https://github.com/ccMSC/ckb/blob/master/BUILD.md "'BUILD.md'" for instructions.

Upgrading:

To install a new version of ckb, or to reinstall the same version, first delete the ckb-master directory and the zip file from your previous download. Then download the source code again and re-run `quickinstall`. The script will automatically replace the previous installation. You may need to reboot afterward.

Uninstalling:

First, stop the ckb-daemon service and remove the service file.

- If you have systemd (Ubuntu versions starting with 15.04): "' sudo systemctl stop ckb-daemon sudo rm -f /usr/lib/systemd/system/ckb-daemon.service "'
- If you have Upstart (Ubuntu versions earlier than 15.04): "' sudo service ckb-daemon stop sudo rm -f /etc/init/ckb-daemon.conf "'
- If you have OpenRC: "' sudo rc-service ckb-daemon stop sudo rc-update del ckb-daemon default sudo rm -f /etc/init.d/ckb-daemon "
- `If you're not sure, re-run the`quickinstall`script and proceed to the service installation. The script will say`System service: Upstart detected`or`System service: systemd detected'. Please be aware that OpenRC is currently not detected automatically.

Afterward, remove the applications and related files: "' sudo rm -f /usr/bin/ckb /usr/bin/ckb-daemon /usr/share/applications/ckb.desktop /usr/share/icons/hicolor/512x512/apps/ckb.png sudo rm -rf /usr/lib/ckb-animations "'

Before https://github.com/mattanger/ckb-next/commit/f347e60df211c60452f95084b6c46dc4ec5f42 animations were located elsewhere, try removing them as well: "' sudo rm -rf /usr/bin/ckb-animations "'

OS X/macOS Installation

Binary download:

The latest OS X/macOS binary can be downloaded here: https://github.com/mattanger/ckb-next/releases/late

Click on `ckb.pkg` under the Downloads section. This is an automated installer which will set up the driver for you. After it's finished, open ckb.app (it will be installed to your Applications directory) to get started.

Building from source:

Install the latest version of Xcode from the App Store. Open Xcode, accept the license agreement, and wait for it to install any additional components (if necessary). When you see the "Welcome to Xcode" screen, the setup is finished and you can close the app. Then install Xcode Command Line Tools package issuing `xcode-select --install` in a Terminal app. Afterwards install Qt5 from here: http://www.qt.-io/download-open-source/

The easiest way to build the driver is with the `quickinstall` script, which is present in the ckb-master folder. Double-click on `quickinstall` and it will compile the app for you, then ask if you'd like to install it system-wide. If the build fails for any reason, or if you'd like to compile manually, see https://github.com/ccMSC/ckb/blob/master/-BUILD.md "'BUILD.md'".

Upgrading (binary):

Download the latest `ckb.pkg`, run the installer, and reboot. The newly-installed driver will replace the old one.

Upgrading (source):

Remove the existing ckb-master directory and zip file. Re-download the source code and run the `quickinstall` script again. The script will automatically replace the previous installation. You may need to reboot afterward.

Uninstalling:

Drag `ckb.app` into the trash. If the system service file isn't cleaned up automatically, you can find it and remove it here: `/Library/LaunchDaemons/com.ckb.daemon.plist`.

Usage

The user interface is still a work in progress.

Major features:

- Control multiple devices independently
- United States and European keyboard layouts
- Customizable key bindings
- Per-key lighting and animation
- Reactive lighting
- Multiple profiles/modes with hardware save function
- Adjustable mouse DPI with ability to change DPI on button press
- Key macros (G-Keys also); Have a look at https://youtu.be/qhrKP03_NrM for a short video tutorial
- Key macro delays: Handle delays between keystrokes when playing a macro

Closing ckb will actually minimize it to the system tray. Use the Quit option from the tray icon or the settings screen to exit the application.

Roadmap (roughly in order)

- **v0.3 release:**
- Ability to store profiles separately from devices, import/export them
- More functions for the Win Lock key
- **v0.4 release:**

- Ability to import CUE profiles
- Ability to tie profiles to which application has focus
- **v0.5 release:**
- Key combos
- Timers?
- **v1.0 release:**
- OSD? (Not sure if this can actually be done)
- Extra settings?
- ????

Troubleshooting

Linux

If you have problems connecting the device to your system (device doesn't respond, ckb-daemon doesn't recognize or can't connect it) and/or you experience long boot times when using the keyboard, try adding the following to your kernel's `cmdline`:

- K65 RGB: `usbhid.quirks=0x1B1C:0x1B17:0x20000408`
- K70: `usbhid.quirks=0x1B1C:0x1B09:0x0x20000408`
- K70 RGB: `usbhid.quirks=0x1B1C:0x1B13:0x20000408`
- K95: `usbhid.quirks=0x1B1C:0x1B08:0x20000408`
- K95 RGB: `usbhid.quirks=0x1B1C:0x1B11:0x20000408`
- Strafe: `usbhid.quirks=0x1B1C:0x1B15:0x20000408`
- Strafe RGB: `usbhid.quirks=0x1B1C:0x1B20:0x20000408`
- M65 RGB: `usbhid.quirks=0x1B1C:0x1B12:0x20000408`
- Sabre RGB Optical: `usbhid.quirks=0x1B1C:0x1B14:0x20000408`
- Sabre RGB Laser: `usbhid.quirks=0x1B1C:0x1B19:0x20000408`
- Scimitar RGB: `usbhid.quirks=0x1B1C:0x1B1E:0x20000408`

For instructions on adding `cmdline` parameters in Ubuntu, see https://wiki.ubuntu.com/Kernel/-KernelBootParameters

If you have multiple devices, combine them with commas, starting after the `=`. For instance, for K70 RGB + M65 RGB: `usbhid.quirks=0x1B1C:0x1B13:0x20000408,0x1B1C:0x1B12:0x20000408`

If it still doesn't work, try replacing `0x20000408` with `0x4`. Note that this will cause the kernel driver to ignore the device(s) completely, so you need to ensure ckb-daemon is running at boot or else you'll have no input. This will not work if you are using full-disk encryption.

If you see **GLib** critical errors like 'GLib-GObject-CRITICAL **: g_type_add_interface_static: assertion 'G_TYPE_-IS_INSTANTIATABLE (instance_type)' failed' and you are using:

- Qt 5.8 and newer, remove your Qt configuration files and restart the ckb GUI. Also watch out for different style overridings in dotfiles under ~/ generated by Qt automatically, remove them as well.
- Qt 5.7 and lower, install `qt5ct` package on Arch Linux (find a similar one for your distribution). That's all. This is a known Qt bug. It happened because Qt did not ship required GTK files.

If you're using **Unity** and the tray icon doesn't appear correctly, run `sudo apt-get install libappindicator-dev`. Then reinstall ckb.

OS X/macOS

- ∗∗“ckb.pkg” can’t be opened because it is from an unidentified developer∗∗ Open `System Preferences > Security & Privacy > General` and click `Open Anyway`.
- **Modifier keys (Shift, Ctrl, etc.) are not rebound correctly** ckb does not recognize modifier keys rebound from System Preferences. You can rebind them again within the application.
- ∗∗∼ key prints §±∗∗ Check your keyboard layout on ckb’s Settings screen. Choose the layout that matches your physical keyboard.
- **Compile problems** Can usually be resolved by rebooting your computer and/or reinstalling Qt. Make sure that Xcode works on its own. If a compile fails, delete the `ckb-master` directory as well as any automatically generated `build-ckb` folders and try again from a new download.
- **Scroll wheel does not scroll** As of #c3474d2 it’s now possible to **disable scroll acceleration** from the GUI. You can access it under "OSX tweaks" in the "More settings" screen. Once disabled, the scroll wheel should behave consistently.

General

Please ensure your keyboard firmware is up to date. If you’ve just bought the keyboard, connect it to a Windows computer first and update the firmware from Corsair’s official utility.

Before reporting an issue, connect your keyboard to a Windows computer and see if the problem still occurs. If it does, contact Corsair. Additionally, please check the Corsair user forums to see if your issue has been reported by other users. If so, try their solutions first.

Common issues:

- **Problem:** ckb says "No devices connected" or "Driver inactive"
- **Solution:** Try rebooting the computer and/or reinstalling ckb. Try removing the keyboard and plugging it back in. If the error doesn’t go away, try the following:
- **Problem:** Keyboard doesn’t work in BIOS, doesn’t work at boot
- **Solution:** Some BIOSes have trouble communicating with the keyboard. They may prevent the keyboard from working correctly in the operating system as well. First, try booting the OS *without* the keyboard attached, and plug the keyboard in after logging in. If the keyboard works after the computer is running but does not work at boot, you may need to use the keyboard’s BIOS mode option.
- BIOS mode can be activated using the poll rate switch at the back of the keyboard. Slide it all the way to the position marked "BIOS". You should see the scroll lock light blinking to indicate that it is on. (Note: Unfortunately, this has its own problems - see Known Issues. You may need to activate BIOS mode when booting the computer and deactivate it after logging in).
- **Problem:** Keyboard isn’t detected when plugged in, even if driver is already running
- **Solution:** Try moving to a different USB port. Be sure to follow `Corsair’s USB connection requirements`. Note that the keyboard does not work with some USB3 controllers - if you have problems with USB3 ports, try USB2 instead. If you have any USB hubs on hand, try those as well. You may also have success sliding the poll switch back and forth a few times.

Reporting issues

If you have a problem that you can’t solve (and it isn’t mentioned in the Known Issues section below), you can report it on `the GitHub issue tracker`. Before opening a new issue, please check to see if someone else has reported your problem already - if so, feel free to leave a comment there.

Known issues

- Using the keyboard in BIOS mode prevents the media keys (including mute and volume wheel), as well as the K95's G-keys from working. This is a hardware limitation.
- The tray icon doesn't appear in some desktop environments. This is a known Qt bug. If you can't see the icon, reopen ckb to bring the window back.
- When starting the driver manually, the Terminal window sometimes gets spammed with enter keys. You can stop it by unplugging and replugging the keyboard or by moving the poll rate switch.
- When stopping the driver manually, the keyboard sometimes stops working completely. You can reconnect it by moving the poll rate switch.

Contributing

You can contribute to the project by `opening a pull request`. It's best if you base your changes off of the `testing` branch as opposed to the `master`, because the pull request will be merged there first. If you'd like to contribute but don't know what you can do, take a look at `the issue tracker` and see if any features/problems are still unresolved. Feel free to ask if you'd like some ideas.

Chapter 2

Building ckb

Linux

You can build the project by running `./qmake-auto && make` in a Terminal inside the ckb-master directory. The binaries will be placed in a new `bin` directory assuming they compile successfully. If you get a `No suitable qmake found` error, make sure Qt5 is installed and up to date. You may have to invoke qmake manually, then run `make` on its own. If you have Qt Creator installed, you can open `ckb.pro` (when asked to configure the project, make sure "Desktop" is checked) and use `Build > Build Project "ckb" (Ctrl+B)` to build the application instead.

Running as a service:

First copy the binary and the service files to their system directories:

- Upstart (Ubuntu, prior to 15.04): `sudo cp -R bin/* /usr/bin && sudo cp service/upstart/ckb-daemon.conf /etc/init`
- Systemd (Ubuntu 15.04 and later): `sudo cp -R bin/* /usr/bin && sudo cp service/systemd/ckb-daemon.service /usr/lib/systemd/system`
- OpenRC: `sudo cp -R bin/* /usr/bin && sudo cp service/openrc/ckb-daemon /etc/init.d/`

To launch the driver and enable it at start-up:

- Upstart: `sudo service ckb-daemon start`
- Systemd: `sudo systemctl start ckb-daemon && sudo systemctl enable ckb-daemon`
- OpenRC: `sudo rc-service ckb-daemon start && sudo rc-update add ckb-daemon default`

Open the `bin` directory and double-click on `ckb` to launch the user interface. If you want to run it at login, add `ckb --background` to your Startup Applications.

Running manually:

Open the `bin` directory in a Terminal and run `sudo ./ckb-daemon` to start the driver. To start the user interface, run `./ckb`. Running the driver manually may be useful for testing/debugging purposes, but you must leave the terminal window open and you'll have to re-run it at every reboot, so installing it as a service is the best long-term solution.

OSX

Open ckb.pro in Qt Creator. You should be prompted to configure the project (make sure the "Desktop" configuration is selected and not iOS). Once it's finished loading, press `Cmd+B` or select `Build > Build Project "ckb"` from the menu bar. When it's done, you should see a newly-created `ckb.app` in the project directory. Exit Qt Creator.

Alternatively, open a Terminal in the ckb-master directory and run `./qmake-auto && make`. It will detect Qt automatically if you installed it to one of the standard locations. You should see a newly created `ckb.app` if the build is successful.

Running as a service:

Copy `ckb.app` to your Applications folder. Copy the file `'service/launchd/com.ckb.daemon.plist'` to your computer's `/Library/LaunchDaemons` folder (you can get to it by pressing `Cmd+Shift+G` in Finder and typing the location). Then open a Terminal and run the following commands to launch the driver:

"' sudo chown root:wheel /Library/LaunchDaemons/com.ckb.daemon.plist sudo chmod 0700 /Library/LaunchDaemons/com.ckb.daemon.plist sudo launchctl load /Library/LaunchDaemons/com.ckb.daemon.plist "'

After you're done, open `ckb.app` to launch the user interface.

Running manually:

Open a Terminal in the ckb directory and run `sudo ckb.app/Contents/Resources/ckb-daemon` to start the driver. Open `ckb.app` to start the user interface. Note that you must leave the terminal window open and must re-launch the driver at every boot if you choose this; installing as a service is the better long term solution.

Chapter 3

cbk Improvements Roadmap

Short term plan

- merge existing PR submitted to original ckb repo
- Contact other developers interested in collaboration on a new and improved version of ckb
- Figure out the issues relating to MacOS Sierra and other version
- Device support:
  - Determine which will need support other than just USB id additions
- Address existing bugs. Not help requests.

Chapter 4

DAEMON

The daemon provides devices at `/dev/input/ckb*`, where `*` is the device number, starting at 1. Up to 9 devices may be connected at once and controlled independently. The daemon additionally provides `/dev/input/ckb0`, which stores driver information.

Mac note: The devices on OSX are located at `/var/run/ckb*` and not `/dev/input/ckb*`. So wherever you see `/dev/input` in this document, replace it with `/var/run`.

`/dev/input/ckb0` contains the following files:

- `connected`: A list of all connected devices, one per line. Each line contains a device path followed by the device's serial number and its description.
- `pid`: The process identifier of the daemon.
- `version`: The daemon version.

Other `ckb*` devices contain the following:

- `cmd`: Keyboard controller.
- `notify0`: Keyboard- or mouse notifications.
- `notify1`: Keyboard- or mouse notifications, used for macro recording.
- `features`: Device features.
- `fwversion`: Device firmware version (not present on all devices).
- `model`: Device description/model.
- `pollrate`: Poll rate in milliseconds (not present on all devices).
- `productid`: Contains the USB productID of the hardware
- `serial`: Device serial number. `model` and `serial` will match the info found in `ckb0/connected`

Commands

The `/dev/input/ckb*/cmd` nodes accept input in the form of text commands. They are normally accessible to all users on the system (see Security section). Commands should be given in the following format: `[mode <n>] command1 [paramter1] [command2] [parameter2] [command3] [parameter3] ...`

In a terminal shell, you can do this like `echo mycommand > /dev/input/ckb1/cmd`. Programmatically, you can open and write them as regular files. When programming, you must append a newline character and flush the output before your command(s) will actually be read.

The mode parameter is used to group settings. Most (but not all) settings are mode-specific; that is, changing mode 1 will not affect mode 2. By default, all commands affect the current mode. Use mode <n> switch to change the current mode.

When plugged in, all devices start in hardware-controlled mode (also known as idle mode) and will not respond to commands. Before issuing any other commands, write active to the command node, like echo active > /dev/input/ckb1/cmd. To put the device back into hardware mode, issue the idle command.

Features

The features node describes features supported by the device, which may not be present on all devices. The first two words in the features node are always <vendor> <model>, like corsair k70. After that, any of the following features may appear:

- adjrate: Device supports adjustable poll rate.
- bind: Device supports key rebinding.
- fwupdate: Device supports firmware updates.
- fwversion: Device has a detectable firmware version (stored in the fwversion node).
- notify: Device supports key notifications.
- pollrate: Device has a detectable poll rate (stored in the pollrate node).
- rgb: Device supports RGB lighting.

Keyboard layout

The driver has no concept of keyboard layouts; all keys are referred to by their English names regardless of the underlying hardware. This means that, for instance, in an AZERTY layout the q key in ckb-daemon corresponds to A on the physical keyboard. Note that on UK/european (ISO) layouts, the backslash key (beside left shift) is called bslash_iso, while bslash refers to the backslash on the US keyboard. The key next to Enter on the ISO keyboard is known as hash. See src/ckb-daemon/keymap.c for the full table of supported keys.

For technical reasons, the OSX driver may swap the bslash_iso and grave keys if the keyboard layout is not set correctly. To compensate for this, write layout iso or layout ansi to the command node.

Poll rate

A device's current poll rate can be read from its pollrate node, assuming it has one. Keyboards have a hardware switch to control poll rate and cannot be adjusted via software. However, mice have a software-controlled poll rate. You can change it by issuing pollrate <interval> to the command node, where interval is the time in milliseconds. Valid poll rates are 1, 2, 4, and 8.

Profiles and modes

Each mode has its own independent binding and lighting setup. When the daemon starts or a keyboard is plugged in, the profile will be loaded from the hardware. By default, all commands will update the currently selected mode. The mode <n> command may be used to change the settings for a different mode. Up to 6 modes are available. Each keyboard has one profile, which may be given a name. Mode 1 may be saved to the device hardware, or modes 1-3 in the case of the K95. Modes 4 through 6 are software-only. Profile management commands are as follows:

- profilename <name> sets the profile's name. The name must be written without spaces; to add a space, use %20.

- `name <name>` sets the current mode's name. Use `mode <n> name <name>` to set a different mode's name.
- `profileid <guid> [<modification>]` sets a profile's ID. The GUID must be written in registry format, like `{12345678-ABCD-EF01-2345-6789ABCDEF01}`. The optional modification number must be written with 8 hex digits, like `ABCDEF01`.
- `id <guid> [<modification>]` sets a mode's ID.
- `mode <n> switch` switches the keyboard to mode N. If the mode does not exist, it will be created with a blank ID, black lighting, and default bindings.
- `hwload` loads the RGB profile from the hardware. Key bindings and non-hardware RGB modes are unaffected.
- `hwsave` saves the RGB profile to the hardware.
- `erase` erases the current mode, resetting its lighting and bindings. Use `mode <n> erase` to erase a different mode.
- `eraseprofile` erases the entire profile, deleting its name, ID, and all of its modes.

Examples:

- `profilename My%20Profile mode 1 name Mode%201 mode 2 name Mode%202 mode 3 name Mode%203` will name the profile "My Profile" and name modes 1-3 "Mode 1", "Mode 2", and "Mode 3".
- `eraseprofile hwload` resets the entire profile to its hardware settings.

LED commands

The backlighting is controlled by the `rgb` commands.

- `rgb <RRGGBB>` sets the entire keyboard to the color specified by the hex constant RRGGBB.
- `rgb <key>:<RRGGBB>` sets the specified key to the specified hex color.

Examples:

- `rgb ffffff` makes the whole keyboard white.
- `rgb 000000` makes the whole keyboard black.
- `rgb esc:ff0000` sets the Esc key red but leaves the rest of the keyboard unchanged.

Multiple keys may be changed to one color when separated with commas, for instance:

- `rgb w,a,s,d:0000ff` sets the WASD keys to blue.

Additionally, multiple commands may be combined into one, for instance:

- `rgb ffffff esc:ff0000 w,a,s,d:0000ff` sets the Esc key red, the WASD keys blue, and the rest of the keyboard white (note the lack of a key name before `ffffff`, implying the whole keyboard is to be set).

By default, the controller runs at 30 FPS, meaning that attempts to animate the LEDs faster than that will be ignored. If you wish to change it, send the command `fps <n>`. The maximum frame rate is 60.

For devices running in 512-color mode, color dithering can be enabled by sending the command `dither 1`. The command `dither 0` disables dithering.

Indicators

The indicator LEDs (Num Lock, Caps Lock, Scroll Lock) are controlled with the `i` commands.

- `ioff <led>` turns an indicator off permanently. Valid LED names are `num`, `caps`, and `scroll`.
- `ion <led>` turns an indicator on permanently.
- `iauto <led>` turns an indicator off or on automatically (default behavior).

Binding keys

Keys may be rebound through use of the `bind` commands. Binding is a 1-to-1 operation that translates one keypress to a different keypress regardless of circumstance.

- `bind <key1>:<key2>` remaps key1 to key2.
- `unbind <key>` unbinds a key, causing it to lose all function.
- `rebind <key>` resets a key, returning it to its default binding.

Examples:

- `bind g1:esc` makes G1 become an alternate Esc key (the actual Esc key is not changed).
- `bind caps:tab tab:caps` switches the functions of the Tab and Caps Lock keys.
- `unbind lwin rwin` disables both Windows keys, even without using the keyboard's Windows Lock function.
- `rebind all` resets the whole keyboard to its default bindings.

Key macros

Macros are a more advanced form of key binding, controlled with the `macro` command.

- `macro <keys>:<command>` binds a key combination to a command, where the command is a series of key presses. To combine keys, separate them with `+`; for instance, `lctrl+a` binds a macro to (left) Ctrl+A. In the command field, enter `+<key>` to trigger a key down or `-<key>` to trigger a key up. To simulate a key press, use `+<key>,-<key>`.
- `macro <keys>:clear` clears commands associated with a key combination. Only one macro may be assigned per combination; assigning a second one will overwrite the first.
- `macro clear` clears all macros.

Examples:

- `macro g1:+lctrl,+a,-a,-lctrl` triggers a Ctrl+A when G1 is pressed.
- `macro g2+g3:+lalt,+f4,-f4,-lalt` triggers an Alt+F4 when G2 and G3 are pressed simultaneously.

Assigning a macro to a key will cause its binding to be ignored; for instance, `macro a:+b,-b` will cause A to generate a B character regardless of its binding. However, `macro lctrl+a:+b,-b` will cause A to generate a B only when Ctrl is also held down.

Macro playback delay

There are two types of playback delay that can be set with macros; global and local. Setting a *global delay* value introduces a time delay between events during macro execution or playback. *Local delay* allows setting the delay after an individual event, overriding the global delay value for that event. Thus global delay can be used to set the overall playback speed of macros and local delays can be used to tune individual events within a macro.

All delay values are specified in microseconds (us) and are positive values from `0` to `UINT_MAX - 1`. This means delays range from 0 to just over 1 hour (4,294,967,294us, 4,294 seconds, 71 minutes, or 1.19 hours). A value of zero (0) represents no delay between actions.

Global macro delay (default delay)

Global delay allows macro playback speed to be changed. It sets the time between (actually after) each recorded macro event. If global delay is set to 1 microsecond then a 1 ms delay will follow each individual macro event when the macro is triggered.

The *global delay* is set with the ckb-daemon's existing (in testing branch) `delay` command followed by an unsigned integer representing the number of microseconds to wait after each macro action and before the next.

Global delay can also be set to `on` which maintains backwards compatibility with the current development of `ckb-daemon` for long macro playback. That is, setting the global delay to `on` introduces a 30us and a 100us delay based on the macro's length during playback.

NOTE: This setting also introduces a delay after the last macro action. This functionality exists in the current testing branch and was left as-is. It is still to be determined if this is a bug or a feature.

Examples:

- `delay 1000` sets a 1,000us delay between action playback.
- `delay on` sets long macro delay; 30us for actions between 20 and 200, 100us for actions $>$ 200.
- `delay off` sets no delay (same as 0).
- `delay 0` sets no delay (same as off).
- `delay spearmint-potato` is invalid input, sets no delay (same as off).

Local macro delay (keystroke delay)

Local Delay allows each macro action to have a post-action delay associated with it. This allows a macro to vary it's playback speed for each event. If no local delay is specified for a macro action, then the global `delay` (above) is used. All delay values are in microsecods (us) as with the global delay setting.

Examples:

- `macro g5:+d,-d,+e=5000,-e,+l,-l=10000,+a,-a,+y,-y=1000000,+enter,-enter` define a macro for `g5` with a 5,000us delay between the `e` down and `e` up actions. A 1,000us delay between `l` up and `a` down, a delay of one second (1,000,000us) after `y` up and before `enter`, and the global delay for all other actions.
- `macro g5:+d,-d=0` use default delay between `d` down and `d` up and no delay (0us) after `d` up. This removes the noted feature/bug (above) where the last action has a trailing delay associated with it.

DPI and mouse settings

DPI settings are stored in a bank. They are controlled with the `dpi` command.

- `dpi <stage>:<x>,<y>` sets the DPI for a given `stage` to `x` by `y`. Valid stages are `0` through `5`. In hardware, `1` is the first (lowest) stage and `5` is the highest. Stage `0` is used for Sniper mode.
- `dpi <stage>:<xy>` sets both X and Y.

- `dpi <stage>:off` disables a DPI stage.
- `dpisel <stage>` sets the current stage selection.

In order to change the mouse's current DPI, first update one of the stages with the value you want, then select that stage. For instance:

- `dpi 1:1000 dpisel 1` sets the current DPI to 1000x1000.

Additional mouse settings:

- `lift <height>` sets the lift height, from `1` (lowest) to `5` (highest)
- `snap <on|off>` enables or disables Angle Snap.

Notifications

The keyboard can be configured to generate user-readable notifications on keypress events. These are controlled with the `notify` commands. In order to see events, read from `/dev/input/ckb*/notify0`. In a terminal, you can do this like `cat /dev/input/ckb1/notify0`. Programmatically, you can open it for reading like a regular file.

Note that the file can only reliably be read by one application: if you try to open it in two different programs, they may both fail to get data. Data will be buffered as long as no programs are reading, so you will receive all unread notifications as soon as you open the file. If you'd like to read notifications from two separate applications, send the command `notifyon <n>` to the keyboard you wish to receive notifications from, where N is a number between 1 and 9. If `/dev/input/ckb*/notify<n>` does not already exist, it will be created, and you can read notifications from there without disrupting any other program. To close a notification node, send `notifyoff <n>`.

`notify0` is always open and will not be affected by `notifyon`/`notifyoff` commands. By default, all notifications are printed to `notify0`. To print output to a different node, prefix your command with `@<node>`.

Notifications are printed with one notification per line. Commands are as follows:

- `notify <key>:on` or simply `notify <key>` enables notifications for a key. Each key will generate two notifications: `key +<key>` when the key is pressed, and `key -<key>` when it is released.
- `notify <key>:off` turns notifications off for a key.

Examples:

- `notify w a s d` sends notifications whenever W, A, S, or D is pressed.
- `notify g1 g2 g3 g4 g5 g6 g7 g8 g9 g10 g11 g12 g13 g14 g15 g16 g17 g18 mr m1 m2 m3 light lock` prints a notification whenever a non-standard key is pressed.
- `notify all:off` turns all key notifications off.
- `@5 notify esc` prints Esc key notifications to `notify5`.

Note: Key notifications are *not* affected by bindings. For instance, if you run `echo bind a:b notify a > /dev/input/ckb1/cmd` and then press the A key, the notifications will read `key +a key -a`, despite the fact that the character printed on screen will be `b`. Likewise, unbinding a key or assigning a macro to a key does not affect the notifications.

Indicator notifications

You can also choose to receive notifications for the indicator LEDs by using the `inotify` command. For instance, `inotify caps:on` or simply `inotify caps` will print notifications whenever the Caps Lock LED is toggled. The notifications will read `i +caps` when the light is turned on and `i -caps` when it is turned off. It is also possible to toggle all indicators at once using `inotify all` or `inotify all:off`.

Like key notifications, indicator notifications are not affected by bindings, nor by the `ion`, `ioff`, or `iauto` commands. The notifications will reflect the state of the LEDs as seen be the event device.

Getting parameters

Parameters can be retrieved using the `get` command. The data will be sent out as a notification. Generally, the syntax to get the data associated with a command is `get :<command>` (note the colon), and the associated data will be returned in the form of `<command> <data>`. The following data may be gotten:

- `get :mode` returns the current mode in the form of a `switch` command. (Note: Do not use this in a line containing a `mode` command or it will return the mode that you selected, rather than the keyboard's current mode.)
- `get :name` returns the current mode's name in the form of `mode <n> name <name>`. To see the name of another mode, use `mode <n> get :name`. The name is URL-encoded; spaces are written as %20. The name may be truncated, so `name <some long string> get :name` may return something shorter than what was entered.
- `get :profilename` returns the profile's name, in the form of `profilename <name>`. As above, it is URL-encoded and may be truncated.
- `get :hwname` and `get :hwprofilename` return the same thing except taken from the current hardware profile instead of the in-memory profile. The output is identical but will read `hwname` instead of `name` and `hwprofilename` instead of `profilename`.
- `get :id` returns the current mode's ID and modification number in the form of `mode <n> id <guid> <modification>`.
- `get :profileid` returns the current profile's ID and modification number in the form of `profileid <guid> <modification>`.
- `get :hwid` and `get :hwprofileid` return the same thing except from the current hardware profile/mode. As before, the ouput will be the same but with `hwid` and `hwprofileid` instead of `id` and `profileid`.
- `get :rgb` returns an `rgb` command equivalent to the current RGB state.
- `get :hwrgb` does the same thing, but retrieves the colors currently stored in the hardware profile. The output will say `hwrgb` instead of `rgb`.
- `get :dpi` returns a `dpi` command equivalent to the current DPI bank.
- `get :dpisel` returns a `dpisel` command for the currently-selected DPI stage.
- `get :lift` returns a `lift` command for the current lift height.
- `get :snap` returns the current angle snap status.
- `get :hwdpi`, `get :hwdpisel`, `get :hwlift`, and `get :hwsnap` return the same properties, but for the current hardware profile.
- `get :keys` and `get :i` return the current keypress status and indicator status, respectively. They will indicate all currently pressed keys and all currently active indicators, like `key +enter` and `i +num`.

Like `notify`, you must prefix your command with `@<node>` to get data printed to a node other than `notify0`.

Firmware updates

WARNING: Improper use of `fwupdate` may brick your device; use this command *at your own risk*. I accept no responsibility for broken keyboards.

The latest firmware versions and their URLs can be found in the `FIRMWARE` document. To update your keyboard's firmware, first extract the contents of the zip file and then issue the command `fwupdate /path/to/fw/file.bin` to the keyboard you wish to update. The path name must be absolute and must not include spaces. If it succeeded, you should see `fwupdate <path> ok` logged to the keyboard's notification node and then the device will disconnect and reconnect. If you see `fwupdate <path> invalid` it means that the firmware file was not valid for the device; more info may be available in the daemon's `stdout`. If you see `fwupdate <path> fail` it means that the file was valid but the update failed at a hardware level. The keyboard may disconnect/reconnect anyway or it may remain in operation.

When the device reconnects you should see the new firmware version in its `fwversion` node; if you see `0000` instead it means that the keyboard did not update successfully and will need another `fwupdate` command in order to function again. If the update fails repeatedly, try connecting the keyboard to a Windows PC and using the official firmware update in CUE.

Restart

Because sometimes the communication between the daemon and the keyboard is corrupted after resuming from standby or suspend, a restart function is implemented. It first calls the quit() function, then it calls main() again with the original parameter list.

There are two ways to restart the daemon:

- send the string "restart some-description-as-one-word" to the cmd-pipe (normally /dev/input/ckb1/cmd or /dev/input/ckb2/cmd, depending on what device gets which ID.
- send SIGUSR1 to the daemon process (as root).

Later on, there may be a user interface in the client for the first method.

Security

By default, all of the `ckb*` nodes may be accessed by any user. For most single-user systems this should not present any security issues, since only one person will have access to the computer anyway. However, if you'd like to restrict the users that can write to the `cmd` nodes or read from the `notify` nodes, you can specify the `--gid=<group>` option at start up. For instance, on most systems you could run `ckb-daemon --gid=1000` to make them accessible only by the system's primary user. `ckb-daemon` must still be run as root, regardless of which `gid` you specify. The `gid` option may be set only at startup and cannot be changed while the daemon is running.

The daemon additionally supports a `--nonotify` option to disable key notifications, to prevent unauthorized programs from logging key input. Note that this will interfere with some of `ckb`'s abilities. It is also highly unlikely to increase security unless you are using the program in a stripped down terminal environment without Xorg. For most use cases there are many other (more likely) ways that a keylogger program could compromise your system. Nevertheless, the option is provided for the sake of paranoia. If you'd like to disable key rebinding as well, launch the daemon with `--nobind`. `--nobind` implies `--nonotify`, so notifications will also be disabled. As with `--gid`, these options must be set at startup and cannot be changed while the daemon is running.

Chapter 5

Todo List

Global Kb::Kb (QObject *parent, const QString &path)

Is adding notify2 to the notifypaths neccessary?

Global Kb::~Kb ()

I don't think, that notifypaths is used somewhere. So why do we have it? If we do not need it, searching for an ununsed notify channel can easy be refactored to a private member function.

Global RebindWidget::applyChanges (const QStringList &keys, bool doUnbind)

There is still a bug in the state machine: If you record a macro in asTyped-mode, switch to another mode and change the vontent of the pteMacroBox manually, then the changes are not saved in the timing buffer. But anyhow, let's do more relevant things...

Global RebindWidget::on_btnClearMacro_clicked ()

I do not know what is the better solution with the delay-buttons in case of clicking clear: Reset the button to the default value or do not touch it? Not clear is ignored.

Chapter 6

Deprecated List

Class QuaZipFileInfo

Use QuaZipFileInfo64 instead. Not only it supports large files, but also more convenience methods as well.

Chapter 7

Namespace Index

7.1 Namespace List

Here is a list of all namespaces with brief descriptions:

Ui 39

Chapter 8

Hierarchical Index

8.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

AutoRun . . . 118
ckb_gradient . . . 1215
ckb_key . . . 1215
ckb_runctx . . . 1215
CkbSettings . . . 122
ColorMap . . . 149
curfile64_info . . . 1440
MPerfWidget::DpiUi . . . 769
file_in_zip64_read_info_s . . . 1369
KbFirmware::FW . . . 178
KPerfWidget::IndicatorUi . . . 694
JlCompress . . . 237
KbId . . . 1244
Key . . . 595
KeyMap . . . 628
KeyPatch . . . 1278
linkedlist_data_s . . . 1440
linkedlist_datablock_internal_s . . . 1440
AnimScript::Param . . . 52
GradientDialog::Preset . . . 787
QDialog . . . 789
- AnimAddDialog . . . 41
- AnimSettingDialog . . . 97
- ExtraSettingsWidget . . . 170
- FwUpgradeDialog . . . 179
- GradientDialog . . . 208
- KbProfileDialog . . . 549
- LayoutDialog . . . 712
- ModeSelectDialog . . . 746

QIODevice . . . 790
- QuaGzipFile . . . 806
- QuaZIODevice . . . 813
- QuaZipFile . . . 871

QIODevice_descriptor . . . 791
QListWidget . . . 792
- RListWidget . . . 995

QMainWindow . . . 793

MainWindow . . . 727
QObject . . . 794
AnimScript . . . 52
CkbSettingsWriter . . . 137
KbAnim . . . 305
KbBind . . . 360
KbFirmware . . . 408
KbLight . . . 420
KbManager . . . 471
KbMode . . . 483
KbPerf . . . 497
KbProfile . . . 531
KeyAction . . . 598
QPushButton . . . 795
ColorButton . . . 139
GradientButton . . . 194
qt_meta_stringdata_AnimAddDialog_t . . . 1508
qt_meta_stringdata_AnimScript_t . . . 1511
qt_meta_stringdata_AnimSettingDialog_t . . . 1514
qt_meta_stringdata_CkbSettingsWriter_t . . . 1517
qt_meta_stringdata_ColorButton_t . . . 1519
qt_meta_stringdata_ExtraSettingsWidget_t . . . 1521
qt_meta_stringdata_FwUpgradeDialog_t . . . 1524
qt_meta_stringdata_GradientButton_t . . . 1527
qt_meta_stringdata_GradientDialog_t . . . 1530
qt_meta_stringdata_GradientDialogWidget_t . . . 1533
qt_meta_stringdata_Kb_t . . . 1535
qt_meta_stringdata_KbAnim_t . . . 1538
qt_meta_stringdata_KbAnimWidget_t . . . 1540
qt_meta_stringdata_KbBind_t . . . 1543
qt_meta_stringdata_KbBindWidget_t . . . 1545
qt_meta_stringdata_KbFirmware_t . . . 1547
qt_meta_stringdata_KbLight_t . . . 1550
qt_meta_stringdata_KbLightWidget_t . . . 1553
qt_meta_stringdata_KbManager_t . . . 1556
qt_meta_stringdata_KbMode_t . . . 1558
qt_meta_stringdata_KbPerf_t . . . 1560
qt_meta_stringdata_KbProfile_t . . . 1563
qt_meta_stringdata_KbProfileDialog_t . . . 1565
qt_meta_stringdata_KbWidget_t . . . 1569
qt_meta_stringdata_KeyAction_t . . . 1571
qt_meta_stringdata_KeyWidget_t . . . 1573
qt_meta_stringdata_KPerfWidget_t . . . 1575
qt_meta_stringdata_LayoutDialog_t . . . 1578
qt_meta_stringdata_MacroReader_t . . . 1581
qt_meta_stringdata_MacroReaderThread_t . . . 1581
qt_meta_stringdata_MainWindow_t . . . 1585
qt_meta_stringdata_ModeSelectDialog_t . . . 1587
qt_meta_stringdata_MPerfWidget_t . . . 1589
qt_meta_stringdata_QuaGzipFile_t . . . 1592
qt_meta_stringdata_QuaZIODevice_t . . . 1594
qt_meta_stringdata_QuaZipFile_t . . . 1596
qt_meta_stringdata_RebindWidget_t . . . 1598
qt_meta_stringdata_RListWidget_t . . . 1601
qt_meta_stringdata_SettingsWidget_t . . . 1603
QThread . . . 796
Kb . . . 255

MacroReader . . . 715
MacroReaderThread . . . 719
QuaChecksum32 . . . 800
QuaAdler32 . . . 797
QuaCrc32 . . . 803
QuaZip . . . 821
QuaZipDir . . . 853
QuaZipFileInfo . . . 894
QuaZipFileInfo64 . . . 897
QuaZipFilePrivate . . . 905
QuaZipNewInfo . . . 910
QuaZipPrivate . . . 918
QWidget . . . 927
GradientDialogWidget . . . 221
KbAnimWidget . . . 342
KbBindWidget . . . 396
KbLightWidget . . . 458
KbWidget . . . 563
KeyWidget . . . 651
KPerfWidget . . . 694
MPerfWidget . . . 769
RebindWidget . . . 959
SettingsWidget . . . 1000
SGroup . . . 1024
tm_unz_s . . . 1420
tm_zip_s . . . 1496
Ui_AnimAddDialog . . . 1027
Ui::AnimAddDialog . . . 47
Ui_AnimSettingDialog . . . 1031
Ui::AnimSettingDialog . . . 84
Ui_ExtraSettingsWidget . . . 1044
Ui::ExtraSettingsWidget . . . 157
Ui_FwUpgradeDialog . . . 1056
Ui::FwUpgradeDialog . . . 188
Ui_GradientDialog . . . 1062
Ui::GradientDialog . . . 200
Ui_KbAnimWidget . . . 1070
Ui::KbAnimWidget . . . 332
Ui_KbBindWidget . . . 1079
Ui::KbBindWidget . . . 389
Ui_KbLightWidget . . . 1085
Ui::KbLightWidget . . . 449
Ui_KbProfileDialog . . . 1093
Ui::KbProfileDialog . . . 558
Ui_KbWidget . . . 1097
Ui::KbWidget . . . 585
Ui_KPerfWidget . . . 1107
Ui::KPerfWidget . . . 674
Ui_LayoutDialog . . . 1126
Ui::LayoutDialog . . . 707
Ui_MainWindow . . . 1131
Ui::MainWindow . . . 723
Ui_ModeSelectDialog . . . 1135

Ui::ModeSelectDialog 742
Ui_MPerfWidget 1139
Ui::MPerfWidget 750
Ui_RebindWidget 1158
Ui::RebindWidget 928
Ui_SettingsWidget 1189
Ui::SettingsWidget 1012
unz64_file_pos_s 1420
unz64_s 1369
unz_file_info64_internal_s 1369
unz_file_info64_s 1420
unz_file_info_s 1420
unz_file_pos_s 1420
unz_global_info64_s 1420
unz_global_info_s 1420
UsbId 1201
zip64_internal 1440
zip_fileinfo 1496
zlib_filefunc64_32_def_s 1322
zlib_filefunc64_def_s 1322
zlib_filefunc_def_s 1322

Chapter 9

Data Structure Index

9.1 Data Structures

Here are the data structures with brief descriptions:

AnimAddDialog . . . 41
Ui::AnimAddDialog . . . 47
AnimScript . . . 52
Ui::AnimSettingDialog . . . 84
AnimSettingDialog . . . 97
AutoRun . . . 118
CkbSettings . . . 122
CkbSettingsWriter . . . 137
ColorButton . . . 139
ColorMap . . . 149
Ui::ExtraSettingsWidget . . . 157
ExtraSettingsWidget . . . 170
KbFirmware::FW . . . 178
FwUpgradeDialog . . . 179
Ui::FwUpgradeDialog . . . 188
GradientButton . . . 194
Ui::GradientDialog . . . 200
GradientDialog . . . 208
GradientDialogWidget . . . 221
JlCompress
    Utility class for typical operations . . . 237
Kb . . . 255
KbAnim . . . 305
Ui::KbAnimWidget . . . 332
KbAnimWidget . . . 342
KbBind . . . 360
Ui::KbBindWidget . . . 389
KbBindWidget . . . 396
KbFirmware . . . 408
KbLight . . . 420
Ui::KbLightWidget . . . 449
KbLightWidget . . . 458
KbManager . . . 471
KbMode . . . 483
KbPerf . . . 497
KbProfile . . . 531
KbProfileDialog . . . 549
Ui::KbProfileDialog . . . 558

KbWidget . . . 563
Ui::KbWidget . . . 585
Key . . . 595
KeyAction . . . 598
KeyMap . . . 628
KeyWidget . . . 651
Ui::KPerfWidget . . . 674
KPerfWidget . . . 694
Ui::LayoutDialog . . . 707
LayoutDialog . . . 712
MacroReader
Creates a worker thread object. It does a connect do delayed deletion of thread local variables in the case the worker thread terminates . . . 715
MacroReaderThread
Responsible for reading Macro Key Values. It is created as a separate thread (worker thread) for reading macro commands from an fresh opened notify channel. Standard notify channel for macro definitions is number 2 . . . 719
Ui::MainWindow . . . 723
MainWindow . . . 727
Ui::ModeSelectDialog . . . 742
ModeSelectDialog . . . 746
Ui::MPerfWidget . . . 750
MPerfWidget . . . 769
GradientDialog::Preset . . . 787
QDialog . . . 789
QIODevice . . . 790
QIODevice_descriptor . . . 791
QListWidget . . . 792
QMainWindow . . . 793
QObject . . . 794
QPushButton . . . 795
QThread . . . 796
QuaAdler32
Adler32 checksum . . . 797
QuaChecksum32
Checksum interface . . . 800
QuaCrc32
CRC32 checksum . . . 803
QuaGzipFile
GZIP file . . . 806
QuaZIODevice
A class to compress/decompress QIODevice . . . 813
QuaZip
ZIP archive . . . 821
QuaZipDir
Provides ZIP archive navigation . . . 853
QuaZipFile
A file inside ZIP archive . . . 871
QuaZipFileInfo
Information about a file inside archive . . . 894
QuaZipFileInfo64
Information about a file inside archive (with zip64 support) . . . 897
QuaZipFilePrivate
The implementation class for QuaZip . . . 905
QuaZipNewInfo
Information about a file to be created . . . 910
QuaZipPrivate
All the internal stuff for the QuaZip class . . . 918

QWidget . . . 927
Ui::RebindWidget . . . 928
RebindWidget . . . 959
RListWidget . . . 995
SettingsWidget . . . 1000
Ui::SettingsWidget . . . 1012
SGroup . . . 1024
Ui_AnimAddDialog . . . 1027
Ui_AnimSettingDialog . . . 1031
Ui_ExtraSettingsWidget . . . 1044
Ui_FwUpgradeDialog . . . 1056
Ui_GradientDialog . . . 1062
Ui_KbAnimWidget . . . 1070
Ui_KbBindWidget . . . 1079
Ui_KbLightWidget . . . 1085
Ui_KbProfileDialog . . . 1093
Ui_KbWidget . . . 1097
Ui_KPerfWidget . . . 1107
Ui_LayoutDialog . . . 1126
Ui_MainWindow . . . 1131
Ui_ModeSelectDialog . . . 1135
Ui_MPerfWidget . . . 1139
Ui_RebindWidget . . . 1158
Ui_SettingsWidget . . . 1189
UsbId . . . 1201

Chapter 10

File Index

10.1 File List

Here is a list of all files with brief descriptions:

src/ckb/animadddialog.cpp . . . 1207
src/ckb/animadddialog.h . . . 1207
src/ckb/animscript.cpp . . . 1208
src/ckb/animscript.h . . . 1210
src/ckb/animsettingdialog.cpp . . . 1211
src/ckb/animsettingdialog.h . . . 1213
src/ckb/autorun.cpp . . . 1213
src/ckb/autorun.h . . . 1214
src/ckb/ckb-anim.h . . . 1215
src/ckb/ckbsettings.cpp . . . 1234
src/ckb/ckbsettings.h . . . 1236
src/ckb/ckbsettingswriter.cpp . . . 1237
src/ckb/ckbsettingswriter.h . . . 1239
src/ckb/colorbutton.cpp . . . 1239
src/ckb/colorbutton.h . . . 1240
src/ckb/colormap.cpp . . . 1241
src/ckb/colormap.h . . . 1242
src/ckb/extrasettingswidget.cpp . . . 1243
src/ckb/extrasettingswidget.h . . . 1244
src/ckb/fwupgradedialog.cpp . . . 1244
src/ckb/fwupgradedialog.h . . . 1247
src/ckb/gradientbutton.cpp . . . 1248
src/ckb/gradientbutton.h . . . 1249
src/ckb/gradientdialog.cpp . . . 1250
src/ckb/gradientdialog.h . . . 1250
src/ckb/gradientdialogwidget.cpp . . . 1251
src/ckb/gradientdialogwidget.h . . . 1251
src/ckb/kb.cpp . . . 1252
src/ckb/kb.h . . . 1253
src/ckb/kbanim.cpp . . . 1254
src/ckb/kbanim.h . . . 1256
src/ckb/kbanimwidget.cpp . . . 1257
src/ckb/kbanimwidget.h . . . 1257
src/ckb/kbbind.cpp . . . 1258
src/ckb/kbbind.h . . . 1259
src/ckb/kbbindwidget.cpp . . . 1260
src/ckb/kbbindwidget.h . . . 1260
src/ckb/kbfirmware.cpp . . . 1261

src/ckb/kbfirmware.h . . . 1262
src/ckb/kblight.cpp . . . 1263
src/ckb/kblight.h . . . 1266
src/ckb/kblightwidget.cpp . . . 1267
src/ckb/kblightwidget.h . . . 1267
src/ckb/kbmanager.cpp . . . 1268
src/ckb/kbmanager.h . . . 1269
src/ckb/kbmode.cpp . . . 1270
src/ckb/kbmode.h . . . 1270
src/ckb/kbperf.cpp . . . 1271
src/ckb/kbperf.h . . . 1271
src/ckb/kbprofile.cpp . . . 1272
src/ckb/kbprofile.h . . . 1273
src/ckb/kbprofiledialog.cpp . . . 1273
src/ckb/kbprofiledialog.h . . . 1274
src/ckb/kbwidget.cpp . . . 1275
src/ckb/kbwidget.h . . . 1275
src/ckb/keyaction.cpp . . . 1276
src/ckb/keyaction.h . . . 1277
src/ckb/keymap.cpp . . . 1278
src/ckb/keymap.h . . . 1292
src/ckb/keywidget.cpp . . . 1292
src/ckb/keywidget.h . . . 1294
src/ckb/kperfwidget.cpp . . . 1295
src/ckb/kperfwidget.h . . . 1296
src/ckb/layoutdialog.cpp . . . 1298
src/ckb/layoutdialog.h . . . 1298
src/ckb/macroreader.cpp . . . 1299
src/ckb/macroreader.h . . . 1299
src/ckb/main.cpp . . . 1300
src/ckb/mainwindow.cpp . . . 1307
src/ckb/mainwindow.h . . . 1307
src/ckb/media.h . . . 1308
src/ckb/media_linux.cpp . . . 1310
src/ckb/media_mac.m . . . 1311
src/ckb/modeselectdialog.cpp . . . 1313
src/ckb/modeselectdialog.h . . . 1313
src/ckb/mperfwidget.cpp . . . 1314
src/ckb/mperfwidget.h . . . 1317
src/ckb/rebindwidget.cpp . . . 1507
src/ckb/rebindwidget.h . . . 1507
src/ckb/rlistwidget.cpp . . . 1614
src/ckb/rlistwidget.h . . . 1614
src/ckb/settingswidget.cpp . . . 1615
src/ckb/settingswidget.h . . . 1617
src/ckb/ui_animadddialog.h . . . 1618
src/ckb/ui_animsettingdialog.h . . . 1619
src/ckb/ui_extrasettingswidget.h . . . 1619
src/ckb/ui_fwupgradedialog.h . . . 1620
src/ckb/ui_gradientdialog.h . . . 1621
src/ckb/ui_kbanimwidget.h . . . 1622
src/ckb/ui_kbbindwidget.h . . . 1623
src/ckb/ui_kblightwidget.h . . . 1624
src/ckb/ui_kbprofiledialog.h . . . 1625
src/ckb/ui_kbwidget.h . . . 1626
src/ckb/ui_kperfwidget.h . . . 1627
src/ckb/ui_layoutdialog.h . . . 1628
src/ckb/ui_mainwindow.h . . . 1629

src/ckb/ui_modeselectdialog.h . . . 1630
src/ckb/ui_mperfwidget.h . . . 1631
src/ckb/ui_rebindwidget.h . . . 1632
src/ckb/ui_settingswidget.h . . . 1633
src/ckb/quazip/crypt.h . . . 1319
src/ckb/quazip/ioapi.h . . . 1322
src/ckb/quazip/JlCompress.cpp . . . 1329
src/ckb/quazip/JlCompress.h . . . 1331
src/ckb/quazip/qioapi.cpp . . . 1331
src/ckb/quazip/quaadler32.cpp . . . 1343
src/ckb/quazip/quaadler32.h . . . 1344
src/ckb/quazip/quachecksum32.h . . . 1345
src/ckb/quazip/quacrc32.cpp . . . 1346
src/ckb/quazip/quacrc32.h . . . 1347
src/ckb/quazip/quagzipfile.cpp . . . 1348
src/ckb/quazip/quagzipfile.h . . . 1349
src/ckb/quazip/quaziodevice.cpp . . . 1350
src/ckb/quazip/quaziodevice.h . . . 1351
src/ckb/quazip/quazip.cpp . . . 1352
src/ckb/quazip/quazip.h . . . 1354
src/ckb/quazip/quazip_global.h . . . 1355
src/ckb/quazip/quazipdir.cpp . . . 1357
src/ckb/quazip/quazipdir.h . . . 1359
src/ckb/quazip/quazipfile.cpp . . . 1359
src/ckb/quazip/quazipfile.h . . . 1360
src/ckb/quazip/quazipfileinfo.cpp . . . 1361
src/ckb/quazip/quazipfileinfo.h . . . 1363
src/ckb/quazip/quazipnewinfo.cpp . . . 1364
src/ckb/quazip/quazipnewinfo.h . . . 1368
src/ckb/quazip/unzip.c . . . 1369
src/ckb/quazip/unzip.h . . . 1420
src/ckb/quazip/zip.c . . . 1440
src/ckb/quazip/zip.h . . . 1496
src/ckb/release/moc_animadddialog.cpp . . . 1508
src/ckb/release/moc_animscript.cpp . . . 1511
src/ckb/release/moc_animsettingdialog.cpp . . . 1514
src/ckb/release/moc_ckbsettingswriter.cpp . . . 1517
src/ckb/release/moc_colorbutton.cpp . . . 1519
src/ckb/release/moc_extrasettingswidget.cpp . . . 1521
src/ckb/release/moc_fwupgradedialog.cpp . . . 1524
src/ckb/release/moc_gradientbutton.cpp . . . 1527
src/ckb/release/moc_gradientdialog.cpp . . . 1530
src/ckb/release/moc_gradientdialogwidget.cpp . . . 1533
src/ckb/release/moc_kb.cpp . . . 1535
src/ckb/release/moc_kbanim.cpp . . . 1538
src/ckb/release/moc_kbanimwidget.cpp . . . 1540
src/ckb/release/moc_kbbind.cpp . . . 1543
src/ckb/release/moc_kbbindwidget.cpp . . . 1545
src/ckb/release/moc_kbfirmware.cpp . . . 1547
src/ckb/release/moc_kblight.cpp . . . 1550
src/ckb/release/moc_kblightwidget.cpp . . . 1553
src/ckb/release/moc_kbmanager.cpp . . . 1556
src/ckb/release/moc_kbmode.cpp . . . 1558
src/ckb/release/moc_kbperf.cpp . . . 1560
src/ckb/release/moc_kbprofile.cpp . . . 1563
src/ckb/release/moc_kbprofiledialog.cpp . . . 1565
src/ckb/release/moc_kbwidget.cpp . . . 1569
src/ckb/release/moc_keyaction.cpp . . . 1571

src/ckb/release/moc_keywidget.cpp . . . 1573
src/ckb/release/moc_kperfwidget.cpp . . . 1575
src/ckb/release/moc_layoutdialog.cpp . . . 1578
src/ckb/release/moc_macroreader.cpp . . . 1581
src/ckb/release/moc_mainwindow.cpp . . . 1585
src/ckb/release/moc_modeselectdialog.cpp . . . 1587
src/ckb/release/moc_mperfwidget.cpp . . . 1589
src/ckb/release/moc_quagzipfile.cpp . . . 1592
src/ckb/release/moc_quaziodevice.cpp . . . 1594
src/ckb/release/moc_quazipfile.cpp . . . 1596
src/ckb/release/moc_rebindwidget.cpp . . . 1598
src/ckb/release/moc_rlistwidget.cpp . . . 1601
src/ckb/release/moc_settingswidget.cpp . . . 1603
src/ckb/release/qrc_binary.cpp . . . 1605
src/ckb/release/qrc_image.cpp . . . 1608
src/ckb/release/qrc_text.cpp . . . 1611

Chapter 11

Namespace Documentation

11.1 Ui Namespace Reference

Data Structures

- class AnimAddDialog
- class AnimSettingDialog
- class ExtraSettingsWidget
- class FwUpgradeDialog
- class GradientDialog
- class KbAnimWidget
- class KbBindWidget
- class KbLightWidget
- class KbProfileDialog
- class KbWidget
- class KPerfWidget
- class LayoutDialog
- class MainWindow
- class ModeSelectDialog
- class MPerfWidget
- class RebindWidget
- class SettingsWidget

Chapter 12

Data Structure Documentation

12.1 AnimAddDialog Class Reference

`#include <src/ckb/animadddialog.h>`

Inheritance diagram for AnimAddDialog:

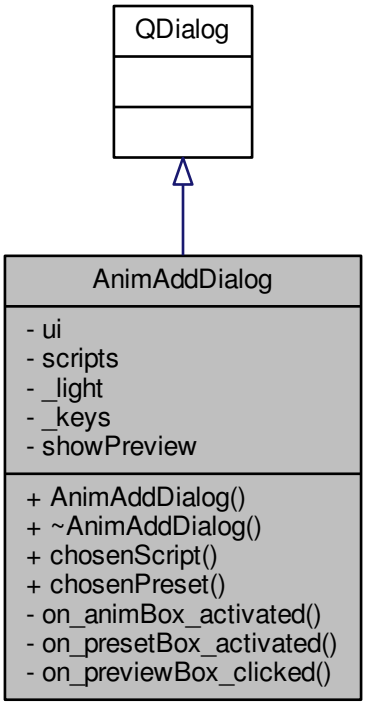

Collaboration diagram for AnimAddDialog:

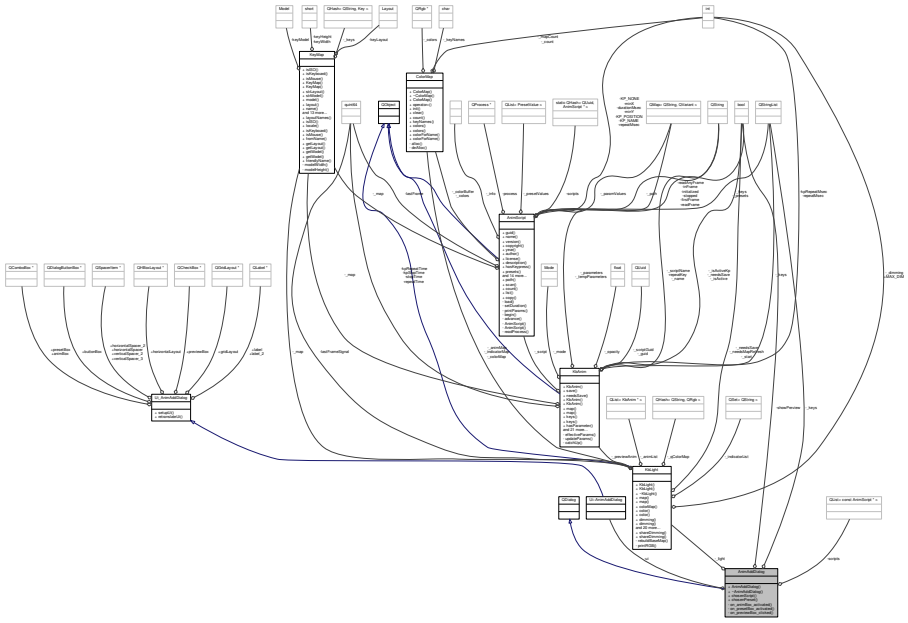

Public Member Functions

- AnimAddDialog (QWidget *parent, KbLight *light, const QStringList &keys)
- ~AnimAddDialog ()
- const AnimScript * chosenScript ()
- int chosenPreset ()

Private Slots

- void on_animBox_activated (int index)
- void on_presetBox_activated (int index)
- void on_previewBox_clicked (bool checked)

Private Attributes

- Ui::AnimAddDialog * ui
- QList< const AnimScript * > scripts
- KbLight * _light
- QStringList _keys
- bool showPreview

12.1.1 Detailed Description

Definition at line 12 of file animadddialog.h.

12.1.2 Constructor & Destructor Documentation

12.1.2.1 AnimAddDialog::AnimAddDialog (QWidget * *parent*, KbLight * *light*, const QStringList & *keys*) [explicit]

Definition at line 4 of file animadddialog.cpp.

References Ui_AnimAddDialog::animBox, AnimScript::list(), AnimScript::name(), on_animBox_activated(), scripts, Ui_AnimAddDialog::setupUi(), and ui.

```
4                                                                                    :
5     QDialog(parent),
6     ui(new Ui::AnimAddDialog), _light(light), _keys(keys),
      showPreview(true)
7 {
8     ui->setupUi(this);
9     scripts = AnimScript::list();
10     foreach(const AnimScript* script, scripts)
11         ui->animBox->addItem(script->name());
12     on_animBox_activated(0);
13 }
```

Here is the call graph for this function:

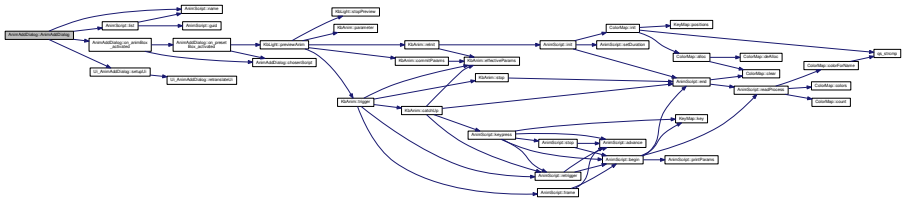

12.1.2.2 AnimAddDialog::~AnimAddDialog ( )

Definition at line 15 of file animadddialog.cpp.

References _light, KbLight::stopPreview(), and ui.

```
15                                  {
16     delete ui;
17     _light->stopPreview();
18 }
```

Here is the call graph for this function:

12.1.3 Member Function Documentation

12.1.3.1 int AnimAddDialog::chosenPreset ( )

Definition at line 24 of file animadddialog.cpp.

References Ui_AnimAddDialog::presetBox, and ui.

Referenced by KbLightWidget::on_animButton_clicked().

```
24                                {
25     return ui->presetBox->currentIndex();
26 }
```

Here is the caller graph for this function:

12.1.3.2 const AnimScript * AnimAddDialog::chosenScript ( )

Definition at line 20 of file animadddialog.cpp.

References Ui_AnimAddDialog::animBox, scripts, and ui.

Referenced by on_animBox_activated(), KbLightWidget::on_animButton_clicked(), and on_presetBox_activated().

```
20                                          {
21     return scripts[ui->animBox->currentIndex()];
22 }
```

Here is the caller graph for this function:

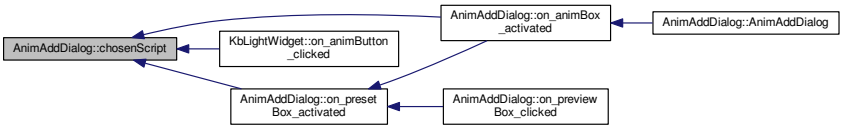

12.1.3.3 void AnimAddDialog::on_animBox_activated (int *index*) [private], [slot]

Definition at line 28 of file animadddialog.cpp.

References chosenScript(), on_presetBox_activated(), Ui_AnimAddDialog::presetBox, and ui.

Referenced by AnimAddDialog().

```
28                                                {
29     // Update preset list
30     ui->presetBox->clear();
31     foreach(const QString& preset, chosenScript()->presets())
32         ui->presetBox->addItem(preset);
33     ui->presetBox->setCurrentIndex(0);
34     on_presetBox_activated(0);
35 }
```

Here is the call graph for this function:

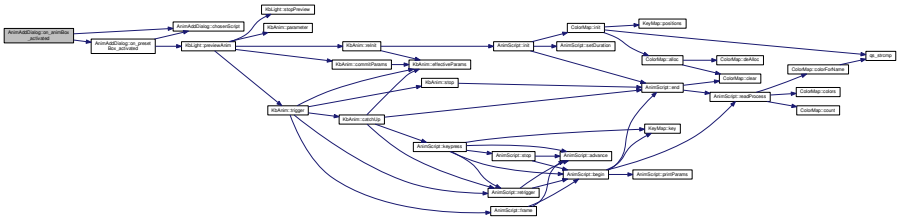

Here is the caller graph for this function:



12.1.3.4 void AnimAddDialog::on_presetBox_activated (int *index*) [private], [slot]

Definition at line 37 of file animadddialog.cpp.

References _keys, _light, chosenScript(), KbLight::previewAnim(), and showPreview.

Referenced by on_animBox_activated(), and on_previewBox_clicked().

```
37                                                  {
38     // Update preview
39     if(showPreview)
40         _light->previewAnim(chosenScript(), _keys,
       chosenScript()->preset(index));
41 }
```

Here is the call graph for this function:

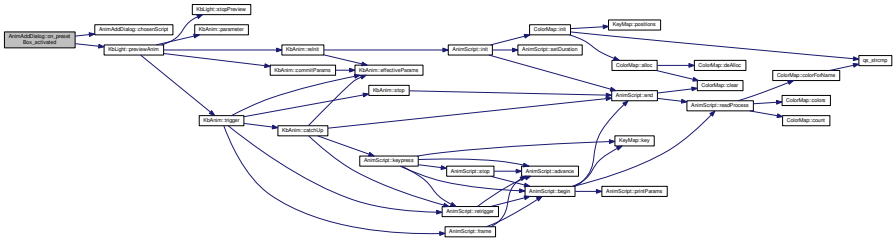

Here is the caller graph for this function:



12.1.3.5 void AnimAddDialog::on_previewBox_clicked (bool *checked*) [private], [slot]

Definition at line 43 of file animadddialog.cpp.

References _light, on_presetBox_activated(), Ui_AnimAddDialog::presetBox, showPreview, KbLight::stopPreview(), and ui.

```
43                                                  {
44     showPreview = checked;
45     if(showPreview)
46         on_presetBox_activated(ui->presetBox->currentIndex());
47     else
48         _light->stopPreview();
49 }
```

Here is the call graph for this function:

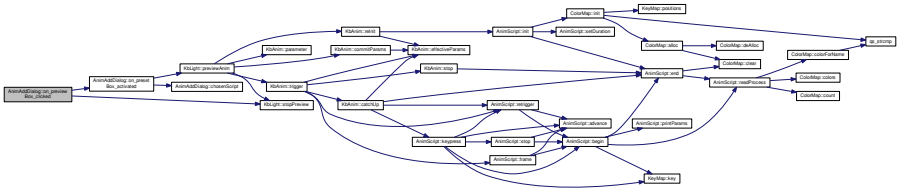

12.1.4 Field Documentation

12.1.4.1 QStringList AnimAddDialog::_keys [private]

Definition at line 33 of file animadddialog.h.

Referenced by on_presetBox_activated().

12.1.4.2 KbLight* AnimAddDialog::_light [private]

Definition at line 32 of file animadddialog.h.

Referenced by on_presetBox_activated(), on_previewBox_clicked(), and ~AnimAddDialog().

12.1.4.3 QList<const AnimScript*> AnimAddDialog::scripts [private]

Definition at line 30 of file animadddialog.h.

Referenced by AnimAddDialog(), and chosenScript().

12.1.4.4 bool AnimAddDialog::showPreview [private]

Definition at line 34 of file animadddialog.h.

Referenced by on_presetBox_activated(), and on_previewBox_clicked().

12.1.4.5 Ui::AnimAddDialog* AnimAddDialog::ui [private]

Definition at line 29 of file animadddialog.h.

Referenced by AnimAddDialog(), chosenPreset(), chosenScript(), on_animBox_activated(), on_previewBox_clicked(), and ~AnimAddDialog().

The documentation for this class was generated from the following files:

- src/ckb/animadddialog.h
- src/ckb/animadddialog.cpp

12.2 Ui::AnimAddDialog Class Reference

`#include <src/ckb/ui_animadddialog.h>`

Inheritance diagram for Ui::AnimAddDialog:

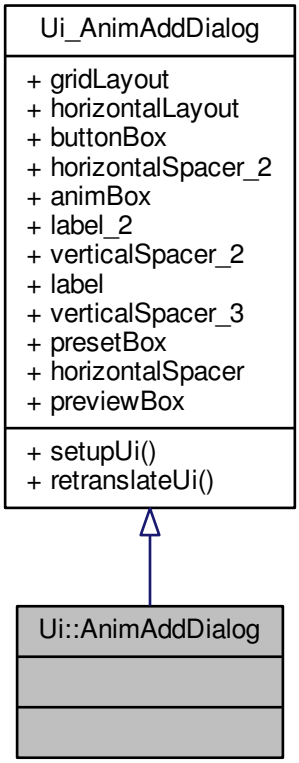

Collaboration diagram for Ui::AnimAddDialog:

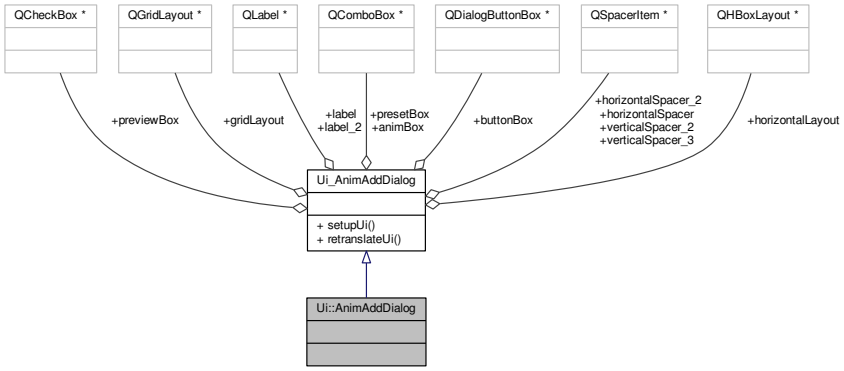

Public Member Functions

- void setupUi (QDialog *AnimAddDialog)
- void retranslateUi (QDialog *AnimAddDialog)

Data Fields

- QGridLayout * gridLayout
- QHBoxLayout * horizontalLayout
- QDialogButtonBox * buttonBox
- QSpacerItem * horizontalSpacer_2
- QComboBox * animBox
- QLabel * label_2
- QSpacerItem * verticalSpacer_2
- QLabel * label
- QSpacerItem * verticalSpacer_3
- QComboBox * presetBox
- QSpacerItem * horizontalSpacer
- QCheckBox * previewBox

12.2.1 Detailed Description

Definition at line 146 of file ui_animadddialog.h.

12.2.2 Member Function Documentation

12.2.2.1 void Ui_AnimAddDialog::retranslateUi (QDialog * *AnimAddDialog*) [inline], [inherited]

Definition at line 135 of file ui_animadddialog.h.

References Ui_AnimAddDialog::label, Ui_AnimAddDialog::label_2, and Ui_AnimAddDialog::previewBox.

Referenced by Ui_AnimAddDialog::setupUi().

```
136     {
137         AnimAddDialog->setWindowTitle(QApplication::translate("AnimAddDialog", "Add Animation", Q_NULLPTR))
    ;
138         label_2->setText(QApplication::translate("AnimAddDialog", "Preset:", Q_NULLPTR));
```

```
139         label->setText(QApplication::translate("AnimAddDialog", "Animation:", Q_NULLPTR));
140         previewBox->setText(QApplication::translate("AnimAddDialog", "Show preview", Q_NULLPTR));
141     } // retranslateUi
```

Here is the caller graph for this function:



12.2.2.2 void Ui_AnimAddDialog::setupUi (QDialog * *AnimAddDialog*) [inline],[inherited]

Definition at line 44 of file ui_animadddialog.h.

References Ui_AnimAddDialog::animBox, Ui_AnimAddDialog::buttonBox, Ui_AnimAddDialog::gridLayout, Ui_AnimAddDialog::horizontalLayout, Ui_AnimAddDialog::horizontalSpacer, Ui_AnimAddDialog::horizontalSpacer_2, Ui_AnimAddDialog::label, Ui_AnimAddDialog::label_2, Ui_AnimAddDialog::presetBox, Ui_AnimAddDialog::previewBox, Ui_AnimAddDialog::retranslateUi(), Ui_AnimAddDialog::verticalSpacer_2, and Ui_AnimAddDialog::verticalSpacer_3.

Referenced by AnimAddDialog::AnimAddDialog().

```
45     {
46         if (AnimAddDialog->objectName().isEmpty())
47             AnimAddDialog->setObjectName(QStringLiteral("AnimAddDialog"));
48         AnimAddDialog->resize(350, 205);
49         QSizePolicy sizePolicy(QSizePolicy::Fixed, QSizePolicy::Fixed);
50         sizePolicy.setHorizontalStretch(0);
51         sizePolicy.setVerticalStretch(0);
52         sizePolicy.setHeightForWidth(AnimAddDialog->sizePolicy().hasHeightForWidth());
53         AnimAddDialog->setSizePolicy(sizePolicy);
54         gridLayout = new QGridLayout(AnimAddDialog);
55         gridLayout->setObjectName(QStringLiteral("gridLayout"));
56         horizontalLayout = new QHBoxLayout();
57         horizontalLayout->setObjectName(QStringLiteral("horizontalLayout"));
58         buttonBox = new QDialogButtonBox(AnimAddDialog);
59         buttonBox->setObjectName(QStringLiteral("buttonBox"));
60         buttonBox->setOrientation(Qt::Horizontal);
61         buttonBox->setStandardButtons(QDialogButtonBox::Cancel|QDialogButtonBox::Ok);
62         buttonBox->setCenterButtons(false);
63
64         horizontalLayout->addWidget(buttonBox);
65
66
67         gridLayout->addLayout(horizontalLayout, 5, 0, 1, 4);
68
69         horizontalSpacer_2 = new QSpacerItem(50, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
70
71         gridLayout->addItem(horizontalSpacer_2, 1, 3, 1, 1);
72
73         animBox = new QComboBox(AnimAddDialog);
74         animBox->setObjectName(QStringLiteral("animBox"));
75         QSizePolicy sizePolicy1(QSizePolicy::Expanding, QSizePolicy::Fixed);
76         sizePolicy1.setHorizontalStretch(0);
77         sizePolicy1.setVerticalStretch(0);
78         sizePolicy1.setHeightForWidth(animBox->sizePolicy().hasHeightForWidth());
79         animBox->setSizePolicy(sizePolicy1);
80
81         gridLayout->addWidget(animBox, 1, 2, 1, 1);
82
83         label_2 = new QLabel(AnimAddDialog);
84         label_2->setObjectName(QStringLiteral("label_2"));
85         QSizePolicy sizePolicy2(QSizePolicy::Preferred, QSizePolicy::Preferred);
86         sizePolicy2.setHorizontalStretch(0);
87         sizePolicy2.setVerticalStretch(0);
88         sizePolicy2.setHeightForWidth(label_2->sizePolicy().hasHeightForWidth());
89         label_2->setSizePolicy(sizePolicy2);
90         label_2->setAlignment(Qt::AlignRight|Qt::AlignTrailing|Qt::AlignVCenter);
91
92         gridLayout->addWidget(label_2, 2, 1, 1, 1);
93
```

```
94          verticalSpacer_2 = new QSpacerItem(20, 0, QSizePolicy::Minimum,
    QSizePolicy::Expanding);
95
96          gridLayout->addItem(verticalSpacer_2, 4, 2, 1, 1);
97
98          label = new QLabel(AnimAddDialog);
99          label->setObjectName(QStringLiteral("label"));
100          sizePolicy2.setHeightForWidth(label->sizePolicy().hasHeightForWidth());
101          label->setSizePolicy(sizePolicy2);
102          label->setAlignment(Qt::AlignRight|Qt::AlignTrailing|Qt::AlignVCenter);
103
104          gridLayout->addWidget(label, 1, 1, 1, 1);
105
106          verticalSpacer_3 = new QSpacerItem(20, 0, QSizePolicy::Minimum,
    QSizePolicy::Expanding);
107
108          gridLayout->addItem(verticalSpacer_3, 0, 2, 1, 1);
109
110          presetBox = new QComboBox(AnimAddDialog);
111          presetBox->setObjectName(QStringLiteral("presetBox"));
112          sizePolicy1.setHeightForWidth(presetBox->sizePolicy().hasHeightForWidth());
113          presetBox->setSizePolicy(sizePolicy1);
114
115          gridLayout->addWidget(presetBox, 2, 2, 1, 1);
116
117          horizontalSpacer = new QSpacerItem(50, 20, QSizePolicy::Fixed, QSizePolicy::Minimum
    );
118
119          gridLayout->addItem(horizontalSpacer, 1, 0, 1, 1);
120
121          previewBox = new QCheckBox(AnimAddDialog);
122          previewBox->setObjectName(QStringLiteral("previewBox"));
123          previewBox->setChecked(true);
124
125          gridLayout->addWidget(previewBox, 3, 2, 1, 1);
126
127
128          retranslateUi(AnimAddDialog);
129          QObject::connect(buttonBox, SIGNAL(accepted()), AnimAddDialog, SLOT(accept()));
130          QObject::connect(buttonBox, SIGNAL(rejected()), AnimAddDialog, SLOT(reject()));
131
132          QMetaObject::connectSlotsByName(AnimAddDialog);
133      } // setupUi
```

Here is the call graph for this function:



Here is the caller graph for this function:



12.2.3 Field Documentation

12.2.3.1 QComboBox* Ui_AnimAddDialog::animBox [inherited]

Definition at line 35 of file ui_animadddialog.h.

Referenced by AnimAddDialog::AnimAddDialog(), AnimAddDialog::chosenScript(), and Ui_AnimAddDialog::setupUi().

12.2.3.2 QDialogButtonBox* Ui_AnimAddDialog::buttonBox [inherited]

Definition at line 33 of file ui_animadddialog.h.

Referenced by Ui_AnimAddDialog::setupUi().

12.2.3.3 QGridLayout* Ui_AnimAddDialog::gridLayout [inherited]

Definition at line 31 of file ui_animadddialog.h.

Referenced by Ui_AnimAddDialog::setupUi().

12.2.3.4 QHBoxLayout* Ui_AnimAddDialog::horizontalLayout [inherited]

Definition at line 32 of file ui_animadddialog.h.

Referenced by Ui_AnimAddDialog::setupUi().

12.2.3.5 QSpacerItem* Ui_AnimAddDialog::horizontalSpacer [inherited]

Definition at line 41 of file ui_animadddialog.h.

Referenced by Ui_AnimAddDialog::setupUi().

12.2.3.6 QSpacerItem* Ui_AnimAddDialog::horizontalSpacer_2 [inherited]

Definition at line 34 of file ui_animadddialog.h.

Referenced by Ui_AnimAddDialog::setupUi().

12.2.3.7 QLabel* Ui_AnimAddDialog::label [inherited]

Definition at line 38 of file ui_animadddialog.h.

Referenced by Ui_AnimAddDialog::retranslateUi(), and Ui_AnimAddDialog::setupUi().

12.2.3.8 QLabel* Ui_AnimAddDialog::label_2 [inherited]

Definition at line 36 of file ui_animadddialog.h.

Referenced by Ui_AnimAddDialog::retranslateUi(), and Ui_AnimAddDialog::setupUi().

12.2.3.9 QComboBox* Ui_AnimAddDialog::presetBox [inherited]

Definition at line 40 of file ui_animadddialog.h.

Referenced by AnimAddDialog::chosenPreset(), AnimAddDialog::on_animBox_activated(), AnimAddDialog::on_previewBox_clicked(), and Ui_AnimAddDialog::setupUi().

12.2.3.10 QCheckBox* Ui_AnimAddDialog::previewBox [inherited]

Definition at line 42 of file ui_animadddialog.h.

Referenced by Ui_AnimAddDialog::retranslateUi(), and Ui_AnimAddDialog::setupUi().

12.2.3.11 QSpacerItem* Ui_AnimAddDialog::verticalSpacer_2 [inherited]

Definition at line 37 of file ui_animadddialog.h.

Referenced by Ui_AnimAddDialog::setupUi().

12.2.3.12 QSpacerItem* Ui_AnimAddDialog::verticalSpacer_3 [inherited]

Definition at line 39 of file ui_animadddialog.h.

Referenced by Ui_AnimAddDialog::setupUi().

The documentation for this class was generated from the following file:

- src/ckb/ui_animadddialog.h

12.3 AnimScript Class Reference

`#include <src/ckb/animscript.h>`

Inheritance diagram for AnimScript:

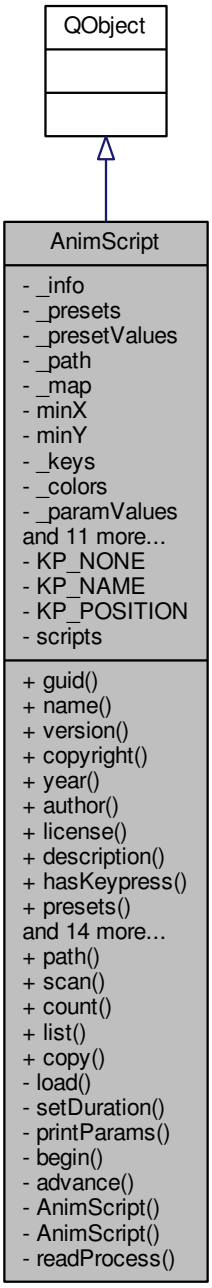

Collaboration diagram for AnimScript:

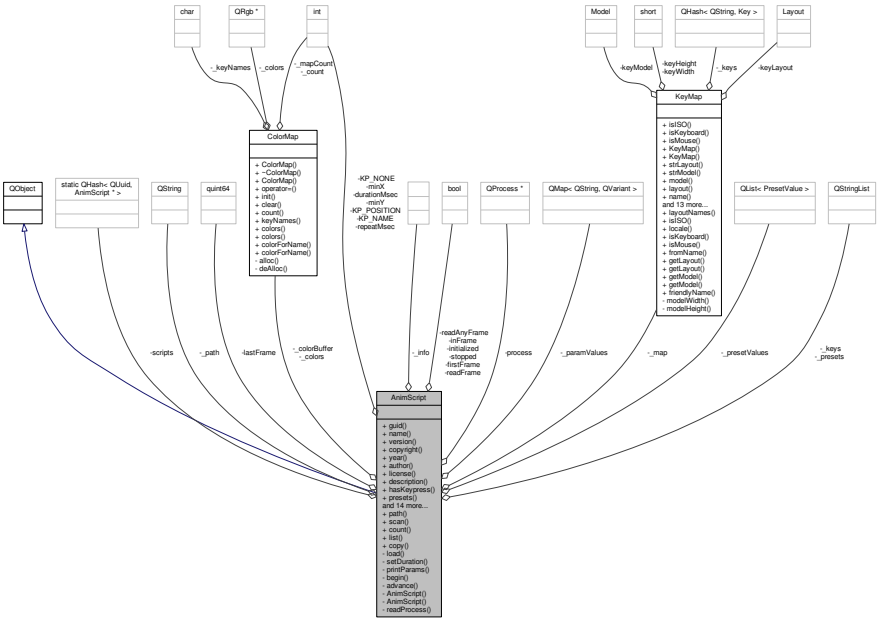

Data Structures

- struct Param

Public Types

- typedef QMap< QString, QVariant > PresetValue

Public Member Functions

- const QUuid & guid () const
- const QString & name () const
- const QString & version () const
- QString copyright () const
- const QString & year () const
- const QString & author () const
- const QString & license () const
- const QString & description () const
- bool hasKeypress () const
- const QStringList & presets () const
- const PresetValue & preset (int index) const
- QListIterator< Param > paramIterator () const
- Param param (const QString &name) const
- bool hasParam (const QString &name) const
- void init (const KeyMap &map, const QStringList &keys, const QMap< QString, QVariant > &paramValues)
- void parameters (const QMap< QString, QVariant > &paramValues)
- void retrigger (quint64 timestamp, bool allowPreempt=false)
- void stop (quint64 timestamp)
- void keypress (const QString &key, bool pressed, quint64 timestamp)

- void frame (quint64 timestamp)
- void end ()
- bool hasFrame () const
- const ColorMap & colors () const
- ~AnimScript ()

Static Public Member Functions

- static QString path ()
- static void scan ()
- static int count ()
- static QList< const AnimScript * > list ()
- static AnimScript * copy (QObject *parent, const QUuid &id)

Private Slots

- void readProcess ()

Private Member Functions

- bool load ()
- void setDuration ()
- void printParams ()
- void begin (quint64 timestamp)
- void advance (quint64 timestamp)
- AnimScript (QObject *parent, const QString &path)
- AnimScript (QObject *parent, const AnimScript &base)

Private Attributes

- struct {
  QUuid **guid**
  QString **name**
  QString **version**
  QString **year**
  QString **author**
  QString **license**
  QString **description**
  QList< Param > **params**
  int **kpMode**:3
  bool **absoluteTime**:1
  bool **repeat**:1
  bool **preempt**:1
  bool **liveParams**:1
  } _info

- QStringList _presets
- QList< PresetValue > _presetValues
- QString _path
- KeyMap _map
- int minX
- int minY
- QStringList _keys

- ColorMap _colors
- PresetValue _paramValues
- quint64 lastFrame
- int durationMsec
- int repeatMsec
- bool initialized:1
- bool firstFrame:1
- bool readFrame:1
- bool readAnyFrame:1
- bool stopped:1
- bool inFrame:1
- QProcess * process
- ColorMap _colorBuffer

Static Private Attributes

- static const int KP_NONE = 0
- static const int KP_NAME = 1
- static const int KP_POSITION = 2
- static QHash< QUuid, AnimScript * > scripts

12.3.1 Detailed Description

Definition at line 16 of file animscript.h.

12.3.2 Data Structure Documentation

12.3.2.1 struct AnimScript::Param

Definition at line 21 of file animscript.h.

Collaboration diagram for AnimScript::Param:

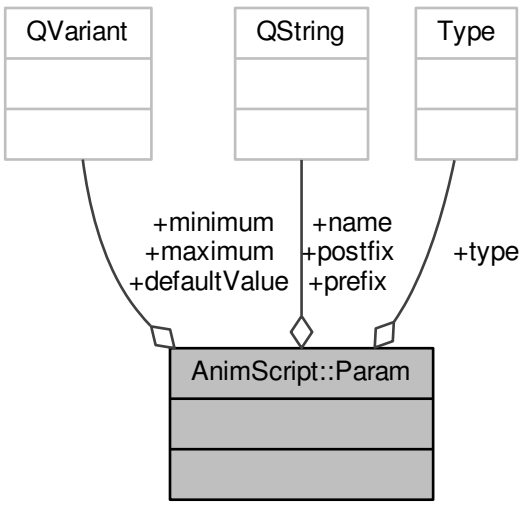

Data Fields

	Type	

Data Fields

QVariant	defaultValue	
QVariant	maximum	
QVariant	minimum	
QString	name	
QString	postfix	
QString	prefix	
Type	type	

12.3.3 Member Typedef Documentation

12.3.3.1 typedef QMap<QString, QVariant> AnimScript::PresetValue

Definition at line 58 of file animscript.h.

12.3.4 Constructor & Destructor Documentation

12.3.4.1 AnimScript::~AnimScript ( )

Definition at line 21 of file animscript.cpp.

References process.

```
21                          {
22     if(process){
23         process->kill();
24         process->waitForFinished(1000);
25         delete process;
26     }
27 }
```

12.3.4.2 AnimScript::AnimScript (QObject * *parent*, const QString & *path*) [private]

Definition at line 11 of file animscript.cpp.

Referenced by copy(), and scan().

```
11                                                          :
12     QObject(parent), _path(path), initialized(false),
       process(0)
13 {
14 }
```

Here is the caller graph for this function:



12.3.4.3 AnimScript::AnimScript (QObject * *parent*, const AnimScript & *base*) [private]

Definition at line 16 of file animscript.cpp.

```
16                                                          :
17     QObject(parent), _info(base._info), _path(base._path),
       initialized(false), process(0)
18 {
19 }
```

12.3.5 Member Function Documentation

12.3.5.1 void AnimScript::advance (quint64 *timestamp*) [private]

Definition at line 445 of file animscript.cpp.

References _info, durationMsec, lastFrame, and process.

Referenced by frame(), keypress(), retrigger(), and stop().

```
445                                          {
446     if(timestamp <= lastFrame || !process)
447         // Don't do anything if the time hasn't actually advanced.
448         return;
449     double delta = (timestamp - lastFrame) / (double)durationMsec;
450     if(!_info.absoluteTime){
451         // Skip any complete durations
452         while(delta > 1.){
453             process->write("time 1\n");
454             delta--;
455         }
456     }
457     process->write(QString("time %1\n").arg(delta).toLatin1());
458     lastFrame = timestamp;
459 }
```

Here is the caller graph for this function:

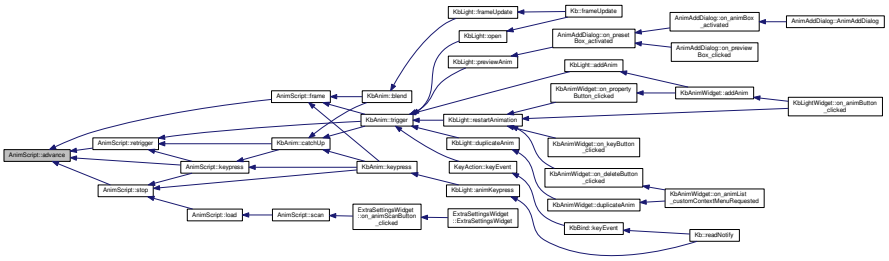

12.3.5.2 const QString& AnimScript::author ( ) const [inline]

Definition at line 64 of file animscript.h.

References _info.

Referenced by AnimSettingDialog::AnimSettingDialog().

```
64 { return _info.author; }
```

Here is the caller graph for this function:



12.3.5.3 void AnimScript::begin (quint64 *timestamp*) [private]

Definition at line 287 of file animscript.cpp.

References _keys, _map, _path, end(), firstFrame, inFrame, initialized, KeyMap::key(), lastFrame, minX, minY, printParams(), process, readAnyFrame, readFrame, readProcess(), stopped, Key::x, and Key::y.

Referenced by frame(), keypress(), retrigger(), and stop().

```
287                                     {
288     if(!initialized)
289         return;
290     end();
291     stopped = firstFrame = readFrame = readAnyFrame =
      inFrame = false;
292     // Determine the upper left corner of the given keys
293     QStringList keysCopy = _keys;
294     minX = INT_MAX;
295     minY = INT_MAX;
296     foreach(const QString& key, keysCopy){
297         const Key& pos = _map.key(key);
298         if(!pos){
299             keysCopy.removeAll(key);
300             continue;
301         }
302         if(pos.x < minX)
303             minX = pos.x;
304         if(pos.y < minY)
305             minY = pos.y;
306     }
307     if(keysCopy.isEmpty()){
308         // If the key list is empty, don't actually start the animation but pretend it's running anyway
309         firstFrame = readFrame = readAnyFrame = true;
310         return;
311     }
312     process = new QProcess(this);
313     connect(process, SIGNAL(readyRead()), this, SLOT(readProcess()));
314     process->start(_path, QStringList("--ckb-run"));
315     qDebug() << "Starting " << _path;
316     // Write the keymap to the process
317     process->write("begin keymap\n");
318     process->write(QString("keycount %1\n").arg(keysCopy.count()).toLatin1());
319     foreach(const QString& key, keysCopy){
320         const Key& pos = _map.key(key);
321         process->write(QString("key %1 %2,%3\n").arg(key).arg(pos.x -
      minX).arg(pos.y - minY).toLatin1());
322     }
323     process->write("end keymap\n");
324     // Write parameters
325     printParams();
326     // Begin animating
327     process->write("begin run\n");
328     lastFrame = timestamp;
329 }
```

Here is the call graph for this function:

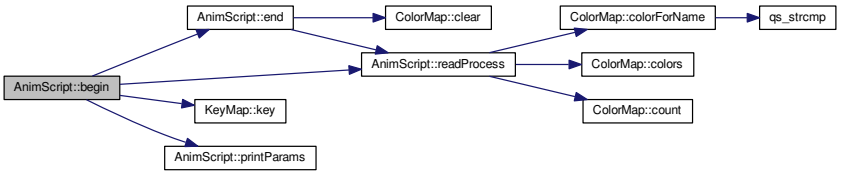

Here is the caller graph for this function:

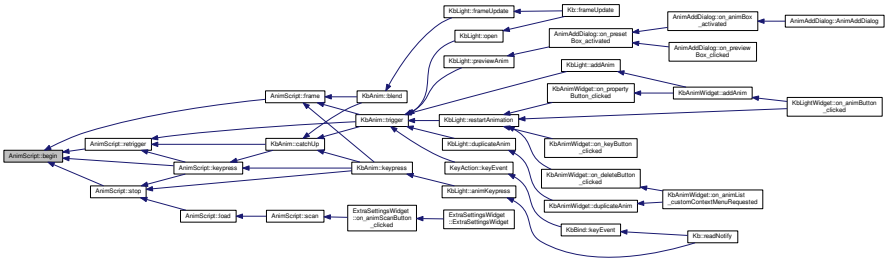

12.3.5.4 const ColorMap& AnimScript::colors ( ) const [inline]

Definition at line 99 of file animscript.h.

References _colors.

Referenced by KbAnim::blend().

```
99 { return _colors; }
```

Here is the caller graph for this function:

12.3.5.5 AnimScript * AnimScript::copy (QObject * *parent*, const QUuid & *id*) [static]

Definition at line 67 of file animscript.cpp.

References AnimScript(), and scripts.

Referenced by KbAnim::KbAnim().

```
67                                                      {
68     return scripts.contains(id) ? new AnimScript(parent, *
    scripts.value(id)) : 0;
69 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

12.3.5.6 QString AnimScript::copyright ( ) const [inline]

Definition at line 62 of file animscript.h.

References _info.

Referenced by KbAnimWidget::setCurrent().

```
62 { return "Copyright © " + _info.year + " " + _info.author; }
```

Here is the caller graph for this function:

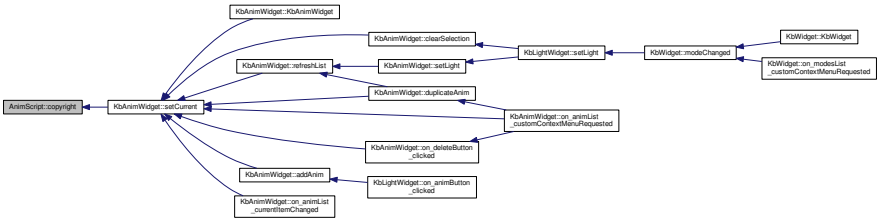

12.3.5.7 static int AnimScript::count ( ) [inline], [static]

Definition at line 54 of file animscript.h.

References scripts.

Referenced by KbLightWidget::KbLightWidget(), load(), KbLightWidget::on_animButton_clicked(), and ExtraSettingsWidget::on_animScanButton_clicked().

```
54 { return scripts.count(); }
```

Here is the caller graph for this function:

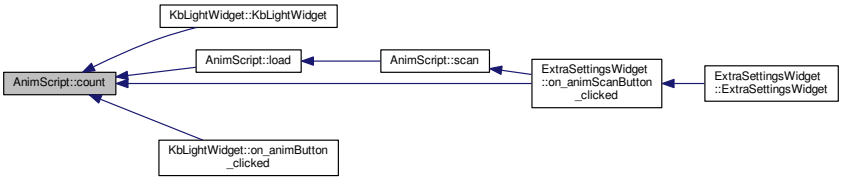

12.3.5.8 const QString& AnimScript::description ( ) const [inline]

Definition at line 66 of file animscript.h.

References _info.

Referenced by AnimSettingDialog::AnimSettingDialog().

```
66 { return _info.description; }
```

Here is the caller graph for this function:



12.3.5.9 void AnimScript::end ( )

Definition at line 387 of file animscript.cpp.

References _colors, ColorMap::clear(), process, and readProcess().

Referenced by begin(), KbAnim::catchUp(), init(), and KbAnim::stop().

```
387                     {
388     _colors.clear();
389     if(process){
390         process->kill();
391         connect(process, SIGNAL(finished(int)), process, SLOT(deleteLater()));
392         disconnect(process, SIGNAL(readyRead()), this, SLOT(readProcess()));
393         process = 0;
394     }
395 }
```

Here is the call graph for this function:

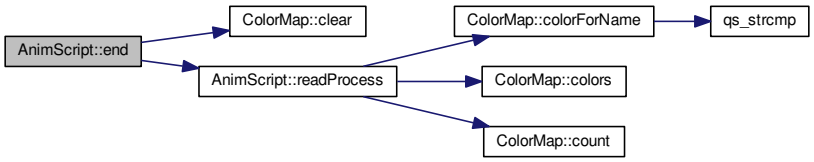

Here is the caller graph for this function:

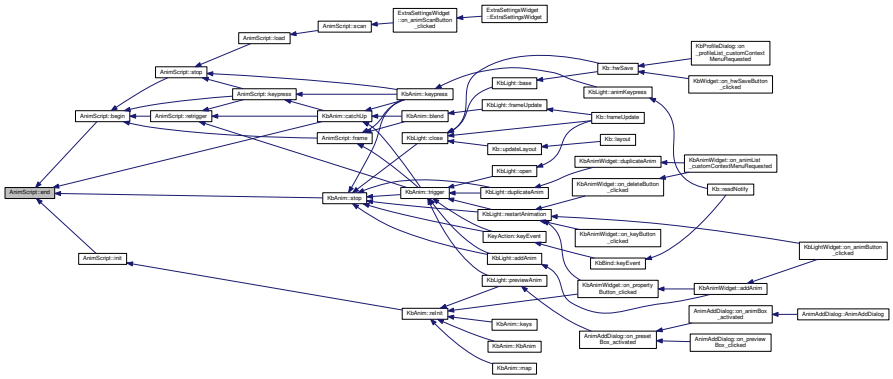

12.3.5.10 void AnimScript::frame (quint64 *timestamp*)

Definition at line 430 of file animscript.cpp.

References advance(), begin(), firstFrame, initialized, process, readFrame, and stopped.

Referenced by KbAnim::blend(), KbAnim::keypress(), and KbAnim::trigger().

```
430                                     {
431     if(!initialized || stopped)
432         return;
433     // Start the animation if it's not running yet
434     if(!process)
435         begin(timestamp);
436
437     advance(timestamp);
438     if((readFrame || !firstFrame) && process)
439         // Don't ask for a new frame if the animation hasn't delivered the last one yet
440         process->write("frame\n");
441     firstFrame = true;
442     readFrame = false;
443 }
```

Here is the call graph for this function:

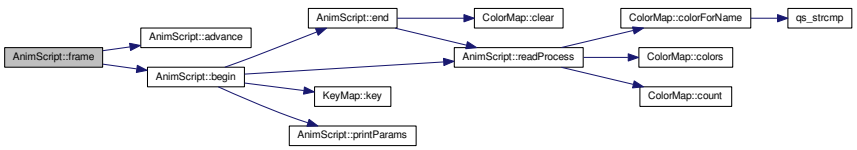

Here is the caller graph for this function:

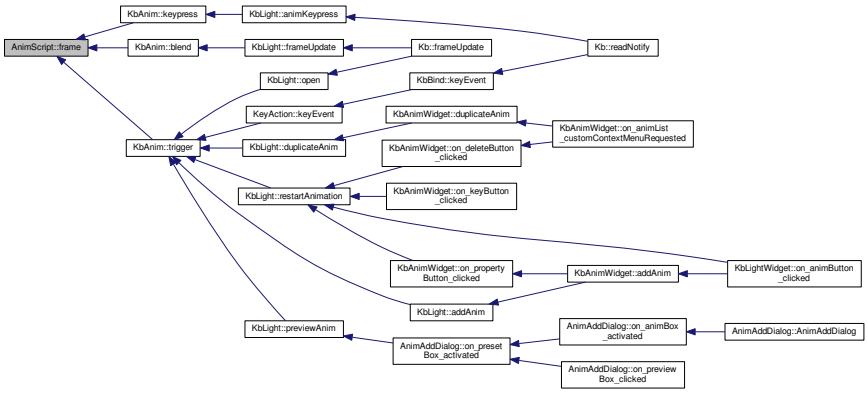

12.3.5.11 const QUuid& AnimScript::guid ( ) const [inline]

Definition at line 59 of file animscript.h.

References _info.

Referenced by KbAnim::KbAnim(), list(), and scan().

```
59 { return _info.guid; }
```

Here is the caller graph for this function:

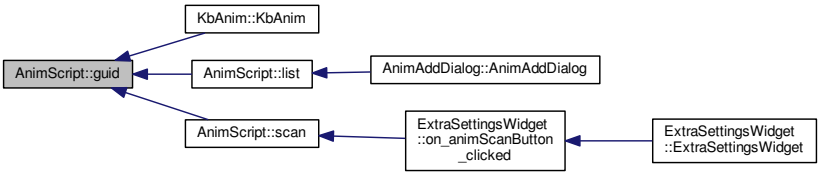

12.3.5.12 bool AnimScript::hasFrame ( ) const [inline]

Definition at line 96 of file animscript.h.

References initialized, and readAnyFrame.

Referenced by KbAnim::isRunning().

```
96 { return initialized && readAnyFrame; }
```

Here is the caller graph for this function:



12.3.5.13 bool AnimScript::hasKeypress ( ) const [inline]

Definition at line 67 of file animscript.h.

References _info, and KP_NONE.

Referenced by AnimSettingDialog::AnimSettingDialog(), and AnimSettingDialog::updateParam().

```
67 { return _info.kpMode != KP_NONE; }
```

Here is the caller graph for this function:

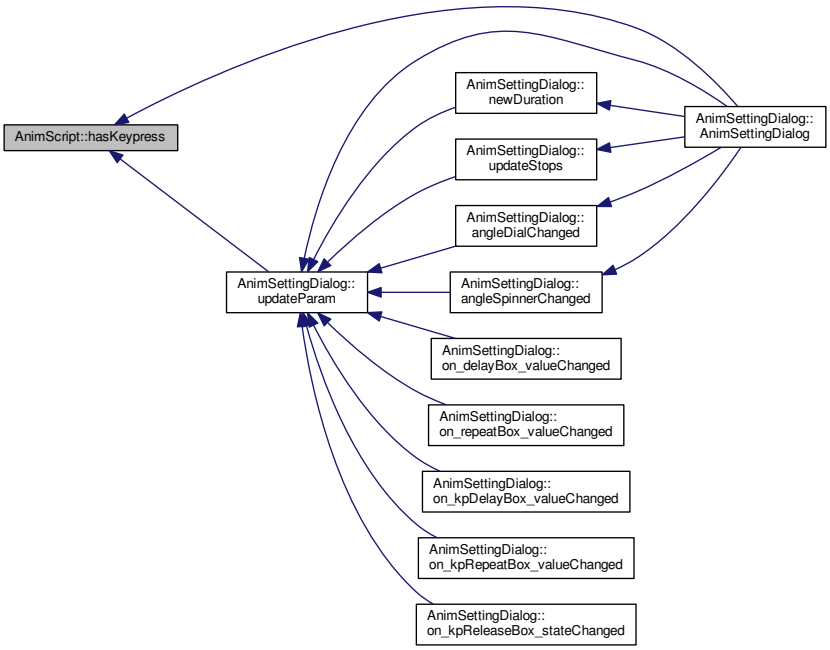

12.3.5.14 bool AnimScript::hasParam (const QString & *name*) const [inline]

Definition at line 74 of file animscript.h.

References _info, and name().

Referenced by AnimSettingDialog::AnimSettingDialog(), load(), and KbAnim::parameter().

```
74 { QListIterator<Param> i(_info.params); while(i.hasNext()){ if(i.next().name ==
     name) return true; } return false; }
```

Here is the call graph for this function:



Here is the caller graph for this function:



12.3.5.15 void AnimScript::init (const KeyMap & *map,* const QStringList & *keys,* const QMap< QString, QVariant > & *paramValues*)

Definition at line 239 of file animscript.cpp.

References _colorBuffer, _colors, _keys, _map, _paramValues, _path, end(), firstFrame, ColorMap::init(), initialized, setDuration(), and stopped.

Referenced by KbAnim::reInit().

```
239
    {
240     if(_path == "")
241         return;
242     end();
243     _map = map;
244     _colors.init(map);
245     _colorBuffer.init(map);
246     _keys = keys;
247     _paramValues = paramValues;
248     setDuration();
249     stopped = firstFrame = false;
250     initialized = true;
251 }
```

Here is the call graph for this function:

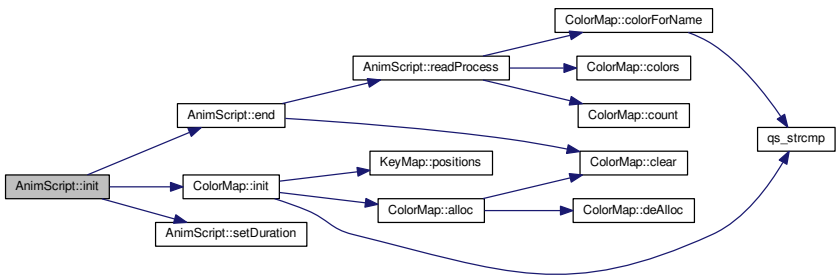

Here is the caller graph for this function:

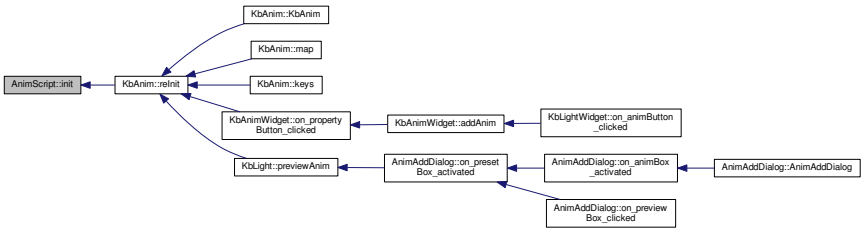

12.3.5.16 void AnimScript::keypress (const QString & *key,* bool *pressed,* quint64 *timestamp*)

Definition at line 354 of file animscript.cpp.

References _info, _map, _paramValues, advance(), begin(), initialized, KeyMap::key(), KP_NAME, KP_NONE, KP-_POSITION, minX, minY, process, retrigger(), stop(), Key::x, and Key::y.

Referenced by KbAnim::catchUp(), and KbAnim::keypress().

```
354                                                                    {
355     if(!initialized)
356         return;
357     if(!process)
358         begin(timestamp);
359     int kpMode = _info.kpMode;
360     if(_paramValues.value("kpmode", 0).toInt() != 0)
361         // Disable KP mode according to user preferences
362         kpMode = KP_NONE;
363     switch(kpMode){
364     case KP_NONE:
365         // If KPs aren't allowed, call retrigger/stop instead
366         if(pressed)
367             retrigger(timestamp);
368         else if(_paramValues.value("kprelease", false).toBool())
369             stop(timestamp);
370         break;
371     case KP_NAME:
372         // Print keypress by name
373         advance(timestamp);
374         process->write(("key " + key + (pressed ? " down\n" : " up\n")).toLatin1());
375         break;
376     case KP_POSITION:
377         // Print keypress by position
378         const Key& kp = _map.key(key);
379         if(!kp)
380             return;
381         advance(timestamp);
382         process->write(("key " + QString("%1,%2").arg(kp.x - minX).arg(kp.
      y - minY) + (pressed ? " down\n" : " up\n")).toLatin1());
383         break;
384     }
385 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

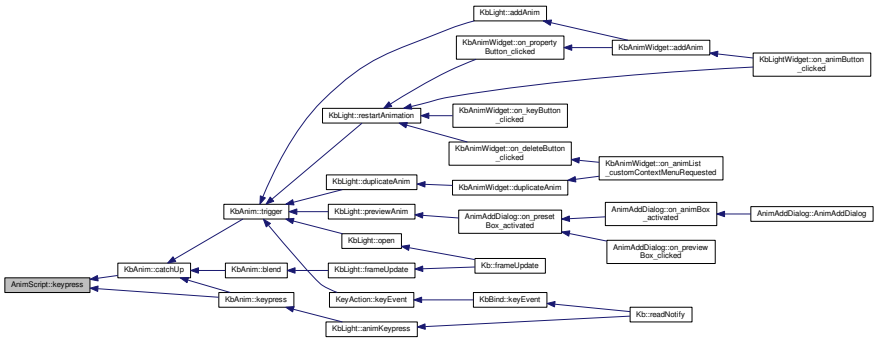

12.3.5.17 const QString& AnimScript::license ( ) const [inline]

Definition at line 65 of file animscript.h.

References _info.

Referenced by AnimSettingDialog::AnimSettingDialog().

```
65 { return _info.license; }
```

Here is the caller graph for this function:



12.3.5.18 QList< const AnimScript * > AnimScript::list ( ) [static]

Definition at line 51 of file animscript.cpp.

References _info, guid(), name(), and scripts.

Referenced by AnimAddDialog::AnimAddDialog().

```
51                                      {
52     // Gather the animations into an alphabetically-sorted list
53     QMap<QString, const AnimScript*> result;
54     foreach(AnimScript* script, scripts.values()){
55         QString name = script->name();
56         if(result.contains(name)){
57             // If duplicate names exist, make them unique by including their GUIDs
58             AnimScript* last = (AnimScript*)result[name];
59             last->_info.name += " " + last->guid().toString().toUpper();
60             script->_info.name += " " + script->guid().toString().toUpper();
61         }
62         result[script->name()] = script;
63     }
64     return result.values();
65 }
```

Here is the call graph for this function:

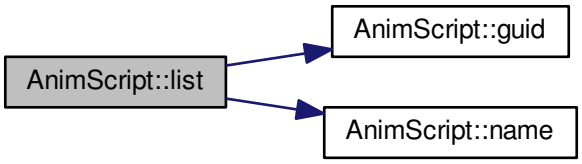

Here is the caller graph for this function:

12.3.5.19 bool AnimScript::load ( ) [private]

Definition at line 77 of file animscript.cpp.

References _info, _path, _presets, _presetValues, AnimScript::Param::AGRADIENT, AnimScript::Param::ANGLE, AnimScript::Param::ARGB, AnimScript::Param::BOOL, count(), AnimScript::Param::defaultValue, AnimScript::Param::DOUBLE, AnimScript::Param::GRADIENT, hasParam(), AnimScript::Param::INVALID, KP_NAME, KP_NONE, KP_POSITION, AnimScript::Param::LABEL, AnimScript::Param::LONG, name(), ONE_DAY, param(), preset(), AnimScript::Param::RGB, stop(), AnimScript::Param::STRING, and urlParam().

Referenced by scan().

```
77                      {
78     // Run the process to get script info
79     QProcess infoProcess;
80     infoProcess.start(_path, QStringList("--ckb-info"));
81     qDebug() << "Scanning " << _path;
82     infoProcess.waitForFinished(1000);
83     if(infoProcess.state() == QProcess::Running){
84         // Kill the process if it takes more than 1s
85         infoProcess.kill();
86         return false;
87     }
88     // Set defaults for performance info
89     _info.kpMode = KP_NONE;
90     _info.absoluteTime = _info.preempt = _info.liveParams = false;
91     _info.repeat = true;
92     // Read output
93     QString line;
94     while((line = infoProcess.readLine()) != ""){
95         line = line.trimmed();
96         QStringList components = line.split(" ");
97         int count = components.count();
98         if(count < 2)
99             continue;
100         QString param = components[0].trimmed();
101         if(param == "guid")
102             _info.guid = QUuid(urlParam(components[1]));
```

```
103         else if(param == "name")
104             _info.name = urlParam(components[1]);
105         else if(param == "version")
106             _info.version = urlParam(components[1]);
107         else if(param == "year")
108             _info.year = urlParam(components[1]);
109         else if(param == "author")
110             _info.author = urlParam(components[1]);
111         else if(param == "license")
112             _info.license = urlParam(components[1]);
113         else if(param == "description")
114             _info.description = urlParam(components[1]);
115         else if(param == "kpmode")
116             _info.kpMode = (components[1] == "position") ? KP_POSITION : (components[1] ==
    "name") ? KP_NAME : KP_NONE;
117         else if(param == "time")
118             _info.absoluteTime = (components[1] == "absolute");
119         else if(param == "repeat")
120             _info.repeat = (components[1] == "on");
121         else if(param == "preempt")
122             _info.preempt = (components[1] == "on");
123         else if(param == "parammode")
124             _info.liveParams = (components[1] == "live");
125         else if(param == "param"){
126             // Read parameter
127             if(count < 3)
128                 continue;
129             while(components.count() < 8)
130                 components.append("");
131             Param::Type type = Param::INVALID;
132             QString sType = components[1].toLower();
133             if(sType == "long")
134                 type = Param::LONG;
135             else if(sType == "double")
136                 type = Param::DOUBLE;
137             else if(sType == "bool")
138                 type = Param::BOOL;
139             else if(sType == "rgb")
140                 type = Param::RGB;
141             else if(sType == "argb")
142                 type = Param::ARGB;
143             else if(sType == "gradient")
144                 type = Param::GRADIENT;
145             else if(sType == "agradient")
146                 type = Param::AGRADIENT;
147             else if(sType == "angle")
148                 type = Param::ANGLE;
149             else if(sType == "string")
150                 type = Param::STRING;
151             else if(sType == "label")
152                 type = Param::LABEL;
153             else
154                 continue;
155             // "param <type> <name> <prefix> <postfix> <default>"
156             QString name = components[2].toLower();
157             // Make sure it's not present already
158             if(hasParam(name))
159                 continue;
160             QString prefix = urlParam(components[3]), postfix = urlParam(components[4]);
161             QVariant def = urlParam(components[5]), minimum = urlParam(components[6]),
    maximum = urlParam(components[7]);
162             // Don't allow predefined params
163             if(name == "trigger" || name == "kptrigger" || name == "kpmode" || name == "duration" || name
    == "delay" || name == "kpdelay" || name == "repeat" || name == "kprepeat" || name == "stop" || name == "
    kpstop" || name == "kpmodestop" || name == "kprelease")
164                 continue;
165             Param param = { type, name, prefix, postfix, def, minimum, maximum };
166             _info.params.append(param);
167         } else if(param == "preset"){
168             // Add preset
169             QString name = urlParam(components.at(1));
170             QMap<QString, QVariant> preset;
171             for(int i = 2; i < count; i++){
172                 // Scan name/value setting pairs
173                 QString setting = components.at(i);
174                 QStringList sComponents = setting.split("=");
175                 if(sComponents.count() != 2)
176                     continue;
177                 QString param = sComponents.first().trimmed();
178                 QString value = urlParam(sComponents.last());
179                 preset[param] = value;
180             }
181             // If the preset contains a duration, set the repeat time to the same value
182             if(preset.contains("duration")){
183                 QVariant duration = preset.value("duration");
184                 preset["repeat"] = duration;
185                 preset["kprepeat"] = duration;
```

```
186             }
187             _presets.append(name);
188             _presetValues.append(preset);
189         }
190     }
191     // Make sure the required parameters are filled out
192     if(_info.guid.isNull() || _info.name == "" || _info.version == "" ||
    _info.year == "" || _info.author == "" || _info.license == "")
193         return false;
194     // Add timing parameters
195     double defaultDuration = -1.;
196     if(!_info.absoluteTime){
197         defaultDuration = 1.;
198         Param duration = { Param::DOUBLE, "duration", "", "", defaultDuration, 0.1,
    ONE_DAY };
199         _info.params.append(duration);
200     }
201     Param trigger = { Param::BOOL, "trigger", "", "", true, 0, 0 };
202     _info.params.append(trigger);
203     Param kptrigger = { Param::BOOL, "kptrigger", "", "", false, 0, 0 };
204     _info.params.append(kptrigger);
205     if(_info.absoluteTime || !_info.repeat)
206         _info.preempt = false;
207     Param kpmode = { Param::LONG, "kpmode", "", "", 1, 0, 0 };
208     if(_info.kpMode)
209         kpmode.defaultValue = 0;
210     _info.params.append(kpmode);
211     Param delay = { Param::DOUBLE, "delay", "", "", 0., 0., ONE_DAY };
212     Param kpdelay = { Param::DOUBLE, "kpdelay", "", "", 0., 0.,
    ONE_DAY };
213     _info.params.append(delay);
214     _info.params.append(kpdelay);
215     Param kpmodestop = { Param::BOOL, "kpmodestop", "", "", false, 0, 0 };
216     Param kprelease = { Param::BOOL, "kprelease", "", "", false, 0, 0 };
217     _info.params.append(kpmodestop);
218     _info.params.append(kprelease);
219     if(_info.repeat){
220         Param repeat = { Param::DOUBLE, "repeat", "", "", defaultDuration, 0.1,
    ONE_DAY };
221         Param kprepeat = { Param::DOUBLE, "kprepeat", "", "", defaultDuration, 0.1,
    ONE_DAY };
222         // When repeats are enabled, stop and kpstop are LONG values (number of repeats)
223         Param stop = { Param::LONG, "stop", "", "", -1, 0, 1000 };
224         Param kpstop = { Param::LONG, "kpstop", "", "", 0, 0, 1000 };
225         _info.params.append(repeat);
226         _info.params.append(kprepeat);
227         _info.params.append(stop);
228         _info.params.append(kpstop);
229     } else {
230         // When repeats are disabled, stop and kpstop are DOUBLE values (seconds)
231         Param stop = { Param::DOUBLE, "stop", "", "", -1., 0.1,
    ONE_DAY };
232         Param kpstop = { Param::DOUBLE, "kpstop", "", "", -1., 0.1,
    ONE_DAY };
233         _info.params.append(stop);
234         _info.params.append(kpstop);
235     }
236     return true;
237 }
```

Here is the call graph for this function:

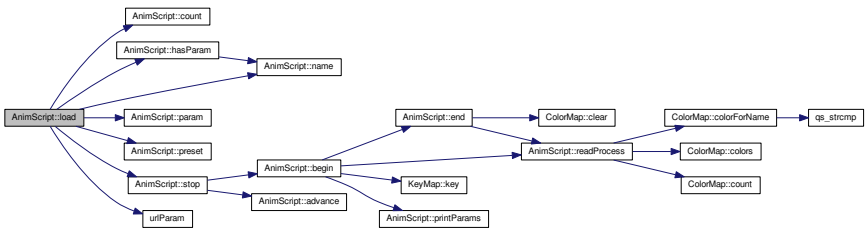

Here is the caller graph for this function:



12.3.5.20 const QString& AnimScript::name ( ) const [inline]

Definition at line 60 of file animscript.h.

References _info.

Referenced by AnimAddDialog::AnimAddDialog(), AnimSettingDialog::AnimSettingDialog(), hasParam(), KbAnim::-KbAnim(), list(), load(), and KbAnimWidget::setCurrent().

```
60 { return _info.name; }
```

Here is the caller graph for this function:

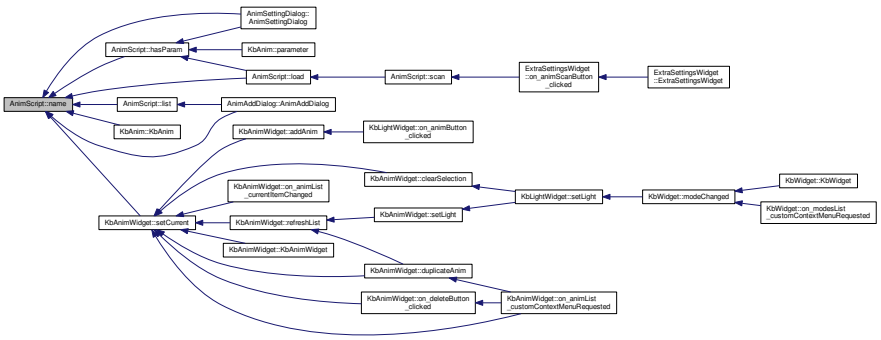

12.3.5.21 Param AnimScript::param (const QString & *name*) const [inline]

Definition at line 73 of file animscript.h.

References _info, AnimScript::Param::INVALID, and AnimScript::Param::name.

Referenced by KbAnim::KbAnim(), load(), and AnimSettingDialog::updateParam().

```
73 { QListIterator<Param> i(_info.params); while(i.hasNext()){ Param p = i.next(); if(p.name ==
     name) return p; } return ((Param[]){ { Param::INVALID, "", "", "", 0, 0, 0 } })[0]; }
```

Here is the caller graph for this function:

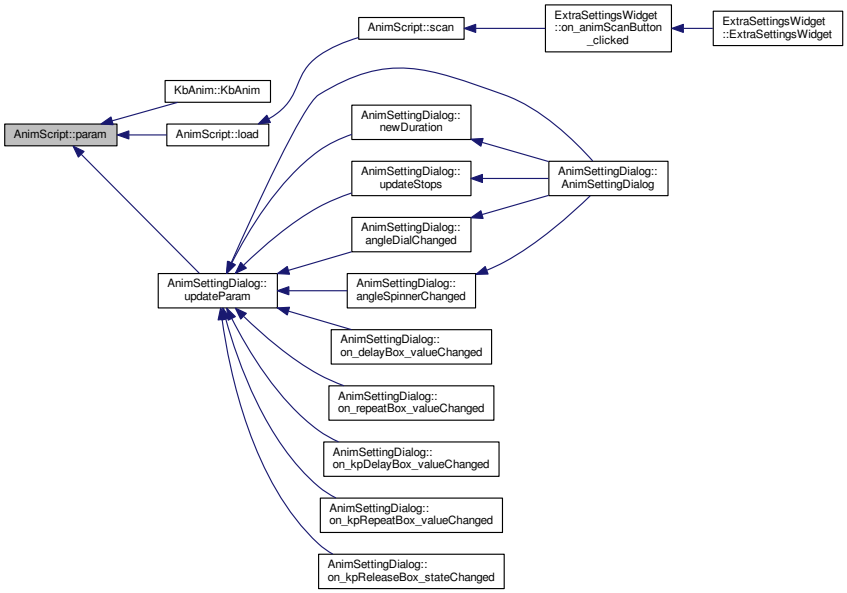

12.3.5.22 void AnimScript::parameters (const QMap< QString, QVariant > & *paramValues*)

Definition at line 265 of file animscript.cpp.

References _info, _paramValues, initialized, printParams(), process, and setDuration().

Referenced by KbAnim::updateParams().

```
265                                                                    {
266     if(!initialized || !process || !_info.liveParams)
267         return;
268     _paramValues = paramValues;
269     setDuration();
270     printParams();
271 }
```

Here is the call graph for this function:

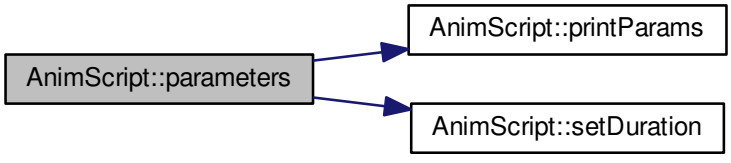

Here is the caller graph for this function:

12.3.5.23 QListIterator<Param> AnimScript::paramIterator ( ) const [inline]

Definition at line 72 of file animscript.h.

References _info.

Referenced by AnimSettingDialog::AnimSettingDialog(), and KbAnim::KbAnim().

```
72 { return _info.params; }
```

Here is the caller graph for this function:

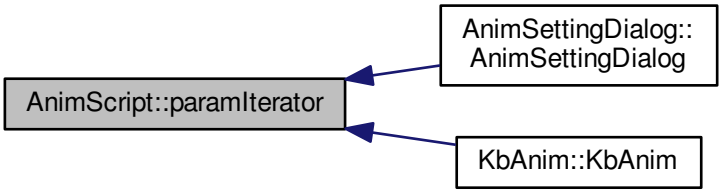

12.3.5.24 QString AnimScript::path ( ) [static]

Definition at line 29 of file animscript.cpp.

Referenced by ExtraSettingsWidget::ExtraSettingsWidget(), and scan().

```
29                       {
30 #ifdef __APPLE__
31     return QDir(QApplication::applicationDirPath() + "/../Resources").absoluteFilePath("ckb-animations");
32 #else
33     return QDir("/usr/lib").absoluteFilePath("ckb-animations");
34 #endif
35 }
```

Here is the caller graph for this function:



12.3.5.25 const PresetValue& AnimScript::preset (int *index*) const [inline]

Definition at line 69 of file animscript.h.

References _presetValues.

Referenced by load(), and KbLightWidget::on_animButton_clicked().

```
69 { return _presetValues[index]; }
```

Here is the caller graph for this function:



12.3.5.26 const QStringList& AnimScript::presets ( ) const [inline]

Definition at line 68 of file animscript.h.

References _presets.

Referenced by KbLightWidget::on_animButton_clicked().

```
68 { return _presets; }
```

Here is the caller graph for this function:



12.3.5.27 void AnimScript::printParams ( ) [private]

Definition at line 273 of file animscript.cpp.

References _paramValues, and process.

Referenced by begin(), and parameters().

```
273                             {
274     process->write("begin params\n");
275     QMapIterator<QString, QVariant> i(_paramValues);
276     while(i.hasNext()){
277         i.next();
278         process->write("param ");
279         process->write(i.key().toLatin1());
280         process->write(" ");
281         process->write(QUrl::toPercentEncoding(i.value().toString()));
282         process->write("\n");
283     }
284     process->write("end params\n");
285 }
```

Here is the caller graph for this function:

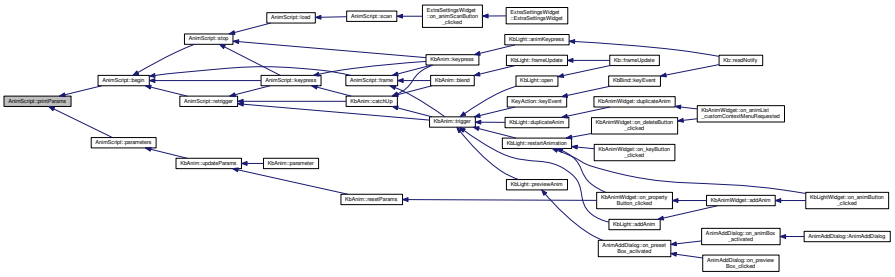

12.3.5.28 void AnimScript::readProcess ( ) [private], [slot]

Definition at line 397 of file animscript.cpp.

References _colorBuffer, _colors, ColorMap::colorForName(), ColorMap::colors(), ColorMap::count(), inFrame, process, readAnyFrame, readFrame, and stopped.

Referenced by begin(), and end().

```
397                             {
398     while(process->canReadLine()){
399         QByteArray line = process->readLine().trimmed();
400         if(!inFrame){
401             // Ignore anything not between "begin frame" and "end frame", except for "end run", which
      indicates that the program is done.
402             if(line == "begin frame")
403                 inFrame = true;
404             else if(line == "end run"){
405                 stopped = true;
406                 return;
407             }
408             continue;
409         }
410         if(line.startsWith("argb ")){
411             // Add a color to the buffer
412             char keyName[31];
413             QRgb keyColor = 0;
414             if(sscanf(line, "argb %30s %x", keyName, &keyColor) != 2)
415                 continue;
416             QRgb* inMap = _colorBuffer.colorForName(keyName);
417             if(!inMap)
418                 continue;
419             *inMap = keyColor;
420         }
421         if(line == "end frame"){
422             // Frame is finished. Copy color buffer back to the atomic map
423             memcpy(_colors.colors(), _colorBuffer.
      colors(), sizeof(QRgb) * _colors.count());
424             inFrame = false;
425             readFrame = readAnyFrame = true;
426         }
427     }
428 }
```

Here is the call graph for this function:

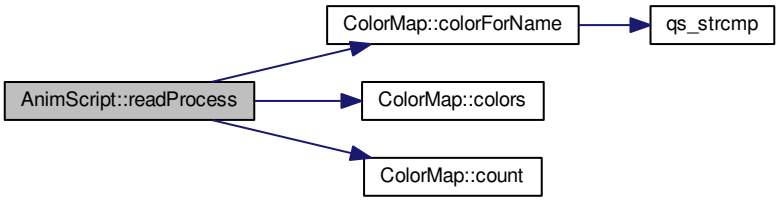

Here is the caller graph for this function:

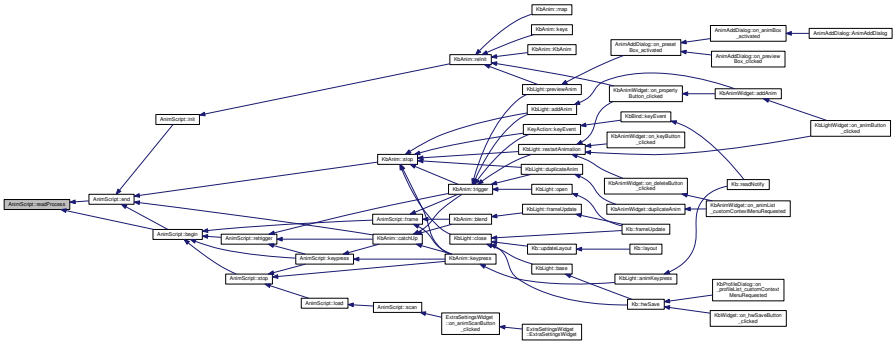

12.3.5.29 void AnimScript::retrigger (quint64 *timestamp,* bool *allowPreempt* = `false`)

Definition at line 331 of file animscript.cpp.

References _info, advance(), begin(), initialized, process, and repeatMsec.

Referenced by KbAnim::catchUp(), keypress(), and KbAnim::trigger().

```
331                                                         {
332     if(!initialized)
333         return;
334     if(allowPreempt && _info.preempt && repeatMsec > 0)
335         // If preemption is wanted, trigger the animation 1 duration in the past first
336         retrigger(timestamp - repeatMsec);
337     if(!process)
338         begin(timestamp);
339     advance(timestamp);
340     if(process)
341         process->write("start\n");
342 }
```

Here is the call graph for this function:

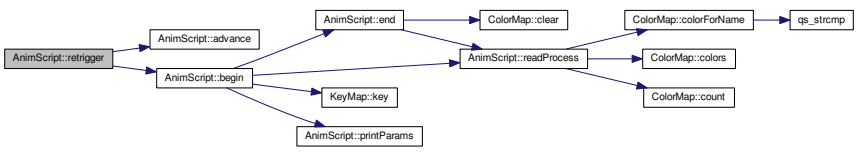

Here is the caller graph for this function:

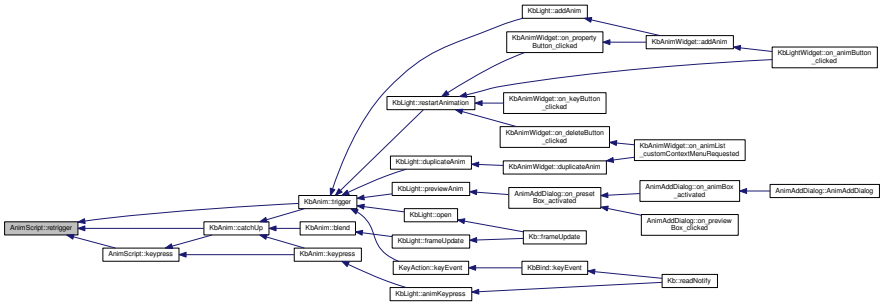

12.3.5.30 void AnimScript::scan ( ) [static]

Definition at line 37 of file animscript.cpp.

References _info, AnimScript(), guid(), load(), path(), and scripts.

Referenced by ExtraSettingsWidget::on_animScanButton_clicked().

```
37                     {
38     QDir dir(path());
39     foreach(AnimScript* script, scripts)
40         delete script;
41     scripts.clear();
42     foreach(QString file, dir.entryList(QDir::Files | QDir::Executable)){
43         AnimScript* script = new AnimScript(qApp, dir.absoluteFilePath(file));
44         if(script->load() && !scripts.contains(script->_info.
       guid))
45             scripts[script->_info.guid] = script;
46         else
47             delete script;
48     }
49 }
```

Here is the call graph for this function:

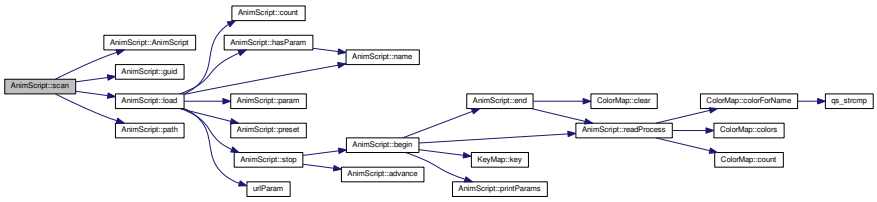

Here is the caller graph for this function:



12.3.5.31 void AnimScript::setDuration ( ) [private]

Definition at line 253 of file animscript.cpp.

References _info, _paramValues, durationMsec, and repeatMsec.

Referenced by init(), and parameters().

```
253                             {
254     if(_info.absoluteTime){
255         durationMsec = 1000;
256         repeatMsec = 0;
257     } else {
258         durationMsec = round(_paramValues.value("duration").toDouble() * 1000.);
259         if(durationMsec <= 0)
260             durationMsec = -1;
261         repeatMsec = round(_paramValues.value("repeat").toDouble() * 1000.);
262     }
263 }
```

Here is the caller graph for this function:

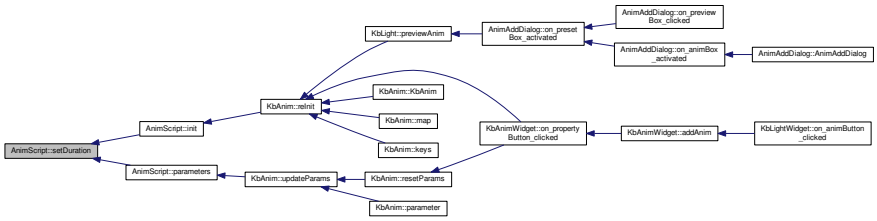

12.3.5.32 void AnimScript::stop (quint64 *timestamp*)

Definition at line 344 of file animscript.cpp.

References advance(), begin(), initialized, and process.

Referenced by KbAnim::keypress(), keypress(), and load().

```
344                                     {
345     if(!initialized)
346         return;
347     if(!process)
348         begin(timestamp);
349     advance(timestamp);
350     if(process)
351         process->write("stop\n");
352 }
```

Here is the call graph for this function:

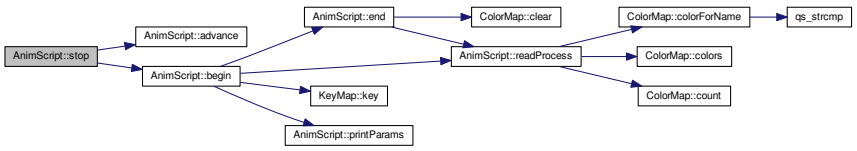

Here is the caller graph for this function:

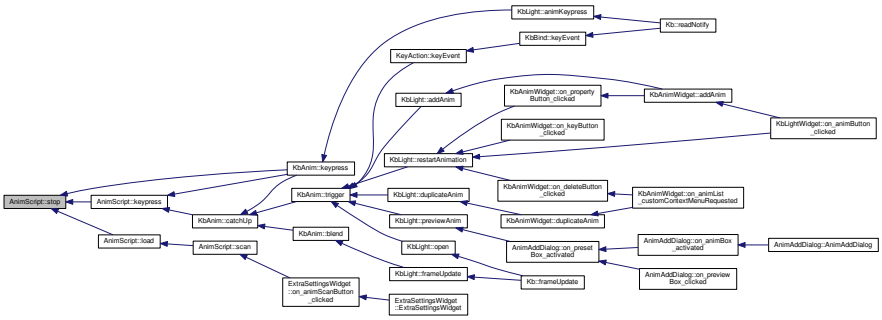

12.3.5.33 const QString& AnimScript::version ( ) const [inline]

Definition at line 61 of file animscript.h.

References _info.

Referenced by AnimSettingDialog::AnimSettingDialog(), and KbAnimWidget::setCurrent().

```
61 { return _info.version; }
```

Here is the caller graph for this function:

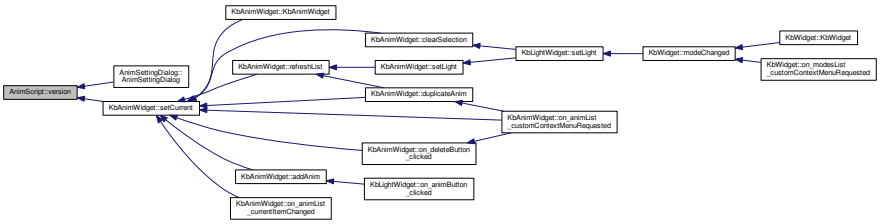

12.3.5.34 const QString& AnimScript::year ( ) const [inline]

Definition at line 63 of file animscript.h.

References _info.

Referenced by AnimSettingDialog::AnimSettingDialog().

```
63 { return _info.year; }
```

Here is the caller graph for this function:



12.3.6 Field Documentation

12.3.6.1 ColorMap AnimScript::_colorBuffer [private]

Definition at line 143 of file animscript.h.

Referenced by init(), and readProcess().

12.3.6.2 ColorMap AnimScript::_colors [private]

Definition at line 135 of file animscript.h.

Referenced by colors(), end(), init(), and readProcess().

12.3.6.3 struct { ... } AnimScript::_info [private]

Referenced by advance(), author(), copyright(), description(), guid(), hasKeypress(), hasParam(), keypress(), license(), list(), load(), name(), param(), parameters(), paramIterator(), retrigger(), scan(), setDuration(), version(), and year().

12.3.6.4 QStringList AnimScript::_keys [private]

Definition at line 133 of file animscript.h.

Referenced by begin(), and init().

12.3.6.5 KeyMap AnimScript::_map [private]

Definition at line 130 of file animscript.h.

Referenced by begin(), init(), and keypress().

12.3.6.6 PresetValue AnimScript::_paramValues [private]

Definition at line 136 of file animscript.h.

Referenced by init(), keypress(), parameters(), printParams(), and setDuration().

12.3.6.7 QString AnimScript::_path [private]

Definition at line 128 of file animscript.h.

Referenced by begin(), init(), and load().

12.3.6.8 QStringList AnimScript::_presets [private]

Definition at line 125 of file animscript.h.

Referenced by load(), and presets().

12.3.6.9 QList<PresetValue> AnimScript::_presetValues [private]

Definition at line 126 of file animscript.h.

Referenced by load(), and preset().

12.3.6.10 int AnimScript::durationMsec [private]

Definition at line 140 of file animscript.h.

Referenced by advance(), and setDuration().

12.3.6.11 bool AnimScript::firstFrame [private]

Definition at line 141 of file animscript.h.

Referenced by begin(), frame(), and init().

12.3.6.12 bool AnimScript::inFrame [private]

Definition at line 141 of file animscript.h.

Referenced by begin(), and readProcess().

12.3.6.13 bool AnimScript::initialized [private]

Definition at line 141 of file animscript.h.

Referenced by begin(), frame(), hasFrame(), init(), keypress(), parameters(), retrigger(), and stop().

12.3.6.14 const int AnimScript::KP_NAME = 1 [static], [private]

Definition at line 124 of file animscript.h.

Referenced by keypress(), and load().

12.3.6.15 const int AnimScript::KP_NONE = 0 [static], [private]

Definition at line 124 of file animscript.h.

Referenced by hasKeypress(), keypress(), and load().

12.3.6.16 const int AnimScript::KP_POSITION = 2 [static], [private]

Definition at line 124 of file animscript.h.

Referenced by keypress(), and load().

12.3.6.17 quint64 AnimScript::lastFrame [private]

Definition at line 139 of file animscript.h.

Referenced by advance(), and begin().

12.3.6.18 int AnimScript::minX [private]

Definition at line 131 of file animscript.h.

Referenced by begin(), and keypress().

12.3.6.19 int AnimScript::minY [private]

Definition at line 131 of file animscript.h.

Referenced by begin(), and keypress().

12.3.6.20 QProcess* AnimScript::process [private]

Definition at line 142 of file animscript.h.

Referenced by advance(), begin(), end(), frame(), keypress(), parameters(), printParams(), readProcess(), retrigger(), stop(), and ~AnimScript().

12.3.6.21 bool AnimScript::readAnyFrame [private]

Definition at line 141 of file animscript.h.

Referenced by begin(), hasFrame(), and readProcess().

12.3.6.22 bool AnimScript::readFrame [private]

Definition at line 141 of file animscript.h.

Referenced by begin(), frame(), and readProcess().

12.3.6.23 int AnimScript::repeatMsec [private]

Definition at line 140 of file animscript.h.

Referenced by retrigger(), and setDuration().

12.3.6.24 QHash< QUuid, AnimScript * > AnimScript::scripts [static], [private]

Definition at line 152 of file animscript.h.

Referenced by copy(), count(), list(), and scan().

12.3.6.25 bool AnimScript::stopped [private]

Definition at line 141 of file animscript.h.

Referenced by begin(), frame(), init(), and readProcess().

The documentation for this class was generated from the following files:

- src/ckb/animscript.h

- src/ckb/animscript.cpp

12.4 Ui::AnimSettingDialog Class Reference

`#include <src/ckb/ui_animsettingdialog.h>`

Inheritance diagram for Ui::AnimSettingDialog:

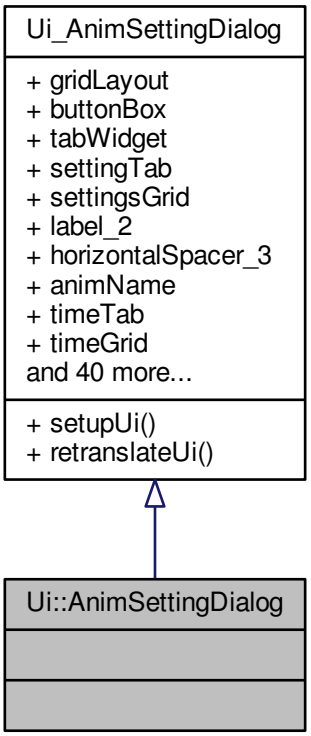

Collaboration diagram for Ui::AnimSettingDialog:

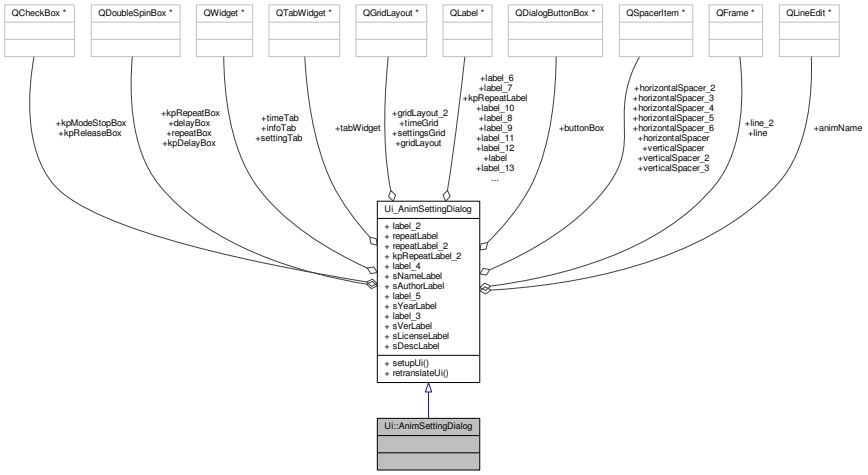

Public Member Functions

- void setupUi (QDialog *AnimSettingDialog)
- void retranslateUi (QDialog *AnimSettingDialog)

Data Fields

- QGridLayout * gridLayout
- QDialogButtonBox * buttonBox
- QTabWidget * tabWidget
- QWidget * settingTab
- QGridLayout * settingsGrid
- QLabel * label_2
- QSpacerItem * horizontalSpacer_3
- QLineEdit * animName
- QWidget * timeTab
- QGridLayout * timeGrid
- QSpacerItem * horizontalSpacer_5
- QLabel * kpRepeatLabel
- QLabel * repeatLabel
- QDoubleSpinBox * repeatBox
- QLabel * repeatLabel_2
- QFrame * line
- QLabel * kpRepeatLabel_2
- QLabel * label_4
- QLabel * label_8
- QDoubleSpinBox * kpDelayBox
- QLabel * label_13
- QLabel * label_12
- QDoubleSpinBox * delayBox
- QCheckBox * kpModeStopBox
- QLabel * label_10
- QSpacerItem * verticalSpacer_3
- QSpacerItem * horizontalSpacer_4

- QCheckBox * kpReleaseBox
- QLabel * label_6
- QDoubleSpinBox * kpRepeatBox
- QSpacerItem * verticalSpacer_2
- QFrame * line_2
- QSpacerItem * horizontalSpacer_6
- QWidget * infoTab
- QGridLayout * gridLayout_2
- QLabel * sNameLabel
- QLabel * label_7
- QLabel * label_11
- QLabel * sAuthorLabel
- QLabel * label_9
- QLabel * label_5
- QLabel * sYearLabel
- QLabel * label_3
- QSpacerItem * horizontalSpacer
- QSpacerItem * horizontalSpacer_2
- QLabel * sVerLabel
- QLabel * sLicenseLabel
- QLabel * label
- QSpacerItem * verticalSpacer
- QLabel * sDescLabel

12.4.1 Detailed Description

Definition at line 385 of file ui_animsettingdialog.h.

12.4.2 Member Function Documentation

12.4.2.1 void Ui_AnimSettingDialog::retranslateUi (QDialog * *AnimSettingDialog*) [inline], [inherited]

Definition at line 349 of file ui_animsettingdialog.h.

References Ui_AnimSettingDialog::infoTab, Ui_AnimSettingDialog::kpModeStopBox, Ui_AnimSettingDialog::kpReleaseBox, Ui_AnimSettingDialog::kpRepeatLabel, Ui_AnimSettingDialog::kpRepeatLabel_2, Ui_AnimSettingDialog::label, Ui_AnimSettingDialog::label_10, Ui_AnimSettingDialog::label_11, Ui_AnimSettingDialog::label_12, Ui_AnimSettingDialog::label_13, Ui_AnimSettingDialog::label_2, Ui_AnimSettingDialog::label_3, Ui_AnimSettingDialog::label_4, Ui_AnimSettingDialog::label_5, Ui_AnimSettingDialog::label_6, Ui_AnimSettingDialog::label_7, Ui_AnimSettingDialog::label_8, Ui_AnimSettingDialog::label_9, Ui_AnimSettingDialog::repeatLabel, Ui_AnimSettingDialog::repeatLabel_2, Ui_AnimSettingDialog::sAuthorLabel, Ui_AnimSettingDialog::sDescLabel, Ui_AnimSettingDialog::settingTab, Ui_AnimSettingDialog::sLicenseLabel, Ui_AnimSettingDialog::sNameLabel, Ui_AnimSettingDialog::sVerLabel, Ui_AnimSettingDialog::sYearLabel, Ui_AnimSettingDialog::tabWidget, and Ui_AnimSettingDialog::timeTab.

Referenced by Ui_AnimSettingDialog::setupUi().

```
350     {
351         AnimSettingDialog->setWindowTitle(QApplication::translate("AnimSettingDialog", "Dialog", Q_NULLPTR)
    );
352         label_2->setText(QApplication::translate("AnimSettingDialog", "Name:", Q_NULLPTR));
353         tabWidget->setTabText(tabWidget->indexOf(settingTab),
    QApplication::translate("AnimSettingDialog", "Settings", Q_NULLPTR));
354         kpRepeatLabel->setText(QApplication::translate("AnimSettingDialog", "Repeat every:",
    Q_NULLPTR));
355         repeatLabel->setText(QApplication::translate("AnimSettingDialog", "Repeat every:",
    Q_NULLPTR));
356         repeatLabel_2->setText(QApplication::translate("AnimSettingDialog", "seconds",
    Q_NULLPTR));
357         kpRepeatLabel_2->setText(QApplication::translate("AnimSettingDialog", "seconds",
```

```
    Q_NULLPTR));
358         label_4->setText(QApplication::translate("AnimSettingDialog", "<b>On mode start</b>",
    Q_NULLPTR));
359         label_8->setText(QApplication::translate("AnimSettingDialog", "seconds", Q_NULLPTR));
360         label_13->setText(QApplication::translate("AnimSettingDialog", "seconds", Q_NULLPTR));
361         label_12->setText(QApplication::translate("AnimSettingDialog", "Start delay:", Q_NULLPTR));
362         kpModeStopBox->setText(QApplication::translate("AnimSettingDialog", "Stop on key press
    ", Q_NULLPTR));
363         label_10->setText(QApplication::translate("AnimSettingDialog", "Start delay:", Q_NULLPTR));
364         kpReleaseBox->setText(QApplication::translate("AnimSettingDialog", "Stop on key release
    ", Q_NULLPTR));
365         label_6->setText(QApplication::translate("AnimSettingDialog", "<b>On key press</b>",
    Q_NULLPTR));
366         tabWidget->setTabText(tabWidget->indexOf(timeTab), QApplication::translate
    ("AnimSettingDialog", "Timing", Q_NULLPTR));
367         sNameLabel->setText(QApplication::translate("AnimSettingDialog", "Name", Q_NULLPTR));
368         label_7->setText(QApplication::translate("AnimSettingDialog", "Year:", Q_NULLPTR));
369         label_11->setText(QApplication::translate("AnimSettingDialog", "Description:", Q_NULLPTR));
370         sAuthorLabel->setText(QApplication::translate("AnimSettingDialog", "Author", Q_NULLPTR)
    );
371         label_9->setText(QApplication::translate("AnimSettingDialog", "License:", Q_NULLPTR));
372         label_5->setText(QApplication::translate("AnimSettingDialog", "Version:", Q_NULLPTR));
373         sYearLabel->setText(QApplication::translate("AnimSettingDialog", "Year", Q_NULLPTR));
374         label_3->setText(QApplication::translate("AnimSettingDialog", "Author:", Q_NULLPTR));
375         sVerLabel->setText(QApplication::translate("AnimSettingDialog", "Version", Q_NULLPTR));
376         sLicenseLabel->setText(QApplication::translate("AnimSettingDialog", "License",
    Q_NULLPTR));
377         label->setText(QApplication::translate("AnimSettingDialog", "Script name:", Q_NULLPTR));
378         sDescLabel->setText(QApplication::translate("AnimSettingDialog", "Description", Q_NULLPTR
    ));
379         tabWidget->setTabText(tabWidget->indexOf(infoTab), QApplication::translate
    ("AnimSettingDialog", "About", Q_NULLPTR));
380       } // retranslateUi
```

Here is the caller graph for this function:



12.4.2.2 void Ui_AnimSettingDialog::setupUi (QDialog * *AnimSettingDialog*) [inline], [inherited]

Definition at line 85 of file ui_animsettingdialog.h.

References Ui_AnimSettingDialog::animName, Ui_AnimSettingDialog::buttonBox, Ui_AnimSettingDialog::delayBox, Ui_AnimSettingDialog::gridLayout, Ui_AnimSettingDialog::gridLayout_2, Ui_AnimSettingDialog::horizontalSpacer, Ui_AnimSettingDialog::horizontalSpacer_2, Ui_AnimSettingDialog::horizontalSpacer_3, Ui_AnimSettingDialog::horizontalSpacer_4, Ui_AnimSettingDialog::horizontalSpacer_5, Ui_AnimSettingDialog::horizontalSpacer_6, Ui_AnimSettingDialog::infoTab, Ui_AnimSettingDialog::kpDelayBox, Ui_AnimSettingDialog::kpModeStopBox, Ui_AnimSettingDialog::kpReleaseBox, Ui_AnimSettingDialog::kpRepeatBox, Ui_AnimSettingDialog::kpRepeatLabel, Ui_AnimSettingDialog::kpRepeatLabel_2, Ui_AnimSettingDialog::label, Ui_AnimSettingDialog::label_10, Ui_AnimSettingDialog::label_11, Ui_AnimSettingDialog::label_12, Ui_AnimSettingDialog::label_13, Ui_AnimSettingDialog::label_2, Ui_AnimSettingDialog::label_3, Ui_AnimSettingDialog::label_4, Ui_AnimSettingDialog::label_5, Ui_AnimSettingDialog::label_6, Ui_AnimSettingDialog::label_7, Ui_AnimSettingDialog::label_8, Ui_AnimSettingDialog::label_9, Ui_AnimSettingDialog::line, Ui_AnimSettingDialog::line_2, Ui_AnimSettingDialog::repeatBox, Ui_AnimSettingDialog::repeatLabel, Ui_AnimSettingDialog::repeatLabel_2, Ui_AnimSettingDialog::retranslateUi(), Ui_AnimSettingDialog::sAuthorLabel, Ui_AnimSettingDialog::sDescLabel, Ui_AnimSettingDialog::settingsGrid, Ui_AnimSettingDialog::settingTab, Ui_AnimSettingDialog::sLicenseLabel, Ui_AnimSettingDialog::sNameLabel, Ui_AnimSettingDialog::sVerLabel, Ui_AnimSettingDialog::sYearLabel, Ui_AnimSettingDialog::tabWidget, Ui_AnimSettingDialog::timeGrid, Ui_AnimSettingDialog::timeTab, Ui_AnimSettingDialog::verticalSpacer, Ui_AnimSettingDialog::verticalSpacer_2, and Ui_AnimSettingDialog::verticalSpacer_3.

Referenced by AnimSettingDialog::AnimSettingDialog().

```
86      {
87          if (AnimSettingDialog->objectName().isEmpty())
88              AnimSettingDialog->setObjectName(QStringLiteral("AnimSettingDialog"));
89          AnimSettingDialog->resize(480, 457);
90          AnimSettingDialog->setMinimumSize(QSize(480, 0));
91          AnimSettingDialog->setFocusPolicy(Qt::ClickFocus);
92          gridLayout = new QGridLayout(AnimSettingDialog);
93          gridLayout->setObjectName(QStringLiteral("gridLayout"));
94          buttonBox = new QDialogButtonBox(AnimSettingDialog);
95          buttonBox->setObjectName(QStringLiteral("buttonBox"));
96          buttonBox->setOrientation(Qt::Horizontal);
97          buttonBox->setStandardButtons(QDialogButtonBox::Cancel|QDialogButtonBox::Ok);
98
99          gridLayout->addWidget(buttonBox, 2, 0, 1, 1);
100
101          tabWidget = new QTabWidget(AnimSettingDialog);
102          tabWidget->setObjectName(QStringLiteral("tabWidget"));
103          settingTab = new QWidget();
104          settingTab->setObjectName(QStringLiteral("settingTab"));
105          settingsGrid = new QGridLayout(settingTab);
106          settingsGrid->setSpacing(12);
107          settingsGrid->setObjectName(QStringLiteral("settingsGrid"));
108          settingsGrid->setContentsMargins(12, 12, 12, 12);
109          label_2 = new QLabel(settingTab);
110          label_2->setObjectName(QStringLiteral("label_2"));
111
112          settingsGrid->addWidget(label_2, 0, 1, 1, 1);
113
114          horizontalSpacer_3 = new QSpacerItem(5, 0, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
115
116          settingsGrid->addItem(horizontalSpacer_3, 0, 2, 1, 1);
117
118          animName = new QLineEdit(settingTab);
119          animName->setObjectName(QStringLiteral("animName"));
120
121          settingsGrid->addWidget(animName, 0, 3, 1, 3);
122
123          tabWidget->addTab(settingTab, QString());
124          timeTab = new QWidget();
125          timeTab->setObjectName(QStringLiteral("timeTab"));
126          timeGrid = new QGridLayout(timeTab);
127          timeGrid->setSpacing(12);
128          timeGrid->setObjectName(QStringLiteral("timeGrid"));
129          timeGrid->setContentsMargins(12, 12, 12, 12);
130          horizontalSpacer_5 = new QSpacerItem(15, 0, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
131
132          timeGrid->addItem(horizontalSpacer_5, 3, 2, 1, 1);
133
134          kpRepeatLabel = new QLabel(timeTab);
135          kpRepeatLabel->setObjectName(QStringLiteral("kpRepeatLabel"));
136
137          timeGrid->addWidget(kpRepeatLabel, 11, 1, 1, 1);
138
139          repeatLabel = new QLabel(timeTab);
140          repeatLabel->setObjectName(QStringLiteral("repeatLabel"));
141
142          timeGrid->addWidget(repeatLabel, 3, 1, 1, 1);
143
144          repeatBox = new QDoubleSpinBox(timeTab);
145          repeatBox->setObjectName(QStringLiteral("repeatBox"));
146          repeatBox->setDecimals(1);
147          repeatBox->setMinimum(0.1);
148          repeatBox->setMaximum(86400);
149
150          timeGrid->addWidget(repeatBox, 3, 3, 1, 1);
151
152          repeatLabel_2 = new QLabel(timeTab);
153          repeatLabel_2->setObjectName(QStringLiteral("repeatLabel_2"));
154
155          timeGrid->addWidget(repeatLabel_2, 3, 4, 1, 1);
156
157          line = new QFrame(timeTab);
158          line->setObjectName(QStringLiteral("line"));
159          line->setFrameShape(QFrame::HLine);
160          line->setFrameShadow(QFrame::Sunken);
161
162          timeGrid->addWidget(line, 1, 0, 1, 6);
163
164          kpRepeatLabel_2 = new QLabel(timeTab);
165          kpRepeatLabel_2->setObjectName(QStringLiteral("kpRepeatLabel_2"));
166
167          timeGrid->addWidget(kpRepeatLabel_2, 11, 4, 1, 1);
168
169          label_4 = new QLabel(timeTab);
170          label_4->setObjectName(QStringLiteral("label_4"));
```

```
171
172         timeGrid->addWidget(label_4, 0, 0, 1, 6);
173
174         label_8 = new QLabel(timeTab);
175         label_8->setObjectName(QStringLiteral("label_8"));
176
177         timeGrid->addWidget(label_8, 2, 4, 1, 1);
178
179         kpDelayBox = new QDoubleSpinBox(timeTab);
180         kpDelayBox->setObjectName(QStringLiteral("kpDelayBox"));
181         kpDelayBox->setDecimals(1);
182         kpDelayBox->setMaximum(86400);
183
184         timeGrid->addWidget(kpDelayBox, 10, 3, 1, 1);
185
186         label_13 = new QLabel(timeTab);
187         label_13->setObjectName(QStringLiteral("label_13"));
188
189         timeGrid->addWidget(label_13, 10, 4, 1, 1);
190
191         label_12 = new QLabel(timeTab);
192         label_12->setObjectName(QStringLiteral("label_12"));
193
194         timeGrid->addWidget(label_12, 10, 1, 1, 1);
195
196         delayBox = new QDoubleSpinBox(timeTab);
197         delayBox->setObjectName(QStringLiteral("delayBox"));
198         delayBox->setDecimals(1);
199         delayBox->setMaximum(86400);
200
201         timeGrid->addWidget(delayBox, 2, 3, 1, 1);
202
203         kpModeStopBox = new QCheckBox(timeTab);
204         kpModeStopBox->setObjectName(QStringLiteral("kpModeStopBox"));
205
206         timeGrid->addWidget(kpModeStopBox, 5, 1, 1, 3);
207
208         label_10 = new QLabel(timeTab);
209         label_10->setObjectName(QStringLiteral("label_10"));
210
211         timeGrid->addWidget(label_10, 2, 1, 1, 1);
212
213         verticalSpacer_3 = new QSpacerItem(0, 10, QSizePolicy::Minimum, QSizePolicy::Fixed)
    ;
214
215         timeGrid->addItem(verticalSpacer_3, 7, 1, 1, 1);
216
217         horizontalSpacer_4 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
218
219         timeGrid->addItem(horizontalSpacer_4, 2, 5, 1, 1);
220
221         kpReleaseBox = new QCheckBox(timeTab);
222         kpReleaseBox->setObjectName(QStringLiteral("kpReleaseBox"));
223
224         timeGrid->addWidget(kpReleaseBox, 14, 1, 1, 3);
225
226         label_6 = new QLabel(timeTab);
227         label_6->setObjectName(QStringLiteral("label_6"));
228
229         timeGrid->addWidget(label_6, 8, 0, 1, 6);
230
231         kpRepeatBox = new QDoubleSpinBox(timeTab);
232         kpRepeatBox->setObjectName(QStringLiteral("kpRepeatBox"));
233         kpRepeatBox->setDecimals(1);
234         kpRepeatBox->setMinimum(0.1);
235         kpRepeatBox->setMaximum(86400);
236
237         timeGrid->addWidget(kpRepeatBox, 11, 3, 1, 1);
238
239         verticalSpacer_2 = new QSpacerItem(20, 40, QSizePolicy::Minimum,
    QSizePolicy::Expanding);
240
241         timeGrid->addItem(verticalSpacer_2, 15, 1, 1, 1);
242
243         line_2 = new QFrame(timeTab);
244         line_2->setObjectName(QStringLiteral("line_2"));
245         line_2->setFrameShape(QFrame::HLine);
246         line_2->setFrameShadow(QFrame::Sunken);
247
248         timeGrid->addWidget(line_2, 9, 0, 1, 6);
249
250         horizontalSpacer_6 = new QSpacerItem(0, 0, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
251
252         timeGrid->addItem(horizontalSpacer_6, 12, 2, 1, 1);
253
```

```
254         tabWidget->addTab(timeTab, QString());
255         infoTab = new QWidget();
256         infoTab->setObjectName(QStringLiteral("infoTab"));
257         gridLayout_2 = new QGridLayout(infoTab);
258         gridLayout_2->setSpacing(12);
259         gridLayout_2->setObjectName(QStringLiteral("gridLayout_2"));
260         gridLayout_2->setContentsMargins(12, 12, 12, 12);
261         sNameLabel = new QLabel(infoTab);
262         sNameLabel->setObjectName(QStringLiteral("sNameLabel"));
263
264         gridLayout_2->addWidget(sNameLabel, 0, 2, 1, 1);
265
266         label_7 = new QLabel(infoTab);
267         label_7->setObjectName(QStringLiteral("label_7"));
268
269         gridLayout_2->addWidget(label_7, 3, 0, 1, 1);
270
271         label_11 = new QLabel(infoTab);
272         label_11->setObjectName(QStringLiteral("label_11"));
273
274         gridLayout_2->addWidget(label_11, 5, 0, 1, 1);
275
276         sAuthorLabel = new QLabel(infoTab);
277         sAuthorLabel->setObjectName(QStringLiteral("sAuthorLabel"));
278
279         gridLayout_2->addWidget(sAuthorLabel, 2, 2, 1, 1);
280
281         label_9 = new QLabel(infoTab);
282         label_9->setObjectName(QStringLiteral("label_9"));
283
284         gridLayout_2->addWidget(label_9, 4, 0, 1, 1);
285
286         label_5 = new QLabel(infoTab);
287         label_5->setObjectName(QStringLiteral("label_5"));
288
289         gridLayout_2->addWidget(label_5, 1, 0, 1, 1);
290
291         sYearLabel = new QLabel(infoTab);
292         sYearLabel->setObjectName(QStringLiteral("sYearLabel"));
293
294         gridLayout_2->addWidget(sYearLabel, 3, 2, 1, 1);
295
296         label_3 = new QLabel(infoTab);
297         label_3->setObjectName(QStringLiteral("label_3"));
298
299         gridLayout_2->addWidget(label_3, 2, 0, 1, 1);
300
301         horizontalSpacer = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
302
303         gridLayout_2->addItem(horizontalSpacer, 0, 3, 1, 1);
304
305         horizontalSpacer_2 = new QSpacerItem(20, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
306
307         gridLayout_2->addItem(horizontalSpacer_2, 0, 1, 1, 1);
308
309         sVerLabel = new QLabel(infoTab);
310         sVerLabel->setObjectName(QStringLiteral("sVerLabel"));
311
312         gridLayout_2->addWidget(sVerLabel, 1, 2, 1, 1);
313
314         sLicenseLabel = new QLabel(infoTab);
315         sLicenseLabel->setObjectName(QStringLiteral("sLicenseLabel"));
316
317         gridLayout_2->addWidget(sLicenseLabel, 4, 2, 1, 1);
318
319         label = new QLabel(infoTab);
320         label->setObjectName(QStringLiteral("label"));
321
322         gridLayout_2->addWidget(label, 0, 0, 1, 1);
323
324         verticalSpacer = new QSpacerItem(20, 40, QSizePolicy::Minimum, QSizePolicy::Expanding
    );
325
326         gridLayout_2->addItem(verticalSpacer, 6, 0, 1, 1);
327
328         sDescLabel = new QLabel(infoTab);
329         sDescLabel->setObjectName(QStringLiteral("sDescLabel"));
330         sDescLabel->setAlignment(Qt::AlignLeading|Qt::AlignLeft|Qt::AlignTop);
331
332         gridLayout_2->addWidget(sDescLabel, 5, 2, 2, 2);
333
334         tabWidget->addTab(infoTab, QString());
335
336         gridLayout->addWidget(tabWidget, 0, 0, 1, 1);
337
```

```
338
339         retranslateUi(AnimSettingDialog);
340         QObject::connect(buttonBox, SIGNAL(accepted()), AnimSettingDialog, SLOT(accept()));
341         QObject::connect(buttonBox, SIGNAL(rejected()), AnimSettingDialog, SLOT(reject()));
342
343         tabWidget->setCurrentIndex(0);
344
345
346         QMetaObject::connectSlotsByName(AnimSettingDialog);
347     } // setupUi
```

Here is the call graph for this function:

Here is the caller graph for this function:



12.4.3 Field Documentation

12.4.3.1 QLineEdit* Ui_AnimSettingDialog::animName [inherited]

Definition at line 41 of file ui_animsettingdialog.h.

Referenced by AnimSettingDialog::AnimSettingDialog(), AnimSettingDialog::name(), and Ui_AnimSettingDialog-::setupUi().

12.4.3.2 QDialogButtonBox* Ui_AnimSettingDialog::buttonBox [inherited]

Definition at line 35 of file ui_animsettingdialog.h.

Referenced by Ui_AnimSettingDialog::setupUi().

12.4.3.3 QDoubleSpinBox* Ui_AnimSettingDialog::delayBox [inherited]

Definition at line 56 of file ui_animsettingdialog.h.

Referenced by AnimSettingDialog::AnimSettingDialog(), and Ui_AnimSettingDialog::setupUi().

12.4.3.4 QGridLayout* Ui_AnimSettingDialog::gridLayout [inherited]

Definition at line 34 of file ui_animsettingdialog.h.

Referenced by Ui_AnimSettingDialog::setupUi().

12.4.3.5 QGridLayout* Ui_AnimSettingDialog::gridLayout_2 [inherited]

Definition at line 68 of file ui_animsettingdialog.h.

Referenced by Ui_AnimSettingDialog::setupUi().

12.4.3.6 QSpacerItem* Ui_AnimSettingDialog::horizontalSpacer [inherited]

Definition at line 77 of file ui_animsettingdialog.h.

Referenced by Ui_AnimSettingDialog::setupUi().

12.4.3.7 QSpacerItem* Ui_AnimSettingDialog::horizontalSpacer_2 [inherited]

Definition at line 78 of file ui_animsettingdialog.h.

Referenced by Ui_AnimSettingDialog::setupUi().

12.4.3.8 QSpacerItem* Ui_AnimSettingDialog::horizontalSpacer_3 [inherited]

Definition at line 40 of file ui_animsettingdialog.h.

Referenced by Ui_AnimSettingDialog::setupUi().

12.4.3.9 QSpacerItem* Ui_AnimSettingDialog::horizontalSpacer_4 [inherited]

Definition at line 60 of file ui_animsettingdialog.h.

Referenced by Ui_AnimSettingDialog::setupUi().

12.4.3.10 QSpacerItem* Ui_AnimSettingDialog::horizontalSpacer_5 [inherited]

Definition at line 44 of file ui_animsettingdialog.h.

Referenced by Ui_AnimSettingDialog::setupUi().

12.4.3.11 QSpacerItem* Ui_AnimSettingDialog::horizontalSpacer_6 [inherited]

Definition at line 66 of file ui_animsettingdialog.h.

Referenced by Ui_AnimSettingDialog::setupUi().

12.4.3.12 QWidget* Ui_AnimSettingDialog::infoTab [inherited]

Definition at line 67 of file ui_animsettingdialog.h.

Referenced by Ui_AnimSettingDialog::retranslateUi(), and Ui_AnimSettingDialog::setupUi().

12.4.3.13 QDoubleSpinBox* Ui_AnimSettingDialog::kpDelayBox [inherited]

Definition at line 53 of file ui_animsettingdialog.h.

Referenced by AnimSettingDialog::AnimSettingDialog(), and Ui_AnimSettingDialog::setupUi().

12.4.3.14 QCheckBox* Ui_AnimSettingDialog::kpModeStopBox [inherited]

Definition at line 57 of file ui_animsettingdialog.h.

Referenced by AnimSettingDialog::AnimSettingDialog(), Ui_AnimSettingDialog::retranslateUi(), and Ui_AnimSettingDialog::setupUi().

12.4.3.15 QCheckBox* Ui_AnimSettingDialog::kpReleaseBox [inherited]

Definition at line 61 of file ui_animsettingdialog.h.

Referenced by AnimSettingDialog::AnimSettingDialog(), Ui_AnimSettingDialog::retranslateUi(), and Ui_AnimSettingDialog::setupUi().

12.4.3.16 QDoubleSpinBox* Ui_AnimSettingDialog::kpRepeatBox [inherited]

Definition at line 63 of file ui_animsettingdialog.h.

Referenced by AnimSettingDialog::AnimSettingDialog(), and Ui_AnimSettingDialog::setupUi().

12.4.3.17 QLabel* Ui_AnimSettingDialog::kpRepeatLabel [inherited]

Definition at line 45 of file ui_animsettingdialog.h.

Referenced by AnimSettingDialog::AnimSettingDialog(), Ui_AnimSettingDialog::retranslateUi(), and Ui_AnimSettingDialog::setupUi().

12.4.3.18 QLabel* Ui_AnimSettingDialog::kpRepeatLabel_2 [inherited]

Definition at line 50 of file ui_animsettingdialog.h.

Referenced by AnimSettingDialog::AnimSettingDialog(), Ui_AnimSettingDialog::retranslateUi(), and Ui_AnimSettingDialog::setupUi().

12.4.3.19 QLabel* Ui_AnimSettingDialog::label [inherited]

Definition at line 81 of file ui_animsettingdialog.h.

Referenced by Ui_AnimSettingDialog::retranslateUi(), and Ui_AnimSettingDialog::setupUi().

12.4.3.20 QLabel* Ui_AnimSettingDialog::label_10 [inherited]

Definition at line 58 of file ui_animsettingdialog.h.

Referenced by Ui_AnimSettingDialog::retranslateUi(), and Ui_AnimSettingDialog::setupUi().

12.4.3.21 QLabel* Ui_AnimSettingDialog::label_11 [inherited]

Definition at line 71 of file ui_animsettingdialog.h.

Referenced by Ui_AnimSettingDialog::retranslateUi(), and Ui_AnimSettingDialog::setupUi().

12.4.3.22 QLabel* Ui_AnimSettingDialog::label_12 [inherited]

Definition at line 55 of file ui_animsettingdialog.h.

Referenced by Ui_AnimSettingDialog::retranslateUi(), and Ui_AnimSettingDialog::setupUi().

12.4.3.23 QLabel* Ui_AnimSettingDialog::label_13 [inherited]

Definition at line 54 of file ui_animsettingdialog.h.

Referenced by Ui_AnimSettingDialog::retranslateUi(), and Ui_AnimSettingDialog::setupUi().

12.4.3.24 QLabel* Ui_AnimSettingDialog::label_2 [inherited]

Definition at line 39 of file ui_animsettingdialog.h.

Referenced by Ui_AnimSettingDialog::retranslateUi(), and Ui_AnimSettingDialog::setupUi().

12.4.3.25 QLabel* Ui_AnimSettingDialog::label_3 [inherited]

Definition at line 76 of file ui_animsettingdialog.h.

Referenced by Ui_AnimSettingDialog::retranslateUi(), and Ui_AnimSettingDialog::setupUi().

12.4.3.26 QLabel* Ui_AnimSettingDialog::label_4 [inherited]

Definition at line 51 of file ui_animsettingdialog.h.

Referenced by Ui_AnimSettingDialog::retranslateUi(), and Ui_AnimSettingDialog::setupUi().

12.4.3.27 QLabel* Ui_AnimSettingDialog::label_5 [inherited]

Definition at line 74 of file ui_animsettingdialog.h.

Referenced by Ui_AnimSettingDialog::retranslateUi(), and Ui_AnimSettingDialog::setupUi().

12.4.3.28 QLabel* Ui_AnimSettingDialog::label_6 [inherited]

Definition at line 62 of file ui_animsettingdialog.h.

Referenced by Ui_AnimSettingDialog::retranslateUi(), and Ui_AnimSettingDialog::setupUi().

12.4.3.29 QLabel* Ui_AnimSettingDialog::label_7 [inherited]

Definition at line 70 of file ui_animsettingdialog.h.

Referenced by Ui_AnimSettingDialog::retranslateUi(), and Ui_AnimSettingDialog::setupUi().

12.4.3.30 QLabel* Ui_AnimSettingDialog::label_8 [inherited]

Definition at line 52 of file ui_animsettingdialog.h.

Referenced by Ui_AnimSettingDialog::retranslateUi(), and Ui_AnimSettingDialog::setupUi().

12.4.3.31 QLabel* Ui_AnimSettingDialog::label_9 [inherited]

Definition at line 73 of file ui_animsettingdialog.h.

Referenced by Ui_AnimSettingDialog::retranslateUi(), and Ui_AnimSettingDialog::setupUi().

12.4.3.32 QFrame* Ui_AnimSettingDialog::line [inherited]

Definition at line 49 of file ui_animsettingdialog.h.

Referenced by Ui_AnimSettingDialog::setupUi().

12.4.3.33 QFrame* Ui_AnimSettingDialog::line_2 [inherited]

Definition at line 65 of file ui_animsettingdialog.h.

Referenced by Ui_AnimSettingDialog::setupUi().

12.4.3.34 QDoubleSpinBox* Ui_AnimSettingDialog::repeatBox [inherited]

Definition at line 47 of file ui_animsettingdialog.h.

Referenced by AnimSettingDialog::AnimSettingDialog(), and Ui_AnimSettingDialog::setupUi().

12.4.3.35 QLabel* Ui_AnimSettingDialog::repeatLabel [inherited]

Definition at line 46 of file ui_animsettingdialog.h.

Referenced by AnimSettingDialog::AnimSettingDialog(), Ui_AnimSettingDialog::retranslateUi(), and Ui_AnimSettingDialog::setupUi().

12.4.3.36 QLabel* Ui_AnimSettingDialog::repeatLabel_2 [inherited]

Definition at line 48 of file ui_animsettingdialog.h.

Referenced by AnimSettingDialog::AnimSettingDialog(), Ui_AnimSettingDialog::retranslateUi(), and Ui_AnimSettingDialog::setupUi().

12.4.3.37 QLabel* Ui_AnimSettingDialog::sAuthorLabel [inherited]

Definition at line 72 of file ui_animsettingdialog.h.

Referenced by AnimSettingDialog::AnimSettingDialog(), Ui_AnimSettingDialog::retranslateUi(), and Ui_AnimSettingDialog::setupUi().

12.4.3.38 QLabel* Ui_AnimSettingDialog::sDescLabel [inherited]

Definition at line 83 of file ui_animsettingdialog.h.

Referenced by AnimSettingDialog::AnimSettingDialog(), Ui_AnimSettingDialog::retranslateUi(), and Ui_AnimSettingDialog::setupUi().

12.4.3.39 QGridLayout* Ui_AnimSettingDialog::settingsGrid [inherited]

Definition at line 38 of file ui_animsettingdialog.h.

Referenced by AnimSettingDialog::AnimSettingDialog(), and Ui_AnimSettingDialog::setupUi().

12.4.3.40 QWidget* Ui_AnimSettingDialog::settingTab [inherited]

Definition at line 37 of file ui_animsettingdialog.h.

Referenced by Ui_AnimSettingDialog::retranslateUi(), and Ui_AnimSettingDialog::setupUi().

12.4.3.41 QLabel* Ui_AnimSettingDialog::sLicenseLabel [inherited]

Definition at line 80 of file ui_animsettingdialog.h.

Referenced by AnimSettingDialog::AnimSettingDialog(), Ui_AnimSettingDialog::retranslateUi(), and Ui_AnimSettingDialog::setupUi().

12.4.3.42 QLabel* Ui_AnimSettingDialog::sNameLabel [inherited]

Definition at line 69 of file ui_animsettingdialog.h.

Referenced by AnimSettingDialog::AnimSettingDialog(), Ui_AnimSettingDialog::retranslateUi(), and Ui_AnimSettingDialog::setupUi().

12.4.3.43 QLabel* Ui_AnimSettingDialog::sVerLabel [inherited]

Definition at line 79 of file ui_animsettingdialog.h.

Referenced by AnimSettingDialog::AnimSettingDialog(), Ui_AnimSettingDialog::retranslateUi(), and Ui_AnimSettingDialog::setupUi().

12.4.3.44 QLabel* Ui_AnimSettingDialog::sYearLabel [inherited]

Definition at line 75 of file ui_animsettingdialog.h.

Referenced by AnimSettingDialog::AnimSettingDialog(), Ui_AnimSettingDialog::retranslateUi(), and Ui_AnimSettingDialog::setupUi().

12.4.3.45 QTabWidget* Ui_AnimSettingDialog::tabWidget [inherited]

Definition at line 36 of file ui_animsettingdialog.h.

Referenced by Ui_AnimSettingDialog::retranslateUi(), and Ui_AnimSettingDialog::setupUi().

12.4.3.46 QGridLayout* Ui_AnimSettingDialog::timeGrid [inherited]

Definition at line 43 of file ui_animsettingdialog.h.

Referenced by AnimSettingDialog::AnimSettingDialog(), and Ui_AnimSettingDialog::setupUi().

12.4.3.47 QWidget* Ui_AnimSettingDialog::timeTab [inherited]

Definition at line 42 of file ui_animsettingdialog.h.

Referenced by Ui_AnimSettingDialog::retranslateUi(), and Ui_AnimSettingDialog::setupUi().

12.4.3.48 QSpacerItem* Ui_AnimSettingDialog::verticalSpacer [inherited]

Definition at line 82 of file ui_animsettingdialog.h.

Referenced by Ui_AnimSettingDialog::setupUi().

12.4.3.49 QSpacerItem* Ui_AnimSettingDialog::verticalSpacer_2 [inherited]

Definition at line 64 of file ui_animsettingdialog.h.

Referenced by Ui_AnimSettingDialog::setupUi().

12.4.3.50 QSpacerItem* Ui_AnimSettingDialog::verticalSpacer_3 [inherited]

Definition at line 59 of file ui_animsettingdialog.h.

Referenced by Ui_AnimSettingDialog::setupUi().

The documentation for this class was generated from the following file:

- src/ckb/ui_animsettingdialog.h

12.5 AnimSettingDialog Class Reference

`#include <src/ckb/animsettingdialog.h>`

Inheritance diagram for AnimSettingDialog:

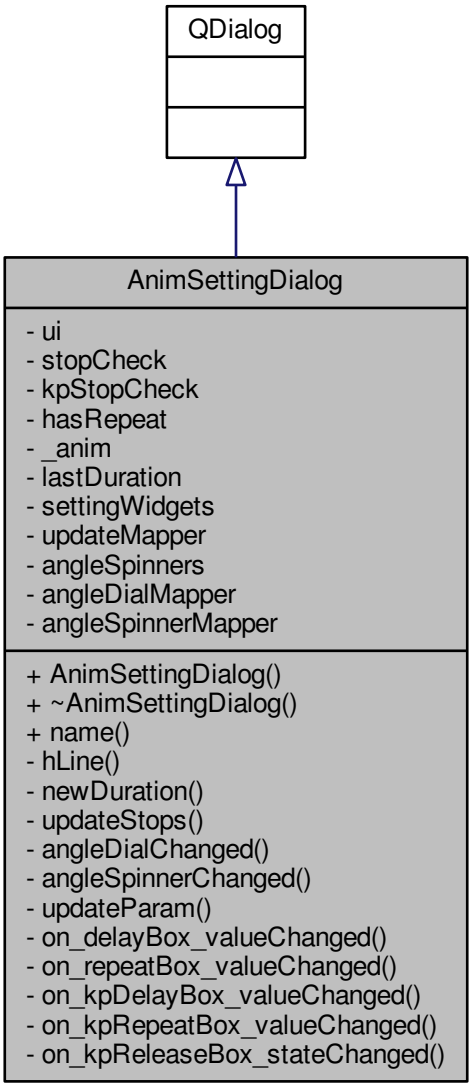

Collaboration diagram for AnimSettingDialog:

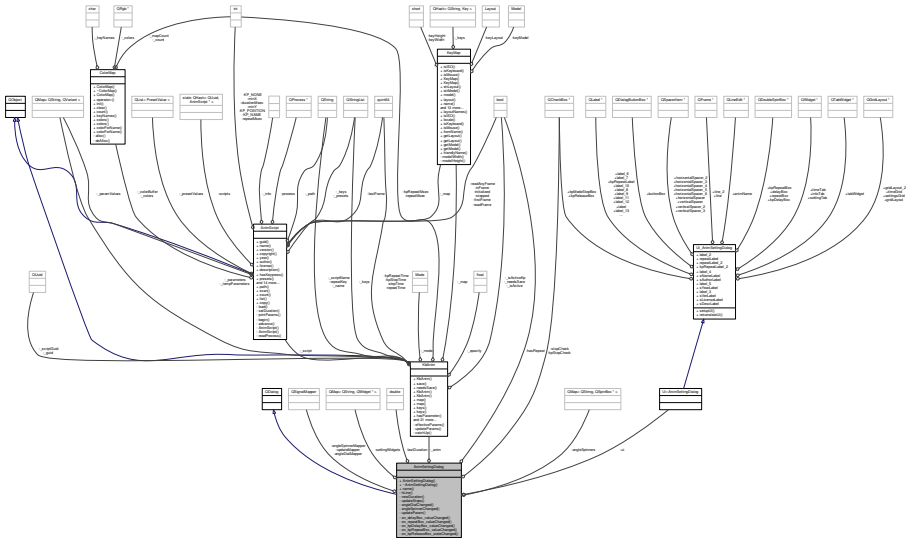

Public Member Functions

- AnimSettingDialog (QWidget ∗parent, KbAnim ∗anim)
- ∼AnimSettingDialog ()
- QString name () const

Private Slots

- void newDuration (double duration)
- void updateStops ()
- void angleDialChanged (QString name)
- void angleSpinnerChanged (QString name)
- void updateParam (QString name)
- void on_delayBox_valueChanged (double arg1)
- void on_repeatBox_valueChanged (double arg1)
- void on_kpDelayBox_valueChanged (double arg1)
- void on_kpRepeatBox_valueChanged (double arg1)
- void on_kpReleaseBox_stateChanged (int arg1)

Private Member Functions

- QFrame ∗ hLine ()

Private Attributes

- Ui::AnimSettingDialog ∗ ui
- QCheckBox ∗ stopCheck
- QCheckBox ∗ kpStopCheck
- bool hasRepeat
- KbAnim ∗ _anim
- double lastDuration
- QMap< QString, QWidget ∗ > settingWidgets

- QSignalMapper updateMapper
- QMap< QString, QSpinBox * > angleSpinners
- QSignalMapper angleDialMapper
- QSignalMapper angleSpinnerMapper

12.5.1 Detailed Description

Definition at line 15 of file animsettingdialog.h.

12.5.2 Constructor & Destructor Documentation

12.5.2.1 AnimSettingDialog::AnimSettingDialog (QWidget * *parent*, KbAnim * *anim*) [explicit]

Definition at line 19 of file animsettingdialog.cpp.

References AnimScript::Param::AGRADIENT, AnimScript::Param::ANGLE, angleDialChanged(), angleDialMapper, angleFlip(), angleSpinnerChanged(), angleSpinnerMapper, angleSpinners, Ui_AnimSettingDialog::animName, AnimScript::Param::ARGB, AnimScript::author(), AnimScript::Param::BOOL, Ui_AnimSettingDialog::delayBox, AnimScript::description(), AnimScript::Param::DOUBLE, AnimScript::Param::GRADIENT, AnimScript::hasKeypress(), AnimScript::hasParam(), KbAnim::hasParameter(), hasRepeat, hLine(), Ui_AnimSettingDialog::kpDelayBox, Ui_AnimSettingDialog::kpModeStopBox, Ui_AnimSettingDialog::kpReleaseBox, Ui_AnimSettingDialog::kpRepeatBox, Ui_AnimSettingDialog::kpRepeatLabel, Ui_AnimSettingDialog::kpRepeatLabel_2, kpStopCheck, AnimScript::Param::LABEL, lastDuration, AnimScript::license(), AnimScript::Param::LONG, AnimScript::Param::maximum, AnimScript::Param::minimum, AnimScript::Param::name, AnimScript::name(), KbAnim::name(), newDuration(), KbAnim::parameter(), AnimScript::paramIterator(), AnimScript::Param::postfix, AnimScript::Param::prefix, Ui_AnimSettingDialog::repeatBox, Ui_AnimSettingDialog::repeatLabel, Ui_AnimSettingDialog::repeatLabel_2, AnimScript::Param::RGB, Ui_AnimSettingDialog::sAuthorLabel, KbAnim::script(), KbAnim::scriptName(), Ui_AnimSettingDialog::sDescLabel, Ui_AnimSettingDialog::settingsGrid, settingWidgets, Ui_AnimSettingDialog::setupUi(), Ui_AnimSettingDialog::sLicenseLabel, Ui_AnimSettingDialog::sNameLabel, stopCheck, AnimScript::Param::STRING, Ui_AnimSettingDialog::sVerLabel, Ui_AnimSettingDialog::sYearLabel, Ui_AnimSettingDialog::timeGrid, AnimScript::Param::type, ui, updateMapper, updateParam(), updateStops(), AnimScript::version(), and AnimScript::year().

```
19                                                                  :
20     QDialog(parent),
21     ui(new Ui::AnimSettingDialog), stopCheck(0),
       kpStopCheck(0),
22     _anim(anim), lastDuration(1.0)
23 {
24     ui->setupUi(this);
25     setWindowTitle(anim->scriptName() + " Animation");
26     ui->animName->setText(anim->name());
27     const AnimScript* script = anim->script();
28
29     connect(&updateMapper, SIGNAL(mapped(QString)), this, SLOT(
       updateParam(QString)));
30     connect(&angleDialMapper, SIGNAL(mapped(QString)), this, SLOT(
       angleDialChanged(QString)));
31     connect(&angleSpinnerMapper, SIGNAL(mapped(QString)), this, SLOT(
       angleSpinnerChanged(QString)));
32
33     // Build settings UI
34     int row = 1;
35     ui->settingsGrid->addItem(new QSpacerItem(0, 10, QSizePolicy::Fixed, QSizePolicy::Fixed),
       row++, 6);
36     ui->settingsGrid->addWidget(new QLabel("<b>Animation</b>", this), row++, 0, 1, 7);
37     ui->settingsGrid->addWidget(hLine(), row++, 0, 1, 7);
38     bool rSpacePlaced = false;
39     QListIterator<AnimScript::Param> i(script->paramIterator());
40     while(i.hasNext()){
41         const AnimScript::Param& param = i.next();
42         // Skip timing/playback params
43         if(param.name == "duration"
44                 || param.name == "trigger" || param.name == "kptrigger"
45                 || param.name == "kpmode"
46                 || param.name == "delay" || param.name == "kpdelay"
47                 || param.name == "repeat" || param.name == "kprepeat"
48                 || param.name == "stop" || param.name == "kpstop"
```

```
49                  || param.name == "kpmodestop" || param.name == "kprelease")
50              continue;
51          QVariant value = anim->parameter(param.name);
52          // Display prefix label on the left (except for booleans and labels)
53          if(param.type != AnimScript::Param::BOOL && param.
    type != AnimScript::Param::LABEL)
54              ui->settingsGrid->addWidget(new QLabel(param.prefix, this), row, 1);
55          // Configure and display main widget
56          QWidget* widget = 0;
57          int colSpan = 1;
58          QString postfix = param.postfix;
59          switch(param.type){
60          case AnimScript::Param::BOOL:
61              widget = new QCheckBox(param.prefix, this);
62              ((QCheckBox*)widget)->setChecked(value.toBool());
63              colSpan = 4;
64              connect(widget, SIGNAL(stateChanged(int)), &updateMapper, SLOT(map()));
65              break;
66          case AnimScript::Param::LONG:
67              widget = new QSpinBox(this);
68              ((QSpinBox*)widget)->setMinimum(param.minimum.toInt());
69              ((QSpinBox*)widget)->setMaximum(param.maximum.toInt());
70              ((QSpinBox*)widget)->setValue(value.toInt());
71              if(postfix.length() <= 3){
72                  ((QSpinBox*)widget)->setSuffix(postfix);
73                  postfix = "";
74              }
75              connect(widget, SIGNAL(valueChanged(int)), &updateMapper, SLOT(map()));
76              break;
77          case AnimScript::Param::DOUBLE:
78              widget = new QDoubleSpinBox(this);
79              ((QDoubleSpinBox*)widget)->setDecimals(1);
80              ((QDoubleSpinBox*)widget)->setMinimum(param.minimum.toDouble());
81              ((QDoubleSpinBox*)widget)->setMaximum(param.maximum.toDouble());
82              ((QDoubleSpinBox*)widget)->setValue(value.toDouble());
83              if(postfix.length() <= 3){
84                  ((QDoubleSpinBox*)widget)->setSuffix(postfix);
85                  postfix = "";
86              }
87              connect(widget, SIGNAL(valueChanged(double)), &updateMapper, SLOT(map()));
88              break;
89          case AnimScript::Param::RGB:
90              widget = new ColorButton(this);
91              ((ColorButton*)widget)->color(QColor("#" + value.toString()));
92              colSpan = 3;
93              connect(widget, SIGNAL(colorChanged(QColor)), &updateMapper, SLOT(map()));
94              break;
95          case AnimScript::Param::ARGB:{
96              widget = new ColorButton(this, true);
97              QString val = value.toString();
98              QColor color;
99              if(val.length() == 8){
100                 color = "#" + val.right(6);
101                 color.setAlpha(val.left(2).toInt(0, 16));
102             } else
103                 color = "#" + val;
104             ((ColorButton*)widget)->color(color);
105             colSpan = 3;
106             connect(widget, SIGNAL(colorChanged(QColor)), &updateMapper, SLOT(map()));
107             break;
108         }
109         case AnimScript::Param::GRADIENT:
110             widget = new GradientButton(this);
111             ((GradientButton*)widget)->fromString(value.toString());
112             colSpan = 3;
113             connect(widget, SIGNAL(gradientChanged()), &updateMapper, SLOT(map()));
114             break;
115         case AnimScript::Param::AGRADIENT:
116             widget = new GradientButton(this, true);
117             ((GradientButton*)widget)->fromString(value.toString());
118             colSpan = 3;
119             connect(widget, SIGNAL(gradientChanged()), &updateMapper, SLOT(map()));
120             break;
121         case AnimScript::Param::ANGLE:
122             widget = new QDial(this);
123             ((QDial*)widget)->setFixedSize(60, 60);
124             ((QDial*)widget)->setMinimum(0);
125             ((QDial*)widget)->setMaximum(360);
126             // this is NOT a typo...     ^
127             // Even though 360 shouldn't be valid, the wheel/arrow keys will lose 1 degree at the bottom
    unless 360 is set as max
128             ((QDial*)widget)->setSingleStep(5);
129             ((QDial*)widget)->setPageStep(15);
130             ((QDial*)widget)->setNotchTarget(6);
131             ((QDial*)widget)->setNotchesVisible(true);
132             ((QDial*)widget)->setWrapping(true);
133             ((QDial*)widget)->setInvertedAppearance(true);
```

```
134             ((QDial*)widget)->setValue(angleFlip(value.toInt()));
135             angleDialMapper.setMapping(widget, param.name);
136             connect(widget, SIGNAL(valueChanged(int)), &angleDialMapper, SLOT(map()));
137             break;
138         case AnimScript::Param::STRING:
139             widget = new QLineEdit(this);
140             ((QLineEdit*)widget)->setText(value.toString());
141             colSpan = 3;
142             connect(widget, SIGNAL(textEdited(const QString&)), &updateMapper, SLOT(map()));
143             break;
144         case AnimScript::Param::LABEL:
145             widget = new QLabel(this);
146             ((QLabel*)widget)->setText(param.prefix);
147             colSpan = 4;
148             break;
149         default:
150             break;
151         }
152         if(widget)
153             updateMapper.setMapping(widget, param.name);
154         if(param.type == AnimScript::Param::BOOL || param.
    type == AnimScript::Param::LABEL){
155             // Boolean values are placed on the left with no prefix or postfix
156             settingWidgets[param.name] = widget;
157             ui->settingsGrid->addWidget(widget, row, 3, 1, colSpan);
158         } else {
159             // Display the widget
160             if(widget){
161                 settingWidgets[param.name] = widget;
162                 ui->settingsGrid->addWidget(widget, row, 3, 1, colSpan);
163             }
164             // Angles additionally have a spin box
165             if(param.type == AnimScript::Param::ANGLE){
166                 QSpinBox* spinner = new QSpinBox(this);
167                 spinner->setMinimum(0);
168                 spinner->setMaximum(359);
169                 spinner->setWrapping(true);
170                 spinner->setSuffix("°");
171                 spinner->setValue(value.toInt());
172                 angleSpinners[param.name] = spinner;
173                 angleSpinnerMapper.setMapping(spinner, param.
    name);
174                 connect(spinner, SIGNAL(valueChanged(int)), &angleSpinnerMapper, SLOT(map
    ()));
175                 ui->settingsGrid->addWidget(spinner, row, 4);
176                 colSpan = 2;
177             }
178             // Display postfix label on the right
179             ui->settingsGrid->addWidget(new QLabel(postfix, this), row, 3 + colSpan, 1, 4 -
    colSpan);
180             if(colSpan < 3 && !rSpacePlaced){
181                 // Add a spacer to compress short elements to the left
182                 ui->settingsGrid->addItem(new QSpacerItem(0, 0, QSizePolicy::Minimum), row, 4
     + colSpan);
183                 rSpacePlaced = true;
184             }
185         }
186         row++;
187     }
188     // Add playback info at bottom
189     ui->settingsGrid->addItem(new QSpacerItem(0, 10, QSizePolicy::Fixed, QSizePolicy::Fixed),
     row++, 6);
190     ui->settingsGrid->addWidget(new QLabel("<b>Playback</b>", this), row++, 0, 1, 7);
191     ui->settingsGrid->addWidget(hLine(), row++, 0, 1, 7);
192     if(script->hasParam("duration")){
193         // Show duration spinner (if allowed)
194         lastDuration = anim->parameter("duration").toDouble();
195         ui->settingsGrid->addWidget(new QLabel("Duration:", this), row, 1);
196         QDoubleSpinBox* spinner = new QDoubleSpinBox(this);
197         spinner->setDecimals(1);
198         spinner->setMinimum(0.1);
199         spinner->setValue(lastDuration);
200         connect(spinner, SIGNAL(valueChanged(double)), this, SLOT(newDuration(double)));
201         settingWidgets["duration"] = spinner;
202         ui->settingsGrid->addWidget(spinner, row, 3, 1, 1);
203         ui->settingsGrid->addWidget(new QLabel("seconds", this), row, 4, 1, 2);
204         row++;
205     }
206     // Show boxes for start with mode/with keypress
207     QCheckBox* check = new QCheckBox("Start with mode", this);
208     check->setChecked(anim->parameter("trigger").toBool());
209     ui->settingsGrid->addWidget(check, row, 3, 1, 4);
210     settingWidgets["trigger"] = check;
211     connect(check, SIGNAL(stateChanged(int)), &updateMapper, SLOT(map()));
212     updateMapper.setMapping(check, "trigger");
213     row++;
214     check = new QCheckBox("Start with key press", this);
```

```
215     check->setChecked(anim->parameter("kptrigger").toBool());
216     ui->settingsGrid->addWidget(check, row, 3, 1, 2);
217     settingWidgets["kptrigger"] = check;
218     connect(check, SIGNAL(stateChanged(int)), &updateMapper, SLOT(map()));
219     updateMapper.setMapping(check, "kptrigger");
220     // Add an option allowing the user to select keypress mode
221     QComboBox* combo = new QComboBox(this);
222     int selected = anim->parameter("kpmode").toInt();
223     if(script->hasKeypress()){
224         // If the script supports keypresses, show the option to handle them that way (default)
225         combo->addItem("on pressed key");
226         combo->addItem("on whole keyboard");
227         combo->addItem("on keyboard (once)");
228     } else {
229         selected--;
230         // Otherwise, just show the choice of whether to start it every time or just once
231         combo->addItem("every time");
232         combo->addItem("only once");
233     }
234     if(selected < 0 || selected > combo->count())
235         selected = 0;
236     combo->setCurrentIndex(selected);
237     ui->settingsGrid->addWidget(combo, row, 5, 1, 2);
238     settingWidgets["kpmode"] = combo;
239     connect(combo, SIGNAL(activated(int)), &updateMapper, SLOT(map()));
240     updateMapper.setMapping(combo, "kpmode");
241     row++;
242
243     // Add horizontal spacer to compress content to left
244     ui->settingsGrid->addItem(new QSpacerItem(0, 0, QSizePolicy::Expanding), 0, 6);
245     // Add vertical spacer to compress content to top
246     ui->settingsGrid->addItem(new QSpacerItem(0, 0, QSizePolicy::Minimum,
    QSizePolicy::Expanding), row, 0);
247
248     // Add timing fields
249     settingWidgets["delay"] = ui->delayBox;
250     ui->delayBox->setValue(anim->parameter("delay").toDouble());
251     settingWidgets["kpdelay"] = ui->kpDelayBox;
252     ui->kpDelayBox->setValue(anim->parameter("kpdelay").toDouble());
253     settingWidgets["kpmodestop"] = ui->kpModeStopBox;
254     ui->kpModeStopBox->setChecked(anim->parameter("kpmodestop").toBool());
255     connect(ui->kpModeStopBox, SIGNAL(clicked(bool)), &
    updateMapper, SLOT(map()));
256     updateMapper.setMapping(ui->kpModeStopBox, "kpmodestop");
257     settingWidgets["kprelease"] = ui->kpReleaseBox;
258     ui->kpReleaseBox->setChecked(anim->parameter("kprelease").toBool());
259     if(anim->hasParameter("repeat")){
260         hasRepeat = true;
261         settingWidgets["repeat"] = ui->repeatBox;
262         ui->repeatBox->setValue(anim->parameter("repeat").toDouble());
263         settingWidgets["kprepeat"] = ui->kpRepeatBox;
264         ui->kpRepeatBox->setValue(anim->parameter("kprepeat").toDouble());
265         // If repeat is enabled, add repeat counts as integer values
266         // Mode repeat
267         ui->timeGrid->addWidget(new QLabel("Repeat:", this), 4, 1);
268         QSpinBox* spinner = new QSpinBox(this);
269         spinner->setMinimum(0);
270         spinner->setMaximum(1000000);
271         spinner->setValue(anim->parameter("stop").toInt());
272         settingWidgets["stop"] = spinner;
273         connect(spinner, SIGNAL(valueChanged(int)), &updateMapper, SLOT(map()));
274         updateMapper.setMapping(spinner, "stop");
275         ui->timeGrid->addWidget(spinner, 4, 3);
276         ui->timeGrid->addWidget(new QLabel("times", this), 4, 4);
277         // KP repeat
278         ui->timeGrid->addWidget(new QLabel("Repeat:", this), 12, 1);
279         spinner = new QSpinBox(this);
280         spinner->setMinimum(0);
281         spinner->setMaximum(1000000);
282         spinner->setValue(anim->parameter("kpstop").toInt());
283         settingWidgets["kpstop"] = spinner;
284         connect(spinner, SIGNAL(valueChanged(int)), &updateMapper, SLOT(map()));
285         updateMapper.setMapping(spinner, "kpstop");
286         ui->timeGrid->addWidget(spinner, 12, 3);
287         ui->timeGrid->addWidget(new QLabel("times", this), 12, 4);
288         // Infinite repeat toggles
289         stopCheck = new QCheckBox("Forever", this);
290         stopCheck->setChecked(anim->parameter("stop").toInt() < 0);
291         ui->timeGrid->addWidget(stopCheck, 4, 5);
292         kpStopCheck = new QCheckBox("Forever", this);
293         connect(stopCheck, SIGNAL(clicked()), this, SLOT(updateStops()));
294         kpStopCheck->setChecked(anim->parameter("kpstop").toInt() < 0);
295         ui->timeGrid->addWidget(kpStopCheck, 12, 5);
296         connect(kpStopCheck, SIGNAL(clicked()), this, SLOT(
    updateStops()));
297     } else {
298         hasRepeat = false;
```

```
299         // If repeat is not enabled, hide repeat-related fields
300         ui->repeatBox->setHidden(true);
301         ui->repeatLabel->setHidden(true);
302         ui->repeatLabel_2->setHidden(true);
303         ui->kpRepeatBox->setHidden(true);
304         ui->kpRepeatLabel->setHidden(true);
305         ui->kpRepeatLabel_2->setHidden(true);
306         // Add stop times as double values
307         // Stop time
308         QDoubleSpinBox* spinner = new QDoubleSpinBox(this);
309         spinner->setDecimals(1);
310         spinner->setMinimum(0.1);
311         spinner->setMaximum(24. * 60. * 60.);
312         double stop = anim->parameter("stop").toDouble();
313         if(stop <= 0.)
314             spinner->setValue(lastDuration);
315         else
316             spinner->setValue(stop);
317         settingWidgets["stop"] = spinner;
318         connect(spinner, SIGNAL(valueChanged(double)), &updateMapper, SLOT(map()));
319         updateMapper.setMapping(spinner, "stop");
320         ui->timeGrid->addWidget(spinner, 4, 3);
321         ui->timeGrid->addWidget(new QLabel("seconds", this), 4, 4);
322         // KP stop time
323         spinner = new QDoubleSpinBox(this);
324         spinner->setDecimals(1);
325         spinner->setMinimum(0.1);
326         spinner->setMaximum(24. * 60. * 60.);
327         double kpstop = anim->parameter("kpstop").toDouble();
328         if(kpstop <= 0.)
329             spinner->setValue(lastDuration);
330         else
331             spinner->setValue(kpstop);
332         settingWidgets["kpstop"] = spinner;
333         connect(spinner, SIGNAL(valueChanged(double)), &updateMapper, SLOT(map()));
334         updateMapper.setMapping(spinner, "kpstop");
335         ui->timeGrid->addWidget(spinner, 12, 3);
336         ui->timeGrid->addWidget(new QLabel("seconds", this), 12, 4);
337         // Infinite run toggles
338         stopCheck = new QCheckBox("Stop after:", this);
339         stopCheck->setChecked(stop > 0.);
340         ui->timeGrid->addWidget(stopCheck, 4, 1);
341         connect(stopCheck, SIGNAL(clicked()), this, SLOT(updateStops()));
342         kpStopCheck = new QCheckBox("Stop after:", this);
343         kpStopCheck->setChecked(kpstop > 0.);
344         ui->timeGrid->addWidget(kpStopCheck, 12, 1);
345         connect(kpStopCheck, SIGNAL(clicked()), this, SLOT(
    updateStops()));
346     }
347     updateStops();
348
349     // Set script info UI
350     ui->sNameLabel->setText(script->name());
351     ui->sVerLabel->setText(script->version());
352     ui->sAuthorLabel->setText(script->author());
353     ui->sYearLabel->setText(script->year());
354     ui->sLicenseLabel->setText(script->license());
355     ui->sDescLabel->setText(script->description());
356
357     // Lock dialog size
358     setFixedSize(minimumSize());
359 }
```

Here is the call graph for this function:

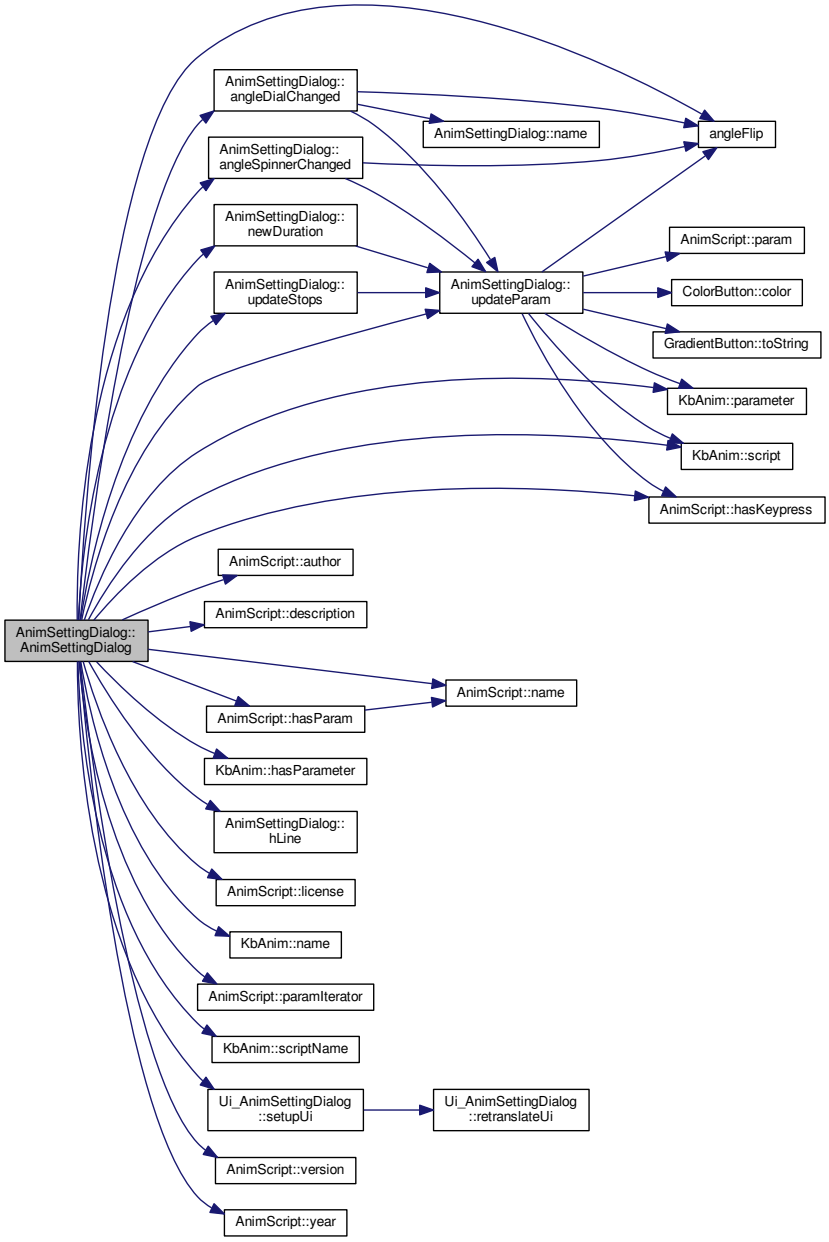

12.5.2.2 AnimSettingDialog::~AnimSettingDialog ( )

Definition at line 476 of file animsettingdialog.cpp.

References ui.

```
476                                        {
477     delete ui;
478 }
```

12.5.3 Member Function Documentation

12.5.3.1 void AnimSettingDialog::angleDialChanged (QString *name*) [private], [slot]

Definition at line 389 of file animsettingdialog.cpp.

References angleFlip(), angleSpinners, name(), settingWidgets, and updateParam().

Referenced by AnimSettingDialog().

```
389                                                 {
390     // Dial changed; update spinner value
391     angleSpinners[name]->setValue(angleFlip(((QDial*)
      settingWidgets[name])->value()));
392     updateParam(name);
393 }
```

Here is the call graph for this function:

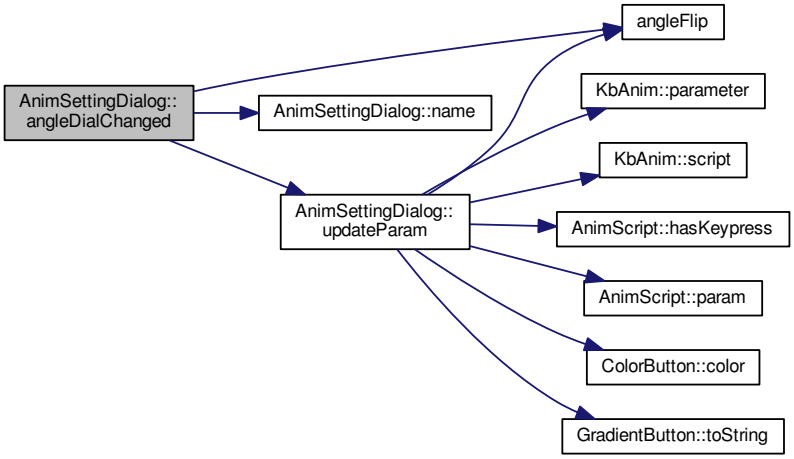

Here is the caller graph for this function:

12.5.3.2 void AnimSettingDialog::angleSpinnerChanged (QString *name*) [private], [slot]

Definition at line 395 of file animsettingdialog.cpp.

References angleFlip(), angleSpinners, settingWidgets, and updateParam().

Referenced by AnimSettingDialog().

```
395                                                 {
```

```
396     // Spinner changed; update dial value
397     ((QDial*)settingWidgets[name])->setValue(angleFlip(
      angleSpinners[name]->value()));
398     updateParam(name);
399 }
```

Here is the call graph for this function:

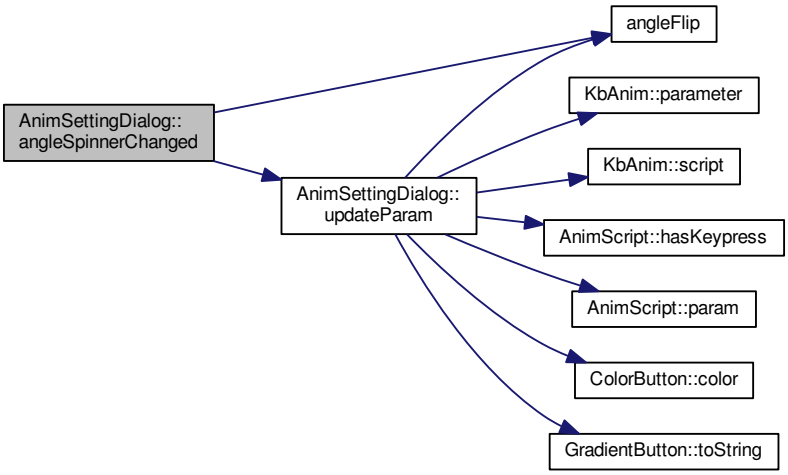

Here is the caller graph for this function:



12.5.3.3 QFrame * AnimSettingDialog::hLine ( ) [private]

Definition at line 480 of file animsettingdialog.cpp.

Referenced by AnimSettingDialog().

```
480                                 {
481     QFrame* frame = new QFrame(this);
482     frame->setFrameShape(QFrame::HLine);
483     frame->setFrameShadow(QFrame::Sunken);
484     return frame;
485 }
```

Here is the caller graph for this function:

12.5.3.4 QString AnimSettingDialog::name ( ) const

Definition at line 472 of file animsettingdialog.cpp.

References Ui_AnimSettingDialog::animName, and ui.

Referenced by angleDialChanged(), and KbAnimWidget::on_propertyButton_clicked().

```
472                                         {
473     return ui->animName->text();
474 }
```

Here is the caller graph for this function:



12.5.3.5 void AnimSettingDialog::newDuration (double *duration*) [private], [slot]

Definition at line 361 of file animsettingdialog.cpp.

References lastDuration, settingWidgets, and updateParam().

Referenced by AnimSettingDialog().

```
361                                                 {
362     // Duration changed. Automatically fix Repeat and KP Repeat to the same values, if they matched before
363     QDoubleSpinBox* rep = (QDoubleSpinBox*)settingWidgets.value("repeat");
364     QDoubleSpinBox* kpRep = (QDoubleSpinBox*)settingWidgets.value("kprepeat");
365     if(rep && rep->value() == lastDuration)
366         rep->setValue(duration);
367     if(kpRep && kpRep->value() == lastDuration)
368         kpRep->setValue(duration);
369     lastDuration = duration;
370     updateParam("duration");
371     updateParam("repeat");
372     updateParam("kprepeat");
373 }
```

Here is the call graph for this function:

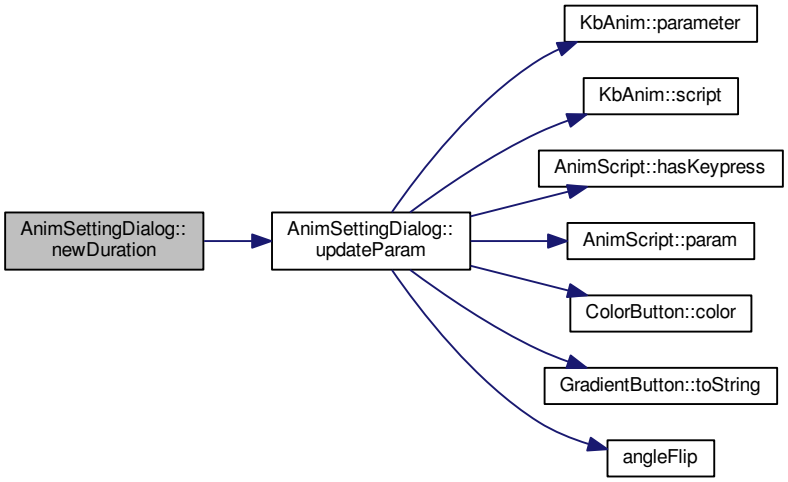

Here is the caller graph for this function:

12.5.3.6 void AnimSettingDialog::on_delayBox_valueChanged (double *arg1*) [private], [slot]

Definition at line 487 of file animsettingdialog.cpp.

References updateParam().

```
487                                                    {
488     updateParam("delay");
489 }
```

Here is the call graph for this function:

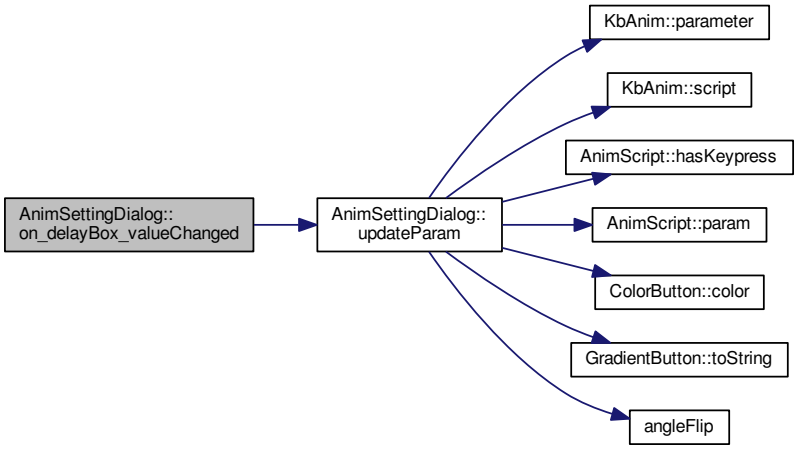

12.5.3.7 void AnimSettingDialog::on_kpDelayBox_valueChanged (double *arg1*) [private], [slot]

Definition at line 495 of file animsettingdialog.cpp.

References updateParam().

```
495                                                     {
496     updateParam("kpdelay");
497 }
```

Here is the call graph for this function:

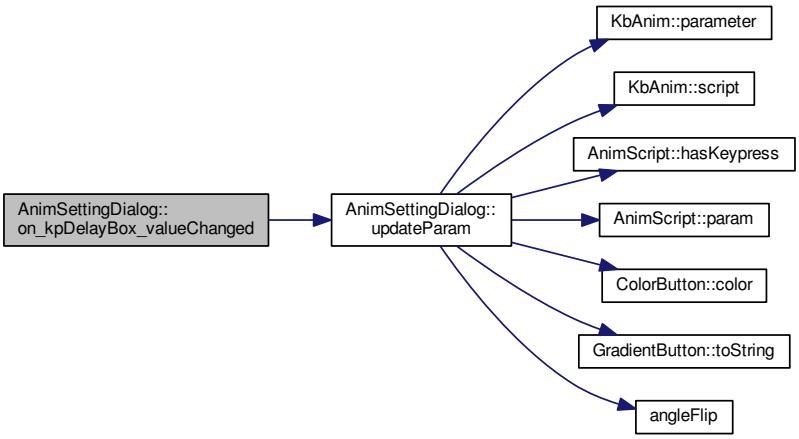

12.5.3.8 void AnimSettingDialog::on_kpReleaseBox_stateChanged (int *arg1*) [private], [slot]

Definition at line 503 of file animsettingdialog.cpp.

References updateParam().

```
503                                                     {
504     updateParam("kprelease");
505 }
```

Here is the call graph for this function:

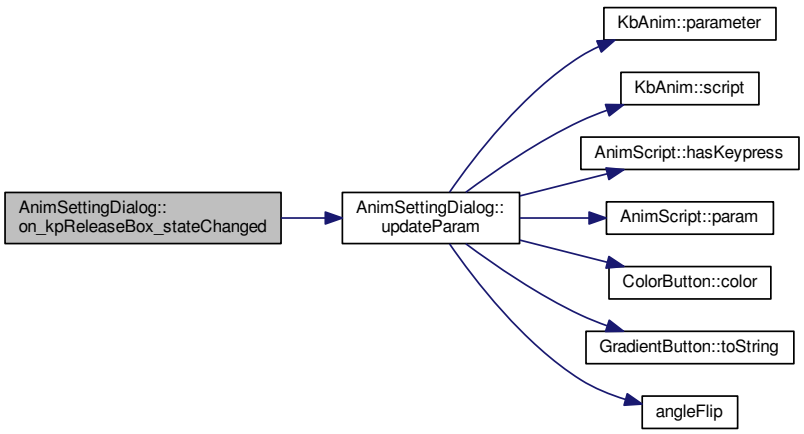

12.5.3.9 void AnimSettingDialog::on_kpRepeatBox_valueChanged (double *arg1*) [private], [slot]

Definition at line 499 of file animsettingdialog.cpp.

References updateParam().

```
499                                                     {
500     updateParam("kprepeat");
501 }
```

Here is the call graph for this function:

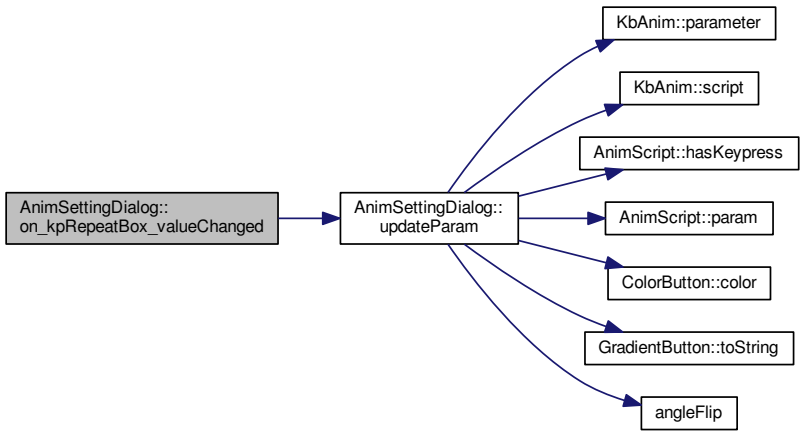

12.5.3.10 void AnimSettingDialog::on_repeatBox_valueChanged (double *arg1*) [private], [slot]

Definition at line 491 of file animsettingdialog.cpp.

References updateParam().

```
491                                                          {
492     updateParam("repeat");
493 }
```

Here is the call graph for this function:

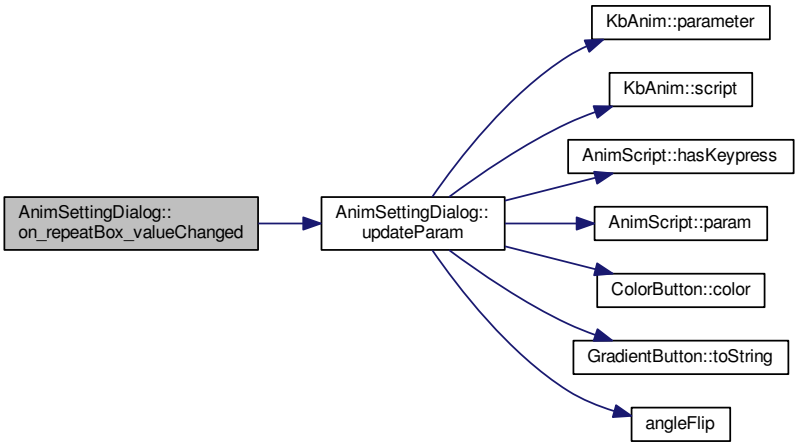

12.5.3.11 void AnimSettingDialog::updateParam (QString *name*) [private], [slot]

Definition at line 401 of file animsettingdialog.cpp.

References _anim, AnimScript::Param::AGRADIENT, AnimScript::Param::ANGLE, angleFlip(), AnimScript::Param::ARGB, AnimScript::Param::BOOL, ColorButton::color(), AnimScript::Param::DOUBLE, AnimScript::Param::GRADIENT, AnimScript::hasKeypress(), hasRepeat, kpStopCheck, AnimScript::Param::LONG, AnimScript::param(), KbAnim::parameter(), AnimScript::Param::RGB, KbAnim::script(), settingWidgets, stopCheck, AnimScript::Param::STRING, GradientButton::toString(), and AnimScript::Param::type.

Referenced by angleDialChanged(), angleSpinnerChanged(), AnimSettingDialog(), newDuration(), on_delayBox_valueChanged(), on_kpDelayBox_valueChanged(), on_kpReleaseBox_stateChanged(), on_kpRepeatBox_valueChanged(), on_repeatBox_valueChanged(), and updateStops().

```
401                                                  {
402     if(!settingWidgets.contains(name))
403         return;
404     // stop and kpstop have defeat switches
405     if((name == "stop" && stopCheck->isChecked() == hasRepeat)
406             || (name == "kpstop" && kpStopCheck->isChecked() ==
    hasRepeat)){
407         _anim->parameter(name, -1);
408         return;
409     } else if(name == "kpmode"){
410         // kpmode uses a drop-down, and selection is inverted
411         QComboBox* widget = (QComboBox*)settingWidgets[name];
412         int selected = widget->currentIndex();
413         if(!_anim->script()->hasKeypress())
414             selected++;
415         _anim->parameter(name, selected);
416         return;
417     }
418     // Read value based on type
```

```
419     switch(_anim->script()->param(name).type){
420     case AnimScript::Param::BOOL:{
421         QCheckBox* widget = (QCheckBox*)settingWidgets[name];
422         _anim->parameter(name, (int)widget->isChecked());
423         break;
424     }
425     case AnimScript::Param::LONG:{
426         QSpinBox* widget = (QSpinBox*)settingWidgets[name];
427         _anim->parameter(name, widget->value());
428         break;
429     }
430     case AnimScript::Param::DOUBLE:{
431         QDoubleSpinBox* widget = (QDoubleSpinBox*)settingWidgets[
    name];
432         _anim->parameter(name, widget->value());
433         break;
434     }
435     case AnimScript::Param::RGB:{
436         ColorButton* widget = (ColorButton*)settingWidgets[
    name];
437         QColor color = widget->color();
438         char hex[7];
439         snprintf(hex, sizeof(hex), "%02x%02x%02x", color.red(), color.green(), color.blue());
440         _anim->parameter(name, QString(hex));
441         break;
442     }
443     case AnimScript::Param::ARGB:{
444         ColorButton* widget = (ColorButton*)settingWidgets[
    name];
445         QColor color = widget->color();
446         char hex[9];
447         snprintf(hex, sizeof(hex), "%02x%02x%02x%02x", color.alpha(), color.red(), color.green(), color.
    blue());
448         _anim->parameter(name, QString(hex));
449         break;
450     }
451     case AnimScript::Param::GRADIENT:
452     case AnimScript::Param::AGRADIENT:{
453         GradientButton* widget = (GradientButton*)
    settingWidgets[name];
454         _anim->parameter(name, widget->toString());
455         break;
456     }
457     case AnimScript::Param::ANGLE:{
458         QDial* widget = (QDial*)settingWidgets[name];
459         _anim->parameter(name, angleFlip(widget->value()));
460         break;
461     }
462     case AnimScript::Param::STRING:{
463         QLineEdit* widget = (QLineEdit*)settingWidgets[name];
464         _anim->parameter(name, widget->text());
465         break;
466     }
467     default:
468         break;
469     }
470 }
```

Here is the call graph for this function:

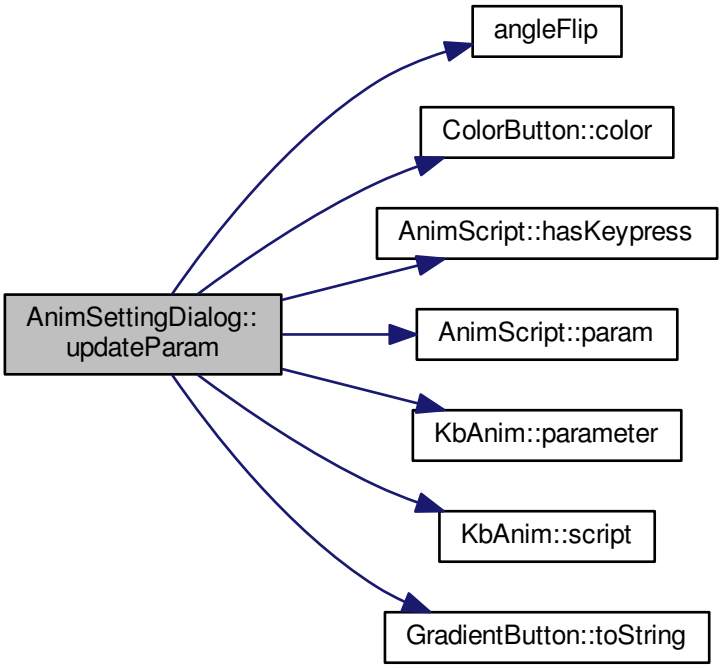

Here is the caller graph for this function:

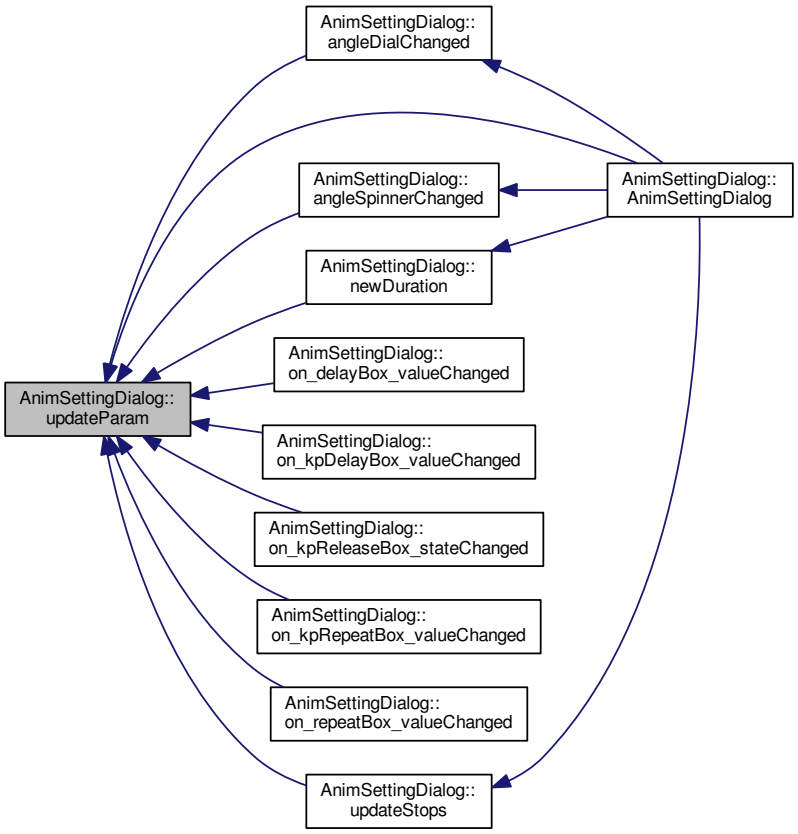

12.5.3.12 void AnimSettingDialog::updateStops ( ) [private], [slot]

Definition at line 375 of file animsettingdialog.cpp.

References hasRepeat, kpStopCheck, settingWidgets, stopCheck, and updateParam().

Referenced by AnimSettingDialog().

```
375                                     {
376     if(hasRepeat){
377         // When repeat is enabled, the check box is "repeat forever", so disable stop count if checked
378         settingWidgets.value("stop")->setDisabled(stopCheck->isChecked());
379         settingWidgets.value("kpstop")->setDisabled(kpStopCheck->isChecked());
380     } else {
381         // When repeat is disabled, the check box is "stop after", so disable stop count UNLESS checked
382         settingWidgets.value("stop")->setEnabled(stopCheck->isChecked());
383         settingWidgets.value("kpstop")->setEnabled(kpStopCheck->isChecked());
384     }
385     updateParam("stop");
386     updateParam("kpstop");
387 }
```

Here is the call graph for this function:

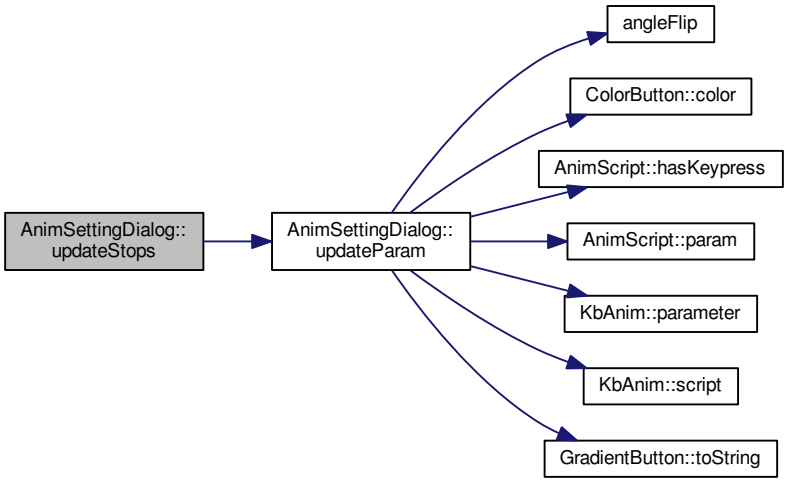

Here is the caller graph for this function:



12.5.4 Field Documentation

12.5.4.1 KbAnim* AnimSettingDialog::_anim [private]

Definition at line 32 of file animsettingdialog.h.

Referenced by updateParam().

12.5.4.2 QSignalMapper AnimSettingDialog::angleDialMapper [private]

Definition at line 38 of file animsettingdialog.h.

Referenced by AnimSettingDialog().

12.5.4.3 QSignalMapper AnimSettingDialog::angleSpinnerMapper [private]

Definition at line 38 of file animsettingdialog.h.

Referenced by AnimSettingDialog().

12.5.4.4 QMap<QString, QSpinBox*> AnimSettingDialog::angleSpinners [private]

Definition at line 37 of file animsettingdialog.h.

Referenced by angleDialChanged(), angleSpinnerChanged(), and AnimSettingDialog().

12.5.4.5 bool AnimSettingDialog::hasRepeat [private]

Definition at line 30 of file animsettingdialog.h.

Referenced by AnimSettingDialog(), updateParam(), and updateStops().

12.5.4.6 QCheckBox * AnimSettingDialog::kpStopCheck [private]

Definition at line 29 of file animsettingdialog.h.

Referenced by AnimSettingDialog(), updateParam(), and updateStops().

12.5.4.7 double AnimSettingDialog::lastDuration [private]

Definition at line 33 of file animsettingdialog.h.

Referenced by AnimSettingDialog(), and newDuration().

12.5.4.8 QMap<QString, QWidget*> AnimSettingDialog::settingWidgets [private]

Definition at line 34 of file animsettingdialog.h.

Referenced by angleDialChanged(), angleSpinnerChanged(), AnimSettingDialog(), newDuration(), updateParam(), and updateStops().

12.5.4.9 QCheckBox* AnimSettingDialog::stopCheck [private]

Definition at line 29 of file animsettingdialog.h.

Referenced by AnimSettingDialog(), updateParam(), and updateStops().

12.5.4.10 Ui::AnimSettingDialog* AnimSettingDialog::ui [private]

Definition at line 28 of file animsettingdialog.h.

Referenced by AnimSettingDialog(), name(), and ~AnimSettingDialog().

12.5.4.11 QSignalMapper AnimSettingDialog::updateMapper [private]

Definition at line 35 of file animsettingdialog.h.

Referenced by AnimSettingDialog().

The documentation for this class was generated from the following files:

- src/ckb/animsettingdialog.h
- src/ckb/animsettingdialog.cpp

12.6 AutoRun Class Reference

`#include <src/ckb/autorun.h>`

Collaboration diagram for AutoRun:



Static Public Member Functions

- static bool available ()
- static bool once ()
- static bool isEnabled ()
- static void enable ()
- static void disable ()

12.6.1 Detailed Description

Definition at line 8 of file autorun.h.

12.6.2 Member Function Documentation

12.6.2.1 bool AutoRun::available ( ) [static]

Definition at line 20 of file autorun.cpp.

Referenced by disable(), enable(), and SettingsWidget::SettingsWidget().

```
20                      {
21     // Allow autostart if the program is located in a system path
22 #ifdef Q_OS_LINUX
23     return QDir::root().absoluteFilePath(QStandardPaths::findExecutable("ckb")) == qApp->
       applicationFilePath();
24 #elif defined(Q_OS_MACX)
25     return qApp->applicationFilePath().startsWith("/Applications/ckb.app", Qt::CaseInsensitive);
26 #endif
27 }
```

Here is the caller graph for this function:

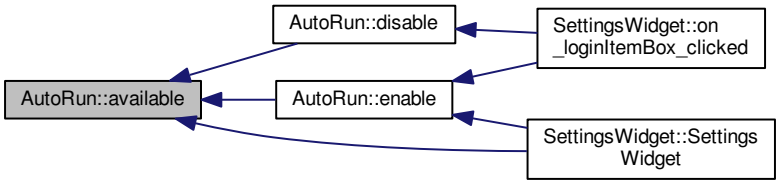

12.6.2.2 void AutoRun::disable ( ) [static]

Definition at line 53 of file autorun.cpp.

References available().

Referenced by SettingsWidget::on_loginItemBox_clicked().

```
53                      {
54     if(!available())
55         return;
56     // Remove file
57     QFile::remove(path.absoluteFilePath(file));
58 }
```

Here is the call graph for this function:

Here is the caller graph for this function:



12.6.2.3 void AutoRun::enable ( ) [static]

Definition at line 42 of file autorun.cpp.

References available(), and CkbSettings::set().

Referenced by SettingsWidget::on_loginItemBox_clicked(), and SettingsWidget::SettingsWidget().

```
42                      {
43     if(!available())
44         return;
45     // Copy file into place
46     if(!path.exists())
47         QDir::home().mkpath(path.absolutePath());
48     QFile::copy(internalFile, path.absoluteFilePath(file));
49     // Mark once() as done
50     CkbSettings::set(settingPath, true);
51 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

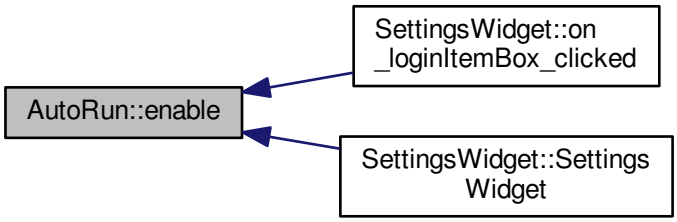

12.6.2.4 bool AutoRun::isEnabled ( ) [static]

Definition at line 33 of file autorun.cpp.

References CkbSettings::set().

Referenced by SettingsWidget::SettingsWidget().

```
33                      {
34     // Check if the file exists. If not, autostart is disabled.
35     if(!path.exists() || !path.exists(file))
36         return false;
37     // If autostart is enabled, set the flag from once() (in case it hasn't been done yet)
38     CkbSettings::set(settingPath, true);
39     return true;
40 }
```

Here is the call graph for this function:



Here is the caller graph for this function:



12.6.2.5 bool AutoRun::once ( ) [static]

Definition at line 29 of file autorun.cpp.

References CkbSettings::get().

Referenced by SettingsWidget::SettingsWidget().

```
29                  {
30      return CkbSettings::get(settingPath).toBool();
31  }
```

Here is the call graph for this function:

Here is the caller graph for this function:



The documentation for this class was generated from the following files:

- src/ckb/autorun.h
- src/ckb/autorun.cpp

12.7 CkbSettings Class Reference

```
#include <src/ckb/ckbsettings.h>
```

Collaboration diagram for CkbSettings:

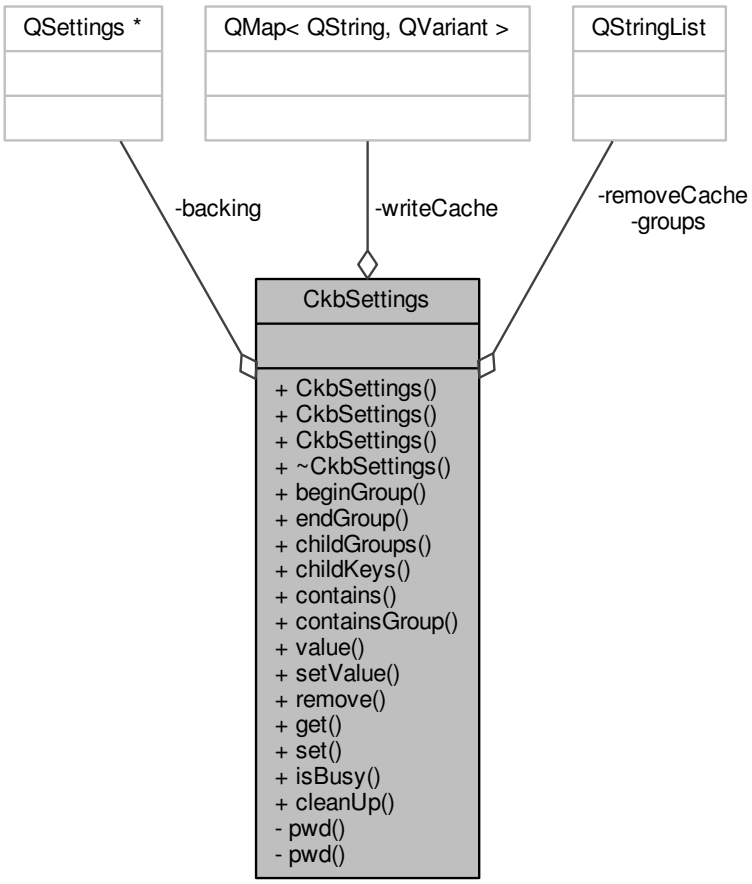

Public Member Functions

- CkbSettings ()
- CkbSettings (const QString &basePath, bool eraseExisting=false)
- CkbSettings (QSettings &settings)
- ~CkbSettings ()
- void beginGroup (const QString &prefix)
- void endGroup ()
- QStringList childGroups () const
- QStringList childKeys () const
- bool contains (const QString &key) const
- bool containsGroup (const QString &group)
- QVariant value (const QString &key, const QVariant &defaultValue=QVariant()) const
- void setValue (const QString &key, const QVariant &value)
- void remove (const QString &key)

Static Public Member Functions

- static QVariant get (const QString &key, const QVariant &defaultValue=QVariant())

- static void set (const QString &key, const QVariant &value)
- static bool isBusy ()
- static void cleanUp ()

Private Member Functions

- QString pwd () const
- QString pwd (const QString &key) const

Private Attributes

- QSettings * backing
- QStringList groups
- QStringList removeCache
- QMap< QString, QVariant > writeCache

12.7.1 Detailed Description

Definition at line 11 of file ckbsettings.h.

12.7.2 Constructor & Destructor Documentation

12.7.2.1 CkbSettings::CkbSettings ( )

Definition at line 61 of file ckbsettings.cpp.

```
61                          :
62     backing(globalSettings()) {
63 }
```

12.7.2.2 CkbSettings::CkbSettings (const QString & *basePath*, bool *eraseExisting* = `false`)

Definition at line 65 of file ckbsettings.cpp.

References beginGroup().

```
65                                                                  :
66     backing(globalSettings()) {
67     if(basePath.isEmpty()){
68         if(eraseExisting)
69             qDebug() << "CkbSettings created with basePath = \"\" and eraseExisting = true. This is a
       mistake.";
70         return;
71     }
72     if(eraseExisting)
73         remove(basePath);
74     beginGroup(basePath);
75 }
```

Here is the call graph for this function:

12.7.2.3 CkbSettings::CkbSettings (QSettings & *settings*)

Definition at line 77 of file ckbsettings.cpp.

```
77                                              :
78     backing(&settings) {
79 }
```

12.7.2.4 CkbSettings::~CkbSettings ( )

Definition at line 145 of file ckbsettings.cpp.

References backing, removeCache, and writeCache.

```
145                           {
146     if(removeCache.isEmpty() && writeCache.isEmpty())
147         return;
148     // Save the settings from the settings thread.
149     // They have to be saved from that thread specifically to avoid performance issues
150     CkbSettingsWriter* writer = new CkbSettingsWriter(
      backing, removeCache, writeCache);
151     writer->moveToThread(globalThread);
152     QObject::staticMetaObject.invokeMethod(writer, "run", Qt::QueuedConnection);
153 }
```

12.7.3 Member Function Documentation

12.7.3.1 void CkbSettings::beginGroup (const QString & *prefix*)

Definition at line 81 of file ckbsettings.cpp.

References groups.

Referenced by CkbSettings(), KbAnim::save(), and SGroup::SGroup().

```
81                                                  {
82     groups.append(prefix);
83 }
```

Here is the caller graph for this function:

12.7.3.2 QStringList CkbSettings::childGroups ( ) const

Definition at line 89 of file ckbsettings.cpp.

References backing, lockMutex, and pwd().

Referenced by containsGroup(), and GradientDialog::GradientDialog().

```
89                                              {
90     QString current = pwd();
91     lockMutex;
92     if(!current.isEmpty())
93         backing->beginGroup(current);
94     QStringList res = backing->childGroups();
95     if(!current.isEmpty())
96         backing->endGroup();
97     return res;
98 }
```

Here is the call graph for this function:



Here is the caller graph for this function:



12.7.3.3 QStringList CkbSettings::childKeys ( ) const

Definition at line 100 of file ckbsettings.cpp.

References backing, lockMutex, and pwd().

Referenced by GradientDialog::GradientDialog(), KbAnim::KbAnim(), KbBind::load(), KbLight::load(), and KbBind::loadGlobalRemap().

```
100                                         {
101     QString current = pwd();
102     lockMutex;
103     if(!current.isEmpty())
104         backing->beginGroup(current);
105     QStringList res = backing->childKeys();
106     if(!current.isEmpty())
107         backing->endGroup();
108     return res;
109 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

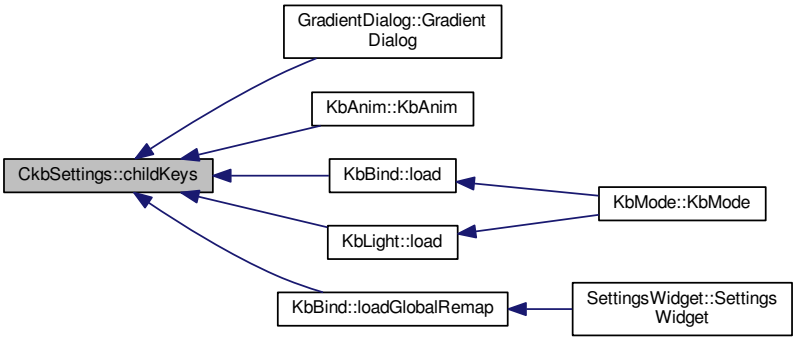

12.7.3.4 void CkbSettings::cleanUp ( ) [static]

Definition at line 46 of file ckbsettings.cpp.

References _globalSettings, cacheWritesInProgress(), and globalThread.

Referenced by MainWindow::cleanup().

```
46                          {
47     if(!_globalSettings)
48         return;
49     // Wait for all writers to finish
50     while(cacheWritesInProgress.load() > 0)
51         QThread::yieldCurrentThread();
52     // Stop thread and delete objects
53     globalThread->quit();
54     globalThread->wait();
55     delete globalThread;
56     delete _globalSettings;
57     globalThread = 0;
58     _globalSettings = 0;
59 }
```

Here is the call graph for this function:

Here is the caller graph for this function:

12.7.3.5 bool CkbSettings::contains (const QString & *key*) const

Definition at line 111 of file ckbsettings.cpp.

References backing, lockMutex, and pwd().

Referenced by KbMode::KbMode(), KbProfile::KbProfile(), and KbPerf::load().

```
111                                                 {
112     lockMutex;
113     return backing->contains(pwd(key));
114 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

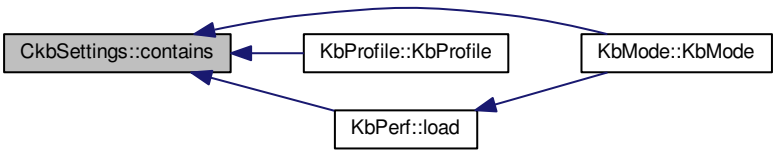

12.7.3.6 bool CkbSettings::containsGroup (const QString & *group*)

Definition at line 116 of file ckbsettings.cpp.

References childGroups().

Referenced by KbPerf::load().

```
116                                                 {
117     QStringList components = group.split("/");
118     if(components.length() > 1){
119         // Find sub-group
120         SGroup group(*this, components[0]);
121         return containsGroup(QStringList(components.mid(1)).join('/'));
122     }
123     return childGroups().contains(group);
124 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

12.7.3.7 void CkbSettings::endGroup ( )

Definition at line 85 of file ckbsettings.cpp.

References groups.

Referenced by KbAnim::save(), and SGroup::~SGroup().

```
85                          {
86     groups.removeLast();
87 }
```

Here is the caller graph for this function:



12.7.3.8 QVariant CkbSettings::get (const QString & *key*, const QVariant & *defaultValue* = `QVariant()`) [static]

Definition at line 155 of file ckbsettings.cpp.

References globalCache, globalSettings(), lockMutexCache, and lockMutexStatic2.

Referenced by MainWindow::closeEvent(), KbLightWidget::KbLightWidget(), MainWindow::MainWindow(), AutoRun::once(), and MainWindow::timerTick().

```
155                                                                     {
156     // Store these settings in a memory cache
157     lockMutexCache;
158     if(globalCache.contains(key))
159         return globalCache.value(key);
160     // If it wasn't found in the memory cache, look for it in QSettings
161     lockMutexStatic2;
162     QSettings* settings = globalSettings();
163     return globalCache[key] = settings->value(key, defaultValue);
164 }
```

Here is the call graph for this function:

Here is the caller graph for this function:

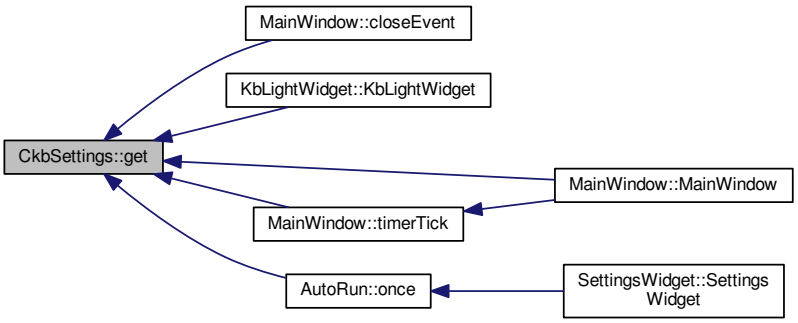

12.7.3.9 bool CkbSettings::isBusy ( ) [static]

Definition at line 42 of file ckbsettings.cpp.

References cacheWritesInProgress().

Referenced by Kb::autoSave(), and ExtraSettingsWidget::pollUpdates().

```
42                         {
43     return cacheWritesInProgress.load() > 0;
44 }
```

Here is the call graph for this function:

Here is the caller graph for this function:



12.7.3.10 QString CkbSettings::pwd ( ) const [inline], [private]

Definition at line 51 of file ckbsettings.h.

References groups.

Referenced by childGroups(), childKeys(), contains(), remove(), setValue(), and value().

```
51 { return groups.join("/"); }
```

Here is the caller graph for this function:

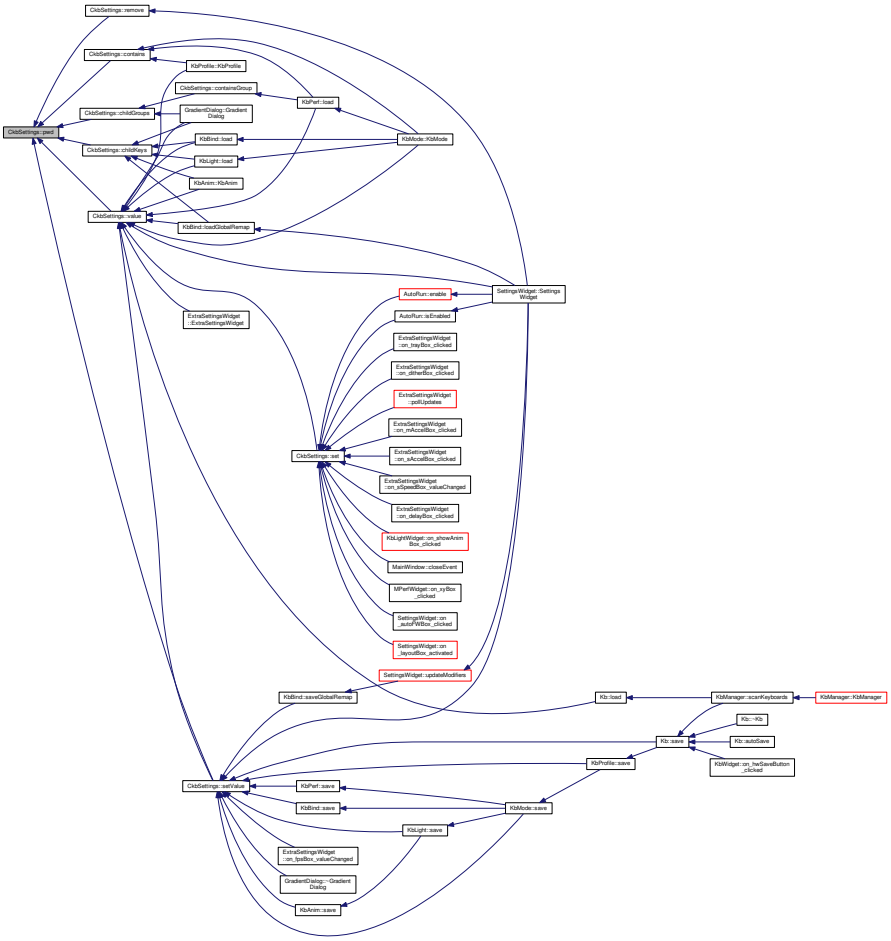

12.7.3.11 QString CkbSettings::pwd (const QString & *key*) const [inline], [private]

Definition at line 52 of file ckbsettings.h.

References groups, and pwd().

Referenced by pwd().

```
52 { return pwd() + (groups.isEmpty() ? "" : "/") + key; }
```

Here is the call graph for this function:

Here is the caller graph for this function:

12.7.3.12 void CkbSettings::remove (const QString & *key*)

Definition at line 141 of file ckbsettings.cpp.

References pwd(), and removeCache.

Referenced by SettingsWidget::SettingsWidget().

```
141                                             {
142     removeCache.append(pwd(key));
143 }
```

Here is the call graph for this function:

Here is the caller graph for this function:



12.7.3.13 void CkbSettings::set (const QString & *key*, const QVariant & *value*) [static]

Definition at line 166 of file ckbsettings.cpp.

References globalCache, globalSettings(), lockMutexCache, lockMutexStatic, and value().

Referenced by MainWindow::closeEvent(), AutoRun::enable(), AutoRun::isEnabled(), SettingsWidget::on_autoFWBox_clicked(), ExtraSettingsWidget::on_delayBox_clicked(), ExtraSettingsWidget::on_ditherBox_clicked(), SettingsWidget::on_layoutBox_activated(), ExtraSettingsWidget::on_mAccelBox_clicked(), ExtraSettingsWidget::on_sAccelBox_clicked(), KbLightWidget::on_showAnimBox_clicked(), ExtraSettingsWidget::on_sSpeedBox_valueChanged(), ExtraSettingsWidget::on_trayBox_clicked(), MPerfWidget::on_xyBox_clicked(), and ExtraSettingsWidget::pollUpdates().

```
166                                                                 {
167     {
168         lockMutexCache;
169         if(globalCache.value(key) == value)
170             return;
171         globalCache[key] = value;
172     }
173     lockMutexStatic;
174     globalSettings()->setValue(key, value);
175 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

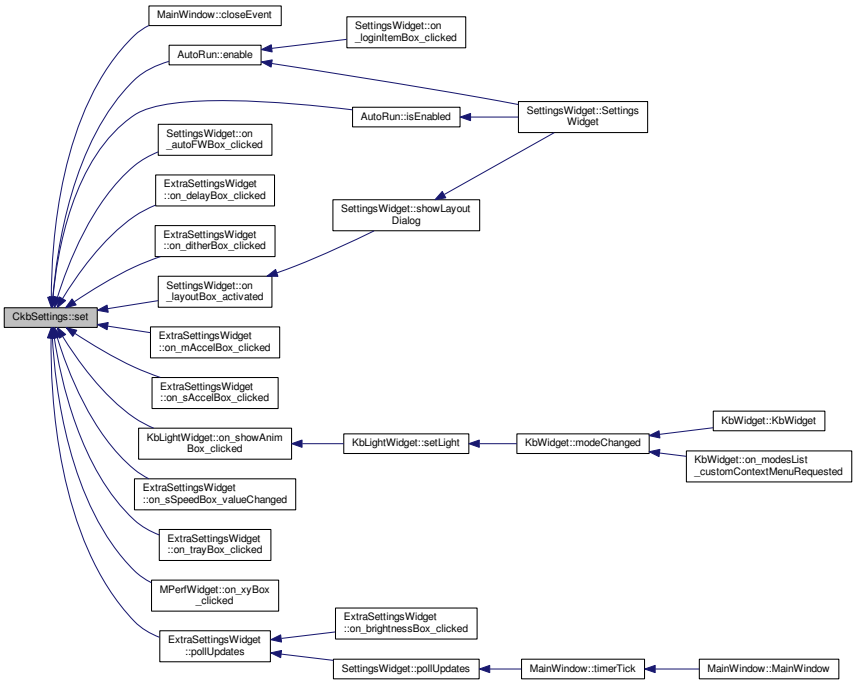

12.7.3.14 void CkbSettings::setValue (const QString & *key,* const QVariant & *value*)

Definition at line 131 of file ckbsettings.cpp.

References globalCache, lockMutexCache, pwd(), value(), and writeCache.

Referenced by ExtraSettingsWidget::on_fpsBox_valueChanged(), KbProfile::save(), KbPerf::save(), KbAnim::save(), KbBind::save(), KbMode::save(), KbLight::save(), Kb::save(), KbBind::saveGlobalRemap(), SettingsWidget::SettingsWidget(), and GradientDialog::~GradientDialog().

```
131                                                                 {
132     // Cache the write values, save them when the object is destroyed
133     QString realKey = pwd(key);
134     writeCache[realKey] = value;
135     // Update global cache if needed
136     lockMutexCache;
137     if(globalCache.contains(realKey))
138         globalCache[realKey] = value;
139 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

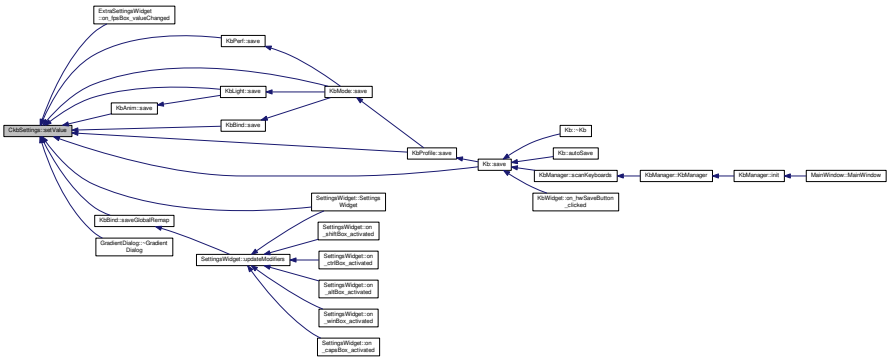

12.7.3.15 QVariant CkbSettings::value (const QString & *key,* const QVariant & *defaultValue* = `QVariant()`) const

Definition at line 126 of file ckbsettings.cpp.

References backing, lockMutex, and pwd().

Referenced by ExtraSettingsWidget::ExtraSettingsWidget(), GradientDialog::GradientDialog(), KbAnim::KbAnim(), KbMode::KbMode(), KbProfile::KbProfile(), KbPerf::load(), KbBind::load(), KbLight::load(), Kb::load(), KbBind::loadGlobalRemap(), set(), SettingsWidget::SettingsWidget(), and setValue().

```
126                                                                 {
127     lockMutex;
128     return backing->value(pwd(key), defaultValue);
129 }
```

Here is the call graph for this function:

Here is the caller graph for this function:

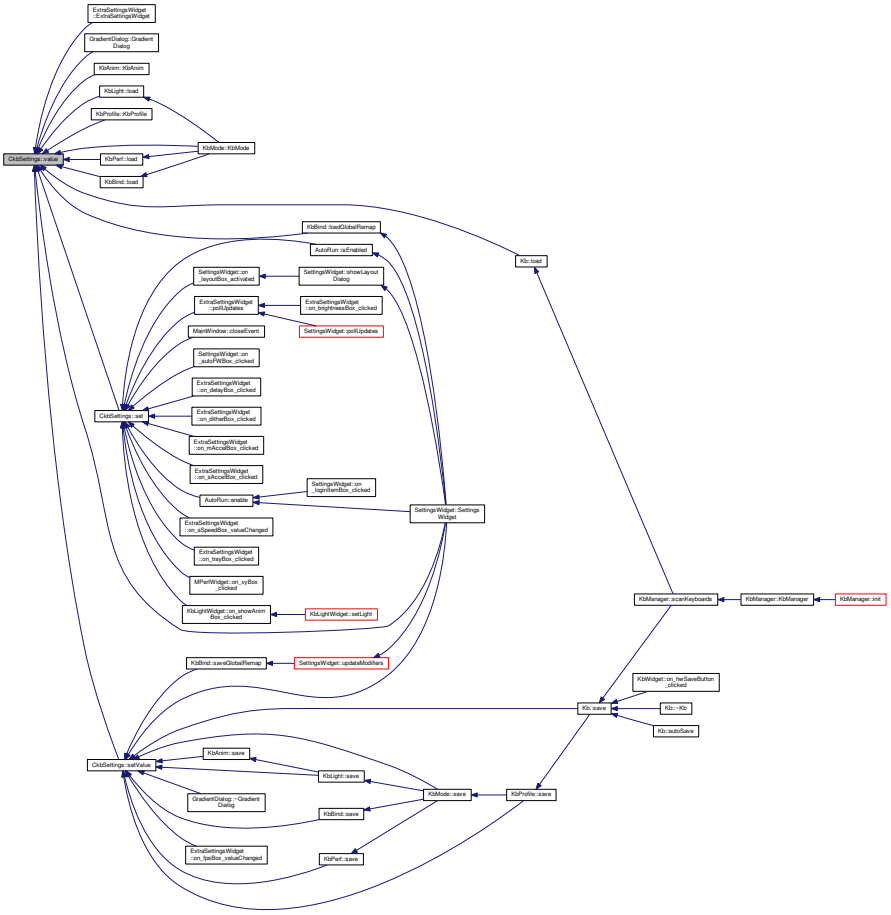

12.7.4 Field Documentation

12.7.4.1 QSettings* CkbSettings::backing [private]

Definition at line 46 of file ckbsettings.h.

Referenced by childGroups(), childKeys(), contains(), value(), and ~CkbSettings().

12.7.4.2 QStringList CkbSettings::groups [private]

Definition at line 47 of file ckbsettings.h.

Referenced by beginGroup(), endGroup(), and pwd().

12.7.4.3 QStringList CkbSettings::removeCache [private]

Definition at line 48 of file ckbsettings.h.

Referenced by remove(), and ~CkbSettings().

12.7.4.4 QMap<QString, QVariant> CkbSettings::writeCache [private]

Definition at line 49 of file ckbsettings.h.

Referenced by setValue(), and ~CkbSettings().

The documentation for this class was generated from the following files:

- src/ckb/ckbsettings.h
- src/ckb/ckbsettings.cpp

12.8 CkbSettingsWriter Class Reference

`#include <src/ckb/ckbsettingswriter.h>`

Inheritance diagram for CkbSettingsWriter:

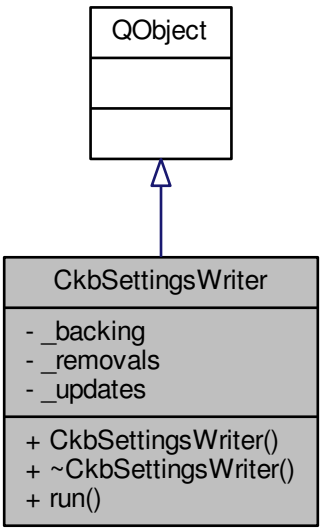

Collaboration diagram for CkbSettingsWriter:

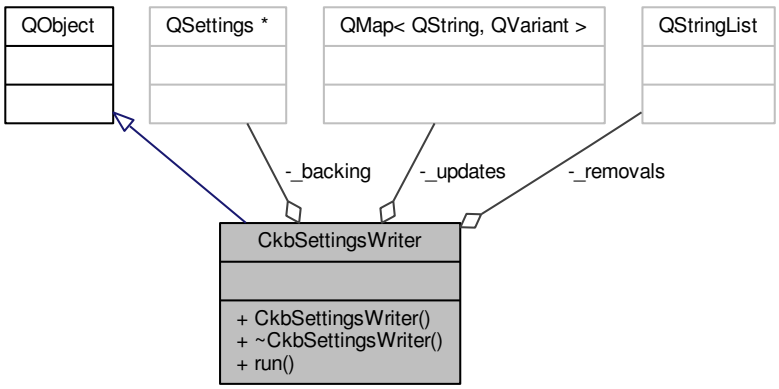

Public Member Functions

- CkbSettingsWriter (QSettings ∗backing, const QStringList &removals, const QMap< QString, QVariant > &updates)
- ∼CkbSettingsWriter ()
- Q_SLOT void run ()

Private Attributes

- QSettings ∗ _backing
- QStringList _removals
- QMap< QString, QVariant > _updates

12.8.1 Detailed Description

Definition at line 12 of file ckbsettingswriter.h.

12.8.2 Constructor & Destructor Documentation

12.8.2.1 CkbSettingsWriter::CkbSettingsWriter (QSettings ∗ *backing*, const QStringList & *removals*, const QMap< QString, QVariant > & *updates*)

Definition at line 12 of file ckbsettingswriter.cpp.

References cacheWritesInProgress.

```
12
                                :
13     _backing(backing), _removals(removals), _updates(updates) {
14     cacheWritesInProgress.ref();
15 }
```

12.8.2.2 CkbSettingsWriter::~CkbSettingsWriter ( )

Definition at line 17 of file ckbsettingswriter.cpp.

References cacheWritesInProgress.

```
17                                      {
18     cacheWritesInProgress.deref();
19 }
```

12.8.3 Member Function Documentation

12.8.3.1 void CkbSettingsWriter::run ( )

Definition at line 21 of file ckbsettingswriter.cpp.

References _backing, _removals, _updates, and lockMutexStatic.

```
21                                {
22     lockMutexStatic;
23     // Process key removals
24     foreach(const QString& rm, _removals){
25         _backing->remove(rm);
26     }
27     // Process writes
28     QMapIterator<QString, QVariant> i(_updates);
29     while(i.hasNext()){
30         i.next();
31         _backing->setValue(i.key(), i.value());
32         // Updating the global cache was done above
33     }
34     _backing->sync();
35     deleteLater();
36 }
```

12.8.4 Field Documentation

12.8.4.1 QSettings* CkbSettingsWriter::_backing [private]

Definition at line 21 of file ckbsettingswriter.h.

Referenced by run().

12.8.4.2 QStringList CkbSettingsWriter::_removals [private]

Definition at line 22 of file ckbsettingswriter.h.

Referenced by run().

12.8.4.3 QMap<QString, QVariant> CkbSettingsWriter::_updates [private]

Definition at line 23 of file ckbsettingswriter.h.

Referenced by run().

The documentation for this class was generated from the following files:

- src/ckb/ckbsettingswriter.h
- src/ckb/ckbsettingswriter.cpp

12.9 ColorButton Class Reference

`#include <src/ckb/colorbutton.h>`

Inheritance diagram for ColorButton:

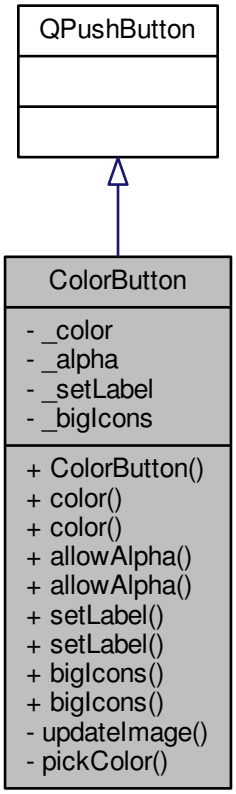

Collaboration diagram for ColorButton:

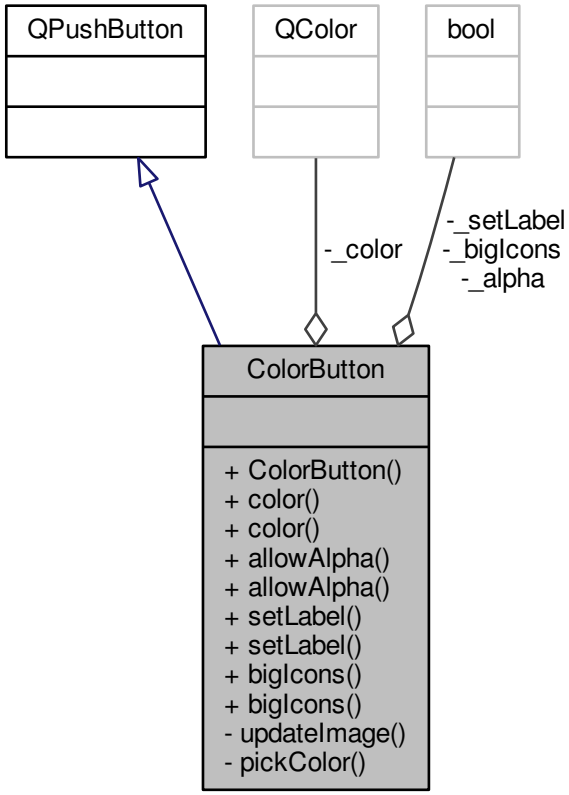

Signals

- void colorChanged (QColor newColor)

Public Member Functions

- ColorButton (QWidget *parent=0, bool allowAlpha=false)
- const QColor & color () const
- void color (const QColor &newColor)
- bool allowAlpha () const
- void allowAlpha (bool newAllowAlpha)
- bool setLabel () const
- void setLabel (bool newSetLabel)
- bool bigIcons () const
- void bigIcons (bool newBigIcons)

Private Slots

- void pickColor ()

Private Member Functions

- void updateImage ()

Private Attributes

- QColor _color
- bool _alpha
- bool _setLabel
- bool _bigIcons

12.9.1 Detailed Description

Definition at line 6 of file colorbutton.h.

12.9.2 Constructor & Destructor Documentation

12.9.2.1 ColorButton::ColorButton (QWidget * *parent* = 0, bool *allowAlpha* = false) [explicit]

Definition at line 5 of file colorbutton.cpp.

References pickColor(), and updateImage().

```
5                                                       :
6     QPushButton(parent), _alpha(allowAlpha),
      _setLabel(true), _bigIcons(false)
7 {
8     setAutoDefault(false);
9     setDefault(false);
10     updateImage();
11     // Pick color on click (use queued connection so that any on_*_clicked() events can be processed first)
12     connect(this, SIGNAL(clicked()), this, SLOT(pickColor()), Qt::QueuedConnection);
13 }
```

Here is the call graph for this function:



12.9.3 Member Function Documentation

12.9.3.1 bool ColorButton::allowAlpha ( ) const [inline]

Definition at line 17 of file colorbutton.h.

References _alpha.

Referenced by KPerfWidget::KPerfWidget(), and MPerfWidget::MPerfWidget().

```
17 { return _alpha; }
```

Here is the caller graph for this function:

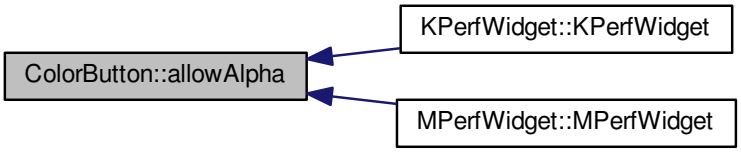

12.9.3.2 void ColorButton::allowAlpha (bool *newAllowAlpha*)

Definition at line 22 of file colorbutton.cpp.

References _alpha, and updateImage().

```
22                                              {
23     _alpha = newAllowAlpha;
24     updateImage();
25 }
```

Here is the call graph for this function:

12.9.3.3 bool ColorButton::bigIcons ( ) const [inline]

Definition at line 23 of file colorbutton.h.

References _bigIcons.

Referenced by KPerfWidget::KPerfWidget(), and MPerfWidget::MPerfWidget().

```
23 { return _bigIcons; }
```

Here is the caller graph for this function:

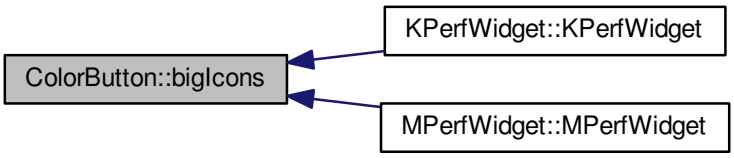

12.9.3.4 void ColorButton::bigIcons (bool *newBigIcons*)

Definition at line 27 of file colorbutton.cpp.

References _bigIcons, and updateImage().

```
27                                          {
28     _bigIcons = newBigIcons;
29     updateImage();
30 }
```

Here is the call graph for this function:



12.9.3.5 const QColor& ColorButton::color ( ) const [inline]

Definition at line 13 of file colorbutton.h.

References _color.

Referenced by MPerfWidget::colorChanged(), GradientDialog::currentChanged(), KbLightWidget::newSelection(), GradientDialog::on_stopOpacity_valueChanged(), KPerfWidget::setPerf(), MPerfWidget::setPerf(), KPerfWidget::uiUpdated(), and AnimSettingDialog::updateParam().

```
13 { return _color; }
```

Here is the caller graph for this function:

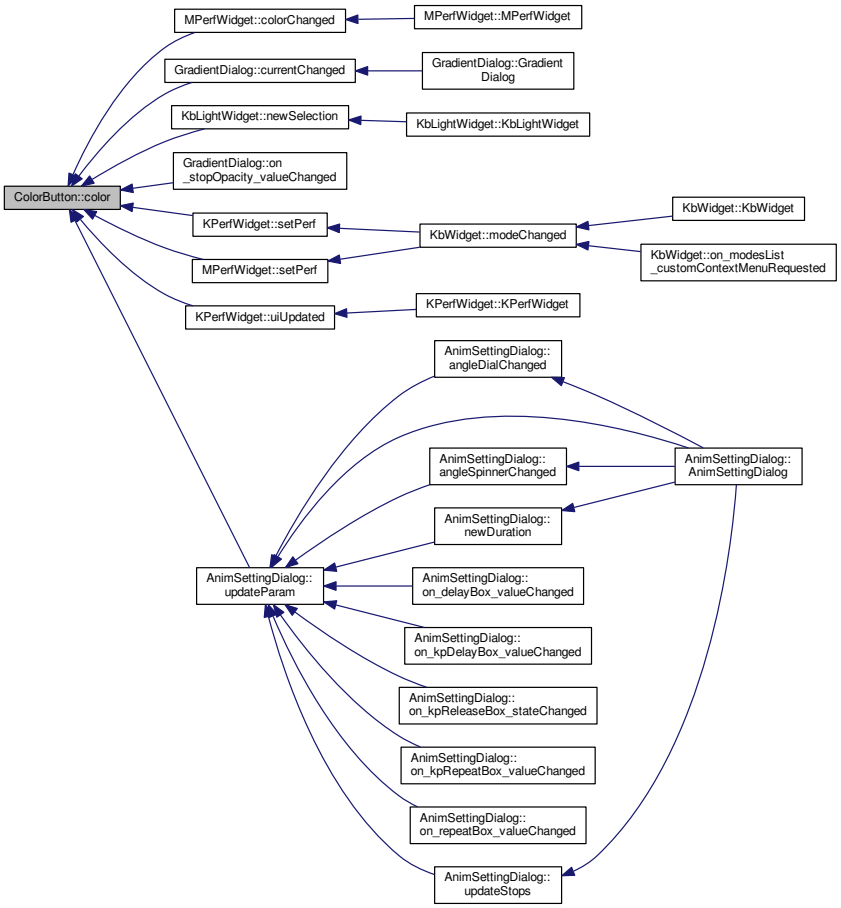

12.9.3.6 void ColorButton::color (const QColor & *newColor*)

Definition at line 15 of file colorbutton.cpp.

References _alpha, _color, and updateImage().

```
15                                          {
16     _color = newColor;
17     if(!_alpha)
18         _color.setAlpha(255);
19     updateImage();
20 }
```

Here is the call graph for this function:



12.9.3.7 void ColorButton::colorChanged (QColor *newColor*) [signal]

Definition at line 132 of file moc_colorbutton.cpp.

Referenced by pickColor().

```
133 {
134     void *_a[] = { Q_NULLPTR, const_cast<void*>(reinterpret_cast<const void*>(&_t1)) };
135     QMetaObject::activate(this, &staticMetaObject, 0, _a);
136 }
```

Here is the caller graph for this function:



12.9.3.8 void ColorButton::pickColor ( ) [private], [slot]

Definition at line 60 of file colorbutton.cpp.

References _alpha, _color, colorChanged(), and updateImage().

Referenced by ColorButton().

```
60                            {
61     QColor newColor = QColorDialog::getColor(_color, this, QString(),
      QColorDialog::ColorDialogOptions(_alpha ? QColorDialog::ShowAlphaChannel : 0));
62     if(newColor.isValid()){
63         _color = newColor;
64         updateImage();
65         emit colorChanged(_color);
66     }
67 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

12.9.3.9 bool ColorButton::setLabel ( ) const [inline]

Definition at line 20 of file colorbutton.h.

References _setLabel.

Referenced by KPerfWidget::KPerfWidget(), and MPerfWidget::MPerfWidget().

```
20 { return _setLabel; }
```

Here is the caller graph for this function:

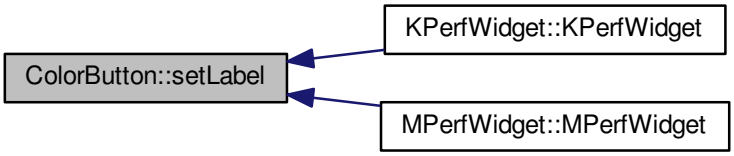

12.9.3.10 void ColorButton::setLabel (bool *newSetLabel*) [inline]

Definition at line 21 of file colorbutton.h.

References _setLabel.

```
21 { _setLabel = newSetLabel; }
```

12.9.3.11 void ColorButton::updateImage ( ) [private]

Definition at line 32 of file colorbutton.cpp.

References _alpha, _bigIcons, _color, and _setLabel.

Referenced by allowAlpha(), bigIcons(), color(), ColorButton(), and pickColor().

```
32                              {
33     if(!_color.isValid()){
34         setIcon(QIcon());
35         if(_setLabel)
36             setText("Change color...");
37         return;
38     }
39     const int w = 24, h = _bigIcons ? 24 : 12;
40     QImage image(w, h, QImage::Format_RGB888);
41     QPainter painter(&image);
42     painter.setPen(Qt::NoPen);
43     painter.fillRect(0, 0, w, h, QColor(0, 0, 0));
44     if(_alpha && _color.alpha() != 255){
45         painter.fillRect(1, 1, w / 2 - 1, h / 2 - 1, QColor(255, 255, 255));
46         painter.fillRect(w / 2, 1, w / 2 - 1, h / 2 - 1, QColor(192, 192, 192));
47         painter.fillRect(1, h / 2, w / 2 - 1, h / 2 - 1, QColor(192, 192, 192));
48         painter.fillRect(w / 2, h / 2, w / 2 - 1, h / 2 - 1, QColor(255, 255, 255));
49     }
50     painter.fillRect(1, 1, w - 2, h - 2, _color);
51     setIcon(QIcon(QPixmap::fromImage(image)));
52     if(_setLabel){
53         QString text = QString(" (%1, %2, %3)").arg(_color.red()).arg(
       _color.green()).arg(_color.blue());
54         if(_alpha)
```

```
55             text += QString(", %4%").arg(QString::number(_color.alphaF() * 100., 'f', 0));
56         setText(text);
57     }
58 }
```

Here is the caller graph for this function:

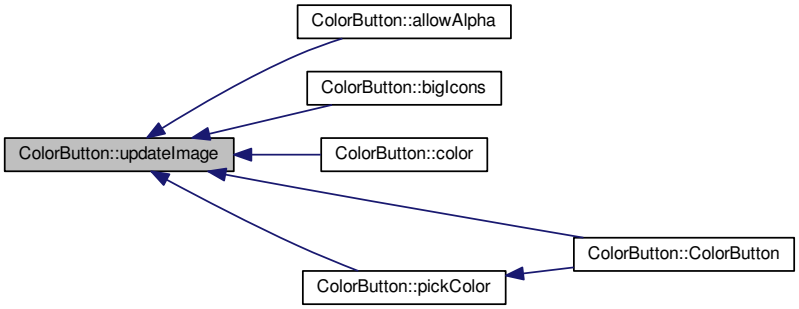

12.9.4 Field Documentation

12.9.4.1 bool ColorButton::_alpha [private]

Definition at line 34 of file colorbutton.h.

Referenced by allowAlpha(), color(), pickColor(), and updateImage().

12.9.4.2 bool ColorButton::_bigIcons [private]

Definition at line 34 of file colorbutton.h.

Referenced by bigIcons(), and updateImage().

12.9.4.3 QColor ColorButton::_color [private]

Definition at line 33 of file colorbutton.h.

Referenced by color(), pickColor(), and updateImage().

12.9.4.4 bool ColorButton::_setLabel [private]

Definition at line 34 of file colorbutton.h.

Referenced by setLabel(), and updateImage().

The documentation for this class was generated from the following files:

- src/ckb/colorbutton.h
- src/ckb/colorbutton.cpp
- src/ckb/release/moc_colorbutton.cpp

12.10 ColorMap Class Reference

`#include <src/ckb/colormap.h>`

Collaboration diagram for ColorMap:

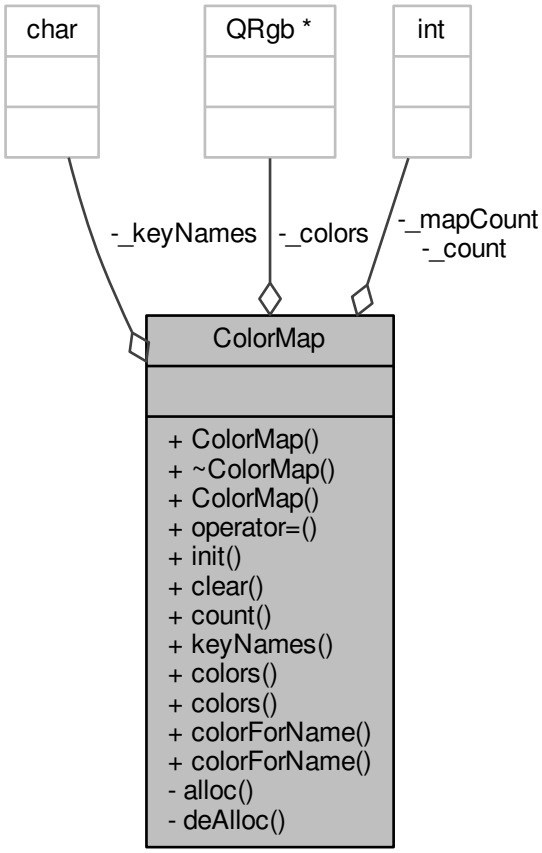

Public Member Functions

- ColorMap ()
- ~ColorMap ()
- ColorMap (const ColorMap &rhs)
- const ColorMap & operator= (const ColorMap &rhs)
- void init (const KeyMap &map)
- void clear ()
- int count () const
- const char *const * keyNames () const
- QRgb * colors ()
- const QRgb * colors () const
- QRgb * colorForName (const char *name)
- const QRgb * colorForName (const char *name) const

Private Member Functions

- void alloc (int count)
- void deAlloc ()

Private Attributes

- const char ** _keyNames
- QRgb * _colors
- int _count
- int _mapCount

12.10.1 Detailed Description

Definition at line 15 of file colormap.h.

12.10.2 Constructor & Destructor Documentation

12.10.2.1 ColorMap::ColorMap ( )

Definition at line 3 of file colormap.cpp.

```
3                   :
4     _keyNames(0), _colors(0), _count(0), _mapCount(0)
5 {
6 }
```

12.10.2.2 ColorMap::~ColorMap ( )

Definition at line 8 of file colormap.cpp.

References deAlloc().

```
8                   {
9     deAlloc();
10 }
```

Here is the call graph for this function:



12.10.2.3 ColorMap::ColorMap (const ColorMap & *rhs*)

Definition at line 12 of file colormap.cpp.

```
12                                  :
13     _keyNames(0), _colors(0), _count(0), _mapCount(0)
14 {
15     *this = rhs;
16 }
```

12.10.3 Member Function Documentation

12.10.3.1 void ColorMap::alloc (int *count*) [private]

Definition at line 27 of file colormap.cpp.

References _colors, _count, _keyNames, _mapCount, clear(), and deAlloc().

Referenced by init(), and operator=().

```
27                                {
28     if(newCount > _mapCount){
29         // ^ map never shrinks, only expands
30         deAlloc();
31         _mapCount = newCount;
32         _keyNames = new const char*[_mapCount];
33         _colors = new QRgb[_mapCount];
34     }
35     _count = newCount;
36     clear();
37 }
```

Here is the call graph for this function:

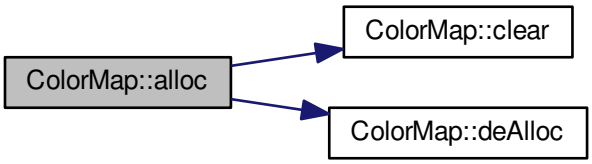

Here is the caller graph for this function:

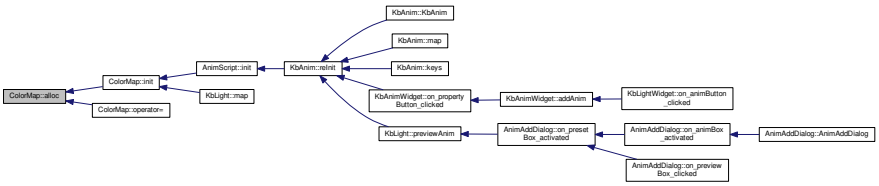

12.10.3.2 void ColorMap::clear ( )

Definition at line 45 of file colormap.cpp.

References _colors, and _count.

Referenced by alloc(), AnimScript::end(), and KbLight::resetIndicators().

```
45                      {
46     memset(_colors, 0, _count * sizeof(QRgb));
47 }
```

Here is the caller graph for this function:

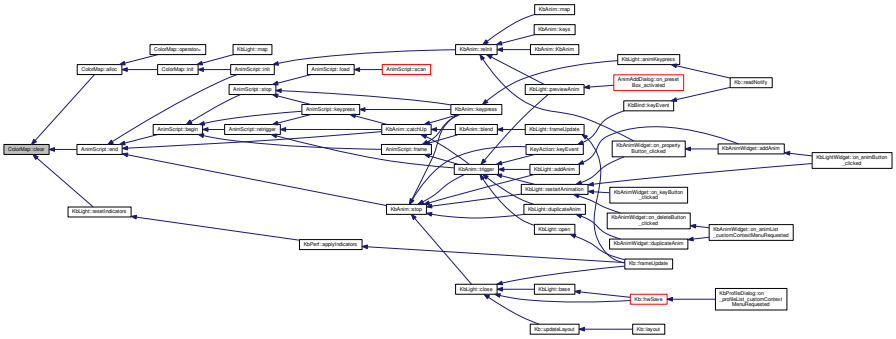

12.10.3.3 QRgb * ColorMap::colorForName (const char * *name*)

Definition at line 72 of file colormap.cpp.

References _colors, _count, _keyNames, and qs_strcmp().

Referenced by KbLight::base(), KbLight::color(), KeyWidget::paintEvent(), AnimScript::readProcess(), KbLight::rebuildBaseMap(), and KbLight::setIndicator().

```
72                                          {
73     if(!_keyNames)
74         return 0;
75     const char** namePtr = (const char**)bsearch(&name, _keyNames,
      _count, sizeof(const char*), qs_strcmp);
76     if(!namePtr)
77         return 0;
78     ptrdiff_t position = namePtr - _keyNames;
79     return _colors + position;
80 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

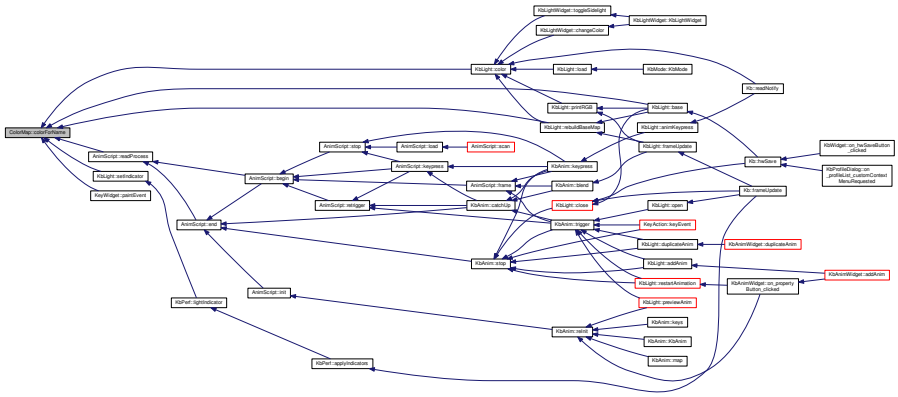

12.10.3.4 const QRgb * ColorMap::colorForName (const char * *name*) const

Definition at line 82 of file colormap.cpp.

References _colors, _count, _keyNames, and qs_strcmp().

```
82                                                          {
83     if(!_keyNames)
84         return 0;
85     const char** namePtr = (const char**)bsearch(&name, _keyNames,
       _count, sizeof(const char*), qs_strcmp);
86     if(!namePtr)
87         return 0;
88     ptrdiff_t position = namePtr - _keyNames;
89     return _colors + position;
90 }
```

Here is the call graph for this function:



12.10.3.5 QRgb* ColorMap::colors ( ) [inline]

Definition at line 32 of file colormap.h.

References _colors.

Referenced by KbLight::base(), KbAnim::blend(), KbLight::color(), KbLight::frameUpdate(), KbLight::printRGB(), and AnimScript::readProcess().

```
32 { return _colors; }
```

Here is the caller graph for this function:

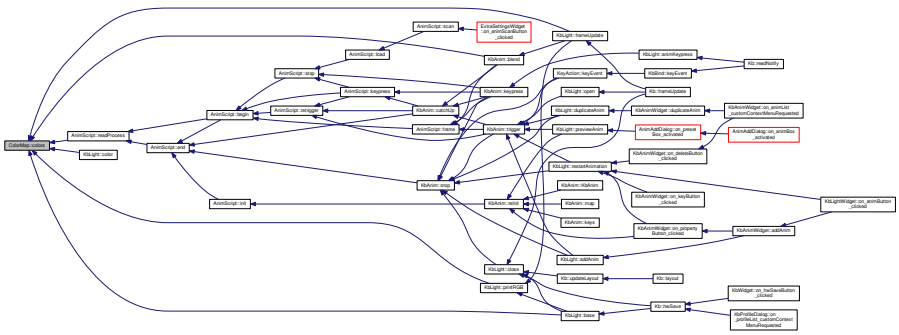

12.10.3.6 const QRgb* ColorMap::colors ( ) const [inline]

Definition at line 33 of file colormap.h.

References _colors.

```
33 { return _colors; }
```

12.10.3.7 int ColorMap::count ( ) const [inline]

Definition at line 30 of file colormap.h.

References _count.

Referenced by KbLight::base(), KbAnim::blend(), KbLight::color(), KbLight::frameUpdate(), KbLight::printRGB(), and AnimScript::readProcess().

```
30 { return _count; }
```

Here is the caller graph for this function:

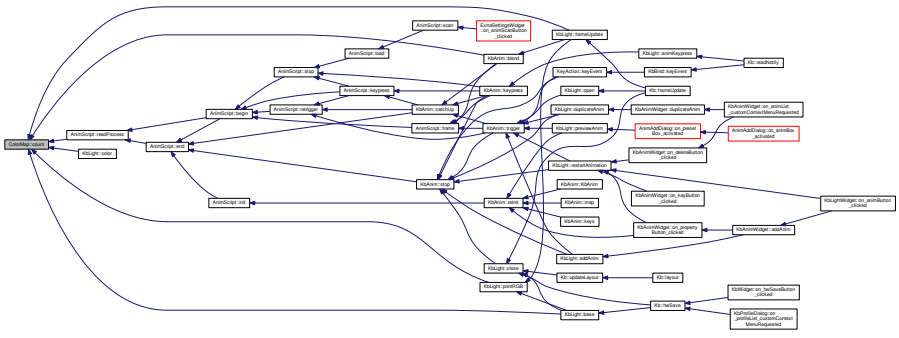

12.10.3.8 void ColorMap::deAlloc ( ) [private]

Definition at line 39 of file colormap.cpp.

References _colors, _count, _keyNames, and _mapCount.

Referenced by alloc(), and ~ColorMap().

```
39                      {
40     _count = _mapCount = 0;
41     if(_keyNames) delete[] _keyNames;
42     if(_colors) delete[] _colors;
43 }
```

Here is the caller graph for this function:

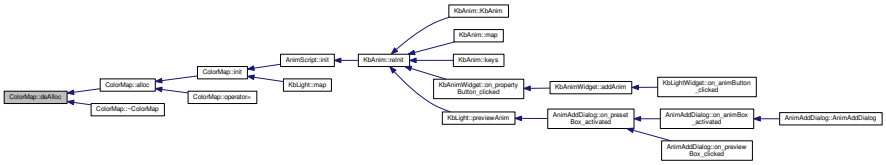

12.10.3.9 void ColorMap::init (const KeyMap & *map*)

Definition at line 53 of file colormap.cpp.

References _count, _keyNames, alloc(), Key::hasLed, Key::name, KeyMap::positions(), and qs_strcmp().

Referenced by AnimScript::init(), and KbLight::map().

```
53                                      {
54     QList<Key> newKeys = map.positions();
55     // There's no point including keys that don't have LEDs, so remove them now
56     QMutableListIterator<Key> i(newKeys);
57     while(i.hasNext()){
58         Key key = i.next();
59         if(!key.hasLed)
60             i.remove();
61     }
62     // Now that we know how many keys we'll have, check memory
63     alloc(newKeys.count());
64     // Copy key names
65     int keyPos = 0;
66     foreach(const Key& key, newKeys)
67         _keyNames[keyPos++] = key.name;      // as above, it's safe to copy these since the
       strings are constants
68     // Sort names for quick access
69     qsort(_keyNames, _count, sizeof(const char*), qs_strcmp);
70 }
```

Here is the call graph for this function:

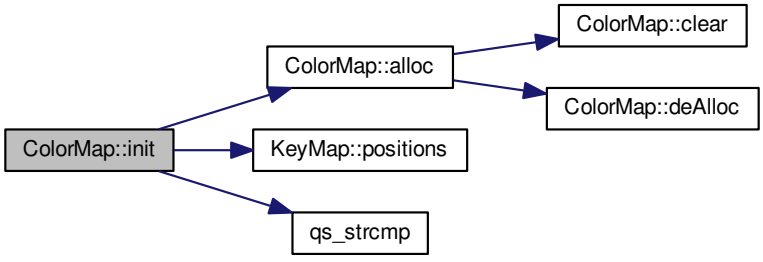

Here is the caller graph for this function:

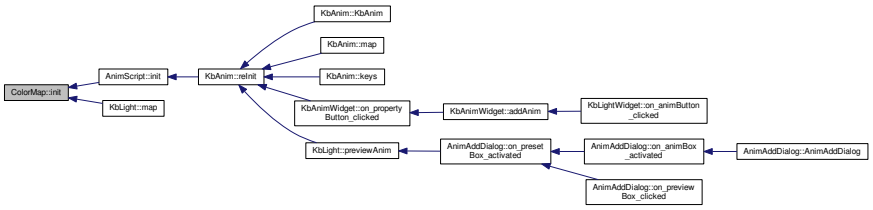

12.10.3.10 const char* const* ColorMap::keyNames ( ) const [inline]

Definition at line 31 of file colormap.h.

References _keyNames.

Referenced by KbLight::printRGB().

```
31 { return _keyNames; }
```

Here is the caller graph for this function:



12.10.3.11 const ColorMap & ColorMap::operator= (const ColorMap & *rhs*)

Definition at line 18 of file colormap.cpp.

References _colors, _count, _keyNames, and alloc().

```
18                                                  {
19     alloc(rhs._count);
20     // Copy key names and colors
21     // (Note: it's safe to copy the const char*'s because key names are constants and will never move or be
       deleted)
22     memcpy(_keyNames, rhs._keyNames, sizeof(const char*) *
      _count);
23     memcpy(_colors, rhs._colors, sizeof(QRgb) * _count);
24     return rhs;
25 }
```

Here is the call graph for this function:

12.10.4 Field Documentation

12.10.4.1 QRgb* ColorMap::_colors [private]

Definition at line 44 of file colormap.h.

Referenced by alloc(), clear(), colorForName(), colors(), deAlloc(), and operator=().

12.10.4.2 int ColorMap::_count [private]

Definition at line 45 of file colormap.h.

Referenced by alloc(), clear(), colorForName(), count(), deAlloc(), init(), and operator=().

12.10.4.3 const char** ColorMap::_keyNames [private]

Definition at line 43 of file colormap.h.

Referenced by alloc(), colorForName(), deAlloc(), init(), keyNames(), and operator=().

12.10.4.4 int ColorMap::_mapCount [private]

Definition at line 45 of file colormap.h.

Referenced by alloc(), and deAlloc().

The documentation for this class was generated from the following files:

- src/ckb/colormap.h
- src/ckb/colormap.cpp

12.11 Ui::ExtraSettingsWidget Class Reference

`#include <src/ckb/ui_extrasettingswidget.h>`

Inheritance diagram for Ui::ExtraSettingsWidget:

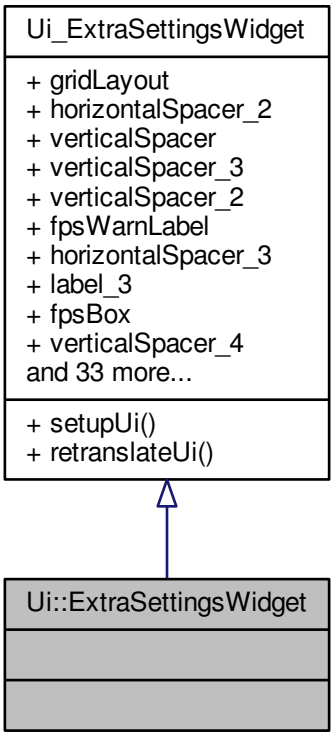

Collaboration diagram for Ui::ExtraSettingsWidget:

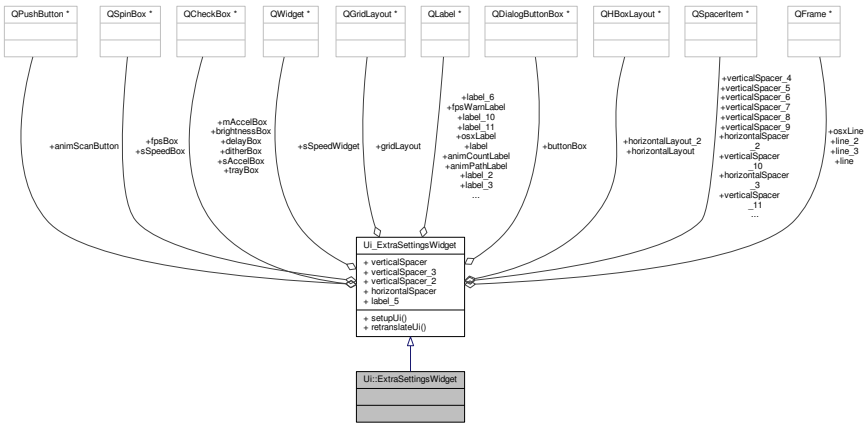

Public Member Functions

- void setupUi (QDialog *ExtraSettingsWidget)
- void retranslateUi (QDialog *ExtraSettingsWidget)

Data Fields

- QGridLayout * gridLayout
- QSpacerItem * horizontalSpacer_2
- QSpacerItem * verticalSpacer
- QSpacerItem * verticalSpacer_3
- QSpacerItem * verticalSpacer_2
- QLabel * fpsWarnLabel
- QSpacerItem * horizontalSpacer_3
- QLabel * label_3
- QSpinBox * fpsBox
- QSpacerItem * verticalSpacer_4
- QSpacerItem * verticalSpacer_9
- QLabel * label_6
- QSpacerItem * verticalSpacer_6
- QSpacerItem * verticalSpacer_5
- QCheckBox * sAccelBox
- QSpacerItem * verticalSpacer_7
- QSpacerItem * verticalSpacer_8
- QSpacerItem * verticalSpacer_10
- QSpacerItem * verticalSpacer_11
- QSpacerItem * horizontalSpacer
- QFrame * line_2
- QHBoxLayout * horizontalLayout
- QLabel * animPathLabel
- QLabel * animCountLabel
- QPushButton * animScanButton
- QCheckBox * brightnessBox
- QCheckBox * trayBox
- QLabel * label
- QFrame * line
- QLabel * label_5
- QFrame * line_3
- QLabel * label_2
- QCheckBox * ditherBox
- QCheckBox * delayBox
- QLabel * osxLabel
- QFrame * osxLine
- QCheckBox * mAccelBox
- QWidget * sSpeedWidget
- QHBoxLayout * horizontalLayout_2
- QLabel * label_10
- QSpinBox * sSpeedBox
- QLabel * label_11
- QDialogButtonBox * buttonBox

12.11.1 Detailed Description

Definition at line 366 of file ui_extrasettingswidget.h.

12.11.2 Member Function Documentation

12.11.2.1 void Ui_ExtraSettingsWidget::retranslateUi (QDialog * *ExtraSettingsWidget*) [inline],[inherited]

Definition at line 322 of file ui_extrasettingswidget.h.

References Ui_ExtraSettingsWidget::animCountLabel, Ui_ExtraSettingsWidget::animPathLabel, Ui_ExtraSettingsWidget::animScanButton, Ui_ExtraSettingsWidget::brightnessBox, Ui_ExtraSettingsWidget::delayBox, Ui_ExtraSettingsWidget::ditherBox, Ui_ExtraSettingsWidget::fpsWarnLabel, Ui_ExtraSettingsWidget::label, Ui_ExtraSettingsWidget::label_10, Ui_ExtraSettingsWidget::label_11, Ui_ExtraSettingsWidget::label_2, Ui_ExtraSettingsWidget::label_3, Ui_ExtraSettingsWidget::label_5, Ui_ExtraSettingsWidget::label_6, Ui_ExtraSettingsWidget::mAccelBox, Ui_ExtraSettingsWidget::osxLabel, Ui_ExtraSettingsWidget::sAccelBox, and Ui_ExtraSettingsWidget::trayBox.

Referenced by Ui_ExtraSettingsWidget::setupUi().

```
323     {
324         ExtraSettingsWidget->setWindowTitle(QApplication::translate("ExtraSettingsWidget", "Application
      Settings", Q_NULLPTR));
325         fpsWarnLabel->setText(QApplication::translate("ExtraSettingsWidget", "Warning: high
      frame rates may cause stability issues", Q_NULLPTR));
326         label_3->setText(QApplication::translate("ExtraSettingsWidget", "Frame rate (FPS):",
     Q_NULLPTR));
327         label_6->setText(QApplication::translate("ExtraSettingsWidget", "Location:", Q_NULLPTR));
328 #ifndef QT_NO_TOOLTIP
329         sAccelBox->setToolTip(QApplication::translate("ExtraSettingsWidget", "Try this if you're
      having problems with the scroll wheel.", Q_NULLPTR));
330 #endif // QT_NO_TOOLTIP
331         sAccelBox->setText(QApplication::translate("ExtraSettingsWidget", "Disable scroll
     acceleration", Q_NULLPTR));
332         animPathLabel->setText(QApplication::translate("ExtraSettingsWidget", "
    /path/to/animations", Q_NULLPTR));
333         animCountLabel->setText(QApplication::translate("ExtraSettingsWidget", "0 animations
     found", Q_NULLPTR));
334         animScanButton->setText(QApplication::translate("ExtraSettingsWidget", "Re-scan",
     Q_NULLPTR));
335 #ifndef QT_NO_TOOLTIP
336         brightnessBox->setToolTip(QApplication::translate("ExtraSettingsWidget", "By default,
      the same brightness level will be applied to all profiles and all devices. Enable this to store it with the
      lighting mode instead.", Q_NULLPTR));
337 #endif // QT_NO_TOOLTIP
338         brightnessBox->setText(QApplication::translate("ExtraSettingsWidget", "Set brightness
     per-mode", Q_NULLPTR));
339 #ifndef QT_NO_TOOLTIP
340         trayBox->setToolTip(QApplication::translate("ExtraSettingsWidget", "The tray icon will not
     be displayed. The application will still run in the background; re-launch the app to see the GUI again.",
     Q_NULLPTR));
341 #endif // QT_NO_TOOLTIP
342         trayBox->setText(QApplication::translate("ExtraSettingsWidget", "Hide tray icon", Q_NULLPTR)
    );
343         label->setText(QApplication::translate("ExtraSettingsWidget", "Behavior", Q_NULLPTR));
344         label_5->setText(QApplication::translate("ExtraSettingsWidget", "Animation scripts",
     Q_NULLPTR));
345         label_2->setText(QApplication::translate("ExtraSettingsWidget", "Hardware", Q_NULLPTR));
346 #ifndef QT_NO_TOOLTIP
347         ditherBox->setToolTip(QApplication::translate("ExtraSettingsWidget", "May improve
     appearance on some keyboards.", Q_NULLPTR));
348 #endif // QT_NO_TOOLTIP
349         ditherBox->setText(QApplication::translate("ExtraSettingsWidget", "Use spatial dithering
     to simulate extra color resolution", Q_NULLPTR));
350 #ifndef QT_NO_TOOLTIP
351         delayBox->setToolTip(QApplication::translate("ExtraSettingsWidget", "When using macros with
      strings longer than 25 chars, some OS may lose characters (e.g. Mint 17.2). Select to prevent that bug.",
     Q_NULLPTR));
352 #endif // QT_NO_TOOLTIP
353         delayBox->setText(QApplication::translate("ExtraSettingsWidget", "Use delay for very long
     macros", Q_NULLPTR));
354         osxLabel->setText(QApplication::translate("ExtraSettingsWidget", "OS X tweaks", Q_NULLPTR))
    ;
355 #ifndef QT_NO_TOOLTIP
356         mAccelBox->setToolTip(QApplication::translate("ExtraSettingsWidget", "Try this if you're
     having problems with mouse movement.", Q_NULLPTR));
357 #endif // QT_NO_TOOLTIP
358         mAccelBox->setText(QApplication::translate("ExtraSettingsWidget", "Disable mouse
     acceleration", Q_NULLPTR));
359         label_10->setText(QApplication::translate("ExtraSettingsWidget", "Scroll", Q_NULLPTR));
360         label_11->setText(QApplication::translate("ExtraSettingsWidget", "line(s) at a time",
     Q_NULLPTR));
361     } // retranslateUi
```

Here is the caller graph for this function:



12.11.2.2 void Ui_ExtraSettingsWidget::setupUi (QDialog * *ExtraSettingsWidget*) [inline],[inherited]

Definition at line 78 of file ui_extrasettingswidget.h.

References Ui_ExtraSettingsWidget::animCountLabel, Ui_ExtraSettingsWidget::animPathLabel, Ui_ExtraSettingsWidget::animScanButton, Ui_ExtraSettingsWidget::brightnessBox, Ui_ExtraSettingsWidget::buttonBox, Ui_ExtraSettingsWidget::delayBox, Ui_ExtraSettingsWidget::ditherBox, Ui_ExtraSettingsWidget::fpsBox, Ui_ExtraSettingsWidget::fpsWarnLabel, Ui_ExtraSettingsWidget::gridLayout, Ui_ExtraSettingsWidget::horizontalLayout, Ui_ExtraSettingsWidget::horizontalLayout_2, Ui_ExtraSettingsWidget::horizontalSpacer, Ui_ExtraSettingsWidget::horizontalSpacer_2, Ui_ExtraSettingsWidget::horizontalSpacer_3, Ui_ExtraSettingsWidget::label, Ui_ExtraSettingsWidget::label_10, Ui_ExtraSettingsWidget::label_11, Ui_ExtraSettingsWidget::label_2, Ui_ExtraSettingsWidget::label_3, Ui_ExtraSettingsWidget::label_5, Ui_ExtraSettingsWidget::label_6, Ui_ExtraSettingsWidget::line, Ui_ExtraSettingsWidget::line_2, Ui_ExtraSettingsWidget::line_3, Ui_ExtraSettingsWidget::mAccelBox, Ui_ExtraSettingsWidget::osxLabel, Ui_ExtraSettingsWidget::osxLine, Ui_ExtraSettingsWidget::retranslateUi(), Ui_ExtraSettingsWidget::sAccelBox, Ui_ExtraSettingsWidget::sSpeedBox, Ui_ExtraSettingsWidget::sSpeedWidget, Ui_ExtraSettingsWidget::trayBox, Ui_ExtraSettingsWidget::verticalSpacer, Ui_ExtraSettingsWidget::verticalSpacer_10, Ui_ExtraSettingsWidget::verticalSpacer_11, Ui_ExtraSettingsWidget::verticalSpacer_2, Ui_ExtraSettingsWidget::verticalSpacer_3, Ui_ExtraSettingsWidget::verticalSpacer_4, Ui_ExtraSettingsWidget::verticalSpacer_5, Ui_ExtraSettingsWidget::verticalSpacer_6, Ui_ExtraSettingsWidget::verticalSpacer_7, Ui_ExtraSettingsWidget::verticalSpacer_8, and Ui_ExtraSettingsWidget::verticalSpacer_9.

Referenced by ExtraSettingsWidget::ExtraSettingsWidget().

```
79     {
80         if (ExtraSettingsWidget->objectName().isEmpty())
81             ExtraSettingsWidget->setObjectName(QStringLiteral("ExtraSettingsWidget"));
82         ExtraSettingsWidget->resize(650, 515);
83         gridLayout = new QGridLayout(ExtraSettingsWidget);
84         gridLayout->setObjectName(QStringLiteral("gridLayout"));
85         horizontalSpacer_2 = new QSpacerItem(30, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
86
87         gridLayout->addItem(horizontalSpacer_2, 12, 2, 1, 1);
88
89         verticalSpacer = new QSpacerItem(0, 28, QSizePolicy::Minimum, QSizePolicy::Fixed);
90
91         gridLayout->addItem(verticalSpacer, 2, 0, 1, 1);
92
93         verticalSpacer_3 = new QSpacerItem(0, 28, QSizePolicy::Minimum, QSizePolicy::Fixed)
    ;
94
95         gridLayout->addItem(verticalSpacer_3, 3, 0, 1, 1);
96
97         verticalSpacer_2 = new QSpacerItem(20, 40, QSizePolicy::Minimum,
    QSizePolicy::Expanding);
98
99         gridLayout->addItem(verticalSpacer_2, 19, 5, 1, 1);
100
101         fpsWarnLabel = new QLabel(ExtraSettingsWidget);
102         fpsWarnLabel->setObjectName(QStringLiteral("fpsWarnLabel"));
103         QSizePolicy sizePolicy(QSizePolicy::Expanding, QSizePolicy::Preferred);
104         sizePolicy.setHorizontalStretch(0);
105         sizePolicy.setVerticalStretch(0);
106         sizePolicy.setHeightForWidth(fpsWarnLabel->sizePolicy().hasHeightForWidth());
107         fpsWarnLabel->setSizePolicy(sizePolicy);
108
109         gridLayout->addWidget(fpsWarnLabel, 12, 5, 1, 1);
110
111         horizontalSpacer_3 = new QSpacerItem(10, 20, QSizePolicy::Fixed,
```

```
    QSizePolicy::Minimum);
112
113         gridLayout->addItem(horizontalSpacer_3, 12, 4, 1, 1);
114
115         label_3 = new QLabel(ExtraSettingsWidget);
116         label_3->setObjectName(QStringLiteral("label_3"));
117
118         gridLayout->addWidget(label_3, 12, 1, 1, 1);
119
120         fpsBox = new QSpinBox(ExtraSettingsWidget);
121         fpsBox->setObjectName(QStringLiteral("fpsBox"));
122         fpsBox->setMinimum(5);
123         fpsBox->setMaximum(60);
124         fpsBox->setValue(30);
125
126         gridLayout->addWidget(fpsBox, 12, 3, 1, 1);
127
128         verticalSpacer_4 = new QSpacerItem(0, 28, QSizePolicy::Minimum, QSizePolicy::Fixed)
    ;
129
130         gridLayout->addItem(verticalSpacer_4, 7, 0, 1, 1);
131
132         verticalSpacer_9 = new QSpacerItem(0, 28, QSizePolicy::Minimum, QSizePolicy::Fixed)
    ;
133
134         gridLayout->addItem(verticalSpacer_9, 12, 0, 1, 1);
135
136         label_6 = new QLabel(ExtraSettingsWidget);
137         label_6->setObjectName(QStringLiteral("label_6"));
138
139         gridLayout->addWidget(label_6, 7, 1, 1, 1);
140
141         verticalSpacer_6 = new QSpacerItem(20, 10, QSizePolicy::Minimum, QSizePolicy::Fixed
    );
142
143         gridLayout->addItem(verticalSpacer_6, 8, 1, 1, 1);
144
145         verticalSpacer_5 = new QSpacerItem(20, 10, QSizePolicy::Minimum, QSizePolicy::Fixed
    );
146
147         gridLayout->addItem(verticalSpacer_5, 4, 1, 1, 1);
148
149         sAccelBox = new QCheckBox(ExtraSettingsWidget);
150         sAccelBox->setObjectName(QStringLiteral("sAccelBox"));
151
152         gridLayout->addWidget(sAccelBox, 18, 1, 1, 4);
153
154         verticalSpacer_7 = new QSpacerItem(20, 10, QSizePolicy::Minimum, QSizePolicy::Fixed
    );
155
156         gridLayout->addItem(verticalSpacer_7, 14, 1, 1, 1);
157
158         verticalSpacer_8 = new QSpacerItem(0, 28, QSizePolicy::Minimum, QSizePolicy::Fixed)
    ;
159
160         gridLayout->addItem(verticalSpacer_8, 13, 0, 1, 1);
161
162         verticalSpacer_10 = new QSpacerItem(0, 28, QSizePolicy::Minimum,
    QSizePolicy::Fixed);
163
164         gridLayout->addItem(verticalSpacer_10, 17, 0, 1, 1);
165
166         verticalSpacer_11 = new QSpacerItem(0, 28, QSizePolicy::Minimum,
    QSizePolicy::Fixed);
167
168         gridLayout->addItem(verticalSpacer_11, 18, 0, 1, 1);
169
170         horizontalSpacer = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
171
172         gridLayout->addItem(horizontalSpacer, 12, 6, 1, 1);
173
174         line_2 = new QFrame(ExtraSettingsWidget);
175         line_2->setObjectName(QStringLiteral("line_2"));
176         line_2->setFrameShape(QFrame::HLine);
177         line_2->setFrameShadow(QFrame::Sunken);
178
179         gridLayout->addWidget(line_2, 10, 0, 1, 7);
180
181         horizontalLayout = new QHBoxLayout();
182         horizontalLayout->setObjectName(QStringLiteral("horizontalLayout"));
183         animPathLabel = new QLabel(ExtraSettingsWidget);
184         animPathLabel->setObjectName(QStringLiteral("animPathLabel"));
185
186         horizontalLayout->addWidget(animPathLabel);
187
188         animCountLabel = new QLabel(ExtraSettingsWidget);
```

```
189         animCountLabel->setObjectName(QStringLiteral("animCountLabel"));
190         sizePolicy.setHeightForWidth(animCountLabel->sizePolicy().hasHeightForWidth());
191         animCountLabel->setSizePolicy(sizePolicy);
192         animCountLabel->setAlignment(Qt::AlignRight|Qt::AlignTrailing|Qt::AlignVCenter);
193 
194         horizontalLayout->addWidget(animCountLabel);
195 
196         animScanButton = new QPushButton(ExtraSettingsWidget);
197         animScanButton->setObjectName(QStringLiteral("animScanButton"));
198 
199         horizontalLayout->addWidget(animScanButton);
200 
201 
202         gridLayout->addLayout(horizontalLayout, 7, 3, 1, 4);
203 
204         brightnessBox = new QCheckBox(ExtraSettingsWidget);
205         brightnessBox->setObjectName(QStringLiteral("brightnessBox"));
206 
207         gridLayout->addWidget(brightnessBox, 3, 1, 1, 6);
208 
209         trayBox = new QCheckBox(ExtraSettingsWidget);
210         trayBox->setObjectName(QStringLiteral("trayBox"));
211 
212         gridLayout->addWidget(trayBox, 2, 1, 1, 6);
213 
214         label = new QLabel(ExtraSettingsWidget);
215         label->setObjectName(QStringLiteral("label"));
216         QFont font;
217         font.setBold(true);
218         font.setWeight(75);
219         label->setFont(font);
220 
221         gridLayout->addWidget(label, 0, 0, 1, 7);
222 
223         line = new QFrame(ExtraSettingsWidget);
224         line->setObjectName(QStringLiteral("line"));
225         line->setFrameShape(QFrame::HLine);
226         line->setFrameShadow(QFrame::Sunken);
227 
228         gridLayout->addWidget(line, 1, 0, 1, 7);
229 
230         label_5 = new QLabel(ExtraSettingsWidget);
231         label_5->setObjectName(QStringLiteral("label_5"));
232         label_5->setFont(font);
233 
234         gridLayout->addWidget(label_5, 5, 0, 1, 7);
235 
236         line_3 = new QFrame(ExtraSettingsWidget);
237         line_3->setObjectName(QStringLiteral("line_3"));
238         line_3->setFrameShape(QFrame::HLine);
239         line_3->setFrameShadow(QFrame::Sunken);
240 
241         gridLayout->addWidget(line_3, 6, 0, 1, 7);
242 
243         label_2 = new QLabel(ExtraSettingsWidget);
244         label_2->setObjectName(QStringLiteral("label_2"));
245         label_2->setFont(font);
246 
247         gridLayout->addWidget(label_2, 9, 0, 1, 7);
248 
249         ditherBox = new QCheckBox(ExtraSettingsWidget);
250         ditherBox->setObjectName(QStringLiteral("ditherBox"));
251 
252         gridLayout->addWidget(ditherBox, 13, 1, 1, 6);
253 
254         delayBox = new QCheckBox(ExtraSettingsWidget);
255         delayBox->setObjectName(QStringLiteral("delayBox"));
256 
257         gridLayout->addWidget(delayBox, 14, 1, 1, 6);
258 
259         osxLabel = new QLabel(ExtraSettingsWidget);
260         osxLabel->setObjectName(QStringLiteral("osxLabel"));
261         osxLabel->setFont(font);
262 
263         gridLayout->addWidget(osxLabel, 15, 0, 1, 7);
264 
265         osxLine = new QFrame(ExtraSettingsWidget);
266         osxLine->setObjectName(QStringLiteral("osxLine"));
267         osxLine->setFrameShape(QFrame::HLine);
268         osxLine->setFrameShadow(QFrame::Sunken);
269 
270         gridLayout->addWidget(osxLine, 16, 0, 1, 7);
271 
272         mAccelBox = new QCheckBox(ExtraSettingsWidget);
273         mAccelBox->setObjectName(QStringLiteral("mAccelBox"));
274 
275         gridLayout->addWidget(mAccelBox, 17, 1, 1, 6);
```

```
276
277         sSpeedWidget = new QWidget(ExtraSettingsWidget);
278         sSpeedWidget->setObjectName(QStringLiteral("sSpeedWidget"));
279         sizePolicy.setHeightForWidth(sSpeedWidget->sizePolicy().hasHeightForWidth());
280         sSpeedWidget->setSizePolicy(sizePolicy);
281         horizontalLayout_2 = new QHBoxLayout(sSpeedWidget);
282         horizontalLayout_2->setObjectName(QStringLiteral("horizontalLayout_2"));
283         horizontalLayout_2->setContentsMargins(0, 0, 0, 0);
284         label_10 = new QLabel(sSpeedWidget);
285         label_10->setObjectName(QStringLiteral("label_10"));
286
287         horizontalLayout_2->addWidget(label_10);
288
289         sSpeedBox = new QSpinBox(sSpeedWidget);
290         sSpeedBox->setObjectName(QStringLiteral("sSpeedBox"));
291         sSpeedBox->setMinimum(1);
292         sSpeedBox->setMaximum(10);
293         sSpeedBox->setValue(3);
294
295         horizontalLayout_2->addWidget(sSpeedBox);
296
297         label_11 = new QLabel(sSpeedWidget);
298         label_11->setObjectName(QStringLiteral("label_11"));
299         sizePolicy.setHeightForWidth(label_11->sizePolicy().hasHeightForWidth());
300         label_11->setSizePolicy(sizePolicy);
301
302         horizontalLayout_2->addWidget(label_11);
303
304
305         gridLayout->addWidget(sSpeedWidget, 18, 5, 1, 2);
306
307         buttonBox = new QDialogButtonBox(ExtraSettingsWidget);
308         buttonBox->setObjectName(QStringLiteral("buttonBox"));
309         buttonBox->setOrientation(Qt::Horizontal);
310         buttonBox->setStandardButtons(QDialogButtonBox::Ok);
311
312         gridLayout->addWidget(buttonBox, 20, 0, 1, 7);
313
314
315         retranslateUi(ExtraSettingsWidget);
316         QObject::connect(buttonBox, SIGNAL(accepted()), ExtraSettingsWidget, SLOT(accept()));
317         QObject::connect(buttonBox, SIGNAL(rejected()), ExtraSettingsWidget, SLOT(reject()));
318
319         QMetaObject::connectSlotsByName(ExtraSettingsWidget);
320     } // setupUi
```

Here is the call graph for this function:



Here is the caller graph for this function:



12.11.3 Field Documentation

12.11.3.1 QLabel* Ui_ExtraSettingsWidget::animCountLabel [inherited]

Definition at line 57 of file ui_extrasettingswidget.h.

Referenced by ExtraSettingsWidget::on_animScanButton_clicked(), Ui_ExtraSettingsWidget::retranslateUi(), and Ui_ExtraSettingsWidget::setupUi().

12.11.3.2 QLabel* Ui_ExtraSettingsWidget::animPathLabel [inherited]

Definition at line 56 of file ui_extrasettingswidget.h.

Referenced by ExtraSettingsWidget::ExtraSettingsWidget(), Ui_ExtraSettingsWidget::retranslateUi(), and Ui_ExtraSettingsWidget::setupUi().

12.11.3.3 QPushButton* Ui_ExtraSettingsWidget::animScanButton [inherited]

Definition at line 58 of file ui_extrasettingswidget.h.

Referenced by Ui_ExtraSettingsWidget::retranslateUi(), and Ui_ExtraSettingsWidget::setupUi().

12.11.3.4 QCheckBox* Ui_ExtraSettingsWidget::brightnessBox [inherited]

Definition at line 59 of file ui_extrasettingswidget.h.

Referenced by ExtraSettingsWidget::ExtraSettingsWidget(), Ui_ExtraSettingsWidget::retranslateUi(), and Ui_ExtraSettingsWidget::setupUi().

12.11.3.5 QDialogButtonBox* Ui_ExtraSettingsWidget::buttonBox [inherited]

Definition at line 76 of file ui_extrasettingswidget.h.

Referenced by Ui_ExtraSettingsWidget::setupUi().

12.11.3.6 QCheckBox* Ui_ExtraSettingsWidget::delayBox [inherited]

Definition at line 67 of file ui_extrasettingswidget.h.

Referenced by ExtraSettingsWidget::ExtraSettingsWidget(), Ui_ExtraSettingsWidget::retranslateUi(), and Ui_ExtraSettingsWidget::setupUi().

12.11.3.7 QCheckBox* Ui_ExtraSettingsWidget::ditherBox [inherited]

Definition at line 66 of file ui_extrasettingswidget.h.

Referenced by ExtraSettingsWidget::ExtraSettingsWidget(), Ui_ExtraSettingsWidget::retranslateUi(), and Ui_ExtraSettingsWidget::setupUi().

12.11.3.8 QSpinBox* Ui_ExtraSettingsWidget::fpsBox [inherited]

Definition at line 42 of file ui_extrasettingswidget.h.

Referenced by ExtraSettingsWidget::ExtraSettingsWidget(), and Ui_ExtraSettingsWidget::setupUi().

12.11.3.9 QLabel* Ui_ExtraSettingsWidget::fpsWarnLabel [inherited]

Definition at line 39 of file ui_extrasettingswidget.h.

Referenced by ExtraSettingsWidget::ExtraSettingsWidget(), ExtraSettingsWidget::on_fpsBox_valueChanged(), Ui_ExtraSettingsWidget::retranslateUi(), and Ui_ExtraSettingsWidget::setupUi().

12.11.3.10 QGridLayout* Ui_ExtraSettingsWidget::gridLayout [inherited]

Definition at line 34 of file ui_extrasettingswidget.h.

Referenced by Ui_ExtraSettingsWidget::setupUi().

12.11.3.11 QHBoxLayout* Ui_ExtraSettingsWidget::horizontalLayout [inherited]

Definition at line 55 of file ui_extrasettingswidget.h.

Referenced by Ui_ExtraSettingsWidget::setupUi().

12.11.3.12 QHBoxLayout* Ui_ExtraSettingsWidget::horizontalLayout_2 [inherited]

Definition at line 72 of file ui_extrasettingswidget.h.

Referenced by Ui_ExtraSettingsWidget::setupUi().

12.11.3.13 QSpacerItem* Ui_ExtraSettingsWidget::horizontalSpacer [inherited]

Definition at line 53 of file ui_extrasettingswidget.h.

Referenced by Ui_ExtraSettingsWidget::setupUi().

12.11.3.14 QSpacerItem* Ui_ExtraSettingsWidget::horizontalSpacer_2 [inherited]

Definition at line 35 of file ui_extrasettingswidget.h.

Referenced by Ui_ExtraSettingsWidget::setupUi().

12.11.3.15 QSpacerItem* Ui_ExtraSettingsWidget::horizontalSpacer_3 [inherited]

Definition at line 40 of file ui_extrasettingswidget.h.

Referenced by Ui_ExtraSettingsWidget::setupUi().

12.11.3.16 QLabel* Ui_ExtraSettingsWidget::label [inherited]

Definition at line 61 of file ui_extrasettingswidget.h.

Referenced by Ui_ExtraSettingsWidget::retranslateUi(), and Ui_ExtraSettingsWidget::setupUi().

12.11.3.17 QLabel* Ui_ExtraSettingsWidget::label_10 [inherited]

Definition at line 73 of file ui_extrasettingswidget.h.

Referenced by Ui_ExtraSettingsWidget::retranslateUi(), and Ui_ExtraSettingsWidget::setupUi().

12.11.3.18 QLabel* Ui_ExtraSettingsWidget::label_11 [inherited]

Definition at line 75 of file ui_extrasettingswidget.h.

Referenced by Ui_ExtraSettingsWidget::retranslateUi(), and Ui_ExtraSettingsWidget::setupUi().

12.11.3.19 QLabel* Ui_ExtraSettingsWidget::label_2 [inherited]

Definition at line 65 of file ui_extrasettingswidget.h.

Referenced by Ui_ExtraSettingsWidget::retranslateUi(), and Ui_ExtraSettingsWidget::setupUi().

12.11.3.20 QLabel* Ui_ExtraSettingsWidget::label_3 [inherited]

Definition at line 41 of file ui_extrasettingswidget.h.

Referenced by Ui_ExtraSettingsWidget::retranslateUi(), and Ui_ExtraSettingsWidget::setupUi().

12.11.3.21 QLabel* Ui_ExtraSettingsWidget::label_5 [inherited]

Definition at line 63 of file ui_extrasettingswidget.h.

Referenced by Ui_ExtraSettingsWidget::retranslateUi(), and Ui_ExtraSettingsWidget::setupUi().

12.11.3.22 QLabel* Ui_ExtraSettingsWidget::label_6 [inherited]

Definition at line 45 of file ui_extrasettingswidget.h.

Referenced by Ui_ExtraSettingsWidget::retranslateUi(), and Ui_ExtraSettingsWidget::setupUi().

12.11.3.23 QFrame* Ui_ExtraSettingsWidget::line [inherited]

Definition at line 62 of file ui_extrasettingswidget.h.

Referenced by Ui_ExtraSettingsWidget::setupUi().

12.11.3.24 QFrame* Ui_ExtraSettingsWidget::line_2 [inherited]

Definition at line 54 of file ui_extrasettingswidget.h.

Referenced by Ui_ExtraSettingsWidget::setupUi().

12.11.3.25 QFrame* Ui_ExtraSettingsWidget::line_3 [inherited]

Definition at line 64 of file ui_extrasettingswidget.h.

Referenced by Ui_ExtraSettingsWidget::setupUi().

12.11.3.26 QCheckBox* Ui_ExtraSettingsWidget::mAccelBox [inherited]

Definition at line 70 of file ui_extrasettingswidget.h.

Referenced by ExtraSettingsWidget::ExtraSettingsWidget(), Ui_ExtraSettingsWidget::retranslateUi(), and Ui_ExtraSettingsWidget::setupUi().

12.11.3.27 QLabel* Ui_ExtraSettingsWidget::osxLabel [inherited]

Definition at line 68 of file ui_extrasettingswidget.h.

Referenced by ExtraSettingsWidget::ExtraSettingsWidget(), Ui_ExtraSettingsWidget::retranslateUi(), and Ui_ExtraSettingsWidget::setupUi().

12.11.3.28 QFrame* Ui_ExtraSettingsWidget::osxLine [inherited]

Definition at line 69 of file ui_extrasettingswidget.h.

Referenced by ExtraSettingsWidget::ExtraSettingsWidget(), and Ui_ExtraSettingsWidget::setupUi().

12.11.3.29 QCheckBox* Ui_ExtraSettingsWidget::sAccelBox [inherited]

Definition at line 48 of file ui_extrasettingswidget.h.

Referenced by ExtraSettingsWidget::ExtraSettingsWidget(), ExtraSettingsWidget::on_sSpeedBox_valueChanged(), Ui_ExtraSettingsWidget::retranslateUi(), and Ui_ExtraSettingsWidget::setupUi().

12.11.3.30 QSpinBox* Ui_ExtraSettingsWidget::sSpeedBox [inherited]

Definition at line 74 of file ui_extrasettingswidget.h.

Referenced by ExtraSettingsWidget::ExtraSettingsWidget(), ExtraSettingsWidget::on_sAccelBox_clicked(), and Ui_ExtraSettingsWidget::setupUi().

12.11.3.31 QWidget* Ui_ExtraSettingsWidget::sSpeedWidget [inherited]

Definition at line 71 of file ui_extrasettingswidget.h.

Referenced by ExtraSettingsWidget::ExtraSettingsWidget(), ExtraSettingsWidget::on_sAccelBox_clicked(), and Ui_ExtraSettingsWidget::setupUi().

12.11.3.32 QCheckBox* Ui_ExtraSettingsWidget::trayBox [inherited]

Definition at line 60 of file ui_extrasettingswidget.h.

Referenced by ExtraSettingsWidget::ExtraSettingsWidget(), Ui_ExtraSettingsWidget::retranslateUi(), and Ui_ExtraSettingsWidget::setupUi().

12.11.3.33 QSpacerItem* Ui_ExtraSettingsWidget::verticalSpacer [inherited]

Definition at line 36 of file ui_extrasettingswidget.h.

Referenced by Ui_ExtraSettingsWidget::setupUi().

12.11.3.34 QSpacerItem* Ui_ExtraSettingsWidget::verticalSpacer_10 [inherited]

Definition at line 51 of file ui_extrasettingswidget.h.

Referenced by Ui_ExtraSettingsWidget::setupUi().

12.11.3.35 QSpacerItem* Ui_ExtraSettingsWidget::verticalSpacer_11 [inherited]

Definition at line 52 of file ui_extrasettingswidget.h.

Referenced by Ui_ExtraSettingsWidget::setupUi().

12.11.3.36 QSpacerItem* Ui_ExtraSettingsWidget::verticalSpacer_2 [inherited]

Definition at line 38 of file ui_extrasettingswidget.h.

Referenced by Ui_ExtraSettingsWidget::setupUi().

12.11.3.37 QSpacerItem* Ui_ExtraSettingsWidget::verticalSpacer_3 [inherited]

Definition at line 37 of file ui_extrasettingswidget.h.

Referenced by Ui_ExtraSettingsWidget::setupUi().

12.11.3.38 QSpacerItem* Ui_ExtraSettingsWidget::verticalSpacer_4 [inherited]

Definition at line 43 of file ui_extrasettingswidget.h.

Referenced by Ui_ExtraSettingsWidget::setupUi().

12.11.3.39 QSpacerItem* Ui_ExtraSettingsWidget::verticalSpacer_5 [inherited]

Definition at line 47 of file ui_extrasettingswidget.h.

Referenced by Ui_ExtraSettingsWidget::setupUi().

12.11.3.40 QSpacerItem* Ui_ExtraSettingsWidget::verticalSpacer_6 [inherited]

Definition at line 46 of file ui_extrasettingswidget.h.

Referenced by Ui_ExtraSettingsWidget::setupUi().

12.11.3.41 QSpacerItem* Ui_ExtraSettingsWidget::verticalSpacer_7 [inherited]

Definition at line 49 of file ui_extrasettingswidget.h.

Referenced by Ui_ExtraSettingsWidget::setupUi().

12.11.3.42 QSpacerItem* Ui_ExtraSettingsWidget::verticalSpacer_8 [inherited]

Definition at line 50 of file ui_extrasettingswidget.h.

Referenced by Ui_ExtraSettingsWidget::setupUi().

12.11.3.43 QSpacerItem* Ui_ExtraSettingsWidget::verticalSpacer_9 [inherited]

Definition at line 44 of file ui_extrasettingswidget.h.

Referenced by Ui_ExtraSettingsWidget::setupUi().

The documentation for this class was generated from the following file:

- src/ckb/ui_extrasettingswidget.h

12.12 ExtraSettingsWidget Class Reference

`#include <src/ckb/extrasettingswidget.h>`

Inheritance diagram for ExtraSettingsWidget:

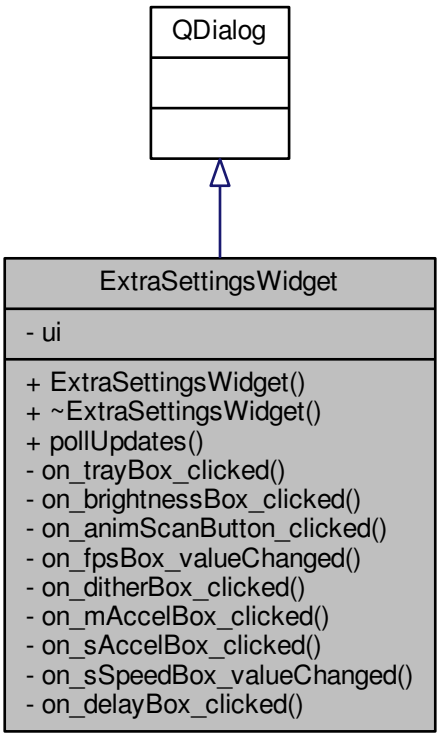

Collaboration diagram for ExtraSettingsWidget:

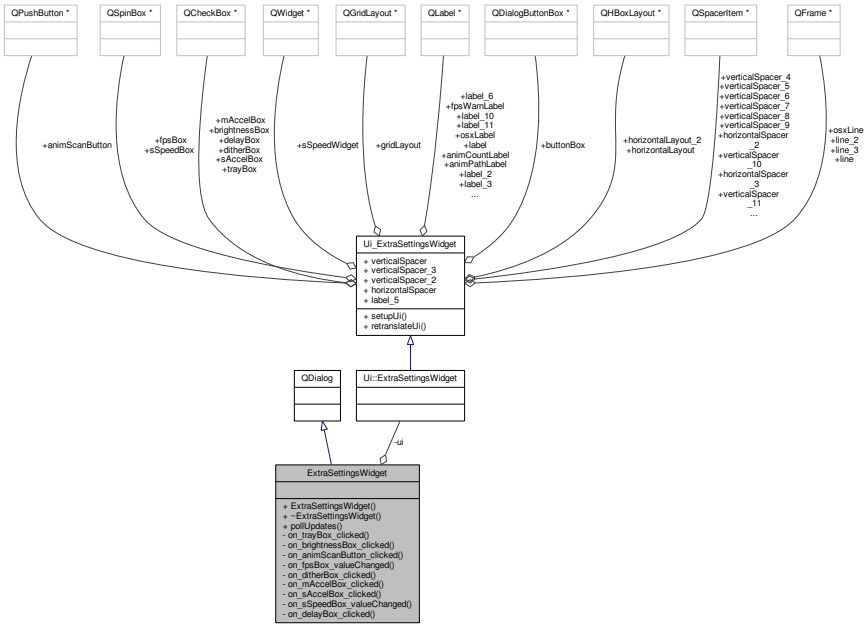

Public Member Functions

- ExtraSettingsWidget (QWidget ∗parent=0)
- ∼ExtraSettingsWidget ()
- void pollUpdates ()

Private Slots

- void on_trayBox_clicked (bool checked)
- void on_brightnessBox_clicked (bool checked)
- void on_animScanButton_clicked ()
- void on_fpsBox_valueChanged (int arg1)
- void on_ditherBox_clicked (bool checked)
- void on_mAccelBox_clicked (bool checked)
- void on_sAccelBox_clicked (bool checked)
- void on_sSpeedBox_valueChanged (int arg1)
- void on_delayBox_clicked (bool checked)

Private Attributes

- Ui::ExtraSettingsWidget ∗ ui

12.12.1 Detailed Description

Definition at line 10 of file extrasettingswidget.h.

12.12.2 Constructor & Destructor Documentation

12.12.2.1 ExtraSettingsWidget::ExtraSettingsWidget (QWidget * *parent* = 0) [explicit]

Read Macro Delay setting, update UI and Kb-internal flag

Definition at line 10 of file extrasettingswidget.cpp.

References Ui_ExtraSettingsWidget::animPathLabel, Ui_ExtraSettingsWidget::brightnessBox, Ui_ExtraSettingsWidget::delayBox, Kb::dither(), Ui_ExtraSettingsWidget::ditherBox, Ui_ExtraSettingsWidget::fpsBox, Ui_ExtraSettingsWidget::fpsWarnLabel, Kb::frameRate(), lastSharedDimming, Ui_ExtraSettingsWidget::mAccelBox, Kb::macroDelay(), KbLight::MAX_DIM, Kb::mouseAccel(), on_animScanButton_clicked(), Ui_ExtraSettingsWidget::osxLabel, Ui_ExtraSettingsWidget::osxLine, AnimScript::path(), Ui_ExtraSettingsWidget::sAccelBox, Kb::scrollSpeed(), Ui_ExtraSettingsWidget::setupUi(), KbLight::shareDimming(), Ui_ExtraSettingsWidget::sSpeedBox, Ui_ExtraSettingsWidget::sSpeedWidget, Ui_ExtraSettingsWidget::trayBox, ui, and CkbSettings::value().

```
10                                                      :
11     QDialog(parent),
12     ui(new Ui::ExtraSettingsWidget)
13 {
14     ui->setupUi(this);
15     CkbSettings settings("Program");
16
17     // Read frame rate from settings
18     int rate = settings.value("framerate").toInt();
19     if(rate <= 0 || rate > 60)
20         rate = 30;
21     ui->fpsBox->setValue(rate);
22     Kb::frameRate(rate);
23     ui->fpsWarnLabel->setVisible(rate > 30);
24
25     // Read global brightness setting (default = on, 100% brightness)
26     int dimming = settings.value("GlobalBrightness").toInt();
27     if(dimming < -1 || dimming > KbLight::MAX_DIM)
28         dimming = 0;
29     lastSharedDimming = dimming;
30     KbLight::shareDimming(dimming);
31     // Set checkbox value (-1 = don't share)
32     ui->brightnessBox->setChecked(dimming == -1);
33
34     // Read dither
35     bool dither = settings.value("Dither").toBool();
36     Kb::dither(dither);
37     ui->ditherBox->setChecked(dither);
38
39 #ifdef Q_OS_MACX
40     // Read OSX settings
41     bool noAccel = settings.value("DisableMouseAccel").toBool();
42     Kb::mouseAccel(!noAccel);
43     ui->mAccelBox->setChecked(noAccel);
44     bool noScrollAccel = settings.value("DisableScrollAccel").toBool();
45     int scrollSpeed = settings.value("ScrollSpeed", 3).toInt();
46     ui->sAccelBox->setChecked(noScrollAccel);
47     ui->sSpeedBox->setValue(scrollSpeed);
48     Kb::scrollSpeed(noScrollAccel ? scrollSpeed : 0);
49     if(!noScrollAccel)
50         ui->sSpeedWidget->hide();
51 #else
52     // Hide all OSX options on Linux
53     ui->osxLabel->hide();
54     ui->osxLine->hide();
55     ui->mAccelBox->hide();
56     ui->sAccelBox->hide();
57     ui->sSpeedWidget->hide();
58 #endif
59
60     // Read tray icon setting
61     ui->trayBox->setChecked(settings.value("SuppressTrayIcon").toBool());
62
63     // Update animation info
64     ui->animPathLabel->setText(AnimScript::path());
65     on_animScanButton_clicked();
66
67     bool macroDelay = settings.value("MacroDelay").toBool();
68     Kb::macroDelay(macroDelay);
69     ui->delayBox->setChecked(macroDelay);
70 }
```

Here is the call graph for this function:

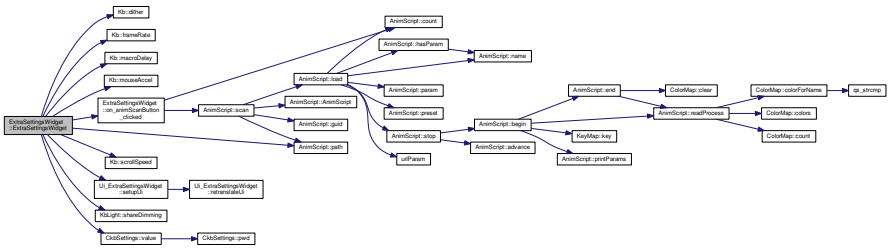

12.12.2.2 ExtraSettingsWidget::~ExtraSettingsWidget ( )

Definition at line 73 of file extrasettingswidget.cpp.

References ui.

```
73                                          {
74     delete ui;
75 }
```

12.12.3 Member Function Documentation

12.12.3.1 void ExtraSettingsWidget::on_animScanButton_clicked ( ) [private], [slot]

Definition at line 87 of file extrasettingswidget.cpp.

References Ui_ExtraSettingsWidget::animCountLabel, AnimScript::count(), AnimScript::scan(), and ui.

Referenced by ExtraSettingsWidget().

```
87                                                  {
88     AnimScript::scan();
89     int count = AnimScript::count();
90     if(count == 0)
91         ui->animCountLabel->setText("No animations found");
92     else if(count == 1)
93         ui->animCountLabel->setText("1 animation found");
94     else
95         ui->animCountLabel->setText(QString("%1 animations found").arg(count));
96 }
```

Here is the call graph for this function:

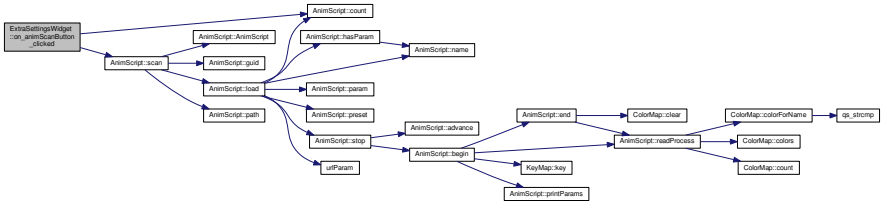

Here is the caller graph for this function:



12.12.3.2 void ExtraSettingsWidget::on_brightnessBox_clicked (bool *checked*) [private], [slot]

Definition at line 82 of file extrasettingswidget.cpp.

References pollUpdates(), and KbLight::shareDimming().

```
82                                                          {
83     KbLight::shareDimming(checked ? -1 : 0);
84     pollUpdates();
85 }
```

Here is the call graph for this function:

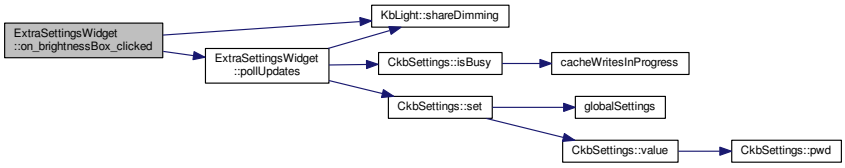

12.12.3.3 void ExtraSettingsWidget::on_delayBox_clicked (bool *checked*) [private], [slot]

Definition at line 143 of file extrasettingswidget.cpp.

References Kb::macroDelay(), and CkbSettings::set().

```
143                                                          {
144     CkbSettings::set("Program/MacroDelay", checked);
145     Kb::macroDelay(checked);
146 }
```

Here is the call graph for this function:



12.12.3.4 void ExtraSettingsWidget::on_ditherBox_clicked (bool *checked*) [private], [slot]

Definition at line 110 of file extrasettingswidget.cpp.

References Kb::dither(), and CkbSettings::set().

```
110                                                     {
111     CkbSettings::set("Program/Dither", checked);
112     Kb::dither(checked);
113 }
```

Here is the call graph for this function:



12.12.3.5 void ExtraSettingsWidget::on_fpsBox_valueChanged (int *arg1*) [private], [slot]

Definition at line 98 of file extrasettingswidget.cpp.

References Ui_ExtraSettingsWidget::fpsWarnLabel, Kb::frameRate(), CkbSettings::setValue(), and ui.

```
98                                                      {
99     // Set FPS
100     CkbSettings settings("Program");
101     settings.setValue("framerate", arg1);
102     Kb::frameRate(arg1);
103     // Show warning label if FPS is above 30
104     if(arg1 > 30)
105         ui->fpsWarnLabel->show();
106     else
107         ui->fpsWarnLabel->hide();
108 }
```

Here is the call graph for this function:



12.12.3.6 void ExtraSettingsWidget::on_mAccelBox_clicked (bool *checked*) [private], [slot]

Definition at line 124 of file extrasettingswidget.cpp.

References Kb::mouseAccel(), and CkbSettings::set().

```
124                                                     {
125     CkbSettings::set("Program/DisableMouseAccel", checked);
126     Kb::mouseAccel(!checked);
127 }
```

Here is the call graph for this function:



12.12.3.7 void ExtraSettingsWidget::on_sAccelBox_clicked (bool *checked*) [private], [slot]

Definition at line 129 of file extrasettingswidget.cpp.

References Kb::scrollSpeed(), CkbSettings::set(), Ui_ExtraSettingsWidget::sSpeedBox, Ui_ExtraSettingsWidget::sSpeedWidget, and ui.

```
129                                                         {
130     CkbSettings::set("Program/DisableScrollAccel", checked);
131     Kb::scrollSpeed(checked ? ui->sSpeedBox->value() : 0);
132     if(checked)
133         ui->sSpeedWidget->show();
134     else
135         ui->sSpeedWidget->hide();
136 }
```

Here is the call graph for this function:



12.12.3.8 void ExtraSettingsWidget::on_sSpeedBox_valueChanged (int *arg1*) [private], [slot]

Definition at line 138 of file extrasettingswidget.cpp.

References Ui_ExtraSettingsWidget::sAccelBox, Kb::scrollSpeed(), CkbSettings::set(), and ui.

```
138                                                         {
139     CkbSettings::set("Program/ScrollSpeed", arg1);
140     Kb::scrollSpeed(ui->sAccelBox->isChecked() ? arg1 : 0);
141 }
```

Here is the call graph for this function:



12.12.3.9 void ExtraSettingsWidget::on_trayBox_clicked (bool *checked*) [private], [slot]

Definition at line 77 of file extrasettingswidget.cpp.

References MainWindow::mainWindow, CkbSettings::set(), and MainWindow::toggleTrayIcon().

```
77                                                      {
78     CkbSettings::set("Program/SuppressTrayIcon", checked);
79     MainWindow::mainWindow->toggleTrayIcon(!checked);
80 }
```

Here is the call graph for this function:



12.12.3.10 void ExtraSettingsWidget::pollUpdates ( )

Definition at line 115 of file extrasettingswidget.cpp.

References CkbSettings::isBusy(), lastSharedDimming, CkbSettings::set(), and KbLight::shareDimming().

Referenced by on_brightnessBox_clicked(), and SettingsWidget::pollUpdates().

```
115                                     {
116     // Check for changes to shared brightness setting
117     int dimming = KbLight::shareDimming();
118     if(dimming != lastSharedDimming && !CkbSettings::isBusy()){
119         CkbSettings::set("Program/GlobalBrightness", dimming);
120         lastSharedDimming = dimming;
121     }
122 }
```

Here is the call graph for this function:

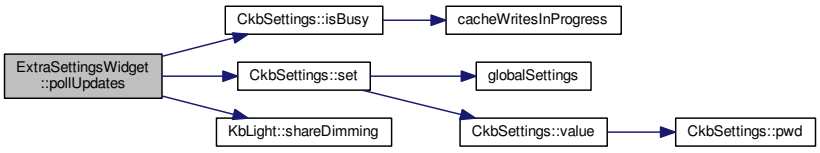

Here is the caller graph for this function:



12.12.4 Field Documentation

12.12.4.1 Ui::ExtraSettingsWidget* ExtraSettingsWidget::ui [private]

Definition at line 33 of file extrasettingswidget.h.

Referenced by ExtraSettingsWidget(), on_animScanButton_clicked(), on_fpsBox_valueChanged(), on_sAccelBox_clicked(), on_sSpeedBox_valueChanged(), and ~ExtraSettingsWidget().

The documentation for this class was generated from the following files:

- src/ckb/extrasettingswidget.h
- src/ckb/extrasettingswidget.cpp

12.13 KbFirmware::FW Struct Reference

Collaboration diagram for KbFirmware::FW:

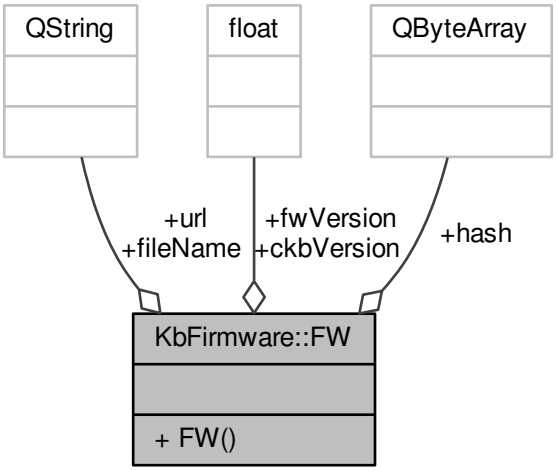

Public Member Functions

- FW ()

Data Fields

- QString url
- QString fileName
- QByteArray hash
- float fwVersion
- float ckbVersion

12.13.1 Detailed Description

Definition at line 34 of file kbfirmware.h.

12.13.2 Constructor & Destructor Documentation

12.13.2.1 KbFirmware::FW::FW ( )

Definition at line 12 of file kbfirmware.cpp.

```
12 : fwVersion(0.f), ckbVersion(0.f) {}
```

12.13.3 Field Documentation

12.13.3.1 float KbFirmware::FW::ckbVersion

Definition at line 37 of file kbfirmware.h.

Referenced by KbFirmware::_latestForBoard(), and KbFirmware::processDownload().

12.13.3.2 QString KbFirmware::FW::fileName

Definition at line 35 of file kbfirmware.h.

Referenced by KbFirmware::_fileForBoard(), and KbFirmware::processDownload().

12.13.3.3 float KbFirmware::FW::fwVersion

Definition at line 37 of file kbfirmware.h.

Referenced by KbFirmware::_latestForBoard(), and KbFirmware::processDownload().

12.13.3.4 QByteArray KbFirmware::FW::hash

Definition at line 36 of file kbfirmware.h.

Referenced by KbFirmware::_fileForBoard(), KbFirmware::_latestForBoard(), and KbFirmware::processDownload().

12.13.3.5 QString KbFirmware::FW::url

Definition at line 35 of file kbfirmware.h.

Referenced by KbFirmware::_fileForBoard(), and KbFirmware::processDownload().

The documentation for this struct was generated from the following files:

- src/ckb/kbfirmware.h
- src/ckb/kbfirmware.cpp

12.14 FwUpgradeDialog Class Reference

```
#include <src/ckb/fwupgradedialog.h>
```

Inheritance diagram for FwUpgradeDialog:

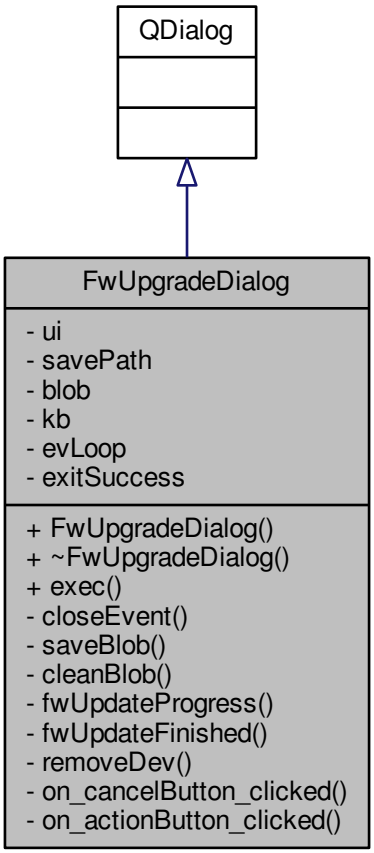

Collaboration diagram for FwUpgradeDialog:

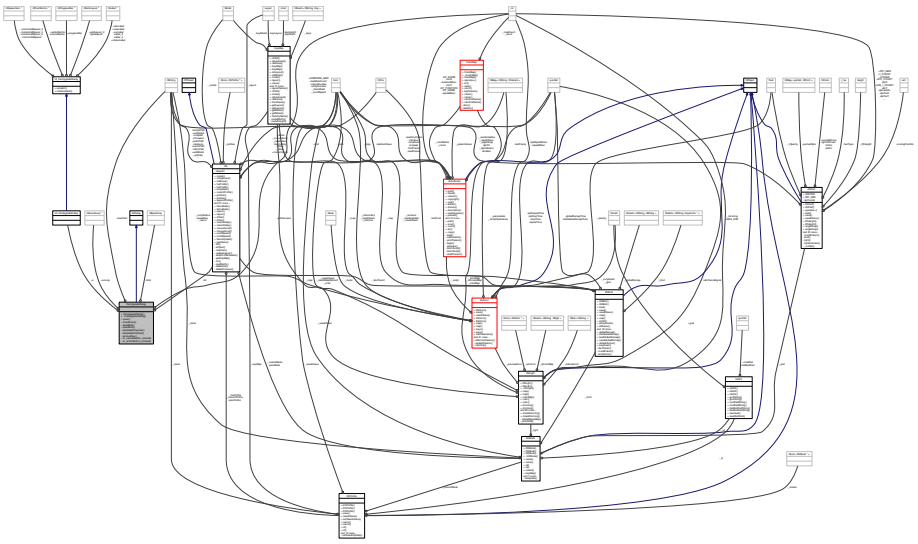

Public Member Functions

- FwUpgradeDialog (QWidget *parent, float newV, const QByteArray &fwBlob, Kb *device)
- ~FwUpgradeDialog ()
- int exec ()

Private Slots

- void fwUpdateProgress (int current, int total)
- void fwUpdateFinished (bool succeeded)
- void removeDev ()
- void on_cancelButton_clicked ()
- void on_actionButton_clicked ()

Private Member Functions

- void closeEvent (QCloseEvent *event)
- const QString & saveBlob ()
- void cleanBlob ()

Private Attributes

- Ui::FwUpgradeDialog * ui
- QString savePath
- QByteArray blob
- Kb * kb
- QEventLoop * evLoop
- bool exitSuccess

12.14.1 Detailed Description

Definition at line 13 of file fwupgradedialog.h.

12.14.2 Constructor & Destructor Documentation

12.14.2.1 FwUpgradeDialog::FwUpgradeDialog (QWidget * *parent,* float *newV,* const QByteArray & *fwBlob,* Kb * *device*)

Definition at line 31 of file fwupgradedialog.cpp.

References Ui_FwUpgradeDialog::curLabel, Ui_FwUpgradeDialog::devLabel, DIALOG_HEIGHT_MIN, DIALOG_WIDTH, Kb::firmware, fwUpdateFinished(), fwUpdateProgress(), kb, Ui_FwUpgradeDialog::newLabel, removeDev(), Ui_FwUpgradeDialog::setupUi(), ui, and Kb::usbModel.

```
31                                                                                                    :
32     QDialog(parent),
33     ui(new Ui::FwUpgradeDialog),
34     blob(fwBlob), kb(device), evLoop(0), exitSuccess(true)
35 {
36     ui->setupUi(this);
37     ui->curLabel->setText(kb->firmware);
38     ui->newLabel->setText(QString::number(newV, 'f', 2));
39     ui->devLabel->setText(kb->usbModel);
40
41     connect(device, SIGNAL(destroyed()), this, SLOT(removeDev()));
42     connect(device, SIGNAL(fwUpdateProgress(int,int)), this, SLOT(
       fwUpdateProgress(int,int)));
43     connect(device, SIGNAL(fwUpdateFinished(bool)), this, SLOT(
       fwUpdateFinished(bool)));
44
45     setFixedSize(DIALOG_WIDTH, DIALOG_HEIGHT_MIN);
46 }
```

Here is the call graph for this function:

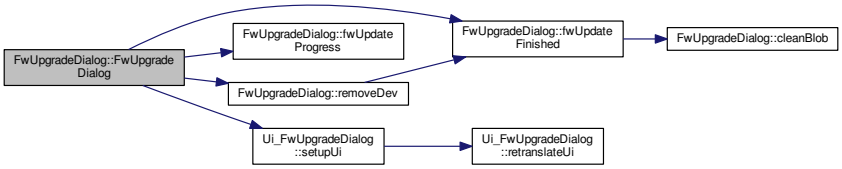

12.14.2.2 FwUpgradeDialog::~FwUpgradeDialog ( )

Definition at line 48 of file fwupgradedialog.cpp.

References cleanBlob(), and ui.

```
48                                      {
49     cleanBlob();
50     delete ui;
51 }
```

Here is the call graph for this function:



12.14.3 Member Function Documentation

12.14.3.1 void FwUpgradeDialog::cleanBlob ( ) [private]

Definition at line 77 of file fwupgradedialog.cpp.

References savePath.

Referenced by fwUpdateFinished(), and ~FwUpgradeDialog().

```
77                                      {
78     if(savePath.isEmpty())
79         return;
80     QFile(savePath).remove();
81     savePath = "";
82 }
```

Here is the caller graph for this function:



12.14.3.2 void FwUpgradeDialog::closeEvent (QCloseEvent * *event*) [private]

Definition at line 53 of file fwupgradedialog.cpp.

```
53                                                {
54     event->ignore();
55 }
```

12.14.3.3 int FwUpgradeDialog::exec ( )

Definition at line 107 of file fwupgradedialog.cpp.

References Ui_FwUpgradeDialog::actionButton, blob, Ui_FwUpgradeDialog::cancelButton, KbFirmware::dataForBoard(), DIALOG_HEIGHT_MAX(), DIALOG_WIDTH, evLoop, exitSuccess, Kb::features, kb, Ui_FwUpgradeDialog::newLabel, Ui_FwUpgradeDialog::progressBar, saveBlob(), Ui_FwUpgradeDialog::statusLabel, ui, and verifyFw().

Referenced by KbWidget::on_fwUpdButton_clicked().

```
107                          {
108     QString features = kb->features;
109     if(!blob.isEmpty()){
110         // If a blob was already specified, check its version and validity
111         float newV = verifyFw(blob, features);
112         if(newV == 0.f){
113             QMessageBox::warning(parentWidget(), "Error", "<center>Not a valid firmware for this
        device.</center>");
114             return QDialog::Rejected;
115         }
116         ui->newLabel->setText(QString::number(newV, 'f', 2));
117     } else {
118         // Download a new blob file
119         ui->progressBar->show();
120         ui->cancelButton->setEnabled(false);
121         ui->actionButton->setEnabled(false);
122         show();
123         // This can take a while
124         blob = KbFirmware::dataForBoard(features);
125         // Check validity
126         float newV = verifyFw(blob, features);
127         if(newV == 0.f){
128             hide();
129             QMessageBox::warning(parentWidget(), "Error", "<center>There was a problem with the downloaded
        file.<br />Please try again later.</center>");
130             return QDialog::Rejected;
131         }
132     }
133     // Save temporary file
134     if(saveBlob().isEmpty()){
135         hide();
136         QMessageBox::warning(parentWidget(), "Error", "<center>Unable to save temporary file.</center>");
137         return QDialog::Rejected;
138     }
139     // Set up UI
140     ui->progressBar->setValue(0);
141     ui->progressBar->setMaximum(1);
142     ui->progressBar->setTextVisible(false);
143     ui->statusLabel->setText("Ready to install new firmware.<br /><br /><b>Disclaimer:</b> ckb
        is not endorsed by Corsair. This is <i>unlikely</i> to brick your device, but I accept no responsibility if
        it does. If you're paranoid, update from Windows.");
144     ui->cancelButton->setEnabled(true);
145     ui->actionButton->setEnabled(true);
146     setFixedSize(DIALOG_WIDTH, DIALOG_HEIGHT_MAX);
147     show();
148     // Run modal event loop
149     evLoop = new QEventLoop(this);
150     evLoop->exec();
151     delete evLoop;
152     hide();
153     return exitSuccess ? QDialog::Accepted : QDialog::Rejected;
154 }
```

Here is the call graph for this function:

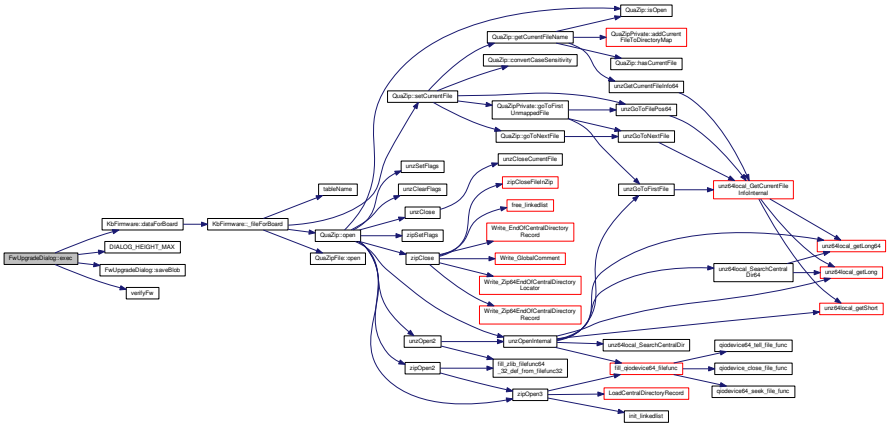

Here is the caller graph for this function:

12.14.3.4 void FwUpgradeDialog::fwUpdateFinished (bool *succeeded*) [private],[slot]

Definition at line 170 of file fwupgradedialog.cpp.

References Ui_FwUpgradeDialog::actionButton, cleanBlob(), evLoop, Ui_FwUpgradeDialog::progressBar, Ui_FwUpgradeDialog::statusLabel, and ui.

Referenced by FwUpgradeDialog(), and removeDev().

```
170                                                 {
171     cleanBlob();
172     if(succeeded)
173         ui->statusLabel->setText("Update successful!");
174     else
175         ui->statusLabel->setText("Update failed.");
176     ui->actionButton->setText("OK");
177     ui->actionButton->setEnabled(true);
178     ui->progressBar->setMaximum(1);
179     ui->progressBar->setValue(1);
180     // Exit after 10s
181     if(evLoop)
182         QTimer::singleShot(10000, evLoop, SLOT(quit()));
183 }
```

Here is the call graph for this function:

Here is the caller graph for this function:

12.14.3.5 void FwUpgradeDialog::fwUpdateProgress (int *current,* int *total*) [private],[slot]

Definition at line 163 of file fwupgradedialog.cpp.

References Ui_FwUpgradeDialog::progressBar, and ui.

Referenced by FwUpgradeDialog().

```
163                                                         {
164     if(current > 0 && total > 0){
165         ui->progressBar->setMaximum(total);
166         ui->progressBar->setValue(current);
167     }
168 }
```

Here is the caller graph for this function:



12.14.3.6 void FwUpgradeDialog::on_actionButton_clicked ( ) [private],[slot]

Definition at line 191 of file fwupgradedialog.cpp.

References Ui_FwUpgradeDialog::actionButton, Ui_FwUpgradeDialog::cancelButton, DIALOG_HEIGHT_MIN, DIALOG_WIDTH, evLoop, Kb::fwUpdate(), kb, Ui_FwUpgradeDialog::progressBar, savePath, Ui_FwUpgradeDialog::statusLabel, and ui.

```
191                                             {
192     if(!savePath.isEmpty() && kb){
193         // Start upgrade
194         setFixedSize(DIALOG_WIDTH, DIALOG_HEIGHT_MIN);
195         ui->progressBar->show();
196         ui->progressBar->setValue(0);
197         ui->progressBar->setMaximum(0);
198         ui->progressBar->setTextVisible(true);
199         ui->cancelButton->hide();
200         ui->actionButton->setEnabled(false);
201         ui->actionButton->setText("Please wait");
202         ui->statusLabel->setText("Installing firmware...");
203         kb->fwUpdate(savePath);
204     } else {
205         // Finished, close dialog.
206         if(evLoop)
207             evLoop->quit();
208     }
209 }
```

Here is the call graph for this function:



12.14.3.7 void FwUpgradeDialog::on_cancelButton_clicked ( ) [private], [slot]

Definition at line 185 of file fwupgradedialog.cpp.

References evLoop, and exitSuccess.

```
185                                                 {
186     exitSuccess = false;
187     if(evLoop)
188         evLoop->quit();
189 }
```

12.14.3.8 void FwUpgradeDialog::removeDev ( ) [private], [slot]

Definition at line 156 of file fwupgradedialog.cpp.

References fwUpdateFinished(), kb, and savePath.

Referenced by FwUpgradeDialog().

```
156                                 {
157     kb = 0;
158     // Assume success if upgrade in progress
159     if(!savePath.isEmpty())
160         fwUpdateFinished(true);
161 }
```

Here is the call graph for this function:



Here is the caller graph for this function:



12.14.3.9 const QString & FwUpgradeDialog::saveBlob ( ) [private]

Definition at line 57 of file fwupgradedialog.cpp.

References blob, and savePath.

Referenced by exec().

```
57                                          {
58     if(!savePath.isEmpty())
59         return savePath;
60     QDir tmp = QDir::temp();
61     qint64 pid = QCoreApplication::applicationPid();
62     QString path = tmp.absoluteFilePath(QString("ckb-%1-fwblob.bin").arg(pid));
63     QFile output(path);
64     if(!output.open(QIODevice::WriteOnly)){
65         return savePath;
66     }
67     if(!output.write(blob)){
68         output.close();
69         tmp.remove(path);
70         return savePath;
71     }
72     output.close();
73     savePath = path;
74     return savePath;
75 }
```

Here is the caller graph for this function:

12.14.4 Field Documentation

12.14.4.1 QByteArray FwUpgradeDialog::blob [private]

Definition at line 41 of file fwupgradedialog.h.

Referenced by exec(), and saveBlob().

12.14.4.2 QEventLoop* FwUpgradeDialog::evLoop [private]

Definition at line 45 of file fwupgradedialog.h.

Referenced by exec(), fwUpdateFinished(), on_actionButton_clicked(), and on_cancelButton_clicked().

12.14.4.3 bool FwUpgradeDialog::exitSuccess [private]

Definition at line 46 of file fwupgradedialog.h.

Referenced by exec(), and on_cancelButton_clicked().

12.14.4.4 Kb* FwUpgradeDialog::kb [private]

Definition at line 42 of file fwupgradedialog.h.

Referenced by exec(), FwUpgradeDialog(), on_actionButton_clicked(), and removeDev().

12.14.4.5 QString FwUpgradeDialog::savePath [private]

Definition at line 37 of file fwupgradedialog.h.

Referenced by cleanBlob(), on_actionButton_clicked(), removeDev(), and saveBlob().

12.14.4.6 Ui::FwUpgradeDialog* FwUpgradeDialog::ui [private]

Definition at line 32 of file fwupgradedialog.h.

Referenced by exec(), fwUpdateFinished(), fwUpdateProgress(), FwUpgradeDialog(), on_actionButton_clicked(), and ~FwUpgradeDialog().

The documentation for this class was generated from the following files:

- src/ckb/fwupgradedialog.h
- src/ckb/fwupgradedialog.cpp

12.15 Ui::FwUpgradeDialog Class Reference

`#include <src/ckb/ui_fwupgradedialog.h>`

Inheritance diagram for Ui::FwUpgradeDialog:

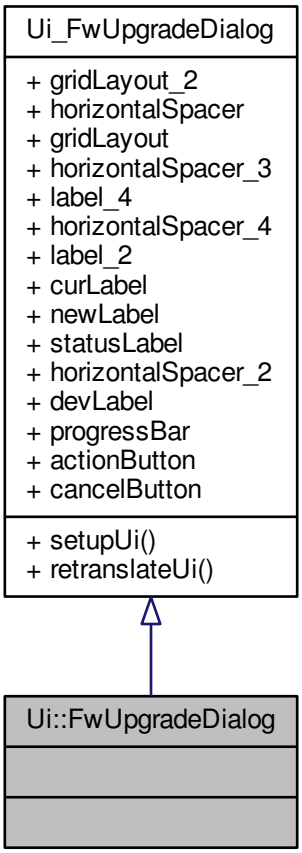

Collaboration diagram for Ui::FwUpgradeDialog:

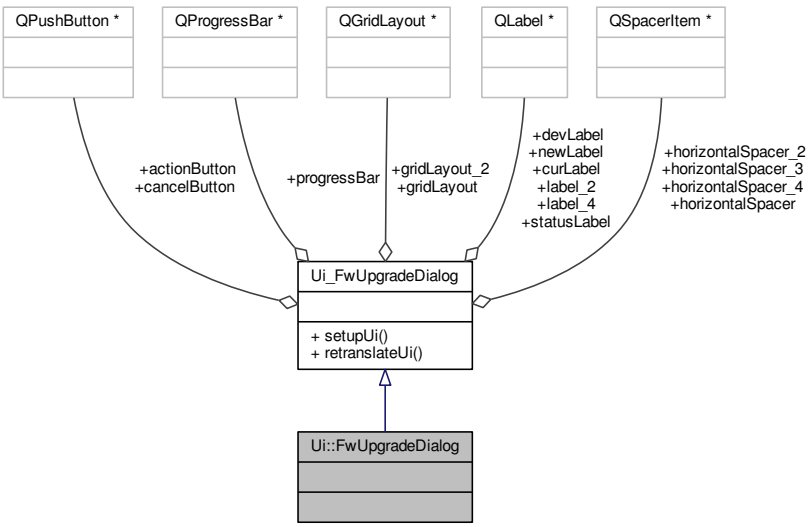

Public Member Functions

- void setupUi (QDialog *FwUpgradeDialog)
- void retranslateUi (QDialog *FwUpgradeDialog)

Data Fields

- QGridLayout * gridLayout_2
- QSpacerItem * horizontalSpacer
- QGridLayout * gridLayout
- QSpacerItem * horizontalSpacer_3
- QLabel * label_4
- QSpacerItem * horizontalSpacer_4
- QLabel * label_2
- QLabel * curLabel
- QLabel * newLabel
- QLabel * statusLabel
- QSpacerItem * horizontalSpacer_2
- QLabel * devLabel
- QProgressBar * progressBar
- QPushButton * actionButton
- QPushButton * cancelButton

12.15.1 Detailed Description

Definition at line 171 of file ui_fwupgradedialog.h.

12.15.2 Member Function Documentation

12.15.2.1 void Ui_FwUpgradeDialog::retranslateUi (QDialog * *FwUpgradeDialog*) [inline],[inherited]

Definition at line 155 of file ui_fwupgradedialog.h.

References Ui_FwUpgradeDialog::actionButton, Ui_FwUpgradeDialog::cancelButton, Ui_FwUpgradeDialog::curLabel, Ui_FwUpgradeDialog::devLabel, Ui_FwUpgradeDialog::label_2, Ui_FwUpgradeDialog::label_4, Ui_FwUpgradeDialog::newLabel, and Ui_FwUpgradeDialog::statusLabel.

Referenced by Ui_FwUpgradeDialog::setupUi().

```
156     {
157         FwUpgradeDialog->setWindowTitle(QApplication::translate("FwUpgradeDialog", "Firmware update",
    Q_NULLPTR));
158         label_4->setText(QApplication::translate("FwUpgradeDialog", "New:", Q_NULLPTR));
159         label_2->setText(QApplication::translate("FwUpgradeDialog", "Current:", Q_NULLPTR));
160         curLabel->setText(QApplication::translate("FwUpgradeDialog", "0.00", Q_NULLPTR));
161         newLabel->setText(QApplication::translate("FwUpgradeDialog", "0.00", Q_NULLPTR));
162         statusLabel->setText(QApplication::translate("FwUpgradeDialog", "Downloading new
     firmware, please wait...", Q_NULLPTR));
163         devLabel->setText(QApplication::translate("FwUpgradeDialog", "Device", Q_NULLPTR));
164         actionButton->setText(QApplication::translate("FwUpgradeDialog", "Start", Q_NULLPTR));
165         cancelButton->setText(QApplication::translate("FwUpgradeDialog", "Cancel", Q_NULLPTR));
166     } // retranslateUi
```

Here is the caller graph for this function:



12.15.2.2 void Ui_FwUpgradeDialog::setupUi (QDialog * *FwUpgradeDialog*) [inline],[inherited]

Definition at line 45 of file ui_fwupgradedialog.h.

References Ui_FwUpgradeDialog::actionButton, Ui_FwUpgradeDialog::cancelButton, Ui_FwUpgradeDialog::curLabel, Ui_FwUpgradeDialog::devLabel, Ui_FwUpgradeDialog::gridLayout, Ui_FwUpgradeDialog::gridLayout_2, Ui_FwUpgradeDialog::horizontalSpacer, Ui_FwUpgradeDialog::horizontalSpacer_2, Ui_FwUpgradeDialog::horizontalSpacer_3, Ui_FwUpgradeDialog::horizontalSpacer_4, Ui_FwUpgradeDialog::label_2, Ui_FwUpgradeDialog::label_4, Ui_FwUpgradeDialog::newLabel, Ui_FwUpgradeDialog::progressBar, Ui_FwUpgradeDialog::retranslateUi(), and Ui_FwUpgradeDialog::statusLabel.

Referenced by FwUpgradeDialog::FwUpgradeDialog().

```
46     {
47         if (FwUpgradeDialog->objectName().isEmpty())
48             FwUpgradeDialog->setObjectName(QStringLiteral("FwUpgradeDialog"));
49         FwUpgradeDialog->resize(420, 240);
50         QSizePolicy sizePolicy(QSizePolicy::Fixed, QSizePolicy::Fixed);
51         sizePolicy.setHorizontalStretch(0);
52         sizePolicy.setVerticalStretch(0);
53         sizePolicy.setHeightForWidth(FwUpgradeDialog->sizePolicy().hasHeightForWidth());
54         FwUpgradeDialog->setSizePolicy(sizePolicy);
55         gridLayout_2 = new QGridLayout(FwUpgradeDialog);
56         gridLayout_2->setObjectName(QStringLiteral("gridLayout_2"));
57         horizontalSpacer = new QSpacerItem(127, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
58
59         gridLayout_2->addItem(horizontalSpacer, 1, 0, 1, 1);
60
61         gridLayout = new QGridLayout();
62         gridLayout->setObjectName(QStringLiteral("gridLayout"));
63         horizontalSpacer_3 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
```

```
64
65          gridLayout->addItem(horizontalSpacer_3, 1, 0, 1, 1);
66
67          label_4 = new QLabel(FwUpgradeDialog);
68          label_4->setObjectName(QStringLiteral("label_4"));
69          QFont font;
70          font.setBold(true);
71          font.setWeight(75);
72          label_4->setFont(font);
73
74          gridLayout->addWidget(label_4, 1, 4, 1, 1);
75
76          horizontalSpacer_4 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
      QSizePolicy::Minimum);
77
78          gridLayout->addItem(horizontalSpacer_4, 1, 6, 1, 1);
79
80          label_2 = new QLabel(FwUpgradeDialog);
81          label_2->setObjectName(QStringLiteral("label_2"));
82          label_2->setFont(font);
83
84          gridLayout->addWidget(label_2, 1, 1, 1, 1);
85
86          curLabel = new QLabel(FwUpgradeDialog);
87          curLabel->setObjectName(QStringLiteral("curLabel"));
88
89          gridLayout->addWidget(curLabel, 1, 2, 1, 1);
90
91          newLabel = new QLabel(FwUpgradeDialog);
92          newLabel->setObjectName(QStringLiteral("newLabel"));
93
94          gridLayout->addWidget(newLabel, 1, 5, 1, 1);
95
96          statusLabel = new QLabel(FwUpgradeDialog);
97          statusLabel->setObjectName(QStringLiteral("statusLabel"));
98          QSizePolicy sizePolicy1(QSizePolicy::Preferred, QSizePolicy::Expanding);
99          sizePolicy1.setHorizontalStretch(0);
100          sizePolicy1.setVerticalStretch(0);
101          sizePolicy1.setHeightForWidth(statusLabel->sizePolicy().hasHeightForWidth());
102          statusLabel->setSizePolicy(sizePolicy1);
103          statusLabel->setAlignment(Qt::AlignCenter);
104          statusLabel->setWordWrap(true);
105
106          gridLayout->addWidget(statusLabel, 2, 0, 1, 7);
107
108          horizontalSpacer_2 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
      QSizePolicy::Minimum);
109
110          gridLayout->addItem(horizontalSpacer_2, 1, 3, 1, 1);
111
112          devLabel = new QLabel(FwUpgradeDialog);
113          devLabel->setObjectName(QStringLiteral("devLabel"));
114          QSizePolicy sizePolicy2(QSizePolicy::Preferred, QSizePolicy::Minimum);
115          sizePolicy2.setHorizontalStretch(0);
116          sizePolicy2.setVerticalStretch(0);
117          sizePolicy2.setHeightForWidth(devLabel->sizePolicy().hasHeightForWidth());
118          devLabel->setSizePolicy(sizePolicy2);
119          devLabel->setFont(font);
120          devLabel->setAlignment(Qt::AlignCenter);
121
122          gridLayout->addWidget(devLabel, 0, 0, 1, 7);
123
124          progressBar = new QProgressBar(FwUpgradeDialog);
125          progressBar->setObjectName(QStringLiteral("progressBar"));
126          progressBar->setMaximum(0);
127          progressBar->setValue(0);
128
129          gridLayout->addWidget(progressBar, 3, 0, 1, 7);
130
131
132          gridLayout_2->addLayout(gridLayout, 0, 0, 1, 3);
133
134          actionButton = new QPushButton(FwUpgradeDialog);
135          actionButton->setObjectName(QStringLiteral("actionButton"));
136          actionButton->setEnabled(false);
137
138          gridLayout_2->addWidget(actionButton, 1, 2, 1, 1);
139
140          cancelButton = new QPushButton(FwUpgradeDialog);
141          cancelButton->setObjectName(QStringLiteral("cancelButton"));
142          cancelButton->setEnabled(false);
143
144          gridLayout_2->addWidget(cancelButton, 1, 1, 1, 1);
145
146
147          retranslateUi(FwUpgradeDialog);
148
```

```
149         actionButton->setDefault(true);
150
151
152         QMetaObject::connectSlotsByName(FwUpgradeDialog);
153     } // setupUi
```

Here is the call graph for this function:



Here is the caller graph for this function:



12.15.3 Field Documentation

12.15.3.1 QPushButton* Ui_FwUpgradeDialog::actionButton [inherited]

Definition at line 42 of file ui_fwupgradedialog.h.

Referenced by FwUpgradeDialog::exec(), FwUpgradeDialog::fwUpdateFinished(), FwUpgradeDialog::on_actionButton_clicked(), Ui_FwUpgradeDialog::retranslateUi(), and Ui_FwUpgradeDialog::setupUi().

12.15.3.2 QPushButton* Ui_FwUpgradeDialog::cancelButton [inherited]

Definition at line 43 of file ui_fwupgradedialog.h.

Referenced by FwUpgradeDialog::exec(), FwUpgradeDialog::on_actionButton_clicked(), Ui_FwUpgradeDialog::retranslateUi(), and Ui_FwUpgradeDialog::setupUi().

12.15.3.3 QLabel* Ui_FwUpgradeDialog::curLabel [inherited]

Definition at line 36 of file ui_fwupgradedialog.h.

Referenced by FwUpgradeDialog::FwUpgradeDialog(), Ui_FwUpgradeDialog::retranslateUi(), and Ui_FwUpgradeDialog::setupUi().

12.15.3.4 QLabel* Ui_FwUpgradeDialog::devLabel [inherited]

Definition at line 40 of file ui_fwupgradedialog.h.

Referenced by FwUpgradeDialog::FwUpgradeDialog(), Ui_FwUpgradeDialog::retranslateUi(), and Ui_FwUpgrade-Dialog::setupUi().

12.15.3.5 QGridLayout* Ui_FwUpgradeDialog::gridLayout [inherited]

Definition at line 31 of file ui_fwupgradedialog.h.

Referenced by Ui_FwUpgradeDialog::setupUi().

12.15.3.6 QGridLayout* Ui_FwUpgradeDialog::gridLayout_2 [inherited]

Definition at line 29 of file ui_fwupgradedialog.h.

Referenced by Ui_FwUpgradeDialog::setupUi().

12.15.3.7 QSpacerItem* Ui_FwUpgradeDialog::horizontalSpacer [inherited]

Definition at line 30 of file ui_fwupgradedialog.h.

Referenced by Ui_FwUpgradeDialog::setupUi().

12.15.3.8 QSpacerItem* Ui_FwUpgradeDialog::horizontalSpacer_2 [inherited]

Definition at line 39 of file ui_fwupgradedialog.h.

Referenced by Ui_FwUpgradeDialog::setupUi().

12.15.3.9 QSpacerItem* Ui_FwUpgradeDialog::horizontalSpacer_3 [inherited]

Definition at line 32 of file ui_fwupgradedialog.h.

Referenced by Ui_FwUpgradeDialog::setupUi().

12.15.3.10 QSpacerItem* Ui_FwUpgradeDialog::horizontalSpacer_4 [inherited]

Definition at line 34 of file ui_fwupgradedialog.h.

Referenced by Ui_FwUpgradeDialog::setupUi().

12.15.3.11 QLabel* Ui_FwUpgradeDialog::label_2 [inherited]

Definition at line 35 of file ui_fwupgradedialog.h.

Referenced by Ui_FwUpgradeDialog::retranslateUi(), and Ui_FwUpgradeDialog::setupUi().

12.15.3.12 QLabel* Ui_FwUpgradeDialog::label_4 [inherited]

Definition at line 33 of file ui_fwupgradedialog.h.

Referenced by Ui_FwUpgradeDialog::retranslateUi(), and Ui_FwUpgradeDialog::setupUi().

12.15.3.13 QLabel* Ui_FwUpgradeDialog::newLabel [inherited]

Definition at line 37 of file ui_fwupgradedialog.h.

Referenced by FwUpgradeDialog::exec(), FwUpgradeDialog::FwUpgradeDialog(), Ui_FwUpgradeDialog::retranslateUi(), and Ui_FwUpgradeDialog::setupUi().

12.15.3.14 QProgressBar* Ui_FwUpgradeDialog::progressBar [inherited]

Definition at line 41 of file ui_fwupgradedialog.h.

Referenced by FwUpgradeDialog::exec(), FwUpgradeDialog::fwUpdateFinished(), FwUpgradeDialog::fwUpdateProgress(), FwUpgradeDialog::on_actionButton_clicked(), and Ui_FwUpgradeDialog::setupUi().

12.15.3.15 QLabel* Ui_FwUpgradeDialog::statusLabel [inherited]

Definition at line 38 of file ui_fwupgradedialog.h.

Referenced by FwUpgradeDialog::exec(), FwUpgradeDialog::fwUpdateFinished(), FwUpgradeDialog::on_actionButton_clicked(), Ui_FwUpgradeDialog::retranslateUi(), and Ui_FwUpgradeDialog::setupUi().

The documentation for this class was generated from the following file:

- src/ckb/ui_fwupgradedialog.h

12.16 GradientButton Class Reference

`#include <src/ckb/gradientbutton.h>`

Inheritance diagram for GradientButton:

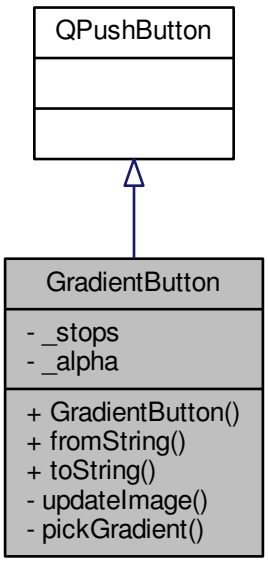

Collaboration diagram for GradientButton:

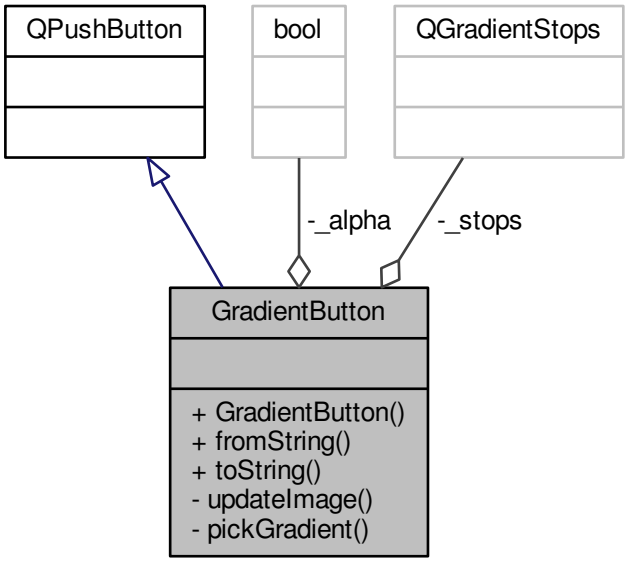

Signals

- void gradientChanged ()

Public Member Functions

- GradientButton (QWidget *parent=0, bool allowAlpha=false)
- void fromString (const QString &string)
- QString toString () const

Private Slots

- void pickGradient ()

Private Member Functions

- void updateImage ()

Private Attributes

- QGradientStops _stops
- bool _alpha

12.16.1 Detailed Description

Definition at line 6 of file gradientbutton.h.

12.16.2 Constructor & Destructor Documentation

12.16.2.1 GradientButton::GradientButton (QWidget * *parent* = 0, bool *allowAlpha* = false) [explicit]

Definition at line 7 of file gradientbutton.cpp.

References fromString(), and pickGradient().

```
7                                                                   :
8     QPushButton(parent), _alpha(allowAlpha)
9 {
10     connect(this, SIGNAL(clicked()), this, SLOT(pickGradient()));
11     setAutoDefault(false);
12     setDefault(false);
13     fromString("");
14     setText("");
15 }
```

Here is the call graph for this function:



12.16.3 Member Function Documentation

12.16.3.1 void GradientButton::fromString (const QString & *string*)

Definition at line 38 of file gradientbutton.cpp.

References _alpha, _stops, and updateImage().

Referenced by GradientButton().

```
38                                                  {
39     // Clear existing stops
40     _stops.clear();
41     // Parse string with sscanf
42     QByteArray cString = string.toLatin1();
43     const char* data = cString.data();
44     char pos = -1;
45     uchar a, r, g, b;
46     while(1){
47         int scanned = 0;
48         char newpos;
49         if(sscanf(data, "%hhd:%2hhx%2hhx%2hhx%2hhx%n", &newpos, &a, &r, &g, &b, &scanned) != 5)
50             break;
51         data += scanned;
52         // Don't allow stops out-of-order or past 100
53         if(newpos <= pos || newpos > 100)
54             break;
55         pos = newpos;
56         if(!_alpha)
57             a = 255;
58         _stops.append(QGradientStop(pos / 100., QColor(r, g, b, a)));
59     }
60     if(_stops.count() == 0){
61         // If nothing was read, try a single ARGB constant.
62         if(sscanf(data, "%2hhx%2hhx%2hhx%2hhx", &a, &r, &g, &b) == 4){
63             _stops.append(QGradientStop(0., QColor(r, g, b, a)));
64             _stops.append(QGradientStop(1., QColor(r, g, b, 0.)));
65         }
66     }
67     // If that still didn't work, fill with white
68     if(_stops.count() == 0){
69         _stops.append(QGradientStop(0., QColor(255, 255, 255)));
70         _stops.append(QGradientStop(1., QColor(255, 255, 255)));
71     }
72     // Make sure there are stops at 0 and at 100
73     if(_stops[0].first != 0.)
74         _stops.prepend(QGradientStop(0., _stops[0].second));
```

```
75     if(_stops.last().first != 1.)
76         _stops.prepend(QGradientStop(1., _stops.last().second));
77     updateImage();
78 }
```

Here is the call graph for this function:

Here is the caller graph for this function:



12.16.3.2 void GradientButton::gradientChanged ( ) [signal]

Definition at line 132 of file moc_gradientbutton.cpp.

Referenced by pickGradient().

```
133 {
134     QMetaObject::activate(this, &staticMetaObject, 0, Q_NULLPTR);
135 }
```

Here is the caller graph for this function:

12.16.3.3 void GradientButton::pickGradient ( ) [private], [slot]

Definition at line 90 of file gradientbutton.cpp.

References _stops, GradientDialog::getGradient(), gradientChanged(), and updateImage().

Referenced by GradientButton().

```
90                                  {
91     GradientDialog dialog(this);
92     _stops = dialog.getGradient(_stops);
93     updateImage();
94     emit gradientChanged();
95 }
```

Here is the call graph for this function:



Here is the caller graph for this function:



12.16.3.4 QString GradientButton::toString ( ) const

Definition at line 80 of file gradientbutton.cpp.

References _stops.

Referenced by AnimSettingDialog::updateParam().

```
80                                      {
81     QStringList result;
82     foreach(const QGradientStop& stop, _stops){
83         QString string;
84         const QColor& color = stop.second;
85         result << string.sprintf("%d:%02x%02x%02x%02x", (int)round(stop.first * 100.f), color.alpha(),
       color.red(), color.green(), color.blue());
86     }
87     return result.join(" ");
88 }
```

Here is the caller graph for this function:

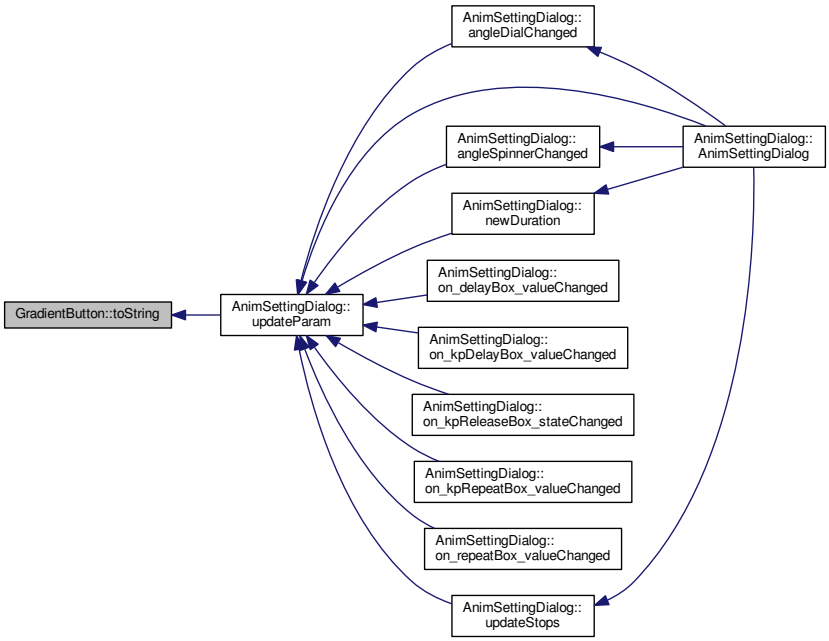

12.16.3.5 void GradientButton::updateImage ( ) [private]

Definition at line 17 of file gradientbutton.cpp.

References _alpha, and _stops.

Referenced by fromString(), and pickGradient().

```
17                                {
18     const int w = 130, h = 16;
19     QImage image(w, h, QImage::Format_RGB888);
20     QPainter painter(&image);
21     painter.setPen(Qt::NoPen);
22     painter.fillRect(0, 0, w, h, QColor(0, 0, 0));
23     if(_alpha){
24         for(int x = 1; x < w - 1; x += h){
25             painter.fillRect(x, 1, h / 2, h / 2 - 1, QColor(255, 255, 255));
26             painter.fillRect(x + h / 2, 1, h / 2, h / 2 - 1, QColor(192, 192, 192));
27             painter.fillRect(x, h / 2, h / 2, h / 2 - 1, QColor(192, 192, 192));
28             painter.fillRect(x + h / 2, h / 2, h / 2, h / 2 - 1, QColor(255, 255, 255));
29         }
30     }
31     QLinearGradient gradient(1., 0., w - 1, 0.);
32     gradient.setStops(_stops);
33     painter.fillRect(1, 1, w - 2, h - 2, QBrush(gradient));
34     setIconSize(QSize(w, h));
35     setIcon(QIcon(QPixmap::fromImage(image)));
36 }
```

Here is the caller graph for this function:



12.16.4 Field Documentation

12.16.4.1 bool GradientButton::_alpha [private]

Definition at line 23 of file gradientbutton.h.

Referenced by fromString(), and updateImage().

12.16.4.2 QGradientStops GradientButton::_stops [private]

Definition at line 22 of file gradientbutton.h.

Referenced by fromString(), pickGradient(), toString(), and updateImage().

The documentation for this class was generated from the following files:

- src/ckb/gradientbutton.h
- src/ckb/gradientbutton.cpp
- src/ckb/release/moc_gradientbutton.cpp

12.17 Ui::GradientDialog Class Reference

`#include <src/ckb/ui_gradientdialog.h>`

Inheritance diagram for Ui::GradientDialog:

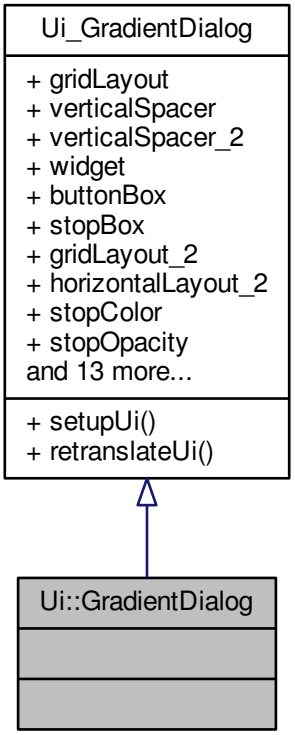

Collaboration diagram for Ui::GradientDialog:

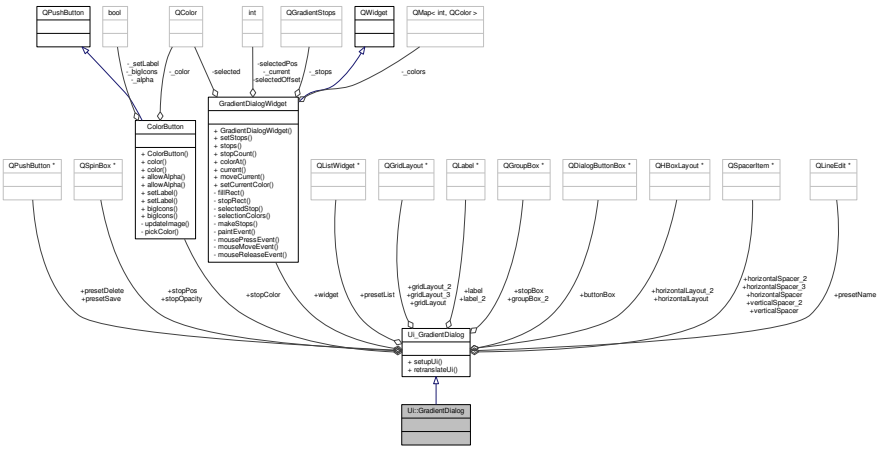

Public Member Functions

- void setupUi (QDialog ∗GradientDialog)
- void retranslateUi (QDialog ∗GradientDialog)

Data Fields

- QGridLayout * gridLayout
- QSpacerItem * verticalSpacer
- QSpacerItem * verticalSpacer_2
- GradientDialogWidget * widget
- QDialogButtonBox * buttonBox
- QGroupBox * stopBox
- QGridLayout * gridLayout_2
- QHBoxLayout * horizontalLayout_2
- ColorButton * stopColor
- QSpinBox * stopOpacity
- QSpacerItem * horizontalSpacer_2
- QLabel * label
- QHBoxLayout * horizontalLayout
- QSpinBox * stopPos
- QSpacerItem * horizontalSpacer
- QLabel * label_2
- QSpacerItem * horizontalSpacer_3
- QGroupBox * groupBox_2
- QGridLayout * gridLayout_3
- QListWidget * presetList
- QLineEdit * presetName
- QPushButton * presetSave
- QPushButton * presetDelete

12.17.1 Detailed Description

Definition at line 225 of file ui_gradientdialog.h.

12.17.2 Member Function Documentation

12.17.2.1 void Ui_GradientDialog::retranslateUi (QDialog * *GradientDialog*) [inline], [inherited]

Definition at line 207 of file ui_gradientdialog.h.

References Ui_GradientDialog::groupBox_2, Ui_GradientDialog::label, Ui_GradientDialog::label_2, Ui_GradientDialog::presetDelete, Ui_GradientDialog::presetName, Ui_GradientDialog::presetSave, Ui_GradientDialog::stopBox, Ui_GradientDialog::stopColor, Ui_GradientDialog::stopOpacity, and Ui_GradientDialog::stopPos.

Referenced by Ui_GradientDialog::setupUi().

```
208     {
209         GradientDialog->setWindowTitle(QApplication::translate("GradientDialog", "Pick Gradient", Q_NULLPTR
    ));
210         stopBox->setTitle(QApplication::translate("GradientDialog", "Point X of Y", Q_NULLPTR));
211         stopColor->setText(QApplication::translate("GradientDialog", "Pick Color...", Q_NULLPTR));
212         stopOpacity->setSuffix(QApplication::translate("GradientDialog", "%", Q_NULLPTR));
213         label->setText(QApplication::translate("GradientDialog", "Position:", Q_NULLPTR));
214         stopPos->setSuffix(QApplication::translate("GradientDialog", "%", Q_NULLPTR));
215         label_2->setText(QApplication::translate("GradientDialog", "Color:", Q_NULLPTR));
216         groupBox_2->setTitle(QApplication::translate("GradientDialog", "Presets", Q_NULLPTR));
217         presetName->setPlaceholderText(QApplication::translate("GradientDialog", "Name",
    Q_NULLPTR));
218         presetSave->setText(QApplication::translate("GradientDialog", "Save", Q_NULLPTR));
219         presetDelete->setText(QApplication::translate("GradientDialog", "Delete", Q_NULLPTR));
220     } // retranslateUi
```

Here is the caller graph for this function:



12.17.2.2 void Ui_GradientDialog::setupUi (QDialog * *GradientDialog*) [inline],[inherited]

Definition at line 60 of file ui_gradientdialog.h.

References Ui_GradientDialog::buttonBox, Ui_GradientDialog::gridLayout, Ui_GradientDialog::gridLayout_2, Ui_GradientDialog::gridLayout_3, Ui_GradientDialog::groupBox_2, Ui_GradientDialog::horizontalLayout, Ui_GradientDialog::horizontalLayout_2, Ui_GradientDialog::horizontalSpacer, Ui_GradientDialog::horizontalSpacer_2, Ui_GradientDialog::horizontalSpacer_3, Ui_GradientDialog::label, Ui_GradientDialog::label_2, Ui_GradientDialog::presetDelete, Ui_GradientDialog::presetList, Ui_GradientDialog::presetName, Ui_GradientDialog::presetSave, Ui_GradientDialog::retranslateUi(), Ui_GradientDialog::stopBox, Ui_GradientDialog::stopColor, Ui_GradientDialog::stopOpacity, Ui_GradientDialog::stopPos, Ui_GradientDialog::verticalSpacer, Ui_GradientDialog::verticalSpacer_2, and Ui_GradientDialog::widget.

Referenced by GradientDialog::GradientDialog().

```
61     {
62         if (GradientDialog->objectName().isEmpty())
63             GradientDialog->setObjectName(QStringLiteral("GradientDialog"));
64         GradientDialog->resize(400, 440);
65         GradientDialog->setMinimumSize(QSize(400, 440));
66         GradientDialog->setMaximumSize(QSize(400, 440));
67         GradientDialog->setFocusPolicy(Qt::ClickFocus);
68         gridLayout = new QGridLayout(GradientDialog);
69         gridLayout->setObjectName(QStringLiteral("gridLayout"));
70         verticalSpacer = new QSpacerItem(0, 0, QSizePolicy::Minimum, QSizePolicy::Expanding);
71 
72         gridLayout->addItem(verticalSpacer, 1, 0, 1, 1);
73 
74         verticalSpacer_2 = new QSpacerItem(0, 15, QSizePolicy::Minimum, QSizePolicy::Fixed)
    ;
75 
76         gridLayout->addItem(verticalSpacer_2, 3, 0, 1, 1);
77 
78         widget = new GradientDialogWidget(GradientDialog);
79         widget->setObjectName(QStringLiteral("widget"));
80         QSizePolicy sizePolicy(QSizePolicy::Preferred, QSizePolicy::Fixed);
81         sizePolicy.setHorizontalStretch(0);
82         sizePolicy.setVerticalStretch(0);
83         sizePolicy.setHeightForWidth(widget->sizePolicy().hasHeightForWidth());
84         widget->setSizePolicy(sizePolicy);
85         widget->setMinimumSize(QSize(0, 74));
86         widget->setMaximumSize(QSize(16777215, 74));
87 
88         gridLayout->addWidget(widget, 2, 0, 1, 1);
89 
90         buttonBox = new QDialogButtonBox(GradientDialog);
91         buttonBox->setObjectName(QStringLiteral("buttonBox"));
92         buttonBox->setOrientation(Qt::Horizontal);
93         buttonBox->setStandardButtons(QDialogButtonBox::Cancel|QDialogButtonBox::Ok);
94 
95         gridLayout->addWidget(buttonBox, 5, 0, 1, 1);
96 
97         stopBox = new QGroupBox(GradientDialog);
98         stopBox->setObjectName(QStringLiteral("stopBox"));
99         sizePolicy.setHeightForWidth(stopBox->sizePolicy().hasHeightForWidth());
100          stopBox->setSizePolicy(sizePolicy);
101          gridLayout_2 = new QGridLayout(stopBox);
102          gridLayout_2->setObjectName(QStringLiteral("gridLayout_2"));
103          horizontalLayout_2 = new QHBoxLayout();
104          horizontalLayout_2->setObjectName(QStringLiteral("horizontalLayout_2"));
105          stopColor = new ColorButton(stopBox);
106          stopColor->setObjectName(QStringLiteral("stopColor"));
107 
```

```
108         horizontalLayout_2->addWidget(stopColor);
109 
110         stopOpacity = new QSpinBox(stopBox);
111         stopOpacity->setObjectName(QStringLiteral("stopOpacity"));
112         stopOpacity->setMaximum(100);
113 
114         horizontalLayout_2->addWidget(stopOpacity);
115 
116         horizontalSpacer_2 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
117 
118         horizontalLayout_2->addItem(horizontalSpacer_2);
119 
120 
121         gridLayout_2->addLayout(horizontalLayout_2, 1, 2, 1, 1);
122 
123         label = new QLabel(stopBox);
124         label->setObjectName(QStringLiteral("label"));
125 
126         gridLayout_2->addWidget(label, 0, 0, 1, 1);
127 
128         horizontalLayout = new QHBoxLayout();
129         horizontalLayout->setObjectName(QStringLiteral("horizontalLayout"));
130         stopPos = new QSpinBox(stopBox);
131         stopPos->setObjectName(QStringLiteral("stopPos"));
132         stopPos->setMaximum(100);
133 
134         horizontalLayout->addWidget(stopPos);
135 
136         horizontalSpacer = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
137 
138         horizontalLayout->addItem(horizontalSpacer);
139 
140 
141         gridLayout_2->addLayout(horizontalLayout, 0, 2, 1, 1);
142 
143         label_2 = new QLabel(stopBox);
144         label_2->setObjectName(QStringLiteral("label_2"));
145 
146         gridLayout_2->addWidget(label_2, 1, 0, 1, 1);
147 
148         horizontalSpacer_3 = new QSpacerItem(10, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
149 
150         gridLayout_2->addItem(horizontalSpacer_3, 0, 1, 1, 1);
151 
152 
153         gridLayout->addWidget(stopBox, 4, 0, 1, 1);
154 
155         groupBox_2 = new QGroupBox(GradientDialog);
156         groupBox_2->setObjectName(QStringLiteral("groupBox_2"));
157         sizePolicy.setHeightForWidth(groupBox_2->sizePolicy().hasHeightForWidth());
158         groupBox_2->setSizePolicy(sizePolicy);
159         gridLayout_3 = new QGridLayout(groupBox_2);
160         gridLayout_3->setObjectName(QStringLiteral("gridLayout_3"));
161         presetList = new QListWidget(groupBox_2);
162         presetList->setObjectName(QStringLiteral("presetList"));
163         QSizePolicy sizePolicy1(QSizePolicy::Expanding, QSizePolicy::Preferred);
164         sizePolicy1.setHorizontalStretch(0);
165         sizePolicy1.setVerticalStretch(0);
166         sizePolicy1.setHeightForWidth(presetList->sizePolicy().hasHeightForWidth());
167         presetList->setSizePolicy(sizePolicy1);
168         presetList->setFrameShadow(QFrame::Plain);
169         presetList->setHorizontalScrollBarPolicy(Qt::ScrollBarAlwaysOn);
170         presetList->setIconSize(QSize(64, 64));
171         presetList->setHorizontalScrollMode(QAbstractItemView::ScrollPerPixel);
172         presetList->setFlow(QListView::TopToBottom);
173         presetList->setViewMode(QListView::IconMode);
174         presetList->setUniformItemSizes(true);
175 
176         gridLayout_3->addWidget(presetList, 0, 0, 3, 1);
177 
178         presetName = new QLineEdit(groupBox_2);
179         presetName->setObjectName(QStringLiteral("presetName"));
180         presetName->setMaxLength(30);
181 
182         gridLayout_3->addWidget(presetName, 0, 1, 1, 1);
183 
184         presetSave = new QPushButton(groupBox_2);
185         presetSave->setObjectName(QStringLiteral("presetSave"));
186         presetSave->setAutoDefault(false);
187 
188         gridLayout_3->addWidget(presetSave, 1, 1, 1, 1);
189 
190         presetDelete = new QPushButton(groupBox_2);
191         presetDelete->setObjectName(QStringLiteral("presetDelete"));
```

```
192         presetDelete->setAutoDefault(false);
193
194         gridLayout_3->addWidget(presetDelete, 2, 1, 1, 1);
195
196
197         gridLayout->addWidget(groupBox_2, 0, 0, 1, 1);
198
199
200         retranslateUi(GradientDialog);
201         QObject::connect(buttonBox, SIGNAL(accepted()), GradientDialog, SLOT(accept()));
202         QObject::connect(buttonBox, SIGNAL(rejected()), GradientDialog, SLOT(reject()));
203
204         QMetaObject::connectSlotsByName(GradientDialog);
205     } // setupUi
```

Here is the call graph for this function:



Here is the caller graph for this function:



12.17.3 Field Documentation

12.17.3.1 QDialogButtonBox* Ui_GradientDialog::buttonBox [inherited]

Definition at line 40 of file ui_gradientdialog.h.

Referenced by Ui_GradientDialog::setupUi().

12.17.3.2 QGridLayout* Ui_GradientDialog::gridLayout [inherited]

Definition at line 36 of file ui_gradientdialog.h.

Referenced by Ui_GradientDialog::setupUi().

12.17.3.3 QGridLayout* Ui_GradientDialog::gridLayout_2 [inherited]

Definition at line 42 of file ui_gradientdialog.h.

Referenced by Ui_GradientDialog::setupUi().

12.17.3.4 QGridLayout* Ui_GradientDialog::gridLayout_3 [inherited]

Definition at line 54 of file ui_gradientdialog.h.

Referenced by Ui_GradientDialog::setupUi().

12.17.3.5 QGroupBox* Ui_GradientDialog::groupBox_2 [inherited]

Definition at line 53 of file ui_gradientdialog.h.

Referenced by Ui_GradientDialog::retranslateUi(), and Ui_GradientDialog::setupUi().

12.17.3.6 QHBoxLayout* Ui_GradientDialog::horizontalLayout [inherited]

Definition at line 48 of file ui_gradientdialog.h.

Referenced by Ui_GradientDialog::setupUi().

12.17.3.7 QHBoxLayout* Ui_GradientDialog::horizontalLayout_2 [inherited]

Definition at line 43 of file ui_gradientdialog.h.

Referenced by Ui_GradientDialog::setupUi().

12.17.3.8 QSpacerItem* Ui_GradientDialog::horizontalSpacer [inherited]

Definition at line 50 of file ui_gradientdialog.h.

Referenced by Ui_GradientDialog::setupUi().

12.17.3.9 QSpacerItem* Ui_GradientDialog::horizontalSpacer_2 [inherited]

Definition at line 46 of file ui_gradientdialog.h.

Referenced by Ui_GradientDialog::setupUi().

12.17.3.10 QSpacerItem* Ui_GradientDialog::horizontalSpacer_3 [inherited]

Definition at line 52 of file ui_gradientdialog.h.

Referenced by Ui_GradientDialog::setupUi().

12.17.3.11 QLabel* Ui_GradientDialog::label [inherited]

Definition at line 47 of file ui_gradientdialog.h.

Referenced by Ui_GradientDialog::retranslateUi(), and Ui_GradientDialog::setupUi().

12.17.3.12 QLabel* Ui_GradientDialog::label_2 [inherited]

Definition at line 51 of file ui_gradientdialog.h.

Referenced by Ui_GradientDialog::retranslateUi(), and Ui_GradientDialog::setupUi().

12.17.3.13 QPushButton* Ui_GradientDialog::presetDelete [inherited]

Definition at line 58 of file ui_gradientdialog.h.

Referenced by GradientDialog::getGradient(), GradientDialog::on_presetDelete_clicked(), GradientDialog::on_presetSave_clicked(), Ui_GradientDialog::retranslateUi(), GradientDialog::setPreset(), and Ui_GradientDialog::setupUi().

12.17.3.14 QListWidget* Ui_GradientDialog::presetList [inherited]

Definition at line 55 of file ui_gradientdialog.h.

Referenced by GradientDialog::setPreset(), Ui_GradientDialog::setupUi(), and GradientDialog::updatePresets().

12.17.3.15 QLineEdit* Ui_GradientDialog::presetName [inherited]

Definition at line 56 of file ui_gradientdialog.h.

Referenced by GradientDialog::on_presetSave_clicked(), Ui_GradientDialog::retranslateUi(), GradientDialog::setPreset(), and Ui_GradientDialog::setupUi().

12.17.3.16 QPushButton* Ui_GradientDialog::presetSave [inherited]

Definition at line 57 of file ui_gradientdialog.h.

Referenced by GradientDialog::getGradient(), GradientDialog::on_presetDelete_clicked(), GradientDialog::on_presetSave_clicked(), Ui_GradientDialog::retranslateUi(), GradientDialog::setPreset(), and Ui_GradientDialog::setupUi().

12.17.3.17 QGroupBox* Ui_GradientDialog::stopBox [inherited]

Definition at line 41 of file ui_gradientdialog.h.

Referenced by GradientDialog::currentChanged(), Ui_GradientDialog::retranslateUi(), and Ui_GradientDialog::setupUi().

12.17.3.18 ColorButton* Ui_GradientDialog::stopColor [inherited]

Definition at line 44 of file ui_gradientdialog.h.

Referenced by GradientDialog::currentChanged(), GradientDialog::GradientDialog(), GradientDialog::on_stopOpacity_valueChanged(), Ui_GradientDialog::retranslateUi(), and Ui_GradientDialog::setupUi().

12.17.3.19 QSpinBox* Ui_GradientDialog::stopOpacity [inherited]

Definition at line 45 of file ui_gradientdialog.h.

Referenced by GradientDialog::colorChanged(), GradientDialog::currentChanged(), Ui_GradientDialog::retranslateUi(), and Ui_GradientDialog::setupUi().

12.17.3.20 QSpinBox* Ui_GradientDialog::stopPos [inherited]

Definition at line 49 of file ui_gradientdialog.h.

Referenced by GradientDialog::currentChanged(), GradientDialog::on_stopPos_valueChanged(), Ui_GradientDialog::retranslateUi(), and Ui_GradientDialog::setupUi().

12.17.3.21 QSpacerItem* Ui_GradientDialog::verticalSpacer [inherited]

Definition at line 37 of file ui_gradientdialog.h.

Referenced by Ui_GradientDialog::setupUi().

12.17.3.22 QSpacerItem* Ui_GradientDialog::verticalSpacer_2 [inherited]

Definition at line 38 of file ui_gradientdialog.h.

Referenced by Ui_GradientDialog::setupUi().

12.17.3.23 GradientDialogWidget* Ui_GradientDialog::widget [inherited]

Definition at line 39 of file ui_gradientdialog.h.

Referenced by GradientDialog::colorChanged(), GradientDialog::currentChanged(), GradientDialog::getGradient(), GradientDialog::GradientDialog(), GradientDialog::on_presetSave_clicked(), GradientDialog::on_stopPos_valueChanged(), GradientDialog::setPreset(), and Ui_GradientDialog::setupUi().

The documentation for this class was generated from the following file:

- src/ckb/ui_gradientdialog.h

12.18 GradientDialog Class Reference

`#include <src/ckb/gradientdialog.h>`

Inheritance diagram for GradientDialog:

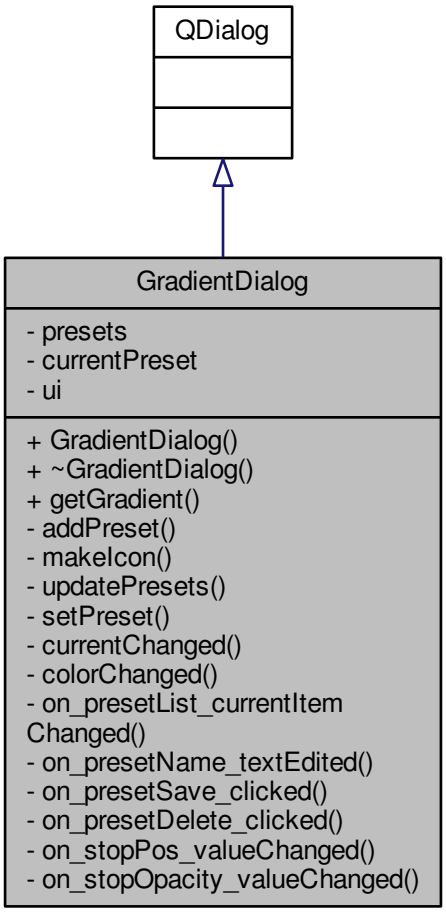

Collaboration diagram for GradientDialog:

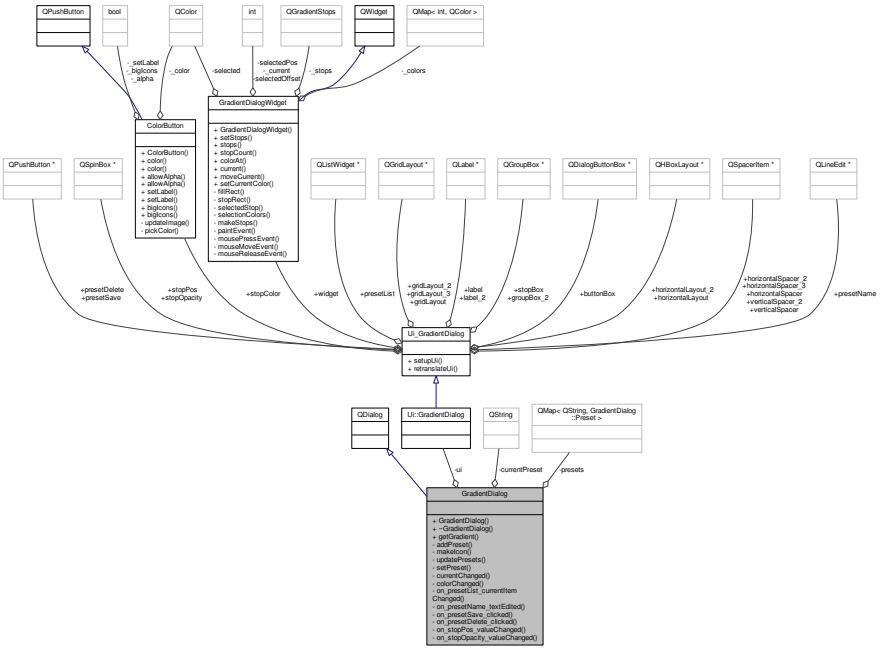

Data Structures

- struct Preset

Public Member Functions

- GradientDialog (QWidget ∗parent=0)
- ∼GradientDialog ()
- QGradientStops getGradient (const QGradientStops &prevGradient)

Private Slots

- void currentChanged (QColor color, bool spontaneous, int position)
- void colorChanged (QColor color)
- void on_presetList_currentItemChanged (QListWidgetItem ∗current, QListWidgetItem ∗previous)
- void on_presetName_textEdited (const QString &arg1)
- void on_presetSave_clicked ()
- void on_presetDelete_clicked ()
- void on_stopPos_valueChanged (int arg1)
- void on_stopOpacity_valueChanged (int arg1)

Private Member Functions

- void addPreset (const Preset &preset)
- QIcon makeIcon (const Preset &preset)
- void updatePresets ()
- void setPreset (const QString &newPreset)

Private Attributes

- QMap< QString, Preset > presets
- QString currentPreset
- Ui::GradientDialog * ui

12.18.1 Detailed Description

Definition at line 12 of file gradientdialog.h.

12.18.2 Constructor & Destructor Documentation

12.18.2.1 GradientDialog::GradientDialog (QWidget * *parent* = 0) [explicit]

Definition at line 11 of file gradientdialog.cpp.

References addPreset(), CkbSettings::childGroups(), CkbSettings::childKeys(), colorChanged(), currentChanged(), GradientDialog::Preset::gradient, prefsPath, presets, Ui_GradientDialog::setupUi(), Ui_GradientDialog::stopColor, ui, updatePresets(), CkbSettings::value(), and Ui_GradientDialog::widget.

```
11                                                  :
12     QDialog(parent),
13     ui(new Ui::GradientDialog)
14 {
15     ui->setupUi(this);
16     connect(ui->widget, SIGNAL(currentChanged(QColor,bool,int)), this, SLOT(
       currentChanged(QColor,bool,int)));
17     connect(ui->stopColor, SIGNAL(colorChanged(QColor)), this, SLOT(
       colorChanged(QColor)));
18
19     // Add built-in presets
20     Preset blackAndWhite("B & W", true);
21     blackAndWhite.gradient.append(QGradientStop(0., QColor(0, 0, 0)));
22     blackAndWhite.gradient.append(QGradientStop(1., QColor(255, 255, 255)));
23     Preset fade("Fade", true);
24     fade.gradient.append(QGradientStop(0., QColor(255, 255, 255)));
25     fade.gradient.append(QGradientStop(1., QColor(255, 255, 255, 0)));
26     Preset rainbow("Rainbow", true);
27     rainbow.gradient.append(QGradientStop(0.00, QColor(255, 0, 0)));
28     rainbow.gradient.append(QGradientStop(0.17, QColor(255, 255, 0)));
29     rainbow.gradient.append(QGradientStop(0.33, QColor(0, 255, 0)));
30     rainbow.gradient.append(QGradientStop(0.50, QColor(0, 255, 255)));
31     rainbow.gradient.append(QGradientStop(0.67, QColor(0, 0, 255)));
32     rainbow.gradient.append(QGradientStop(0.83, QColor(255, 0, 255)));
33     rainbow.gradient.append(QGradientStop(1.00, QColor(255, 0, 0)));
34     addPreset(blackAndWhite);
35     addPreset(fade);
36     addPreset(rainbow);
37
38     // Load stored presets
39     CkbSettings settings(prefsPath);
40     foreach(const QString& name, settings.childGroups()){
41         QString pName = name.toLower();
42         if(presets.contains(pName))
43             continue;
44         SGroup group(settings, name);
45         // Create keys in a map to ensure correct order and no duplicates
46         QMap<int, QColor> colors;
47         foreach(const QString& position, settings.childKeys()){
48             int pos = position.toInt();
49             if(pos < 0 || pos > 100)
50                 continue;
51             colors[pos] = settings.value(position).value<QColor>();
52         }
53         if(colors.count() < 2)
54             continue;
55         Preset preset(name);
56         QMapIterator<int, QColor> i(colors);
57         while(i.hasNext()){
58             i.next();
59             preset.gradient.append(QGradientStop(i.key() / 100., i.value()));
60         }
61         presets[pName] = preset;
62     }
63
```

```
64     updatePresets();
65 }
```

Here is the call graph for this function:

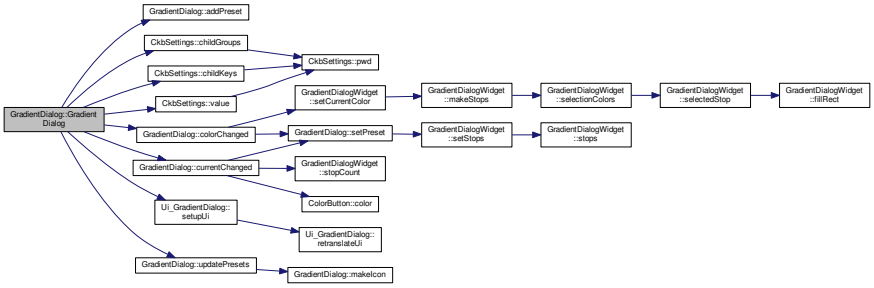

12.18.2.2 GradientDialog::~GradientDialog ( )

Definition at line 77 of file gradientdialog.cpp.

References GradientDialog::Preset::builtIn, GradientDialog::Preset::gradient, GradientDialog::Preset::name, prefsPath, presets, CkbSettings::setValue(), and ui.

```
77                                {
78     // Save presets
79     CkbSettings settings(prefsPath, true);
80     QMapIterator<QString, Preset> i(presets);
81     while(i.hasNext()){
82         Preset preset = i.next().value();
83         if(!preset.builtIn){
84             SGroup group(settings, preset.name);
85             foreach(const QGradientStop& stop, preset.gradient)
86                 settings.setValue(QString::number((int)(stop.first * 100.)), stop.second);
87         }
88     }
89     delete ui;
90 }
```

Here is the call graph for this function:



12.18.3 Member Function Documentation

12.18.3.1 void GradientDialog::addPreset (const Preset & *preset*) [inline], [private]

Definition at line 34 of file gradientdialog.h.

References GradientDialog::Preset::name, and presets.

Referenced by GradientDialog().

```
34 { presets[preset.name.toLower()] = preset; }
```

Here is the caller graph for this function:



12.18.3.2 void GradientDialog::colorChanged (QColor *color*) [private],[slot]

Definition at line 234 of file gradientdialog.cpp.

References GradientDialogWidget::setCurrentColor(), setPreset(), Ui_GradientDialog::stopOpacity, ui, and Ui_GradientDialog::widget.

Referenced by GradientDialog(), and on_stopOpacity_valueChanged().

```
234                                             {
235     color.setAlphaF(ui->stopOpacity->value() / 100.f);
236     ui->widget->setCurrentColor(color);
237     setPreset("");
238 }
```

Here is the call graph for this function:

Here is the caller graph for this function:

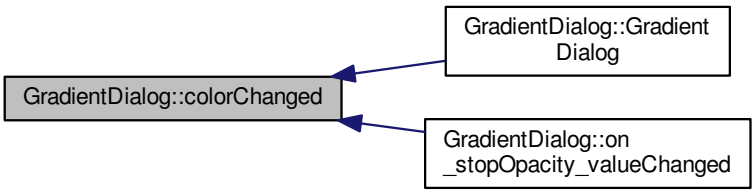

12.18.3.3 void GradientDialog::currentChanged (QColor *color,* bool *spontaneous,* int *position*) [private],[slot]

Definition at line 128 of file gradientdialog.cpp.

References ColorButton::color(), setPreset(), Ui_GradientDialog::stopBox, Ui_GradientDialog::stopColor, GradientDialogWidget::stopCount(), Ui_GradientDialog::stopOpacity, Ui_GradientDialog::stopPos, ui, and Ui_GradientDialog::widget.

Referenced by GradientDialog().

```
128                                                                                 {
129     int pCount = ui->widget->stopCount();
130     if(pCount == 1)
131         ui->stopBox->setTitle("1 point");
132     else
133         ui->stopBox->setTitle(QString("%1 points").arg(pCount));
134     if(!color.isValid()){
135         ui->stopBox->setEnabled(false);
136         ui->stopPos->setValue(0);
137         ui->stopColor->color(QColor(0, 0, 0));
138         ui->stopOpacity->setValue(0);
139     } else {
140         ui->stopBox->setEnabled(true);
141         ui->stopPos->setValue(position);
142         ui->stopColor->color(color);
143         ui->stopOpacity->setValue(round(color.alphaF() * 100.f));
144     }
145     // Un-set current preset
146     if(spontaneous)
147         setPreset("");
148     setFocus();
149 }
```

Here is the call graph for this function:

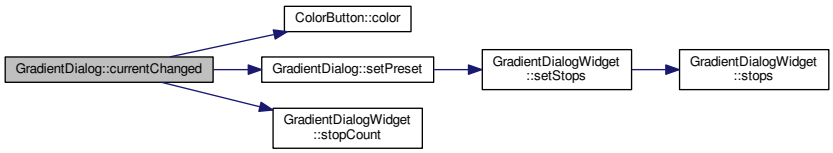

Here is the caller graph for this function:



12.18.3.4 QGradientStops GradientDialog::getGradient (const QGradientStops & *prevGradient*)

Definition at line 67 of file gradientdialog.cpp.

References Ui_GradientDialog::presetDelete, Ui_GradientDialog::presetSave, GradientDialogWidget::setStops(), GradientDialogWidget::stops(), ui, and Ui_GradientDialog::widget.

Referenced by GradientButton::pickGradient().

```
67                                                                                  {
68     ui->presetDelete->setEnabled(false);
69     ui->presetSave->setEnabled(true);
70     ui->widget->setStops(prevGradient);
```

```
71     exec();
72     if(result() != QDialog::Accepted)
73         return prevGradient;
74     return ui->widget->stops();
75 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

12.18.3.5 QIcon GradientDialog::makeIcon (const Preset & *preset*) [private]

Definition at line 92 of file gradientdialog.cpp.

References GradientDialog::Preset::gradient.

Referenced by updatePresets().

```
92                                                  {
93     // Paint gradient into a square
94     int w = 60, h = 60;
95     QImage image(w, h, QImage::Format_RGB888);
96     QPainter painter(&image);
97     // Draw background
98     for(int x = 0; x < w; x += 30){
99         for(int y = 0; y < h; y += 30){
100             painter.fillRect(x, y, 15, 15, QColor(255, 255, 255));
101             painter.fillRect(x + 15, y, 15, 15, QColor(192, 192, 192));
102             painter.fillRect(x, y + 15, 15, 15, QColor(192, 192, 192));
103             painter.fillRect(x + 15, y + 15, 15, 15, QColor(255, 255, 255));
104         }
105     }
106     // Draw gradient
107     painter.setPen(QColor(0, 0, 0));
108     QLinearGradient gradient(1., 1., w - 1., h - 1.);
109     gradient.setStops(preset.gradient);
110     painter.setBrush(gradient);
111     painter.drawRect(0, 0, w - 1, h - 1);
112     return QPixmap::fromImage(image);
113 }
```

Here is the caller graph for this function:

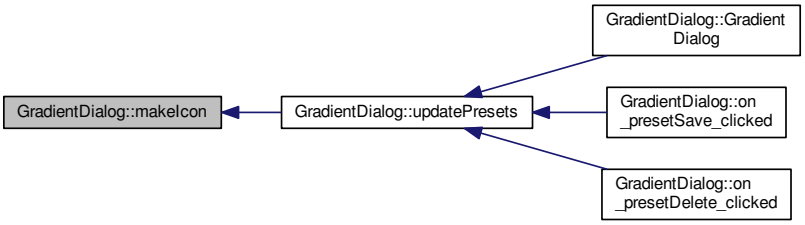

12.18.3.6 void GradientDialog::on_presetDelete_clicked ( ) [private], [slot]

Definition at line 211 of file gradientdialog.cpp.

References GradientDialog::Preset::builtIn, currentPreset, GradientDialog::Preset::name, Ui_GradientDialog::presetDelete, presets, Ui_GradientDialog::presetSave, ui, and updatePresets().

```
211                                             {
212     Preset current = presets.value(currentPreset);
213     if(current.name == "" || current.builtIn)
214         return;
215     if(QMessageBox::warning(this, "Warning", QString("Delete preset \"%1\"?").arg(current.name),
      QMessageBox::StandardButtons(QMessageBox::Yes | QMessageBox::No)) != QMessageBox::Yes){
216         setFocus();
217         return;
218     }
219     presets.remove(currentPreset);
220     currentPreset = "";
221     ui->presetDelete->setEnabled(false);
222     ui->presetSave->setEnabled(true);
223     updatePresets();
224     setFocus();
225 }
```

Here is the call graph for this function:

12.18.3.7 void GradientDialog::on_presetList_currentItemChanged (QListWidgetItem * *current*, QListWidgetItem * *previous*) [private], [slot]

Definition at line 174 of file gradientdialog.cpp.

References setPreset().

```
174                                                                                                 {
175     setPreset(current ? current->text().toLower() : "");
176 }
```

Here is the call graph for this function:

12.18.3.8 void GradientDialog::on_presetName_textEdited (const QString & *arg1*) [private],[slot]

Definition at line 178 of file gradientdialog.cpp.

References currentPreset, presets, and setPreset().

```
178                                                                 {
179     if(currentPreset != "" && arg1.trimmed() != presets[
      currentPreset].name)
180         setPreset("");
181 }
```

Here is the call graph for this function:

12.18.3.9 void GradientDialog::on_presetSave_clicked ( ) [private],[slot]

Definition at line 183 of file gradientdialog.cpp.

References GradientDialog::Preset::builtIn, currentPreset, GradientDialog::Preset::name, Ui_GradientDialog-::presetDelete, Ui_GradientDialog::presetName, presets, Ui_GradientDialog::presetSave, GradientDialogWidget-::stops(), ui, updatePresets(), and Ui_GradientDialog::widget.

```
183                                         {
184     if(currentPreset != "")
185         return;
186     QString name = ui->presetName->text().trimmed();
187     if(name == "")
188         ui->presetName->setText(name = "Custom");
189     QString pName = name.toLower();
190     // Make sure not to overwrite a built-in preset
191     Preset previous = presets[pName];
192     if(previous.builtIn){
193         QMessageBox::warning(this, "Error", "Can't overwrite a built-in preset. Please choose a different
      name.");
194         setFocus();
195         return;
196     } else if(previous.name != ""){
197         // Warn when overwriting an existing preset
198         if(QMessageBox::warning(this, "Warning", QString("Preset \"%1\" already exists. Replace?").arg(name
      ), QMessageBox::StandardButtons(QMessageBox::Save | QMessageBox::Cancel)) != QMessageBox::Save){
199             setFocus();
200             return;
201         }
202     }
203     presets[pName] = Preset(name, ui->widget->stops());
204     currentPreset = pName;
205     ui->presetDelete->setEnabled(true);
206     ui->presetSave->setEnabled(false);
207     updatePresets();
208     setFocus();
209 }
```

Here is the call graph for this function:



12.18.3.10 void GradientDialog::on_stopOpacity_valueChanged (int *arg1*) [private], [slot]

Definition at line 240 of file gradientdialog.cpp.

References ColorButton::color(), colorChanged(), setPreset(), Ui_GradientDialog::stopColor, and ui.

```
240                                                     {
241     colorChanged(ui->stopColor->color());
242     setPreset("");
243 }
```

Here is the call graph for this function:



12.18.3.11 void GradientDialog::on_stopPos_valueChanged (int *arg1*) [private], [slot]

Definition at line 227 of file gradientdialog.cpp.

References GradientDialogWidget::moveCurrent(), setPreset(), Ui_GradientDialog::stopPos, ui, and Ui_GradientDialog::widget.

```
227                                                     {
228     int res = ui->widget->moveCurrent(arg1);
229     if(res != arg1)
230         ui->stopPos->setValue(res);
231     setPreset("");
232 }
```

Here is the call graph for this function:

12.18.3.12 void GradientDialog::setPreset (const QString & *newPreset*) [private]

Definition at line 151 of file gradientdialog.cpp.

References GradientDialog::Preset::builtIn, currentPreset, GradientDialog::Preset::gradient, GradientDialog::Preset::name, Ui_GradientDialog::presetDelete, Ui_GradientDialog::presetList, Ui_GradientDialog::presetName, presets, Ui_GradientDialog::presetSave, GradientDialogWidget::setStops(), ui, and Ui_GradientDialog::widget.

Referenced by colorChanged(), currentChanged(), on_presetList_currentItemChanged(), on_presetName_textEdited(), on_stopOpacity_valueChanged(), and on_stopPos_valueChanged().

```
151                                                 {
152     if(currentPreset == newPreset)
153         return;
154     if(newPreset == ""){
155         ui->presetList->clearSelection();
156         ui->presetList->setCurrentItem(0);
157         Preset current = presets.value(currentPreset);
158         QString curName = ui->presetName->text().trimmed();
159         if(curName == "" || (curName == current.name && current.builtIn))
160             ui->presetName->setText("Custom");
161         ui->presetDelete->setEnabled(false);
162         ui->presetSave->setEnabled(true);
163     } else {
164         Preset current = presets.value(newPreset);
165         ui->presetName->setText(current.name);
166         ui->presetDelete->setEnabled(!current.builtIn);
167         ui->presetSave->setEnabled(false);
168         ui->widget->setStops(current.gradient);
169     }
170     currentPreset = newPreset;
171     setFocus();
172 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

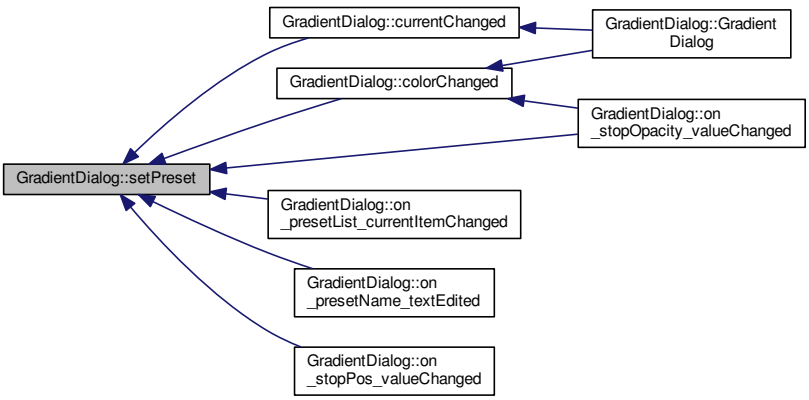

12.18.3.13 void GradientDialog::updatePresets ( ) [private]

Definition at line 115 of file gradientdialog.cpp.

References currentPreset, makeIcon(), GradientDialog::Preset::name, Ui_GradientDialog::presetList, presets, and ui.

Referenced by GradientDialog(), on_presetDelete_clicked(), and on_presetSave_clicked().

```
115                                {
116     ui->presetList->clear();
117     QMapIterator<QString, Preset> i(presets);
118     while(i.hasNext()){
119         i.next();
120         const Preset& preset = i.value();
121         QListWidgetItem* item = new QListWidgetItem(makeIcon(preset), preset.name,
    ui->presetList);
122         if(currentPreset == i.key())
123             item->setSelected(true);
124         ui->presetList->addItem(item);
125     }
126 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

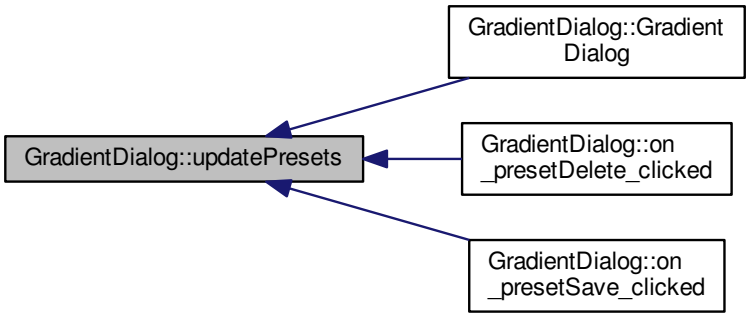

12.18.4 Field Documentation

12.18.4.1 QString GradientDialog::currentPreset [private]

Definition at line 32 of file gradientdialog.h.

Referenced by on_presetDelete_clicked(), on_presetName_textEdited(), on_presetSave_clicked(), setPreset(), and updatePresets().

12.18.4.2 QMap<QString, Preset> GradientDialog::presets [private]

Definition at line 31 of file gradientdialog.h.

Referenced by addPreset(), GradientDialog(), on_presetDelete_clicked(), on_presetName_textEdited(), on_presetSave_clicked(), setPreset(), updatePresets(), and ~GradientDialog().

12.18.4.3 Ui::GradientDialog* GradientDialog::ui [private]

Definition at line 39 of file gradientdialog.h.

Referenced by colorChanged(), currentChanged(), getGradient(), GradientDialog(), on_presetDelete_clicked(), on_presetSave_clicked(), on_stopOpacity_valueChanged(), on_stopPos_valueChanged(), setPreset(), updatePresets(), and ~GradientDialog().

The documentation for this class was generated from the following files:

- src/ckb/gradientdialog.h
- src/ckb/gradientdialog.cpp

12.19 GradientDialogWidget Class Reference

`#include <src/ckb/gradientdialogwidget.h>`

Inheritance diagram for GradientDialogWidget:

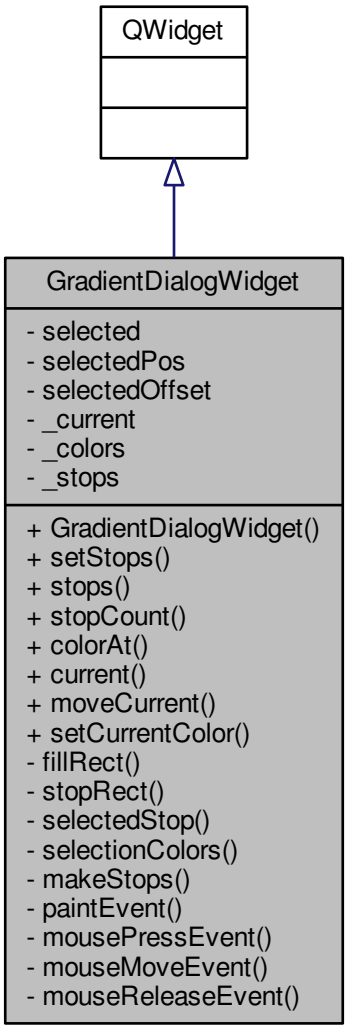

Collaboration diagram for GradientDialogWidget:

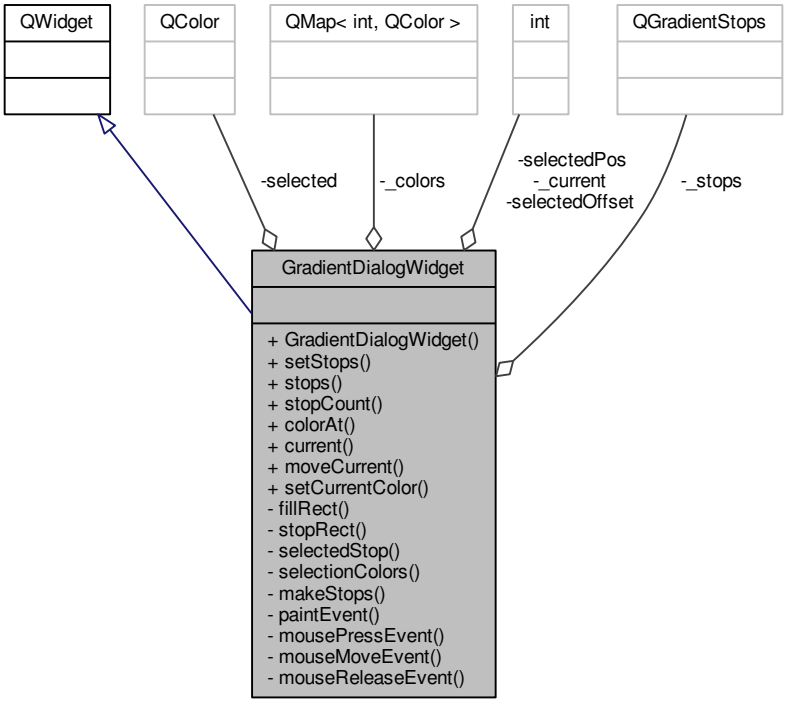

Signals

- void currentChanged (QColor color, bool spontaneous, int position)

Public Member Functions

- GradientDialogWidget (QWidget ∗parent=0)
- void setStops (const QGradientStops &stops)
- QGradientStops stops ()
- int stopCount ()
- QColor colorAt (int position)
- int current ()
- int moveCurrent (int to)
- void setCurrentColor (const QColor &color)

Private Member Functions

- QRect fillRect ()
- QRect stopRect (int pos)
- int selectedStop ()
- QMap< int, QColor > selectionColors ()
- void makeStops ()
- void paintEvent (QPaintEvent ∗)
- void mousePressEvent (QMouseEvent ∗event)
- void mouseMoveEvent (QMouseEvent ∗event)
- void mouseReleaseEvent (QMouseEvent ∗event)

Private Attributes

- QColor selected
- int selectedPos
- int selectedOffset
- int _current
- QMap< int, QColor > _colors
- QGradientStops _stops

12.19.1 Detailed Description

Definition at line 8 of file gradientdialogwidget.h.

12.19.2 Constructor & Destructor Documentation

12.19.2.1 GradientDialogWidget::GradientDialogWidget (QWidget * *parent* = 0) [explicit]

Definition at line 6 of file gradientdialogwidget.cpp.

```
6                                                                   :
7     QWidget(parent), selectedPos(-1), _current(-1)
8 {
9     setMouseTracking(true);
10 }
```

12.19.3 Member Function Documentation

12.19.3.1 QColor GradientDialogWidget::colorAt (int *position*)

Definition at line 65 of file gradientdialogwidget.cpp.

References _stops.

Referenced by mousePressEvent().

```
65                                                {
66     // Find which stops the position is between
67     qreal pos = position / 100.;
68     QVectorIterator<QGradientStop> i(_stops);
69     QGradientStop previous = i.next();
70     while(i.hasNext()){
71         QGradientStop next = i.next();
72         if(next.first >= pos){
73             // Get color by linear interpolation. Premultiply the alpha value so that it returns the
       expected color
74             // (i.e. stops with zero opacity won't contribute to color)
75             QColor c1 = next.second, c2 = previous.second;
76             qreal distance = next.first - previous.first;
77             qreal dx = (pos - previous.first) / distance;
78             qreal a1 = c1.alphaF(), a2 = c2.alphaF();
79             qreal a3 = a1 * dx + a2 * (1.f - dx);
80             if(a3 == 0.){
81                 c2.setAlpha(0);
82                 return c2;
83             }
84             qreal r = (c1.redF() * a1 * dx + c2.redF() * a2 * (1.f - dx)) / a3;
85             qreal g = (c1.greenF() * a1 * dx + c2.greenF() * a2 * (1.f - dx)) / a3;
86             qreal b = (c1.blueF() * a1 * dx + c2.blueF() * a2 * (1.f - dx)) / a3;
87             return QColor::fromRgbF(r, g, b, a3);
88         }
89         previous = next;
90     }
91     return QColor();
92 }
```

Here is the caller graph for this function:

12.19.3.2 int GradientDialogWidget::current ( ) [inline]

Definition at line 20 of file gradientdialogwidget.h.

References _current.

```
20 { return _current; }
```

12.19.3.3 void GradientDialogWidget::currentChanged (QColor *color*, bool *spontaneous*, int *position*) [signal]

Definition at line 126 of file moc_gradientdialogwidget.cpp.

Referenced by mouseReleaseEvent(), and setStops().

```
127 {
128     void *_a[] = { Q_NULLPTR, const_cast<void*>(reinterpret_cast<const void*>(&_t1)), const_cast<void*>(
      reinterpret_cast<const void*>(&_t2)), const_cast<void*>(reinterpret_cast<const void*>(&_t3)) };
129     QMetaObject::activate(this, &staticMetaObject, 0, _a);
130 }
```

Here is the caller graph for this function:

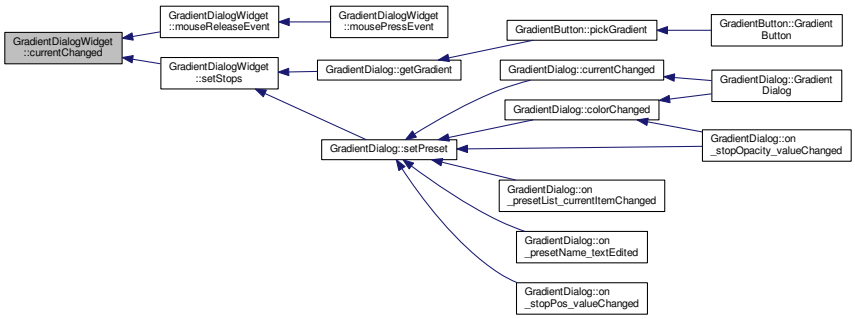

12.19.3.4 QRect GradientDialogWidget::fillRect ( ) [private]

Definition at line 138 of file gradientdialogwidget.cpp.

Referenced by mouseMoveEvent(), mousePressEvent(), paintEvent(), selectedStop(), and stopRect().

```
138                                     {
139     int x = 8, y = 1;
140     int w = (width() - x * 2) / 16 * 16, h = (height() - 24) / 16 * 16;
141     return QRect(x, y, w, h);
142 }
```

Here is the caller graph for this function:

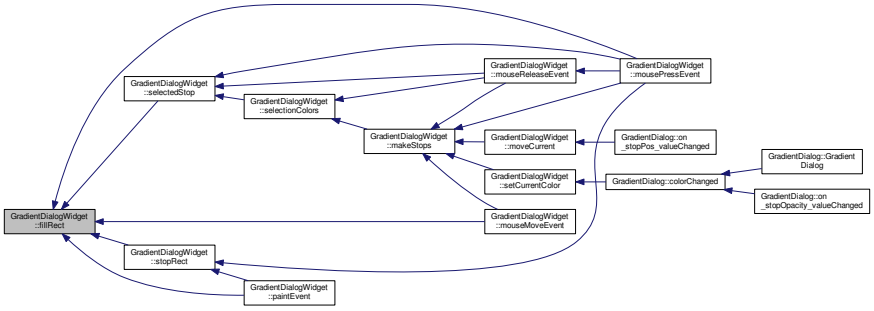

12.19.3.5 void GradientDialogWidget::makeStops ( ) [private]

Definition at line 30 of file gradientdialogwidget.cpp.

References _stops, and selectionColors().

Referenced by mouseMoveEvent(), mousePressEvent(), mouseReleaseEvent(), moveCurrent(), and setCurrentColor().

```
30                                     {
31     _stops.clear();
32     QMap<int, QColor> colors = selectionColors();
33     // If there's only a single color, put it at the beginning and end
34     if(colors.count() == 1){
35 #if QT_VERSION >= QT_VERSION_CHECK(5, 2, 0)
36         QColor color = colors.first();
37 #else
38         QColor color = colors.value(colors.keys().first());
39 #endif
40         _stops.append(QGradientStop(0., color));
41         _stops.append(QGradientStop(1., color));
42         update();
43         return;
44     }
45     // Add colors at 0 and 100 if needed
46 #if QT_VERSION >= QT_VERSION_CHECK(5, 2, 0)
47     if(!colors.contains(0))
48         colors[0] = colors.first();
49     if(!colors.contains(100))
50         colors[100] = colors.last();
51 #else
52     if(!colors.contains(0))
53         colors[0] = colors.value(colors.keys().first());
54     if(!colors.contains(100))
55         colors[100] = colors.value(colors.keys().last());
56 #endif
57     QMapIterator<int, QColor> i(colors);
58     while(i.hasNext()){
59         i.next();
60         _stops.append(QGradientStop(i.key() / 100., i.value()));
61     }
62     update();
63 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

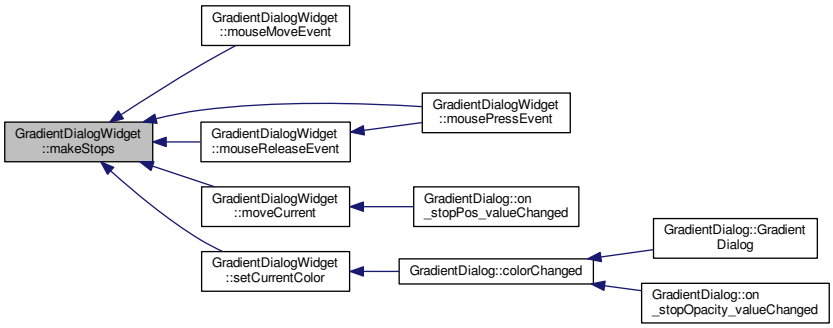

12.19.3.6 void GradientDialogWidget::mouseMoveEvent (QMouseEvent * *event*) [private]

Definition at line 255 of file gradientdialogwidget.cpp.

References _colors, fillRect(), makeStops(), right(), selected, selectedOffset, and selectedPos.

```
255                                                     {
256     if(!selected.isValid()){
257         if(event->y() >= height() - 24)
258             setCursor(QCursor(Qt::PointingHandCursor));
259         else
260             setCursor(QCursor(Qt::ArrowCursor));
261         return;
262     }
263     // Move selected point (if any)
264     setCursor(QCursor(Qt::ClosedHandCursor));
265     selectedPos = event->x() + selectedOffset;
266     // Allow the point to be deleted as long as there is at least 1 other point
267     bool last = (_colors.count() == 0);
268     // Hug the left/right edges
269     QRect rect = fillRect();
270     int left = rect.left(), right = rect.right();
271     if(selectedPos < left && (last || selectedPos >= left - 30))
272         selectedPos = left;
273     else if(selectedPos > right && (last || selectedPos <=
    right + 30))
274         selectedPos = right;
275     // Remove point if it's too far above/below the widget
276     int top = -30, bottom = height() + 30;
277     if(!last && (event->y() < top || event->y() > bottom))
278         selectedPos = -1;
279     makeStops();
280 }
```

Here is the call graph for this function:



12.19.3.7 void GradientDialogWidget::mousePressEvent (QMouseEvent * *event*) [private]

Definition at line 222 of file gradientdialogwidget.cpp.

References _colors, colorAt(), fillRect(), makeStops(), mouseReleaseEvent(), selected, selectedOffset, selectedPos, selectedStop(), and stopRect().

```
222                                                     {
223     int x = event->x(), y = event->y();
224     if(y < height() - 24)
225         return;
226     QMapIterator<int, QColor> i(_colors);
227     while(i.hasNext()){
228         i.next();
229         // If a point was selected, remove it from the color map and set it as the selected point
230         QRect stop = stopRect(i.key());
231         if(x >= stop.left() - 1 && x <= stop.right() + 1){
232             selected = i.value();
233             selectedPos = stop.x() + stop.width() / 2;
234             selectedOffset = selectedPos - x;
235             _colors.remove(i.key());
236             // On right click, delete the point
237             if(event->button() == Qt::RightButton && _colors.count() > 1){
238                 selectedPos = -1;
239                 mouseReleaseEvent(event);
240             } else
241                 update();
242             return;
243         }
244     }
245     // If nothing was selected, create a new point
246     QRect fill = fillRect();
247     if(x > fill.left() && x < fill.right() && event->button() != Qt::RightButton){
248         selectedPos = x;
249         selectedOffset = 0;
250         selected = colorAt(selectedStop());
251         makeStops();
252     }
253 }
```

Here is the call graph for this function:

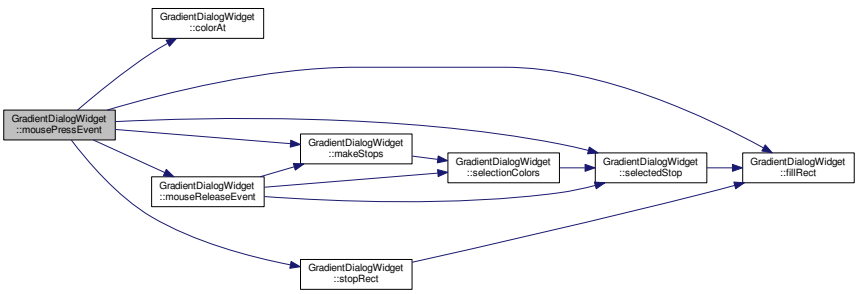

12.19.3.8 void GradientDialogWidget::mouseReleaseEvent (QMouseEvent * *event*) [private]

Definition at line 282 of file gradientdialogwidget.cpp.

References _colors, _current, currentChanged(), makeStops(), selected, selectedPos, selectedStop(), and selectionColors().

Referenced by mousePressEvent().

```
282                                                         {
283     if(selected.isValid()){
284         // Rejoin selection with gradient
285         _current = selectedStop();
286         _colors = selectionColors();
287         emit currentChanged(_colors.value(_current), true,
      _current);
288         selectedPos = -1;
289         selected = QColor();
290         makeStops();
291     }
292     if(event->y() >= height() - 24)
293         setCursor(QCursor(Qt::PointingHandCursor));
294     else
295         setCursor(QCursor(Qt::ArrowCursor));
296 }
```

Here is the call graph for this function:



Here is the caller graph for this function:



12.19.3.9 int GradientDialogWidget::moveCurrent (int *to*)

Definition at line 94 of file gradientdialogwidget.cpp.

References _colors, _current, makeStops(), and selected.

Referenced by GradientDialog::on_stopPos_valueChanged().

```
94                                                  {
95     if(_current < 0 || to == _current || selected.isValid())
96         return _current;
97     // If there's a point in the way, skip past it by continuing in the current direction
98     if(_current < to){
99         while(_colors.contains(to)){
100             to++;
101             if(to > 100)
```

```
102                 return _current;
103             }
104         } else {
105             while(_colors.contains(to)){
106                 to--;
107                 if(to < 0)
108                     return _current;
109             }
110         }
111         _colors[to] = _colors.take(_current);
112         _current = to;
113         makeStops();
114         return to;
115 }
```

Here is the call graph for this function:



Here is the caller graph for this function:



12.19.3.10 void GradientDialogWidget::paintEvent (QPaintEvent *) [private]

Definition at line 172 of file gradientdialogwidget.cpp.

References _colors, _current, _stops, fillRect(), selected, selectedPos, and stopRect().

```
172                                             {
173     QPainter painter(this);
174     QRect fill = fillRect();
175     int x = fill.x(), y = fill.y(), w = fill.width(), h = fill.height();
176 
177     // Draw border around gradient
178     painter.setPen(palette().color(QPalette::Dark));
179     painter.drawLine(x - 1, y - 1, x + w, y - 1);
180     painter.drawLine(x - 1, y - 1, x - 1, y + h);
181     painter.setPen(palette().color(QPalette::Light));
182     painter.drawLine(x - 1, y + h, x + w, y + h);
183     painter.drawLine(x + w, y - 1, x + w, y + h);
184     // Draw background grid
185     for(int i = 0; i < w; i += 16){
186         for(int iy = 0; iy < h; iy += 16){
187             if(i % 32 != iy % 32)
188                 painter.fillRect(x + i, y + iy, 16, 16, QColor(192, 192, 192));
189             else
190                 painter.fillRect(x + i, y + iy, 16, 16, QColor(255, 255, 255));
191         }
192     }
193     // Draw gradient
194     painter.setRenderHint(QPainter::Antialiasing);
195     QLinearGradient gradient(x, 0, x + w, 0);
196     gradient.setStops(_stops);
197     painter.fillRect(fill, QBrush(gradient));
198 
199     // Draw stops
```

```
200     QMapIterator<int, QColor> i(_colors);
201     painter.setPen(palette().color(QPalette::Shadow));
202     while(i.hasNext()){
203         i.next();
204         painter.setBrush(QBrush(i.value()));
205         int index = i.key();
206         if(index == _current){
207             // Highlight currently-edited stop
208             painter.setPen(QPen(palette().color(QPalette::Highlight), 2));
209             painter.drawRoundedRect(stopRect(index), 4, 4);
210             painter.setPen(palette().color(QPalette::Shadow));
211         } else
212             painter.drawRoundedRect(stopRect(index), 4, 4);
213     }
214     // Draw selection (if any)
215     if(selected.isValid() && selectedPos >= x && selectedPos <= x + w){
216         painter.setPen(QPen(palette().color(QPalette::Highlight), 2.5));
217         painter.setBrush(selected);
218         painter.drawRoundedRect(selectedPos - 6, height() - 18 - 2, 12, 18, 4, 4);
219     }
220 }
```

Here is the call graph for this function:



12.19.3.11 int GradientDialogWidget::selectedStop ( ) [private]

Definition at line 152 of file gradientdialogwidget.cpp.

References fillRect(), and selectedPos.

Referenced by mousePressEvent(), mouseReleaseEvent(), and selectionColors().

```
152                                     {
153     QRect rect = fillRect();
154     int res = round((selectedPos - rect.x()) * 100. / rect.width());
155     if(res < 0 || res > 100)
156         return -1;
157     return res;
158 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

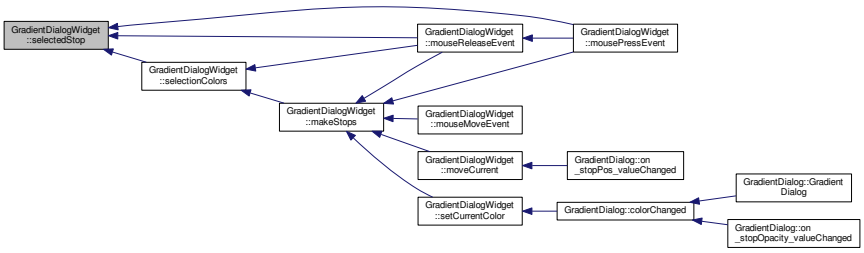

12.19.3.12 QMap< int, QColor > GradientDialogWidget::selectionColors ( ) [private]

Definition at line 160 of file gradientdialogwidget.cpp.

References _colors, selected, and selectedStop().

Referenced by makeStops(), and mouseReleaseEvent().

```
160                                                     {
161     if(!selected.isValid())
162         return _colors;
163     // Determine selected stop position
164     int selPos = selectedStop();
165     // Re-add if in range
166     QMap<int, QColor> res = _colors;
167     if(selPos >= 0 && selPos <= 100)
168         res[selPos] = selected;
169     return res;
170 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

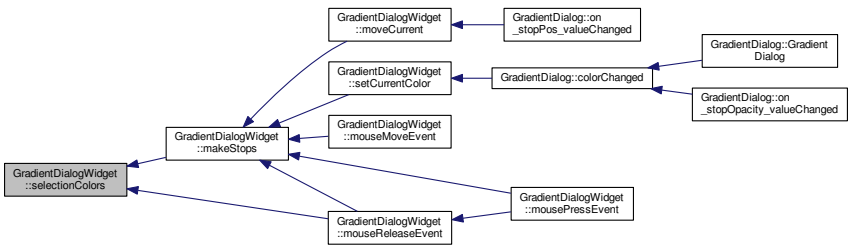

12.19.3.13 void GradientDialogWidget::setCurrentColor (const QColor & *color*)

Definition at line 117 of file gradientdialogwidget.cpp.

References _colors, _current, makeStops(), and selected.

Referenced by GradientDialog::colorChanged().

```
117                                                          {
118     if(_current < 0 || selected.isValid())
119         return;
120     QRgb rgb = _colors.value(_current).rgb();
121     _colors[_current] = color;
122     // If any points follow with the same color but different opacity, change them to match
123     QMutableMapIterator<int, QColor> i(_colors);
124     while(i.hasNext()){
125         i.next();
126         if(i.key() <= _current)
127             continue;
128         QColor& value = i.value();
129         if(value.rgb() != rgb)
130             break;
131         int alpha = value.alpha();
132         value = color;
133         value.setAlpha(alpha);
134     }
135     makeStops();
136 }
```

Here is the call graph for this function:

Here is the caller graph for this function:

12.19.3.14 void GradientDialogWidget::setStops (const QGradientStops & *stops*)

Definition at line 12 of file gradientdialogwidget.cpp.

References _colors, _current, _stops, currentChanged(), and stops().

Referenced by GradientDialog::getGradient(), and GradientDialog::setPreset().

```
12                                                          {
13     _stops = stops;
14     _colors.clear();
15     foreach(const QGradientStop& stop, stops){
16         double pos = stop.first;
17         if(pos < 0. || pos > 1.)
18             continue;
19         _colors[round(pos * 100.)] = stop.second;
20     }
21     _current = 0;
```

```
22 #if QT_VERSION >= QT_VERSION_CHECK(5, 2, 0)
23     emit currentChanged(_colors.first(), false, 0);
24 #else
25     emit currentChanged(_colors.value(_colors.keys().first()), false, 0);
26 #endif
27     update();
28 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

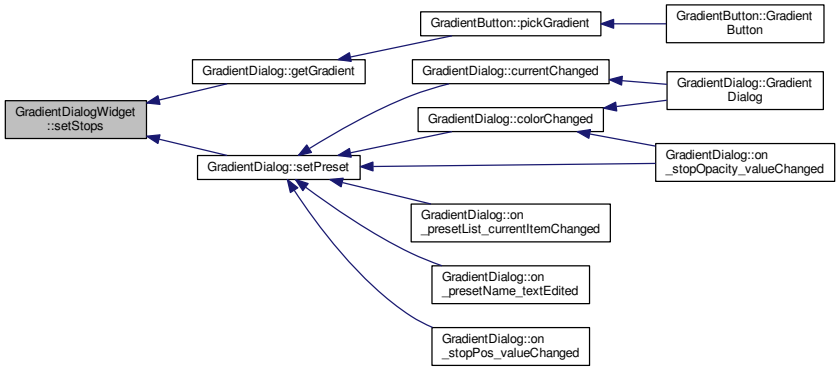

12.19.3.15 int GradientDialogWidget::stopCount ( ) [inline]

Definition at line 16 of file gradientdialogwidget.h.

References _stops.

Referenced by GradientDialog::currentChanged().

```
16 { return _stops.count(); }
```

Here is the caller graph for this function:

12.19.3.16 QRect GradientDialogWidget::stopRect (int *pos*) [private]

Definition at line 144 of file gradientdialogwidget.cpp.

References fillRect().

Referenced by mousePressEvent(), and paintEvent().

```
144                                             {
145     QRect fill = fillRect();
146     int sx = round(pos / 100. * fill.width()) + fill.x() - 6;
147     int sw = 12, sh = 18;
148     int sy = height() - sh - 2;
149     return QRect(sx, sy, sw, sh);
150 }
```

Here is the call graph for this function:

Here is the caller graph for this function:

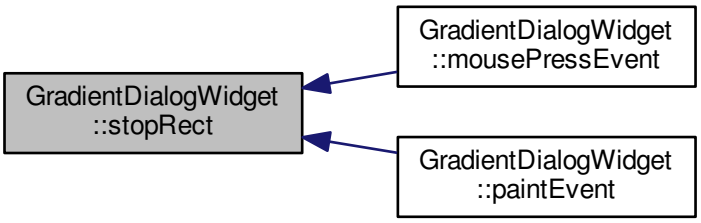

12.19.3.17 QGradientStops GradientDialogWidget::stops ( ) [inline]

Definition at line 15 of file gradientdialogwidget.h.

References _stops.

Referenced by GradientDialog::getGradient(), GradientDialog::on_presetSave_clicked(), and setStops().

```
15 { return _stops; }
```

Here is the caller graph for this function:

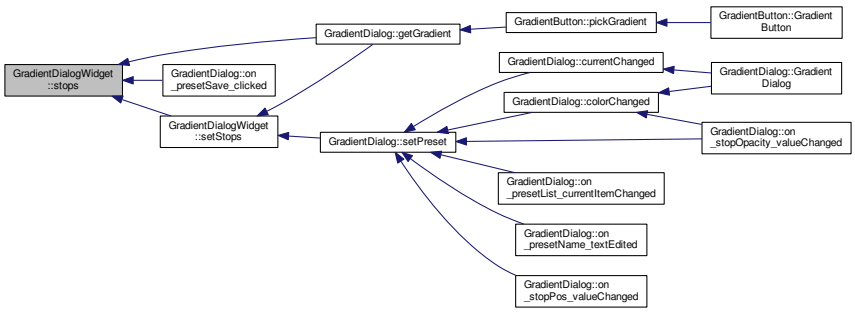

12.19.4 Field Documentation

12.19.4.1 QMap<int, QColor> GradientDialogWidget::_colors [private]

Definition at line 31 of file gradientdialogwidget.h.

Referenced by mouseMoveEvent(), mousePressEvent(), mouseReleaseEvent(), moveCurrent(), paintEvent(), selectionColors(), setCurrentColor(), and setStops().

12.19.4.2 int GradientDialogWidget::_current [private]

Definition at line 30 of file gradientdialogwidget.h.

Referenced by current(), mouseReleaseEvent(), moveCurrent(), paintEvent(), setCurrentColor(), and setStops().

12.19.4.3 QGradientStops GradientDialogWidget::_stops [private]

Definition at line 32 of file gradientdialogwidget.h.

Referenced by colorAt(), makeStops(), paintEvent(), setStops(), stopCount(), and stops().

12.19.4.4 QColor GradientDialogWidget::selected [private]

Definition at line 28 of file gradientdialogwidget.h.

Referenced by mouseMoveEvent(), mousePressEvent(), mouseReleaseEvent(), moveCurrent(), paintEvent(), selectionColors(), and setCurrentColor().

12.19.4.5 int GradientDialogWidget::selectedOffset [private]

Definition at line 29 of file gradientdialogwidget.h.

Referenced by mouseMoveEvent(), and mousePressEvent().

12.19.4.6 int GradientDialogWidget::selectedPos [private]

Definition at line 29 of file gradientdialogwidget.h.

Referenced by mouseMoveEvent(), mousePressEvent(), mouseReleaseEvent(), paintEvent(), and selectedStop().

The documentation for this class was generated from the following files:

- src/ckb/gradientdialogwidget.h
- src/ckb/gradientdialogwidget.cpp
- src/ckb/release/moc_gradientdialogwidget.cpp

12.20 JICompress Class Reference

Utility class for typical operations.

`#include <src/ckb/quazip/JlCompress.h>`

Collaboration diagram for JICompress:

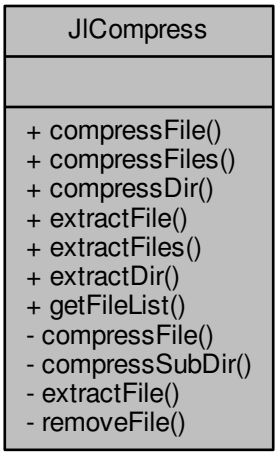

Static Public Member Functions

- static bool compressFile (QString fileCompressed, QString file)

  Compress a single file.
- static bool compressFiles (QString fileCompressed, QStringList files)

  Compress a list of files.
- static bool compressDir (QString fileCompressed, QString dir=QString(), bool recursive=true)

  Compress a whole directory.
- static QString extractFile (QString fileCompressed, QString fileName, QString fileDest=QString())

  Extract a single file.
- static QStringList extractFiles (QString fileCompressed, QStringList files, QString dir=QString())

  Extract a list of files.
- static QStringList extractDir (QString fileCompressed, QString dir=QString())

  Extract a whole archive.
- static QStringList getFileList (QString fileCompressed)

  Get the file list.

Static Private Member Functions

- static bool compressFile (QuaZip *zip, QString fileName, QString fileDest)

  Compress a single file.
- static bool compressSubDir (QuaZip *parentZip, QString dir, QString parentDir, bool recursive=true)

  Compress a subdirectory.
- static bool extractFile (QuaZip *zip, QString fileName, QString fileDest)

  Extract a single file.
- static bool removeFile (QStringList listFile)

  Remove some files.

12.20.1 Detailed Description

This class contains a number of useful static functions to perform simple operations, such as mass ZIP packing or extraction.

Definition at line 42 of file JlCompress.h.

12.20.2 Member Function Documentation

12.20.2.1 bool JlCompress::compressDir (QString *fileCompressed*, QString *dir* = `QString()`, bool *recursive* = `true`) [static]

OK Comprime la cartella dir nel file fileCompressed, se recursive e true allora comprime anche le sotto cartelle.

Parameters

fileCompressed	The name of the archive.
dir	The directory to compress.
recursive	Whether to pack the subdirectories as well, or just regular files.

Returns

true if success, false otherwise.

Se la funzione fallisce restituisce false e cancella il file che si e tentato di creare.

La funzione fallisce se:

- non si riesce ad aprire l'oggetto zip;
- la compressione di un file fallisce;
- non si riesce a chiudere l'oggetto zip;

Definition at line 338 of file JlCompress.cpp.

References QuaZip::close(), compressSubDir(), QuaZip::getZipError(), QuaZip::mdCreate, and QuaZip::open().

```
338                                                                                 {
339     // Creo lo zip
340     QuaZip zip(fileCompressed);
341     QDir().mkpath(QFileInfo(fileCompressed).absolutePath());
342     if(!zip.open(QuaZip::mdCreate)) {
343         QFile::remove(fileCompressed);
344         return false;
345     }
346
347     // Aggiungo i file e le sotto cartelle
348     if (!compressSubDir(&zip,dir,dir,recursive)) {
349         QFile::remove(fileCompressed);
350         return false;
```

```
351     }
352
353     // Chiudo il file zip
354     zip.close();
355     if(zip.getZipError()!=0) {
356         QFile::remove(fileCompressed);
357         return false;
358     }
359
360     return true;
361 }
```

Here is the call graph for this function:

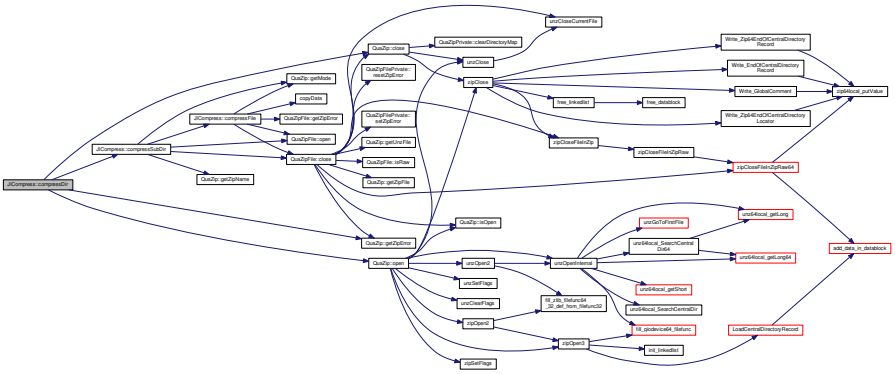

12.20.2.2 bool JICompress::compressFile (QuaZip * *zip*, QString *fileName*, QString *fileDest*) [static], [private]

OK Comprime il file fileName, nell'oggetto zip, con il nome fileDest.

Parameters

zip	Opened zip to compress the file to.
fileName	The full path to the source file.
fileDest	The full name of the file inside the archive.

Returns

true if success, false otherwise.

La funzione fallisce se:

- zip==NULL;
- l'oggetto zip e stato aperto in una modalita non compatibile con l'aggiunta di file;
- non e possibile aprire il file d'origine;
- non e possibile creare il file all'interno dell'oggetto zip;
- si e rilevato un errore nella copia dei dati;
- non e stato possibile chiudere il file all'interno dell'oggetto zip;

Definition at line 53 of file JICompress.cpp.

References QuaZipFile::close(), copyData(), QuaZip::getMode(), QuaZipFile::getZipError(), QuaZip::mdAdd, QuaZip::mdAppend, QuaZip::mdCreate, QuaZipFile::open(), and UNZ_OK.

Referenced by compressFile(), compressFiles(), and compressSubDir().

```
53                                                                                  {
54      // zip: oggetto dove aggiungere il file
55      // fileName: nome del file reale
56      // fileDest: nome del file all'interno del file compresso
57
58      // Controllo l'apertura dello zip
59      if (!zip) return false;
60      if (zip->getMode()!=QuaZip::mdCreate &&
61          zip->getMode()!=QuaZip::mdAppend &&
62          zip->getMode()!=QuaZip::mdAdd) return false;
63
64      // Apro il file originale
65      QFile inFile;
66      inFile.setFileName(fileName);
67      if(!inFile.open(QIODevice::ReadOnly)) return false;
68
69      // Apro il file risulato
70      QuaZipFile outFile(zip);
71      if(!outFile.open(QIODevice::WriteOnly, QuaZipNewInfo(fileDest, inFile.fileName()))) return
        false;
72
73      // Copio i dati
74      if (!copyData(inFile, outFile) || outFile.getZipError()!=UNZ_OK) {
75          return false;
76      }
77
78      // Chiudo i file
79      outFile.close();
80      if (outFile.getZipError()!=UNZ_OK) return false;
81      inFile.close();
82
83      return true;
84  }
```

Here is the call graph for this function:

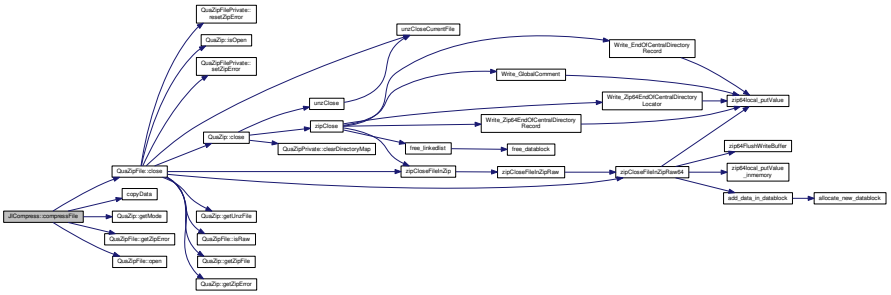

Here is the caller graph for this function:

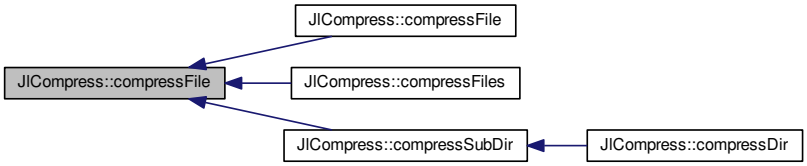

12.20.2.3 bool JICompress::compressFile (QString *fileCompressed,* QString *file*) [static]

OK Comprime il file fileName nel file fileCompressed.

Parameters

fileCompressed	The name of the archive.
file	The file to compress.

Returns

true if success, false otherwise.

Se la funzione fallisce restituisce false e cancella il file che si e tentato di creare.

La funzione fallisce se:

- non si riesce ad aprire l'oggetto zip;
- la compressione del file fallisce;
- non si riesce a chiudere l'oggetto zip;

Definition at line 263 of file JICompress.cpp.

References QuaZip::close(), compressFile(), QuaZip::getZipError(), QuaZip::mdCreate, and QuaZip::open().

```
263                                                                 {
264     // Creo lo zip
265     QuaZip zip(fileCompressed);
266     QDir().mkpath(QFileInfo(fileCompressed).absolutePath());
267     if(!zip.open(QuaZip::mdCreate)) {
268         QFile::remove(fileCompressed);
269         return false;
270     }
271
272     // Aggiungo il file
273     if (!compressFile(&zip,file,QFileInfo(file).fileName())) {
274         QFile::remove(fileCompressed);
275         return false;
276     }
277
278     // Chiudo il file zip
279     zip.close();
280     if(zip.getZipError()!=0) {
281         QFile::remove(fileCompressed);
282         return false;
283     }
284
285     return true;
286 }
```

Here is the call graph for this function:

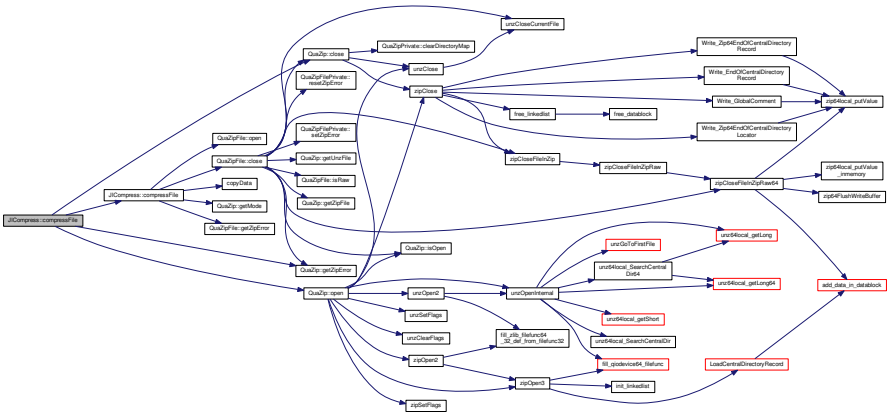

12.20.2.4 bool JICompress::compressFiles (QString *fileCompressed*, QStringList *files*) [static]

OK Comprime i file specificati in files nel file fileCompressed.

Parameters

fileCompressed	The name of the archive.
files	The file list to compress.

Returns

true if success, false otherwise.

Se la funzione fallisce restituisce false e cancella il file che si e tentato di creare.

La funzione fallisce se:

- non si riesce ad aprire l'oggetto zip;
- la compressione di un file fallisce;
- non si riesce a chiudere l'oggetto zip;

Definition at line 298 of file JICompress.cpp.

References QuaZip::close(), compressFile(), QuaZip::getZipError(), QuaZip::mdCreate, and QuaZip::open().

```
298                                                                    {
299     // Creo lo zip
300     QuaZip zip(fileCompressed);
301     QDir().mkpath(QFileInfo(fileCompressed).absolutePath());
302     if(!zip.open(QuaZip::mdCreate)) {
303         QFile::remove(fileCompressed);
304         return false;
305     }
306
307     // Comprimo i file
308     QFileInfo info;
309     Q_FOREACH (QString file, files) {
310         info.setFile(file);
311         if (!info.exists() || !compressFile(&zip,file,info.fileName())) {
312             QFile::remove(fileCompressed);
313             return false;
314         }
315     }
316
317     // Chiudo il file zip
318     zip.close();
319     if(zip.getZipError()!=0) {
320         QFile::remove(fileCompressed);
321         return false;
322     }
323
324     return true;
325 }
```

Here is the call graph for this function:

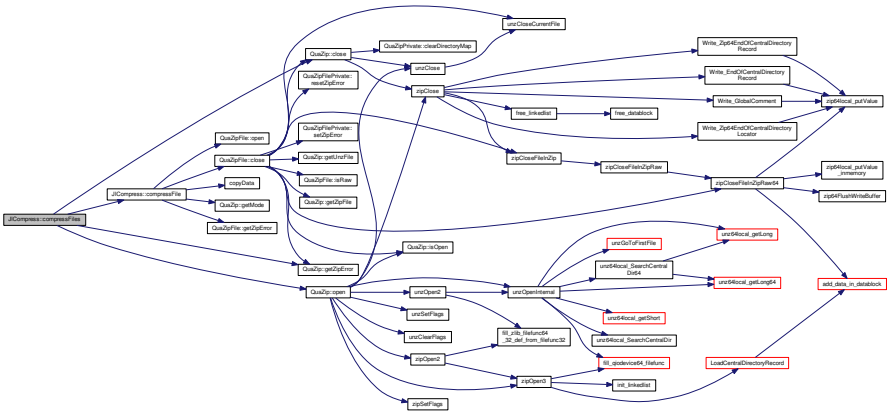

12.20.2.5 bool JICompress::compressSubDir (QuaZip * *zip,* QString *dir,* QString *origDir,* bool *recursive* = `true`) [static], [private]

OK Comprime la cartella dir nel file fileCompressed, se recursive e true allora comprime anche le sotto cartelle.

Parameters

parentZip	Opened zip containing the parent directory.
dir	The full path to the directory to pack.
parentDir	The full path to the directory corresponding to the root of the ZIP.
recursive	Whether to pack sub-directories as well or only files.

Returns

true if success, false otherwise.

I nomi dei file preceduti dal path creato togliendo il pat della cartella origDir al path della cartella dir. Se la funzione fallisce restituisce false e cancella il file che si e tentato di creare.

La funzione fallisce se:

- zip==NULL;
- l'oggetto zip e stato aperto in una modalita non compatibile con l'aggiunta di file;
- la cartella dir non esiste;
- la compressione di una sotto cartella fallisce (1);
- la compressione di un file fallisce; (1) La funzione si richiama in maniera ricorsiva per comprimere le sotto cartelle dunque gli errori di compressione di una sotto cartella sono gli stessi di questa funzione.

Definition at line 103 of file JICompress.cpp.

References QuaZipFile::close(), compressFile(), QuaZip::getMode(), QuaZip::getZipName(), QuaZip::mdAdd, QuaZip::mdAppend, QuaZip::mdCreate, and QuaZipFile::open().

Referenced by compressDir().

```
103                                                                                                 {
104     // zip: oggetto dove aggiungere il file
105     // dir: cartella reale corrente
106     // origDir: cartella reale originale
107     // (path(dir)-path(origDir)) = path interno all'oggetto zip
108
109     // Controllo l'apertura dello zip
110     if (!zip) return false;
111     if (zip->getMode()!=QuaZip::mdCreate &&
112         zip->getMode()!=QuaZip::mdAppend &&
113         zip->getMode()!=QuaZip::mdAdd) return false;
114
115     // Controllo la cartella
116     QDir directory(dir);
117     if (!directory.exists()) return false;
118
119     QDir origDirectory(origDir);
120     if (dir != origDir) {
121         QuaZipFile dirZipFile(zip);
122         if (!dirZipFile.open(QIODevice::WriteOnly,
123             QuaZipNewInfo(origDirectory.relativeFilePath(dir) + "/", dir), 0, 0, 0)) {
124                 return false;
125         }
126         dirZipFile.close();
127     }
128
129
130     // Se comprimo anche le sotto cartelle
131     if (recursive) {
132         // Per ogni sotto cartella
133         QFileInfoList files = directory.entryInfoList(QDir::AllDirs|QDir::NoDotAndDotDot);
134         Q_FOREACH (QFileInfo file, files) {
135             // Comprimo la sotto cartella
136             if(!compressSubDir(zip,file.absoluteFilePath(),origDir,recursive)) return false;
137         }
138     }
139
140     // Per ogni file nella cartella
141     QFileInfoList files = directory.entryInfoList(QDir::Files);
142     Q_FOREACH (QFileInfo file, files) {
143         // Se non e un file o e il file compresso che sto creando
```

```
144         if(!file.isFile()||file.absoluteFilePath()==zip->getZipName()) continue;
145
146         // Creo il nome relativo da usare all'interno del file compresso
147         QString filename = origDirectory.relativeFilePath(file.absoluteFilePath());
148
149         // Comprimo il file
150         if (!compressFile(zip,file.absoluteFilePath(),filename)) return false;
151     }
152
153     return true;
154 }
```

Here is the call graph for this function:

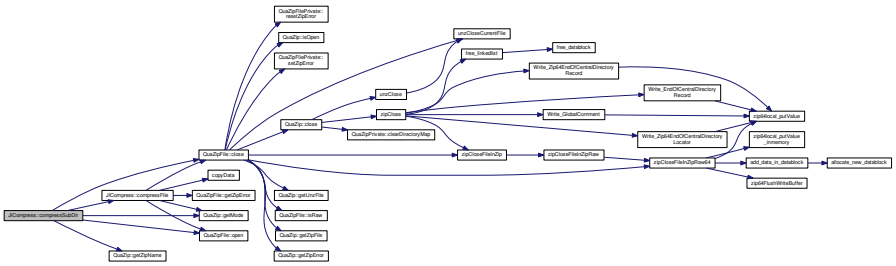

Here is the caller graph for this function:



12.20.2.6 QStringList JICompress::extractDir (QString *fileCompressed*, QString *dir* = QString()) [static]

OK Estrae il file fileCompressed nella cartella dir.

Parameters

fileCompressed	The name of the archive.
dir	The directory to extract to, the current directory if left empty.

Returns

The list of the full paths of the files extracted, empty on failure.

Se dir = "" allora il file viene estratto nella cartella corrente. Se la funzione fallisce cancella i file che si e tentato di estrarre. Restituisce i nomi assoluti dei file estratti.

La funzione fallisce se:

- non si riesce ad aprire l'oggetto zip;
- la compressione di un file fallisce;
- non si riesce a chiudere l'oggetto zip;

Definition at line 451 of file JICompress.cpp.

References QuaZip::close(), extractFile(), QuaZip::getCurrentFileName(), QuaZip::getZipError(), QuaZip::goToFirstFile(), QuaZip::goToNextFile(), QuaZip::mdUnzip, QuaZip::open(), and removeFile().

```
451                                                                 {
452     // Apro lo zip
453     QuaZip zip(fileCompressed);
454     if(!zip.open(QuaZip::mdUnzip)) {
455         return QStringList();
456     }
457
458     QDir directory(dir);
459     QStringList extracted;
460     if (!zip.goToFirstFile()) {
461         return QStringList();
462     }
463     do {
464         QString name = zip.getCurrentFileName();
465         QString absFilePath = directory.absoluteFilePath(name);
466         if (!extractFile(&zip, "", absFilePath)) {
467             removeFile(extracted);
468             return QStringList();
469         }
470         extracted.append(absFilePath);
471     } while (zip.goToNextFile());
472
473     // Chiudo il file zip
474     zip.close();
475     if(zip.getZipError()!=0) {
476         removeFile(extracted);
477         return QStringList();
478     }
479
480     return extracted;
481 }
```

Here is the call graph for this function:

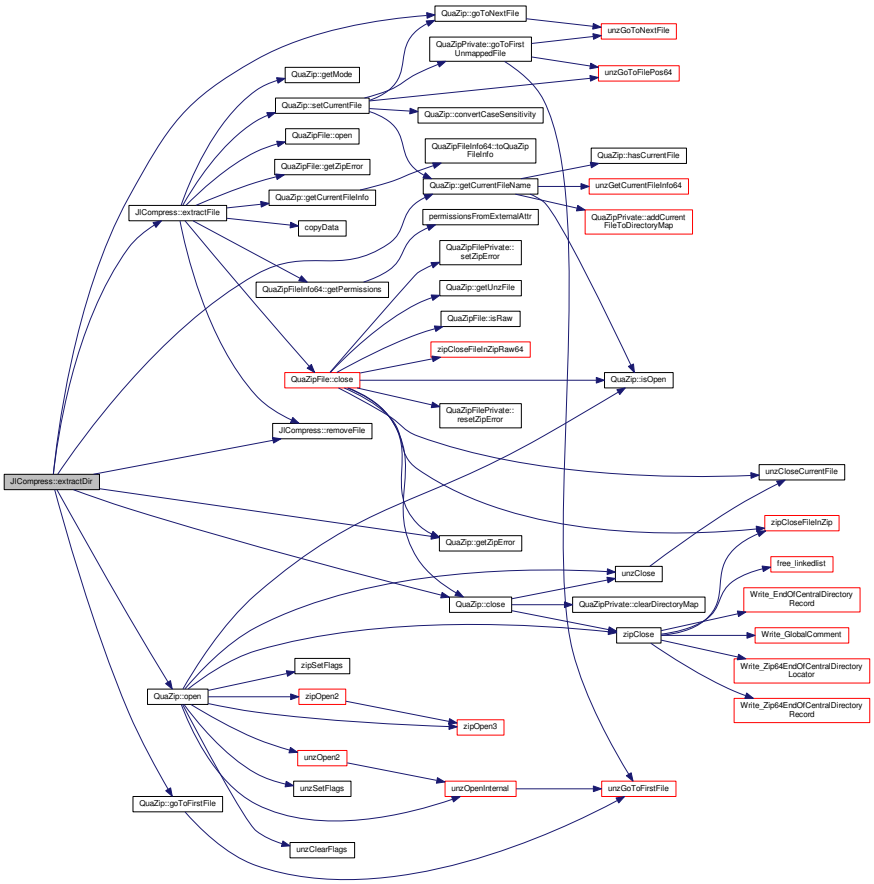

12.20.2.7 bool JICompress::extractFile (QuaZip * *zip*, QString *fileName*, QString *fileDest*) [static],[private]

OK Estrae il file fileName, contenuto nell'oggetto zip, con il nome fileDest.

Parameters

zip	The opened zip archive to extract from.
fileName	The full name of the file to extract.
fileDest	The full path to the destination file.

Returns

true if success, false otherwise.

Se la funzione fallisce restituisce false e cancella il file che si e tentato di estrarre.

La funzione fallisce se:

- zip==NULL;
- l'oggetto zip e stato aperto in una modalita non compatibile con l'estrazione di file;
- non e possibile aprire il file all'interno dell'oggetto zip;
- non e possibile creare il file estratto;
- si e rilevato un errore nella copia dei dati (1);
- non e stato possibile chiudere il file all'interno dell'oggetto zip (1);

(1): prima di uscire dalla funzione cancella il file estratto.

Definition at line 170 of file JICompress.cpp.

References QuaZipFile::close(), copyData(), QuaZip::getCurrentFileInfo(), QuaZip::getMode(), QuaZipFileInfo64::getPermissions(), QuaZipFile::getZipError(), QuaZip::mdUnzip, QuaZipFile::open(), removeFile(), QuaZip::setCurrentFile(), and UNZ_OK.

Referenced by extractDir(), extractFile(), and extractFiles().

```
170                                                                                 {
171     // zip: oggetto dove aggiungere il file
172     // filename: nome del file reale
173     // fileincompress: nome del file all'interno del file compresso
174
175     // Controllo l'apertura dello zip
176     if (!zip) return false;
177     if (zip->getMode()!=QuaZip::mdUnzip) return false;
178
179     // Apro il file compresso
180     if (!fileName.isEmpty())
181         zip->setCurrentFile(fileName);
182     QuaZipFile inFile(zip);
183     if(!inFile.open(QIODevice::ReadOnly) || inFile.getZipError()!=UNZ_OK) return false;
184
185     // Controllo esistenza cartella file risultato
186     QDir curDir;
187     if (fileDest.endsWith('/')) {
188         if (!curDir.mkpath(fileDest)) {
189             return false;
190         }
191     } else {
192         if (!curDir.mkpath(QFileInfo(fileDest).absolutePath())) {
193             return false;
194         }
195     }
196
197     QuaZipFileInfo64 info;
198     if (!zip->getCurrentFileInfo(&info))
199         return false;
200
201     QFile::Permissions srcPerm = info.getPermissions();
202     if (fileDest.endsWith('/') && QFileInfo(fileDest).isDir()) {
203         if (srcPerm != 0) {
```

```
204             QFile(fileDest).setPermissions(srcPerm);
205         }
206         return true;
207     }
208 
209     // Apro il file risultato
210     QFile outFile;
211     outFile.setFileName(fileDest);
212     if(!outFile.open(QIODevice::WriteOnly)) return false;
213 
214     // Copio i dati
215     if (!copyData(inFile, outFile) || inFile.getZipError()!=UNZ_OK) {
216         outFile.close();
217         removeFile(QStringList(fileDest));
218         return false;
219     }
220     outFile.close();
221 
222     // Chiudo i file
223     inFile.close();
224     if (inFile.getZipError()!=UNZ_OK) {
225         removeFile(QStringList(fileDest));
226         return false;
227     }
228 
229     if (srcPerm != 0) {
230         outFile.setPermissions(srcPerm);
231     }
232     return true;
233 }
```

Here is the call graph for this function:

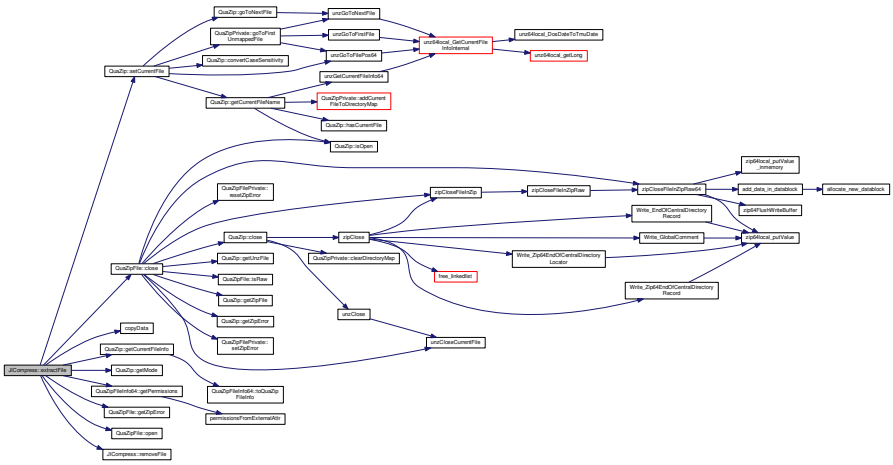

Here is the caller graph for this function:

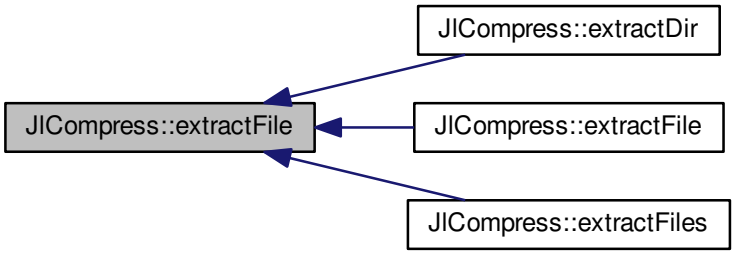

12.20.2.8 QString JICompress::extractFile (QString *fileCompressed,* QString *fileName,* QString *fileDest* = `QString()`) [static]

OK Estrae il file fileName, contenuto nel file fileCompressed, con il nome fileDest.

Parameters

fileCompressed	The name of the archive.
fileName	The file to extract.
fileDest	The destination file, assumed to be identical to *file* if left empty.

Returns

The list of the full paths of the files extracted, empty on failure.

Se fileDest = "" allora il file viene estratto con lo stesso nome con cui e stato compresso. Se la funzione fallisce cancella il file che si e tentato di estrarre. Restituisce il nome assoluto del file estratto.

La funzione fallisce se:

- non si riesce ad aprire l'oggetto zip;
- l'estrazione del file fallisce;
- non si riesce a chiudere l'oggetto zip;

Definition at line 377 of file JICompress.cpp.

References QuaZip::close(), extractFile(), QuaZip::getZipError(), QuaZip::mdUnzip, QuaZip::open(), and removeFile().

```
377                                                                                                 {
378     // Apro lo zip
379     QuaZip zip(fileCompressed);
380     if(!zip.open(QuaZip::mdUnzip)) {
381         return QString();
382     }
383
384     // Estraggo il file
385     if (fileDest.isEmpty())
386         fileDest = fileName;
387     if (!extractFile(&zip,fileName,fileDest)) {
388         return QString();
389     }
390
391     // Chiudo il file zip
392     zip.close();
393     if(zip.getZipError()!=0) {
394         removeFile(QStringList(fileDest));
395         return QString();
396     }
397     return QFileInfo(fileDest).absoluteFilePath();
398 }
```

Here is the call graph for this function:

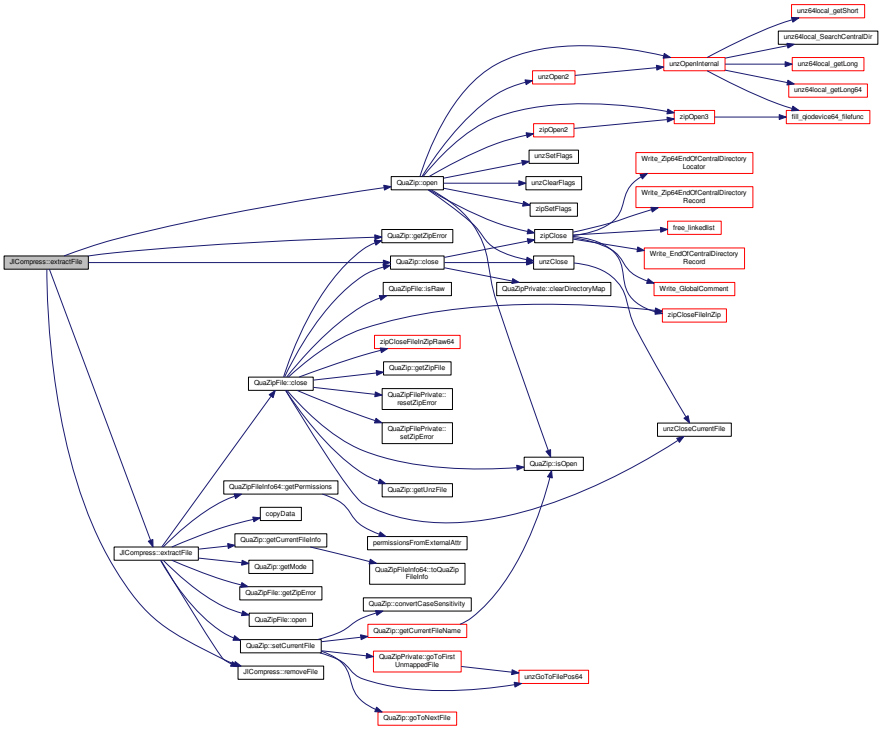

12.20.2.9 QStringList JICompress::extractFiles (QString *fileCompressed,* QStringList *files,* QString *dir* = `QString()`) [static]

OK Estrae i file specificati in files, contenuti nel file fileCompressed, nella cartella dir.

Parameters

fileCompressed	The name of the archive.
files	The file list to extract.
dir	The directory to put the files to, the current directory if left empty.

Returns

The list of the full paths of the files extracted, empty on failure.

La struttura a cartelle del file compresso viene rispettata. Se dir = "" allora il file viene estratto nella cartella corrente. Se la funzione fallisce cancella i file che si e tentato di estrarre. Restituisce i nomi assoluti dei file estratti.

La funzione fallisce se:

- non si riesce ad aprire l'oggetto zip;
- l'estrazione di un file fallisce;
- non si riesce a chiudere l'oggetto zip;

Definition at line 412 of file JICompress.cpp.

References QuaZip::close(), extractFile(), QuaZip::getZipError(), QuaZip::mdUnzip, QuaZip::open(), and removeFile().

```
412                                                                                                 {
413     // Creo lo zip
414     QuaZip zip(fileCompressed);
415     if(!zip.open(QuaZip::mdUnzip)) {
416         return QStringList();
417     }
418
419     // Estraggo i file
420     QStringList extracted;
421     for (int i=0; i<files.count(); i++) {
422         QString absPath = QDir(dir).absoluteFilePath(files.at(i));
423         if (!extractFile(&zip, files.at(i), absPath)) {
424             removeFile(extracted);
425             return QStringList();
426         }
427         extracted.append(absPath);
428     }
429
430     // Chiudo il file zip
431     zip.close();
432     if(zip.getZipError()!=0) {
433         removeFile(extracted);
434         return QStringList();
435     }
436
437     return extracted;
438 }
```

Here is the call graph for this function:

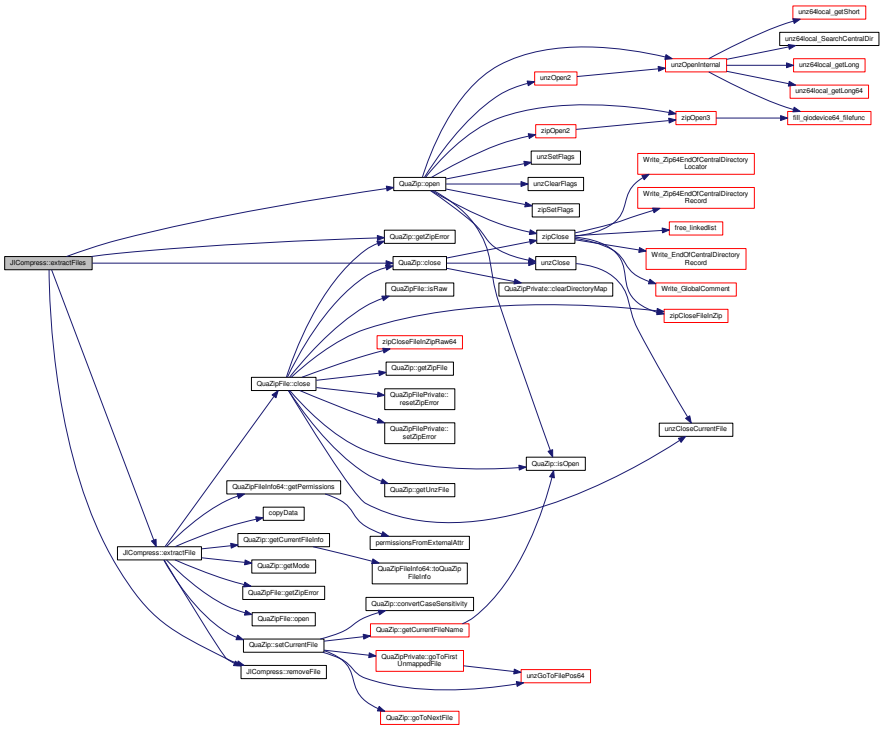

12.20.2.10 QStringList JlCompress::getFileList (QString *fileCompressed*) [static]

OK Restituisce la lista dei file resenti nel file compresso fileCompressed.

Returns

The list of the files in the archive, or, more precisely, the list of the entries, including both files and directories if they are present separately.

Se la funzione fallisce, restituisce un elenco vuoto.

La funzione fallisce se:

- non si riesce ad aprire l'oggetto zip;
- la richiesta di informazioni di un file fallisce;
- non si riesce a chiudere l'oggetto zip;

Definition at line 492 of file JICompress.cpp.

References QuaZip::close(), QuaZip::getCurrentFileInfo(), QuaZip::getZipError(), QuaZip::goToFirstFile(), QuaZip::goToNextFile(), QuaZip::mdUnzip, QuaZipFileInfo64::name, and QuaZip::open().

```
492                                                     {
493     // Apro lo zip
494     QuaZip* zip = new QuaZip(QFileInfo(fileCompressed).absoluteFilePath());
495     if(!zip->open(QuaZip::mdUnzip)) {
496         delete zip;
497         return QStringList();
498     }
499
500     // Estraggo i nomi dei file
501     QStringList lst;
502     QuaZipFileInfo64 info;
503     for(bool more=zip->goToFirstFile(); more; more=zip->
      goToNextFile()) {
504       if(!zip->getCurrentFileInfo(&info)) {
505           delete zip;
506           return QStringList();
507       }
508       lst << info.name;
509       //info.name.toLocal8Bit().constData()
510     }
511
512     // Chiudo il file zip
513     zip->close();
514     if(zip->getZipError()!=0) {
515         delete zip;
516         return QStringList();
517     }
518     delete zip;
519
520     return lst;
521 }
```

Here is the call graph for this function:

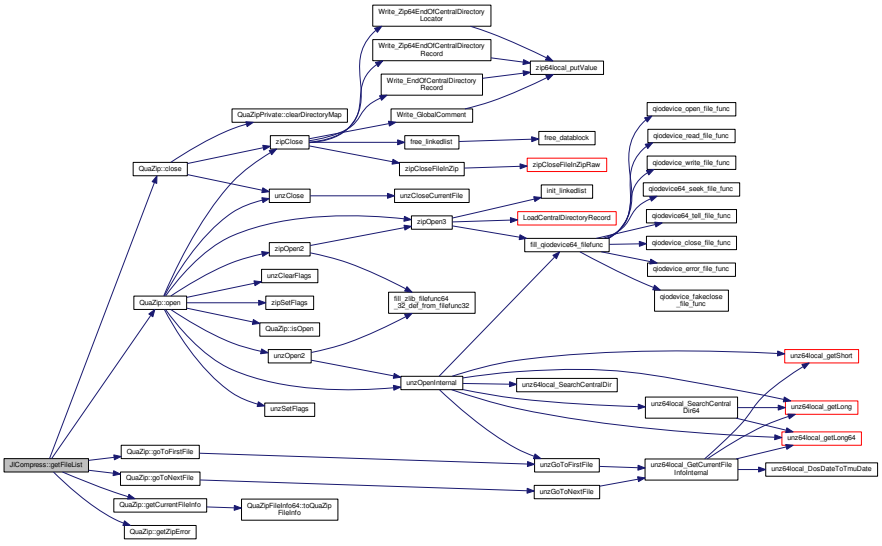

12.20.2.11 bool JlCompress::removeFile (QStringList *listFile*) [static],[private]

Rimuove i file il cui nome e specificato all'interno di listFile.

Parameters

listFile	The list of files to remove.

Returns

true if success, false otherwise.

Restituisce true se tutti i file sono stati cancellati correttamente, attenzione perche puo restituire false anche se alcuni file non esistevano e si e tentato di cancellarli.

Definition at line 241 of file JlCompress.cpp.

Referenced by extractDir(), extractFile(), and extractFiles().

```
241                                                 {
242     bool ret = true;
243     // Per ogni file
244     for (int i=0; i<listFile.count(); i++) {
245         // Lo elimino
246         ret = ret && QFile::remove(listFile.at(i));
247     }
248     return ret;
249 }
```

Here is the caller graph for this function:

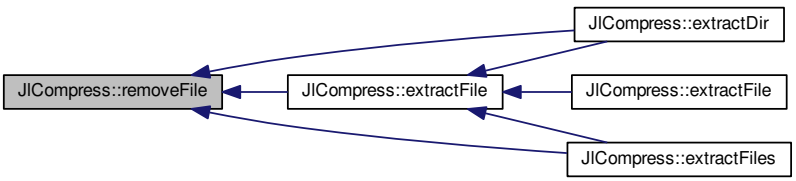

The documentation for this class was generated from the following files:

- src/ckb/quazip/JlCompress.h
- src/ckb/quazip/JlCompress.cpp

12.21 Kb Class Reference

`#include <src/ckb/kb.h>`

Inheritance diagram for Kb:

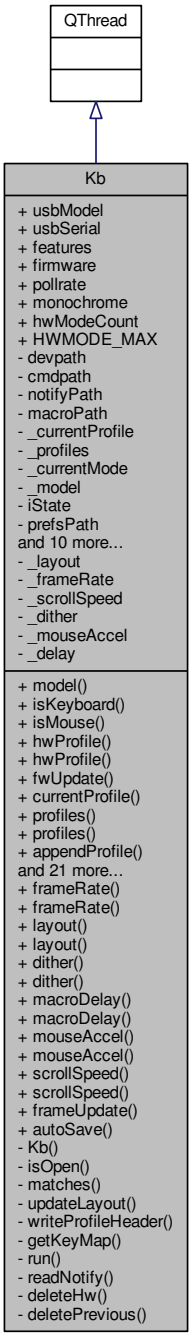

Collaboration diagram for Kb:

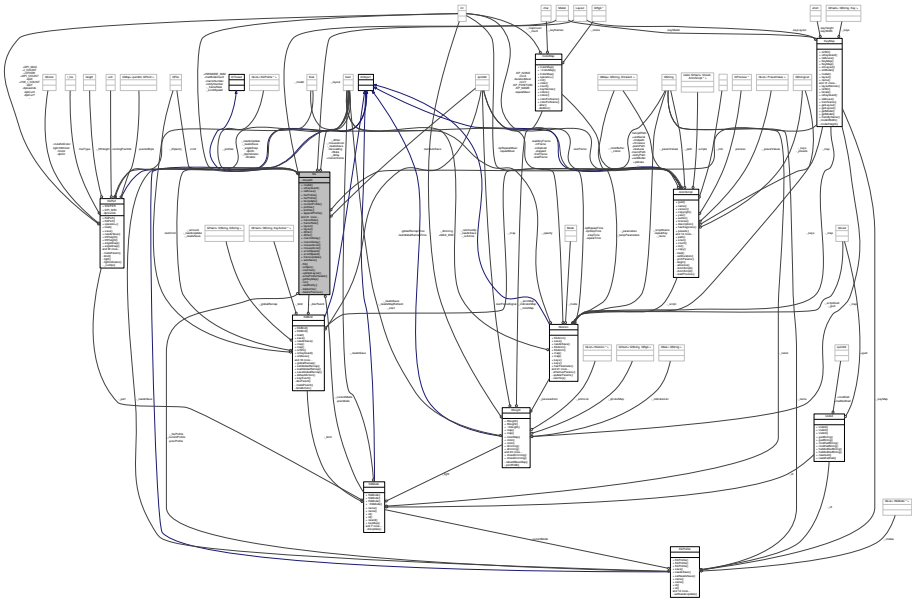

Public Slots

- void frameUpdate ()
- void autoSave ()

Signals

- void infoUpdated ()
- void profileAdded ()
- void profileRenamed ()
- void modeRenamed ()
- void profileChanged ()
- void modeChanged (bool spontaneous)
- void fwUpdateProgress (int current, int total)
- void fwUpdateFinished (bool succeeded)

Public Member Functions

- KeyMap::Model model () const
- bool isKeyboard () const
- bool isMouse () const
- KbProfile * hwProfile ()
- void hwProfile (KbProfile *newHwProfile)
- void fwUpdate (const QString &path)
- KbProfile * currentProfile ()
- const QList< KbProfile * > & profiles () const
- void profiles (const QList< KbProfile * > &newProfiles)
- void appendProfile (KbProfile *newProfile)
- int indexOf (KbProfile *profile)
- KbProfile * find (const QUuid &id)
- KbMode * currentMode ()

- KbLight * currentLight ()
- KbBind * currentBind ()
- KbPerf * currentPerf ()
- void setCurrentProfile (KbProfile *profile, bool spontaneous=true)
- void setCurrentMode (KbProfile *profile, KbMode *mode, bool spontaneous=true)
- void setCurrentMode (KbProfile *profile, int index, bool spontaneous=true)
- void setCurrentMode (KbMode *mode, bool spontaneous=true)
- KbProfile * newProfile ()
- KbProfile * newProfile (KbProfile *other)
- KbMode * newMode ()
- KbMode * newMode (KbMode *other)
- void load ()
- void save ()
- bool needsSave () const
- void hwSave ()
- int getMacroNumber ()

  For usage with macro definions, these two params must only be readable. So there are no setters.
- QString getMacroPath ()

  getMacroPath returns the macroPath (e.g. /dev/input/ckb1/notify), which we have saved in the constructor. For usage with macro definions, this param must only be readable. So there is no setter.
- ~Kb ()

Static Public Member Functions

- static int frameRate ()
- static void frameRate (int newFrameRate)
- static KeyMap::Layout layout ()
- static void layout (KeyMap::Layout newLayout)
- static bool dither ()
- static void dither (bool newDither)
- static bool macroDelay ()
- static void macroDelay (bool flag)

  Kb::macroDelay handles the UI-Element macroBox. Sends a command to the keyboard to switch on or off the delay function on very large macros.
- static bool mouseAccel ()
- static void mouseAccel (bool newAccel)
- static int scrollSpeed ()
- static void scrollSpeed (int newSpeed)

Data Fields

- QString usbModel
- QString usbSerial
- QString features
- QString firmware
- QString pollrate
- bool monochrome
- int hwModeCount

Static Public Attributes

- static const int HWMODE_MAX = 3

Private Slots

- void readNotify (QString line)
- void deleteHw ()
- void deletePrevious ()

Private Member Functions

- Kb (QObject *parent, const QString &path)
- bool isOpen () const
- bool matches (const QString &path, const QString &serial)
- void updateLayout ()
- void writeProfileHeader ()
- KeyMap getKeyMap ()
- void run ()

Private Attributes

- QString devpath

  pathVars devpath is the device root path (e.g. /dev/device/ckb1), cmdpath leads to the daemon input pipe for daemon commands, notifyPath is the standard input monitor for general purpose, macroPath added for a second thread to read macro input.
- QString cmdpath
- QString notifyPath
- QString macroPath
- KbProfile * _currentProfile
- QList< KbProfile * > _profiles
- KbMode * _currentMode
- KeyMap::Model _model
- bool iState [KbPerf::HW_I_COUNT]
- QString prefsPath
- quint64 lastAutoSave
- QString fwUpdPath
- KbProfile * _hwProfile
- KbProfile * prevProfile
- KbMode * prevMode
- QFile cmd
- int notifyNumber

  notifyNumber is the trailing number in the device path.
- int macroNumber
- bool _needsSave
- bool hwLoading [HWMODE_MAX+1]

Static Private Attributes

- static KeyMap::Layout _layout = KeyMap::NO_LAYOUT
- static int _frameRate = 30
- static int _scrollSpeed = 0
- static bool _dither = false
- static bool _mouseAccel = true
- static bool _delay = false

Friends

- class KbManager

12.21.1 Detailed Description

Definition at line 11 of file kb.h.

12.21.2 Constructor & Destructor Documentation

12.21.2.1 Kb::~Kb ( )

<

Todo I don't think, that notifypaths is used somewhere. So why do we have it? If we do not need it, searching for an ununsed notify channel can easy be refactored to a private member function.

Definition at line 141 of file kb.cpp.

References activeDevices, cmd, isOpen(), macroPath, notifyNumber, notifyPaths, and save().

```
141         {
142     // Save settings first
143     save();
144 
145     // remove the notify channel from the list of notifyPaths.
148     notifyPaths.remove(macroPath);
149 
150     // Kill notification thread and remove node
151     activeDevices.remove(this);
152     if(!isOpen()){
153         terminate();
154         wait(1000);
155         return;
156     }
157     if(notifyNumber > 0)
158         cmd.write(QString("idle\nnotifyoff %1\n").arg(notifyNumber).toLatin1());
159     cmd.flush();
160     terminate();
161     wait(1000);
162     cmd.close();
163 }
```

Here is the call graph for this function:

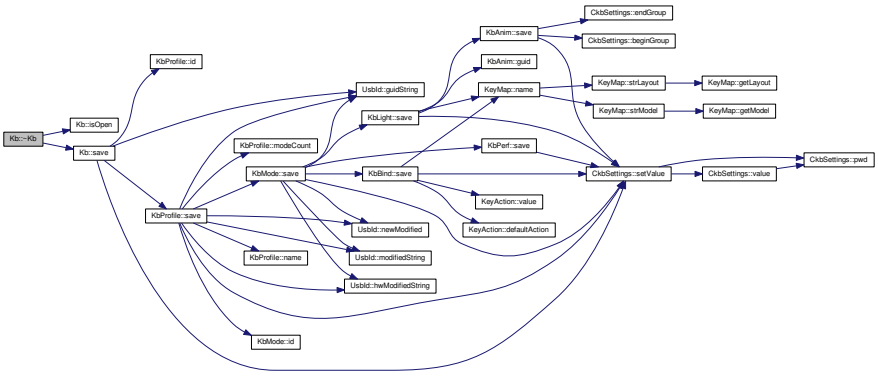

12.21.2.2 Kb::Kb (QObject * *parent*, const QString & *path*) [private]

<

Todo Is adding notify2 to the notifypaths neccessary?

Definition at line 19 of file kb.cpp.

References _delay, _dither, _frameRate, _layout, _model, _mouseAccel, _scrollSpeed, activeDevices, cmd, cmdpath, features, firmware, KeyMap::getModel(), hwLoading, hwModeCount, infoUpdated(), KeyMap::isISO(), iState, KeyMap::K95, macroNumber, macroPath, monochrome, KeyMap::NO_MODEL, notifyNumber, notifyPath, notifyPathMutex, notifyPaths, pollrate, prefsPath, usbModel, and usbSerial.

```
19                                          :
20     QThread(parent), features("N/A"), firmware("N/A"),
       pollrate("N/A"), monochrome(false),
21     devpath(path), cmdpath(path + "/cmd"), notifyPath(path + "/notify1"),
       macroPath(path + "/notify2"),
22     _currentProfile(0), _currentMode(0), _model(
       KeyMap::NO_MODEL),
23     lastAutoSave(QDateTime::currentMSecsSinceEpoch()),
24     _hwProfile(0), prevProfile(0), prevMode(0),
25     cmd(cmdpath), notifyNumber(1), macroNumber(2),
       _needsSave(false)
26 {
27     memset(iState, 0, sizeof(iState));
28     memset(hwLoading, 0, sizeof(hwLoading));
29
30     // Get the features, model, serial number, FW version (if available), and poll rate (if available) from
       /dev nodes
31     QFile ftpath(path + "/features"), mpath(path + "/model"), spath(path + "/serial"), fwpath(path + "
       /fwversion"), ppath(path + "/pollrate");
32     if(ftpath.open(QIODevice::ReadOnly)){
33         features = ftpath.read(1000);
34         features = features.trimmed();
35         ftpath.close();
36         // Read model from features (first word: vendor, second word: product)
37         QStringList list = features.split(" ");
38         if(list.length() < 2)
39             return;
40         _model = KeyMap::getModel(list[1]);
41         if(_model == KeyMap::NO_MODEL)
42             return;
43     } else
44         // Bail if features aren't readable
45         return;
46     if(features.contains("monochrome"))
47         monochrome = true;
48     if(mpath.open(QIODevice::ReadOnly)){
49         usbModel = mpath.read(100);
50         usbModel = usbModel.remove("Corsair").remove("Gaming").remove("Keyboard").remove("
       Mouse").remove("Bootloader").trimmed();
51         mpath.close();
52     }
53     if(usbModel == "")
54         usbModel = "Keyboard";
55     if(spath.open(QIODevice::ReadOnly)){
56         usbSerial = spath.read(100);
57         usbSerial = usbSerial.trimmed().toUpper();
58         spath.close();
59     }
60     if(usbSerial == "")
61         usbSerial = "Unknown-" + usbModel;
62     if(features.contains("fwversion") && fwpath.open(QIODevice::ReadOnly)){
63         firmware = fwpath.read(100);
64         firmware = QString::number(firmware.trimmed().toInt() / 100., 'f', 2);
65         fwpath.close();
66     }
67     if(features.contains("pollrate") && ppath.open(QIODevice::ReadOnly)){
68         pollrate = ppath.read(100);
69         pollrate = pollrate.trimmed();
70         ppath.close();
71     }
72
73     prefsPath = "Devices/" + usbSerial;
74
75     hwModeCount = (_model == KeyMap::K95) ? 3 : 1;
76     // Open cmd in non-blocking mode so that it doesn't lock up if nothing is reading
77     // (e.g. if the daemon crashed and didn't clean up the node)
78     int fd = open(cmdpath.toLatin1().constData(), O_WRONLY | O_NONBLOCK);
79     if(!cmd.open(fd, QIODevice::WriteOnly, QFileDevice::AutoCloseHandle))
80         return;
```

```
81
82      // Find an available notification node (if none is found, take notify1)
83      {
84          QMutexLocker locker(&notifyPathMutex);
85          for(int i = 1; i < 10; i++){
86              QString notify = QString(path + "/notify%1").arg(i);
87              if(!QFile::exists(notify) && !notifyPaths.contains(notify)){
88                  notifyNumber = i;
89                  notifyPath = notify;
90                  break;
91              }
92          }
93          notifyPaths.insert(notifyPath);
94      }
95      cmd.write(QString("notifyon %1\n").arg(notifyNumber).toLatin1());
96      cmd.flush();
97
98      // Again, find an available notification node for macro definition
99      // (if none is found, take notify2)
100      {
101          QMutexLocker locker(&notifyPathMutex);
102          for(int i = 1; i < 10; i++){
103              QString notify = QString(path + "/notify%1").arg(i);
104              if(!QFile::exists(notify) && !notifyPaths.contains(notify)){
105                  macroNumber = i;
106                  macroPath = notify;
107                  break;
108              }
109          }
110          notifyPaths.insert(notifyPath);
111      }
112      // Activate device, apply settings, and ask for hardware profile
113      cmd.write(QString("fps %1\n").arg(_frameRate).toLatin1());
114      cmd.write(QString("dither %1\n").arg(static_cast<int>(_dither)).toLatin1());
115      cmd.write(QString("\ndelay %1\n").arg(_delay? "on" : "off").toLatin1());
116  #ifdef Q_OS_MACX
117      // Write ANSI/ISO flag to daemon (OSX only)
118      cmd.write("layout ");
119      cmd.write(KeyMap::isISO(_layout) ? "iso" : "ansi");
120      // Also OSX only: scroll speed and mouse acceleration
121      cmd.write(QString("accel %1\n").arg(QString(_mouseAccel ? "on" : "off")).toLatin1());
122      cmd.write(QString("scrollspeed %1\n").arg(_scrollSpeed).toLatin1());
123  #endif
124      cmd.write(QString("\nactive\n@%1 get :hwprofileid").arg(notifyNumber).toLatin1());
125      hwLoading[0] = true;
126      for(int i = 0; i < hwModeCount; i++){
127          cmd.write(QString(" mode %1 get :hwid").arg(i + 1).toLatin1());
128          hwLoading[i + 1] = true;
129      }
130      // Ask for current indicator and key state
131      cmd.write(" get :i :keys\n");
132      cmd.flush();
133
134      emit infoUpdated();
135      activeDevices.insert(this);
136
137      // Start a separate thread to read from the notification node
138      start();
139  }
```

Here is the call graph for this function:

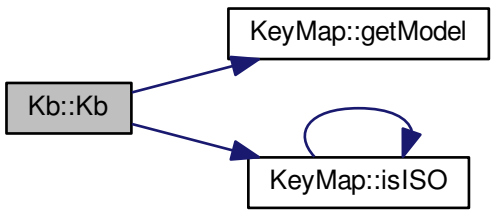

12.21.3 Member Function Documentation

12.21.3.1 void Kb::appendProfile (KbProfile * *newProfile*) [inline]

Definition at line 60 of file kb.h.

References _needsSave, and _profiles.

Referenced by KbProfileDialog::on_profileList_itemClicked().

```
60 { _needsSave = true; _profiles.append(newProfile); }
```

Here is the caller graph for this function:



12.21.3.2 void Kb::autoSave ( ) [slot]

Definition at line 289 of file kb.cpp.

References CkbSettings::isBusy(), lastAutoSave, needsSave(), and save().

```
289                 {
290     quint64 now = QDateTime::currentMSecsSinceEpoch();
291     if(needsSave() && now >= lastAutoSave + 15 * 1000 && !
    CkbSettings::isBusy()){
292         save();
293         lastAutoSave = now;
294     }
295 }
```

Here is the call graph for this function:

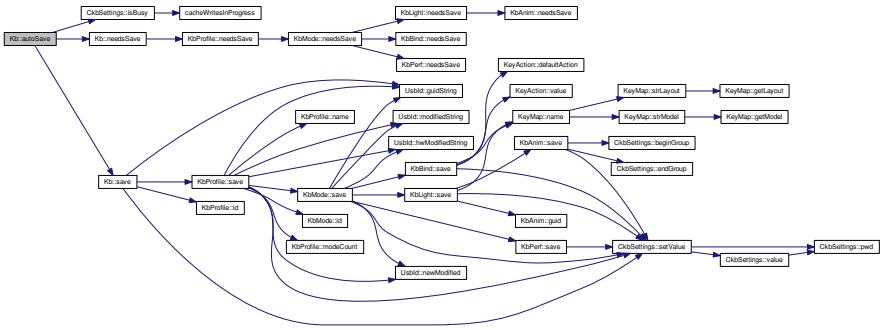

12.21.3.3 KbBind* Kb::currentBind ( ) [inline]

Definition at line 67 of file kb.h.

References _currentMode, and KbMode::bind().

Referenced by KbWidget::modeChanged().

```
67 { return !_currentMode ? 0 : _currentMode->bind(); }
```

Here is the call graph for this function:

Here is the caller graph for this function:



12.21.3.4 KbLight* Kb::currentLight ( ) [inline]

Definition at line 66 of file kb.h.

References _currentMode, and KbMode::light().

Referenced by KbWidget::modeChanged().

```
66 { return !_currentMode ? 0 : _currentMode->light(); }
```

Here is the call graph for this function:

Here is the caller graph for this function:



12.21.3.5 KbMode* Kb::currentMode ( ) [inline]

Definition at line 65 of file kb.h.

References _currentMode.

Referenced by KbWidget::modeChanged().

```
65 { return _currentMode; }
```

Here is the caller graph for this function:



12.21.3.6 KbPerf* Kb::currentPerf ( ) [inline]

Definition at line 68 of file kb.h.

References _currentMode, and KbMode::perf().

Referenced by KbWidget::modeChanged().

```
68 { return !_currentMode ? 0 : _currentMode->perf(); }
```

Here is the call graph for this function:

Here is the caller graph for this function:



12.21.3.7 KbProfile* Kb::currentProfile ( ) [inline]

Definition at line 56 of file kb.h.

References _currentProfile.

Referenced by KeyAction::keyEvent(), KbWidget::modeChanged(), KbWidget::modeIcon(), KbWidget::modesList_reordered(), KbWidget::on_modesList_currentItemChanged(), KbWidget::on_modesList_customContextMenuRequested(), KbWidget::on_modesList_itemClicked(), KbProfileDialog::on_profileList_customContextMenuRequested(), KbProfileDialog::on_profileList_itemChanged(), KbWidget::profileChanged(), KbProfileDialog::repopulate(), and KbWidget::updateProfileList().

```
56 { return _currentProfile; }
```

Here is the caller graph for this function:

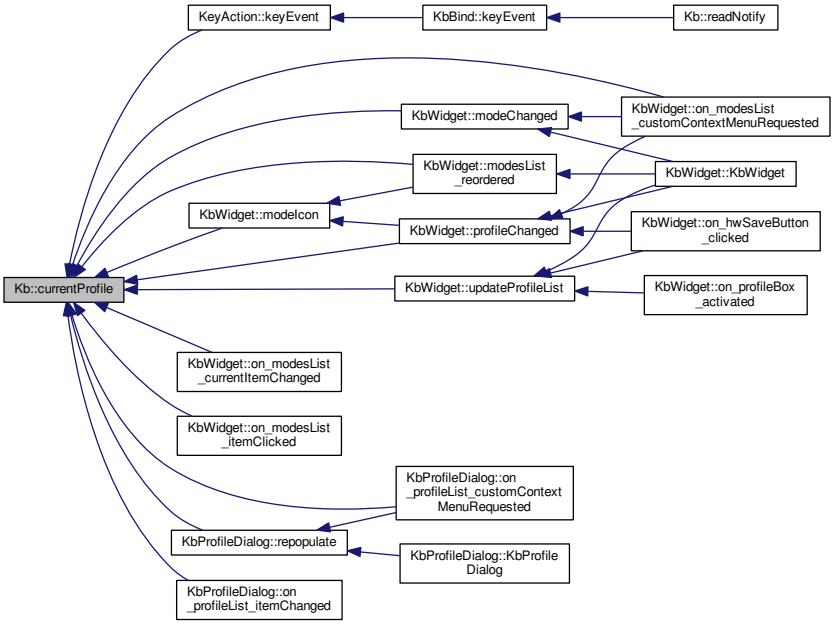

12.21.3.8 void Kb::deleteHw ( ) [private], [slot]

Definition at line 441 of file kb.cpp.

References _hwProfile.

Referenced by hwProfile().

```
441                 {
442     disconnect(_hwProfile, SIGNAL(destroyed()), this, SLOT(deleteHw()));
443     _hwProfile = 0;
444 }
```

Here is the caller graph for this function:

12.21.3.9 void Kb::deletePrevious ( ) [private], [slot]

Definition at line 426 of file kb.cpp.

References prevMode.

Referenced by frameUpdate(), and hwSave().

```
426                         {
427     disconnect(prevMode, SIGNAL(destroyed()), this, SLOT(deletePrevious()));
428     prevMode = 0;
429 }
```

Here is the caller graph for this function:

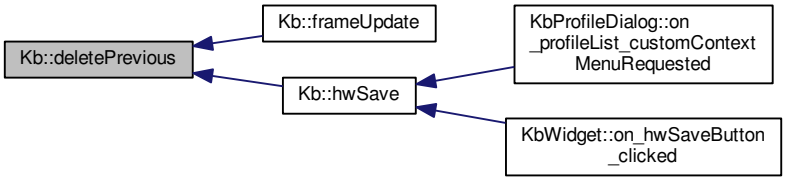

12.21.3.10 static bool Kb::dither ( ) [inline], [static]

Definition at line 33 of file kb.h.

References _dither.

Referenced by ExtraSettingsWidget::ExtraSettingsWidget(), and ExtraSettingsWidget::on_ditherBox_clicked().

```
33 { return _dither; }
```

Here is the caller graph for this function:

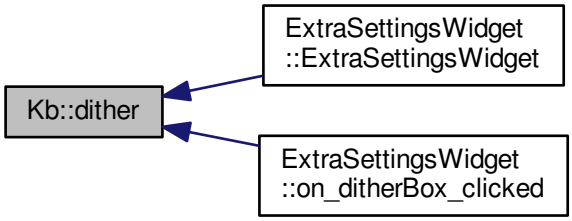

12.21.3.11 void Kb::dither (bool *newDither*) [static]

Definition at line 204 of file kb.cpp.

References _dither, activeDevices, and cmd.

```
204                                {
205     if(newDither == _dither)
206         return;
207     _dither = newDither;
208     // Update all devices
209     foreach(Kb* kb, activeDevices){
210         kb->cmd.write(QString("dither %1\n").arg(static_cast<int>(newDither)).toLatin1());
211         kb->cmd.flush();
212     }
213 }
```

12.21.3.12 KbProfile* Kb::find (const QUuid & *id*) [inline]

Definition at line 62 of file kb.h.

References _profiles, UsbId::guid, and KbProfile::id().

Referenced by KbProfileDialog::on_profileList_currentItemChanged(), KbProfileDialog::on_profileList_customContextMenuRequested(), and KbProfileDialog::profileList_reordered().

```
62 { foreach(KbProfile* profile, _profiles) { if(profile->id().
      guid == id) return profile; } return 0; }
```

Here is the call graph for this function:



Here is the caller graph for this function:

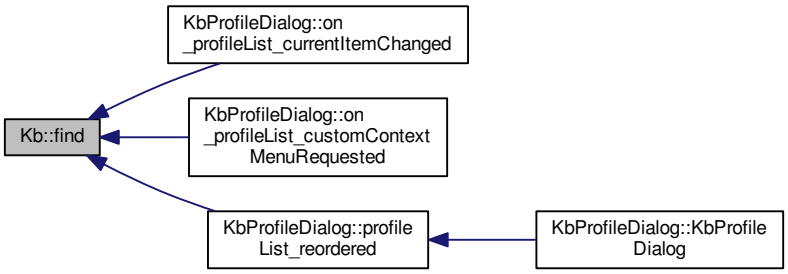

12.21.3.13 static int Kb::frameRate ( ) [inline], [static]

Definition at line 27 of file kb.h.

References _frameRate.

Referenced by ExtraSettingsWidget::ExtraSettingsWidget(), and ExtraSettingsWidget::on_fpsBox_valueChanged().

```
27 { return _frameRate; }
```

Here is the caller graph for this function:

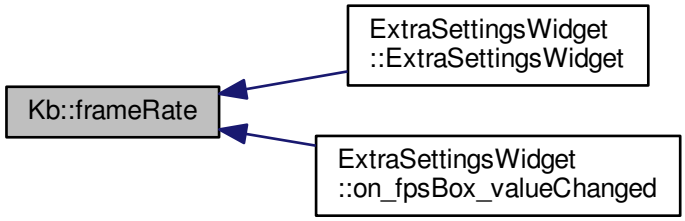

12.21.3.14 void Kb::frameRate (int *newFrameRate*) [static]

Definition at line 165 of file kb.cpp.

References _frameRate, activeDevices, cmd, and KbManager::fps().

```
165                                {
166     KbManager::fps(newFrameRate);
167     // If the rate has changed, send to all devices
168     if(newFrameRate == _frameRate)
169         return;
170     _frameRate = newFrameRate;
171     foreach(Kb* kb, activeDevices){
172         kb->cmd.write(QString("fps %1\n").arg(newFrameRate).toLatin1());
173         kb->cmd.flush();
174     }
175 }
```

Here is the call graph for this function:



12.21.3.15 void Kb::frameUpdate ( ) [slot]

Definition at line 375 of file kb.cpp.

References _currentMode, _currentProfile, KbPerf::applyIndicators(), KbMode::bind(), KbLight::close(), cmd, deletePrevious(), KbLight::frameUpdate(), KbProfile::indexOf(), KbLight::isStarted(), iState, KbMode::light(), monochrome, notifyNumber, KbLight::open(), KbMode::perf(), prevMode, prevProfile, KbBind::update(), KbPerf::update(), and writeProfileHeader().

```
375                     {
376     // Advance animation frame
377     if(!_currentMode)
378         return;
379     KbLight* light = _currentMode->light();
380     KbBind* bind = _currentMode->bind();
381     KbPerf* perf = _currentMode->perf();
382     if(!light->isStarted()){
383         // Don't do anything until the animations are started
384         light->open();
385         return;
386     }
387
388     // Stop animations on the previously active mode (if any)
389     bool changed = false;
390     if(prevMode != _currentMode){
391         if(prevMode){
392             prevMode->light()->close();
393             disconnect(prevMode, SIGNAL(destroyed()), this, SLOT(
    deletePrevious()));
394         }
395         prevMode = _currentMode;
396         connect(prevMode, SIGNAL(destroyed()), this, SLOT(deletePrevious()));
397         changed = true;
398     }
399
400     // If the profile has changed, update it
401     if(prevProfile != _currentProfile){
402         writeProfileHeader();
403         cmd.write(" ");
404         prevProfile = _currentProfile;
405     }
406
407     // Update current mode
408     int index = _currentProfile->indexOf(_currentMode);
409     // ckb-daemon only has 6 modes: 3 hardware, 3 non-hardware. Beyond mode six, switch back to four.
410     // e.g. 1, 2, 3, 4, 5, 6, 4, 5, 6, 4, 5, 6 ...
411     if(index >= 6)
412         index = 3 + index % 3;
413
414     // Send lighting/binding to driver
415     cmd.write(QString("mode %1 switch ").arg(index + 1).toLatin1());
416     perf->applyIndicators(index, iState);
417     light->frameUpdate(cmd, monochrome);
418     cmd.write(QString("\n@%1 ").arg(notifyNumber).toLatin1());
419     bind->update(cmd, changed);
420     cmd.write(" ");
421     perf->update(cmd, notifyNumber, changed);
422     cmd.write("\n");
423     cmd.flush();
424 }
```

Here is the call graph for this function:

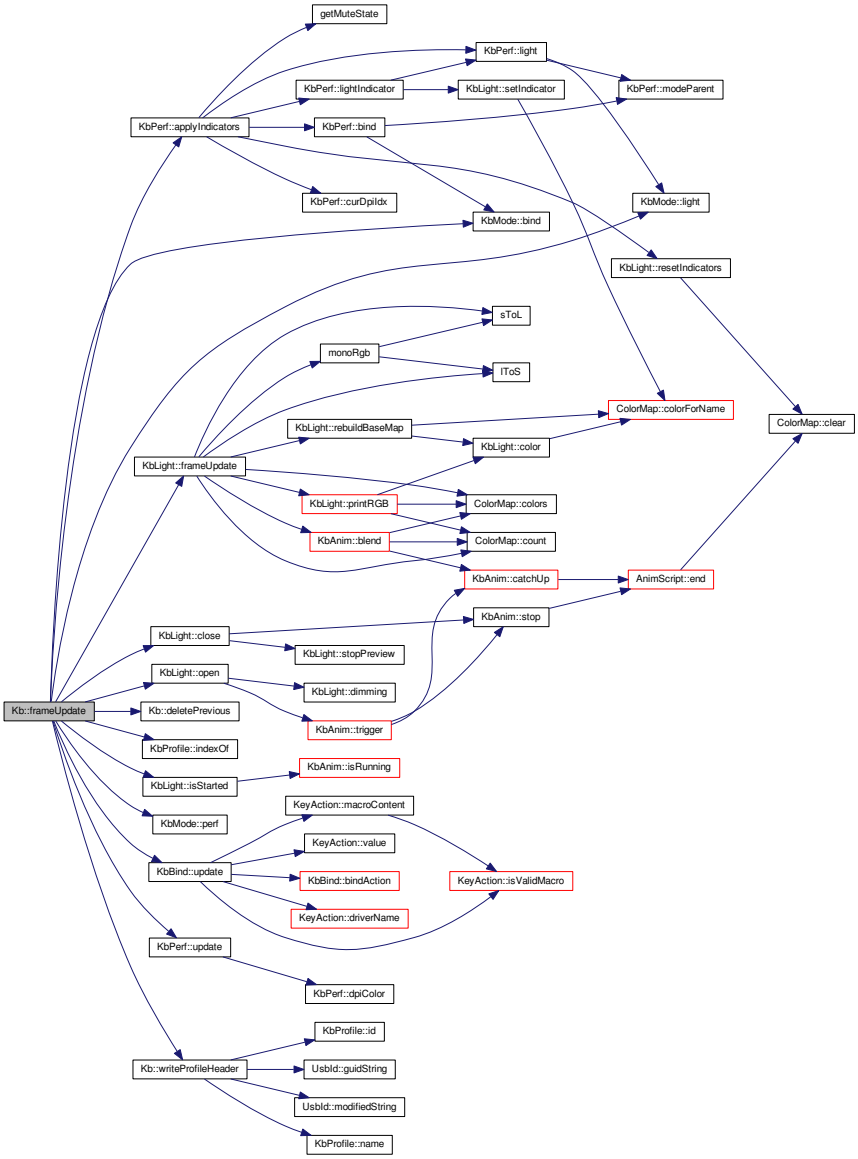

12.21.3.16 void Kb::fwUpdate (const QString & *path*)

Definition at line 365 of file kb.cpp.

References cmd, fwUpdPath, and notifyNumber.

Referenced by FwUpgradeDialog::on_actionButton_clicked().

```
365                                     {
366     fwUpdPath = path;
367     // Write the active command to ensure it's not ignored
368     cmd.write("active");
369     cmd.write(QString(" @%1 ").arg(notifyNumber).toLatin1());
370     cmd.write("fwupdate ");
371     cmd.write(path.toLatin1());
372     cmd.write("\n");
373 }
```

Here is the caller graph for this function:



12.21.3.17 void Kb::fwUpdateFinished (bool *succeeded*) [signal]

Definition at line 277 of file moc_kb.cpp.

Referenced by readNotify().

```
278 {
279     void *_a[] = { Q_NULLPTR, const_cast<void*>(reinterpret_cast<const void*>(&_t1)) };
280     QMetaObject::activate(this, &staticMetaObject, 7, _a);
281 }
```

Here is the caller graph for this function:



12.21.3.18 void Kb::fwUpdateProgress (int *current*, int *total*) [signal]

Definition at line 270 of file moc_kb.cpp.

Referenced by readNotify().

```
271 {
272     void *_a[] = { Q_NULLPTR, const_cast<void*>(reinterpret_cast<const void*>(&_t1)), const_cast<void*>(
      reinterpret_cast<const void*>(&_t2)) };
273     QMetaObject::activate(this, &staticMetaObject, 6, _a);
274 }
```

Here is the caller graph for this function:



12.21.3.19 KeyMap Kb::getKeyMap ( ) [private]

Definition at line 756 of file kb.cpp.

References _layout, and _model.

Referenced by hwSave(), load(), newMode(), newProfile(), readNotify(), setCurrentProfile(), and updateLayout().

```
756                     {
757     return KeyMap(_model, _layout);
758 }
```

Here is the caller graph for this function:

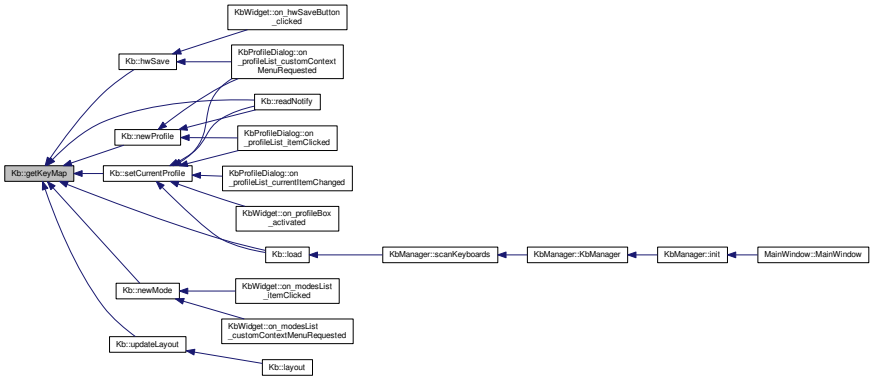

12.21.3.20 int Kb::getMacroNumber ( ) [inline]

getMacroNumber returns the macroNumber, which we have saved in the constructor. For usage with macro definions, this param must only be readable. So there is no setter.

Returns

The Number is returned as int.

Definition at line 97 of file kb.h.

References macroNumber.

Referenced by KbBind::getMacroNumber().

```
97 { return macroNumber; }
```

Here is the caller graph for this function:



12.21.3.21 QString Kb::getMacroPath ( ) [inline]

Returns

The absolute path as String

Definition at line 106 of file kb.h.

References macroPath.

Referenced by KbBind::getMacroPath().

```
106 { return macroPath; }
```

Here is the caller graph for this function:



12.21.3.22 KbProfile* Kb::hwProfile ( ) [inline]

Definition at line 46 of file kb.h.

References _hwProfile.

Referenced by hwSave(), KbWidget::modeIcon(), KbProfileDialog::on_profileList_customContextMenuRequested(), readNotify(), KbProfileDialog::repopulate(), and KbWidget::updateProfileList().

```
46 { return _hwProfile; }
```

Here is the caller graph for this function:

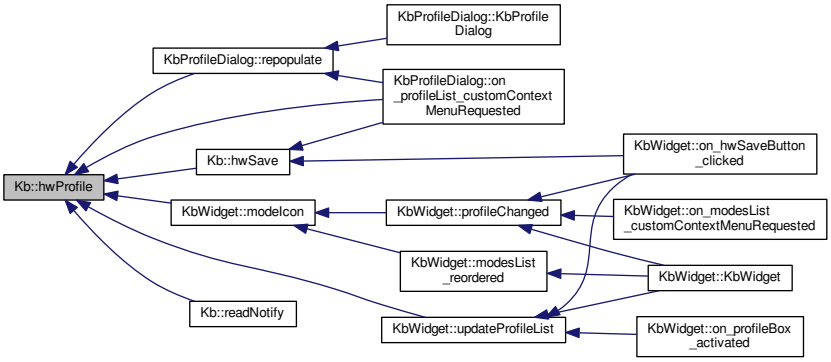

12.21.3.23 void Kb::hwProfile (KbProfile * *newHwProfile*)

Definition at line 431 of file kb.cpp.

References _hwProfile, and deleteHw().

```
431                                         {
432     if(_hwProfile == newHwProfile)
433         return;
434     if(_hwProfile)
435         disconnect(_hwProfile, SIGNAL(destroyed()), this, SLOT(
      deleteHw()));
436     _hwProfile = newHwProfile;
437     if(_hwProfile)
438         connect(_hwProfile, SIGNAL(destroyed()), this, SLOT(deleteHw()));
439 }
```

Here is the call graph for this function:

12.21.3.24 void Kb::hwSave ( )

Definition at line 297 of file kb.cpp.

References _currentMode, _currentProfile, _hwProfile, KbProfile::append(), KbLight::base(), KbLight::close(), cmd, deletePrevious(), getKeyMap(), UsbId::guidString(), hwModeCount, UsbId::hwModified, hwProfile(), KbProfile::id(), KbMode::id(), KbMode::light(), KbProfile::modeCount(), KbProfile::modes(), UsbId::modified, UsbId::modifiedString(), monochrome, KbMode::name(), KbMode::perf(), prevMode, KbProfile::setNeedsSave(), KbMode::setNeedsSave(), KbPerf::update(), and writeProfileHeader().

Referenced by KbWidget::on_hwSaveButton_clicked(), and KbProfileDialog::on_profileList_customContextMenuRequested().

```
297                 {
298     if(!_currentProfile)
299         return;
300     // Close active lighting (if any)
301     if(prevMode){
302         prevMode->light()->close();
303         deletePrevious();
304     }
305     hwProfile(_currentProfile);
306     _hwProfile->id().hwModified = _hwProfile->id().
      modified;
307     _hwProfile->setNeedsSave();
308     // Re-send the current profile from scratch to ensure consistency
309     writeProfileHeader();
310     // Make sure there are enough modes
311     while(_currentProfile->modeCount() < hwModeCount)
312         _currentProfile->append(new KbMode(this,
      getKeyMap()));
313     // Write only the base colors of each mode, no animations
314     for(int i = 0; i < hwModeCount; i++){
315         KbMode* mode = _currentProfile->modes()[i];
316         cmd.write(QString("\nmode %1").arg(i + 1).toLatin1());
317         KbLight* light = mode->light();
318         KbPerf* perf = mode->perf();
319         if(mode == _currentMode)
320             cmd.write(" switch");
321         // Write the mode name and ID
322         cmd.write(" name ");
323         cmd.write(QUrl::toPercentEncoding(mode->name()));
324         cmd.write(" id ");
325         cmd.write(mode->id().guidString().toLatin1());
326         cmd.write(" ");
327         cmd.write(mode->id().modifiedString().toLatin1());
328         cmd.write(" ");
329         // Write lighting and performance
330         light->base(cmd, true, monochrome);
```

```
331         cmd.write(" ");
332         perf->update(cmd, true, false);
333         // Update mode ID
334         mode->id().hwModified = mode->id().modified;
335         mode->setNeedsSave();
336     }
337     cmd.write("\n");
338
339     // Save the profile to memory
340     cmd.write("hwsave\n");
341     cmd.flush();
342 }
```

Here is the call graph for this function:

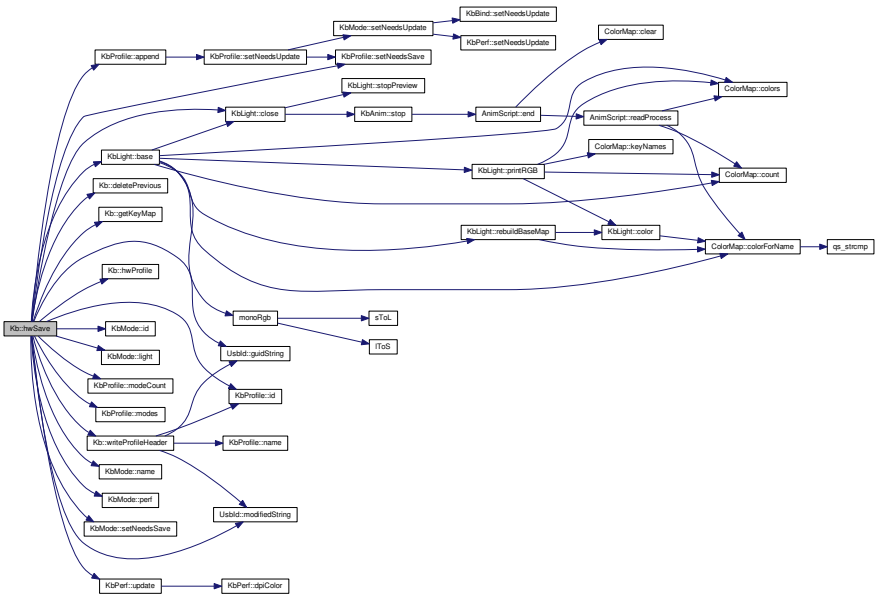

Here is the caller graph for this function:

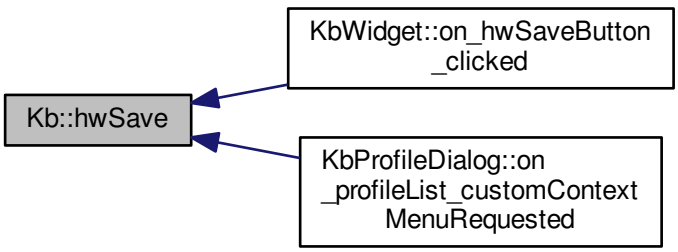

12.21.3.25 int Kb::indexOf (KbProfile * *profile*) [inline]

Definition at line 61 of file kb.h.

References _profiles.

Referenced by KbProfileDialog::on_profileList_customContextMenuRequested().

```
61 { return _profiles.indexOf(profile); }
```

Here is the caller graph for this function:



12.21.3.26 void Kb::infoUpdated ( ) [signal]

Definition at line 233 of file moc_kb.cpp.

Referenced by Kb(), load(), and updateLayout().

```
234 {
235     QMetaObject::activate(this, &staticMetaObject, 0, Q_NULLPTR);
236 }
```

Here is the caller graph for this function:



12.21.3.27 bool Kb::isKeyboard ( ) const [inline]

Definition at line 23 of file kb.h.

References _model, and KeyMap::isKeyboard().

Referenced by KbWidget::KbWidget().

```
23 { return KeyMap::isKeyboard(_model); }
```

Here is the call graph for this function:



Here is the caller graph for this function:



12.21.3.28 bool Kb::isMouse ( ) const [inline]

Definition at line 24 of file kb.h.

References _model, and KeyMap::isMouse().

Referenced by KbWidget::KbWidget(), and readNotify().

```
24 { return KeyMap::isMouse(_model); }
```

Here is the call graph for this function:



Here is the caller graph for this function:

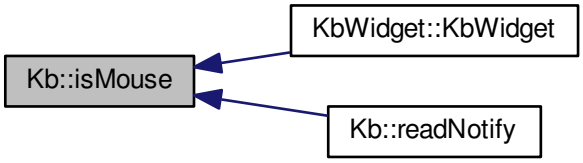

12.21.3.29 bool Kb::isOpen ( ) const [inline], [private]

Definition at line 147 of file kb.h.

References cmd.

Referenced by KbManager::scanKeyboards(), and ~Kb().

```
147 { return cmd.isOpen(); }
```

Here is the caller graph for this function:



12.21.3.30 static KeyMap::Layout Kb::layout ( ) [inline], [static]

Definition at line 30 of file kb.h.

References _layout.

Referenced by LayoutDialog::LayoutDialog(), SettingsWidget::on_layoutBox_activated(), and SettingsWidget::~SettingsWidget().

```
30 { return _layout; }
```

Here is the caller graph for this function:

12.21.3.31 void Kb::layout (KeyMap::Layout *newLayout*) [static]

Definition at line 177 of file kb.cpp.

References _layout, activeDevices, KeyMap::NO_LAYOUT, and updateLayout().

```
177                                     {
178     if(newLayout == KeyMap::NO_LAYOUT || newLayout == _layout)
179         return;
180     _layout = newLayout;
181     // Update all devices
182     foreach(Kb* kb, activeDevices)
183         kb->updateLayout();
184 }
```

Here is the call graph for this function:

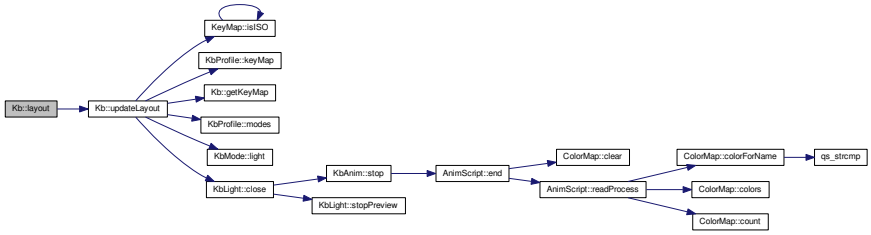

12.21.3.32 void Kb::load ( )

Definition at line 241 of file kb.cpp.

References _needsSave, _profiles, getKeyMap(), infoUpdated(), prefsPath, profileAdded(), setCurrentProfile(), and CkbSettings::value().

Referenced by KbManager::scanKeyboards().

```
241             {
242     if(prefsPath.isEmpty())
243         return;
244     _needsSave = false;
245     CkbSettings settings(prefsPath);
246     // Read profiles
247     KbProfile* newCurrentProfile = 0;
248     QString current = settings.value("CurrentProfile").toString().trimmed().toUpper();
249     foreach(QString guid, settings.value("Profiles").toString().split(" ")){
250         guid = guid.trimmed().toUpper();
251         if(guid != ""){
252             KbProfile* profile = new KbProfile(this, getKeyMap(), settings, guid
    );
253             _profiles.append(profile);
254             if(guid == current || !newCurrentProfile)
255                 newCurrentProfile = profile;
256         }
257     }
258     if(newCurrentProfile)
259         setCurrentProfile(newCurrentProfile);
260     else {
261         // If nothing was loaded, load the demo profile
262         QSettings demoSettings(":/txt/demoprofile.conf", QSettings::IniFormat, this);
263         CkbSettings cSettings(demoSettings);
264         KbProfile* demo = new KbProfile(this, getKeyMap(), cSettings, "
    {BA7FC152-2D51-4C26-A7A6-A036CC93D924}");
265         _profiles.append(demo);
266         setCurrentProfile(demo);
267     }
268
269     emit infoUpdated();
270     emit profileAdded();
271 }
```

Here is the call graph for this function:

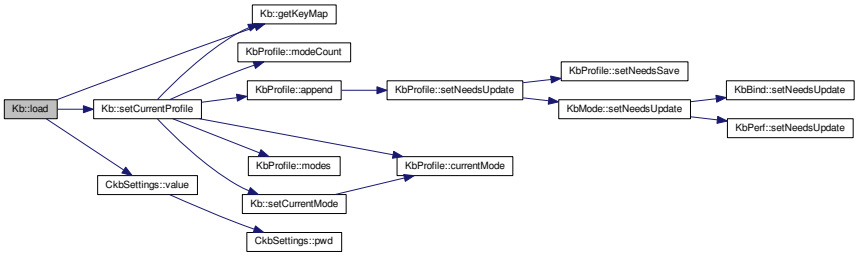

Here is the caller graph for this function:

12.21.3.33 static bool Kb::macroDelay ( ) [inline], [static]

Definition at line 36 of file kb.h.

References _delay.

Referenced by ExtraSettingsWidget::ExtraSettingsWidget(), and ExtraSettingsWidget::on_delayBox_clicked().

```
36 { return _delay; }
```

Here is the caller graph for this function:

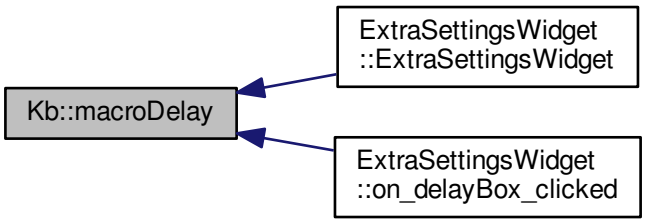

12.21.3.34 void Kb::macroDelay (bool *flag*) [static]

Parameters

flag	true: Switch on delay function, else switch off

Definition at line 787 of file kb.cpp.

References _delay, activeDevices, and cmd.

```
787                             {
788     _delay = flag;
789
790     foreach(Kb* kb, activeDevices){
791         kb->cmd.write(QString("\ndelay %1\n").arg(flag? "on" : "off").toLatin1());
792     }
793 }
```

12.21.3.35 bool Kb::matches (const QString & *path,* const QString & *serial*) [inline], [private]

Definition at line 157 of file kb.h.

References devpath, and usbSerial.

Referenced by KbManager::scanKeyboards().

```
157 { return path.trimmed() == devpath.trimmed() && usbSerial == serial.trimmed().toUpper(); }
```

Here is the caller graph for this function:



12.21.3.36 void Kb::modeChanged (bool *spontaneous*) [signal]

Definition at line 263 of file moc_kb.cpp.

Referenced by setCurrentMode().

```
264 {
265     void *_a[] = { Q_NULLPTR, const_cast<void*>(reinterpret_cast<const void*>(&_t1)) };
266     QMetaObject::activate(this, &staticMetaObject, 5, _a);
267 }
```

Here is the caller graph for this function:

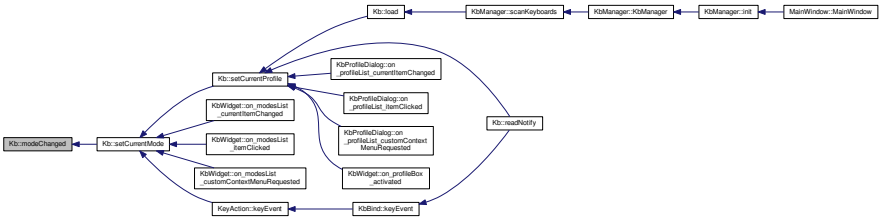

12.21.3.37 KeyMap::Model Kb::model ( ) const [inline]

Definition at line 22 of file kb.h.

References _model.

```
22 { return _model; }
```

12.21.3.38 void Kb::modeRenamed ( ) [signal]

Definition at line 251 of file moc_kb.cpp.

Referenced by readNotify().

```
252 {
253     QMetaObject::activate(this, &staticMetaObject, 3, Q_NULLPTR);
254 }
```

Here is the caller graph for this function:



12.21.3.39 static bool Kb::mouseAccel ( ) [inline], [static]

Definition at line 39 of file kb.h.

References _mouseAccel.

Referenced by ExtraSettingsWidget::ExtraSettingsWidget(), and ExtraSettingsWidget::on_mAccelBox_clicked().

```
39 { return _mouseAccel; }
```

Here is the caller graph for this function:

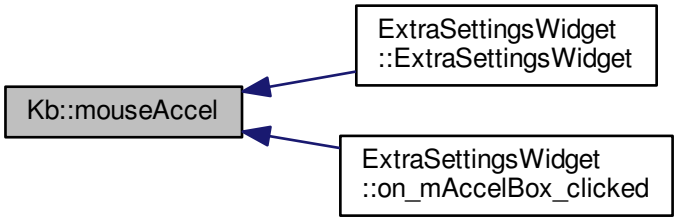

12.21.3.40 void Kb::mouseAccel (bool *newAccel*) [static]

Definition at line 215 of file kb.cpp.

References _mouseAccel, activeDevices, and cmd.

```
215                                 {
216     if(newAccel == _mouseAccel)
217         return;
218     _mouseAccel = newAccel;
219 #ifdef Q_OS_MACX
220     // Update all devices
221     foreach(Kb* kb, activeDevices){
222         kb->cmd.write(QString("accel %1\n").arg(QString(newAccel ? "on" : "off")).toLatin1());
223         kb->cmd.flush();
224     }
225 #endif
226 }
```

12.21.3.41 bool Kb::needsSave ( ) const

Definition at line 344 of file kb.cpp.

References _needsSave, _profiles, and KbProfile::needsSave().

Referenced by autoSave().

```
344                           {
345     if(_needsSave)
346         return true;
347     foreach(const KbProfile* profile, _profiles){
348         if(profile->needsSave())
349             return true;
350     }
351     return false;
352 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

12.21.3.42 KbMode* Kb::newMode ( ) [inline]

Definition at line 79 of file kb.h.

References getKeyMap().

Referenced by KbWidget::on_modesList_customContextMenuRequested(), and KbWidget::on_modesList_itemClicked().

```
79 { return new KbMode(this, getKeyMap()); }
```

Here is the call graph for this function:

Here is the caller graph for this function:

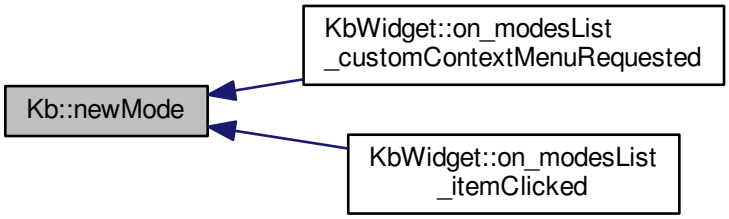

12.21.3.43 KbMode* Kb::newMode (KbMode * *other*) [inline]

Definition at line 80 of file kb.h.

References getKeyMap().

```
80 { return new KbMode(this, getKeyMap(), *other); }
```

Here is the call graph for this function:

12.21.3.44 KbProfile* Kb::newProfile ( ) [inline]

Definition at line 77 of file kb.h.

References getKeyMap().

Referenced by KbProfileDialog::on_profileList_customContextMenuRequested(), KbProfileDialog::on_profileList_-itemClicked(), and readNotify().

```
77 { return new KbProfile(this, getKeyMap()); }
```

Here is the call graph for this function:

Here is the caller graph for this function:

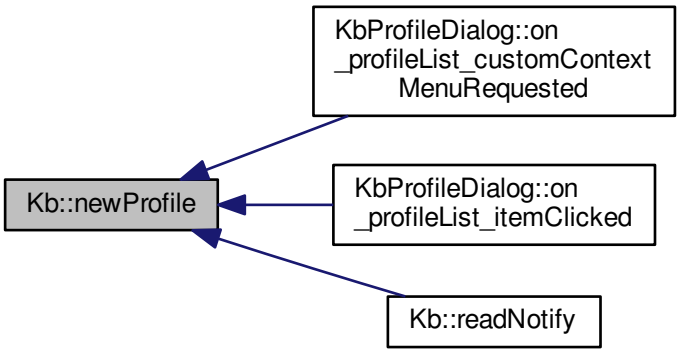

12.21.3.45 KbProfile* Kb::newProfile (KbProfile * *other*) [inline]

Definition at line 78 of file kb.h.

References getKeyMap().

```
78 { return new KbProfile(this, getKeyMap(), *other); }
```

Here is the call graph for this function:

12.21.3.46 void Kb::profileAdded ( ) [signal]

Definition at line 239 of file moc_kb.cpp.

Referenced by load(), and readNotify().

```
240 {
241     QMetaObject::activate(this, &staticMetaObject, 1, Q_NULLPTR);
242 }
```

Here is the caller graph for this function:

12.21.3.47 void Kb::profileChanged ( ) [signal]

Definition at line 257 of file moc_kb.cpp.

Referenced by readNotify(), and setCurrentMode().

```
258 {
259     QMetaObject::activate(this, &staticMetaObject, 4, Q_NULLPTR);
260 }
```

Here is the caller graph for this function:

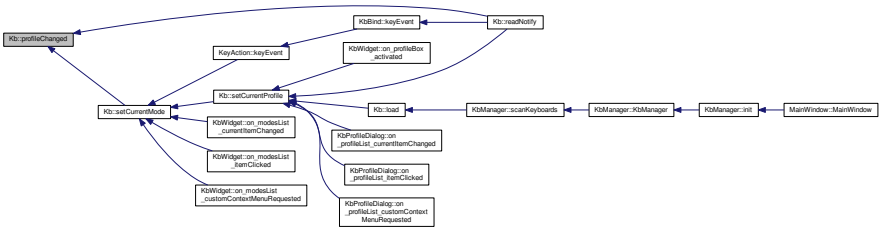

12.21.3.48 void Kb::profileRenamed ( ) [signal]

Definition at line 245 of file moc_kb.cpp.

Referenced by readNotify().

```
246 {
247     QMetaObject::activate(this, &staticMetaObject, 2, Q_NULLPTR);
248 }
```

Here is the caller graph for this function:



12.21.3.49 const QList<KbProfile*>& Kb::profiles ( ) const [inline]

Definition at line 58 of file kb.h.

References _profiles.

Referenced by KbWidget::on_profileBox_activated(), KbProfileDialog::on_profileList_customContextMenuRequested(), KbProfileDialog::profileList_reordered(), KbProfileDialog::repopulate(), and KbWidget::updateProfileList().

```
58 { return _profiles; }
```

Here is the caller graph for this function:

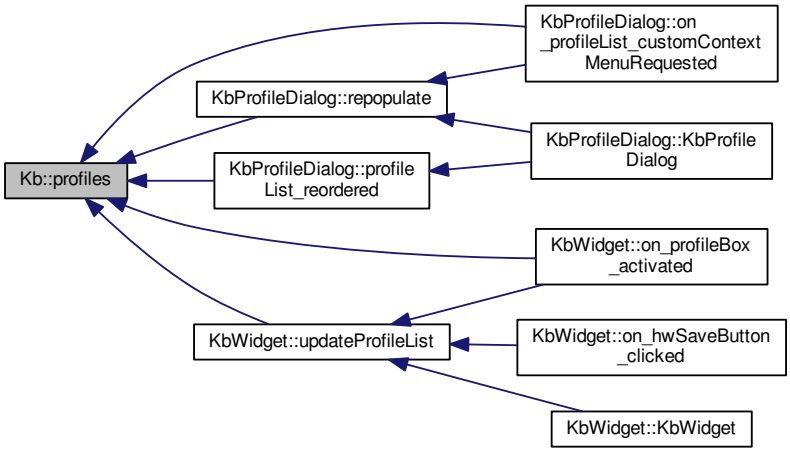

12.21.3.50 void Kb::profiles (const QList< KbProfile * > & *newProfiles*) [inline]

Definition at line 59 of file kb.h.

References _needsSave, and _profiles.

```
59 { _needsSave = true; _profiles = newProfiles; }
```

12.21.3.51 void Kb::readNotify (QString *line*) [private], [slot]

Definition at line 471 of file kb.cpp.

References _currentMode, _currentProfile, _hwProfile, _needsSave, _profiles, KbPerf::angleSnap(), KbLight::animKeypress(), KbProfile::append(), KbMode::bind(), cmd, KbLight::color(), KbPerf::curDpiIdx(), KbPerf::dpi(), KbPerf::DPI_COUNT, KbPerf::dpiColor(), KbPerf::dpiEnabled(), fwUpdateFinished(), fwUpdateProgress(), fwUpdPath, getKeyMap(), UsbId::guid, hwLoading, HWMODE_MAX, hwModeCount, UsbId::hwModifiedString(), hwProfile(), KbProfile::id(), KbMode::id(), KbProfile::indexOf(), isMouse(), iState, KbBind::keyEvent(), KbPerf::liftHeight(), KbMode::light(), KbProfile::modeCount(), modeRenamed(), KbProfile::modes(), UsbId::modifiedString(), KbProfile::move(), KbProfile::name(), KbMode::name(), newProfile(), notifyNumber, KbMode::perf(), profileAdded(), profileChanged(), profileRenamed(), setCurrentProfile(), KbProfile::setNeedsSave(), and KbMode::setNeedsSave().

```
471                                {
472     QStringList components = line.trimmed().split(" ");
473     if(components.count() < 2)
474         return;
475     if(components[0] == "key"){
476         // Key event
477         QString key = components[1];
478         if(key.length() < 2)
479             return;
480         QString keyName = key.mid(1);
481         bool keyPressed = (key[0] == '+');
482         KbMode* mode = _currentMode;
483         if(mode){
484             mode->light()->animKeypress(keyName, keyPressed);
485             mode->bind()->keyEvent(keyName, keyPressed);
486         }
487     } else if(components[0] == "i"){
488         // Indicator event
489         QString i = components[1];
490         if(i.length() < 2)
491             return;
492         QString iName = i.mid(1);
493         bool on = (i[0] == '+');
494         if(iName == "num")
495             iState[0] = on;
496         else if(iName == "caps")
497             iState[1] = on;
498         else if(iName == "scroll")
499             iState[2] = on;
500     } else if(components[0] == "hwprofileid"){
501         // Hardware profile ID
502         if(components.count() < 3)
503             return;
504         // Find the hardware profile in the list of profiles
505         QString guid = components[1];
506         QString modified = components[2];
507         KbProfile* newProfile = 0;
508         foreach(KbProfile* profile, _profiles){
509             if(profile->id().guid == guid){
510                 newProfile = profile;
511                 break;
512             }
513         }
514         // If it wasn't found, create it
515         if(!newProfile){
516             newProfile = new KbProfile(this, getKeyMap(), guid, modified);
517             hwLoading[0] = true;
518             cmd.write(QString("@%1 get :hwprofilename\n").arg(notifyNumber).toLatin1());
519             cmd.flush();
520         } else {
521             // If it's been updated, fetch its name
522             if(newProfile->id().hwModifiedString() != modified){
523                 newProfile->id().modifiedString(modified);
524                 newProfile->id().hwModifiedString(modified);
525                 newProfile->setNeedsSave();
```

```
526                 if(hwLoading[0]){
527                     cmd.write(QString("@%1 get :hwprofilename\n").arg(
    notifyNumber).toLatin1());
528                     cmd.flush();
529                 }
530             } else {
531                 hwLoading[0] = false;
532             }
533         }
534         hwProfile(newProfile);
535         emit profileAdded();
536         if(_hwProfile == _currentProfile)
537             emit profileChanged();
538     } else if(components[0] == "hwprofilename"){
539         // Hardware profile name
540         QString name = QUrl::fromPercentEncoding(components[1].toUtf8());
541         if(!_hwProfile || !hwLoading[0])
542             return;
543         QString oldName = _hwProfile->name();
544         if(!(oldName.length() >= name.length() && oldName.left(name.length()) == name)){
545             // Don't change the name if it's a truncated version of what we already have
546             _hwProfile->name(name);
547             emit profileRenamed();
548         }
549     } else if(components[0] == "mode"){
550         // Mode-specific data
551         if(components.count() < 4)
552             return;
553         int mode = components[1].toInt() - 1;
554         if(components[2] == "hwid"){
555             if(components.count() < 5 || mode >= HWMODE_MAX || !
    _hwProfile)
556                 return;
557             // Hardware mode ID
558             QString guid = components[3];
559             QString modified = components[4];
560             // Look for this mode in the hardware profile
561             KbMode* hwMode = 0;
562             bool isUpdated = false;
563             foreach(KbMode* kbMode, _hwProfile->modes()){
564                 if(kbMode->id().guid == guid){
565                     hwMode = kbMode;
566                     if(kbMode->id().hwModifiedString() != modified){
567                         // Update modification time
568                         hwMode->id().modifiedString(modified);
569                         hwMode->id().hwModifiedString(modified);
570                         hwMode->setNeedsSave();
571                         isUpdated = true;
572                     } else {
573                         hwLoading[mode + 1] = false;
574                     }
575                     break;
576                 }
577             }
578             // If it wasn't found, add it
579             if(!hwMode){
580                 isUpdated = true;
581                 hwMode = new KbMode(this, getKeyMap(), guid, modified);
582                 _hwProfile->append(hwMode);
583                 // If the hardware profile now contains enough modes to be added to the list, do so
584                 if(!_profiles.contains(_hwProfile) &&
    _hwProfile->modeCount() >= hwModeCount){
585                     _profiles.append(_hwProfile);
586                     _needsSave = true;
587                     emit profileAdded();
588                     if(!_currentProfile)
589                         setCurrentProfile(_hwProfile);
590                 }
591             }
592             if(hwLoading[mode + 1] && isUpdated){
593                 // If the mode isn't in the right place, move it
594                 int index = _hwProfile->indexOf(hwMode);
595                 if(mode < _hwProfile->modeCount() && index != mode)
596                     _hwProfile->move(index, mode);
597                 // Fetch the updated data
598                 cmd.write(QString("@%1 mode %2 get :hwname :hwrgb").arg(
    notifyNumber).arg(mode + 1).toLatin1());
599                 if(isMouse())
600                     cmd.write(" :hwdpi :hwdpisel :hwlift :hwsnap");
601                 cmd.write("\n");
602                 cmd.flush();
603             }
604         } else if(components[2] == "hwname"){
605             // Mode name - update list
606             if(!_hwProfile || _hwProfile->modeCount() <= mode || mode >=
    HWMODE_MAX || !hwLoading[mode + 1])
607                 return;
```

```
608             KbMode* hwMode = _hwProfile->modes()[mode];
609             QString name = QUrl::fromPercentEncoding(components[3].toUtf8());
610             QString oldName = hwMode->name();
611             if(!(oldName.length() >= name.length() && oldName.left(name.length()) == name)){
612                 // Don't change the name if it's a truncated version of what we already have
613                 hwMode->name(name);
614                 if(_hwProfile == _currentProfile)
615                     emit modeRenamed();
616             }
617         } else if(components[2] == "hwrgb"){
618             // RGB - set mode lighting
619             if(!_hwProfile || _hwProfile->modeCount() <= mode || mode >=
    HWMODE_MAX || !hwLoading[mode + 1])
620                 return;
621             KbMode* kbmode = _hwProfile->modes()[mode];
622             KbLight* light = kbmode->light();
623             // Scan the input for colors
624             QColor lightColor = QColor();
625             for(int i = 3; i < components.count(); i++){
626                 QString comp = components[i];
627                 if(comp.indexOf(":") < 0){
628                     // No ":" - single hex constant
629                     bool ok;
630                     int rgb = comp.toInt(&ok, 16);
631                     if(ok)
632                         light->color(QColor::fromRgb((QRgb)rgb));
633                 } else {
634                     // List of keys ("a,b:xxxxxx"). Parse color first
635                     QStringList set = comp.split(":");
636                     bool ok;
637                     int rgb = set[1].toInt(&ok, 16);
638                     if(ok){
639                         QColor color = QColor::fromRgb((QRgb)rgb);
640                         // Parse keys
641                         QStringList keys = set[0].split(",");
642                         foreach(QString key, keys){
643                             if(key == "light")
644                                 // Extrapolate the Light key to the M-keys and Lock key, since those will
    be set to black on hwsave
645                                 lightColor = color;
646                             if(key.startsWith("dpi") && key.length() > 3){
647                                 // DPI levels go to the KbPerf object instead of KbLight
648                                 bool ok = false;
649                                 int index = key.mid(3).toInt(&ok);
650                                 if(ok)
651                                     kbmode->perf()->dpiColor(index, color);
652                                 continue;
653                             }
654                             light->color(key, color);
655                         }
656                     }
657                 }
658             }
659             if(lightColor.isValid()){
660                 light->color("mr", lightColor);
661                 light->color("m1", lightColor);
662                 light->color("m2", lightColor);
663                 light->color("m3", lightColor);
664                 light->color("lock", lightColor);
665             }
666         } else if(components[2] == "hwdpi"){
667             // DPI settings
668             if(!_hwProfile || _hwProfile->modeCount() <= mode || mode >=
    HWMODE_MAX || !hwLoading[mode + 1])
669                 return;
670             KbPerf* perf = _hwProfile->modes()[mode]->perf();
671             // Read the rest of the line as stage:x,y
672             foreach(QString comp, components.mid(3)){
673                 QStringList dpi = comp.split(':');
674                 if(dpi.length() != 2)
675                     continue;
676                 QStringList xy = dpi[1].split(',');
677                 int x, y;
678                 bool off = false;
679                 if(xy.length() < 2){
680                     // If the right side only has one parameter, set both X and Y
681                     if(xy[0] == "off")
682                         off = true;
683                     else
684                         x = y = xy[0].toInt();
685                 } else {
686                     x = xy[0].toInt();
687                     y = xy[1].toInt();
688                 }
689                 // Set DPI for this stage
690                 int index = dpi[0].toInt();
691                 if(off){
```

```
692                     perf->dpiEnabled(index, false);
693                     // If all DPIs have been disabled, turn them back on
694                     bool allOff = true;
695                     for(int i = 1; i < KbPerf::DPI_COUNT; i++){
696                         if(perf->dpiEnabled(i)){
697                             allOff = false;
698                             break;
699                         }
700                     }
701                     if(allOff){
702                         for(int i = 1; i < KbPerf::DPI_COUNT; i++)
703                             perf->dpiEnabled(i, true);
704                     }
705                 } else {
706                     perf->dpiEnabled(index, true);
707                     perf->dpi(index, QPoint(x, y));
708                 }
709             }
710         } else if(components[2] == "hwdpisel"){
711             // Hardware DPI selection (0...5)
712             if(!_hwProfile || _hwProfile->modeCount() <= mode || mode >=
    HWMODE_MAX || !hwLoading[mode + 1])
713                 return;
714             KbPerf* perf = _hwProfile->modes()[mode]->perf();
715             int idx = components[3].toInt();
716             if(idx < 1)
717                 idx = 1;
718             if(idx >= KbPerf::DPI_COUNT)
719                 idx = KbPerf::DPI_COUNT - 1;
720             perf->curDpiIdx(idx);
721         } else if(components[2] == "hwlift"){
722             // Mouse lift height (1...5)
723             if(!_hwProfile || _hwProfile->modeCount() <= mode || mode >=
    HWMODE_MAX || !hwLoading[mode + 1])
724                 return;
725             KbPerf* perf = _hwProfile->modes()[mode]->perf();
726             perf->liftHeight((KbPerf::height)components[3].toInt());
727         } else if(components[3] == "hwsnap"){
728             // Mouse angle snapping ("on" or "off")
729             if(!_hwProfile || _hwProfile->modeCount() <= mode || mode >=
    HWMODE_MAX || !hwLoading[mode + 1])
730                 return;
731             KbPerf* perf = _hwProfile->modes()[mode]->perf();
732             perf->angleSnap(components[3] == "on");
733         }
734     } else if(components[0] == "fwupdate"){
735         // Firmware update progress
736         if(components.count() < 3)
737             return;
738         // Make sure path is the same
739         if(components[1] != fwUpdPath)
740             return;
741         QString res = components[2];
742         if(res == "invalid" || res == "fail")
743             emit fwUpdateFinished(false);
744         else if(res == "ok")
745             emit fwUpdateFinished(true);
746         else {
747             // "xx/yy" indicates progress
748             if(!res.contains("/"))
749                 return;
750             QStringList numbers = res.split("/");
751             emit fwUpdateProgress(numbers[0].toInt(), numbers[1].toInt());
752         }
753     }
754 }
```

Here is the call graph for this function:

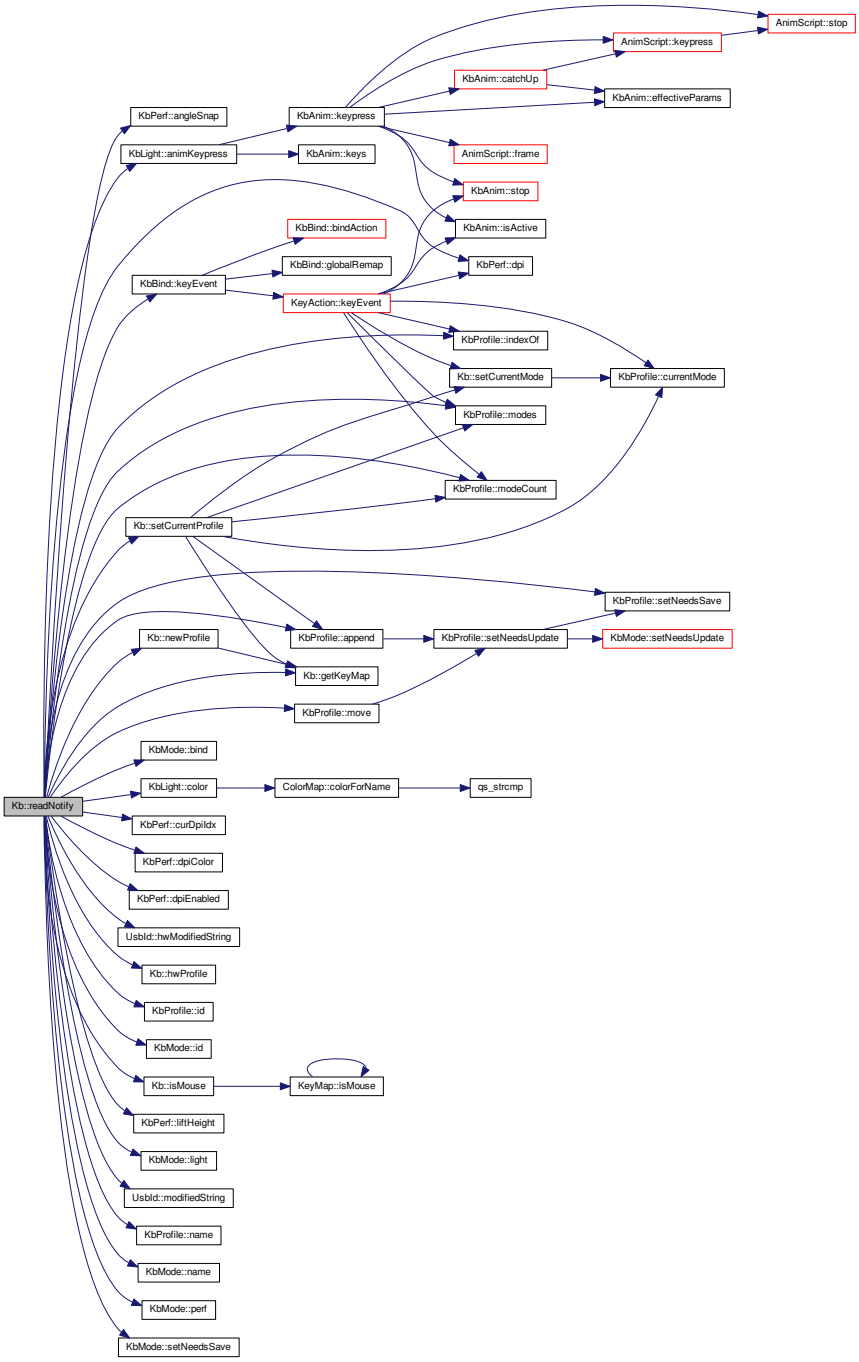

12.21.3.52 void Kb::run ( ) [private]

Definition at line 446 of file kb.cpp.

References notifyPath, notifyPathMutex, and notifyPaths.

```
446             {
447     QFile notify(notifyPath);
448     // Wait a small amount of time for the node to open (100ms)
```

```
449     QThread::usleep(100000);
450     if(!notify.open(QIODevice::ReadOnly)){
451         // If it's still not open, try again before giving up (1s at a time, 10s total)
452         QThread::usleep(900000);
453         for(int i = 1; i < 10; i++){
454             if(notify.open(QIODevice::ReadOnly))
455                 break;
456             QThread::sleep(1);
457         }
458         if(!notify.isOpen())
459             return;
460     }
461     // Read data from notification node
462     QByteArray line;
463     while(notify.isOpen() && (line = notify.readLine()).length() > 0){
464         QString text = QString::fromUtf8(line);
465         metaObject()->invokeMethod(this, "readNotify", Qt::QueuedConnection, Q_ARG(QString, text));
466     }
467     QMutexLocker locker(&notifyPathMutex);
468     notifyPaths.remove(notifyPath);
469 }
```

12.21.3.53 void Kb::save ( )

Definition at line 273 of file kb.cpp.

References _currentProfile, _needsSave, _profiles, UsbId::guidString(), KbProfile::id(), prefsPath, KbProfile::save(), and CkbSettings::setValue().

Referenced by autoSave(), KbWidget::on_hwSaveButton_clicked(), KbManager::scanKeyboards(), and ~Kb().

```
273             {
274     if(prefsPath.isEmpty())
275         return;
276     _needsSave = false;
277     CkbSettings settings(prefsPath, true);
278     QString guids, currentGuid;
279     foreach(KbProfile* profile, _profiles){
280         guids.append(" " + profile->id().guidString());
281         if(profile == _currentProfile)
282             currentGuid = profile->id().guidString();
283         profile->save(settings);
284     }
285     settings.setValue("CurrentProfile", currentGuid);
286     settings.setValue("Profiles", guids.trimmed());
287 }
```

Here is the call graph for this function:

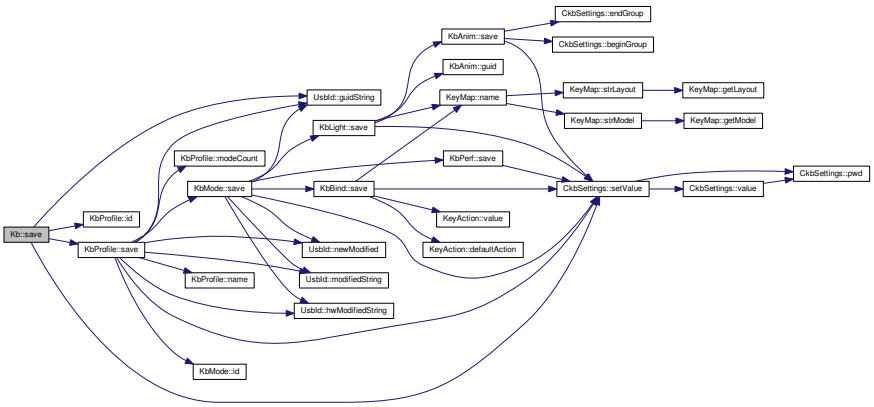

Here is the caller graph for this function:

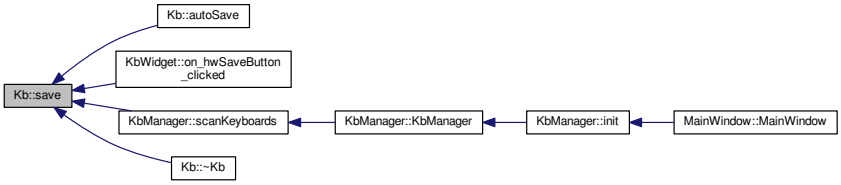

12.21.3.54 static int Kb::scrollSpeed ( ) [inline], [static]

Definition at line 42 of file kb.h.

References _scrollSpeed.

Referenced by ExtraSettingsWidget::ExtraSettingsWidget(), ExtraSettingsWidget::on_sAccelBox_clicked(), and ExtraSettingsWidget::on_sSpeedBox_valueChanged().

```
42 { return _scrollSpeed; }
```

Here is the caller graph for this function:

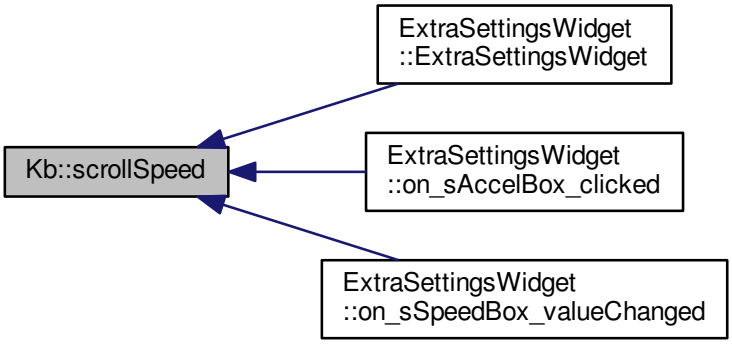

12.21.3.55 void Kb::scrollSpeed (int *newSpeed*) [static]

Definition at line 228 of file kb.cpp.

References _scrollSpeed, activeDevices, and cmd.

```
228                                {
229     if(newSpeed == _scrollSpeed)
230         return;
231     _scrollSpeed = newSpeed;
232 #ifdef Q_OS_MACX
233     // Update all devices
234     foreach(Kb* kb, activeDevices){
235         kb->cmd.write(QString("scrollspeed %1\n").arg(newSpeed).toLatin1());
```

```
236         kb->cmd.flush();
237     }
238 #endif
239 }
```

12.21.3.56 void Kb::setCurrentMode (KbProfile * *profile*, KbMode * *mode*, bool *spontaneous* = true)

Definition at line 769 of file kb.cpp.

References _currentMode, _currentProfile, _needsSave, KbProfile::currentMode(), modeChanged(), and profileChanged().

Referenced by KeyAction::keyEvent(), KbWidget::on_modesList_currentItemChanged(), KbWidget::on_modesList_customContextMenuRequested(), KbWidget::on_modesList_itemClicked(), and setCurrentProfile().

```
769                                                                 {
770     if(_currentProfile != profile){
771         _currentProfile = profile;
772         _needsSave = true;
773         emit profileChanged();
774     }
775     if(_currentMode != mode || _currentProfile->
    currentMode() != mode){
776         _currentProfile->currentMode(_currentMode = mode);
777         _needsSave = true;
778         emit modeChanged(spontaneous);
779     }
780 }
```

Here is the call graph for this function:

Here is the caller graph for this function:

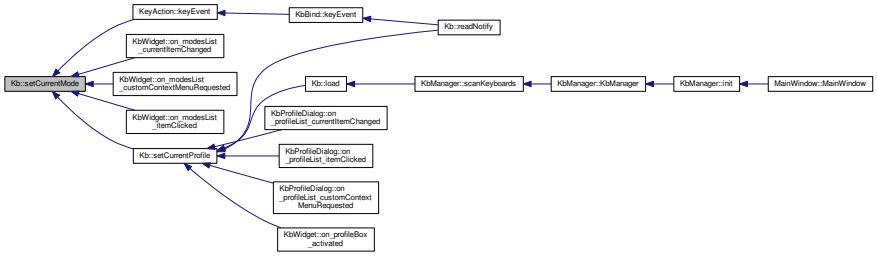

12.21.3.57 void Kb::setCurrentMode (KbProfile * *profile*, int *index*, bool *spontaneous* = true) [inline]

Definition at line 73 of file kb.h.

References KbProfile::modes(), and setCurrentMode().

Referenced by setCurrentMode().

```
73 { setCurrentMode(profile, profile->modes()[index], spontaneous); }
```

Here is the call graph for this function:



Here is the caller graph for this function:



12.21.3.58 void Kb::setCurrentMode (KbMode * *mode*, bool *spontaneous* = true) [inline]

Definition at line 74 of file kb.h.

References _currentProfile, and setCurrentMode().

Referenced by setCurrentMode().

```
74 { setCurrentMode(_currentProfile, mode, spontaneous); }
```

Here is the call graph for this function:



Here is the caller graph for this function:



12.21.3.59 void Kb::setCurrentProfile (KbProfile * *profile*, bool *spontaneous* = true)

Definition at line 760 of file kb.cpp.

References KbProfile::append(), KbProfile::currentMode(), getKeyMap(), hwModeCount, KbProfile::modeCount(), KbProfile::modes(), and setCurrentMode().

Referenced by load(), KbWidget::on_profileBox_activated(), KbProfileDialog::on_profileList_currentItemChanged(), KbProfileDialog::on_profileList_customContextMenuRequested(), KbProfileDialog::on_profileList_itemClicked(), and readNotify().

```
760                                                                 {
761     while(profile->modeCount() < hwModeCount)
762         profile->append(new KbMode(this, getKeyMap()));
763     KbMode* mode = profile->currentMode();
764     if(!mode)
765         profile->currentMode(mode = profile->modes().first());
766     setCurrentMode(profile, mode, spontaneous);
767 }
```

Here is the call graph for this function:

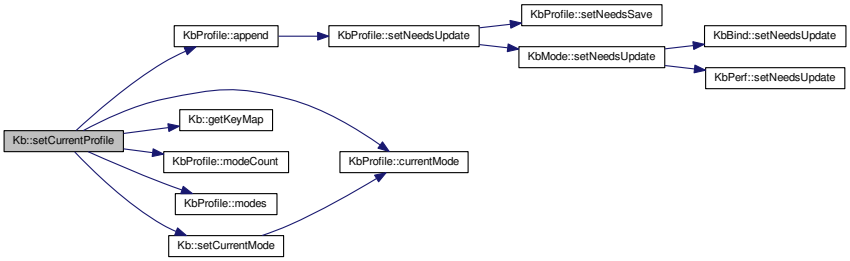

Here is the caller graph for this function:

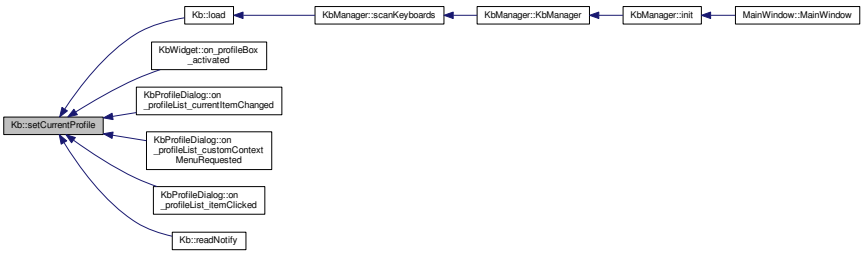

12.21.3.60 void Kb::updateLayout ( ) [private]

Definition at line 186 of file kb.cpp.

References _currentProfile, _hwProfile, _layout, _profiles, KbLight::close(), cmd, getKeyMap(), infoUpdated(), KeyMap::isISO(), KbProfile::keyMap(), KbMode::light(), and KbProfile::modes().

Referenced by layout().

```
186                     {
187 #ifdef Q_OS_MACX
188     // Write ANSI/ISO flag to daemon (OSX only)
189     cmd.write("layout ");
190     cmd.write(KeyMap::isISO(_layout) ? "iso" : "ansi");
191     cmd.write("\n");
192     cmd.flush();
193 #endif
194     foreach(KbProfile* profile, _profiles)
195         profile->keyMap(getKeyMap());
196     if(_hwProfile && !_profiles.contains(_hwProfile))
197         _hwProfile->keyMap(getKeyMap());
198     // Stop all animations as they'll need to be restarted
199     foreach(KbMode* mode, _currentProfile->modes())
200         mode->light()->close();
201     emit infoUpdated();
202 }
```

Here is the call graph for this function:

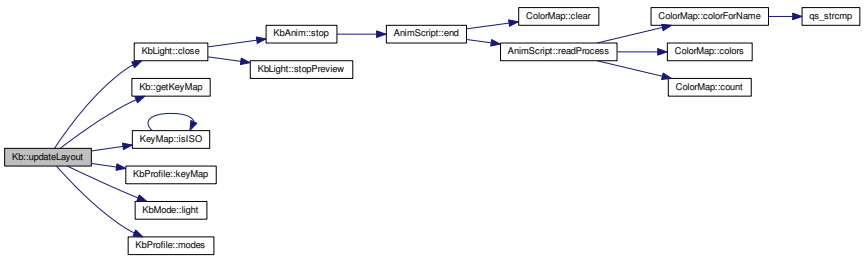

Here is the caller graph for this function:



12.21.3.61 void Kb::writeProfileHeader ( ) [private]

Definition at line 354 of file kb.cpp.

References _currentProfile, cmd, UsbId::guidString(), KbProfile::id(), UsbId::modifiedString(), and KbProfile::name().

Referenced by frameUpdate(), and hwSave().

```
354                             {
355     cmd.write("eraseprofile");
356     // Write the profile name and ID
357     cmd.write(" profilename ");
358     cmd.write(QUrl::toPercentEncoding(_currentProfile->name()));
359     cmd.write(" profileid ");
360     cmd.write(_currentProfile->id().guidString().toLatin1());
361     cmd.write(" ");
362     cmd.write(_currentProfile->id().modifiedString().toLatin1());
363 }
```

Here is the call graph for this function:

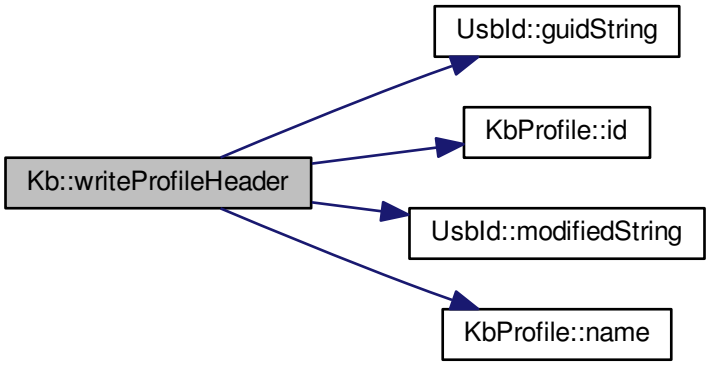

Here is the caller graph for this function:

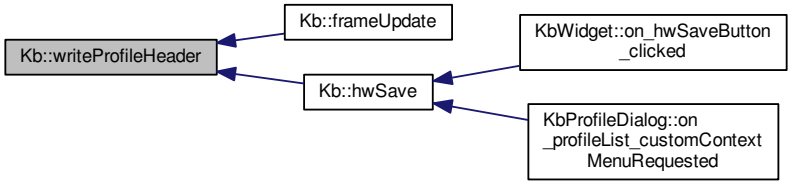

12.21.4 Friends And Related Function Documentation

12.21.4.1 friend class KbManager [friend]

Definition at line 142 of file kb.h.

12.21.5 Field Documentation

12.21.5.1 KbMode* Kb::_currentMode [private]

Definition at line 169 of file kb.h.

Referenced by currentBind(), currentLight(), currentMode(), currentPerf(), frameUpdate(), hwSave(), readNotify(), and setCurrentMode().

12.21.5.2 KbProfile* Kb::_currentProfile [private]

Definition at line 167 of file kb.h.

Referenced by currentProfile(), frameUpdate(), hwSave(), readNotify(), save(), setCurrentMode(), updateLayout(), and writeProfileHeader().

12.21.5.3 bool Kb::_delay = false [static], [private]

Definition at line 198 of file kb.h.

Referenced by Kb(), and macroDelay().

12.21.5.4 bool Kb::_dither = false [static], [private]

Definition at line 165 of file kb.h.

Referenced by dither(), and Kb().

12.21.5.5 int Kb::_frameRate = 30 [static], [private]

Definition at line 164 of file kb.h.

Referenced by frameRate(), and Kb().

12.21.5.6 KbProfile* Kb::_hwProfile [private]

Definition at line 183 of file kb.h.

Referenced by deleteHw(), hwProfile(), hwSave(), readNotify(), and updateLayout().

12.21.5.7 KeyMap::Layout Kb::_layout = KeyMap::NO_LAYOUT [static], [private]

Definition at line 161 of file kb.h.

Referenced by getKeyMap(), Kb(), layout(), and updateLayout().

12.21.5.8 KeyMap::Model Kb::_model [private]

Definition at line 171 of file kb.h.

Referenced by getKeyMap(), isKeyboard(), isMouse(), Kb(), and model().

12.21.5.9 bool Kb::_mouseAccel = true [static], [private]

Definition at line 165 of file kb.h.

Referenced by Kb(), and mouseAccel().

12.21.5.10 bool Kb::_needsSave [private]

Definition at line 201 of file kb.h.

Referenced by appendProfile(), load(), needsSave(), profiles(), readNotify(), save(), and setCurrentMode().

12.21.5.11 QList<KbProfile*> Kb::_profiles [private]

Definition at line 168 of file kb.h.

Referenced by appendProfile(), find(), indexOf(), load(), needsSave(), profiles(), readNotify(), save(), and updateLayout().

12.21.5.12 int Kb::_scrollSpeed = 0 [static], [private]

Definition at line 164 of file kb.h.

Referenced by Kb(), and scrollSpeed().

12.21.5.13 QFile Kb::cmd [private]

Definition at line 191 of file kb.h.

Referenced by dither(), frameRate(), frameUpdate(), fwUpdate(), hwSave(), isOpen(), Kb(), macroDelay(), mouseAccel(), readNotify(), scrollSpeed(), updateLayout(), writeProfileHeader(), and ~Kb().

12.21.5.14 QString Kb::cmdpath [private]

Definition at line 155 of file kb.h.

Referenced by Kb().

12.21.5.15 QString Kb::devpath [private]

Definition at line 155 of file kb.h.

Referenced by matches().

12.21.5.16 QString Kb::features

Definition at line 18 of file kb.h.

Referenced by MainWindow::checkFwUpdates(), FwUpgradeDialog::exec(), Kb(), KbWidget::KbWidget(), KbWidget::on_fwUpdButton_clicked(), and KbWidget::updateFwButton().

12.21.5.17 QString Kb::firmware

Definition at line 18 of file kb.h.

Referenced by MainWindow::checkFwUpdates(), KbWidget::devUpdate(), FwUpgradeDialog::FwUpgradeDialog(), Kb(), KbWidget::on_fwUpdButton_clicked(), and KbWidget::updateFwButton().

12.21.5.18 QString Kb::fwUpdPath [private]

Definition at line 181 of file kb.h.

Referenced by fwUpdate(), and readNotify().

12.21.5.19 bool Kb::hwLoading[HWMODE_MAX+1] [private]

Definition at line 205 of file kb.h.

Referenced by Kb(), and readNotify().

12.21.5.20 const int Kb::HWMODE_MAX = 3 [static]

Definition at line 50 of file kb.h.

Referenced by KbPerf::applyIndicators(), and readNotify().

12.21.5.21 int Kb::hwModeCount

Definition at line 49 of file kb.h.

Referenced by hwSave(), Kb(), KbWidget::modeIcon(), KbWidget::on_modesList_customContextMenuRequested(), readNotify(), and setCurrentProfile().

12.21.5.22 bool Kb::iState[KbPerf::HW_I_COUNT] [private]

Definition at line 174 of file kb.h.

Referenced by frameUpdate(), Kb(), and readNotify().

12.21.5.23 quint64 Kb::lastAutoSave [private]

Definition at line 178 of file kb.h.

Referenced by autoSave().

12.21.5.24 int Kb::macroNumber [private]

Definition at line 196 of file kb.h.

Referenced by getMacroNumber(), and Kb().

12.21.5.25 QString Kb::macroPath [private]

Definition at line 155 of file kb.h.

Referenced by getMacroPath(), Kb(), and ~Kb().

12.21.5.26 bool Kb::monochrome

Definition at line 19 of file kb.h.

Referenced by frameUpdate(), hwSave(), Kb(), and KbWidget::KbWidget().

12.21.5.27 int Kb::notifyNumber [private]

Definition at line 194 of file kb.h.

Referenced by frameUpdate(), fwUpdate(), Kb(), readNotify(), and ~Kb().

12.21.5.28 QString Kb::notifyPath [private]

Definition at line 155 of file kb.h.

Referenced by Kb(), and run().

12.21.5.29 QString Kb::pollrate

Definition at line 18 of file kb.h.

Referenced by KbWidget::devUpdate(), and Kb().

12.21.5.30 QString Kb::prefsPath [private]

Definition at line 177 of file kb.h.

Referenced by Kb(), load(), and save().

12.21.5.31 KbMode* Kb::prevMode [private]

Definition at line 186 of file kb.h.

Referenced by deletePrevious(), frameUpdate(), and hwSave().

12.21.5.32 KbProfile* Kb::prevProfile [private]

Definition at line 185 of file kb.h.

Referenced by frameUpdate().

12.21.5.33 QString Kb::usbModel

Definition at line 16 of file kb.h.

Referenced by FwUpgradeDialog::FwUpgradeDialog(), Kb(), KbWidget::name(), and MainWindow::showFwUpdateNotification().

12.21.5.34 QString Kb::usbSerial

Definition at line 16 of file kb.h.

Referenced by KbWidget::devUpdate(), Kb(), and matches().

The documentation for this class was generated from the following files:

- src/ckb/kb.h
- src/ckb/kb.cpp
- src/ckb/release/moc_kb.cpp

12.22 KbAnim Class Reference

`#include <src/ckb/kbanim.h>`

Inheritance diagram for KbAnim:

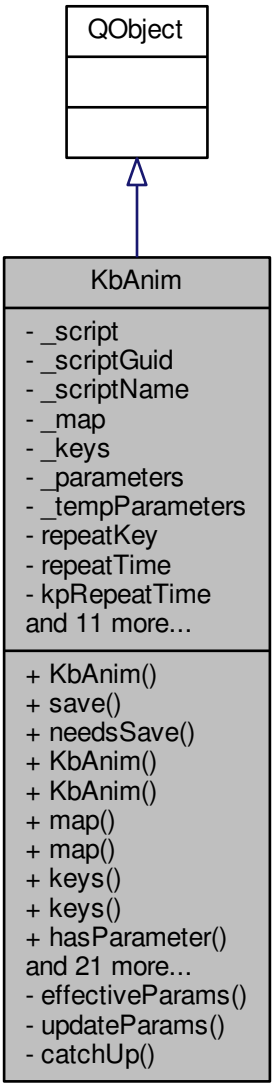

Collaboration diagram for KbAnim:

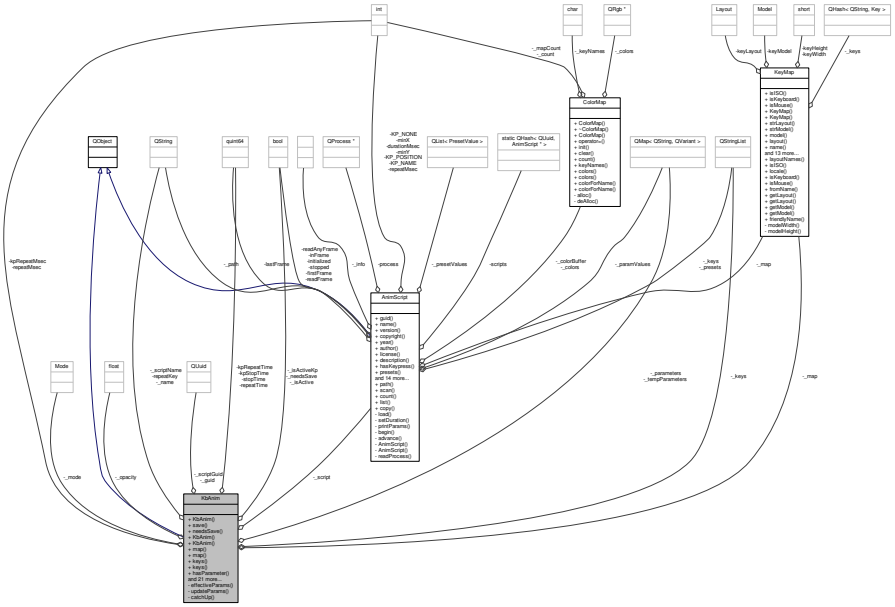

Public Types

- enum Mode {
  Normal, Add, Subtract, Multiply,
  Divide }

Public Member Functions

- KbAnim (QObject *parent, const KeyMap &map, const QUuid id, CkbSettings &settings)
- void save (CkbSettings &settings)
- bool needsSave () const
- KbAnim (QObject *parent, const KeyMap &map, const QString &name, const QStringList &keys, const AnimScript *script)
- KbAnim (QObject *parent, const KeyMap &map, const KbAnim &other)
- const KeyMap & map ()
- void map (const KeyMap &newMap)
- const QStringList & keys ()
- void keys (const QStringList &newKeys)
- bool hasParameter (const QString &name) const
- QVariant parameter (const QString &name) const
- void parameter (const QString &name, const QVariant &value)
- void commitParams ()
- void resetParams ()
- void reInit ()
- void trigger (quint64 timestamp, bool ignoreParameter=false)
- void keypress (const QString &key, bool pressed, quint64 timestamp)
- void stop ()
- bool isActive () const
- bool isRunning () const
- void blend (ColorMap &animMap, quint64 timestamp)
- const QUuid & guid () const

- void newId ()
- const QString & name () const
- void name (const QString &newName)
- float opacity () const
- void opacity (float newOpacity)
- Mode mode () const
- void mode (Mode newMode)
- const AnimScript * script () const
- const QString & scriptName () const

Private Member Functions

- QMap< QString, QVariant > effectiveParams ()
- void updateParams ()
- void catchUp (quint64 timestamp)

Private Attributes

- AnimScript * _script
- QUuid _scriptGuid
- QString _scriptName
- KeyMap _map
- QStringList _keys
- QMap< QString, QVariant > _parameters
- QMap< QString, QVariant > _tempParameters
- QString repeatKey
- quint64 repeatTime
- quint64 kpRepeatTime
- quint64 stopTime
- quint64 kpStopTime
- int repeatMsec
- int kpRepeatMsec
- QUuid _guid
- QString _name
- float _opacity
- Mode _mode
- bool _isActive
- bool _isActiveKp
- bool _needsSave

12.22.1 Detailed Description

Definition at line 11 of file kbanim.h.

12.22.2 Member Enumeration Documentation

12.22.2.1 enum KbAnim::Mode

Enumerator

Normal

Add

Subtract

Multiply

Divide

Definition at line 17 of file kbanim.h.

```
17              {
18         Normal,
19         Add,
20         Subtract,
21         Multiply,
22         Divide
23     };
```

12.22.3 Constructor & Destructor Documentation

12.22.3.1 KbAnim::KbAnim (QObject * *parent,* const KeyMap & *map,* const QUuid *id,* CkbSettings & *settings*)

Definition at line 8 of file kbanim.cpp.

References _guid, _keys, _map, _mode, _name, _opacity, _parameters, _script, _scriptGuid, _scriptName, CkbSettings::childKeys(), AnimScript::copy(), AnimScript::Param::defaultValue, KeyMap::fromStorage(), AnimScript::Param::INVALID, AnimScript::Param::LABEL, AnimScript::Param::name, AnimScript::name(), name(), Normal, AnimScript::param(), AnimScript::paramIterator(), reInit(), AnimScript::Param::type, and CkbSettings::value().

```
8                                                                                                   :
9      QObject(parent), _script(0), _map(map),
10      repeatTime(0), kpRepeatTime(0), stopTime(0),
       kpStopTime(0), repeatMsec(0), kpRepeatMsec(0),
11      _guid(id), _isActive(false), _isActiveKp(false),
       _needsSave(false)
12 {
13     SGroup group(settings, _guid.toString().toUpper());
14     _keys = settings.value("Keys").toStringList();
15     // Convert key list from storage names if needed
16     if(!settings.value("UseRealNames").toBool()){
17         QMutableListIterator<QString> i(_keys);
18         while(i.hasNext()){
19             i.next();
20             QString& key = i.value();
21             key = _map.fromStorage(key);
22         }
23     }
24     _name = settings.value("Name").toString().trimmed();
25     _opacity = settings.value("Opacity").toString().toDouble();
26     if(_opacity < 0.)
27         _opacity = 0.;
28     else if(_opacity > 1.)
29         _opacity = 1.;
30     bool modeOk = false;
31     _mode = (Mode)metaObject()->enumerator(metaObject()->indexOfEnumerator("Mode")).keysToValue(
       settings.value("BlendMode").toString().toLatin1(), &modeOk);
32     if(!modeOk)
33         _mode = Normal;
34     _scriptName = settings.value("ScriptName").toString().trimmed();
35     _scriptGuid = settings.value("ScriptGuid").toString();
36     {
37         SGroup group(settings, "Parameters");
38         foreach(const QString& param, settings.childKeys())
39             _parameters[param.toLower()] = settings.value(param);
40     }
41
42     if(!_scriptGuid.isNull()){
43         _script = AnimScript::copy(this, _scriptGuid);
44         if(_script){
45             // Remove nonexistant parameters
46             foreach(const QString& name, _parameters.keys()){
47                 AnimScript::Param param = _script->param(name);
48                 if(param.type == AnimScript::Param::INVALID || param.
       type == AnimScript::Param::LABEL)
49                     _parameters.remove(name);
50             }
51             // Add defaults for unset parameters
52             QListIterator<AnimScript::Param> i = _script->paramIterator();
53             while(i.hasNext()){
54                 AnimScript::Param param = i.next();
55                 if(!_parameters.contains(param.name) && param.
       type != AnimScript::Param::LABEL)
```

```
56                      _parameters[param.name] = param.defaultValue;
57              }
58              _scriptName = _script->name();
59              reInit();
60          }
61      }
62  }
```

Here is the call graph for this function:

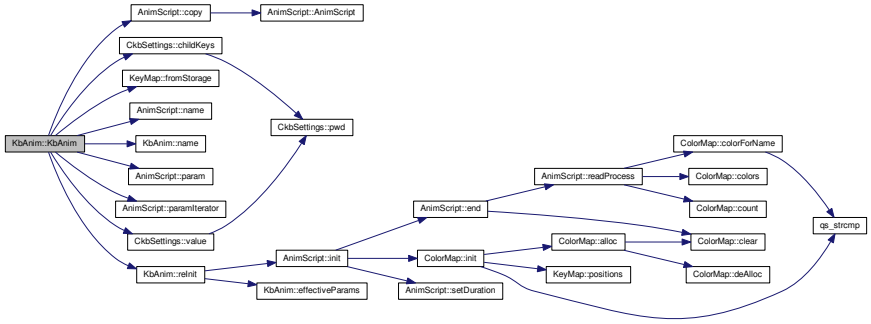

12.22.3.2 KbAnim::KbAnim (QObject * *parent,* const KeyMap & *map,* const QString & *name,* const QStringList & *keys,* const AnimScript * *script*)

Definition at line 84 of file kbanim.cpp.

References _parameters, _script, _scriptGuid, _scriptName, AnimScript::Param::defaultValue, AnimScript::guid(), AnimScript::Param::LABEL, AnimScript::Param::name, AnimScript::name(), AnimScript::paramIterator(), reInit(), and AnimScript::Param::type.

```
84
                    :
85      QObject(parent),
86      _script(AnimScript::copy(this, script->guid())),
        _map(map), _keys(keys),
87      repeatTime(0), kpRepeatTime(0), stopTime(0),
        kpStopTime(0), repeatMsec(0), kpRepeatMsec(0),
88      _guid(QUuid::createUuid()), _name(name), _opacity(1.),
        _mode(Normal), _isActive(false), _isActiveKp(false),
        _needsSave(true)
89  {
90      if(_script){
91          // Set default parameters
92          QListIterator<AnimScript::Param> i = _script->paramIterator();
93          while(i.hasNext()){
94              AnimScript::Param param = i.next();
95              if(param.type != AnimScript::Param::LABEL)
96                  _parameters[param.name] = param.defaultValue;
97          }
98          _scriptGuid = script->guid();
99          _scriptName = script->name();
100         reInit();
101     }
102 }
```

Here is the call graph for this function:

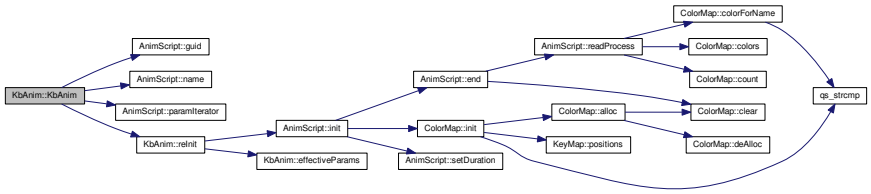

12.22.3.3 KbAnim::KbAnim (QObject * *parent,* const KeyMap & *map,* const KbAnim & *other*)

Definition at line 104 of file kbanim.cpp.

References reInit().

```
104                                                                    :
105     QObject(parent),
106     _script(AnimScript::copy(this, other.script()->
      guid())), _scriptGuid(_script->guid()), _scriptName(
      _script->name()),
107     _map(map), _keys(other._keys), _parameters(other.
      _parameters),
108     repeatTime(0), kpRepeatTime(0), stopTime(0),
      kpStopTime(0), repeatMsec(0), kpRepeatMsec(0),
109     _guid(other._guid), _name(other._name), _opacity(other.
      _opacity), _mode(other._mode), _isActive(false),
      _isActiveKp(false), _needsSave(true)
110 {
111     reInit();
112 }
```

Here is the call graph for this function:

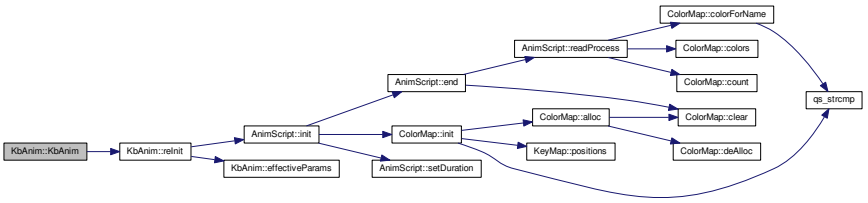

12.22.4 Member Function Documentation

12.22.4.1 void KbAnim::blend (ColorMap & *animMap,* quint64 *timestamp*)

Definition at line 365 of file kbanim.cpp.

References _mode, _opacity, _script, catchUp(), ColorMap::colors(), AnimScript::colors(), ColorMap::count(), AnimScript::frame(), and functions.

Referenced by KbLight::frameUpdate().

```
365                                                    {
366     if(!_script)
367         return;
368
369     // Fetch the next frame from the script
370     catchUp(timestamp);
```

```
371     _script->frame(timestamp);
372
373     // Blend the script's map with the current map
374     int blendMode = (int)_mode;
375     blendFunc blend = functions[blendMode];
376     float fOpacity = _opacity / 255.f;  // save some math by pre-dividing the 255 for qAlpha
377
378     const ColorMap& scriptMap = _script->colors();
379     int count = animMap.count();
380     if(scriptMap.count() != count){
381         qDebug() << "Script map didn't match base map (" << count << " vs " << scriptMap.
      count() << "). This should never happen.";
382         return;
383     }
384     QRgb* background = animMap.colors();
385     const QRgb* foreground = scriptMap.colors();
386     for(int i = 0; i < count; i++){
387         // Mix the colors in with the color map according to blend mode and alpha
388         QRgb& bg = background[i];
389         QRgb fg = foreground[i];
390         int alpha = qAlpha(fg);
391         if(alpha == 0)
392             continue;
393         if(blendMode == 0){
394             // Blend: normal
395             // This is the most common use case and it requires much less arithmetic
396             if(alpha == 255){
397                 bg = fg;
398             } else {
399                 float r = qRed(bg), g = qGreen(bg), b = qBlue(bg);
400                 float a = alpha * fOpacity;
401                 r = r * (1.f - a) + qRed(fg) * a;
402                 g = g * (1.f - a) + qGreen(fg) * a;
403                 b = b * (1.f - a) + qBlue(fg) * a;
404                 bg = qRgb(round(r), round(g), round(b));
405             }
406         } else {
407             // Use blend function
408             float r = qRed(bg) / 255.f, g = qGreen(bg) / 255.f, b = qBlue(bg) / 255.f;
409             float a = alpha * fOpacity;
410             r = r * (1.f - a) + blend(r, qRed(fg) / 255.f) * a;
411             g = g * (1.f - a) + blend(g, qGreen(fg) / 255.f) * a;
412             b = b * (1.f - a) + blend(b, qBlue(fg) / 255.f) * a;
413             bg = qRgb(round(r * 255.f), round(g * 255.f), round(b * 255.f));
414         }
415     }
416 }
```

Here is the call graph for this function:

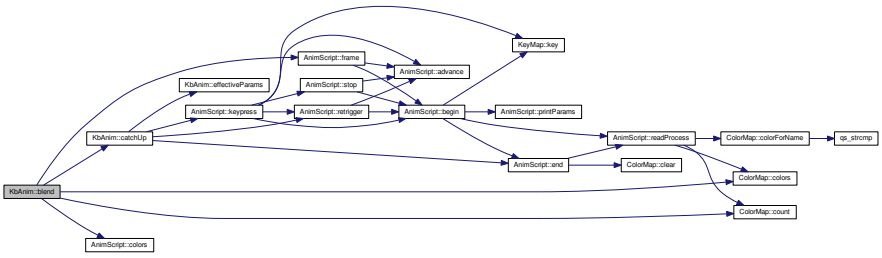

Here is the caller graph for this function:



12.22.4.2 void KbAnim::catchUp (quint64 *timestamp*) [private]

Definition at line 166 of file kbanim.cpp.

References _isActive, _isActiveKp, _script, effectiveParams(), AnimScript::end(), AnimScript::keypress(), kpRepeatMsec, kpRepeatTime, kpStopTime, repeatKey, repeatMsec, repeatTime, AnimScript::retrigger(), and stopTime.

Referenced by blend(), keypress(), and trigger().

```
166                                     {
167     QMap<QString, QVariant> parameters = effectiveParams();
168     // Stop the animation if its time has run out
169     if(stopTime != 0 && timestamp >= stopTime){
170         repeatMsec = repeatTime = 0;
171         if(!parameters.contains("repeat")){
172             // If repeats aren't allowed, stop the animation entirely
173             _script->end();
174             _isActive = false;
175             return;
176         } else
177             // Otherwise, simply stop repeating
178             stopTime = 0;
179     }
180     if(kpStopTime != 0 && timestamp >= kpStopTime){
181         kpRepeatMsec = kpRepeatTime = 0;
182         if(!parameters.contains("kprepeat")){
183             _script->end();
184             _isActiveKp = false;
185             return;
186         } else
187             kpStopTime = 0;
188     }
189
190     // Restart (or start, if there was a delay) the animation if its repeat time is up
191     while(repeatTime > 0 && timestamp >= repeatTime){
192         _script->retrigger(repeatTime);
193         if(repeatMsec <= 0){
194             repeatTime = 0;
195             break;
196         }
197         repeatTime += repeatMsec;
198     }
199     while(kpRepeatTime > 0 && timestamp >= kpRepeatTime){
200         _script->keypress(repeatKey, 1, kpRepeatTime);
201         if(kpRepeatMsec <= 0){
202             kpRepeatTime = 0;
203             break;
204         }
205         kpRepeatTime += kpRepeatMsec;
206     }
207 }
```

Here is the call graph for this function:

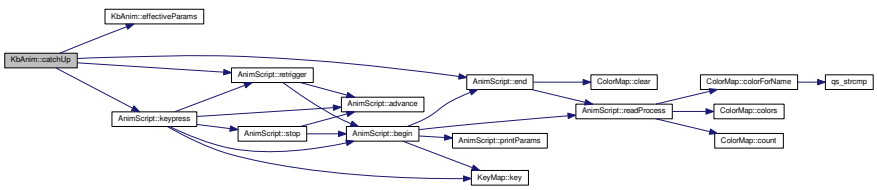

Here is the caller graph for this function:

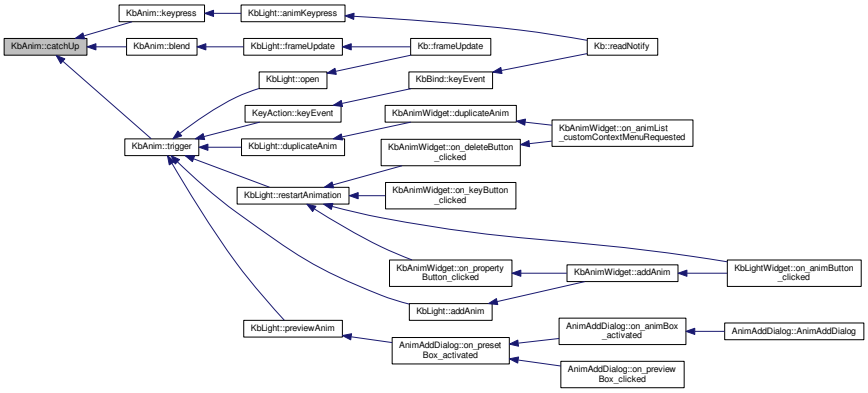

12.22.4.3 void KbAnim::commitParams ( )

Definition at line 121 of file kbanim.cpp.

References _needsSave, _parameters, _tempParameters, and effectiveParams().

Referenced by KbLight::addAnim(), KbAnimWidget::on_propertyButton_clicked(), and KbLight::previewAnim().

```
121                          {
122     _needsSave = true;
123     _parameters = effectiveParams();
124     _tempParameters.clear();
125 }
```

Here is the call graph for this function:

Here is the caller graph for this function:

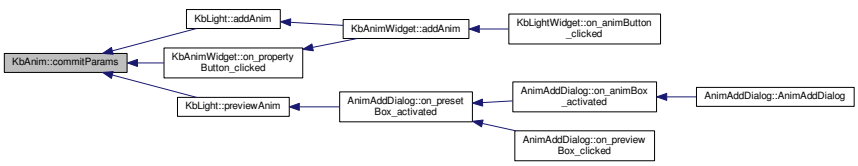

12.22.4.4 QMap< QString, QVariant > KbAnim::effectiveParams ( ) [private]

Definition at line 138 of file kbanim.cpp.

References _parameters, and _tempParameters.

Referenced by catchUp(), commitParams(), keypress(), reInit(), trigger(), and updateParams().

```
138                                                {
139     QMap<QString, QVariant> res = _parameters;
140     // Apply all uncommited parameters
141     QMapIterator<QString, QVariant> i(_tempParameters);
142     while(i.hasNext()){
143         i.next();
144         res[i.key()] = i .value();
145     }
146     return res;
147 }
```

Here is the caller graph for this function:

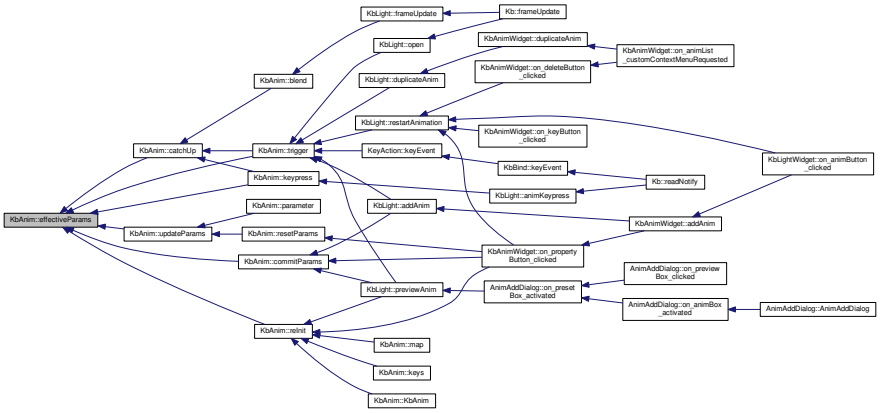

12.22.4.5 const QUuid& KbAnim::guid ( ) const [inline]

Definition at line 71 of file kbanim.h.

References _guid.

Referenced by KbAnimWidget::addAnim(), RebindWidget::applyChanges(), KbLight::findAnim(), KbAnimWidget::on_deleteButton_clicked(), KbAnimWidget::refreshList(), and KbLight::save().

```
71 { return _guid; }
```

Here is the caller graph for this function:

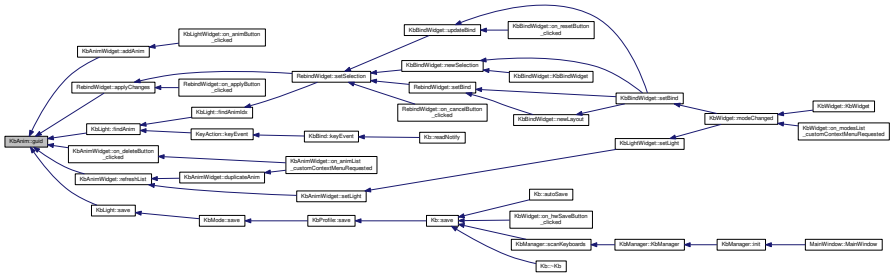

12.22.4.6 bool KbAnim::hasParameter (const QString & *name*) const [inline]

Definition at line 44 of file kbanim.h.

References _parameters.

Referenced by AnimSettingDialog::AnimSettingDialog().

```
44 { return _parameters.contains(name); }
```

Here is the caller graph for this function:



12.22.4.7 bool KbAnim::isActive ( ) const [inline]

Definition at line 63 of file kbanim.h.

References _isActive, and _isActiveKp.

Referenced by KeyAction::keyEvent(), and keypress().

```
63 { return _isActive || _isActiveKp; }
```

Here is the caller graph for this function:



12.22.4.8 bool KbAnim::isRunning ( ) const

Definition at line 325 of file kbanim.cpp.

References _script, and AnimScript::hasFrame().

Referenced by KbLight::isStarted().

```
325                             {
326     if(!_script)
327         return true;    // If the script wasn't loaded, pretend it's running anyway so it won't lock up
328     return _script->hasFrame();
329 }
```

Here is the call graph for this function:

Here is the caller graph for this function:



12.22.4.9 void KbAnim::keypress (const QString & *key,* bool *pressed,* quint64 *timestamp*)

Definition at line 250 of file kbanim.cpp.

References _isActive, _isActiveKp, _script, catchUp(), effectiveParams(), AnimScript::frame(), isActive(), AnimScript::keypress(), kpRepeatMsec, kpRepeatTime, kpStopTime, repeatKey, repeatMsec, repeatTime, stop(), AnimScript::stop(), and stopTime.

Referenced by KbLight::animKeypress().

```
250                                                                     {
251     if(!_script)
252         return;
253     QMap<QString, QVariant> parameters = effectiveParams();
254     if(pressed && parameters.value("kpmodestop").toBool()){
255         // If stop on key press is enabled, stop mode-wide animation
256         catchUp(timestamp);
257         _script->stop(timestamp);
258         stopTime = repeatTime = repeatMsec = 0;
259         _isActive = false;
260     } else {
261         if(!parameters.value("kptrigger").toBool())
262             return;
263         catchUp(timestamp);
264     }
265
266     if(pressed){
267         // Key pressed
268         _isActiveKp = true;
269         if(parameters.value("kpmode", 0).toInt() == 2 && isActive())
270             // If mode is start once and a key has already been pressed, do nothing
271             return;
272         int delay = round(parameters.value("kpdelay").toDouble() * 1000.);
273         if(delay > 0){
274             // If delay is enabled, wait to trigger the event
275             timestamp += delay;
276             kpRepeatTime = timestamp;
277         } else
278             _script->keypress(key, pressed, timestamp);
279
280         int repeat = round(parameters.value("kprepeat").toDouble() * 1000.);
281         if(repeat <= 0){
282             // If no repeat allowed, calculate stop time in seconds
283             kpRepeatMsec = -1;
284             double stop = parameters.value("kpstop").toDouble();
285             if(stop <= 0.)
```

```
286                 kpStopTime = 0;
287             else
288                 kpStopTime = timestamp + round(stop * 1000.);
289         } else {
290             // If repeat is allowed, calculate stop time in repetitions
291             kpRepeatMsec = repeat;
292             if(delay <= 0)
293                 kpRepeatTime = timestamp + repeat;
294             int stop = parameters.value("kpstop").toInt();
295             if(stop < 0)
296                 kpStopTime = 0;
297             else
298                 kpStopTime = timestamp + repeat * (1 + stop);
299         }
300         repeatKey = key;
301     } else {
302         // Key released
303         _isActiveKp = false;
304         _script->keypress(key, pressed, timestamp);
305         if(parameters.value("kprelease").toBool())
306             // Stop repeating keypress if "Stop on key release" is enabled
307             kpStopTime = timestamp;
308     }
309     _script->frame(timestamp);
310 }
```

Here is the call graph for this function:

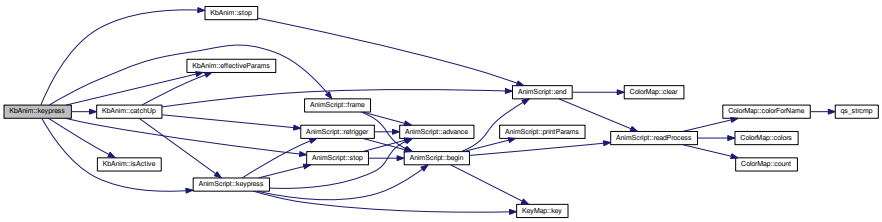

Here is the caller graph for this function:



12.22.4.10 const QStringList& KbAnim::keys ( ) [inline]

Definition at line 40 of file kbanim.h.

References _keys.

Referenced by KbLight::animKeypress(), KbLightWidget::changeAnim(), KbAnimWidget::on_keyButton_clicked(), and KbAnimWidget::setCurrent().

```
40 { return _keys; }
```

Here is the caller graph for this function:

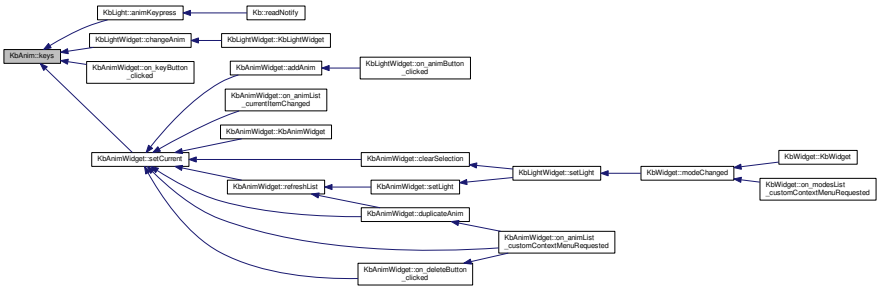

12.22.4.11 void KbAnim::keys (const QStringList & *newKeys*)

Definition at line 161 of file kbanim.cpp.

References _keys, and reInit().

```
161                                             {
162     _keys = newKeys;
163     reInit();
164 }
```

Here is the call graph for this function:

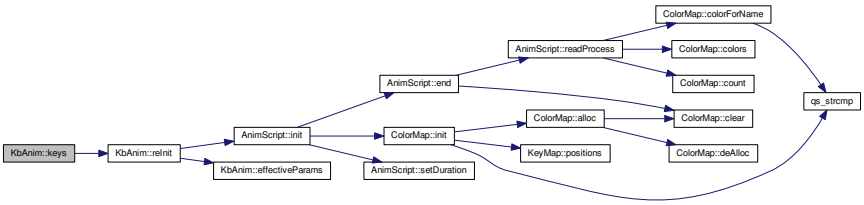

12.22.4.12 const KeyMap& KbAnim::map ( ) [inline]

Definition at line 37 of file kbanim.h.

References _map.

Referenced by KbLight::map().

```
37 { return _map; }
```

Here is the caller graph for this function:

12.22.4.13 void KbAnim::map (const KeyMap & *newMap*)

Definition at line 156 of file kbanim.cpp.

References _map, and reInit().

```
156                                      {
157     _map = newMap;
158     reInit();
159 }
```

Here is the call graph for this function:

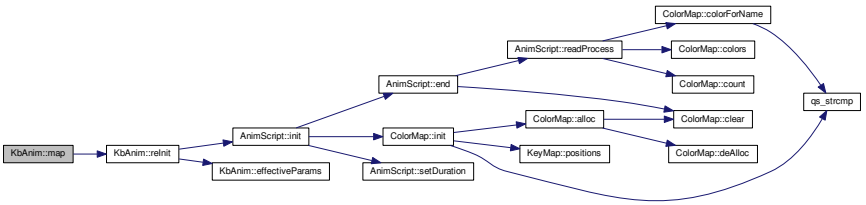

12.22.4.14 Mode KbAnim::mode ( ) const [inline]

Definition at line 77 of file kbanim.h.

References _mode.

Referenced by KbAnimWidget::on_blendBox_activated(), and KbAnimWidget::setCurrent().

```
77 { return _mode; }
```

Here is the caller graph for this function:

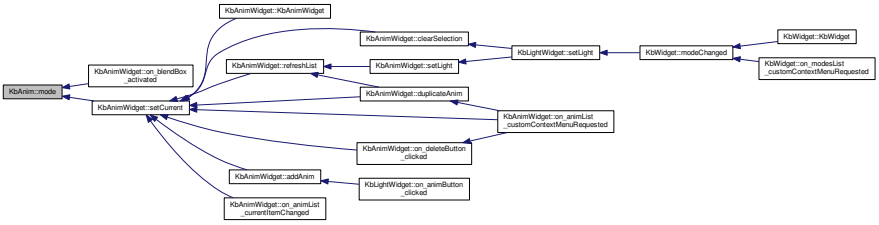

12.22.4.15 void KbAnim::mode (Mode *newMode*) [inline]

Definition at line 78 of file kbanim.h.

References _mode, and _needsSave.

```
78 { _needsSave = true; _mode = newMode; }
```

12.22.4.16 const QString& KbAnim::name ( ) const [inline]

Definition at line 73 of file kbanim.h.

References _name.

Referenced by KbAnimWidget::addAnim(), AnimSettingDialog::AnimSettingDialog(), KbAnim(), KbAnimWidget::on_animList_itemChanged(), KbAnimWidget::on_nameBox_textEdited(), parameter(), KbAnimWidget::refreshList(), KbAnimWidget::setCurrent(), and RebindWidget::setSelection().

```
73 { return _name; }
```

Here is the caller graph for this function:

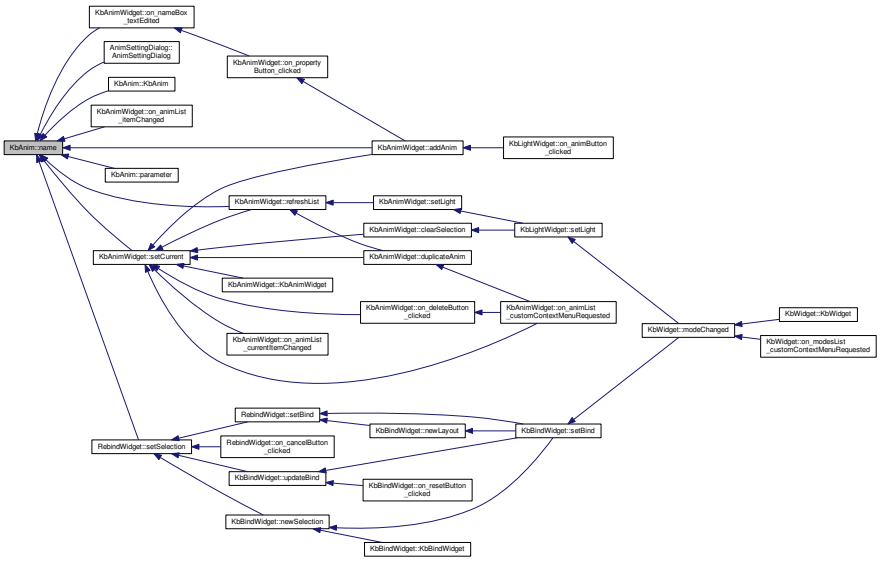

12.22.4.17 void KbAnim::name (const QString & *newName*) [inline]

Definition at line 74 of file kbanim.h.

References _name, and _needsSave.

```
74 { _needsSave = true; _name = newName; }
```

12.22.4.18 bool KbAnim::needsSave ( ) const [inline]

Definition at line 29 of file kbanim.h.

References _needsSave.

Referenced by KbLight::needsSave().

```
29 { return _needsSave; }
```

Here is the caller graph for this function:

12.22.4.19 void KbAnim::newId ( ) [inline]

Definition at line 72 of file kbanim.h.

References _guid, and _needsSave.

Referenced by KbLight::duplicateAnim(), and KbMode::newId().

```
72 { _needsSave = true; _guid = QUuid::createUuid(); }
```

Here is the caller graph for this function:

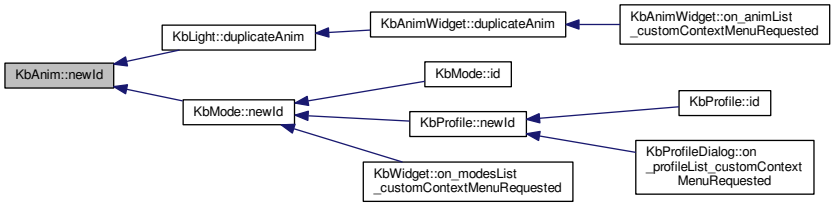

12.22.4.20 float KbAnim::opacity ( ) const [inline]

Definition at line 75 of file kbanim.h.

References _opacity.

Referenced by KbAnimWidget::on_opacityBox_valueChanged(), and KbAnimWidget::setCurrent().

```
75 { return _opacity; }
```

Here is the caller graph for this function:

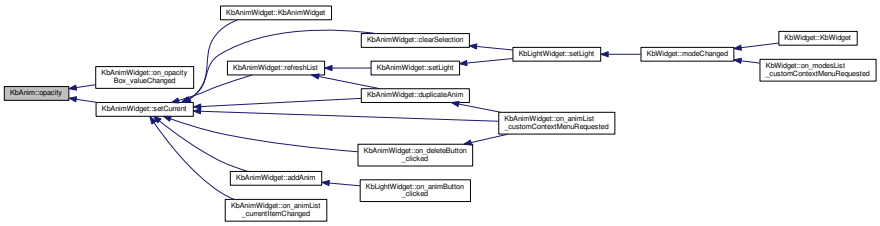

12.22.4.21 void KbAnim::opacity (float *newOpacity*) [inline]

Definition at line 76 of file kbanim.h.

References _needsSave, and _opacity.

```
76 { _needsSave = true; _opacity = newOpacity; }
```

12.22.4.22 QVariant KbAnim::parameter (const QString & *name*) const [inline]

Definition at line 45 of file kbanim.h.

References _parameters.

Referenced by KbLight::addAnim(), AnimSettingDialog::AnimSettingDialog(), KbLight::previewAnim(), and AnimSettingDialog::updateParam().

```
45 { return _parameters.value(name); }
```

Here is the caller graph for this function:

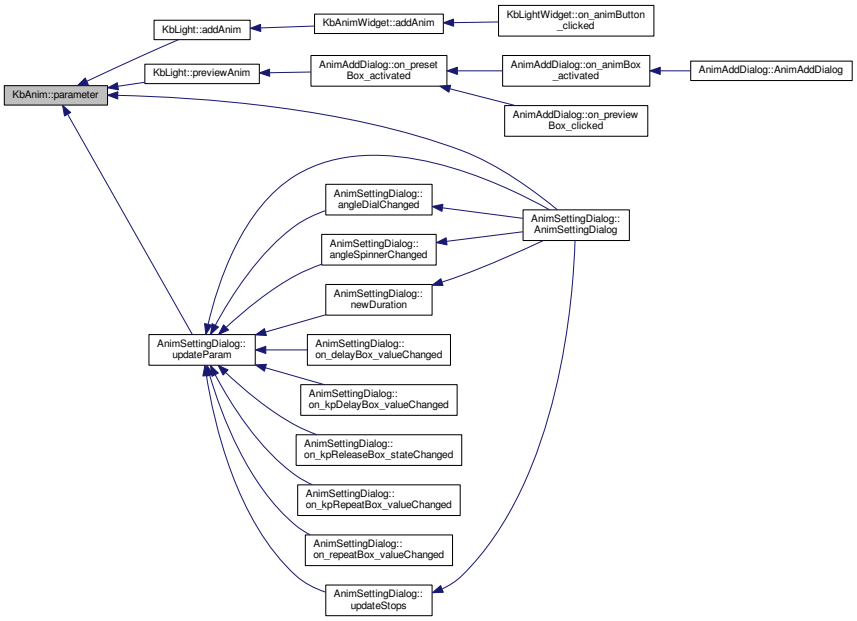

12.22.4.23 void KbAnim::parameter (const QString & *name,* const QVariant & *value*)

Definition at line 114 of file kbanim.cpp.

References _script, _tempParameters, AnimScript::hasParam(), name(), and updateParams().

```
114                                                                 {
115     if(!_script->hasParam(name))
116         return;
117     _tempParameters[name] = value;
118     updateParams();
119 }
```

Here is the call graph for this function:

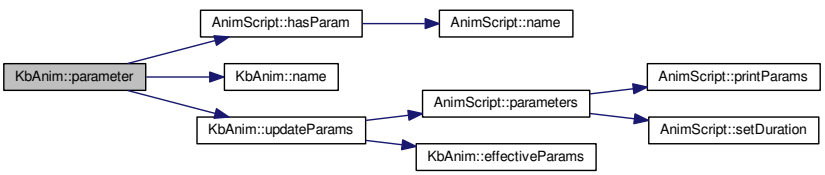

12.22.4.24 void KbAnim::relnit ( )

Definition at line 149 of file kbanim.cpp.

References _isActive, _isActiveKp, _keys, _map, _script, effectiveParams(), AnimScript::init(), and repeatKey.

Referenced by KbAnim(), keys(), map(), KbAnimWidget::on_propertyButton_clicked(), and KbLight::previewAnim().

```
149                     {
150     if(_script)
151         _script->init(_map, _keys, effectiveParams());
152     repeatKey = "";
153     _isActive = _isActiveKp = false;
154 }
```

Here is the call graph for this function:

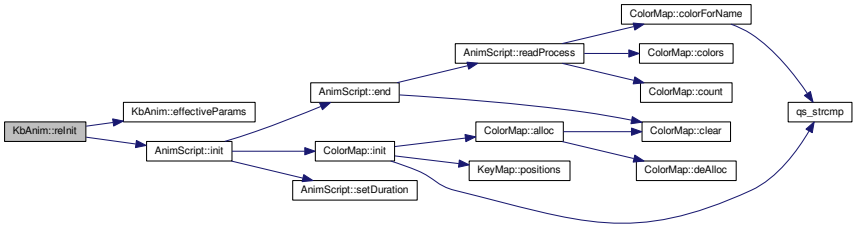

Here is the caller graph for this function:

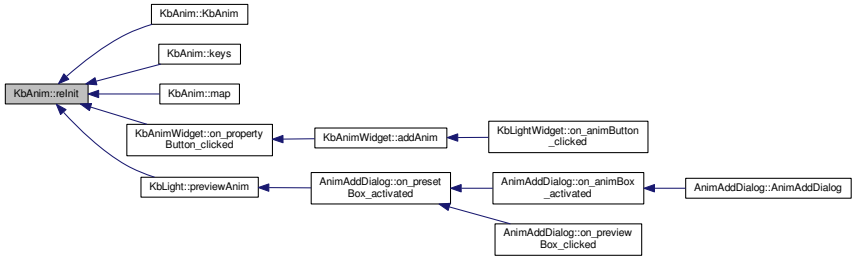

12.22.4.25 void KbAnim::resetParams ( )

Definition at line 127 of file kbanim.cpp.

References _tempParameters, and updateParams().

Referenced by KbAnimWidget::on_propertyButton_clicked().

```
127                       {
128     _tempParameters.clear();
129     updateParams();
130 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

12.22.4.26 void KbAnim::save (CkbSettings & *settings*)

Definition at line 64 of file kbanim.cpp.

References _guid, _keys, _mode, _name, _needsSave, _opacity, _parameters, _scriptGuid, _scriptName, CkbSettings::beginGroup(), CkbSettings::endGroup(), and CkbSettings::setValue().

Referenced by KbLight::save().

```
64                                      {
65     _needsSave = false;
66     settings.beginGroup(_guid.toString().toUpper());
67     settings.setValue("UseRealNames", true);
68     settings.setValue("Keys", _keys);
69     settings.setValue("Name", _name);
70     settings.setValue("Opacity", QString::number(_opacity));
71     settings.setValue("BlendMode", metaObject()->enumerator(metaObject()->indexOfEnumerator("Mode")
       ).valueToKey(_mode));
72     settings.setValue("ScriptName", _scriptName);
73     settings.setValue("ScriptGuid", _scriptGuid.toString().toUpper());
74     settings.beginGroup("Parameters");
75     QMapIterator<QString, QVariant> i(_parameters);
76     while(i.hasNext()){
77         i.next();
78         settings.setValue(i.key(), i.value());
79     }
80     settings.endGroup();
81     settings.endGroup();
82 }
```

Here is the call graph for this function:

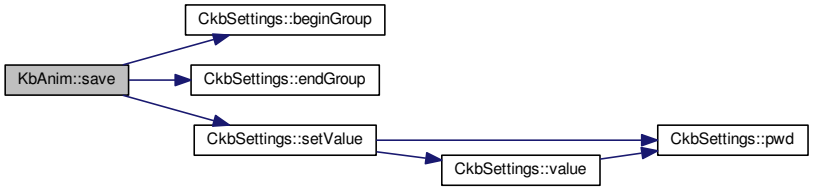

Here is the caller graph for this function:

12.22.4.27 const AnimScript* KbAnim::script ( ) const [inline]

Definition at line 81 of file kbanim.h.

References _script.

Referenced by AnimSettingDialog::AnimSettingDialog(), KbAnimWidget::setCurrent(), and AnimSettingDialog::updateParam().

```
81 { return _script; }
```

Here is the caller graph for this function:

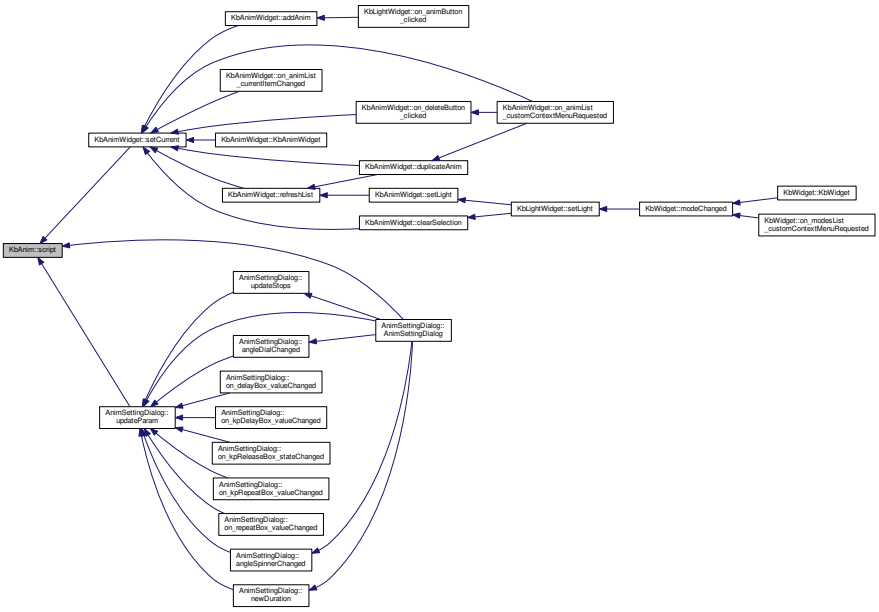

12.22.4.28 const QString& KbAnim::scriptName ( ) const [inline]

Definition at line 82 of file kbanim.h.

References _scriptName.

Referenced by AnimSettingDialog::AnimSettingDialog(), and KbAnimWidget::setCurrent().

```
82 { return _scriptName; }
```

Here is the caller graph for this function:

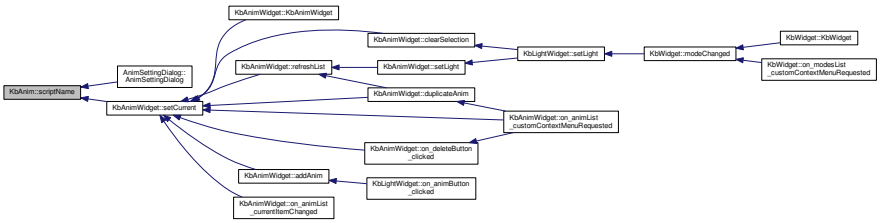

12.22.4.29 void KbAnim::stop ( )

Definition at line 312 of file kbanim.cpp.

References _isActive, _isActiveKp, _script, AnimScript::end(), kpRepeatMsec, kpRepeatTime, kpStopTime, repeatKey, repeatMsec, repeatTime, and stopTime.

Referenced by KbLight::addAnim(), KbLight::close(), KbLight::duplicateAnim(), KeyAction::keyEvent(), keypress(), KbLight::restartAnimation(), and trigger().

```
312                 {
313     if(_script)
314         _script->end();
315     repeatTime = 0;
316     kpRepeatTime = 0;
317     repeatMsec = 0;
318     kpRepeatMsec = 0;
319     stopTime = 0;
320     kpStopTime = 0;
321     repeatKey = "";
322     _isActive = _isActiveKp = false;
323 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

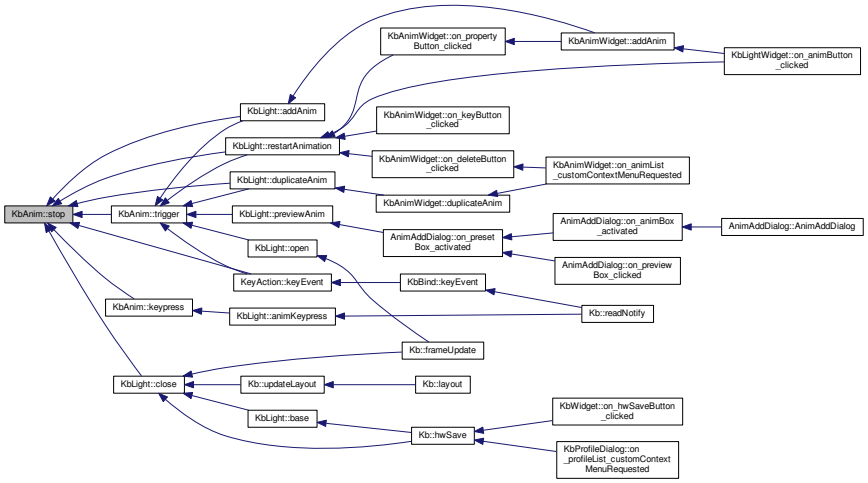

12.22.4.30 void KbAnim::trigger (quint64 *timestamp*, bool *ignoreParameter* = `false`)

Definition at line 209 of file kbanim.cpp.

References _isActive, _script, catchUp(), effectiveParams(), AnimScript::frame(), repeatMsec, repeatTime, AnimScript::retrigger(), stop(), and stopTime.

Referenced by KbLight::addAnim(), KbLight::duplicateAnim(), KeyAction::keyEvent(), KbLight::open(), KbLight::previewAnim(), and KbLight::restartAnimation().

```
209                                                 {
210     if(!_script)
211         return;
212     QMap<QString, QVariant> parameters = effectiveParams();
213 
214     catchUp(timestamp);
215     if(parameters.value("trigger").toBool() || ignoreParameter){
216         _isActive = true;
217         int delay = round(parameters.value("delay").toDouble() * 1000.);
218         if(delay > 0){
219             // If delay is enabled, wait to trigger the event
220             timestamp += delay;
221             repeatTime = timestamp;
222         } else
223             _script->retrigger(timestamp, true);
224 
225         int repeat = round(parameters.value("repeat").toDouble() * 1000.);
226         if(repeat <= 0){
227             // If no repeat allowed, calculate stop time in seconds
228             repeatMsec = -1;
229             double stop = parameters.value("stop").toDouble();
230             if(stop <= 0)
231                 stopTime = 0;
232             else
233                 stopTime = timestamp + round(stop * 1000.);
234         } else {
235             // If repeat is allowed, calculate stop time in repetitions
236             repeatMsec = repeat;
237             if(delay <= 0)
238                 repeatTime = timestamp + repeat;
239             int stop = parameters.value("stop").toInt();
240             if(stop < 0)
241                 stopTime = 0;
242             else
243                 stopTime = timestamp + repeat * (1 + stop);
244         }
245     }
246     // Ask the script for a frame even if we didn't do anything here. This way ckb knows the script is
    responding.
247     _script->frame(timestamp);
```

```
248 }
```

Here is the call graph for this function:

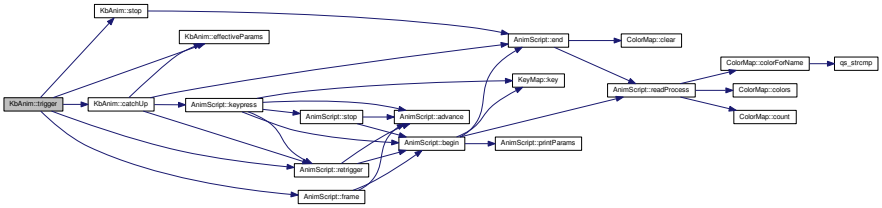

Here is the caller graph for this function:

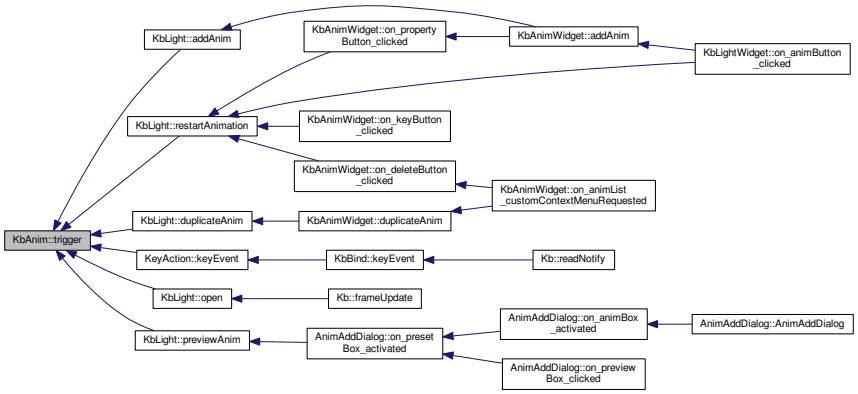

12.22.4.31 void KbAnim::updateParams ( ) [private]

Definition at line 132 of file kbanim.cpp.

References _script, effectiveParams(), AnimScript::parameters(), and repeatKey.

Referenced by parameter(), and resetParams().

```
132                          {
133     if(_script)
134         _script->parameters(effectiveParams());
135     repeatKey = "";
136 }
```

Here is the call graph for this function:

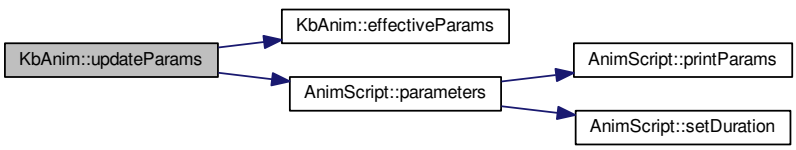

Here is the caller graph for this function:



12.22.5 Field Documentation

12.22.5.1 QUuid KbAnim::_guid [private]

Definition at line 110 of file kbanim.h.

Referenced by guid(), KbAnim(), newId(), and save().

12.22.5.2 bool KbAnim::_isActive [private]

Definition at line 114 of file kbanim.h.

Referenced by catchUp(), isActive(), keypress(), reInit(), stop(), and trigger().

12.22.5.3 bool KbAnim::_isActiveKp [private]

Definition at line 114 of file kbanim.h.

Referenced by catchUp(), isActive(), keypress(), reInit(), and stop().

12.22.5.4 QStringList KbAnim::_keys [private]

Definition at line 92 of file kbanim.h.

Referenced by KbAnim(), keys(), reInit(), and save().

12.22.5.5 KeyMap KbAnim::_map [private]

Definition at line 91 of file kbanim.h.

Referenced by KbAnim(), map(), and reInit().

12.22.5.6 Mode KbAnim::_mode [private]

Definition at line 113 of file kbanim.h.

Referenced by blend(), KbAnim(), mode(), and save().

12.22.5.7 QString KbAnim::_name [private]

Definition at line 111 of file kbanim.h.

Referenced by KbAnim(), name(), and save().

12.22.5.8 bool KbAnim::_needsSave [private]

Definition at line 115 of file kbanim.h.

Referenced by commitParams(), mode(), name(), needsSave(), newId(), opacity(), and save().

12.22.5.9 float KbAnim::_opacity [private]

Definition at line 112 of file kbanim.h.

Referenced by blend(), KbAnim(), opacity(), and save().

12.22.5.10 QMap<QString, QVariant> KbAnim::_parameters [private]

Definition at line 94 of file kbanim.h.

Referenced by commitParams(), effectiveParams(), hasParameter(), KbAnim(), parameter(), and save().

12.22.5.11 AnimScript* KbAnim::_script [private]

Definition at line 86 of file kbanim.h.

Referenced by blend(), catchUp(), isRunning(), KbAnim(), keypress(), parameter(), reInit(), script(), stop(), trigger(), and updateParams().

12.22.5.12 QUuid KbAnim::_scriptGuid [private]

Definition at line 88 of file kbanim.h.

Referenced by KbAnim(), and save().

12.22.5.13 QString KbAnim::_scriptName [private]

Definition at line 89 of file kbanim.h.

Referenced by KbAnim(), save(), and scriptName().

12.22.5.14 QMap<QString, QVariant> KbAnim::_tempParameters [private]

Definition at line 96 of file kbanim.h.

Referenced by commitParams(), effectiveParams(), parameter(), and resetParams().

12.22.5.15 int KbAnim::kpRepeatMsec [private]

Definition at line 106 of file kbanim.h.

Referenced by catchUp(), keypress(), and stop().

12.22.5.16 quint64 KbAnim::kpRepeatTime [private]

Definition at line 105 of file kbanim.h.

Referenced by catchUp(), keypress(), and stop().

12.22.5.17 quint64 KbAnim::kpStopTime [private]

Definition at line 105 of file kbanim.h.

Referenced by catchUp(), keypress(), and stop().

12.22.5.18 QString KbAnim::repeatKey [private]

Definition at line 104 of file kbanim.h.

Referenced by catchUp(), keypress(), reInit(), stop(), and updateParams().

12.22.5.19 int KbAnim::repeatMsec [private]

Definition at line 106 of file kbanim.h.

Referenced by catchUp(), keypress(), stop(), and trigger().

12.22.5.20 quint64 KbAnim::repeatTime [private]

Definition at line 105 of file kbanim.h.

Referenced by catchUp(), keypress(), stop(), and trigger().

12.22.5.21 quint64 KbAnim::stopTime [private]

Definition at line 105 of file kbanim.h.

Referenced by catchUp(), keypress(), stop(), and trigger().

The documentation for this class was generated from the following files:

- src/ckb/kbanim.h
- src/ckb/kbanim.cpp

12.23 Ui::KbAnimWidget Class Reference

`#include <src/ckb/ui_kbanimwidget.h>`

Inheritance diagram for Ui::KbAnimWidget:

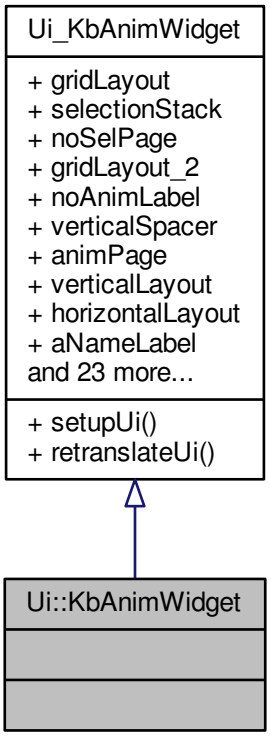

Collaboration diagram for Ui::KbAnimWidget:

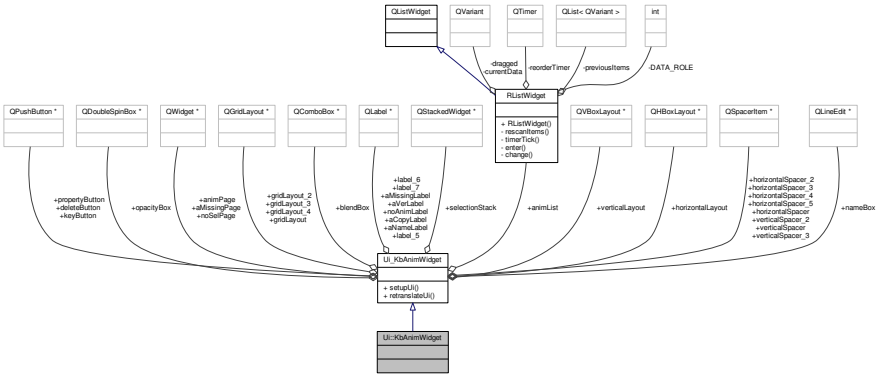

Public Member Functions

- void setupUi (QWidget *KbAnimWidget)
- void retranslateUi (QWidget *KbAnimWidget)

Data Fields

- QGridLayout * gridLayout
- QStackedWidget * selectionStack
- QWidget * noSelPage
- QGridLayout * gridLayout_2
- QLabel * noAnimLabel
- QSpacerItem * verticalSpacer
- QWidget * animPage
- QVBoxLayout * verticalLayout
- QHBoxLayout * horizontalLayout
- QLabel * aNameLabel
- QLabel * aVerLabel
- QSpacerItem * horizontalSpacer
- QLabel * aCopyLabel
- QSpacerItem * verticalSpacer_3
- QGridLayout * gridLayout_3
- QLineEdit * nameBox
- QDoubleSpinBox * opacityBox
- QComboBox * blendBox
- QLabel * label_6
- QSpacerItem * horizontalSpacer_4
- QSpacerItem * horizontalSpacer_2
- QLabel * label_5
- QSpacerItem * horizontalSpacer_3
- QLabel * label_7
- QPushButton * keyButton
- QPushButton * deleteButton
- QPushButton * propertyButton
- QSpacerItem * horizontalSpacer_5
- QSpacerItem * verticalSpacer_2
- QWidget * aMissingPage
- QGridLayout * gridLayout_4
- QLabel * aMissingLabel
- RListWidget * animList

12.23.1 Detailed Description

Definition at line 269 of file ui_kbanimwidget.h.

12.23.2 Member Function Documentation

12.23.2.1 void Ui_KbAnimWidget::retranslateUi (QWidget * *KbAnimWidget*) [inline], [inherited]

Definition at line 241 of file ui_kbanimwidget.h.

References Ui_KbAnimWidget::aCopyLabel, Ui_KbAnimWidget::aMissingLabel, Ui_KbAnimWidget::aNameLabel, Ui_KbAnimWidget::aVerLabel, Ui_KbAnimWidget::blendBox, Ui_KbAnimWidget::deleteButton, Ui_KbAnimWidget::keyButton, Ui_KbAnimWidget::label_5, Ui_KbAnimWidget::label_6, Ui_KbAnimWidget::label_7, Ui_KbAnimWidget::noAnimLabel, Ui_KbAnimWidget::opacityBox, and Ui_KbAnimWidget::propertyButton.

Referenced by Ui_KbAnimWidget::setupUi().

```
242     {
243         KbAnimWidget->setWindowTitle(QApplication::translate("KbAnimWidget", "Form", Q_NULLPTR));
244         noAnimLabel->setText(QApplication::translate("KbAnimWidget", "No animations in this mode
    ", Q_NULLPTR));
245         aNameLabel->setText(QApplication::translate("KbAnimWidget", "Animation name", Q_NULLPTR))
    ;
246         aVerLabel->setText(QApplication::translate("KbAnimWidget", "v0.0", Q_NULLPTR));
247         aCopyLabel->setText(QApplication::translate("KbAnimWidget", "Copyright \302\251",
    Q_NULLPTR));
248         opacityBox->setSuffix(QApplication::translate("KbAnimWidget", "%", Q_NULLPTR));
249         blendBox->clear();
250         blendBox->insertItems(0, QStringList()
251          << QApplication::translate("KbAnimWidget", "Normal", Q_NULLPTR)
252          << QApplication::translate("KbAnimWidget", "Add", Q_NULLPTR)
253          << QApplication::translate("KbAnimWidget", "Subtract", Q_NULLPTR)
254          << QApplication::translate("KbAnimWidget", "Multiply", Q_NULLPTR)
255          << QApplication::translate("KbAnimWidget", "Divide", Q_NULLPTR)
256         );
257         label_6->setText(QApplication::translate("KbAnimWidget", "Blend mode:", Q_NULLPTR));
258         label_5->setText(QApplication::translate("KbAnimWidget", "Opacity:", Q_NULLPTR));
259         label_7->setText(QApplication::translate("KbAnimWidget", "Name:", Q_NULLPTR));
260         keyButton->setText(QApplication::translate("KbAnimWidget", "Set keys", Q_NULLPTR));
261         deleteButton->setText(QApplication::translate("KbAnimWidget", "Delete animation",
    Q_NULLPTR));
262         propertyButton->setText(QApplication::translate("KbAnimWidget", "Edit properties",
    Q_NULLPTR));
263         aMissingLabel->setText(QApplication::translate("KbAnimWidget", "Mising animation",
    Q_NULLPTR));
264     } // retranslateUi
```

Here is the caller graph for this function:



12.23.2.2 void Ui_KbAnimWidget::setupUi (QWidget * *KbAnimWidget*) [inline],[inherited]

Definition at line 69 of file ui_kbanimwidget.h.

References Ui_KbAnimWidget::aCopyLabel, Ui_KbAnimWidget::aMissingLabel, Ui_KbAnimWidget::aMissingPage, Ui_KbAnimWidget::aNameLabel, Ui_KbAnimWidget::animList, Ui_KbAnimWidget::animPage, Ui_KbAnimWidget::aVerLabel, Ui_KbAnimWidget::blendBox, Ui_KbAnimWidget::deleteButton, Ui_KbAnimWidget::gridLayout, Ui_KbAnimWidget::gridLayout_2, Ui_KbAnimWidget::gridLayout_3, Ui_KbAnimWidget::gridLayout_4, Ui_KbAnimWidget::horizontalLayout, Ui_KbAnimWidget::horizontalSpacer, Ui_KbAnimWidget::horizontalSpacer_2, Ui_KbAnimWidget::horizontalSpacer_3, Ui_KbAnimWidget::horizontalSpacer_4, Ui_KbAnimWidget::horizontalSpacer_5, Ui_KbAnimWidget::keyButton, Ui_KbAnimWidget::label_5, Ui_KbAnimWidget::label_6, Ui_KbAnimWidget::label_7, Ui_KbAnimWidget::nameBox, Ui_KbAnimWidget::noAnimLabel, Ui_KbAnimWidget::noSelPage, Ui_KbAnimWidget::opacityBox, Ui_KbAnimWidget::propertyButton, Ui_KbAnimWidget::retranslateUi(), Ui_KbAnimWidget::selectionStack, Ui_KbAnimWidget::verticalLayout, Ui_KbAnimWidget::verticalSpacer, Ui_KbAnimWidget::verticalSpacer_2, and Ui_KbAnimWidget::verticalSpacer_3.

Referenced by KbAnimWidget::KbAnimWidget().

```
70     {
71         if (KbAnimWidget->objectName().isEmpty())
72             KbAnimWidget->setObjectName(QStringLiteral("KbAnimWidget"));
73         KbAnimWidget->resize(613, 300);
74         gridLayout = new QGridLayout(KbAnimWidget);
75         gridLayout->setObjectName(QStringLiteral("gridLayout"));
76         gridLayout->setContentsMargins(0, 0, 0, 0);
77         selectionStack = new QStackedWidget(KbAnimWidget);
78         selectionStack->setObjectName(QStringLiteral("selectionStack"));
79         noSelPage = new QWidget();
80         noSelPage->setObjectName(QStringLiteral("noSelPage"));
81         gridLayout_2 = new QGridLayout(noSelPage);
82         gridLayout_2->setObjectName(QStringLiteral("gridLayout_2"));
83         gridLayout_2->setContentsMargins(6, 6, 6, 6);
84         noAnimLabel = new QLabel(noSelPage);
```

```
85          noAnimLabel->setObjectName(QStringLiteral("noAnimLabel"));
86
87          gridLayout_2->addWidget(noAnimLabel, 0, 0, 1, 1);
88
89          verticalSpacer = new QSpacerItem(20, 40, QSizePolicy::Minimum, QSizePolicy::Expanding
    );
90
91          gridLayout_2->addItem(verticalSpacer, 1, 0, 1, 1);
92
93          selectionStack->addWidget(noSelPage);
94          animPage = new QWidget();
95          animPage->setObjectName(QStringLiteral("animPage"));
96          verticalLayout = new QVBoxLayout(animPage);
97          verticalLayout->setObjectName(QStringLiteral("verticalLayout"));
98          verticalLayout->setContentsMargins(6, 0, 0, 0);
99          horizontalLayout = new QHBoxLayout();
100          horizontalLayout->setObjectName(QStringLiteral("horizontalLayout"));
101          aNameLabel = new QLabel(animPage);
102          aNameLabel->setObjectName(QStringLiteral("aNameLabel"));
103          QFont font;
104          font.setBold(true);
105          font.setWeight(75);
106          aNameLabel->setFont(font);
107
108          horizontalLayout->addWidget(aNameLabel);
109
110          aVerLabel = new QLabel(animPage);
111          aVerLabel->setObjectName(QStringLiteral("aVerLabel"));
112
113          horizontalLayout->addWidget(aVerLabel);
114
115          horizontalSpacer = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
116
117          horizontalLayout->addItem(horizontalSpacer);
118
119          aCopyLabel = new QLabel(animPage);
120          aCopyLabel->setObjectName(QStringLiteral("aCopyLabel"));
121
122          horizontalLayout->addWidget(aCopyLabel);
123
124
125          verticalLayout->addLayout(horizontalLayout);
126
127          verticalSpacer_3 = new QSpacerItem(20, 40, QSizePolicy::Minimum,
    QSizePolicy::Expanding);
128
129          verticalLayout->addItem(verticalSpacer_3);
130
131          gridLayout_3 = new QGridLayout();
132          gridLayout_3->setObjectName(QStringLiteral("gridLayout_3"));
133          nameBox = new QLineEdit(animPage);
134          nameBox->setObjectName(QStringLiteral("nameBox"));
135          QSizePolicy sizePolicy(QSizePolicy::Fixed, QSizePolicy::Fixed);
136          sizePolicy.setHorizontalStretch(0);
137          sizePolicy.setVerticalStretch(0);
138          sizePolicy.setHeightForWidth(nameBox->sizePolicy().hasHeightForWidth());
139          nameBox->setSizePolicy(sizePolicy);
140          nameBox->setMinimumSize(QSize(150, 0));
141          nameBox->setMaximumSize(QSize(150, 16777215));
142
143          gridLayout_3->addWidget(nameBox, 0, 3, 1, 2);
144
145          opacityBox = new QDoubleSpinBox(animPage);
146          opacityBox->setObjectName(QStringLiteral("opacityBox"));
147          opacityBox->setDecimals(1);
148          opacityBox->setValue(100);
149
150          gridLayout_3->addWidget(opacityBox, 1, 3, 1, 1);
151
152          blendBox = new QComboBox(animPage);
153          blendBox->setObjectName(QStringLiteral("blendBox"));
154
155          gridLayout_3->addWidget(blendBox, 2, 3, 1, 2);
156
157          label_6 = new QLabel(animPage);
158          label_6->setObjectName(QStringLiteral("label_6"));
159
160          gridLayout_3->addWidget(label_6, 2, 1, 1, 1);
161
162          horizontalSpacer_4 = new QSpacerItem(0, 0, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
163
164          gridLayout_3->addItem(horizontalSpacer_4, 0, 0, 1, 1);
165
166          horizontalSpacer_2 = new QSpacerItem(30, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
```

```
167
168         gridLayout_3->addItem(horizontalSpacer_2, 0, 2, 1, 1);
169
170         label_5 = new QLabel(animPage);
171         label_5->setObjectName(QStringLiteral("label_5"));
172
173         gridLayout_3->addWidget(label_5, 1, 1, 1, 1);
174
175         horizontalSpacer_3 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
176
177         gridLayout_3->addItem(horizontalSpacer_3, 0, 5, 1, 1);
178
179         label_7 = new QLabel(animPage);
180         label_7->setObjectName(QStringLiteral("label_7"));
181
182         gridLayout_3->addWidget(label_7, 0, 1, 1, 1);
183
184         keyButton = new QPushButton(animPage);
185         keyButton->setObjectName(QStringLiteral("keyButton"));
186
187         gridLayout_3->addWidget(keyButton, 1, 6, 1, 1);
188
189         deleteButton = new QPushButton(animPage);
190         deleteButton->setObjectName(QStringLiteral("deleteButton"));
191
192         gridLayout_3->addWidget(deleteButton, 2, 6, 1, 1);
193
194         propertyButton = new QPushButton(animPage);
195         propertyButton->setObjectName(QStringLiteral("propertyButton"));
196
197         gridLayout_3->addWidget(propertyButton, 0, 6, 1, 1);
198
199         horizontalSpacer_5 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
200
201         gridLayout_3->addItem(horizontalSpacer_5, 1, 4, 1, 1);
202
203
204         verticalLayout->addLayout(gridLayout_3);
205
206         verticalSpacer_2 = new QSpacerItem(20, 40, QSizePolicy::Minimum,
    QSizePolicy::Expanding);
207
208         verticalLayout->addItem(verticalSpacer_2);
209
210         selectionStack->addWidget(animPage);
211         aMissingPage = new QWidget();
212         aMissingPage->setObjectName(QStringLiteral("aMissingPage"));
213         gridLayout_4 = new QGridLayout(aMissingPage);
214         gridLayout_4->setObjectName(QStringLiteral("gridLayout_4"));
215         aMissingLabel = new QLabel(aMissingPage);
216         aMissingLabel->setObjectName(QStringLiteral("aMissingLabel"));
217         aMissingLabel->setFont(font);
218
219         gridLayout_4->addWidget(aMissingLabel, 0, 0, 1, 1);
220
221         selectionStack->addWidget(aMissingPage);
222
223         gridLayout->addWidget(selectionStack, 0, 2, 2, 1);
224
225         animList = new RListWidget(KbAnimWidget);
226         animList->setObjectName(QStringLiteral("animList"));
227         animList->setMaximumSize(QSize(130, 16777215));
228         animList->setContextMenuPolicy(Qt::CustomContextMenu);
229         animList->setFrameShadow(QFrame::Plain);
230         animList->setDragDropMode(QAbstractItemView::InternalMove);
231         animList->setMovement(QListView::Snap);
232
233         gridLayout->addWidget(animList, 0, 0, 2, 1);
234
235
236         retranslateUi(KbAnimWidget);
237
238         QMetaObject::connectSlotsByName(KbAnimWidget);
239     } // setupUi
```

Here is the call graph for this function:



Here is the caller graph for this function:

12.23.3 Field Documentation

12.23.3.1 QLabel* Ui_KbAnimWidget::aCopyLabel [inherited]

Definition at line 47 of file ui_kbanimwidget.h.

Referenced by Ui_KbAnimWidget::retranslateUi(), KbAnimWidget::setCurrent(), and Ui_KbAnimWidget::setupUi().

12.23.3.2 QLabel* Ui_KbAnimWidget::aMissingLabel [inherited]

Definition at line 66 of file ui_kbanimwidget.h.

Referenced by Ui_KbAnimWidget::retranslateUi(), KbAnimWidget::setCurrent(), and Ui_KbAnimWidget::setupUi().

12.23.3.3 QWidget* Ui_KbAnimWidget::aMissingPage [inherited]

Definition at line 64 of file ui_kbanimwidget.h.

Referenced by Ui_KbAnimWidget::setupUi().

12.23.3.4 QLabel* Ui_KbAnimWidget::aNameLabel [inherited]

Definition at line 44 of file ui_kbanimwidget.h.

Referenced by Ui_KbAnimWidget::retranslateUi(), KbAnimWidget::setCurrent(), and Ui_KbAnimWidget::setupUi().

12.23.3.5 RListWidget* Ui_KbAnimWidget::animList [inherited]

Definition at line 67 of file ui_kbanimwidget.h.

Referenced by KbAnimWidget::addAnim(), KbAnimWidget::clearSelection(), KbAnimWidget::duplicateAnim(), KbAnimWidget::KbAnimWidget(), KbAnimWidget::on_animList_customContextMenuRequested(), KbAnimWidget::on_deleteButton_clicked(), KbAnimWidget::on_nameBox_textEdited(), KbAnimWidget::refreshList(), KbAnimWidget::reorderAnims(), and Ui_KbAnimWidget::setupUi().

12.23.3.6 QWidget* Ui_KbAnimWidget::animPage [inherited]

Definition at line 41 of file ui_kbanimwidget.h.

Referenced by Ui_KbAnimWidget::setupUi().

12.23.3.7 QLabel* Ui_KbAnimWidget::aVerLabel [inherited]

Definition at line 45 of file ui_kbanimwidget.h.

Referenced by Ui_KbAnimWidget::retranslateUi(), KbAnimWidget::setCurrent(), and Ui_KbAnimWidget::setupUi().

12.23.3.8 QComboBox* Ui_KbAnimWidget::blendBox [inherited]

Definition at line 52 of file ui_kbanimwidget.h.

Referenced by Ui_KbAnimWidget::retranslateUi(), KbAnimWidget::setCurrent(), and Ui_KbAnimWidget::setupUi().

12.23.3.9 QPushButton* Ui_KbAnimWidget::deleteButton [inherited]

Definition at line 60 of file ui_kbanimwidget.h.

Referenced by Ui_KbAnimWidget::retranslateUi(), and Ui_KbAnimWidget::setupUi().

12.23.3.10 QGridLayout* Ui_KbAnimWidget::gridLayout [inherited]

Definition at line 35 of file ui_kbanimwidget.h.

Referenced by Ui_KbAnimWidget::setupUi().

12.23.3.11 QGridLayout* Ui_KbAnimWidget::gridLayout_2 [inherited]

Definition at line 38 of file ui_kbanimwidget.h.

Referenced by Ui_KbAnimWidget::setupUi().

12.23.3.12 QGridLayout* Ui_KbAnimWidget::gridLayout_3 [inherited]

Definition at line 49 of file ui_kbanimwidget.h.

Referenced by Ui_KbAnimWidget::setupUi().

12.23.3.13 QGridLayout* Ui_KbAnimWidget::gridLayout_4 [inherited]

Definition at line 65 of file ui_kbanimwidget.h.

Referenced by Ui_KbAnimWidget::setupUi().

12.23.3.14 QHBoxLayout* Ui_KbAnimWidget::horizontalLayout [inherited]

Definition at line 43 of file ui_kbanimwidget.h.

Referenced by Ui_KbAnimWidget::setupUi().

12.23.3.15 QSpacerItem* Ui_KbAnimWidget::horizontalSpacer [inherited]

Definition at line 46 of file ui_kbanimwidget.h.

Referenced by Ui_KbAnimWidget::setupUi().

12.23.3.16 QSpacerItem* Ui_KbAnimWidget::horizontalSpacer_2 [inherited]

Definition at line 55 of file ui_kbanimwidget.h.

Referenced by Ui_KbAnimWidget::setupUi().

12.23.3.17 QSpacerItem* Ui_KbAnimWidget::horizontalSpacer_3 [inherited]

Definition at line 57 of file ui_kbanimwidget.h.

Referenced by Ui_KbAnimWidget::setupUi().

12.23.3.18 QSpacerItem* Ui_KbAnimWidget::horizontalSpacer_4 [inherited]

Definition at line 54 of file ui_kbanimwidget.h.

Referenced by Ui_KbAnimWidget::setupUi().

12.23.3.19 QSpacerItem* Ui_KbAnimWidget::horizontalSpacer_5 [inherited]

Definition at line 62 of file ui_kbanimwidget.h.

Referenced by Ui_KbAnimWidget::setupUi().

12.23.3.20 QPushButton* Ui_KbAnimWidget::keyButton [inherited]

Definition at line 59 of file ui_kbanimwidget.h.

Referenced by Ui_KbAnimWidget::retranslateUi(), KbAnimWidget::setSelectedKeys(), and Ui_KbAnimWidget::setupUi().

12.23.3.21 QLabel* Ui_KbAnimWidget::label_5 [inherited]

Definition at line 56 of file ui_kbanimwidget.h.

Referenced by Ui_KbAnimWidget::retranslateUi(), and Ui_KbAnimWidget::setupUi().

12.23.3.22 QLabel* Ui_KbAnimWidget::label_6 [inherited]

Definition at line 53 of file ui_kbanimwidget.h.

Referenced by Ui_KbAnimWidget::retranslateUi(), and Ui_KbAnimWidget::setupUi().

12.23.3.23 QLabel* Ui_KbAnimWidget::label_7 [inherited]

Definition at line 58 of file ui_kbanimwidget.h.

Referenced by Ui_KbAnimWidget::retranslateUi(), and Ui_KbAnimWidget::setupUi().

12.23.3.24 QLineEdit* Ui_KbAnimWidget::nameBox [inherited]

Definition at line 50 of file ui_kbanimwidget.h.

Referenced by KbAnimWidget::on_animList_itemChanged(), KbAnimWidget::on_propertyButton_clicked(), KbAnimWidget::setCurrent(), and Ui_KbAnimWidget::setupUi().

12.23.3.25 QLabel* Ui_KbAnimWidget::noAnimLabel [inherited]

Definition at line 39 of file ui_kbanimwidget.h.

Referenced by KbAnimWidget::addAnim(), KbAnimWidget::duplicateAnim(), KbAnimWidget::on_deleteButton_clicked(), KbAnimWidget::refreshList(), Ui_KbAnimWidget::retranslateUi(), and Ui_KbAnimWidget::setupUi().

12.23.3.26 QWidget* Ui_KbAnimWidget::noSelPage [inherited]

Definition at line 37 of file ui_kbanimwidget.h.

Referenced by Ui_KbAnimWidget::setupUi().

12.23.3.27 QDoubleSpinBox* Ui_KbAnimWidget::opacityBox [inherited]

Definition at line 51 of file ui_kbanimwidget.h.

Referenced by Ui_KbAnimWidget::retranslateUi(), KbAnimWidget::setCurrent(), and Ui_KbAnimWidget::setupUi().

12.23.3.28 QPushButton* Ui_KbAnimWidget::propertyButton [inherited]

Definition at line 61 of file ui_kbanimwidget.h.

Referenced by Ui_KbAnimWidget::retranslateUi(), and Ui_KbAnimWidget::setupUi().

12.23.3.29 QStackedWidget* Ui_KbAnimWidget::selectionStack [inherited]

Definition at line 36 of file ui_kbanimwidget.h.

Referenced by KbAnimWidget::setCurrent(), and Ui_KbAnimWidget::setupUi().

12.23.3.30 QVBoxLayout* Ui_KbAnimWidget::verticalLayout [inherited]

Definition at line 42 of file ui_kbanimwidget.h.

Referenced by Ui_KbAnimWidget::setupUi().

12.23.3.31 QSpacerItem* Ui_KbAnimWidget::verticalSpacer [inherited]

Definition at line 40 of file ui_kbanimwidget.h.

Referenced by Ui_KbAnimWidget::setupUi().

12.23.3.32 QSpacerItem* Ui_KbAnimWidget::verticalSpacer_2 [inherited]

Definition at line 63 of file ui_kbanimwidget.h.

Referenced by Ui_KbAnimWidget::setupUi().

12.23.3.33 QSpacerItem* Ui_KbAnimWidget::verticalSpacer_3 [inherited]

Definition at line 48 of file ui_kbanimwidget.h.

Referenced by Ui_KbAnimWidget::setupUi().

The documentation for this class was generated from the following file:

- src/ckb/ui_kbanimwidget.h

12.24 KbAnimWidget Class Reference

`#include <src/ckb/kbanimwidget.h>`

Inheritance diagram for KbAnimWidget:

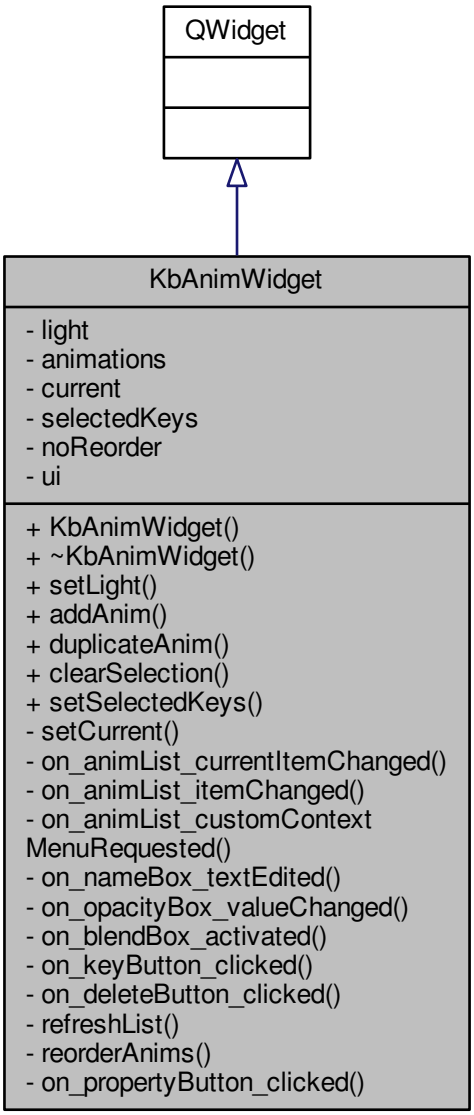

Collaboration diagram for KbAnimWidget:

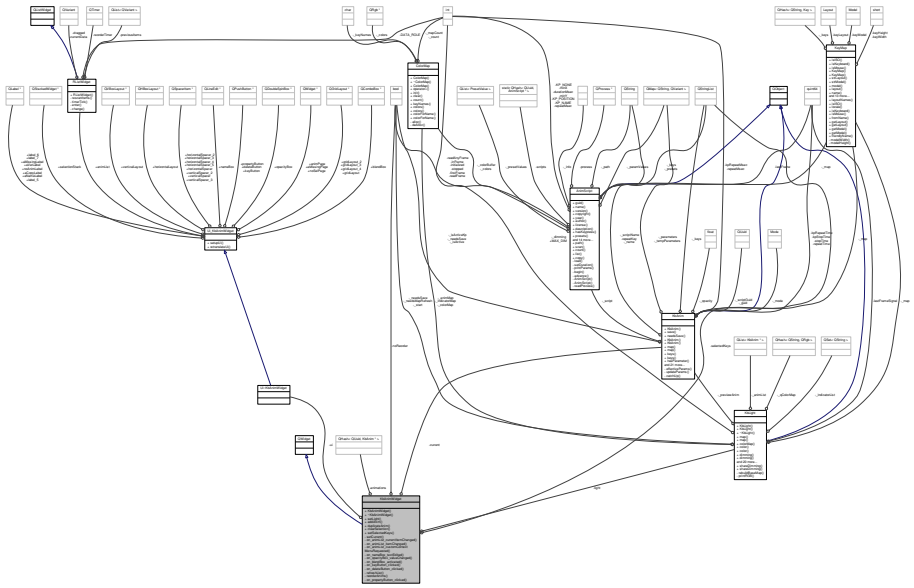

Signals

- void animChanged (KbAnim ∗selection)
- void didUpdateSelection (QStringList keys)

Public Member Functions

- KbAnimWidget (QWidget ∗parent=0)
- ∼KbAnimWidget ()
- void setLight (KbLight ∗newLight)
- void addAnim (const AnimScript ∗base, const QStringList &keyList, const QString &name, const QMap< QString, QVariant > &preset)
- void duplicateAnim (KbAnim ∗old)
- void clearSelection ()
- void setSelectedKeys (const QStringList &keys)

Private Slots

- void on_animList_currentItemChanged (QListWidgetItem ∗current, QListWidgetItem ∗previous)
- void on_animList_itemChanged (QListWidgetItem ∗item)
- void on_animList_customContextMenuRequested (const QPoint &pos)
- void on_nameBox_textEdited (const QString &arg1)
- void on_opacityBox_valueChanged (double arg1)
- void on_blendBox_activated (int index)
- void on_keyButton_clicked ()
- void on_deleteButton_clicked ()
- void refreshList ()
- void reorderAnims ()
- void on_propertyButton_clicked ()

Private Member Functions

- void setCurrent (KbAnim *newCurrent)

Private Attributes

- KbLight * light
- QHash< QUuid, KbAnim * > animations
- KbAnim * current
- QStringList selectedKeys
- bool noReorder
- Ui::KbAnimWidget * ui

12.24.1 Detailed Description

Definition at line 15 of file kbanimwidget.h.

12.24.2 Constructor & Destructor Documentation

12.24.2.1 KbAnimWidget::KbAnimWidget (QWidget * *parent* = 0) [explicit]

Definition at line 7 of file kbanimwidget.cpp.

References Ui_KbAnimWidget::animList, reorderAnims(), setCurrent(), Ui_KbAnimWidget::setupUi(), and ui.

```
7                                                :
8     QWidget(parent), light(0), current(0), noReorder(false),
9     ui(new Ui::KbAnimWidget)
10 {
11     ui->setupUi(this);
12     ui->animList->setVisible(false);
13     setCurrent(0);
14     connect(ui->animList, SIGNAL(orderChanged()), this, SLOT(
      reorderAnims()));
15 }
```

Here is the call graph for this function:

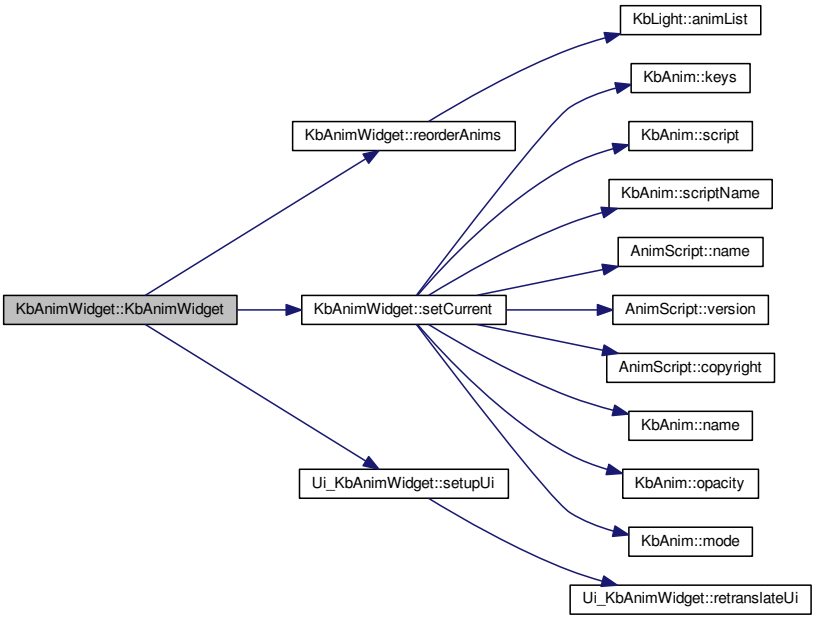

12.24.2.2 KbAnimWidget::~KbAnimWidget ( )

Definition at line 17 of file kbanimwidget.cpp.

References ui.

```
17                              {
18     delete ui;
19 }
```

12.24.3 Member Function Documentation

12.24.3.1 void KbAnimWidget::addAnim (const AnimScript * *base*, const QStringList & *keyList*, const QString & *name*, const QMap< QString, QVariant > & *preset*)

Definition at line 82 of file kbanimwidget.cpp.

References KbLight::addAnim(), animations, Ui_KbAnimWidget::animList, KbAnim::guid(), light, KbAnim::name(), Ui_KbAnimWidget::noAnimLabel, noReorder, on_propertyButton_clicked(), setCurrent(), and ui.

Referenced by KbLightWidget::on_animButton_clicked().

```
82
                                    {
83     if(!light)
84         return;
85     noReorder = true;
86     KbAnim* animation = light->addAnim(base, keyList, name, preset);
87     QListWidgetItem* item = new QListWidgetItem(animation->name(), ui->
       animList);
88     item->setData(Qt::UserRole, animation->guid());
89     item->setFlags(item->flags() | Qt::ItemIsEditable);
90     animations[animation->guid()] = animation;
91     ui->animList->addItem(item);
92     ui->animList->setCurrentItem(item);
```

```
93      ui->animList->setVisible(true);
94      ui->noAnimLabel->setVisible(false);
95
96      setCurrent(animation);
97      noReorder = false;
98
99      // Activate settings dialog
100      on_propertyButton_clicked();
101 }
```

Here is the call graph for this function:

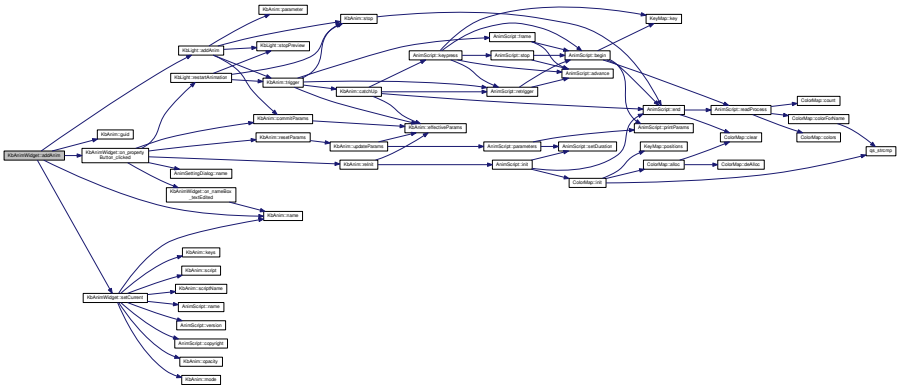

Here is the caller graph for this function:



12.24.3.2 void KbAnimWidget::animChanged (KbAnim * *selection*) [signal]

Definition at line 213 of file moc_kbanimwidget.cpp.

Referenced by setCurrent().

```
214 {
215     void *_a[] = { Q_NULLPTR, const_cast<void*>(reinterpret_cast<const void*>(&_t1)) };
216     QMetaObject::activate(this, &staticMetaObject, 0, _a);
217 }
```

Here is the caller graph for this function:

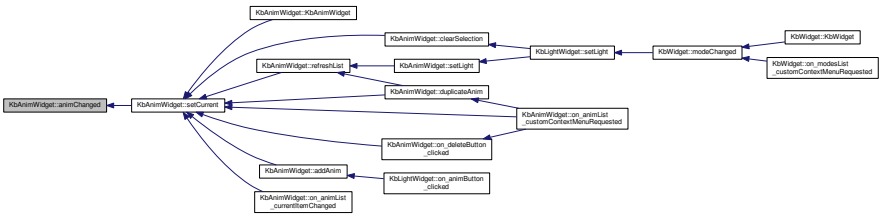

12.24.3.3 void KbAnimWidget::clearSelection ( )

Definition at line 77 of file kbanimwidget.cpp.

References Ui_KbAnimWidget::animList, setCurrent(), and ui.

Referenced by KbLightWidget::setLight().

```
77                                  {
78     ui->animList->setCurrentItem(0);
79     setCurrent(0);
80 }
```

Here is the call graph for this function:

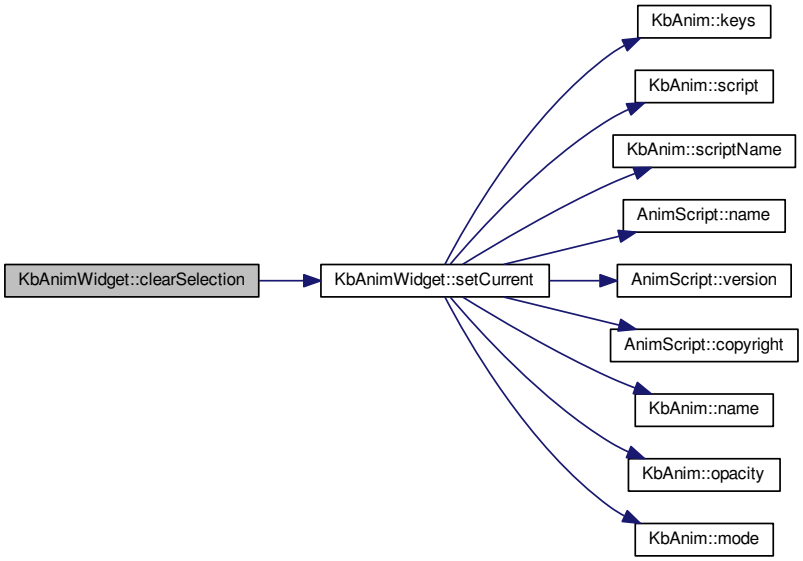

Here is the caller graph for this function:



12.24.3.4 void KbAnimWidget::didUpdateSelection (QStringList *keys*) [signal]

Definition at line 220 of file moc_kbanimwidget.cpp.

Referenced by on_keyButton_clicked().

```
221 {
222     void *_a[] = { Q_NULLPTR, const_cast<void*>(reinterpret_cast<const void*>(&_t1)) };
223     QMetaObject::activate(this, &staticMetaObject, 1, _a);
224 }
```

Here is the caller graph for this function:



12.24.3.5 void KbAnimWidget::duplicateAnim (KbAnim * *old*)

Definition at line 103 of file kbanimwidget.cpp.

References KbLight::animList(), Ui_KbAnimWidget::animList, KbLight::duplicateAnim(), light, Ui_KbAnimWidget::noAnimLabel, noReorder, refreshList(), setCurrent(), and ui.

Referenced by on_animList_customContextMenuRequested().

```
103                                          {
104     if(!light)
105         return;
106     noReorder = true;
107     KbAnim* animation = light->duplicateAnim(old);
108     // Refresh the list. insertItem doesn't seem to place the item in the correct position on its own...
109     refreshList();
110     ui->animList->setCurrentRow(light->animList().indexOf(animation));
111     ui->animList->setVisible(true);
112     ui->noAnimLabel->setVisible(false);
113 
114     setCurrent(animation);
115     noReorder = false;
116 }
```

Here is the call graph for this function:

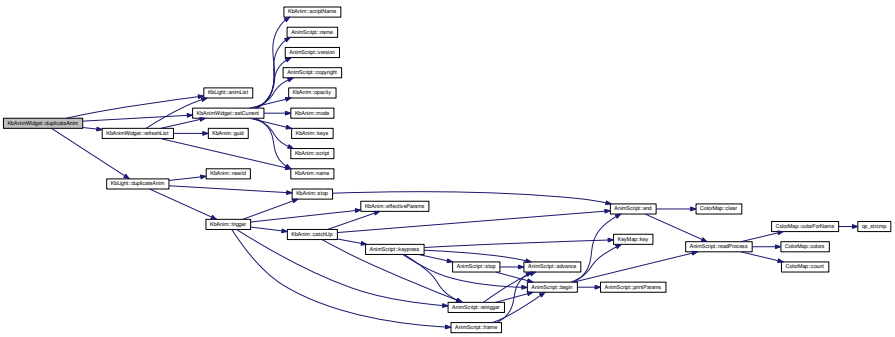

Here is the caller graph for this function:



12.24.3.6 void KbAnimWidget::on_animList_currentItemChanged (QListWidgetItem * *current*, QListWidgetItem * *previous*) [private], [slot]

Definition at line 151 of file kbanimwidget.cpp.

References animations, and setCurrent().

```
151                                                                                                                 {
152     if(!current)
153         setCurrent(0);
154     else
155         setCurrent(animations[current->data(Qt::UserRole).toUuid()]);
156 }
```

Here is the call graph for this function:

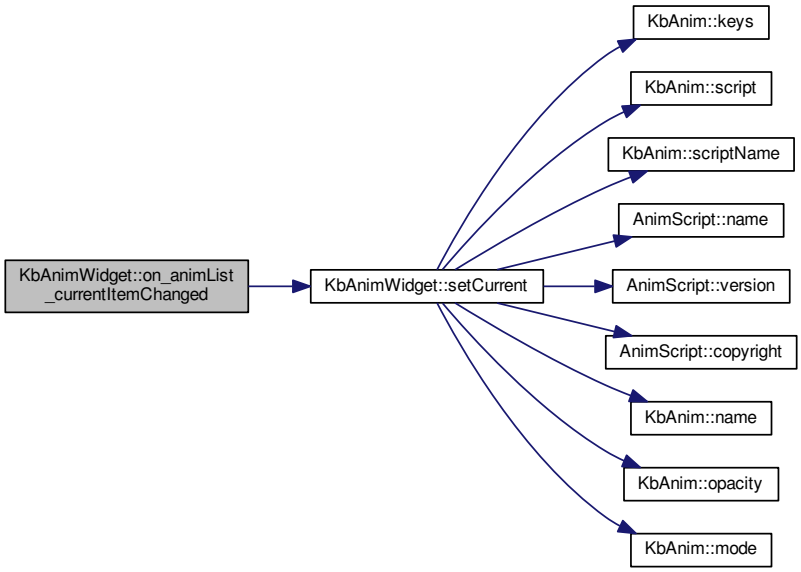

12.24.3.7 void KbAnimWidget::on_animList_customContextMenuRequested (const QPoint & *pos*) [private], [slot]

Definition at line 169 of file kbanimwidget.cpp.

References animations, Ui_KbAnimWidget::animList, current, duplicateAnim(), on_deleteButton_clicked(), setCurrent(), and ui.

```
169                                                                                 {
170     QListWidgetItem* item = ui->animList->itemAt(pos);
171     if(!item)
172         return;
173     setCurrent(animations[item->data(Qt::UserRole).toUuid()]);
174
175     QMenu menu(this);
176     QAction* rename = new QAction("Rename...", this);
177     QAction* duplicate = new QAction("Duplicate", this);
178     QAction* del = new QAction("Delete", this);
179     menu.addAction(rename);
180     menu.addAction(duplicate);
181     menu.addAction(del);
182     QAction* result = menu.exec(QCursor::pos());
183     if(result == rename)
184         ui->animList->editItem(item);
```

```
185     else if(result == duplicate)
186         duplicateAnim(current);
187     else if(result == del)
188         on_deleteButton_clicked();
189 }
```

Here is the call graph for this function:

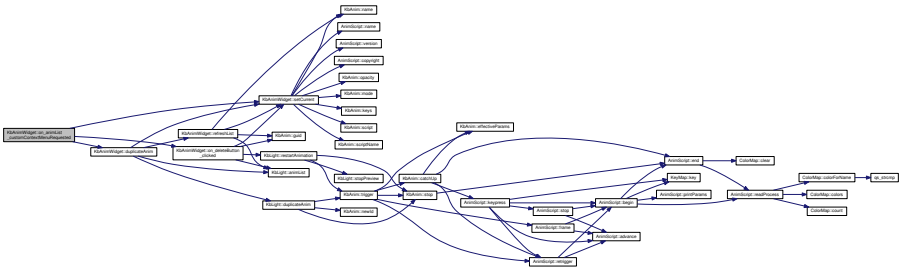

12.24.3.8 void KbAnimWidget::on_animList_itemChanged (QListWidgetItem * *item*) [private],[slot]

Definition at line 158 of file kbanimwidget.cpp.

References animations, current, KbAnim::name(), Ui_KbAnimWidget::nameBox, noReorder, and ui.

```
158                                                                 {
159     if(item){
160         KbAnim* anim = animations[item->data(Qt::UserRole).toUuid()];
161         if(anim){
162             anim->name(item->text().trimmed());
163             if(anim == current && !noReorder)
164                 ui->nameBox->setText(anim->name());
165         }
166     }
167 }
```

Here is the call graph for this function:

12.24.3.9 void KbAnimWidget::on_blendBox_activated (int *index*) [private],[slot]

Definition at line 205 of file kbanimwidget.cpp.

References current, and KbAnim::mode().

```
205                                                 {
206     if(current)
207         current->mode((KbAnim::Mode)index);
208 }
```

Here is the call graph for this function:



12.24.3.10 void KbAnimWidget::on_deleteButton_clicked ( ) [private], [slot]

Definition at line 226 of file kbanimwidget.cpp.

References animations, KbLight::animList(), Ui_KbAnimWidget::animList, current, KbAnim::guid(), light, Ui_KbAnimWidget::noAnimLabel, KbLight::restartAnimation(), setCurrent(), and ui.

Referenced by on_animList_customContextMenuRequested().

```
226                                          {
227     if(current){
228         animations.remove(current->guid());
229         QList<KbAnim*> animList = light->animList();
230         animList.removeAll(current);
231         light->animList(animList);
232         current->deleteLater();
233         setCurrent(0);
234         delete ui->animList->currentItem();
235         if(animations.count() == 0){
236             ui->animList->setVisible(false);
237             ui->noAnimLabel->setVisible(true);
238         }
239     }
240     light->restartAnimation();
241 }
```

Here is the call graph for this function:

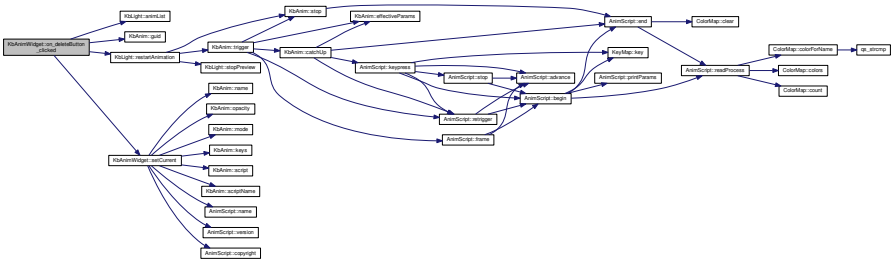

Here is the caller graph for this function:



12.24.3.11 void KbAnimWidget::on_keyButton_clicked ( ) [private], [slot]

Definition at line 210 of file kbanimwidget.cpp.

References KeyMap::contains(), current, didUpdateSelection(), KbAnim::keys(), light, KbLight::map(), KbLight::restartAnimation(), and selectedKeys.

```
210                                         {
211     if(current){
212         QStringList keys = selectedKeys;
213         // If any keys were selected previously that aren't in the keymap now, leave them in
214         // This is important for layout compatibility - e.g. being able to select both bslash_iso and
        bslash, because no single layout contains both
215         const KeyMap& map = light->map();
216         foreach(const QString& key, current->keys()){
217             if(!map.contains(key))
218                 keys << key;
219         }
220         current->keys(keys);
221         emit didUpdateSelection(selectedKeys);
222     }
223     light->restartAnimation();
224 }
```

Here is the call graph for this function:

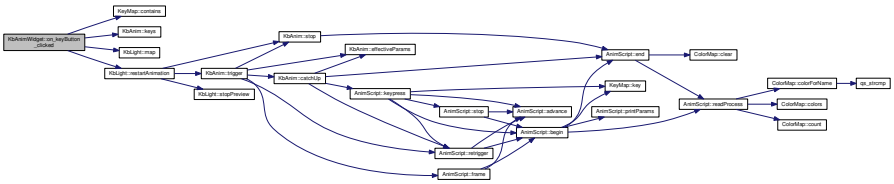

12.24.3.12 void KbAnimWidget::on_nameBox_textEdited (const QString & *arg1*) [private], [slot]

Definition at line 191 of file kbanimwidget.cpp.

References Ui_KbAnimWidget::animList, current, KbAnim::name(), noReorder, and ui.

Referenced by on_propertyButton_clicked().

```
191                                                         {
192     if(current){
193         noReorder = true;
194         current->name(arg1.trimmed());
195         ui->animList->currentItem()->setText(current->name());
196         noReorder = false;
197     }
198 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

12.24.3.13 void KbAnimWidget::on_opacityBox_valueChanged (double *arg1*) [private], [slot]

Definition at line 200 of file kbanimwidget.cpp.

References current, and KbAnim::opacity().

```
200                                                     {
201     if(current)
202         current->opacity(arg1 / 100.);
203 }
```

Here is the call graph for this function:



12.24.3.14 void KbAnimWidget::on_propertyButton_clicked ( ) [private], [slot]

Definition at line 243 of file kbanimwidget.cpp.

References KbAnim::commitParams(), current, light, AnimSettingDialog::name(), Ui_KbAnimWidget::nameBox, on_nameBox_textEdited(), KbAnim::reInit(), KbAnim::resetParams(), KbLight::restartAnimation(), and ui.

Referenced by addAnim().

```
243                                         {
244     if(!current)
245         return;
246     // Present animation property popup
247     AnimSettingDialog dialog(this, current);
248     dialog.exec();
249     if(dialog.result() != QDialog::Accepted){
250         current->resetParams();
251         return;
252     }
253     // Apply settings and restart all animations
254     current->commitParams();
255     current->reInit();
256     light->restartAnimation();
257     // Update name
258     ui->nameBox->setText(dialog.name());
259     on_nameBox_textEdited(dialog.name());
260 }
```

Here is the call graph for this function:

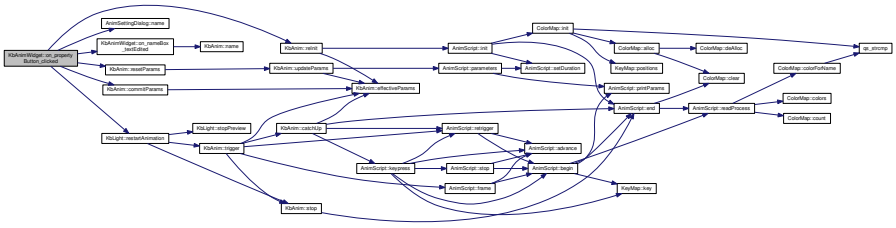

Here is the caller graph for this function:

12.24.3.15 void KbAnimWidget::refreshList ( ) [private], [slot]

Definition at line 32 of file kbanimwidget.cpp.

References animations, KbLight::animList(), Ui_KbAnimWidget::animList, KbAnim::guid(), light, KbAnim::name(), Ui_KbAnimWidget::noAnimLabel, noReorder, setCurrent(), and ui.

Referenced by duplicateAnim(), and setLight().

```
32                                {
33     noReorder = true;
34     setCurrent(0);
35     ui->animList->clear();
36     animations.clear();
37     // Add the animations from the new lighting mode
38     if(!light){
39         ui->animList->setVisible(false);
40         ui->noAnimLabel->setVisible(true);
41         return;
42     }
43     QList<KbAnim*> newAnimations = light->animList();
44     if(newAnimations.count() == 0){
45         ui->animList->setVisible(false);
46         ui->noAnimLabel->setVisible(true);
47         return;
48     }
49     ui->animList->setVisible(true);
50     foreach(KbAnim* anim, newAnimations){
51         QListWidgetItem* item = new QListWidgetItem(anim->name(), ui->
       animList);
52         item->setData(Qt::UserRole, anim->guid());
53         item->setFlags(item->flags() | Qt::ItemIsEditable);
54         animations[anim->guid()] = anim;
55         ui->animList->addItem(item);
56     }
57     ui->noAnimLabel->setVisible(false);
58     noReorder = false;
59 }
```

Here is the call graph for this function:

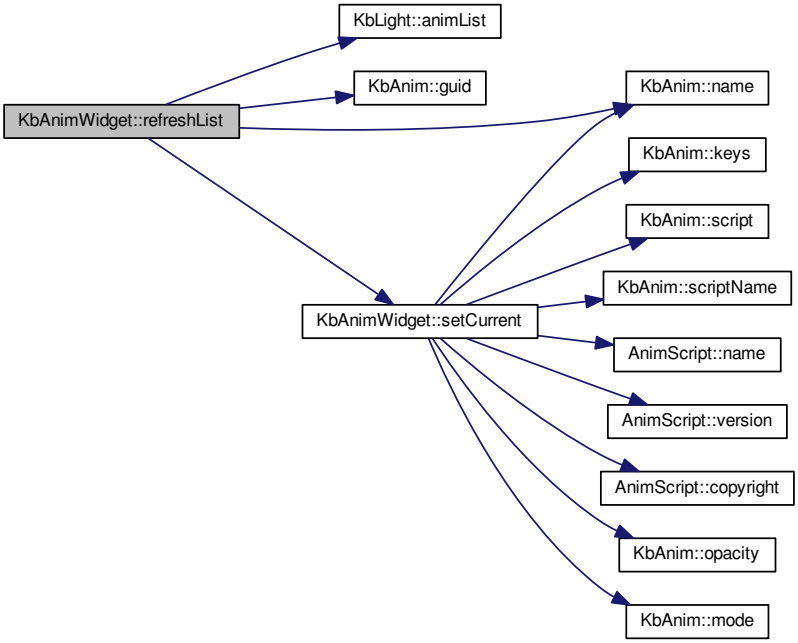

Here is the caller graph for this function:



12.24.3.16 void KbAnimWidget::reorderAnims ( ) [private], [slot]

Definition at line 61 of file kbanimwidget.cpp.

References animations, KbLight::animList(), Ui_KbAnimWidget::animList, light, noReorder, and ui.

Referenced by KbAnimWidget().

```
61                                {
62     if(light && !noReorder){
63         // Clear and rebuild the list of animations in case the animation moved
64         int count = ui->animList->count();
65         QList<KbAnim*> animList;
66         for(int i = 0; i < count; i++){
67             QListWidgetItem* item = ui->animList->item(i);
68             KbAnim* anim = animations[item->data(Qt::UserRole).toUuid()];
69             if(anim && !animList.contains(anim))
70                 animList.append(anim);
71             item->setFlags(item->flags() | Qt::ItemIsEditable);
72         }
73         light->animList(animList);
74     }
75 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

12.24.3.17 void KbAnimWidget::setCurrent (KbAnim * *newCurrent*) [private]

Definition at line 118 of file kbanimwidget.cpp.

References Ui_KbAnimWidget::aCopyLabel, Ui_KbAnimWidget::aMissingLabel, Ui_KbAnimWidget::aNameLabel, animChanged(), Ui_KbAnimWidget::aVerLabel, Ui_KbAnimWidget::blendBox, AnimScript::copyright(), current, KbAnim::keys(), KbAnim::mode(), AnimScript::name(), KbAnim::name(), Ui_KbAnimWidget::nameBox, KbAnim::opacity(), Ui_KbAnimWidget::opacityBox, KbAnim::script(), KbAnim::scriptName(), selectedKeys, Ui_KbAnimWidget::selectionStack, ui, and AnimScript::version().

Referenced by addAnim(), clearSelection(), duplicateAnim(), KbAnimWidget(), on_animList_currentItemChanged(), on_animList_customContextMenuRequested(), on_deleteButton_clicked(), and refreshList().

```
118                                                 {
119     if(newCurrent != current)
120         emit animChanged(current = newCurrent);
121     if(!current){
122         selectedKeys.clear();
123         ui->selectionStack->setCurrentIndex(0);
124         return;
125     }
126     selectedKeys = current->keys();
127     const AnimScript* script = current->script();
128     if(!script){
129         ui->selectionStack->setCurrentIndex(2);
130         ui->aMissingLabel->setText("The \"" + current->
      scriptName() + "\" script could not be loaded. Please check your animation directory.");
131         return;
132     }
133     ui->selectionStack->setCurrentIndex(1);
134     ui->aNameLabel->setText(script->name());
135     ui->aVerLabel->setText("v" + script->version());
136     ui->aCopyLabel->setText(script->copyright());
137
138     ui->nameBox->setText(current->name());
139     ui->opacityBox->setValue(current->opacity() * 100.);
140     ui->blendBox->setCurrentIndex((int)current->mode());
141 }
```

Here is the call graph for this function:

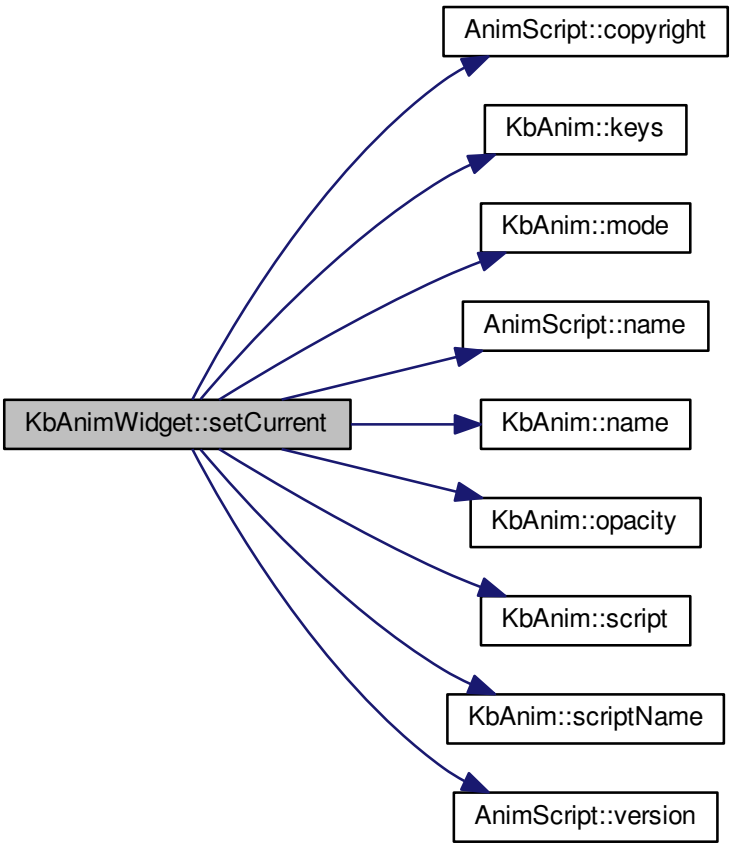

Here is the caller graph for this function:

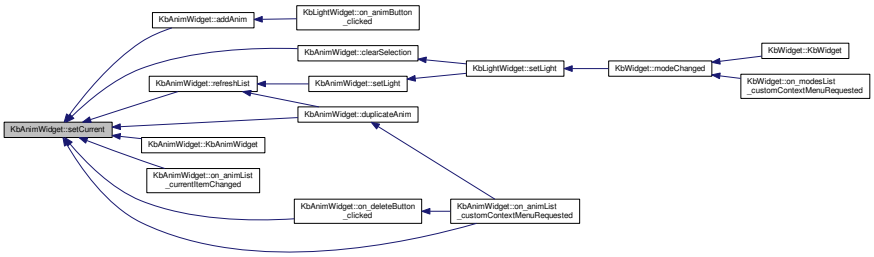

12.24.3.18 void KbAnimWidget::setLight (KbLight * *newLight*)

Definition at line 21 of file kbanimwidget.cpp.

References light, and refreshList().

Referenced by KbLightWidget::setLight().

```
21                                          {
22     if(light != newLight){
23         if(light)
24             disconnect(light, SIGNAL(didLoad()), this, SLOT(refreshList()));
25         if(newLight)
26             connect(newLight, SIGNAL(didLoad()), this, SLOT(refreshList()));
27         light = newLight;
28     }
29     refreshList();
30 }
```

Here is the call graph for this function:

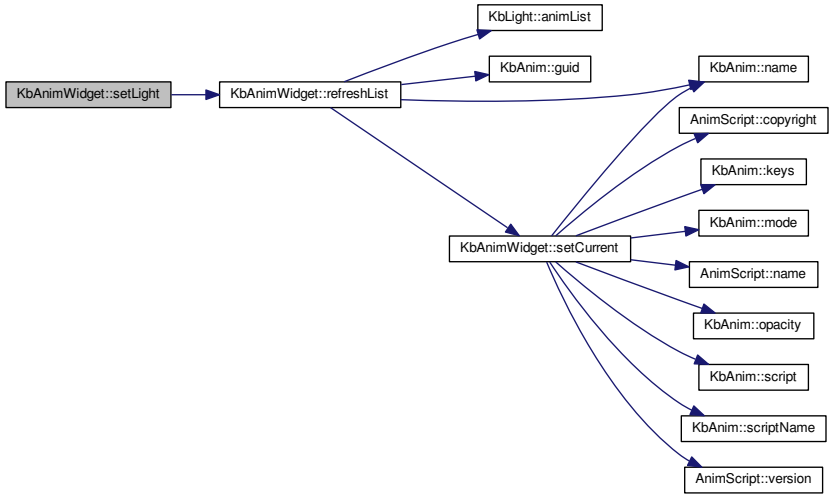

Here is the caller graph for this function:

12.24.3.19 void KbAnimWidget::setSelectedKeys (const QStringList & *keys*)

Definition at line 143 of file kbanimwidget.cpp.

References Ui_KbAnimWidget::keyButton, selectedKeys, and ui.

Referenced by KbLightWidget::newSelection().

```
143                                                     {
144     selectedKeys = keys;
145     if(keys.count() == 0)
146         ui->keyButton->setVisible(false);
147     else
148         ui->keyButton->setVisible(true);
149 }
```

Here is the caller graph for this function:

12.24.4 Field Documentation

12.24.4.1 QHash<QUuid, KbAnim*> KbAnimWidget::animations [private]

Definition at line 53 of file kbanimwidget.h.

Referenced by addAnim(), on_animList_currentItemChanged(), on_animList_customContextMenuRequested(), on_animList_itemChanged(), on_deleteButton_clicked(), refreshList(), and reorderAnims().

12.24.4.2 KbAnim* KbAnimWidget::current [private]

Definition at line 55 of file kbanimwidget.h.

Referenced by on_animList_customContextMenuRequested(), on_animList_itemChanged(), on_blendBox_activated(), on_deleteButton_clicked(), on_keyButton_clicked(), on_nameBox_textEdited(), on_opacityBox_valueChanged(), on_propertyButton_clicked(), and setCurrent().

12.24.4.3 KbLight* KbAnimWidget::light [private]

Definition at line 52 of file kbanimwidget.h.

Referenced by addAnim(), duplicateAnim(), on_deleteButton_clicked(), on_keyButton_clicked(), on_propertyButton_clicked(), refreshList(), reorderAnims(), and setLight().

12.24.4.4 bool KbAnimWidget::noReorder [private]

Definition at line 58 of file kbanimwidget.h.

Referenced by addAnim(), duplicateAnim(), on_animList_itemChanged(), on_nameBox_textEdited(), refreshList(), and reorderAnims().

12.24.4.5 QStringList KbAnimWidget::selectedKeys [private]

Definition at line 57 of file kbanimwidget.h.

Referenced by on_keyButton_clicked(), setCurrent(), and setSelectedKeys().

12.24.4.6 Ui::KbAnimWidget* KbAnimWidget::ui [private]

Definition at line 60 of file kbanimwidget.h.

Referenced by addAnim(), clearSelection(), duplicateAnim(), KbAnimWidget(), on_animList_customContextMenuRequested(), on_animList_itemChanged(), on_deleteButton_clicked(), on_nameBox_textEdited(), on_propertyButton_clicked(), refreshList(), reorderAnims(), setCurrent(), setSelectedKeys(), and ~KbAnimWidget().

The documentation for this class was generated from the following files:

- src/ckb/kbanimwidget.h

- src/ckb/kbanimwidget.cpp
- src/ckb/release/moc_kbanimwidget.cpp

12.25 KbBind Class Reference

`#include <src/ckb/kbbind.h>`

Inheritance diagram for KbBind:

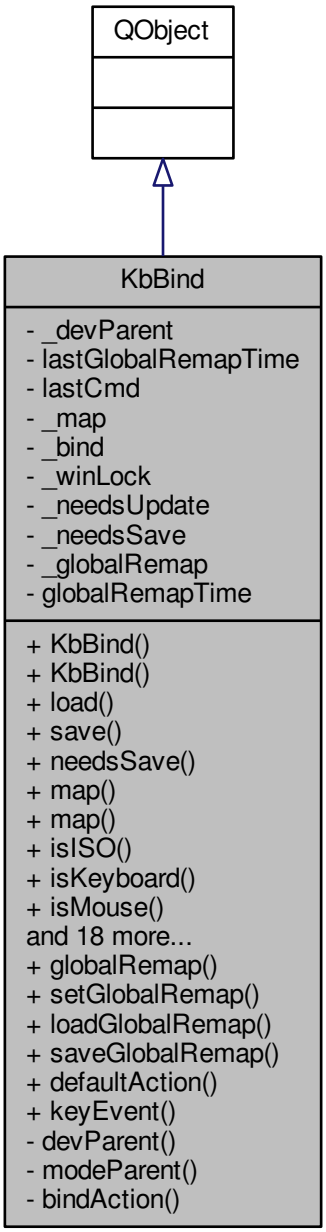

Collaboration diagram for KbBind:

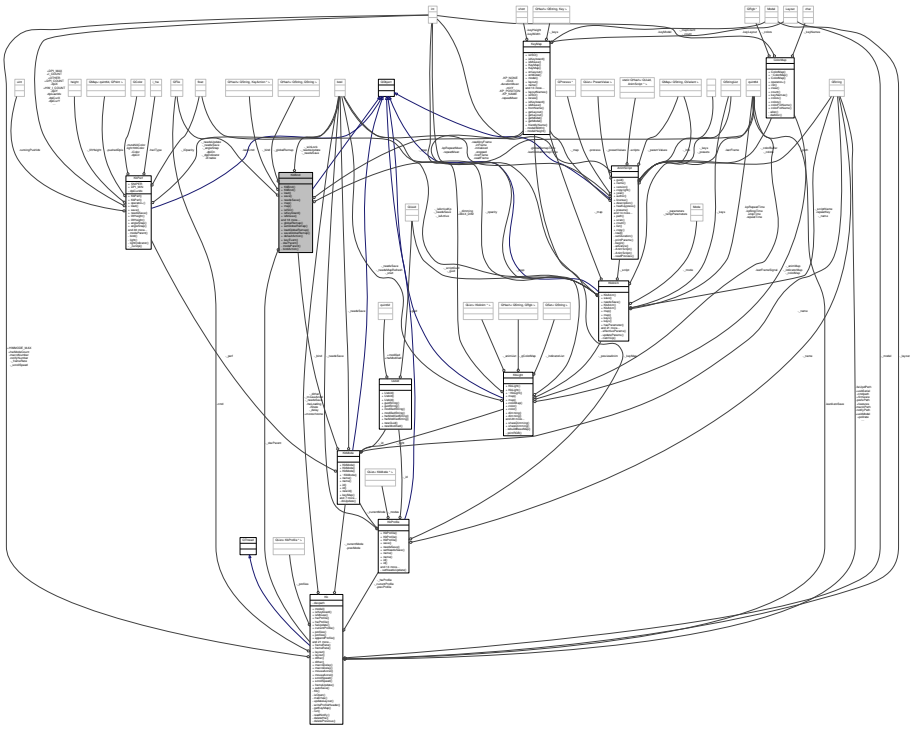

Public Slots

- void keyEvent (const QString &key, bool down)

Signals

- void didLoad ()
- void layoutChanged ()
- void updated ()

Public Member Functions

- KbBind (KbMode *modeParent, Kb *devParent, const KeyMap &keyMap)
- KbBind (KbMode *modeParent, Kb *devParent, const KeyMap &keyMap, const KbBind &other)

  KbBind.
- void load (CkbSettings &settings)
- void save (CkbSettings &settings)
- bool needsSave () const
- const KeyMap & map ()
- void map (const KeyMap &map)
- bool isISO () const
- bool isKeyboard () const
- bool isMouse () const
- KbPerf * perf ()
- KbLight * light ()
- QString action (const QString &key)
- QString friendlyName (const QString &key)

- QString friendlyActionName (const QString &key)
- void setAction (const QString &key, const QString &action)
- void setAction (const QStringList &keys, const QString &action)
- void resetAction (const QString &key)
- void resetAction (const QStringList &keys)
- void noAction (const QString &key)
- void noAction (const QStringList &keys)
- bool winLock ()
- void winLock (bool newWinLock)
- void update (QFile &cmd, bool force=false)
- void setNeedsUpdate ()
- int getMacroNumber ()

  KbBind::getMacroNumber.
- QString getMacroPath ()

  KbBind::getMacroPath.
- void handleNotificationChannel (bool start)

  handleNotificationChannel sends commands to ckb-daemon for (de-) activating the notify channel. Send a notify cmd to the keyboard to set or clear notification for reading macro definition. The file handle for the cmd pipe is stored in lastCmd.

Static Public Member Functions

- static QString globalRemap (const QString &key)
- static void setGlobalRemap (const QHash< QString, QString > keyToActual)
- static void loadGlobalRemap ()
- static void saveGlobalRemap ()
- static QString defaultAction (const QString &key)

Private Member Functions

- Kb * devParent () const
- KbMode * modeParent () const
- KeyAction * bindAction (const QString &key)

Private Attributes

- Kb * _devParent
- quint64 lastGlobalRemapTime
- QFile * lastCmd

  lastCmd is a cache-hack. Because the QFile ist opened in Kb, and we need it in the macro processing functions, we cache the value her in lastCmd.
- KeyMap _map
- QHash< QString, KeyAction * > _bind
- bool _winLock
- bool _needsUpdate
- bool _needsSave

Static Private Attributes

- static QHash< QString, QString > _globalRemap
- static quint64 globalRemapTime = 0

Friends

- class KeyAction

12.25.1 Detailed Description

Definition at line 20 of file kbbind.h.

12.25.2 Constructor & Destructor Documentation

12.25.2.1 KbBind::KbBind (KbMode * *modeParent*, Kb * *devParent*, const KeyMap & *keyMap*) [explicit]

Definition at line 12 of file kbbind.cpp.

```
12                                                                          :
13     QObject(modeParent), _devParent(parentBoard),
       lastGlobalRemapTime(globalRemapTime), _map(keyMap),
14     _winLock(false), _needsUpdate(true), _needsSave(true) {
15 }
```

12.25.2.2 KbBind::KbBind (KbMode * *modeParent*, Kb * *parentBoard*, const KeyMap & *keyMap*, const KbBind & *other*)

KbBind::KbBind // copy all existing Key bindings.

Parameters

modeParent	
devParent	
keyMap	
other	This is the KbBind object to copy from Use this constructor to copy an existing Binding
modeParent	
parentBoard	
keyMap	
other	

Create a new Hash table and copy all entries

clear the destination list (there are the original KeyActions as references, so do not delete them)

and move the KeyActions we just created

Definition at line 24 of file kbbind.cpp.

References _bind, KeyAction, map(), and KeyAction::value().

```
24                                                                                  :
25     QObject(modeParent), _devParent(parentBoard),
       lastGlobalRemapTime(globalRemapTime), _bind(other.
       _bind),
26     _winLock(false), _needsUpdate(true), _needsSave(true) {
27     map(keyMap);
28
30     QHash<QString, KeyAction*> newBind;
31     foreach(QString key, _bind.keys()) {
32         KeyAction* act = _bind.value(key);
33         if(act) {
34             newBind[key] = new KeyAction(act->value(), this);
35         }
36     }
37
39     _bind.clear();
40     foreach(QString key, newBind.keys()) {
41         KeyAction* act = newBind.value(key);
42         if(act) {
44             _bind[key] = new KeyAction(act->value(), this);
45         }
46     }
```

```
47      newBind.clear();        // here we *must not* delete the KeyActions, because they are referenced by _bind
        now
48 }
```

Here is the call graph for this function:

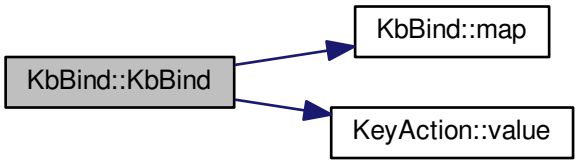

12.25.3 Member Function Documentation

12.25.3.1 QString KbBind::action (const QString & *key*)

Definition at line 140 of file kbbind.cpp.

References bindAction(), globalRemap(), and KeyAction::value().

Referenced by friendlyActionName(), KbBindWidget::on_copyButton_clicked(), resetAction(), RebindWidget::setSelection(), and KbBindWidget::updateBind().

```
140                                             {
141     QString rKey = globalRemap(key);
142     return bindAction(rKey)->value();
143 }
```

Here is the call graph for this function:

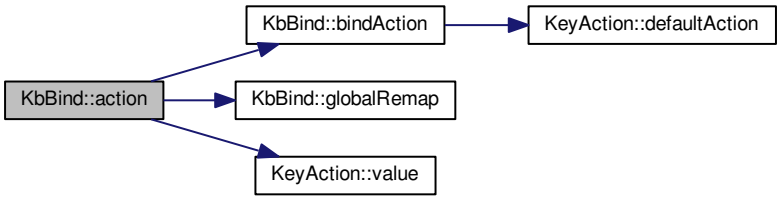

Here is the caller graph for this function:

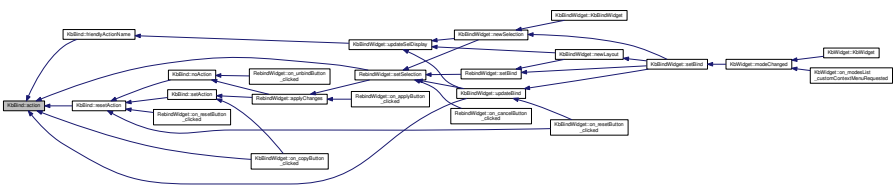

12.25.3.2 KeyAction* KbBind::bindAction (const QString & *key*) [inline], [private]

Definition at line 117 of file kbbind.h.

References _bind, KeyAction::defaultAction(), and KeyAction.

Referenced by action(), keyEvent(), and update().

```
117 { if(!_bind.contains(key)) return _bind[key] = new KeyAction(
      KeyAction::defaultAction(key), this); return _bind[key]; }
```

Here is the call graph for this function:



Here is the caller graph for this function:

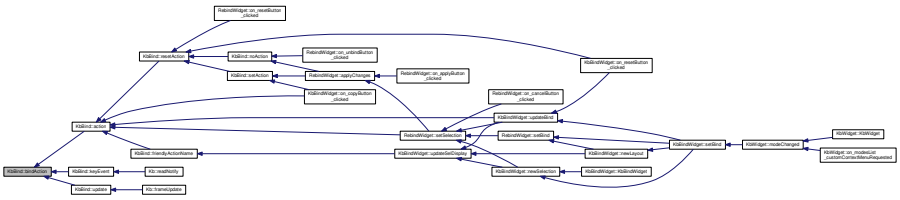

12.25.3.3 QString KbBind::defaultAction (const QString & *key*) [static]

Definition at line 145 of file kbbind.cpp.

References KeyAction::defaultAction(), and globalRemap().

Referenced by KeyWidget::paintEvent(), and RebindWidget::setBind().

```
145                                                 {
146     QString rKey = globalRemap(key);
147     return KeyAction::defaultAction(rKey);
148 }
```

Here is the call graph for this function:

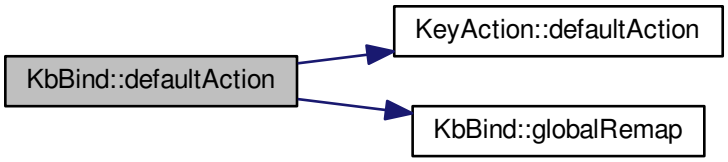

Here is the caller graph for this function:



12.25.3.4 Kb* KbBind::devParent ( ) const [inline], [private]

Definition at line 114 of file kbbind.h.

References _devParent.

Referenced by getMacroNumber(), getMacroPath(), and KeyAction::keyEvent().

```
114 { return _devParent; }
```

Here is the caller graph for this function:

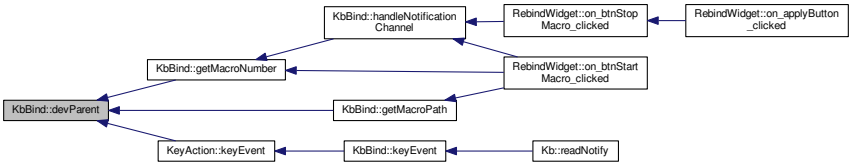

12.25.3.5 void KbBind::didLoad ( ) [signal]

Definition at line 155 of file moc_kbbind.cpp.

Referenced by load().

```
156 {
157     QMetaObject::activate(this, &staticMetaObject, 0, Q_NULLPTR);
158 }
```

Here is the caller graph for this function:



12.25.3.6 QString KbBind::friendlyActionName (const QString & *key*)

Definition at line 157 of file kbbind.cpp.

References _map, action(), and KeyAction.

Referenced by KbBindWidget::updateSelDisplay().

```
157                                                     {
158     QString act = action(key);
159     return KeyAction(act).friendlyName(_map);
160 }
```

Here is the call graph for this function:



Here is the caller graph for this function:



12.25.3.7 QString KbBind::friendlyName (const QString & *key*)

Definition at line 150 of file kbbind.cpp.

References _map, Key::friendlyName(), and globalRemap().

```
150                                                     {
151     const Key& pos = _map[globalRemap(key)];
152     if(!pos)
153         return "(Unknown)";
154     return pos.friendlyName();
155 }
```

Here is the call graph for this function:

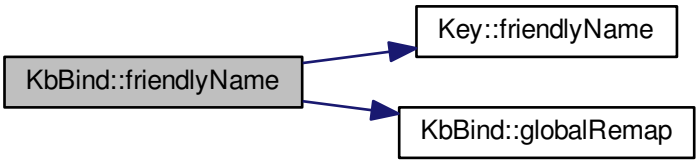

12.25.3.8 int KbBind::getMacroNumber ( )

Returns

number of notification channel. Use it in combination with notifyon/off-Statement

Definition at line 257 of file kbbind.cpp.

References devParent(), and Kb::getMacroNumber().

Referenced by handleNotificationChannel(), and RebindWidget::on_btnStartMacro_clicked().

```
257                             {
258     return devParent()->getMacroNumber();
259 }
```

Here is the call graph for this function:

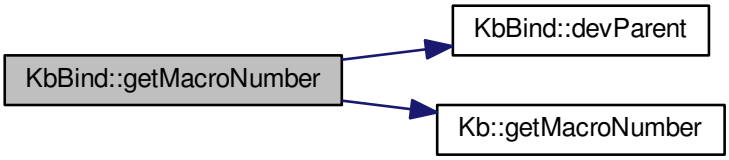

Here is the caller graph for this function:



12.25.3.9 QString KbBind::getMacroPath ( )

Returns

Filepath of macro notification pipe. If not set, returns initial value ""

Definition at line 265 of file kbbind.cpp.

References devParent(), and Kb::getMacroPath().

Referenced by RebindWidget::on_btnStartMacro_clicked().

```
265                                {
266     return devParent()->getMacroPath();
267 }
```

Here is the call graph for this function:

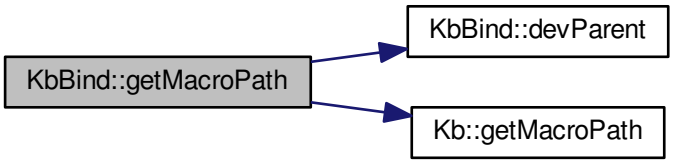

Here is the caller graph for this function:



12.25.3.10 QString KbBind::globalRemap (const QString & *key*) [static]

Definition at line 98 of file kbbind.cpp.

References _globalRemap.

Referenced by action(), defaultAction(), friendlyName(), keyEvent(), noAction(), KeyWidget::paintEvent(), resetAction(), setAction(), and SettingsWidget::SettingsWidget().

```
98                                                {
99     if(!_globalRemap.contains(key))
100         return key;
101     return _globalRemap.value(key);
102 }
```

Here is the caller graph for this function:

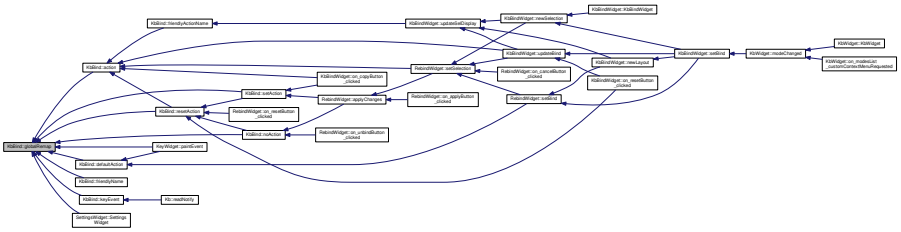

12.25.3.11 void KbBind::handleNotificationChannel (bool *start*)

Parameters

start	is boolean. If true, notification channel is opened for all keys, otherwise channel ist closed.
start	If true, notification channel is opened for all keys, otherwise channel ist closed.

Definition at line 275 of file kbbind.cpp.

References getMacroNumber(), and lastCmd.

Referenced by RebindWidget::on_btnStartMacro_clicked(), and RebindWidget::on_btnStopMacro_clicked().

```
275                                                 {
276     if (getMacroNumber() > 0 && lastCmd) {
277         if (start) {
278             lastCmd->write (QString("\nnotifyon %1\n@%1 notify all:on\n").arg(
      getMacroNumber()).toLatin1());
279         } else {
280             lastCmd->write (QString("\n@%1 notify all:off\nnotifyoff %1\n").arg(
      getMacroNumber()).toLatin1());
281         }
282         lastCmd->flush();
283     } else qDebug() << QString("No cmd or valid handle for notification found, macroNumber = %1, lastCmd =
       %2")
284                        .arg(getMacroNumber()).arg(lastCmd? "set" : "unset");
285 }
```

Here is the call graph for this function:

Here is the caller graph for this function:



12.25.3.12 bool KbBind::isISO ( ) const [inline]

Definition at line 43 of file kbbind.h.

References _map, and KeyMap::isISO().

```
43 { return _map.isISO(); }
```

Here is the call graph for this function:

12.25.3.13 bool KbBind::isKeyboard ( ) const [inline]

Definition at line 44 of file kbbind.h.

References _map, and KeyMap::isKeyboard().

```
44 { return _map.isKeyboard(); }
```

Here is the call graph for this function:



12.25.3.14 bool KbBind::isMouse ( ) const [inline]

Definition at line 45 of file kbbind.h.

References _map, and KeyMap::isMouse().

Referenced by KbBindWidget::on_copyButton_clicked(), KbBindWidget::on_resetButton_clicked(), RebindWidget::setBind(), and KbBindWidget::updateSelDisplay().

```
45 { return _map.isMouse(); }
```

Here is the call graph for this function:

Here is the caller graph for this function:

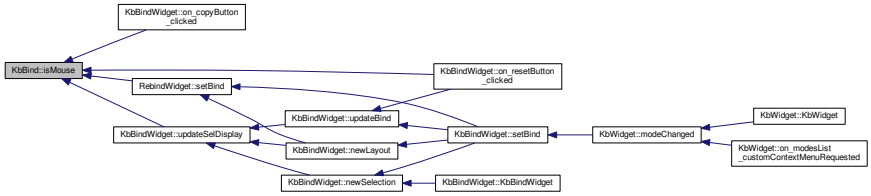

12.25.3.15 void KbBind::keyEvent (const QString & *key*, bool *down*) [slot]

Definition at line 287 of file kbbind.cpp.

References bindAction(), globalRemap(), and KeyAction::keyEvent().

Referenced by Kb::readNotify().

```
287                                                 {
288     QString rKey = globalRemap(key);
289     KeyAction* act = bindAction(rKey);
290     if(act)
291         act->keyEvent(this, down);
292 }
```

Here is the call graph for this function:

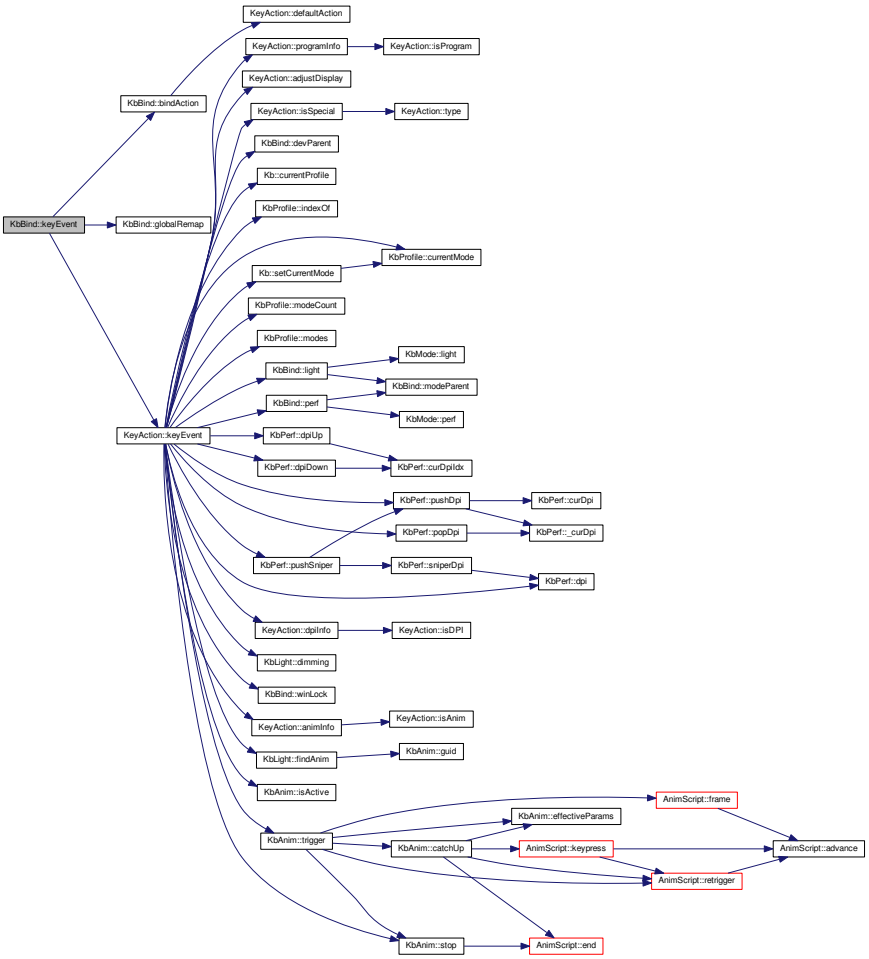

Here is the caller graph for this function:



12.25.3.16 void KbBind::layoutChanged ( ) [signal]

Definition at line 161 of file moc_kbbind.cpp.

Referenced by map().

```
162 {
163     QMetaObject::activate(this, &staticMetaObject, 1, Q_NULLPTR);
164 }
```

Here is the caller graph for this function:



12.25.3.17 KbLight * KbBind::light ( )

Definition at line 54 of file kbbind.cpp.

References KbMode::light(), and modeParent().

Referenced by RebindWidget::applyChanges(), KeyAction::keyEvent(), and RebindWidget::setSelection().

```
54                          {
55     return modeParent()->light();
56 }
```

Here is the call graph for this function:

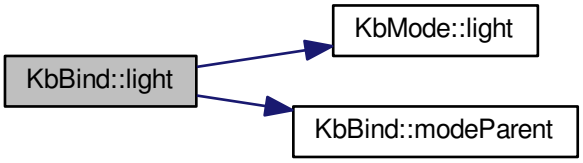

Here is the caller graph for this function:

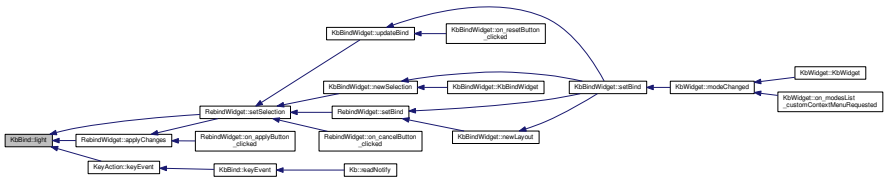

12.25.3.18 void KbBind::load (CkbSettings & *settings*)

Definition at line 58 of file kbbind.cpp.

References _bind, _map, _needsSave, _winLock, CkbSettings::childKeys(), didLoad(), KeyMap::fromName(), KeyMap::fromStorage(), KeyAction, map(), and CkbSettings::value().

Referenced by KbMode::KbMode().

```
58                                      {
59     _needsSave = false;
60     SGroup group(settings, "Binding");
61     KeyMap currentMap = _map;
62     _map = KeyMap::fromName(settings.value("KeyMap").toString());
63     // Load key settings
64     bool useReal = settings.value("UseRealNames").toBool();
65     _bind.clear();
66     {
67         SGroup group(settings, "Keys");
68         foreach(QString key, settings.childKeys()){
69             QString name = key.toLower();
70             if(!useReal)
71                 name = _map.fromStorage(name);
72             QString bind = settings.value(key).toString();
73             _bind[name] = new KeyAction(bind, this);
74         }
75     }
76     _winLock = settings.value("WinLock").toBool();
77     emit didLoad();
78     map(currentMap);
79 }
```

Here is the call graph for this function:

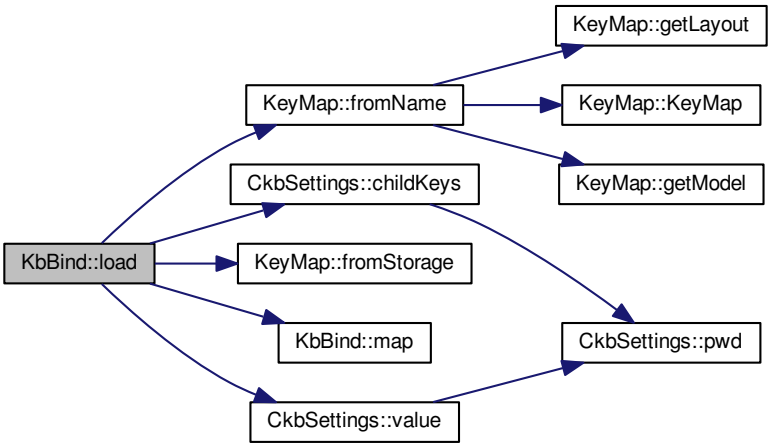

Here is the caller graph for this function:



12.25.3.19 void KbBind::loadGlobalRemap ( ) [static]

Definition at line 116 of file kbbind.cpp.

References _globalRemap, CkbSettings::childKeys(), globalRemapTime, and CkbSettings::value().

Referenced by SettingsWidget::SettingsWidget().

```
116                             {
117     _globalRemap.clear();
118     CkbSettings settings("Program/GlobalRemap");
119     foreach(const QString& key, settings.childKeys())
120         _globalRemap[key] = settings.value(key).toString();
121     globalRemapTime = QDateTime::currentMSecsSinceEpoch();
122 }
```

Here is the call graph for this function:



Here is the caller graph for this function:



12.25.3.20 const KeyMap& KbBind::map ( ) [inline]

Definition at line 41 of file kbbind.h.

References _map.

Referenced by KbBind(), KbMode::keyMap(), load(), map(), KbBindWidget::newLayout(), KbBindWidget::on_copyButton_clicked(), KbBindWidget::on_resetButton_clicked(), RebindWidget::setBind(), KbBindWidget::updateBind(), and KbBindWidget::updateSelDisplay().

```
41 { return _map; }
```

Here is the caller graph for this function:

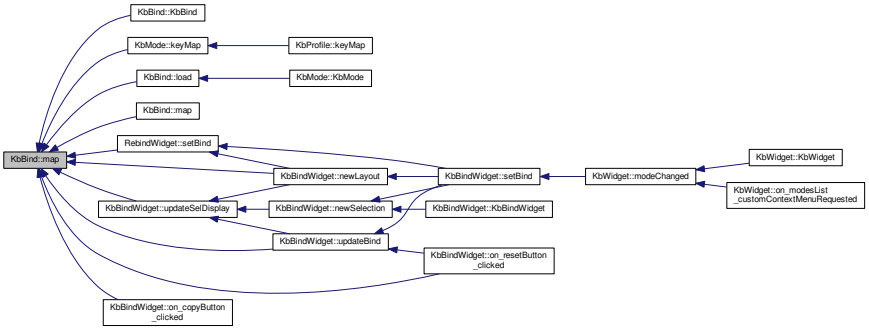

12.25.3.21 void KbBind::map (const KeyMap & *map*)

Definition at line 133 of file kbbind.cpp.

References _map, _needsSave, _needsUpdate, layoutChanged(), and map().

```
133                                 {
134     _map = map;
135     _needsUpdate = true;
136     _needsSave = true;
137     emit layoutChanged();
138 }
```

Here is the call graph for this function:

12.25.3.22 KbMode* KbBind::modeParent ( ) const [inline], [private]

Definition at line 115 of file kbbind.h.

Referenced by light(), and perf().

```
115 { return (KbMode*)parent(); }
```

Here is the caller graph for this function:



12.25.3.23 bool KbBind::needsSave ( ) const [inline]

Definition at line 38 of file kbbind.h.

References _needsSave.

Referenced by KbMode::needsSave().

```
38 { return _needsSave; }
```

Here is the caller graph for this function:

12.25.3.24 void KbBind::noAction (const QString & *key*)

Definition at line 172 of file kbbind.cpp.

References _bind, _map, globalRemap(), KeyMap::key(), KeyAction, and resetAction().

Referenced by RebindWidget::applyChanges(), and RebindWidget::on_unbindButton_clicked().

```
172                                         {
173     resetAction(key);
174     QString rKey = globalRemap(key);
175     if(!_map.key(rKey))
176         return;
177     _bind[rKey] = new KeyAction(this);
178 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

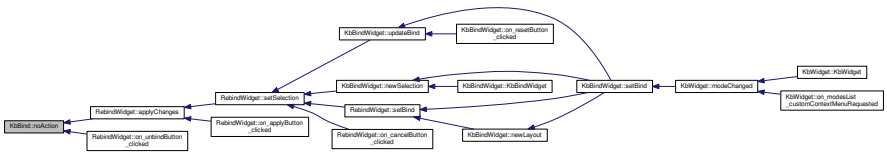

12.25.3.25 void KbBind::noAction (const QStringList & *keys*) [inline]

Definition at line 75 of file kbbind.h.

References noAction().

Referenced by noAction().

```
75 { foreach(const QString& key, keys) noAction(key); }
```

Here is the call graph for this function:

Here is the caller graph for this function:

12.25.3.26 KbPerf * KbBind::perf ( )

Definition at line 50 of file kbbind.cpp.

References modeParent(), and KbMode::perf().

Referenced by KeyAction::keyEvent(), and RebindWidget::setBind().

```
50                     {
51     return modeParent()->perf();
52 }
```

Here is the call graph for this function:

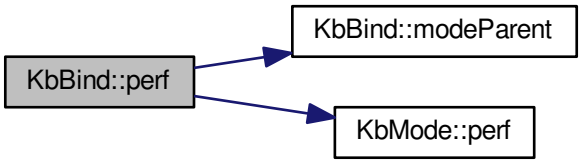

Here is the caller graph for this function:



12.25.3.27 void KbBind::resetAction (const QString & *key*)

Definition at line 162 of file kbbind.cpp.

References _bind, _needsSave, _needsUpdate, action(), and globalRemap().

Referenced by noAction(), KbBindWidget::on_resetButton_clicked(), RebindWidget::on_resetButton_clicked(), and setAction().

```
162                                          {
163     QString rKey = globalRemap(key);
164     // Clean up existing action (if any)
165     KeyAction* action = _bind.value(rKey);
166     delete action;
167     _bind.remove(rKey);
168     _needsUpdate = true;
169     _needsSave = true;
170 }
```

Here is the call graph for this function:

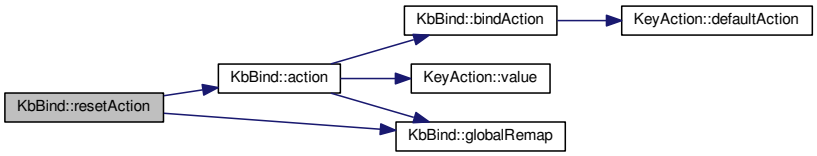

Here is the caller graph for this function:



12.25.3.28 void KbBind::resetAction (const QStringList & *keys*) [inline]

Definition at line 72 of file kbbind.h.

References resetAction().

Referenced by resetAction().

```
72 { foreach(const QString& key, keys) resetAction(key); }
```

Here is the call graph for this function:

Here is the caller graph for this function:

12.25.3.29 void KbBind::save (CkbSettings & *settings*)

Definition at line 81 of file kbbind.cpp.

References _bind, _map, _needsSave, _winLock, KeyAction::defaultAction(), KeyMap::name(), CkbSettings::setValue(), and KeyAction::value().

Referenced by KbMode::save().

```
81                                      {
82     _needsSave = false;
83     SGroup group(settings, "Binding");
84     settings.setValue("KeyMap", _map.name());
85     // Save key settings
86     settings.setValue("UseRealNames", true);
87     {
88         SGroup group(settings, "Keys");
89         foreach(QString key, _bind.keys()){
90             KeyAction* act = _bind.value(key);
91             if(act && act->value() != KeyAction::defaultAction(key))
92                 settings.setValue(key, act->value());
93         }
94     }
95     settings.setValue("WinLock", _winLock);
96 }
```

Here is the call graph for this function:

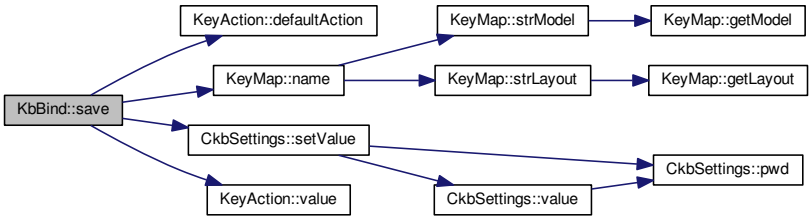

Here is the caller graph for this function:

12.25.3.30 void KbBind::saveGlobalRemap ( ) [static]

Definition at line 124 of file kbbind.cpp.

References _globalRemap, and CkbSettings::setValue().

Referenced by SettingsWidget::updateModifiers().

```
124                             {
125     CkbSettings settings("Program/GlobalRemap", true);
126     QHashIterator<QString, QString> i(_globalRemap);
127     while(i.hasNext()){
128         i.next();
129         settings.setValue(i.key(), i.value());
130     }
131 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

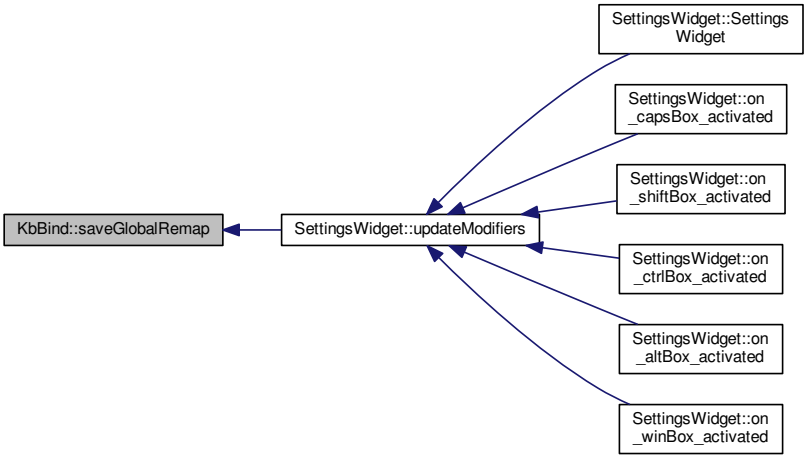

12.25.3.31 void KbBind::setAction (const QString & *key*, const QString & *action*)

Definition at line 180 of file kbbind.cpp.

References _bind, _map, globalRemap(), KeyMap::key(), KeyAction, and resetAction().

Referenced by RebindWidget::applyChanges(), and KbBindWidget::on_copyButton_clicked().

```
180                                                         {
181     resetAction(key);
182     QString rKey = globalRemap(key);
183     if(!_map.key(rKey))
184         return;
185     _bind[rKey] = new KeyAction(action, this);
186 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

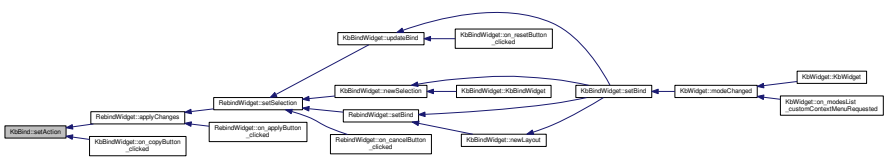

12.25.3.32 void KbBind::setAction (const QStringList & *keys*, const QString & *action*) [inline]

Definition at line 69 of file kbbind.h.

References setAction().

Referenced by setAction().

```
69 { foreach(const QString& key, keys) setAction(key, action); }
```

Here is the call graph for this function:

Here is the caller graph for this function:

12.25.3.33 void KbBind::setGlobalRemap (const QHash< QString, QString > *keyToActual*) [static]

Definition at line 104 of file kbbind.cpp.

References _globalRemap, and globalRemapTime.

Referenced by SettingsWidget::updateModifiers().

```
104                                                                 {
105     _globalRemap.clear();
106     // Ignore any keys with the standard binding
107     QHashIterator<QString, QString> i(keyToActual);
108     while(i.hasNext()){
109         i.next();
110         if(i.key() != i.value())
111             _globalRemap[i.key()] = i.value();
112     }
113     globalRemapTime = QDateTime::currentMSecsSinceEpoch();
114 }
```

Here is the caller graph for this function:

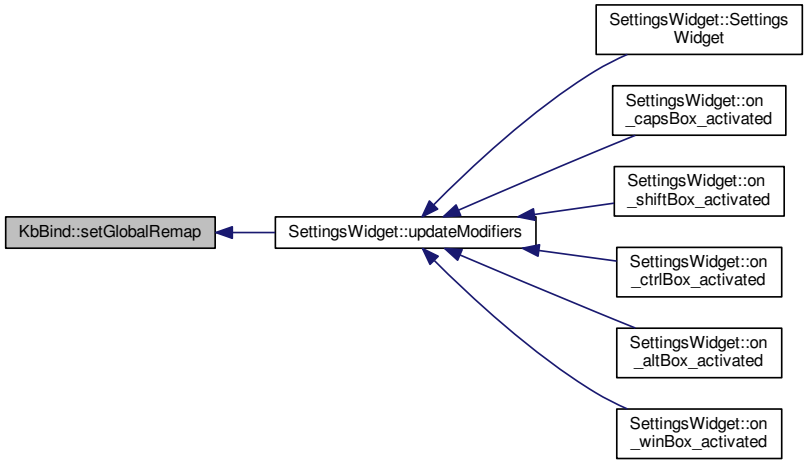

12.25.3.34 void KbBind::setNeedsUpdate ( ) [inline]

Definition at line 84 of file kbbind.h.

References _needsUpdate.

Referenced by KbMode::setNeedsUpdate().

```
84 { _needsUpdate = true; }
```

Here is the caller graph for this function:

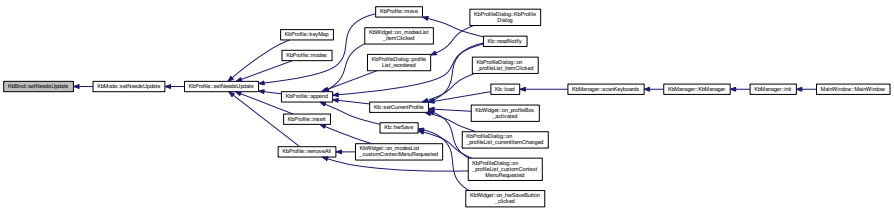

12.25.3.35 void KbBind::update (QFile & *cmd,* bool *force* = false)

Definition at line 188 of file kbbind.cpp.

References _bind, _globalRemap, _needsUpdate, _winLock, bindAction(), KeyAction::driverName(), globalRemapTime, KeyAction::isValidMacro(), lastCmd, lastGlobalRemapTime, KeyAction::macroContent(), updated(), and KeyAction::value().

Referenced by Kb::frameUpdate().

```
188                                        {
189     if(!force && !_needsUpdate && lastGlobalRemapTime ==
      globalRemapTime)
190         return;
```

```
191     lastGlobalRemapTime = globalRemapTime;
192     emit updated();
193     _needsUpdate = false;
194     // Reset all keys and enable notifications for all
195     cmd.write("rebind all notify all");
196     // Make sure modifier keys are included as they may be remapped globally
197     QHash<QString, KeyAction*> bind(_bind);
198     if(!_bind.contains("caps")) bind["caps"] = 0;
199     if(!_bind.contains("lshift")) bind["lshift"] = 0;
200     if(!_bind.contains("rshift")) bind["rshift"] = 0;
201     if(!_bind.contains("lctrl")) bind["lctrl"] = 0;
202     if(!_bind.contains("rctrl")) bind["rctrl"] = 0;
203     if(!_bind.contains("lwin")) bind["lwin"] = 0;
204     if(!_bind.contains("rwin")) bind["rwin"] = 0;
205     if(!_bind.contains("lalt")) bind["lalt"] = 0;
206     if(!_bind.contains("ralt")) bind["ralt"] = 0;
207     if(!_bind.contains("fn")) bind["fn"] = 0;
208     QHashIterator<QString, KeyAction*> i(bind);
209
210     // Initialize String buffer for macro Key definitions (G-keys)
211     // "macro clear" is neccessary, if an older definition is unbound.
212     QString macros = "\nmacro clear\n";
213
214     // Write out rebound keys and collect infos for macro definitions
215     while(i.hasNext()){
216         i.next();
217         QString key = i.key();
218         KeyAction* act = i.value();
219         if(_globalRemap.contains(key))
220             act = bindAction(_globalRemap.value(key));
221         if(!act)
222             continue;
223         QString value = act->driverName();
224         if(value.isEmpty()){
225             // If the key is unbound or is a special action, unbind it
226             cmd.write(" unbind ");
227             cmd.write(key.toLatin1());
228             // if a macro definiton for the key is given,
229             // add the converted string to key-buffer "macro"
230             if (act->isValidMacro()) {
231                 if (act->macroContent().length() > 0) {
232                     macros.append("macro " + key.toLatin1() + ":" + act->
    macroContent().toLatin1() + "\n");
233                 }
234             }
235         } else {
236             // Otherwise, write the binding
237             cmd.write(" bind ");
238             cmd.write(key.toLatin1());
239             cmd.write(":");
240             cmd.write(value.toLatin1());
241         }
242     }
243     // If win lock is enabled, unbind windows keys
244     if(_winLock)
245         cmd.write(" unbind lwin rwin");
246
247     // At last, send Macro definitions if available.
248     // If no definitions are made, clear macro will be sent only to reset all macros,
249     cmd.write(macros.toLatin1());
250     lastCmd = &cmd;
251 }
```

Here is the call graph for this function:

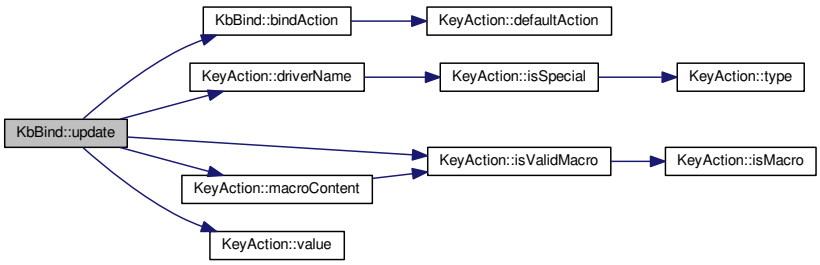

Here is the caller graph for this function:

12.25.3.36 void KbBind::updated ( ) [signal]

Definition at line 167 of file moc_kbbind.cpp.

Referenced by update().

```
168 {
169     QMetaObject::activate(this, &staticMetaObject, 2, Q_NULLPTR);
170 }
```

Here is the caller graph for this function:



12.25.3.37 bool KbBind::winLock ( ) [inline]

Definition at line 78 of file kbbind.h.

References _winLock.

Referenced by KeyAction::keyEvent().

```
78 { return _winLock; }
```

Here is the caller graph for this function:



12.25.3.38 void KbBind::winLock (bool *newWinLock*) [inline]

Definition at line 79 of file kbbind.h.

References _needsUpdate, and _winLock.

```
79 { _winLock = newWinLock; _needsUpdate = true; }
```

12.25.4 Friends And Related Function Documentation

12.25.4.1 friend class KeyAction [friend]

Definition at line 136 of file kbbind.h.

Referenced by bindAction(), friendlyActionName(), KbBind(), load(), noAction(), and setAction().

12.25.5 Field Documentation

12.25.5.1 QHash<QString, KeyAction*> KbBind::_bind [private]

Definition at line 131 of file kbbind.h.

Referenced by bindAction(), KbBind(), load(), noAction(), resetAction(), save(), setAction(), and update().

12.25.5.2 Kb* KbBind::_devParent [private]

Definition at line 113 of file kbbind.h.

Referenced by devParent().

12.25.5.3 QHash< QString, QString > KbBind::_globalRemap [static], [private]

Definition at line 119 of file kbbind.h.

Referenced by globalRemap(), loadGlobalRemap(), saveGlobalRemap(), setGlobalRemap(), and update().

12.25.5.4 KeyMap KbBind::_map [private]

Definition at line 129 of file kbbind.h.

Referenced by friendlyActionName(), friendlyName(), isISO(), isKeyboard(), isMouse(), load(), map(), noAction(), save(), and setAction().

12.25.5.5 bool KbBind::_needsSave [private]

Definition at line 135 of file kbbind.h.

Referenced by load(), map(), needsSave(), resetAction(), and save().

12.25.5.6 bool KbBind::_needsUpdate [private]

Definition at line 134 of file kbbind.h.

Referenced by map(), resetAction(), setNeedsUpdate(), update(), and winLock().

12.25.5.7 bool KbBind::_winLock [private]

Definition at line 133 of file kbbind.h.

Referenced by load(), save(), update(), and winLock().

12.25.5.8 quint64 KbBind::globalRemapTime = 0 [static], [private]

Definition at line 120 of file kbbind.h.

Referenced by loadGlobalRemap(), setGlobalRemap(), and update().

12.25.5.9 QFile* KbBind::lastCmd [private]

Definition at line 127 of file kbbind.h.

Referenced by handleNotificationChannel(), and update().

12.25.5.10 quint64 KbBind::lastGlobalRemapTime [private]

Definition at line 121 of file kbbind.h.

Referenced by update().

The documentation for this class was generated from the following files:

- src/ckb/kbbind.h
- src/ckb/kbbind.cpp
- src/ckb/release/moc_kbbind.cpp

12.26 Ui::KbBindWidget Class Reference

`#include <src/ckb/ui_kbbindwidget.h>`

Inheritance diagram for Ui::KbBindWidget:

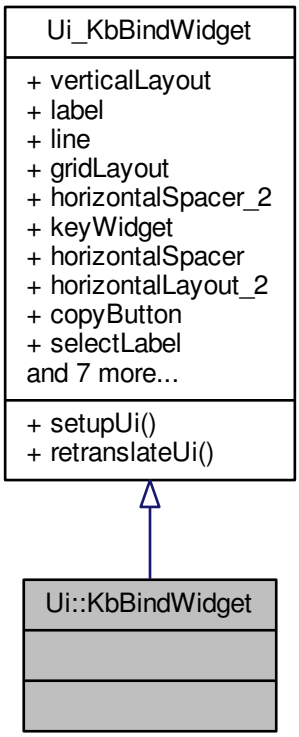

Collaboration diagram for Ui::KbBindWidget:

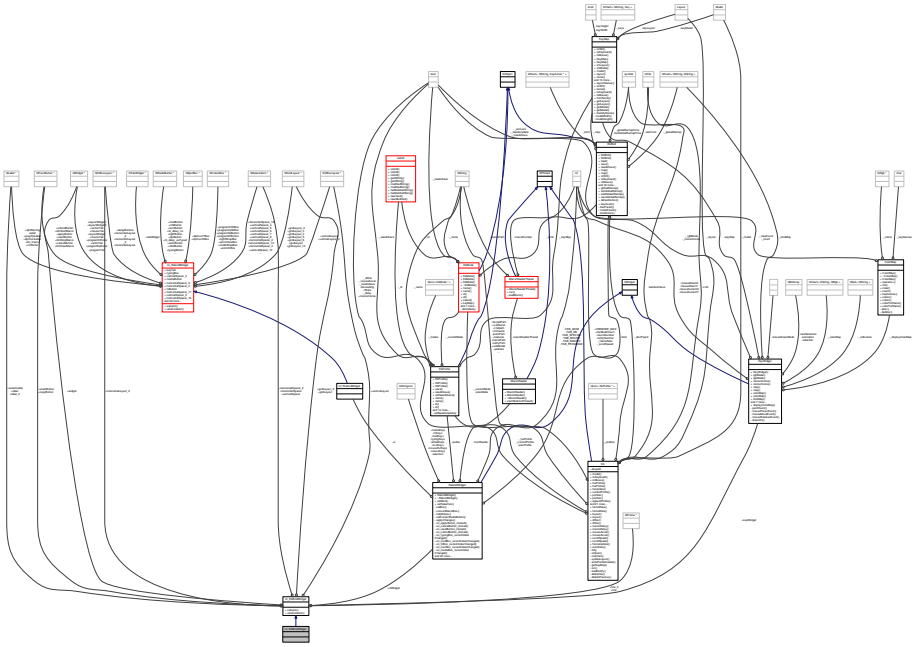

Public Member Functions

- void setupUi (QWidget *KbBindWidget)
- void retranslateUi (QWidget *KbBindWidget)

Data Fields

- QVBoxLayout * verticalLayout
- QLabel * label
- QFrame * line
- QGridLayout * gridLayout
- QSpacerItem * horizontalSpacer_2
- KeyWidget * keyWidget
- QSpacerItem * horizontalSpacer
- QHBoxLayout * horizontalLayout_2
- QPushButton * copyButton
- QLabel * selectLabel
- QPushButton * resetButton
- QSpacerItem * verticalSpacer
- QLabel * label_2
- QFrame * line_2
- QWidget * widget
- QGridLayout * gridLayout_2
- RebindWidget * rbWidget

12.26.1 Detailed Description

Definition at line 206 of file ui_kbbindwidget.h.

12.26.2 Member Function Documentation

12.26.2.1 void Ui_KbBindWidget::retranslateUi (QWidget * *KbBindWidget*) [inline], [inherited]

Definition at line 193 of file ui_kbbindwidget.h.

References Ui_KbBindWidget::copyButton, Ui_KbBindWidget::label, Ui_KbBindWidget::label_2, Ui_KbBindWidget::resetButton, and Ui_KbBindWidget::selectLabel.

Referenced by Ui_KbBindWidget::setupUi().

```
194     {
195         KbBindWidget->setWindowTitle(QApplication::translate("KbBindWidget", "Form", Q_NULLPTR));
196         label->setText(QApplication::translate("KbBindWidget", "Keys", Q_NULLPTR));
197         copyButton->setText(QApplication::translate("KbBindWidget", "Copy to mode...", Q_NULLPTR)
    );
198         selectLabel->setText(QApplication::translate("KbBindWidget", "Click to select keys",
    Q_NULLPTR));
199         resetButton->setText(QApplication::translate("KbBindWidget", "Reset", Q_NULLPTR));
200         label_2->setText(QApplication::translate("KbBindWidget", "Binding", Q_NULLPTR));
201     } // retranslateUi
```

Here is the caller graph for this function:



12.26.2.2 void Ui_KbBindWidget::setupUi (QWidget * *KbBindWidget*) [inline],[inherited]

Definition at line 51 of file ui_kbbindwidget.h.

References Ui_KbBindWidget::copyButton, Ui_KbBindWidget::gridLayout, Ui_KbBindWidget::gridLayout_2, Ui_KbBindWidget::horizontalLayout_2, Ui_KbBindWidget::horizontalSpacer, Ui_KbBindWidget::horizontalSpacer_2, Ui_KbBindWidget::keyWidget, Ui_KbBindWidget::label, Ui_KbBindWidget::label_2, Ui_KbBindWidget::line, Ui_KbBindWidget::line_2, Ui_KbBindWidget::rbWidget, Ui_KbBindWidget::resetButton, Ui_KbBindWidget::retranslateUi(), Ui_KbBindWidget::selectLabel, Ui_KbBindWidget::verticalLayout, Ui_KbBindWidget::verticalSpacer, and Ui_KbBindWidget::widget.

Referenced by KbBindWidget::KbBindWidget().

```
52     {
53         if (KbBindWidget->objectName().isEmpty())
54             KbBindWidget->setObjectName(QStringLiteral("KbBindWidget"));
55         KbBindWidget->resize(581, 473);
56         verticalLayout = new QVBoxLayout(KbBindWidget);
57         verticalLayout->setObjectName(QStringLiteral("verticalLayout"));
58         verticalLayout->setContentsMargins(0, 0, 0, -1);
59         label = new QLabel(KbBindWidget);
60         label->setObjectName(QStringLiteral("label"));
61         QFont font;
62         font.setBold(true);
63         font.setWeight(75);
64         label->setFont(font);
65 
66         verticalLayout->addWidget(label);
67 
68         line = new QFrame(KbBindWidget);
69         line->setObjectName(QStringLiteral("line"));
70         line->setFrameShape(QFrame::HLine);
71         line->setFrameShadow(QFrame::Sunken);
72 
73         verticalLayout->addWidget(line);
74 
75         gridLayout = new QGridLayout();
76         gridLayout->setObjectName(QStringLiteral("gridLayout"));
77         horizontalSpacer_2 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
78 
79         gridLayout->addItem(horizontalSpacer_2, 0, 4, 1, 1);
80 
81         keyWidget = new KeyWidget(KbBindWidget);
82         keyWidget->setObjectName(QStringLiteral("keyWidget"));
83         QSizePolicy sizePolicy(QSizePolicy::Preferred, QSizePolicy::Preferred);
84         sizePolicy.setHorizontalStretch(0);
85         sizePolicy.setVerticalStretch(0);
86         sizePolicy.setHeightForWidth(keyWidget->sizePolicy().hasHeightForWidth());
87         keyWidget->setSizePolicy(sizePolicy);
88 
89         gridLayout->addWidget(keyWidget, 0, 1, 1, 3);
90 
91         horizontalSpacer = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
92 
93         gridLayout->addItem(horizontalSpacer, 0, 0, 1, 1);
94 
95         horizontalLayout_2 = new QHBoxLayout();
96         horizontalLayout_2->setSpacing(0);
97         horizontalLayout_2->setObjectName(QStringLiteral("horizontalLayout_2"));
98         copyButton = new QPushButton(KbBindWidget);
99         copyButton->setObjectName(QStringLiteral("copyButton"));
100         QSizePolicy sizePolicy1(QSizePolicy::Fixed, QSizePolicy::Fixed);
101         sizePolicy1.setHorizontalStretch(0);
102         sizePolicy1.setVerticalStretch(0);
103         sizePolicy1.setHeightForWidth(copyButton->sizePolicy().hasHeightForWidth());
104         copyButton->setSizePolicy(sizePolicy1);
105         copyButton->setMinimumSize(QSize(140, 0));
106         copyButton->setMaximumSize(QSize(140, 16777215));
107 
108         horizontalLayout_2->addWidget(copyButton);
109 
110         selectLabel = new QLabel(KbBindWidget);
111         selectLabel->setObjectName(QStringLiteral("selectLabel"));
112         QSizePolicy sizePolicy2(QSizePolicy::Expanding, QSizePolicy::Preferred);
113         sizePolicy2.setHorizontalStretch(0);
114         sizePolicy2.setVerticalStretch(0);
115         sizePolicy2.setHeightForWidth(selectLabel->sizePolicy().hasHeightForWidth());
116         selectLabel->setSizePolicy(sizePolicy2);
117         selectLabel->setAlignment(Qt::AlignCenter);
118 
119         horizontalLayout_2->addWidget(selectLabel);
```

```
120
121         resetButton = new QPushButton(KbBindWidget);
122         resetButton->setObjectName(QStringLiteral("resetButton"));
123         QSizePolicy sizePolicy3(QSizePolicy::Expanding, QSizePolicy::Fixed);
124         sizePolicy3.setHorizontalStretch(0);
125         sizePolicy3.setVerticalStretch(0);
126         sizePolicy3.setHeightForWidth(resetButton->sizePolicy().hasHeightForWidth());
127         resetButton->setSizePolicy(sizePolicy3);
128         resetButton->setMinimumSize(QSize(140, 0));
129         resetButton->setMaximumSize(QSize(140, 16777215));
130
131         horizontalLayout_2->addWidget(resetButton);
132
133
134         gridLayout->addLayout(horizontalLayout_2, 1, 1, 1, 3);
135
136
137         verticalLayout->addLayout(gridLayout);
138
139         verticalSpacer = new QSpacerItem(20, 40, QSizePolicy::Minimum, QSizePolicy::Expanding
    );
140
141         verticalLayout->addItem(verticalSpacer);
142
143         label_2 = new QLabel(KbBindWidget);
144         label_2->setObjectName(QStringLiteral("label_2"));
145         label_2->setFont(font);
146
147         verticalLayout->addWidget(label_2);
148
149         line_2 = new QFrame(KbBindWidget);
150         line_2->setObjectName(QStringLiteral("line_2"));
151         line_2->setFrameShape(QFrame::HLine);
152         line_2->setFrameShadow(QFrame::Sunken);
153
154         verticalLayout->addWidget(line_2);
155
156         widget = new QWidget(KbBindWidget);
157         widget->setObjectName(QStringLiteral("widget"));
158         QSizePolicy sizePolicy4(QSizePolicy::Preferred, QSizePolicy::Fixed);
159         sizePolicy4.setHorizontalStretch(0);
160         sizePolicy4.setVerticalStretch(0);
161         sizePolicy4.setHeightForWidth(widget->sizePolicy().hasHeightForWidth());
162         widget->setSizePolicy(sizePolicy4);
163         widget->setMinimumSize(QSize(0, 280));
164         widget->setMaximumSize(QSize(16777215, 280));
165         gridLayout_2 = new QGridLayout(widget);
166         gridLayout_2->setSpacing(0);
167         gridLayout_2->setObjectName(QStringLiteral("gridLayout_2"));
168         gridLayout_2->setContentsMargins(0, 0, 0, 0);
169         rbWidget = new RebindWidget(widget);
170         rbWidget->setObjectName(QStringLiteral("rbWidget"));
171         QSizePolicy sizePolicy5(QSizePolicy::Expanding, QSizePolicy::Expanding);
172         sizePolicy5.setHorizontalStretch(0);
173         sizePolicy5.setVerticalStretch(0);
174         sizePolicy5.setHeightForWidth(rbWidget->sizePolicy().hasHeightForWidth());
175         rbWidget->setSizePolicy(sizePolicy5);
176
177         gridLayout_2->addWidget(rbWidget, 0, 0, 1, 1);
178
179
180         verticalLayout->addWidget(widget);
181
182         label->raise();
183         line->raise();
184         label_2->raise();
185         line_2->raise();
186         widget->raise();
187
188         retranslateUi(KbBindWidget);
189
190         QMetaObject::connectSlotsByName(KbBindWidget);
191     } // setupUi
```

Here is the call graph for this function:



Here is the caller graph for this function:



12.26.3 Field Documentation

12.26.3.1 QPushButton* Ui_KbBindWidget::copyButton [inherited]

Definition at line 41 of file ui_kbbindwidget.h.

Referenced by Ui_KbBindWidget::retranslateUi(), and Ui_KbBindWidget::setupUi().

12.26.3.2 QGridLayout* Ui_KbBindWidget::gridLayout [inherited]

Definition at line 36 of file ui_kbbindwidget.h.

Referenced by Ui_KbBindWidget::setupUi().

12.26.3.3 QGridLayout* Ui_KbBindWidget::gridLayout_2 [inherited]

Definition at line 48 of file ui_kbbindwidget.h.

Referenced by Ui_KbBindWidget::setupUi().

12.26.3.4 QHBoxLayout* Ui_KbBindWidget::horizontalLayout_2 [inherited]

Definition at line 40 of file ui_kbbindwidget.h.

Referenced by Ui_KbBindWidget::setupUi().

12.26.3.5 QSpacerItem* Ui_KbBindWidget::horizontalSpacer [inherited]

Definition at line 39 of file ui_kbbindwidget.h.

Referenced by Ui_KbBindWidget::setupUi().

12.26.3.6 QSpacerItem* Ui_KbBindWidget::horizontalSpacer_2 [inherited]

Definition at line 37 of file ui_kbbindwidget.h.

Referenced by Ui_KbBindWidget::setupUi().

12.26.3.7 KeyWidget* Ui_KbBindWidget::keyWidget [inherited]

Definition at line 38 of file ui_kbbindwidget.h.

Referenced by KbBindWidget::KbBindWidget(), KbBindWidget::newLayout(), KbBindWidget::setBind(), Ui_KbBindWidget::setupUi(), and KbBindWidget::updateBind().

12.26.3.8 QLabel* Ui_KbBindWidget::label [inherited]

Definition at line 34 of file ui_kbbindwidget.h.

Referenced by Ui_KbBindWidget::retranslateUi(), and Ui_KbBindWidget::setupUi().

12.26.3.9 QLabel* Ui_KbBindWidget::label_2 [inherited]

Definition at line 45 of file ui_kbbindwidget.h.

Referenced by Ui_KbBindWidget::retranslateUi(), and Ui_KbBindWidget::setupUi().

12.26.3.10 QFrame* Ui_KbBindWidget::line [inherited]

Definition at line 35 of file ui_kbbindwidget.h.

Referenced by Ui_KbBindWidget::setupUi().

12.26.3.11 QFrame* Ui_KbBindWidget::line_2 [inherited]

Definition at line 46 of file ui_kbbindwidget.h.

Referenced by Ui_KbBindWidget::setupUi().

12.26.3.12 RebindWidget* Ui_KbBindWidget::rbWidget [inherited]

Definition at line 49 of file ui_kbbindwidget.h.

Referenced by KbBindWidget::newLayout(), KbBindWidget::newSelection(), KbBindWidget::setBind(), Ui_KbBindWidget::setupUi(), and KbBindWidget::updateBind().

12.26.3.13 QPushButton* Ui_KbBindWidget::resetButton [inherited]

Definition at line 43 of file ui_kbbindwidget.h.

Referenced by Ui_KbBindWidget::retranslateUi(), and Ui_KbBindWidget::setupUi().

12.26.3.14 QLabel* Ui_KbBindWidget::selectLabel [inherited]

Definition at line 42 of file ui_kbbindwidget.h.

Referenced by Ui_KbBindWidget::retranslateUi(), Ui_KbBindWidget::setupUi(), and KbBindWidget::updateSelDisplay().

12.26.3.15 QVBoxLayout* Ui_KbBindWidget::verticalLayout [inherited]

Definition at line 33 of file ui_kbbindwidget.h.

Referenced by Ui_KbBindWidget::setupUi().

12.26.3.16 QSpacerItem* Ui_KbBindWidget::verticalSpacer [inherited]

Definition at line 44 of file ui_kbbindwidget.h.

Referenced by Ui_KbBindWidget::setupUi().

12.26.3.17 QWidget* Ui_KbBindWidget::widget [inherited]

Definition at line 47 of file ui_kbbindwidget.h.

Referenced by Ui_KbBindWidget::setupUi().

The documentation for this class was generated from the following file:

- src/ckb/ui_kbbindwidget.h

12.27 KbBindWidget Class Reference

`#include <src/ckb/kbbindwidget.h>`

Inheritance diagram for KbBindWidget:

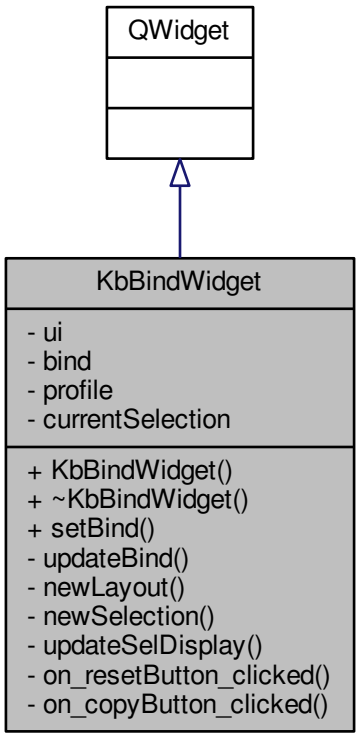

Collaboration diagram for KbBindWidget:

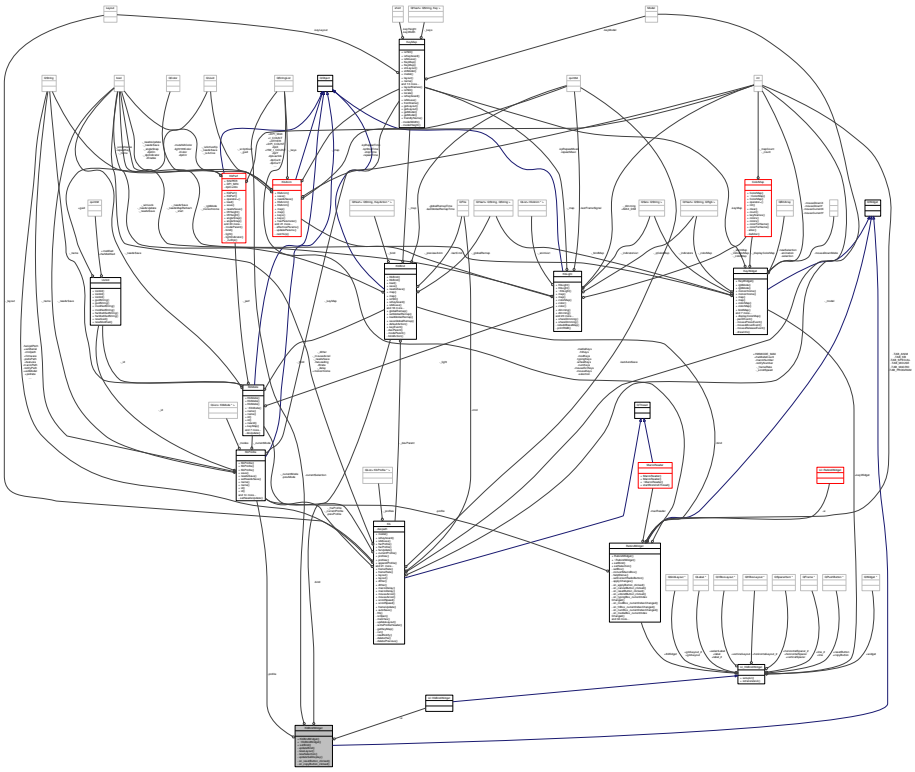

Public Member Functions

- KbBindWidget (QWidget *parent=0)
- ~KbBindWidget ()
- void setBind (KbBind *newBind, KbProfile *newProfile)

Private Slots

- void updateBind ()
- void newLayout ()
- void newSelection (QStringList selection)
- void updateSelDisplay ()
- void on_resetButton_clicked ()
- void on_copyButton_clicked ()

Private Attributes

- Ui::KbBindWidget * ui
- KbBind * bind
- KbProfile * profile
- QStringList currentSelection

12.27.1 Detailed Description

Definition at line 12 of file kbbindwidget.h.

12.27.2 Constructor & Destructor Documentation

12.27.2.1 KbBindWidget::KbBindWidget (QWidget * *parent* = 0) [explicit]

Definition at line 7 of file kbbindwidget.cpp.

References Ui_KbBindWidget::keyWidget, newSelection(), KeyWidget::rgbMode(), Ui_KbBindWidget::setupUi(), and ui.

```
7                                              :
8     QWidget(parent),
9     ui(new Ui::KbBindWidget), bind(0), profile(0)
10 {
11     ui->setupUi(this);
12     ui->keyWidget->rgbMode(false);
13     connect(ui->keyWidget, SIGNAL(selectionChanged(QStringList)), this, SLOT(
       newSelection(QStringList)));
14 }
```

Here is the call graph for this function:

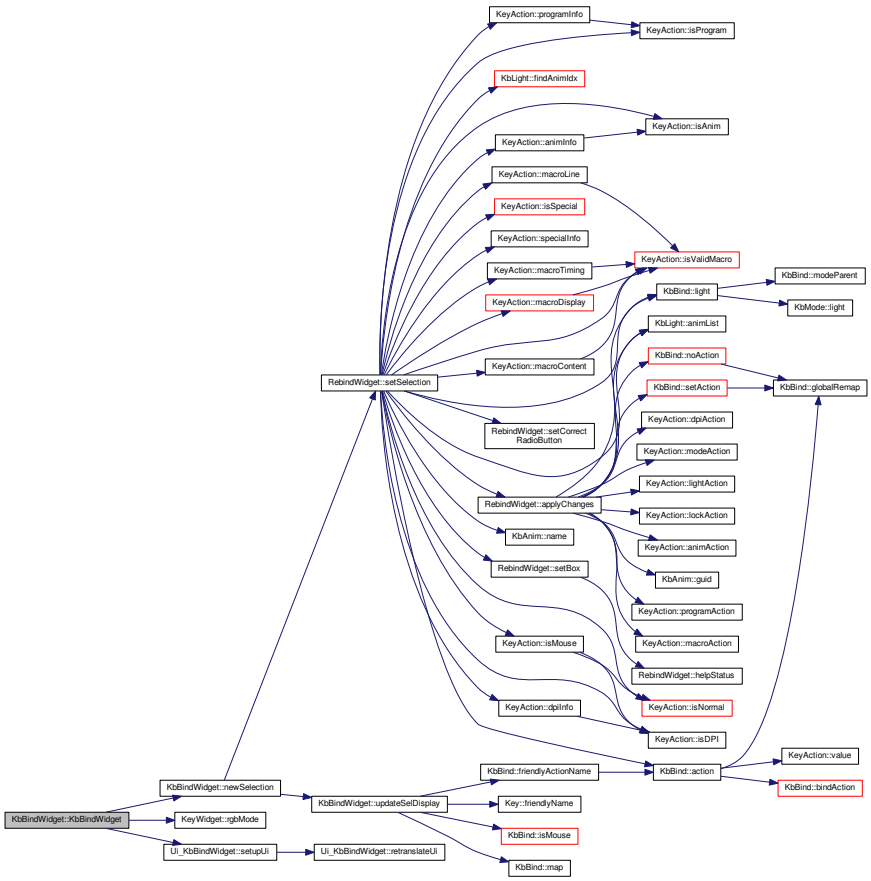

12.27.2.2 KbBindWidget::~KbBindWidget ( )

Definition at line 16 of file kbbindwidget.cpp.

References ui.

```
16                                  {
17     delete ui;
18 }
```

12.27.3 Member Function Documentation

12.27.3.1 void KbBindWidget::newLayout ( ) [private],[slot]

Definition at line 50 of file kbbindwidget.cpp.

References bind, Ui_KbBindWidget::keyWidget, KeyWidget::map(), KbBind::map(), profile, Ui_KbBindWidget::rbWidget, RebindWidget::setBind(), ui, and updateSelDisplay().

Referenced by setBind().

```
50                              {
51     ui->keyWidget->map(bind->map());
52     ui->rbWidget->setBind(bind, profile);
53     updateSelDisplay();
54 }
```

Here is the call graph for this function:

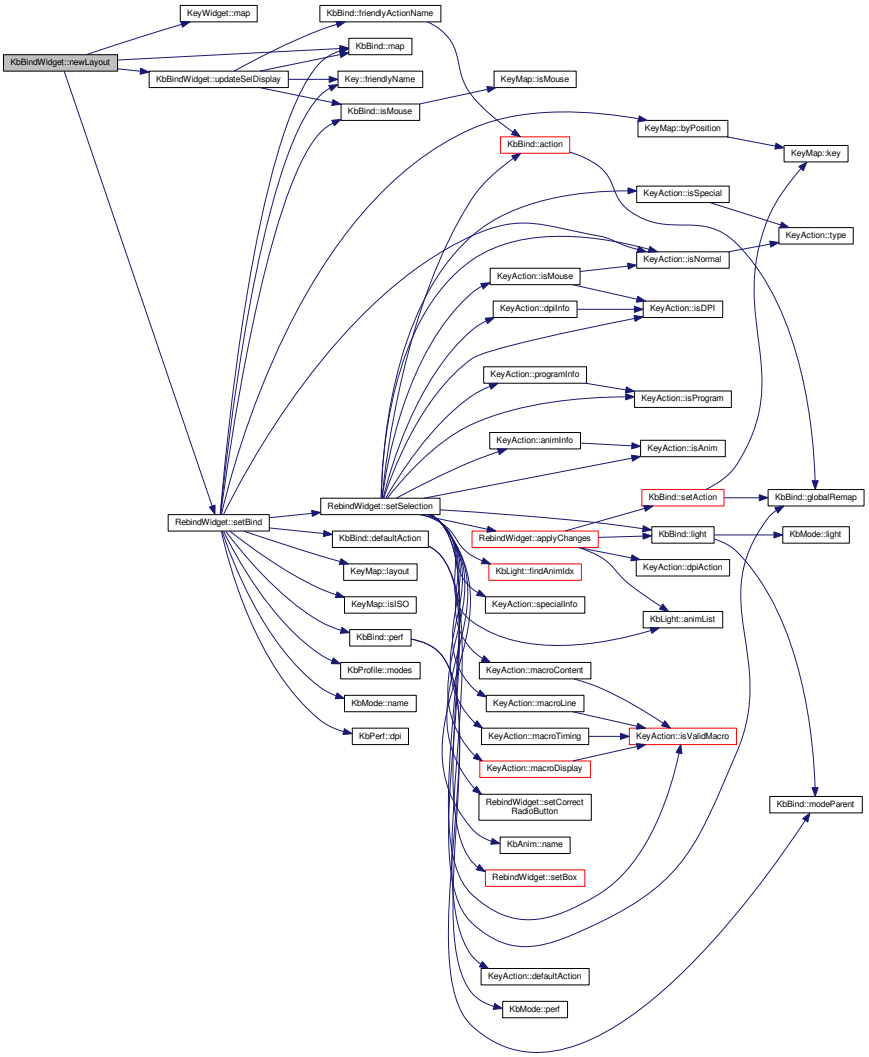

Here is the caller graph for this function:



12.27.3.2 void KbBindWidget::newSelection (QStringList *selection*) [private], [slot]

Definition at line 56 of file kbbindwidget.cpp.

References currentSelection, Ui_KbBindWidget::rbWidget, RebindWidget::setSelection(), ui, and updateSelDisplay().

Referenced by KbBindWidget(), and setBind().

```
56                                                  {
57     currentSelection = selection;
58     ui->rbWidget->setSelection(selection, true);
59     updateSelDisplay();
60 }
```

Here is the call graph for this function:

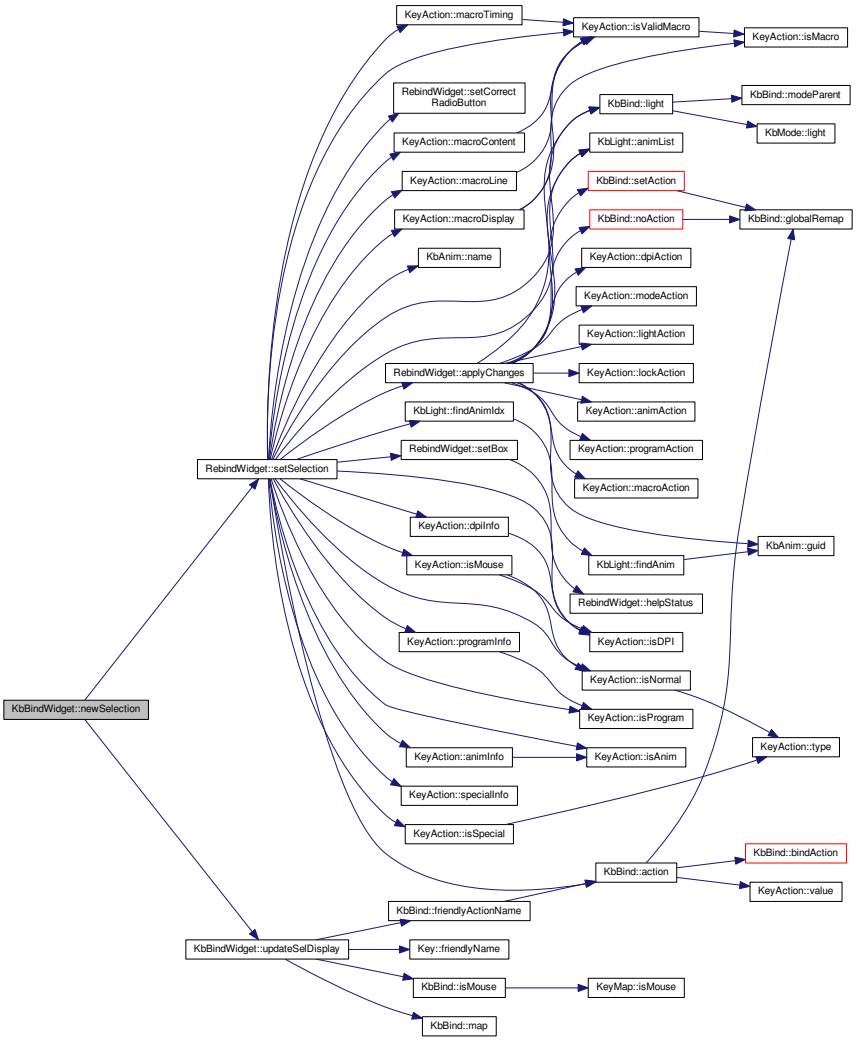

Here is the caller graph for this function:



12.27.3.3 void KbBindWidget::on_copyButton_clicked ( ) [private], [slot]

Definition at line 103 of file kbbindwidget.cpp.

References KbBind::action(), bind, KbMode::bind(), KeyMap::count(), KbProfile::currentMode(), currentSelection, KbBind::isMouse(), KeyMap::keys(), KbBind::map(), KbProfile::modes(), profile, ModeSelectDialog::selection(), KbBind::setAction(), and KeyAction::type().

```
103                                     {
104     QStringList selection = currentSelection;
105     const KeyMap& map = bind->map();
106     int count = selection.count();
107     QString type = bind->isMouse() ? "button" : "key";
108     QString text = tr("%1 %2").arg(count).arg(type) + (count == 1 ? "" : "s");
109     if(count == 0){
110         // Copy all keys if none selected
111         selection = map.keys();
112         text = tr("all %1s").arg(type);
113     }
114     text = "Copy binding for " + text + " to:";
115     // Display popup
116     ModeSelectDialog dialog(this, profile->currentMode(),
    profile->modes(), text);
117     if(dialog.exec() != QDialog::Accepted)
118         return;
119     // Copy selected keys to selected modes
120     QList<KbMode*> selectedModes = dialog.selection();
121     foreach(KbMode* mode, selectedModes){
122         KbBind* modeBind = mode->bind();
123         foreach(const QString& key, selection){
124             modeBind->setAction(key, bind->action(key));
125         }
126     }
127 }
```

Here is the call graph for this function:

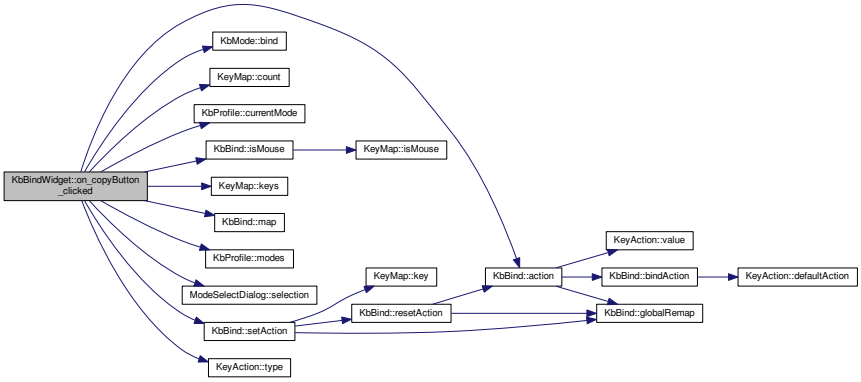

12.27.3.4 void KbBindWidget::on_resetButton_clicked ( ) [private], [slot]

Definition at line 82 of file kbbindwidget.cpp.

References bind, KeyMap::count(), currentSelection, KbBind::isMouse(), KeyMap::keys(), KbBind::map(), KbBind::resetAction(), KeyAction::type(), and updateBind().

```
82                                     {
83     QStringList selection = currentSelection;
84     const KeyMap& map = bind->map();
85     if(selection.isEmpty())
86         // Reset all keys if none selected
87         selection = map.keys();
88     uint count = selection.count();
89     QString type = bind->isMouse() ? "button" : "key";
90     QString text;
91     if(count == map.count())
92         text = "<center>Reset all %1s to default?</center>";
93     else if(count == 1)
94         text = "<center>Reset this %1 to default?</center>";
95     else
96         text = tr("<center>Reset %1 %2s to default?</center>").arg(count);
97     if(QMessageBox(QMessageBox::NoIcon, "Confirm action", text.arg(type), QMessageBox::Yes |
    QMessageBox::No, this).exec() != QMessageBox::Yes)
98         return;
99     bind->resetAction(selection);
```

```
100     updateBind();
101 }
```

Here is the call graph for this function:

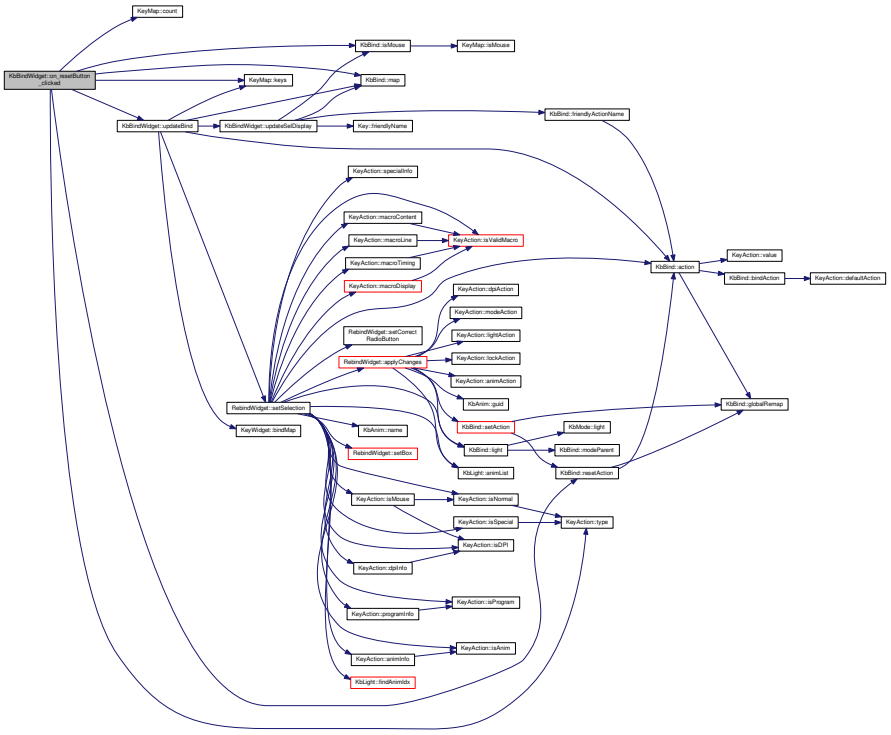

12.27.3.5 void KbBindWidget::setBind (KbBind * *newBind*, KbProfile * *newProfile*)

Definition at line 20 of file kbbindwidget.cpp.

References bind, KeyWidget::clearSelection(), Ui_KbBindWidget::keyWidget, newLayout(), newSelection(), profile, Ui_KbBindWidget::rbWidget, RebindWidget::setBind(), ui, and updateBind().

Referenced by KbWidget::modeChanged().

```
20                                                      {
21     ui->keyWidget->clearSelection();
22     ui->rbWidget->setBind(newBind, newProfile);
23     newSelection(QStringList());
24     if(bind == newBind)
25         return;
26     if(bind){
27         disconnect(bind, SIGNAL(layoutChanged()), this, SLOT(newLayout()));
28         disconnect(bind, SIGNAL(updated()), this, SLOT(updateBind()));
29     }
30     connect(newBind, SIGNAL(layoutChanged()), this, SLOT(newLayout()));
31     connect(newBind, SIGNAL(updated()), this, SLOT(updateBind()));
32     bind = newBind;
33     profile = newProfile;
34     newLayout();
35     ui->rbWidget->setBind(bind, profile);
36     updateBind();
37 }
```

Here is the call graph for this function:

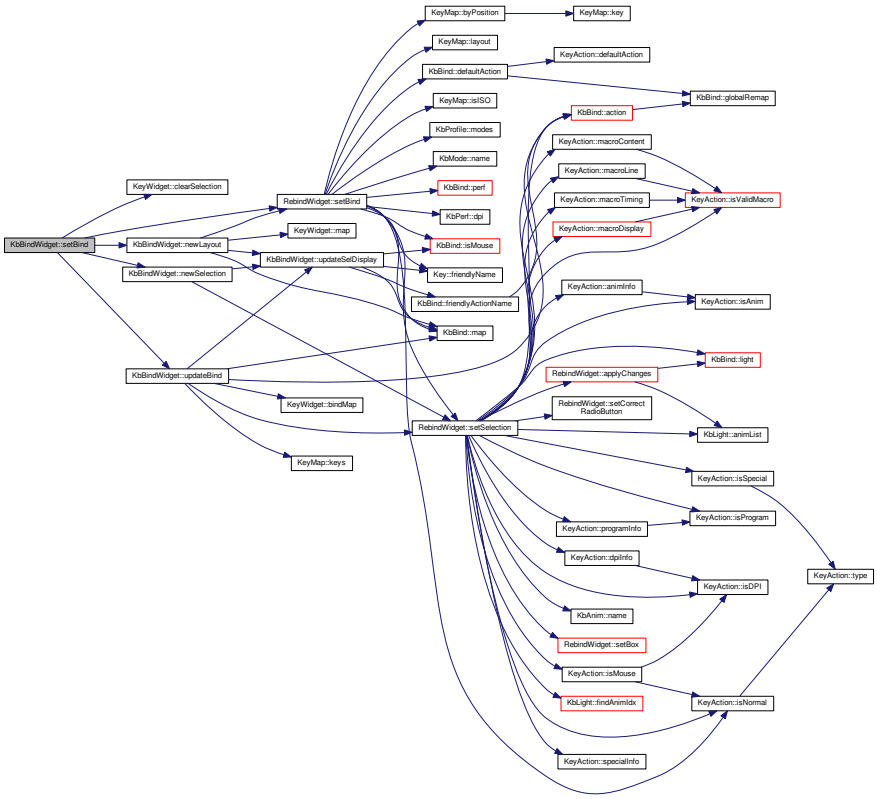

Here is the caller graph for this function:

12.27.3.6 void KbBindWidget::updateBind ( ) [private], [slot]

Definition at line 39 of file kbbindwidget.cpp.

References KbBind::action(), bind, KeyWidget::bindMap(), currentSelection, KeyMap::keys(), Ui_KbBindWidget::keyWidget, KbBind::map(), Ui_KbBindWidget::rbWidget, RebindWidget::setSelection(), ui, and updateSelDisplay().

Referenced by on_resetButton_clicked(), and setBind().

```
39                                {
40     const KeyMap& map = bind->map();
41     // Build the action list based on the keymap
42     QHash<QString, QString> actions;
43     foreach(const QString& key, map.keys())
44         actions[key] = bind->action(key);
45     ui->keyWidget->bindMap(actions);
```

```
46     ui->rbWidget->setSelection(currentSelection);
47     updateSelDisplay();
48 }
```

Here is the call graph for this function:

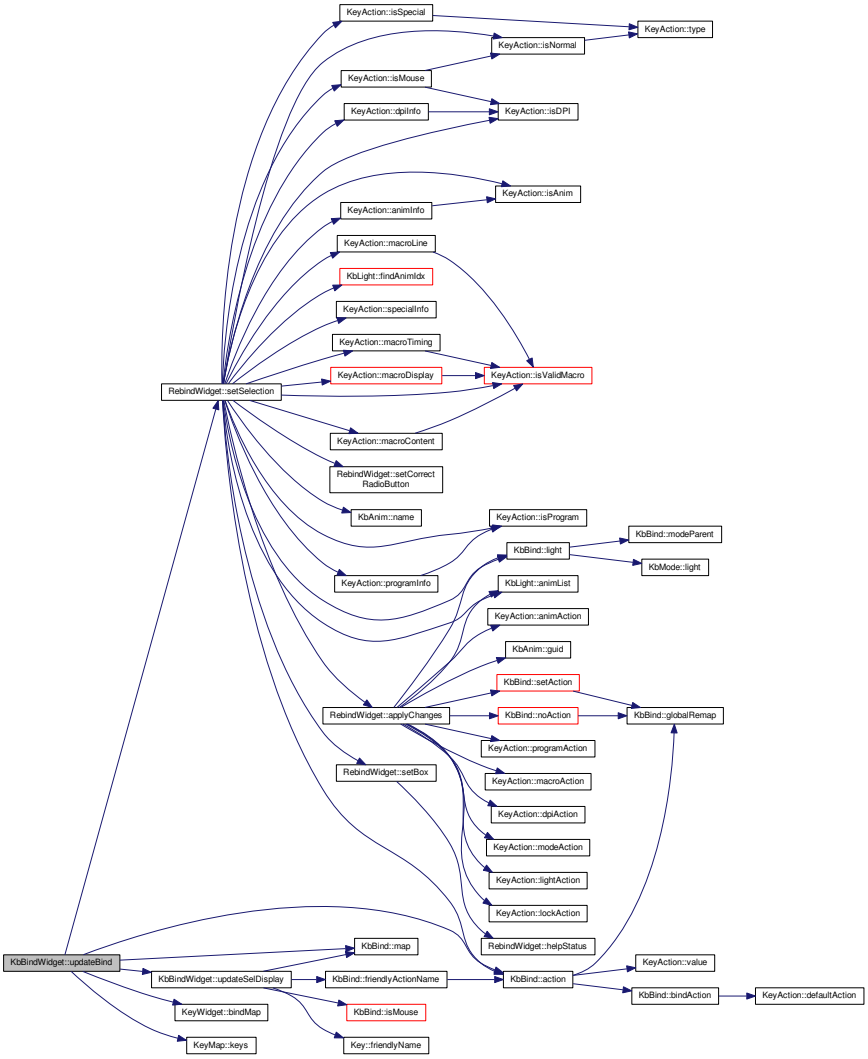

Here is the caller graph for this function:



12.27.3.7 void KbBindWidget::updateSelDisplay ( ) [private], [slot]

Definition at line 62 of file kbbindwidget.cpp.

References bind, currentSelection, KbBind::friendlyActionName(), Key::friendlyName(), KbBind::isMouse(), KbBind::map(), Ui_KbBindWidget::selectLabel, and ui.

Referenced by newLayout(), newSelection(), and updateBind().

```
62                                      {
63     int count = currentSelection.count();
64     if(count == 0){
65         // No keys selected
66         ui->selectLabel->setText("Click to select");
67         return;
68     }
69     if(count == 1){
70         // Single key selected: show key name and binding
71         QString key = currentSelection[0];
72         const Key& pos = bind->map()[key];
73         if(!pos)
74             ui->selectLabel->setText("(Unknown)");
75         else
76             ui->selectLabel->setText(pos.friendlyName(false).split("\n")[0] + " →
     " + bind->friendlyActionName(key).split("\n")[0]);
77         return;
78     }
79     ui->selectLabel->setText(QString("%1 %2 selected").arg(count).arg(
     bind->isMouse() ? "buttons" : "keys"));
80 }
```

Here is the call graph for this function:

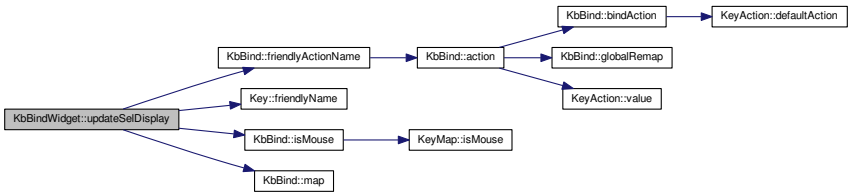

Here is the caller graph for this function:



12.27.4 Field Documentation

12.27.4.1 KbBind* KbBindWidget::bind [private]

Definition at line 34 of file kbbindwidget.h.

Referenced by newLayout(), on_copyButton_clicked(), on_resetButton_clicked(), setBind(), updateBind(), and updateSelDisplay().

12.27.4.2 QStringList KbBindWidget::currentSelection [private]

Definition at line 36 of file kbbindwidget.h.

Referenced by newSelection(), on_copyButton_clicked(), on_resetButton_clicked(), updateBind(), and updateSelDisplay().

12.27.4.3 KbProfile* KbBindWidget::profile [private]

Definition at line 35 of file kbbindwidget.h.

Referenced by newLayout(), on_copyButton_clicked(), and setBind().

12.27.4.4 Ui::KbBindWidget* KbBindWidget::ui [private]

Definition at line 32 of file kbbindwidget.h.

Referenced by KbBindWidget(), newLayout(), newSelection(), setBind(), updateBind(), updateSelDisplay(), and ~KbBindWidget().

The documentation for this class was generated from the following files:

- src/ckb/kbbindwidget.h
- src/ckb/kbbindwidget.cpp

12.28 KbFirmware Class Reference

`#include <src/ckb/kbfirmware.h>`

Inheritance diagram for KbFirmware:

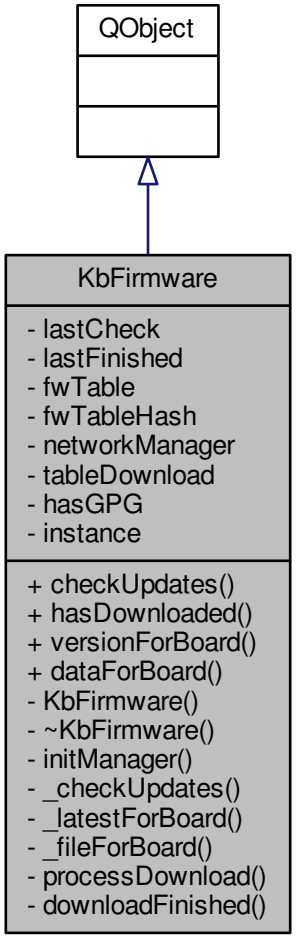

Collaboration diagram for KbFirmware:

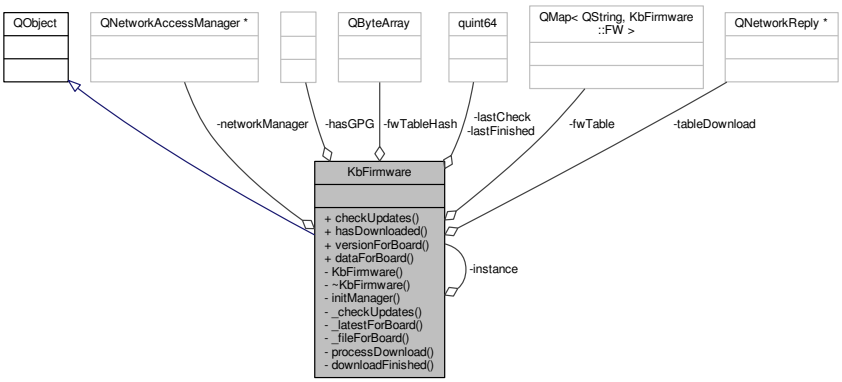

Data Structures

- struct FW

Signals

- void downloaded ()

Static Public Member Functions

- static bool checkUpdates ()
- static bool hasDownloaded ()
- static float versionForBoard (const QString &features, bool waitForComplete=false)
- static QByteArray dataForBoard (const QString &features)

Private Types

- enum { UNKNOWN = -1, NO, YES }

Private Slots

- void processDownload (QNetworkReply *reply)
- void downloadFinished ()

Private Member Functions

- KbFirmware ()
- ~KbFirmware ()
- void initManager ()
- bool _checkUpdates ()
- float _latestForBoard (const QString &features, bool waitForComplete)
- QByteArray _fileForBoard (const QString &features)

Private Attributes

- quint64 lastCheck
- quint64 lastFinished
- QMap< QString, FW > fwTable
- QByteArray fwTableHash
- QNetworkAccessManager * networkManager
- QNetworkReply * tableDownload
- enum KbFirmware:: { ... } hasGPG

Static Private Attributes

- static KbFirmware instance

12.28.1 Detailed Description

Definition at line 10 of file kbfirmware.h.

12.28.2 Member Enumeration Documentation

12.28.2.1 anonymous enum [private]

Enumerator

UNKNOWN

NO

YES

Definition at line 53 of file kbfirmware.h.

```
53 { UNKNOWN = -1, NO, YES } hasGPG :2;
```

12.28.3 Constructor & Destructor Documentation

12.28.3.1 KbFirmware::KbFirmware ( ) [private]

Definition at line 14 of file kbfirmware.cpp.

```
14                        :
15     lastCheck(0), lastFinished(0), networkManager(0),
       tableDownload(0), hasGPG(UNKNOWN)
16 {
17 }
```

12.28.3.2 KbFirmware::~KbFirmware ( ) [private]

Definition at line 19 of file kbfirmware.cpp.

```
19                        {
20     //delete networkManager;
21     // ^ This can cause a crash (QT bug?)
22 }
```

12.28.4 Member Function Documentation

12.28.4.1 bool KbFirmware::_checkUpdates ( ) [private]

Definition at line 30 of file kbfirmware.cpp.

References AUTO_CHECK_TIME, downloadFinished(), initManager(), lastCheck, networkManager, and tableDownload.

Referenced by checkUpdates().

```
30                                {
31     initManager();
32     quint64 now = QDateTime::currentMSecsSinceEpoch();
33     if(now < lastCheck + AUTO_CHECK_TIME)
34         return false;
35     // First location is for debugging only.
36     // tableDownload =
       networkManager->get(QNetworkRequest(QUrl("https://raw.githubusercontent.com/frickler24/ckb-next/issues-26-Firmware-Inc
37     // This one is the production one.
38     tableDownload = networkManager->get(QNetworkRequest(QUrl("
       https://raw.githubusercontent.com/mattanger/ckb-next/master/FIRMWARE")));
39     connect(tableDownload, SIGNAL(finished()), this, SLOT(
       downloadFinished()));
40     lastCheck = now;
41     return true;
42 }
```

Here is the call graph for this function:



Here is the caller graph for this function:



12.28.4.2 QByteArray KbFirmware::_fileForBoard (const QString & *features*) [private]

Definition at line 183 of file kbfirmware.cpp.

References QuaZip::csInsensitive, KbFirmware::FW::fileName, fwTable, KbFirmware::FW::hash, QuaZip::mdUnzip, networkManager, QuaZip::open(), QuaZipFile::open(), QuaZip::setCurrentFile(), tableName(), and KbFirmware::FW::url.

Referenced by dataForBoard().

```
183                                                     {
184     QString name = tableName(features);
185     FW info = fwTable.value(name);
186     if(info.hash.isEmpty())
187         return "";
188     // Download zip from URL. Wait for it to finish.
189     QNetworkReply* reply = networkManager->get(QNetworkRequest(QUrl(info.url)));
190     QEventLoop loop(this);
191     connect(reply, SIGNAL(finished()), &loop, SLOT(quit()));
192     loop.exec();
193     // Download finished, process data
194     if(reply->error() != QNetworkReply::NoError)
195         return "";
196     QByteArray zipData = reply->readAll();
197     QBuffer buffer(&zipData);
198     // Open zip archive
199     QuaZip zip(&buffer);
200     if(!zip.open(QuaZip::mdUnzip))
201         return "";
202     // Find the desired file
203     if(!zip.setCurrentFile(info.fileName, QuaZip::csInsensitive))
204         return "";
205     QuaZipFile binFile(&zip);
206     if(!binFile.open(QIODevice::ReadOnly))
207         return "";
208     QByteArray binary = binFile.readAll();
209     // Check the hash
210     if(QCryptographicHash::hash(binary, QCryptographicHash::Sha256) != info.hash)
211         return "";
212     return binary;
213 }
```

Here is the call graph for this function:

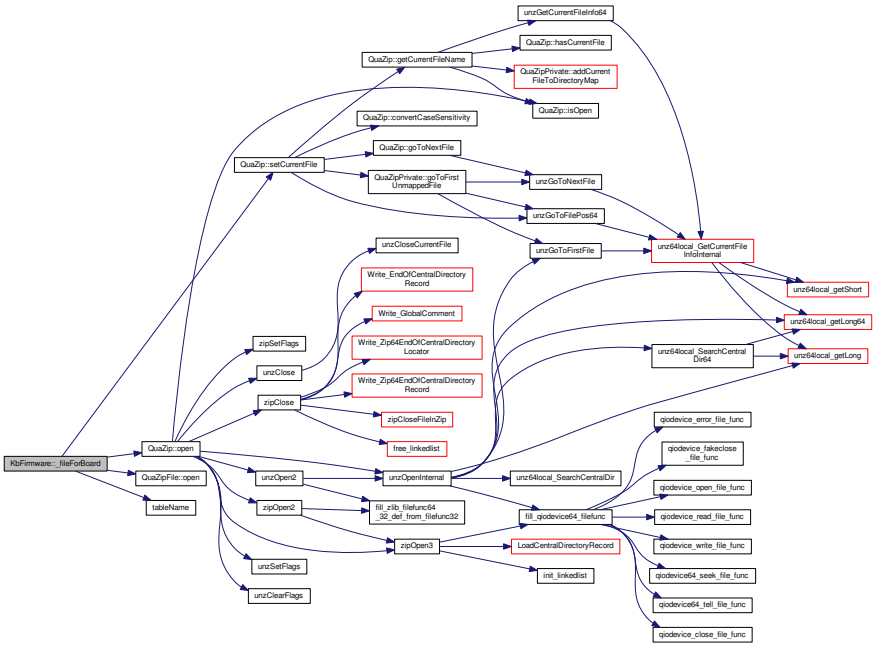

Here is the caller graph for this function:

12.28.4.3 float KbFirmware::_latestForBoard (const QString & *features*, bool *waitForComplete*) [private]

Definition at line 165 of file kbfirmware.cpp.

References checkUpdates(), KbManager::ckbDaemonVersionF(), KbManager::ckbGuiVersionF(), KbFirmware::FW::ckbVersion, downloaded(), fwTable, KbFirmware::FW::fwVersion, KbFirmware::FW::hash, tableDownload, and tableName().

Referenced by versionForBoard().

```
165                                                                                 {
166     if((tableDownload || checkUpdates()) && waitForComplete){
167         // If waiting is desired, enter an event loop and stay here until the download is finished
168         QEventLoop loop(this);
169         connect(this, SIGNAL(downloaded()), &loop, SLOT(quit()));
170         loop.exec();
171     }
172     // Find this board
173     QString name = tableName(features);
174     FW info = fwTable.value(name);
175     if(info.hash.isEmpty())
176         return 0.f;
177     // Don't return the new version if the current ckb doesn't support it
178     if(info.ckbVersion > KbManager::ckbGuiVersionF() || info.ckbVersion >
    KbManager::ckbDaemonVersionF())
179         return -1.f;
180     return info.fwVersion;
181 }
```

Here is the call graph for this function:



Here is the caller graph for this function:



12.28.4.4 static bool KbFirmware::checkUpdates ( ) [inline], [static]

Definition at line 15 of file kbfirmware.h.

References _checkUpdates(), and instance.

Referenced by _latestForBoard(), and MainWindow::timerTick().

```
15 { return instance._checkUpdates(); }
```

Here is the call graph for this function:



Here is the caller graph for this function:

12.28.4.5 static QByteArray KbFirmware::dataForBoard (const QString & *features*) [inline], [static]

Definition at line 25 of file kbfirmware.h.

References _fileForBoard(), and instance.

Referenced by FwUpgradeDialog::exec().

```
25 { return instance._fileForBoard(features); }
```

Here is the call graph for this function:

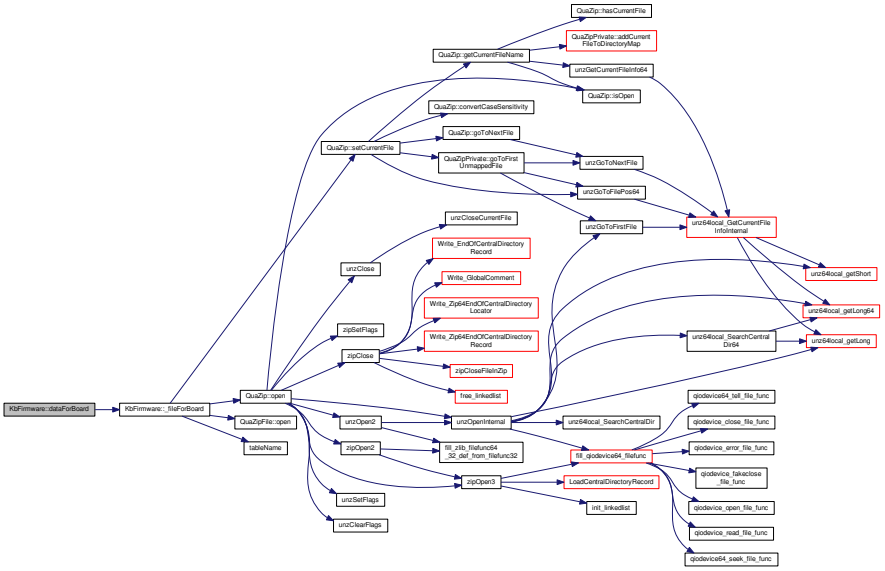

Here is the caller graph for this function:

12.28.4.6 void KbFirmware::downloaded ( ) [signal]

Definition at line 148 of file moc_kbfirmware.cpp.

Referenced by _latestForBoard(), and downloadFinished().

```
149 {
150     QMetaObject::activate(this, &staticMetaObject, 0, Q_NULLPTR);
151 }
```

Here is the caller graph for this function:

12.28.4.7 void KbFirmware::downloadFinished ( ) [private], [slot]

Definition at line 144 of file kbfirmware.cpp.

References downloaded(), processDownload(), and tableDownload.

Referenced by _checkUpdates().

```
144                                 {
145     if(!tableDownload)
146         return;
147     processDownload(tableDownload);
148     tableDownload->deleteLater();
149     tableDownload = 0;
150     emit downloaded();
151 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

12.28.4.8 static bool KbFirmware::hasDownloaded ( ) [inline], [static]

Definition at line 18 of file kbfirmware.h.

References instance, and lastFinished.

Referenced by KbWidget::on_fwUpdButton_clicked(), and KbWidget::updateFwButton().

```
18 { return instance.lastFinished != 0; }
```

Here is the caller graph for this function:



12.28.4.9 void KbFirmware::initManager ( ) [private]

Definition at line 24 of file kbfirmware.cpp.

References networkManager.

Referenced by _checkUpdates().

```
24                                 {
25     if(networkManager)
26         return;
27     networkManager = new QNetworkAccessManager();
28 }
```

Here is the caller graph for this function:

12.28.4.10 void KbFirmware::processDownload (QNetworkReply * *reply*) [private],[slot]

Definition at line 44 of file kbfirmware.cpp.

References KbFirmware::FW::ckbVersion, KbFirmware::FW::fileName, fwTable, fwTableHash, KbFirmware::FW::fwVersion, hasGPG, KbFirmware::FW::hash, lastCheck, lastFinished, NO, KbManager::parseVersionString(), UNKNOWN, KbFirmware::FW::url, and YES.

Referenced by downloadFinished().

```
44                                                  {
45     if(reply->error() != QNetworkReply::NoError)
46         return;
47     // Update last check
48     lastCheck = lastFinished = QDateTime::currentMSecsSinceEpoch();
49     QByteArray data = reply->readAll();
50     // Don't do anything if this is the same as the last version downloaded
51     QByteArray hash = QCryptographicHash::hash(data, QCryptographicHash::Sha256);
52     if(hash == fwTableHash)
53         return;
54     fwTableHash = hash;
55     if(hasGPG == UNKNOWN){
56         // Check for a GPG installation
57         QProcess gpg;
58         gpg.start("gpg", QStringList("--version"));
59         gpg.waitForFinished();
60         if(gpg.error() == QProcess::FailedToStart)
61             // No GPG install
62             hasGPG = NO;
63         else {
64             QString output = QString::fromUtf8(gpg.readAll());
65             // Must support RSA keys and SHA256
66             if(output.contains("RSA", Qt::CaseInsensitive) && output.contains("SHA256", Qt::CaseInsensitive
    ))
67                 hasGPG = YES;
68             else
69                 hasGPG = NO;
70         }
71         if(!hasGPG)
72             qDebug() << "No GPG detected, signature verification disabled";
73     }
74     if(hasGPG){
75         // If GPG is available, check the signature on the file before proceeding.
76         QDir tmp = QDir::temp();
77         // Save file to a temporary path. Include PID to avoid conflicts
78         qint64 pid = QCoreApplication::applicationPid();
79         QString fwPath = tmp.absoluteFilePath(QString("ckb-%1-firmware").arg(pid));
80         QFile firmware(fwPath);
81         if(!firmware.open(QIODevice::WriteOnly)
82                 || firmware.write(data) != data.length()){
83             qDebug() << "Failed to write firmware file to temporary location, aborting firmware check";
84             return;
85         }
86         firmware.close();
87         // Write GPG key
88         QString keyPath = tmp.absoluteFilePath(QString("ckb-%1-key.gpg").arg(pid));
89         if(!QFile::copy(":/bin/ckb-next-key.gpg", keyPath)){
90             firmware.remove();
91             qDebug() << "Failed to write GPG key to temporary location, aborting firmware check";
92             return;
93         }
94         // Check signature
95         QProcess gpg;
96         gpg.start("gpg", QStringList("--no-default-keyring") << "--keyring" << keyPath << "--verify" <<
    fwPath);
97         gpg.waitForFinished();
98         // Clean up temp files
99         tmp.remove(fwPath);
100         tmp.remove(keyPath);
```

```
101         if(gpg.error() != QProcess::UnknownError || gpg.exitCode() != 0){
102             qDebug() << "GPG couldn't verify firmware signature:";
103             qDebug() << gpg.readAllStandardOutput();
104             qDebug() << gpg.readAllStandardError();
105             return;
106         }
107         // Signature good, proceed to update database
108     }
109     fwTable.clear();
110     QStringList lines = QString::fromUtf8(data).split("\n");
111     bool scan = false;
112     foreach(QString line, lines){
113         // Collapse whitespace
114         line.replace(QRegExp("\\s+"), " ").remove(QRegExp("^\\s")).remove(QRegExp("\\s$"));
115         // Skip empty or commented-out lines
116         if(line.length() == 0 || line.at(0) == '#')
117             continue;
118         // Don't read anything until the entries begin and don't read anything after they end
119         if(!scan){
120             if(line == "!BEGIN FW ENTRIES")
121                 scan = true;
122             else
123                 continue;
124         }
125         if(line == "!END FW ENTRIES")
126             break;
127         QStringList components = line.split(" ");
128         if(components.length() != 7)
129             continue;
130         // "VENDOR-PRODUCT"
131         QString device = components[0].toUpper() + "-" + components[1].toUpper();
132         FW fw;
133         fw.fwVersion = components[2].toFloat();                              // Firmware blob version
134         fw.url = QUrl::fromPercentEncoding(components[3].toLatin1());        // URL to zip file
135         fw.ckbVersion = KbManager::parseVersionString(components[4]);        //
    Minimum ckb version
136         fw.fileName = QUrl::fromPercentEncoding(components[5].toLatin1());   // Name of file inside zip
137         fw.hash = QByteArray::fromHex(components[6].toLatin1());             // SHA256 of file inside zip
138         // Update entry
139         fwTable[device] = fw;
140     }
141     qDebug() << "Downloaded new firmware list." << fwTable.count() << "entries found.";
142 }
```

Here is the call graph for this function:

Here is the caller graph for this function:



12.28.4.11 static float KbFirmware::versionForBoard (const QString & *features*, bool *waitForComplete* = `false`) [inline], [static]

Definition at line 22 of file kbfirmware.h.

References _latestForBoard(), and instance.

Referenced by MainWindow::checkFwUpdates(), KbWidget::on_fwUpdButton_clicked(), and KbWidget::updateFwButton().

```
22 { return instance._latestForBoard(features, waitForComplete); }
```

Here is the call graph for this function:



Here is the caller graph for this function:



12.28.5 Field Documentation

12.28.5.1 QMap<QString, FW> KbFirmware::fwTable [private]

Definition at line 41 of file kbfirmware.h.

Referenced by _fileForBoard(), _latestForBoard(), and processDownload().

12.28.5.2 QByteArray KbFirmware::fwTableHash [private]

Definition at line 43 of file kbfirmware.h.

Referenced by processDownload().

12.28.5.3 enum { ... } KbFirmware::hasGPG [private]

Referenced by processDownload().

12.28.5.4 KbFirmware KbFirmware::instance [static], [private]

Definition at line 59 of file kbfirmware.h.

Referenced by checkUpdates(), dataForBoard(), hasDownloaded(), and versionForBoard().

12.28.5.5 quint64 KbFirmware::lastCheck [private]

Definition at line 32 of file kbfirmware.h.

Referenced by _checkUpdates(), and processDownload().

12.28.5.6 quint64 KbFirmware::lastFinished [private]

Definition at line 32 of file kbfirmware.h.

Referenced by hasDownloaded(), and processDownload().

12.28.5.7 QNetworkAccessManager* KbFirmware::networkManager [private]

Definition at line 47 of file kbfirmware.h.

Referenced by _checkUpdates(), _fileForBoard(), and initManager().

12.28.5.8 QNetworkReply* KbFirmware::tableDownload [private]

Definition at line 50 of file kbfirmware.h.

Referenced by _checkUpdates(), _latestForBoard(), and downloadFinished().

The documentation for this class was generated from the following files:

- src/ckb/kbfirmware.h
- src/ckb/kbfirmware.cpp
- src/ckb/release/moc_kbfirmware.cpp

12.29 KbLight Class Reference

`#include <src/ckb/kblight.h>`

Inheritance diagram for KbLight:

Collaboration diagram for KbLight:

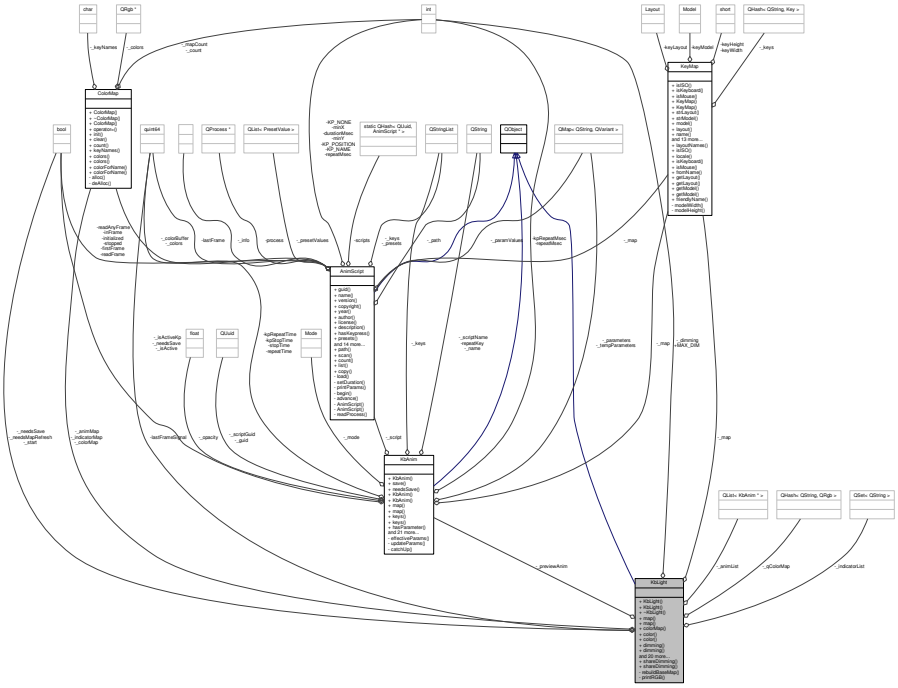

Public Types

- typedef QList< KbAnim * > AnimList

Signals

- void didLoad ()
- void updated ()
- void frameDisplayed (const ColorMap &animatedColors, const QSet< QString > &indicatorList)

Public Member Functions

- KbLight (KbMode *parent, const KeyMap &keyMap)
- KbLight (KbMode *parent, const KeyMap &keyMap, const KbLight &other)
- ~KbLight ()
- const KeyMap & map ()
- void map (const KeyMap &map)
- const QColorMap & colorMap ()
- void color (const QString &key, const QColor &newColor)
- void color (const QColor &newColor)
- int dimming ()
- void dimming (int newDimming)
- KbAnim * addAnim (const AnimScript *base, const QStringList &keys, const QString &name, const QMap< QString, QVariant > &preset)
- KbAnim * duplicateAnim (KbAnim *oldAnim)
- const AnimList & animList ()
- void animList (const AnimList &newAnimList)
- KbAnim * findAnim (const QUuid &guid) const

- int findAnimIdx (const QUuid &guid) const
- void previewAnim (const AnimScript *base, const QStringList &keys, const QMap< QString, QVariant > &preset)
- void stopPreview ()
- void restartAnimation ()
- void animKeypress (const QString &key, bool down)
- void open ()
- bool isStarted ()
- void close ()
- void resetIndicators ()
- void setIndicator (const char *name, QRgb argb)
- void frameUpdate (QFile &cmd, bool monochrome=false)
- void base (QFile &cmd, bool ignoreDim=false, bool monochrome=false)
- void load (CkbSettings &settings)
- void save (CkbSettings &settings)
- bool needsSave () const

Static Public Member Functions

- static int shareDimming ()
- static void shareDimming (int newShareDimming)

Static Public Attributes

- static const int MAX_DIM = 3

Private Member Functions

- void rebuildBaseMap ()
- void printRGB (QFile &cmd, const ColorMap &animMap)

Private Attributes

- AnimList _animList
- KbAnim * _previewAnim
- KeyMap _map
- QColorMap _qColorMap
- ColorMap _colorMap
- ColorMap _animMap
- ColorMap _indicatorMap
- QSet< QString > _indicatorList
- quint64 lastFrameSignal
- int _dimming
- bool _start
- bool _needsSave
- bool _needsMapRefresh

12.29.1 Detailed Description

Definition at line 17 of file kblight.h.

12.29.2 Member Typedef Documentation

12.29.2.1 typedef QList<KbAnim*> KbLight::AnimList

Definition at line 46 of file kblight.h.

12.29.3 Constructor & Destructor Documentation

12.29.3.1 KbLight::KbLight (KbMode * *parent*, const KeyMap & *keyMap*)

Definition at line 10 of file kblight.cpp.

References map().

```
10                                                      :
11     QObject(parent), _previewAnim(0), lastFrameSignal(0),
       _dimming(0), _start(false), _needsSave(true),
       _needsMapRefresh(true)
12 {
13     map(keyMap);
14 }
```

Here is the call graph for this function:



12.29.3.2 KbLight::KbLight (KbMode * *parent*, const KeyMap & *keyMap*, const KbLight & *other*)

Definition at line 16 of file kblight.cpp.

References _animList, and map().

```
16                                                                                  :
17     QObject(parent), _previewAnim(0), _map(other._map),
       _qColorMap(other._qColorMap), lastFrameSignal(0),
       _dimming(other._dimming), _start(false), _needsSave(true),
       _needsMapRefresh(true)
18 {
19     map(keyMap);
20     // Duplicate animations
21     foreach(KbAnim* animation, other._animList)
22         _animList.append(new KbAnim(this, keyMap, *animation));
23 }
```

Here is the call graph for this function:



12.29.3.3 KbLight::~KbLight ( )

Definition at line 45 of file kblight.cpp.

References activeLights.

```
45                  {
46      activeLights.remove(this);
47  }
```

12.29.4 Member Function Documentation

12.29.4.1 KbAnim * KbLight::addAnim (const AnimScript * *base*, const QStringList & *keys*, const QString & *name*, const QMap< QString, QVariant > & *preset*)

Definition at line 100 of file kblight.cpp.

References _animList, _map, _needsSave, _start, KbAnim::commitParams(), KbAnim::parameter(), KbAnim::stop(), stopPreview(), and KbAnim::trigger().

Referenced by KbAnimWidget::addAnim().

```
100
                                {
101     // Stop and restart all existing animations
102     stopPreview();
103     quint64 timestamp = QDateTime::currentMSecsSinceEpoch();
104     foreach(KbAnim* anim, _animList){
105         anim->stop();
106         anim->trigger(timestamp);
107     }
108     // Load the new animation and set preset parameters
109     KbAnim* anim = new KbAnim(this, _map, name, keys, base);
110     QMapIterator<QString, QVariant> i(preset);
111     while(i.hasNext()){
112         i.next();
113         anim->parameter(i.key(), i.value());
114     }
115     anim->commitParams();
116     // Add the animation and start it
117     _animList.append(anim);
118     anim->trigger(timestamp);
119     _start = true;
120     _needsSave = true;
121     return anim;
122 }
```

Here is the call graph for this function:

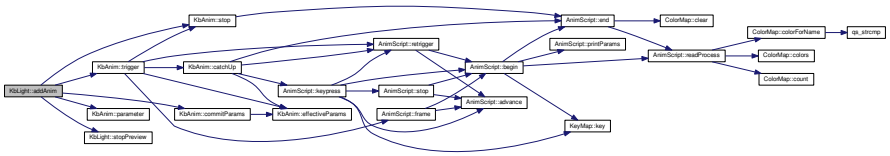

Here is the caller graph for this function:

12.29.4.2 void KbLight::animKeypress (const QString & *key*, bool *down*)

Definition at line 189 of file kblight.cpp.

References _animList, _previewAnim, KbAnim::keypress(), and KbAnim::keys().

Referenced by Kb::readNotify().

```
189                                                                 {
190     foreach(KbAnim* anim, _animList){
191         if(anim->keys().contains(key))
192             anim->keypress(key, down, QDateTime::currentMSecsSinceEpoch());
193     }
194     if(_previewAnim){
195         if(_previewAnim->keys().contains(key))
196             _previewAnim->keypress(key, down, QDateTime::currentMSecsSinceEpoch());
197     }
198 }
```

Here is the call graph for this function:

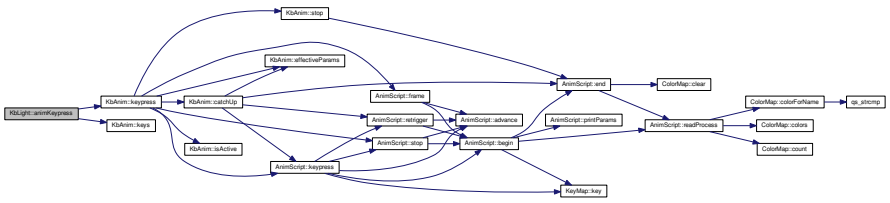

Here is the caller graph for this function:



12.29.4.3 const AnimList& KbLight::animList ( ) [inline]

Definition at line 49 of file kblight.h.

References _animList.

Referenced by RebindWidget::applyChanges(), KbAnimWidget::duplicateAnim(), KbMode::newId(), KbAnimWidget::on_deleteButton_clicked(), KbAnimWidget::refreshList(), KbAnimWidget::reorderAnims(), and RebindWidget::setSelection().

```
49 { return _animList; }
```

Here is the caller graph for this function:

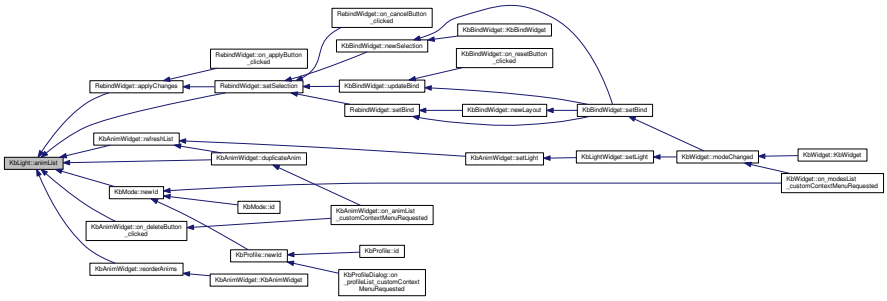

12.29.4.4 void KbLight::animList (const AnimList & *newAnimList*) [inline]

Definition at line 50 of file kblight.h.

References _animList, and _needsSave.

```
50 { _needsSave = true; _animList = newAnimList; }
```

12.29.4.5 void KbLight::base (QFile & *cmd*, bool *ignoreDim* = false, bool *monochrome* = false)

Definition at line 371 of file kblight.cpp.

References _animMap, _colorMap, _dimming, close(), ColorMap::colorForName(), ColorMap::colors(), ColorMap::count(), MAX_DIM, monoRgb(), printRGB(), and rebuildBaseMap().

Referenced by Kb::hwSave().

```
371                                                    {
372     close();
373     if(_dimming == MAX_DIM && !ignoreDim){
374         cmd.write(QString().sprintf("rgb 000000").toLatin1());
375         return;
376     }
377     // Set just the background color, ignoring any animation
378     rebuildBaseMap();
379     _animMap = _colorMap;
380     // If monochrome is active, create grayscale
381     if(monochrome){
382         int count = _animMap.count();
383         QRgb* colors = _animMap.colors();
384         for(int i = 0; i < count; i++){
385             QRgb& rgb = colors[i];
386             rgb = monoRgb(qRed(rgb), qGreen(rgb), qBlue(rgb));
387         }
388     }
389     // Set a few indicators to black as the hardware handles them differently
390     QRgb* mr = _animMap.colorForName("mr"), *m1 = _animMap.
      colorForName("m1"), *m2 = _animMap.colorForName("m2"), *m3 =
      _animMap.colorForName("m3"), *lock = _animMap.
      colorForName("lock");
391     if(mr) *mr = 0;
392     if(m1) *m1 = 0;
393     if(m2) *m2 = 0;
394     if(m3) *m3 = 0;
395     if(lock) *lock = 0;
396     // Send to driver
397     cmd.write("rgb");
398     printRGB(cmd, _animMap);
399 }
```

Here is the call graph for this function:

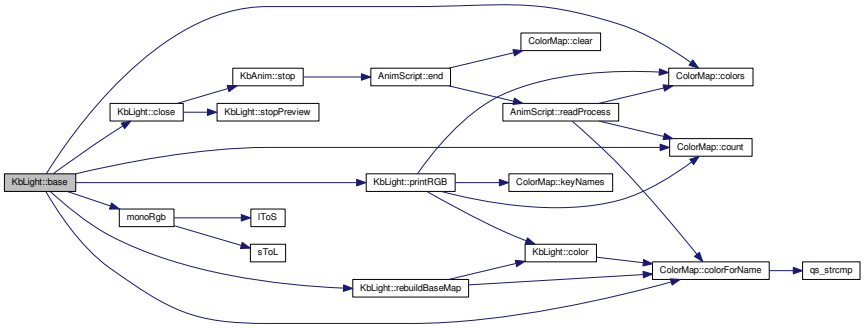

Here is the caller graph for this function:

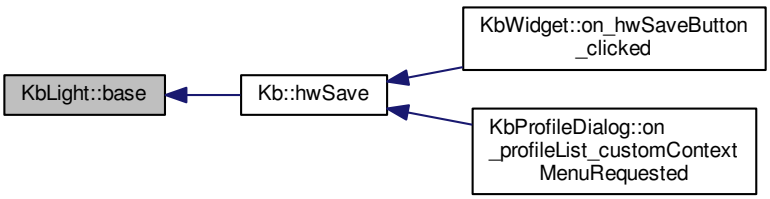

12.29.4.6 void KbLight::close ( )

Definition at line 215 of file kblight.cpp.

References _animList, _start, activeLights, KbAnim::stop(), and stopPreview().

Referenced by base(), Kb::frameUpdate(), Kb::hwSave(), and Kb::updateLayout().

```
215                     {
216     activeLights.remove(this);
217     foreach(KbAnim* anim, _animList)
218         anim->stop();
219     stopPreview();
220     _start = false;
221 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

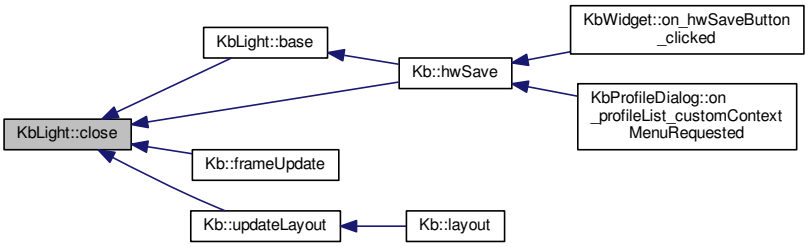

12.29.4.7 void KbLight::color (const QString & *key*, const QColor & *newColor*)

Definition at line 49 of file kblight.cpp.

References _colorMap, _needsMapRefresh, _needsSave, _qColorMap, and ColorMap::colorForName().

Referenced by KbLightWidget::changeColor(), load(), printRGB(), Kb::readNotify(), rebuildBaseMap(), and KbLightWidget::toggleSidelight().

```
49                                                                  {
50     QRgb newRgb = newColor.rgb();
51     _qColorMap[key] = newRgb;
52     _needsSave = true;
53     if(!_needsMapRefresh){
54         // Update flat map if we're not scheduled to rebuild it
55         QByteArray rawName = key.toLatin1();
56         QRgb* rawRgb = _colorMap.colorForName(rawName.data());
57         if(rawRgb)
58             *rawRgb = newRgb;
59     }
60 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

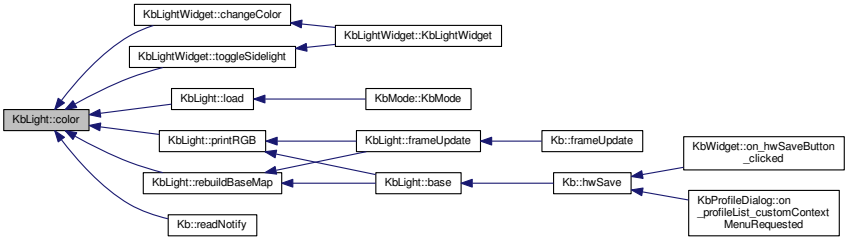

12.29.4.8 void KbLight::color (const QColor & *newColor*)

Definition at line 62 of file kblight.cpp.

References _colorMap, _needsMapRefresh, _needsSave, _qColorMap, ColorMap::colors(), and ColorMap::count().

```
62                                          {
63     QRgb newRgb = newColor.rgb();
64     QMutableColorMapIterator i(_qColorMap);
65     while(i.hasNext()){
66         i.next();
67         i.value() = newRgb;
68     }
69     _needsSave = true;
70     // Reset flat map
71     _needsMapRefresh = false;
72     int mapCount = _colorMap.count();
73     QRgb* flat = _colorMap.colors();
74     for(int i = 0; i < mapCount; i++)
75         flat[i] = mapCount;
76 }
```

Here is the call graph for this function:

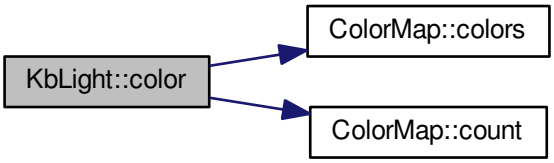

12.29.4.9 const QColorMap& KbLight::colorMap ( ) [inline]

Definition at line 31 of file kblight.h.

References _qColorMap.

Referenced by KbLightWidget::changeColor(), KbLightWidget::newSelection(), KbLightWidget::toggleSidelight(), and KbLightWidget::updateLight().

```
31 { return _qColorMap; }
```

Here is the caller graph for this function:

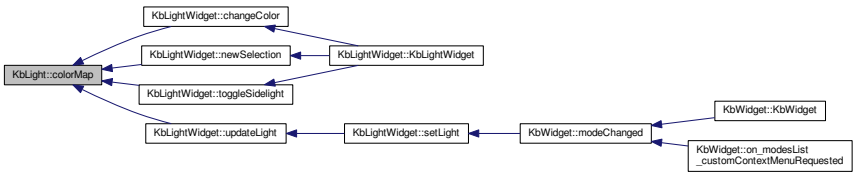

12.29.4.10 void KbLight::didLoad ( ) [signal]

Definition at line 162 of file moc_kblight.cpp.

Referenced by load().

```
163 {
164     QMetaObject::activate(this, &staticMetaObject, 0, Q_NULLPTR);
165 }
```

Here is the caller graph for this function:

12.29.4.11 int KbLight::dimming ( ) [inline]

Definition at line 39 of file kblight.h.

References _dimming.

Referenced by KeyAction::keyEvent(), KbLightWidget::on_brightnessBox_activated(), open(), shareDimming(), and KbLightWidget::updateLight().

```
39 { return _dimming; }
```

Here is the caller graph for this function:

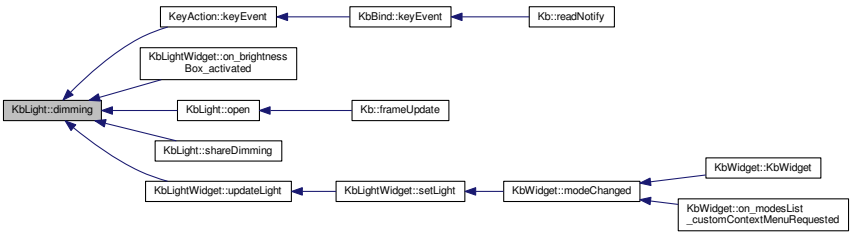

12.29.4.12 void KbLight::dimming (int *newDimming*)

Definition at line 92 of file kblight.cpp.

References _dimming, _needsSave, _shareDimming, shareDimming(), and updated().

```
92                                  {
93     if(_shareDimming != -1)
94         shareDimming(newDimming);
95     _needsSave = true;
96     _dimming = newDimming;
97     emit updated();
98 }
```

Here is the call graph for this function:



12.29.4.13 KbAnim * KbLight::duplicateAnim (KbAnim * *oldAnim*)

Definition at line 148 of file kblight.cpp.

References _animList, _map, _needsSave, _start, KbAnim::newId(), KbAnim::stop(), and KbAnim::trigger().

Referenced by KbAnimWidget::duplicateAnim().

```
148                                          {
149     // Stop and restart all existing animations
150     quint64 timestamp = QDateTime::currentMSecsSinceEpoch();
151     foreach(KbAnim* anim, _animList){
152         anim->stop();
153         anim->trigger(timestamp);
154     }
155     // Same as addAnim, just duplicate the existing one
156     KbAnim* anim = new KbAnim(this, _map, *oldAnim);
157     anim->newId();
158     int index = _animList.indexOf(oldAnim);
159     if(index < 0)
160         _animList.append(anim);
161     else
162         _animList.insert(index + 1, anim);
163     anim->trigger(timestamp);
164     _start = true;
165     _needsSave = true;
166     return anim;
167 }
```

Here is the call graph for this function:

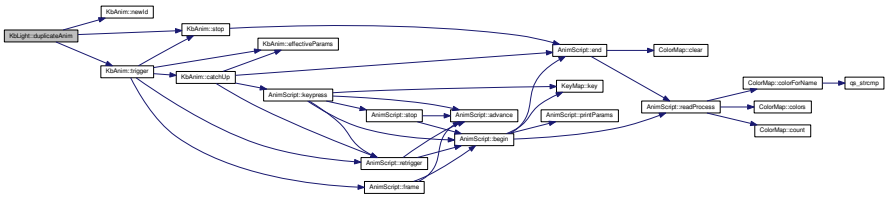

Here is the caller graph for this function:



12.29.4.14 KbAnim* KbLight::findAnim (const QUuid & *guid*) const [inline]

Definition at line 51 of file kblight.h.

References _animList, and KbAnim::guid().

Referenced by findAnimIdx(), and KeyAction::keyEvent().

```
51 { foreach(KbAnim* anim, _animList) { if(anim->guid() == guid) return anim; } return 0; }
```

Here is the call graph for this function:



Here is the caller graph for this function:

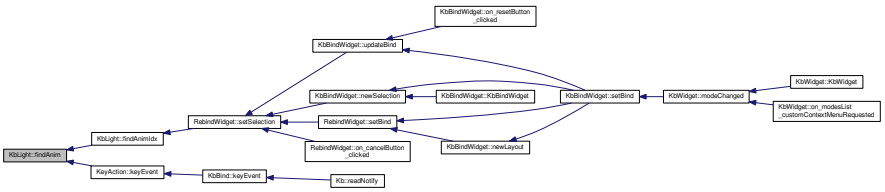

12.29.4.15 int KbLight::findAnimIdx (const QUuid & *guid*) const [inline]

Definition at line 52 of file kblight.h.

References _animList, and findAnim().

Referenced by RebindWidget::setSelection().

```
52 { return _animList.indexOf(findAnim(guid)); }
```

Here is the call graph for this function:



Here is the caller graph for this function:

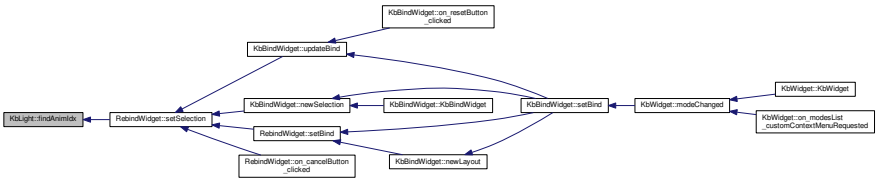

12.29.4.16 void KbLight::frameDisplayed (const ColorMap & *animatedColors,* const QSet< QString > & *indicatorList*) [signal]

Definition at line 174 of file moc_kblight.cpp.

Referenced by frameUpdate().

```
175 {
176     void *_a[] = { Q_NULLPTR, const_cast<void*>(reinterpret_cast<const void*>(&_t1)), const_cast<void*>(
    reinterpret_cast<const void*>(&_t2)) };
177     QMetaObject::activate(this, &staticMetaObject, 2, _a);
178 }
```

Here is the caller graph for this function:

12.29.4.17 void KbLight::frameUpdate (QFile & *cmd,* bool *monochrome* = false)

Definition at line 296 of file kblight.cpp.

References _animList, _animMap, _colorMap, _dimming, _indicatorList, _indicatorMap, _previewAnim, KbAnim::blend(), ColorMap::colors(), ColorMap::count(), frameDisplayed(), lastFrameSignal, IToS(), monoRgb(), printRGB(), rebuildBaseMap(), and sToL().

Referenced by Kb::frameUpdate().

```
296                                                 {
297     rebuildBaseMap();
298     _animMap = _colorMap;
299     // Advance animations
300     quint64 timestamp = QDateTime::currentMSecsSinceEpoch();
301     foreach(KbAnim* anim, _animList)
302         anim->blend(_animMap, timestamp);
303     if(_previewAnim)
304         _previewAnim->blend(_animMap, timestamp);
305 
306     int count = _animMap.count();
307     QRgb* colors = _animMap.colors();
308     // Apply active indicators and/or perform monochrome conversion
309     if(monochrome || !_indicatorList.isEmpty()){
310         QRgb* indicators = _indicatorMap.colors();
311         for(int i = 0; i < count; i++){
312             QRgb& rgb = colors[i];
313             float r = qRed(rgb);
314             float g = qGreen(rgb);
```

```
315             float b = qBlue(rgb);
316             // Apply indicators
317             QRgb rgb2 = indicators[i];
318             if(qAlpha(rgb2) != 0){
319                 float r2 = qRed(rgb2);
320                 float g2 = qGreen(rgb2);
321                 float b2 = qBlue(rgb2);
322                 float a2 = qAlpha(rgb2) / 255.f;
323                 r = round(r2 * a2 + r * (1.f - a2));
324                 g = round(g2 * a2 + g * (1.f - a2));
325                 b = round(b2 * a2 + b * (1.f - a2));
326             }
327             // If monochrome mode is active, average the channels to get a grayscale image
328             if(monochrome)
329                 rgb = monoRgb(r, g, b);
330             else
331                 rgb = qRgb(r, g, b);
332         }
333     }
334
335     // Emit signals for the animation (only do this every 50ms - it can cause a lot of CPU usage)
336     if(timestamp >= lastFrameSignal + 50){
337         emit frameDisplayed(_animMap, _indicatorList);
338         lastFrameSignal = timestamp;
339     }
340
341     // If brightness is at 0%, turn off lighting entirely
342     if(_dimming == 3){
343         cmd.write("rgb 000000");
344         return;
345     }
346
347     float light = (3 - _dimming) / 3.f;
348     // Apply global dimming
349     if(light != 1.f || monochrome){
350         for(int i = 0; i < count; i++){
351             QRgb& rgb = colors[i];
352             // Like the monochrome conversion, this should be done in a linear colorspace
353             float r = sToL(qRed(rgb));
354             float g = sToL(qGreen(rgb));
355             float b = sToL(qBlue(rgb));
356             r *= light;
357             g *= light;
358             b *= light;
359             r = round(lToS(r));
360             g = round(lToS(g));
361             b = round(lToS(b));
362             rgb = qRgb(r, g, b);
363         }
364     }
365
366     // Apply light
367     cmd.write("rgb");
368     printRGB(cmd, _animMap);
369 }
```

Here is the call graph for this function:

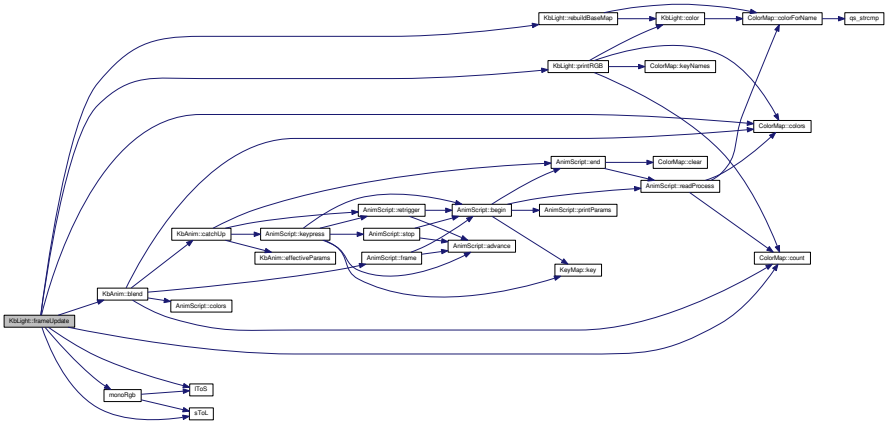

Here is the caller graph for this function:



12.29.4.18 bool KbLight::isStarted ( )

Definition at line 169 of file kblight.cpp.

References _animList, _start, and KbAnim::isRunning().

Referenced by Kb::frameUpdate().

```
169                         {
170     if(!_start)
171         return false;
172     foreach(KbAnim* animation, _animList){
173         if(!animation->isRunning())
174             return false;
175     }
176     return true;
177 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

12.29.4.19 void KbLight::load (CkbSettings & *settings*)

Definition at line 401 of file kblight.cpp.

References _animList, _dimming, _map, _needsMapRefresh, _needsSave, _qColorMap, CkbSettings::childKeys(), color(), didLoad(), KeyMap::fromName(), KeyMap::fromStorage(), map(), MAX_DIM, and CkbSettings::value().

Referenced by KbMode::KbMode().

```
401                                     {
402     // Load light settings
403     _needsSave = false;
404     SGroup group(settings, "Lighting");
405     KeyMap currentMap = _map;
406     _map = KeyMap::fromName(settings.value("KeyMap").toString());
407     _dimming = settings.value("Brightness").toUInt();
408     if(_dimming > MAX_DIM)
409         _dimming = MAX_DIM;
410     // Load RGB settings
411     bool useReal = settings.value("UseRealNames").toBool();
412     {
413         SGroup group(settings, "Keys");
414         foreach(QString key, settings.childKeys()){
415             QString name = key.toLower();
416             if(!useReal)
417                 name = _map.fromStorage(name);
418             QColor color = settings.value(key).toString();
419             if(!color.isValid())
420                 color = QColor(255, 255, 255);
421             _qColorMap[name] = color.rgb();
422         }
423         _needsMapRefresh = true;
424     }
425     // Load animations
426     foreach(KbAnim* anim, _animList)
427         anim->deleteLater();
428     _animList.clear();
429     {
430         SGroup group(settings, "Animations");
431         foreach(QString anim, settings.value("List").toStringList()){
432             QUuid id = anim;
433             _animList.append(new KbAnim(this, _map, id, settings));
434         }
435     }
436     emit didLoad();
437     map(currentMap);
438 }
```

Here is the call graph for this function:

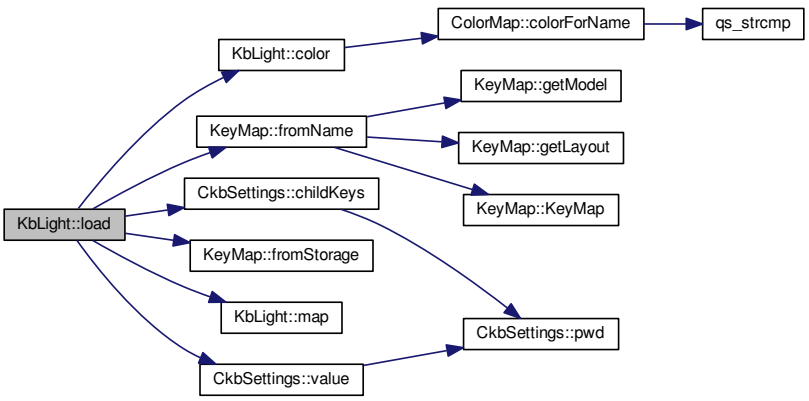

Here is the caller graph for this function:



12.29.4.20 const KeyMap& KbLight::map ( ) [inline]

Definition at line 28 of file kblight.h.

References _map.

Referenced by KbLight(), KbMode::keyMap(), load(), map(), KbLightWidget::newSelection(), KbAnimWidget::on_keyButton_clicked(), and KbLightWidget::updateLight().

```
28 { return _map; }
```

Here is the caller graph for this function:

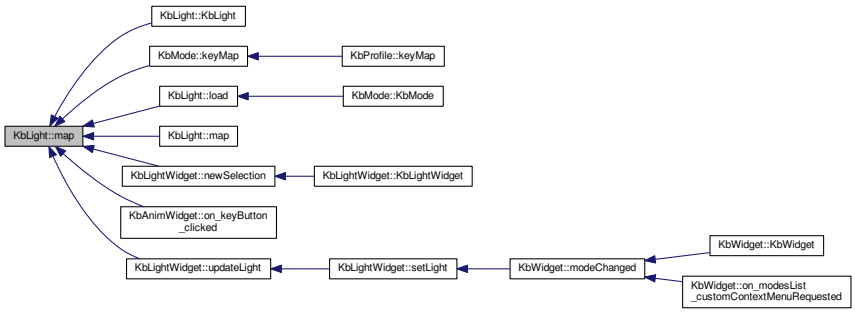

12.29.4.21 void KbLight::map (const KeyMap & *map*)

Definition at line 25 of file kblight.cpp.

References _animList, _animMap, _colorMap, _indicatorMap, _map, _needsMapRefresh, _needsSave, _qColorMap, ColorMap::init(), map(), KbAnim::map(), and updated().

```
25                                  {
26     // If any of the keys are missing from the color map, set them to white
27     QHashIterator<QString, Key> i(map);
28     while(i.hasNext()){
29         i.next();
30         const QString& key = i.key();
31         if(!_qColorMap.contains(key))
32             _qColorMap[key] = 0xFFFFFFFF;
33     }
34     // Set the new map
35     _map = map;
36     foreach(KbAnim* anim, _animList)
37         anim->map(map);
38     _colorMap.init(_map);
```

```
39     _animMap.init(_map);
40     _indicatorMap.init(_map);
41     _needsSave = _needsMapRefresh = true;
42     emit updated();
43 }
```

Here is the call graph for this function:

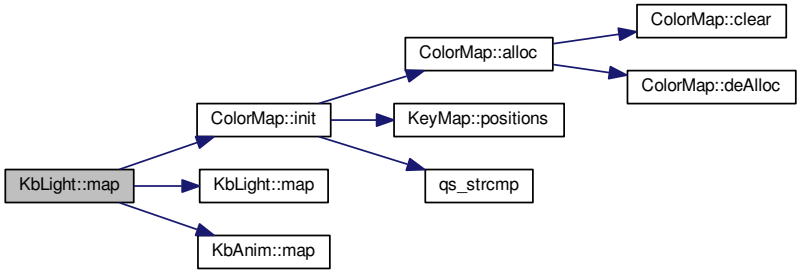

12.29.4.22 bool KbLight::needsSave ( ) const

Definition at line 467 of file kblight.cpp.

References _animList, _needsSave, and KbAnim::needsSave().

Referenced by KbMode::needsSave().

```
467                                {
468     if(_needsSave)
469         return true;
470     foreach(KbAnim* anim, _animList){
471         if(anim->needsSave())
472             return true;
473     }
474     return false;
475 }
```

Here is the call graph for this function:

Here is the caller graph for this function:

12.29.4.23 void KbLight::open ( )

Definition at line 200 of file kblight.cpp.

References _animList, _dimming, _previewAnim, _shareDimming, _start, activeLights, dimming(), and KbAnim::trigger().

Referenced by Kb::frameUpdate().

```
200                 {
201     // Apply shared dimming if needed
202     if(_shareDimming != -1 && _shareDimming !=
    _dimming)
203         dimming(_shareDimming);
204     activeLights.insert(this);
205     if(_start)
206         return;
207     quint64 timestamp = QDateTime::currentMSecsSinceEpoch();
208     foreach(KbAnim* anim, _animList)
209         anim->trigger(timestamp);
210     if(_previewAnim)
211         _previewAnim->trigger(timestamp);
212     _start = true;
213 }
```

Here is the call graph for this function:

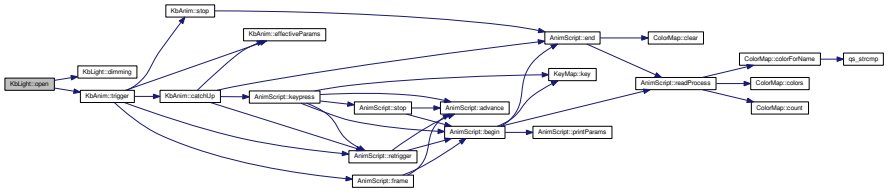

Here is the caller graph for this function:

12.29.4.24 void KbLight::previewAnim (const AnimScript * *base*, const QStringList & *keys*, const QMap< QString, QVariant > & *preset*)

Definition at line 124 of file kblight.cpp.

References _map, _previewAnim, _start, KbAnim::commitParams(), KbAnim::parameter(), KbAnim::reInit(), stopPreview(), and KbAnim::trigger().

Referenced by AnimAddDialog::on_presetBox_activated().

```
124
        {
125     if(_previewAnim)
126         stopPreview();
127     quint64 timestamp = QDateTime::currentMSecsSinceEpoch();
128     // Load the new animation and set preset parameters
```

```
129     KbAnim* anim = new KbAnim(this, _map, "", keys, base);
130     QMapIterator<QString, QVariant> i(preset);
131     while(i.hasNext()){
132         i.next();
133         anim->parameter(i.key(), i.value());
134     }
135     anim->commitParams();
136     anim->reInit();
137     // Add the animation and start it
138     _previewAnim = anim;
139     anim->trigger(timestamp);
140     _start = true;
141 }
```

Here is the call graph for this function:

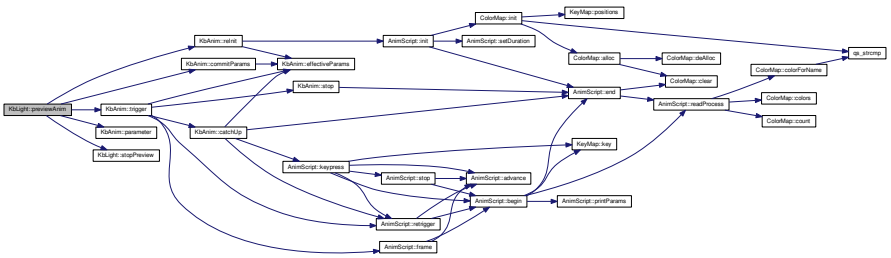

Here is the caller graph for this function:



12.29.4.25 void KbLight::printRGB (QFile & *cmd*, const ColorMap & *animMap*) [private]

Definition at line 223 of file kblight.cpp.

References color(), ColorMap::colors(), ColorMap::count(), and ColorMap::keyNames().

Referenced by base(), and frameUpdate().

```
223                                                     {
224     int count = animMap.count();
225     const char* const* names = animMap.keyNames();
226     const QRgb* colors = animMap.colors();
227     // Print each color and the corresponding RGB value
228     for(int i = 0; i < count; i++){
229         cmd.write(" ");
230         cmd.write(names[i]);
231         char output[8];
232         QRgb color = colors[i];
233         snprintf(output, sizeof(output), ":%02x%02x%02x", qRed(color), qGreen(color), qBlue(color));
234         cmd.write(output);
235     }
236 }
```

Here is the call graph for this function:

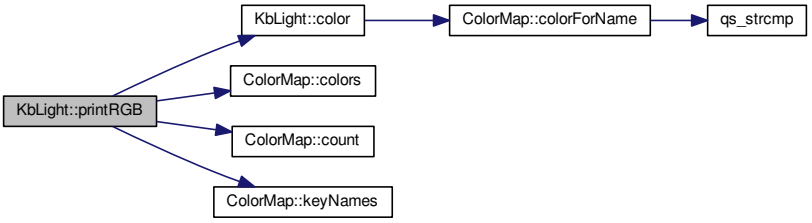

Here is the caller graph for this function:



12.29.4.26 void KbLight::rebuildBaseMap ( ) [private]

Definition at line 238 of file kblight.cpp.

References _colorMap, _needsMapRefresh, _qColorMap, color(), and ColorMap::colorForName().

Referenced by base(), and frameUpdate().

```
238                             {
239     if(!_needsMapRefresh)
240         return;
241     _needsMapRefresh = false;
242     // Copy RGB values from QColorMap to ColorMap
243     QColorMapIterator i(_qColorMap);
244     while(i.hasNext()){
245         i.next();
246         QByteArray rawName = i.key().toLatin1();
247         QRgb color = i.value();
248         QRgb* rawColor = _colorMap.colorForName(rawName.data());
249         if(rawColor)
250             *rawColor = color;
251     }
252 }
```

Here is the call graph for this function:



Here is the caller graph for this function:



12.29.4.27 void KbLight::resetIndicators ( )

Definition at line 254 of file kblight.cpp.

References _indicatorList, _indicatorMap, and ColorMap::clear().

Referenced by KbPerf::applyIndicators().

```
254                                {
255     _indicatorMap.clear();
256     _indicatorList.clear();
257 }
```

Here is the call graph for this function:



Here is the caller graph for this function:



12.29.4.28 void KbLight::restartAnimation ( )

Definition at line 179 of file kblight.cpp.

References _animList, _start, KbAnim::stop(), stopPreview(), and KbAnim::trigger().

Referenced by KbLightWidget::on_animButton_clicked(), KbAnimWidget::on_deleteButton_clicked(), KbAnimWidget::on_keyButton_clicked(), and KbAnimWidget::on_propertyButton_clicked().

```
179                                {
180     quint64 timestamp = QDateTime::currentMSecsSinceEpoch();
```

```
181     foreach(KbAnim* anim, _animList){
182         anim->stop();
183         anim->trigger(timestamp);
184     }
185     stopPreview();
186     _start = true;
187 }
```

Here is the call graph for this function:

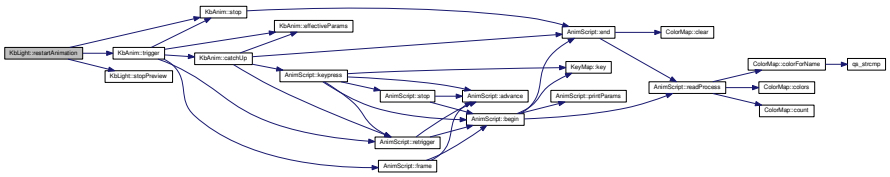

Here is the caller graph for this function:

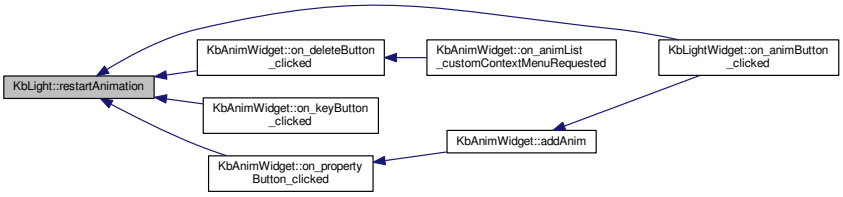

12.29.4.29 void KbLight::save (CkbSettings & *settings*)

Definition at line 440 of file kblight.cpp.

References _animList, _dimming, _map, _needsSave, _qColorMap, KbAnim::guid(), KeyMap::name(), KbAnim::save(), and CkbSettings::setValue().

Referenced by KbMode::save().

```
440                                     {
441     _needsSave = false;
442     SGroup group(settings, "Lighting");
443     settings.setValue("KeyMap", _map.name());
444     settings.setValue("Brightness", _dimming);
445     settings.setValue("UseRealNames", true);
446     {
447         // Save RGB settings
448         SGroup group(settings, "Keys");
449         QMutableColorMapIterator i(_qColorMap);
450         while(i.hasNext()){
451             i.next();
452             settings.setValue(i.key(), QColor(i.value()).name());
453         }
454     }
455     {
456         // Save animations
457         SGroup group(settings, "Animations");
458         QStringList aList;
459         foreach(KbAnim* anim, _animList){
460             aList << anim->guid().toString().toUpper();
461             anim->save(settings);
462         }
463         settings.setValue("List", aList);
464     }
465 }
```

Here is the call graph for this function:

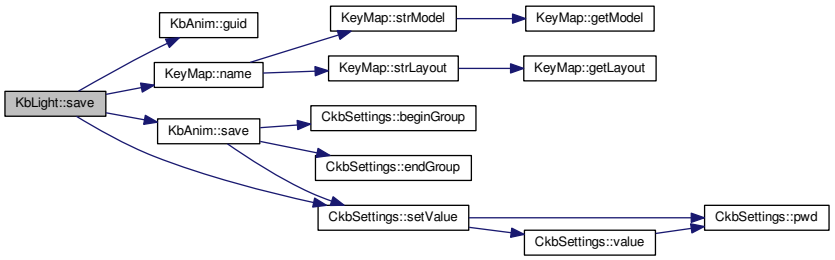

Here is the caller graph for this function:

12.29.4.30 void KbLight::setIndicator (const char * *name*, QRgb *argb*)

Definition at line 259 of file kblight.cpp.

References _indicatorList, _indicatorMap, and ColorMap::colorForName().

Referenced by KbPerf::lightIndicator().

```
259                                                 {
260     QRgb* dest = _indicatorMap.colorForName(name);
261     if(dest){
262         *dest = argb;
263         _indicatorList.insert(name);
264     }
265 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

12.29.4.31 int KbLight::shareDimming ( ) [static]

Definition at line 78 of file kblight.cpp.

References _shareDimming.

Referenced by dimming(), ExtraSettingsWidget::ExtraSettingsWidget(), ExtraSettingsWidget::on_brightnessBox_clicked(), and ExtraSettingsWidget::pollUpdates().

```
78                          {
79     return _shareDimming;
80 }
```

Here is the caller graph for this function:

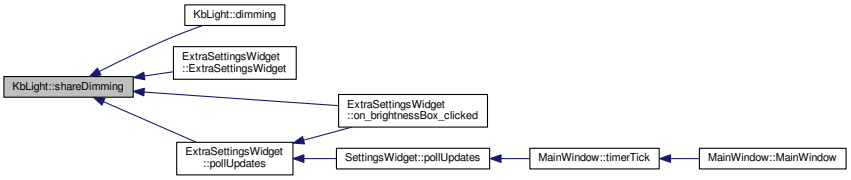

12.29.4.32 void KbLight::shareDimming (int *newShareDimming*) [static]

Definition at line 82 of file kblight.cpp.

References _shareDimming, activeLights, and dimming().

```
82                                          {
83     if(_shareDimming == newShareDimming)
84         return;
85     _shareDimming = newShareDimming;
86     if(newShareDimming != -1){
87         foreach(KbLight* light, activeLights)
88             light->dimming(newShareDimming);
89     }
90 }
```

Here is the call graph for this function:



12.29.4.33 void KbLight::stopPreview ( )

Definition at line 143 of file kblight.cpp.

References _previewAnim.

Referenced by addAnim(), close(), AnimAddDialog::on_previewBox_clicked(), previewAnim(), restartAnimation(), and AnimAddDialog::~AnimAddDialog().

```
143                         {
144     delete _previewAnim;
145     _previewAnim = 0;
146 }
```

Here is the caller graph for this function:

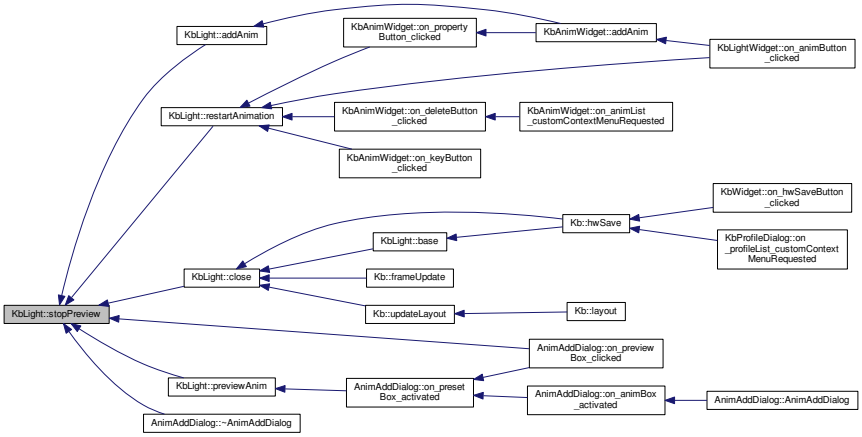

12.29.4.34 void KbLight::updated ( ) [signal]

Definition at line 168 of file moc_kblight.cpp.

Referenced by dimming(), and map().

```
169 {
170     QMetaObject::activate(this, &staticMetaObject, 1, Q_NULLPTR);
171 }
```

Here is the caller graph for this function:

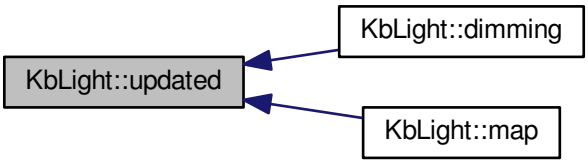

12.29.5 Field Documentation

12.29.5.1 AnimList KbLight::_animList [private]

Definition at line 89 of file kblight.h.

Referenced by addAnim(), animKeypress(), animList(), close(), duplicateAnim(), findAnim(), findAnimIdx(), frameUpdate(), isStarted(), KbLight(), load(), map(), needsSave(), open(), restartAnimation(), and save().

12.29.5.2 ColorMap KbLight::_animMap [private]

Definition at line 93 of file kblight.h.

Referenced by base(), frameUpdate(), and map().

12.29.5.3 ColorMap KbLight::_colorMap [private]

Definition at line 93 of file kblight.h.

Referenced by base(), color(), frameUpdate(), map(), and rebuildBaseMap().

12.29.5.4 int KbLight::_dimming [private]

Definition at line 96 of file kblight.h.

Referenced by base(), dimming(), frameUpdate(), load(), open(), and save().

12.29.5.5 QSet<QString> KbLight::_indicatorList [private]

Definition at line 94 of file kblight.h.

Referenced by frameUpdate(), resetIndicators(), and setIndicator().

12.29.5.6 ColorMap KbLight::_indicatorMap [private]

Definition at line 93 of file kblight.h.

Referenced by frameUpdate(), map(), resetIndicators(), and setIndicator().

12.29.5.7 KeyMap KbLight::_map [private]

Definition at line 91 of file kblight.h.

Referenced by addAnim(), duplicateAnim(), load(), map(), previewAnim(), and save().

12.29.5.8 bool KbLight::_needsMapRefresh [private]

Definition at line 98 of file kblight.h.

Referenced by color(), load(), map(), and rebuildBaseMap().

12.29.5.9 bool KbLight::_needsSave [private]

Definition at line 98 of file kblight.h.

Referenced by addAnim(), animList(), color(), dimming(), duplicateAnim(), load(), map(), needsSave(), and save().

12.29.5.10 KbAnim* KbLight::_previewAnim [private]

Definition at line 90 of file kblight.h.

Referenced by animKeypress(), frameUpdate(), open(), previewAnim(), and stopPreview().

12.29.5.11 QColorMap KbLight::_qColorMap [private]

Definition at line 92 of file kblight.h.

Referenced by color(), colorMap(), load(), map(), rebuildBaseMap(), and save().

12.29.5.12 bool KbLight::_start [private]

Definition at line 97 of file kblight.h.

Referenced by addAnim(), close(), duplicateAnim(), isStarted(), open(), previewAnim(), and restartAnimation().

12.29.5.13 quint64 KbLight::lastFrameSignal [private]

Definition at line 95 of file kblight.h.

Referenced by frameUpdate().

12.29.5.14 const int KbLight::MAX_DIM = 3 [static]

Definition at line 38 of file kblight.h.

Referenced by base(), ExtraSettingsWidget::ExtraSettingsWidget(), KeyAction::keyEvent(), and load().

The documentation for this class was generated from the following files:

- src/ckb/kblight.h
- src/ckb/kblight.cpp
- src/ckb/release/moc_kblight.cpp

12.30 Ui::KbLightWidget Class Reference

`#include <src/ckb/ui_kblightwidget.h>`

Inheritance diagram for Ui::KbLightWidget:

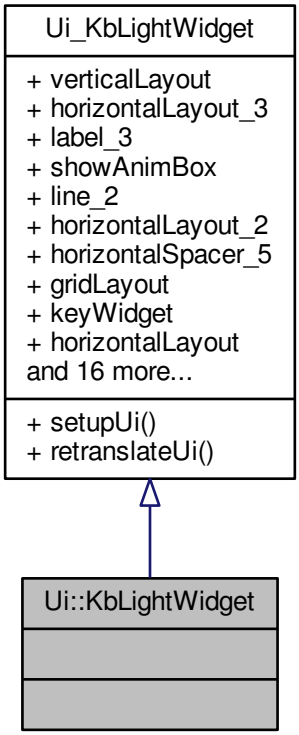

Collaboration diagram for Ui::KbLightWidget:

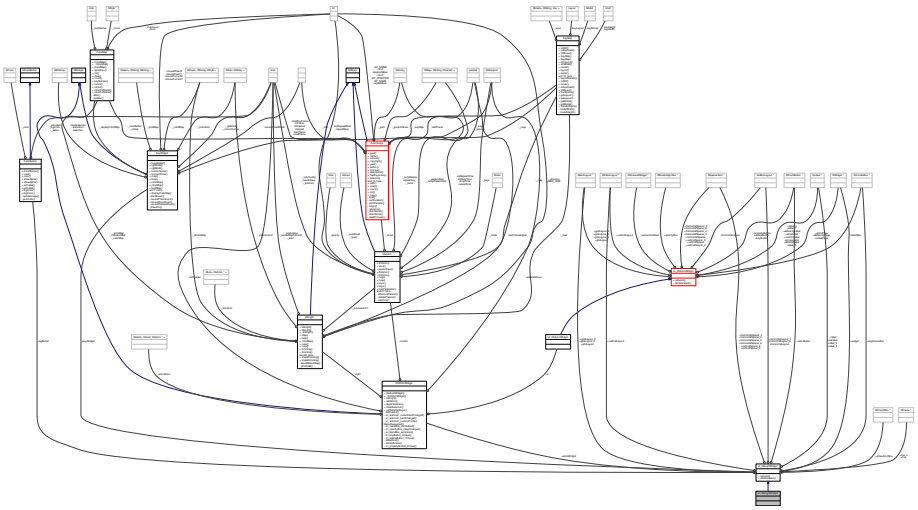

Public Member Functions

- void setupUi (QWidget *KbLightWidget)

- void retranslateUi (QWidget *KbLightWidget)

Data Fields

- QVBoxLayout * verticalLayout
- QHBoxLayout * horizontalLayout_3
- QLabel * label_3
- QCheckBox * showAnimBox
- QFrame * line_2
- QHBoxLayout * horizontalLayout_2
- QSpacerItem * horizontalSpacer_5
- QGridLayout * gridLayout
- KeyWidget * keyWidget
- QHBoxLayout * horizontalLayout
- ColorButton * bgButton
- QLabel * selLabel
- QPushButton * animButton
- QSpacerItem * horizontalSpacer_6
- QSpacerItem * verticalSpacer_2
- QGridLayout * gridLayout_2
- QComboBox * brightnessBox
- QLabel * label
- QSpacerItem * horizontalSpacer_3
- QSpacerItem * horizontalSpacer_4
- QSpacerItem * verticalSpacer_3
- QLabel * label_2
- QFrame * line
- QWidget * widget
- QGridLayout * gridLayout_4
- KbAnimWidget * animWidget

12.30.1 Detailed Description

Definition at line 263 of file ui_kblightwidget.h.

12.30.2 Member Function Documentation

12.30.2.1 void Ui_KbLightWidget::retranslateUi (QWidget * *KbLightWidget*) [inline],[inherited]

Definition at line 238 of file ui_kblightwidget.h.

References Ui_KbLightWidget::animButton, Ui_KbLightWidget::bgButton, Ui_KbLightWidget::brightnessBox, Ui_KbLightWidget::label, Ui_KbLightWidget::label_2, Ui_KbLightWidget::label_3, Ui_KbLightWidget::selLabel, and Ui_KbLightWidget::showAnimBox.

Referenced by Ui_KbLightWidget::setupUi().

```
239     {
240         KbLightWidget->setWindowTitle(QApplication::translate("KbLightWidget", "Form", Q_NULLPTR));
241         label_3->setText(QApplication::translate("KbLightWidget", "Colors", Q_NULLPTR));
242 #ifndef QT_NO_TOOLTIP
243         showAnimBox->setToolTip(QApplication::translate("KbLightWidget", "If enabled, the same
       colors will be displayed here as on the keyboard. If disabled, the base colors will be shown.", Q_NULLPTR));
244 #endif // QT_NO_TOOLTIP
245         showAnimBox->setText(QApplication::translate("KbLightWidget", "Show animated", Q_NULLPTR
     ));
246         bgButton->setText(QApplication::translate("KbLightWidget", "Change color...", Q_NULLPTR));
247         selLabel->setText(QApplication::translate("KbLightWidget", "Click to select", Q_NULLPTR));
248         animButton->setText(QApplication::translate("KbLightWidget", "New animation...",
```

```
    Q_NULLPTR));
249         brightnessBox->clear();
250         brightnessBox->insertItems(0, QStringList()
251          << QApplication::translate("KbLightWidget", "100%", Q_NULLPTR)
252          << QApplication::translate("KbLightWidget", "67%", Q_NULLPTR)
253          << QApplication::translate("KbLightWidget", "33%", Q_NULLPTR)
254          << QApplication::translate("KbLightWidget", "Off", Q_NULLPTR)
255         );
256         label->setText(QApplication::translate("KbLightWidget", "\342\230\274", Q_NULLPTR));
257         label_2->setText(QApplication::translate("KbLightWidget", "Animations", Q_NULLPTR));
258     } // retranslateUi
```

Here is the caller graph for this function:



12.30.2.2 void Ui_KbLightWidget::setupUi (QWidget * *KbLightWidget*) [inline], [inherited]

Definition at line 63 of file ui_kblightwidget.h.

References Ui_KbLightWidget::animButton, Ui_KbLightWidget::animWidget, Ui_KbLightWidget::bgButton, Ui_KbLightWidget::brightnessBox, Ui_KbLightWidget::gridLayout, Ui_KbLightWidget::gridLayout_2, Ui_KbLightWidget::gridLayout_4, Ui_KbLightWidget::horizontalLayout, Ui_KbLightWidget::horizontalLayout_2, Ui_KbLightWidget::horizontalLayout_3, Ui_KbLightWidget::horizontalSpacer_3, Ui_KbLightWidget::horizontalSpacer_4, Ui_KbLightWidget::horizontalSpacer_5, Ui_KbLightWidget::horizontalSpacer_6, Ui_KbLightWidget::keyWidget, Ui_KbLightWidget::label, Ui_KbLightWidget::label_2, Ui_KbLightWidget::label_3, Ui_KbLightWidget::line, Ui_KbLightWidget::line_2, Ui_KbLightWidget::retranslateUi(), Ui_KbLightWidget::selLabel, Ui_KbLightWidget::showAnimBox, Ui_KbLightWidget::verticalLayout, Ui_KbLightWidget::verticalSpacer_2, Ui_KbLightWidget::verticalSpacer_3, and Ui_KbLightWidget::widget.

Referenced by KbLightWidget::KbLightWidget().

```
64     {
65         if (KbLightWidget->objectName().isEmpty())
66             KbLightWidget->setObjectName(QStringLiteral("KbLightWidget"));
67         KbLightWidget->resize(632, 540);
68         KbLightWidget->setFocusPolicy(Qt::ClickFocus);
69         verticalLayout = new QVBoxLayout(KbLightWidget);
70         verticalLayout->setObjectName(QStringLiteral("verticalLayout"));
71         verticalLayout->setContentsMargins(0, 0, 0, -1);
72         horizontalLayout_3 = new QHBoxLayout();
73         horizontalLayout_3->setObjectName(QStringLiteral("horizontalLayout_3"));
74         label_3 = new QLabel(KbLightWidget);
75         label_3->setObjectName(QStringLiteral("label_3"));
76         QSizePolicy sizePolicy(QSizePolicy::Expanding, QSizePolicy::Preferred);
77         sizePolicy.setHorizontalStretch(0);
78         sizePolicy.setVerticalStretch(0);
79         sizePolicy.setHeightForWidth(label_3->sizePolicy().hasHeightForWidth());
80         label_3->setSizePolicy(sizePolicy);
81         QFont font;
82         font.setBold(true);
83         font.setWeight(75);
84         label_3->setFont(font);
85
86         horizontalLayout_3->addWidget(label_3);
87
88         showAnimBox = new QCheckBox(KbLightWidget);
89         showAnimBox->setObjectName(QStringLiteral("showAnimBox"));
90         showAnimBox->setChecked(true);
91
92         horizontalLayout_3->addWidget(showAnimBox);
93
94
95         verticalLayout->addLayout(horizontalLayout_3);
96
97         line_2 = new QFrame(KbLightWidget);
98         line_2->setObjectName(QStringLiteral("line_2"));
99         line_2->setFrameShape(QFrame::HLine);
```

```
100         line_2->setFrameShadow(QFrame::Sunken);
101 
102         verticalLayout->addWidget(line_2);
103 
104         horizontalLayout_2 = new QHBoxLayout();
105         horizontalLayout_2->setObjectName(QStringLiteral("horizontalLayout_2"));
106         horizontalSpacer_5 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
107 
108         horizontalLayout_2->addItem(horizontalSpacer_5);
109 
110         gridLayout = new QGridLayout();
111         gridLayout->setObjectName(QStringLiteral("gridLayout"));
112         keyWidget = new KeyWidget(KbLightWidget);
113         keyWidget->setObjectName(QStringLiteral("keyWidget"));
114         QSizePolicy sizePolicy1(QSizePolicy::Expanding, QSizePolicy::Expanding);
115         sizePolicy1.setHorizontalStretch(0);
116         sizePolicy1.setVerticalStretch(0);
117         sizePolicy1.setHeightForWidth(keyWidget->sizePolicy().hasHeightForWidth());
118         keyWidget->setSizePolicy(sizePolicy1);
119         keyWidget->setMinimumSize(QSize(100, 100));
120         keyWidget->setFocusPolicy(Qt::ClickFocus);
121 
122         gridLayout->addWidget(keyWidget, 0, 0, 1, 3);
123 
124         horizontalLayout = new QHBoxLayout();
125         horizontalLayout->setObjectName(QStringLiteral("horizontalLayout"));
126         bgButton = new ColorButton(KbLightWidget);
127         bgButton->setObjectName(QStringLiteral("bgButton"));
128         QSizePolicy sizePolicy2(QSizePolicy::Fixed, QSizePolicy::Fixed);
129         sizePolicy2.setHorizontalStretch(0);
130         sizePolicy2.setVerticalStretch(0);
131         sizePolicy2.setHeightForWidth(bgButton->sizePolicy().hasHeightForWidth());
132         bgButton->setSizePolicy(sizePolicy2);
133         bgButton->setMinimumSize(QSize(140, 0));
134         bgButton->setMaximumSize(QSize(140, 16777215));
135 
136         horizontalLayout->addWidget(bgButton);
137 
138         selLabel = new QLabel(KbLightWidget);
139         selLabel->setObjectName(QStringLiteral("selLabel"));
140         sizePolicy.setHeightForWidth(selLabel->sizePolicy().hasHeightForWidth());
141         selLabel->setSizePolicy(sizePolicy);
142         selLabel->setAlignment(Qt::AlignCenter);
143 
144         horizontalLayout->addWidget(selLabel);
145 
146         animButton = new QPushButton(KbLightWidget);
147         animButton->setObjectName(QStringLiteral("animButton"));
148         sizePolicy2.setHeightForWidth(animButton->sizePolicy().hasHeightForWidth());
149         animButton->setSizePolicy(sizePolicy2);
150         animButton->setMinimumSize(QSize(140, 0));
151         animButton->setMaximumSize(QSize(140, 16777215));
152 
153         horizontalLayout->addWidget(animButton);
154 
155 
156         gridLayout->addLayout(horizontalLayout, 1, 0, 1, 3);
157 
158 
159         horizontalLayout_2->addLayout(gridLayout);
160 
161         horizontalSpacer_6 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
162 
163         horizontalLayout_2->addItem(horizontalSpacer_6);
164 
165 
166         verticalLayout->addLayout(horizontalLayout_2);
167 
168         verticalSpacer_2 = new QSpacerItem(20, 40, QSizePolicy::Minimum,
    QSizePolicy::Expanding);
169 
170         verticalLayout->addItem(verticalSpacer_2);
171 
172         gridLayout_2 = new QGridLayout();
173         gridLayout_2->setObjectName(QStringLiteral("gridLayout_2"));
174         brightnessBox = new QComboBox(KbLightWidget);
175         brightnessBox->setObjectName(QStringLiteral("brightnessBox"));
176         sizePolicy2.setHeightForWidth(brightnessBox->sizePolicy().hasHeightForWidth());
177         brightnessBox->setSizePolicy(sizePolicy2);
178 
179         gridLayout_2->addWidget(brightnessBox, 1, 3, 1, 1);
180 
181         label = new QLabel(KbLightWidget);
182         label->setObjectName(QStringLiteral("label"));
183         QFont font1;
```

```
184         font1.setPointSize(20);
185         label->setFont(font1);
186         label->setAlignment(Qt::AlignRight|Qt::AlignTrailing|Qt::AlignVCenter);
187 
188         gridLayout_2->addWidget(label, 1, 2, 1, 1);
189 
190         horizontalSpacer_3 = new QSpacerItem(0, 0, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
191 
192         gridLayout_2->addItem(horizontalSpacer_3, 0, 4, 1, 1);
193 
194         horizontalSpacer_4 = new QSpacerItem(0, 0, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
195 
196         gridLayout_2->addItem(horizontalSpacer_4, 0, 2, 1, 1);
197 
198 
199         verticalLayout->addLayout(gridLayout_2);
200 
201         verticalSpacer_3 = new QSpacerItem(20, 40, QSizePolicy::Minimum,
    QSizePolicy::Expanding);
202 
203         verticalLayout->addItem(verticalSpacer_3);
204 
205         label_2 = new QLabel(KbLightWidget);
206         label_2->setObjectName(QStringLiteral("label_2"));
207         label_2->setFont(font);
208 
209         verticalLayout->addWidget(label_2);
210 
211         line = new QFrame(KbLightWidget);
212         line->setObjectName(QStringLiteral("line"));
213         line->setFrameShape(QFrame::HLine);
214         line->setFrameShadow(QFrame::Sunken);
215 
216         verticalLayout->addWidget(line);
217 
218         widget = new QWidget(KbLightWidget);
219         widget->setObjectName(QStringLiteral("widget"));
220         widget->setMinimumSize(QSize(0, 170));
221         gridLayout_4 = new QGridLayout(widget);
222         gridLayout_4->setObjectName(QStringLiteral("gridLayout_4"));
223         gridLayout_4->setContentsMargins(-1, 0, -1, 0);
224         animWidget = new KbAnimWidget(widget);
225         animWidget->setObjectName(QStringLiteral("animWidget"));
226 
227         gridLayout_4->addWidget(animWidget, 0, 0, 1, 1);
228 
229 
230         verticalLayout->addWidget(widget);
231 
232 
233         retranslateUi(KbLightWidget);
234 
235         QMetaObject::connectSlotsByName(KbLightWidget);
236     } // setupUi
```

Here is the call graph for this function:



Here is the caller graph for this function:



12.30.3 Field Documentation

12.30.3.1 QPushButton* Ui_KbLightWidget::animButton [inherited]

Definition at line 48 of file ui_kblightwidget.h.

Referenced by KbLightWidget::KbLightWidget(), Ui_KbLightWidget::retranslateUi(), and Ui_KbLightWidget::setup-Ui().

12.30.3.2 KbAnimWidget* Ui_KbLightWidget::animWidget [inherited]

Definition at line 61 of file ui_kblightwidget.h.

Referenced by KbLightWidget::KbLightWidget(), KbLightWidget::newSelection(), KbLightWidget::on_animButton_-clicked(), KbLightWidget::setLight(), and Ui_KbLightWidget::setupUi().

12.30.3.3 ColorButton* Ui_KbLightWidget::bgButton [inherited]

Definition at line 46 of file ui_kblightwidget.h.

Referenced by KbLightWidget::KbLightWidget(), KbLightWidget::newSelection(), Ui_KbLightWidget::retranslate-Ui(), and Ui_KbLightWidget::setupUi().

12.30.3.4 QComboBox* Ui_KbLightWidget::brightnessBox [inherited]

Definition at line 52 of file ui_kblightwidget.h.

Referenced by Ui_KbLightWidget::retranslateUi(), Ui_KbLightWidget::setupUi(), and KbLightWidget::updateLight().

12.30.3.5 QGridLayout* Ui_KbLightWidget::gridLayout [inherited]

Definition at line 43 of file ui_kblightwidget.h.

Referenced by Ui_KbLightWidget::setupUi().

12.30.3.6 QGridLayout* Ui_KbLightWidget::gridLayout_2 [inherited]

Definition at line 51 of file ui_kblightwidget.h.

Referenced by Ui_KbLightWidget::setupUi().

12.30.3.7 QGridLayout* Ui_KbLightWidget::gridLayout_4 [inherited]

Definition at line 60 of file ui_kblightwidget.h.

Referenced by Ui_KbLightWidget::setupUi().

12.30.3.8 QHBoxLayout* Ui_KbLightWidget::horizontalLayout [inherited]

Definition at line 45 of file ui_kblightwidget.h.

Referenced by Ui_KbLightWidget::setupUi().

12.30.3.9 QHBoxLayout* Ui_KbLightWidget::horizontalLayout_2 [inherited]

Definition at line 41 of file ui_kblightwidget.h.

Referenced by Ui_KbLightWidget::setupUi().

12.30.3.10 QHBoxLayout* Ui_KbLightWidget::horizontalLayout_3 [inherited]

Definition at line 37 of file ui_kblightwidget.h.

Referenced by Ui_KbLightWidget::setupUi().

12.30.3.11 QSpacerItem* Ui_KbLightWidget::horizontalSpacer_3 [inherited]

Definition at line 54 of file ui_kblightwidget.h.

Referenced by Ui_KbLightWidget::setupUi().

12.30.3.12 QSpacerItem* Ui_KbLightWidget::horizontalSpacer_4 [inherited]

Definition at line 55 of file ui_kblightwidget.h.

Referenced by Ui_KbLightWidget::setupUi().

12.30.3.13 QSpacerItem* Ui_KbLightWidget::horizontalSpacer_5 [inherited]

Definition at line 42 of file ui_kblightwidget.h.

Referenced by Ui_KbLightWidget::setupUi().

12.30.3.14 QSpacerItem* Ui_KbLightWidget::horizontalSpacer_6 [inherited]

Definition at line 49 of file ui_kblightwidget.h.

Referenced by Ui_KbLightWidget::setupUi().

12.30.3.15 KeyWidget* Ui_KbLightWidget::keyWidget [inherited]

Definition at line 44 of file ui_kblightwidget.h.

Referenced by KbLightWidget::changeAnim(), KbLightWidget::changeAnimKeys(), KbLightWidget::changeColor(), KbLightWidget::KbLightWidget(), KbLightWidget::on_animButton_clicked(), KbLightWidget::on_bgButton_clicked(), KbLightWidget::on_showAnimBox_clicked(), KbLightWidget::setLight(), KbLightWidget::setMonochrome(), Ui_KbLightWidget::setupUi(), KbLightWidget::toggleSidelight(), and KbLightWidget::updateLight().

12.30.3.16 QLabel* Ui_KbLightWidget::label [inherited]

Definition at line 53 of file ui_kblightwidget.h.

Referenced by Ui_KbLightWidget::retranslateUi(), and Ui_KbLightWidget::setupUi().

12.30.3.17 QLabel* Ui_KbLightWidget::label_2 [inherited]

Definition at line 57 of file ui_kblightwidget.h.

Referenced by Ui_KbLightWidget::retranslateUi(), and Ui_KbLightWidget::setupUi().

12.30.3.18 QLabel* Ui_KbLightWidget::label_3 [inherited]

Definition at line 38 of file ui_kblightwidget.h.

Referenced by Ui_KbLightWidget::retranslateUi(), and Ui_KbLightWidget::setupUi().

12.30.3.19 QFrame* Ui_KbLightWidget::line [inherited]

Definition at line 58 of file ui_kblightwidget.h.

Referenced by Ui_KbLightWidget::setupUi().

12.30.3.20 QFrame* Ui_KbLightWidget::line_2 [inherited]

Definition at line 40 of file ui_kblightwidget.h.

Referenced by Ui_KbLightWidget::setupUi().

12.30.3.21 QLabel* Ui_KbLightWidget::selLabel [inherited]

Definition at line 47 of file ui_kblightwidget.h.

Referenced by KbLightWidget::newSelection(), Ui_KbLightWidget::retranslateUi(), and Ui_KbLightWidget::setupUi().

12.30.3.22 QCheckBox* Ui_KbLightWidget::showAnimBox [inherited]

Definition at line 39 of file ui_kblightwidget.h.

Referenced by KbLightWidget::KbLightWidget(), Ui_KbLightWidget::retranslateUi(), KbLightWidget::setLight(), and Ui_KbLightWidget::setupUi().

12.30.3.23 QVBoxLayout* Ui_KbLightWidget::verticalLayout [inherited]

Definition at line 36 of file ui_kblightwidget.h.

Referenced by Ui_KbLightWidget::setupUi().

12.30.3.24 QSpacerItem* Ui_KbLightWidget::verticalSpacer_2 [inherited]

Definition at line 50 of file ui_kblightwidget.h.

Referenced by Ui_KbLightWidget::setupUi().

12.30.3.25 QSpacerItem* Ui_KbLightWidget::verticalSpacer_3 [inherited]

Definition at line 56 of file ui_kblightwidget.h.

Referenced by Ui_KbLightWidget::setupUi().

12.30.3.26 QWidget* Ui_KbLightWidget::widget [inherited]

Definition at line 59 of file ui_kblightwidget.h.

Referenced by Ui_KbLightWidget::setupUi().

The documentation for this class was generated from the following file:

- src/ckb/ui_kblightwidget.h

12.31 KbLightWidget Class Reference

`#include <src/ckb/kblightwidget.h>`

Inheritance diagram for KbLightWidget:

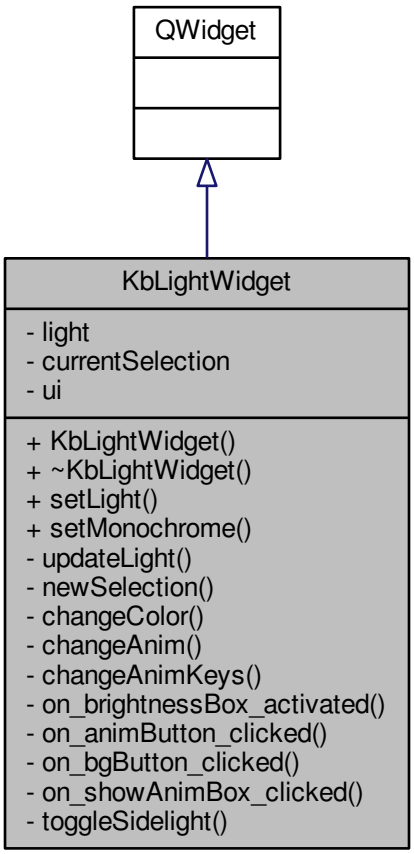

Collaboration diagram for KbLightWidget:

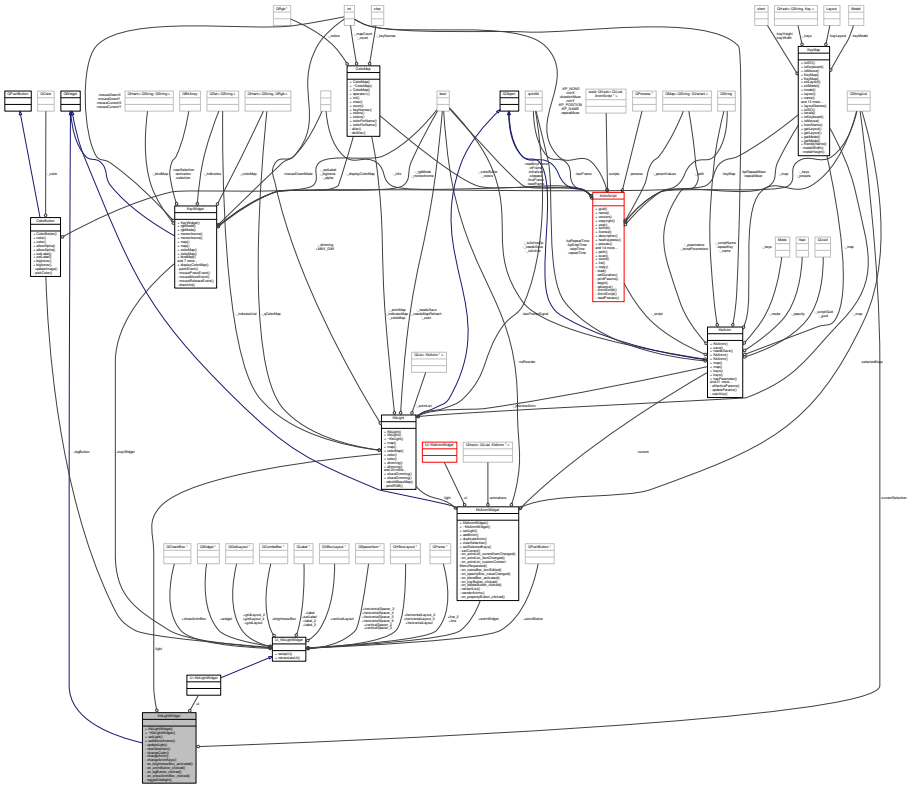

Public Member Functions

- KbLightWidget (QWidget *parent=0)
- ~KbLightWidget ()
- void setLight (KbLight *newLight)
- void setMonochrome ()

Private Slots

- void updateLight ()
- void newSelection (QStringList selection)
- void changeColor (QColor newColor)
- void changeAnim (KbAnim *newAnim)
- void changeAnimKeys (QStringList keys)
- void on_brightnessBox_activated (int index)
- void on_animButton_clicked ()
- void on_bgButton_clicked ()
- void on_showAnimBox_clicked (bool checked)
- void toggleSidelight ()

Private Attributes

- KbLight * light
- QStringList currentSelection
- Ui::KbLightWidget * ui

12.31.1 Detailed Description

Definition at line 15 of file kblightwidget.h.

12.31.2 Constructor & Destructor Documentation

12.31.2.1 KbLightWidget::KbLightWidget (QWidget * *parent* = 0) [explicit]

Definition at line 6 of file kblightwidget.cpp.

References Ui_KbLightWidget::animButton, Ui_KbLightWidget::animWidget, Ui_KbLightWidget::bgButton, changeAnim(), changeAnimKeys(), changeColor(), AnimScript::count(), CkbSettings::get(), Ui_KbLightWidget::keyWidget, newSelection(), Ui_KbLightWidget::setupUi(), Ui_KbLightWidget::showAnimBox, toggleSidelight(), and ui.

```
6                                           :
7     QWidget(parent), light(0),
8     ui(new Ui::KbLightWidget)
9 {
10     ui->setupUi(this);
11     if(AnimScript::count() == 0)
12         ui->animButton->setVisible(false);
13
14     connect(ui->bgButton, SIGNAL(colorChanged(QColor)), this, SLOT(
      changeColor(QColor)));
15     connect(ui->keyWidget, SIGNAL(selectionChanged(QStringList)), this, SLOT(
      newSelection(QStringList)));
16     connect(ui->keyWidget, SIGNAL(sidelightToggled()), this, SLOT(
      toggleSidelight())); // click on a toggle button, like sidelight
17     connect(ui->animWidget, SIGNAL(animChanged(KbAnim*)), this, SLOT(
      changeAnim(KbAnim*)));
18     connect(ui->animWidget, SIGNAL(didUpdateSelection(QStringList)), this, SLOT(
      changeAnimKeys(QStringList)));
19
20     // Restore "show animated" setting
21     ui->showAnimBox->setChecked(!CkbSettings::get("UI/Light/ShowBaseOnly").
      toBool());
22 }
```

Here is the call graph for this function:

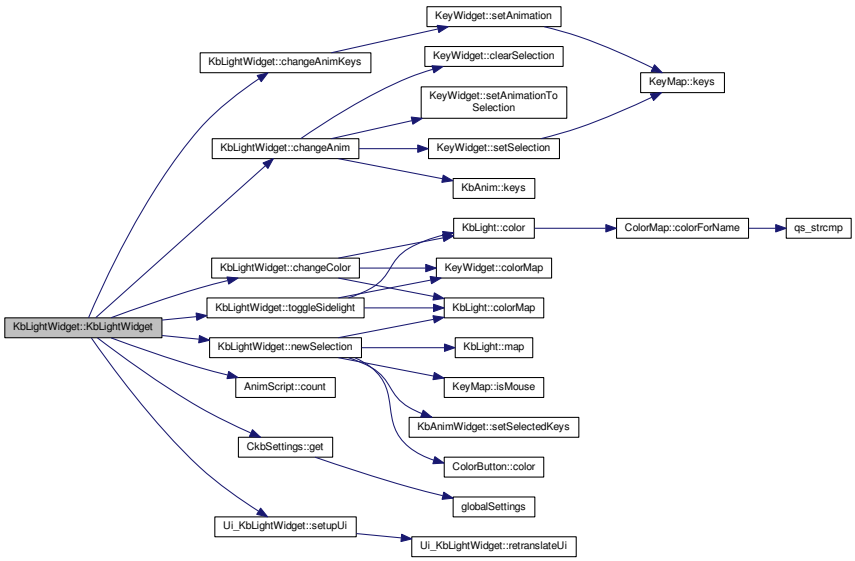

12.31.2.2 KbLightWidget::~KbLightWidget ( )

Definition at line 24 of file kblightwidget.cpp.

References ui.

```
24                                {
25     delete ui;
26 }
```

12.31.3 Member Function Documentation

12.31.3.1 void KbLightWidget::changeAnim (KbAnim * *newAnim*) [private], [slot]

Definition at line 121 of file kblightwidget.cpp.

References KeyWidget::clearSelection(), KbAnim::keys(), Ui_KbLightWidget::keyWidget, KeyWidget::setAnimationToSelection(), KeyWidget::setSelection(), and ui.

Referenced by KbLightWidget().

```
121                                              {
122     if(newAnim)
123         ui->keyWidget->setSelection(newAnim->keys());
124     else
125         ui->keyWidget->clearSelection();
126     ui->keyWidget->setAnimationToSelection();
127 }
```

Here is the call graph for this function:

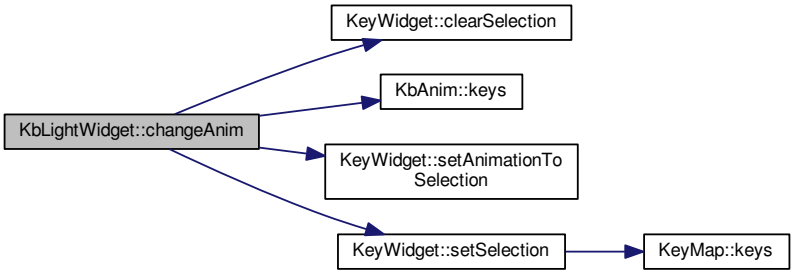

Here is the caller graph for this function:

12.31.3.2 void KbLightWidget::changeAnimKeys (QStringList *keys*) [private], [slot]

Definition at line 129 of file kblightwidget.cpp.

References Ui_KbLightWidget::keyWidget, KeyWidget::setAnimation(), and ui.

Referenced by KbLightWidget().

```
129                                                 {
130     ui->keyWidget->setAnimation(keys);
131 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

12.31.3.3 void KbLightWidget::changeColor (QColor *newColor*) [private], [slot]

Definition at line 99 of file kblightwidget.cpp.

References KbLight::color(), KeyWidget::colorMap(), KbLight::colorMap(), currentSelection, Ui_KbLightWidget::keyWidget, light, and ui.

Referenced by KbLightWidget().

```
99                                                  {
100     if(light){
101         foreach(QString key, currentSelection)
102             light->color(key, newColor);
103         ui->keyWidget->colorMap(light->colorMap());
104     }
105 }
```

Here is the call graph for this function:

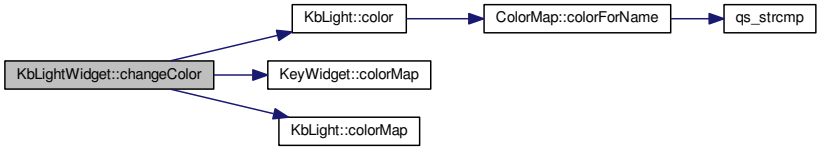

Here is the caller graph for this function:

12.31.3.4 void KbLightWidget::newSelection (QStringList *selection*) [private], [slot]

Definition at line 72 of file kblightwidget.cpp.

References Ui_KbLightWidget::animWidget, Ui_KbLightWidget::bgButton, ColorButton::color(), KbLight::colorMap(), currentSelection, KeyMap::isMouse(), light, KbLight::map(), Ui_KbLightWidget::selLabel, KbAnimWidget::setSelectedKeys(), and ui.

Referenced by KbLightWidget().

```
72                                                  {
73     // Determine selected color (invalid color if no selection or if they're not all the same)
74     QColor selectedColor;
75     const QColorMap& colorMap = light->colorMap();
76     foreach(const QString& key, selection){
77         QColor color = colorMap.value(key);
78         if(!selectedColor.isValid())
79             selectedColor = color;
80         else if(color != selectedColor){
81             selectedColor = QColor();
82             break;
83         }
84     }
85
86     currentSelection = selection;
87     ui->animWidget->setSelectedKeys(selection);
88     ui->bgButton->color(selectedColor);
89     int count = selection.count();
90     if(count == 0){
91         ui->selLabel->setText("Click to select");
92         return;
93     } else if(count == 1)
94         ui->selLabel->setText(tr("1 %1 selected").arg(light->map().
      isMouse() ? "zone" : "key"));
95     else
96         ui->selLabel->setText(tr("%1 %2 selected").arg(count).arg(
      light->map().isMouse() ? "zones" : "keys"));
97 }
```

Here is the call graph for this function:

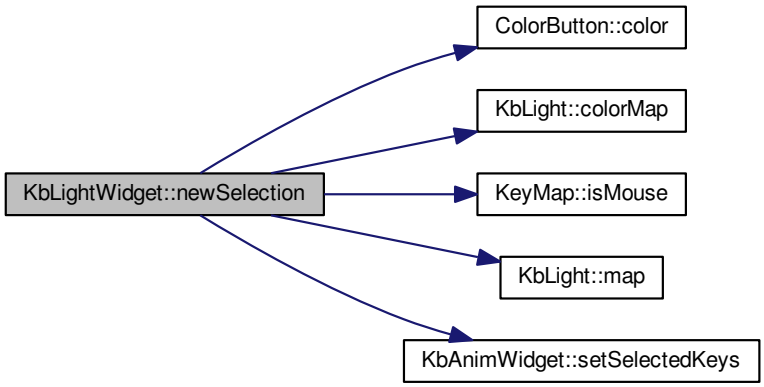

Here is the caller graph for this function:

12.31.3.5 void KbLightWidget::on_animButton_clicked ( ) [private],[slot]

Definition at line 143 of file kblightwidget.cpp.

References KbAnimWidget::addAnim(), Ui_KbLightWidget::animWidget, AnimAddDialog::chosenPreset(), AnimAddDialog::chosenScript(), AnimScript::count(), currentSelection, Ui_KbLightWidget::keyWidget, light, AnimScript::preset(), AnimScript::presets(), KbLight::restartAnimation(), KeyWidget::selectAll(), and ui.

```
143                                         {
144     if(AnimScript::count() == 0)
145         return;
146     if(currentSelection.isEmpty())
147         ui->keyWidget->selectAll();
148     AnimAddDialog dialog(this, light, currentSelection);
149     dialog.exec();
150     if(dialog.result() != QDialog::Accepted)
151         return;
152     const AnimScript* script = dialog.chosenScript();
153     int presetId = dialog.chosenPreset();
154     ui->animWidget->addAnim(script, currentSelection, script->
      presets()[presetId], script->preset(presetId));
155     light->restartAnimation();
156 }
```

Here is the call graph for this function:

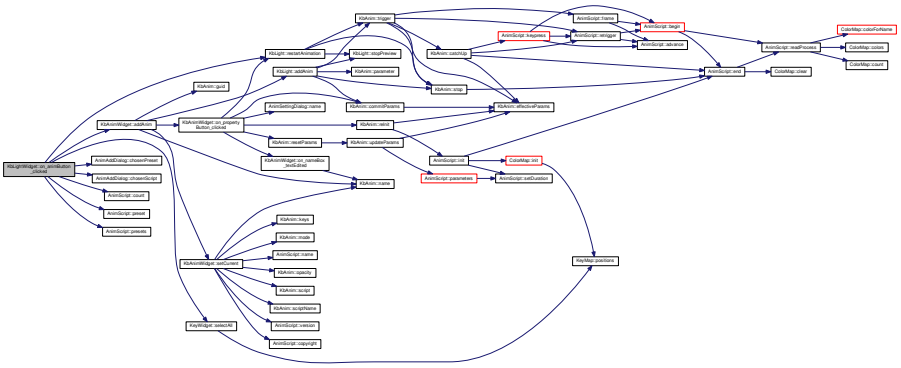

12.31.3.6 void KbLightWidget::on_bgButton_clicked ( ) [private], [slot]

Definition at line 138 of file kblightwidget.cpp.

References currentSelection, Ui_KbLightWidget::keyWidget, KeyWidget::selectAll(), and ui.

```
138                                         {
139     if(currentSelection.isEmpty())
140         ui->keyWidget->selectAll();
141 }
```

Here is the call graph for this function:

12.31.3.7 void KbLightWidget::on_brightnessBox_activated (int *index*) [private], [slot]

Definition at line 133 of file kblightwidget.cpp.

References KbLight::dimming(), and light.

```
133                                                     {
134     if(light)
135         light->dimming(index);
136 }
```

Here is the call graph for this function:



12.31.3.8 void KbLightWidget::on_showAnimBox_clicked (bool *checked*) [private], [slot]

Definition at line 52 of file kblightwidget.cpp.

References KeyWidget::displayColorMap(), Ui_KbLightWidget::keyWidget, light, CkbSettings::set(), and ui.

Referenced by setLight().

```
52                                                  {
53     // FIXME: set globally if there's more than one KbLightWidget active
54     // Connect/disconnect animation slot
55     if(checked){
56         if(light)
57             connect(light, SIGNAL(frameDisplayed(const ColorMap&,const QSet<QString>&)),
       ui->keyWidget, SLOT(displayColorMap(const ColorMap&,const QSet<QString>&)));
58     } else {
59         if(light)
60             disconnect(light, SIGNAL(frameDisplayed(const ColorMap&,const QSet<QString>&)),
       ui->keyWidget, SLOT(displayColorMap(const ColorMap&,const QSet<QString>&)));
61         ui->keyWidget->displayColorMap(ColorMap());
62     }
63     CkbSettings::set("UI/Light/ShowBaseOnly", !checked);
64 }
```

Here is the call graph for this function:



Here is the caller graph for this function:



12.31.3.9 void KbLightWidget::setLight (KbLight * *newLight*)

Definition at line 28 of file kblightwidget.cpp.

References Ui_KbLightWidget::animWidget, KeyWidget::clearAnimation(), KbAnimWidget::clearSelection(), KeyWidget::clearSelection(), Ui_KbLightWidget::keyWidget, light, on_showAnimBox_clicked(), KeyWidget::setAnimation(), KbAnimWidget::setLight(), Ui_KbLightWidget::showAnimBox, ui, and updateLight().

Referenced by KbWidget::modeChanged().

```
28                                          {
29     ui->keyWidget->clearSelection();
30     ui->keyWidget->clearAnimation();
31     ui->animWidget->clearSelection();
32     if(light == newLight)
33         return;
34     if(light){
35         disconnect(light, SIGNAL(updated()), this, SLOT(updateLight()));
36         // Disabled animated colors for previous light
37         on_showAnimBox_clicked(false);
38     }
39     connect(newLight, SIGNAL(updated()), this, SLOT(updateLight()));
40     light = newLight;
41     updateLight();
42     ui->keyWidget->setAnimation(QStringList());
43     ui->animWidget->setLight(newLight);
44     if(ui->showAnimBox->isChecked())
45         on_showAnimBox_clicked(true);
46 }
```

Here is the call graph for this function:

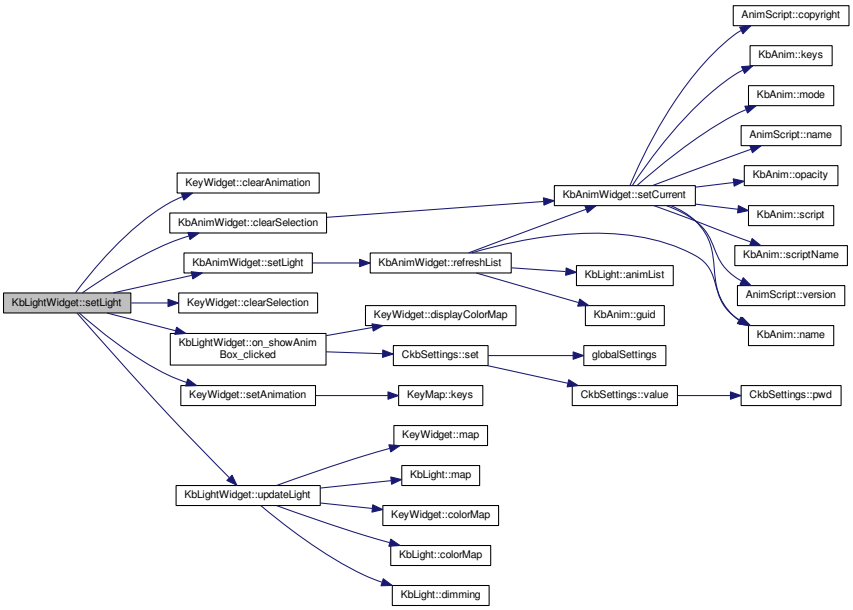

Here is the caller graph for this function:

12.31.3.10 void KbLightWidget::setMonochrome ( )

Definition at line 48 of file kblightwidget.cpp.

References Ui_KbLightWidget::keyWidget, KeyWidget::monochrome(), and ui.

Referenced by KbWidget::KbWidget().

```
48                                  {
49     ui->keyWidget->monochrome(true);
50 }
```

Here is the call graph for this function:



Here is the caller graph for this function:



12.31.3.11 void KbLightWidget::toggleSidelight ( ) [private], [slot]

Definition at line 107 of file kblightwidget.cpp.

References KbLight::color(), KeyWidget::colorMap(), KbLight::colorMap(), Ui_KbLightWidget::keyWidget, light, and ui.

Referenced by KbLightWidget().

```
107                                     {
108     if(light){
109         if (light->colorMap()["lsidel"] == 0xFF000000){
110                 light->color("lsidel",QRgb(0xFFFFFFFF));
111                 light->color("rsidel",QRgb(0xFFFFFFFF));
112         } else {
113                 light->color("lsidel", QRgb(0xFF000000));
114                 light->color("rsidel", QRgb(0xFF000000));
115         }
116         ui->keyWidget->colorMap(light->colorMap());
117     }
118 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

12.31.3.12 void KbLightWidget::updateLight ( ) [private], [slot]

Definition at line 66 of file kblightwidget.cpp.

References Ui_KbLightWidget::brightnessBox, KeyWidget::colorMap(), KbLight::colorMap(), KbLight::dimming(), Ui_KbLightWidget::keyWidget, light, KeyWidget::map(), KbLight::map(), and ui.

Referenced by setLight().

```
66                              {
67     ui->keyWidget->map(light->map());
68     ui->keyWidget->colorMap(light->colorMap());
69     ui->brightnessBox->setCurrentIndex(light->dimming());
70 }
```

Here is the call graph for this function:

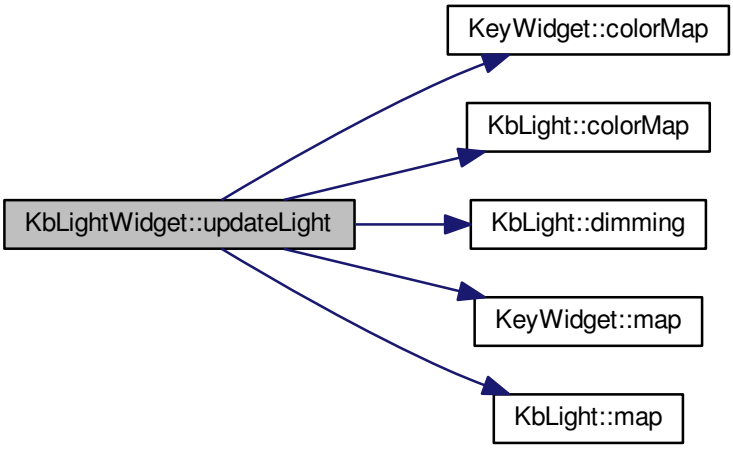

Here is the caller graph for this function:



12.31.4 Field Documentation

12.31.4.1 QStringList KbLightWidget::currentSelection [private]

Definition at line 44 of file kblightwidget.h.

Referenced by changeColor(), newSelection(), on_animButton_clicked(), and on_bgButton_clicked().

12.31.4.2 KbLight* KbLightWidget::light [private]

Definition at line 43 of file kblightwidget.h.

Referenced by changeColor(), newSelection(), on_animButton_clicked(), on_brightnessBox_activated(), on_showAnimBox_clicked(), setLight(), toggleSidelight(), and updateLight().

12.31.4.3 Ui::KbLightWidget* KbLightWidget::ui [private]

Definition at line 46 of file kblightwidget.h.

Referenced by changeAnim(), changeAnimKeys(), changeColor(), KbLightWidget(), newSelection(), on_animButton_clicked(), on_bgButton_clicked(), on_showAnimBox_clicked(), setLight(), setMonochrome(), toggleSidelight(), updateLight(), and ~KbLightWidget().

The documentation for this class was generated from the following files:

- src/ckb/kblightwidget.h

- src/ckb/kblightwidget.cpp

12.32 KbManager Class Reference

`#include <src/ckb/kbmanager.h>`

Inheritance diagram for KbManager:

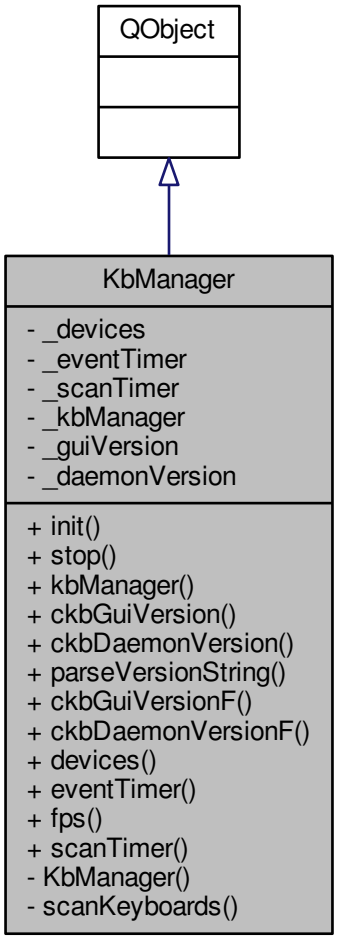

Collaboration diagram for KbManager:

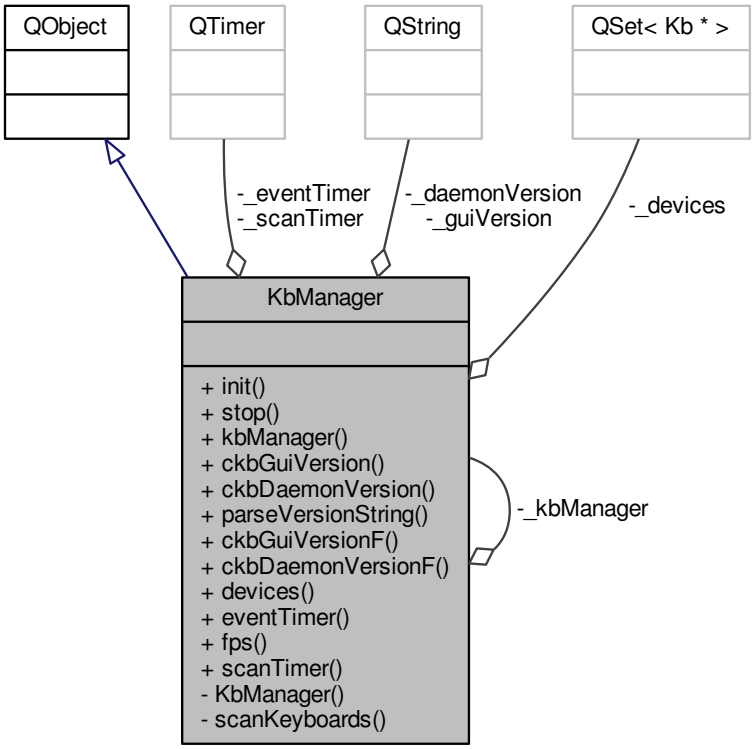

Signals

- void kbConnected (Kb ∗device)
- void kbDisconnected (Kb ∗device)
- void versionUpdated ()

Static Public Member Functions

- static void init (QString guiVersion)
- static void stop ()
- static KbManager ∗ kbManager ()
- static QString ckbGuiVersion ()
- static QString ckbDaemonVersion ()
- static float parseVersionString (QString version)
- static float ckbGuiVersionF ()
- static float ckbDaemonVersionF ()
- static const QSet< Kb ∗ > devices ()
- static QTimer ∗ eventTimer ()
- static void fps (int framerate)
- static QTimer ∗ scanTimer ()

Private Slots

- void scanKeyboards ()

Private Member Functions

- KbManager (QObject *parent=0)

Private Attributes

- QSet< Kb * > _devices
- QTimer * _eventTimer
- QTimer * _scanTimer

Static Private Attributes

- static KbManager * _kbManager = 0
- static QString _guiVersion
- static QString _daemonVersion = "<unavailable>"

12.32.1 Detailed Description

Definition at line 14 of file kbmanager.h.

12.32.2 Constructor & Destructor Documentation

12.32.2.1 KbManager::KbManager (QObject * *parent* = 0) [explicit], [private]

Definition at line 26 of file kbmanager.cpp.

References _eventTimer, _scanTimer, and scanKeyboards().

Referenced by init().

```
26                                      : QObject(parent){
27     // Set up the timers
28     _eventTimer = new QTimer(this);
29     _eventTimer->setTimerType(Qt::PreciseTimer);
30     _scanTimer = new QTimer(this);
31     _scanTimer->start(100);
32     connect(_scanTimer, SIGNAL(timeout()), this, SLOT(scanKeyboards()));
33 }
```

Here is the call graph for this function:

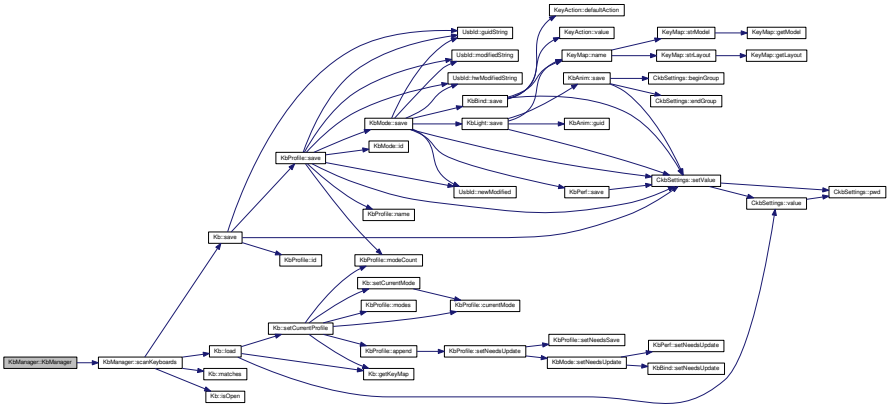

Here is the caller graph for this function:



12.32.3 Member Function Documentation

12.32.3.1 static QString KbManager::ckbDaemonVersion ( ) [inline], [static]

Definition at line 27 of file kbmanager.h.

References _daemonVersion.

Referenced by MainWindow::updateVersion().

```
27 { return _daemonVersion; }
```

Here is the caller graph for this function:



12.32.3.2 static float KbManager::ckbDaemonVersionF ( ) [inline], [static]

Definition at line 31 of file kbmanager.h.

References _daemonVersion, DAEMON_UNAVAILABLE_STR, and parseVersionString().

Referenced by KbFirmware::_latestForBoard(), and MainWindow::updateVersion().

```
31 { return _daemonVersion == DAEMON_UNAVAILABLE_STR ? INFINITY :
      parseVersionString(_daemonVersion); }
```

Here is the call graph for this function:

Here is the caller graph for this function:

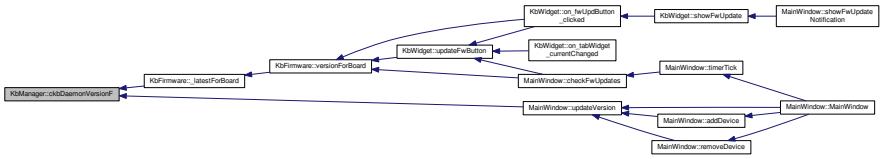

12.32.3.3 static QString KbManager::ckbGuiVersion ( ) [inline], [static]

Definition at line 26 of file kbmanager.h.

References _guiVersion.

```
26 { return _guiVersion; }
```

12.32.3.4 static float KbManager::ckbGuiVersionF ( ) [inline], [static]

Definition at line 30 of file kbmanager.h.

References _guiVersion, and parseVersionString().

Referenced by KbFirmware::_latestForBoard(), and MainWindow::updateVersion().

```
30 { return parseVersionString(_guiVersion); }
```

Here is the call graph for this function:

Here is the caller graph for this function:

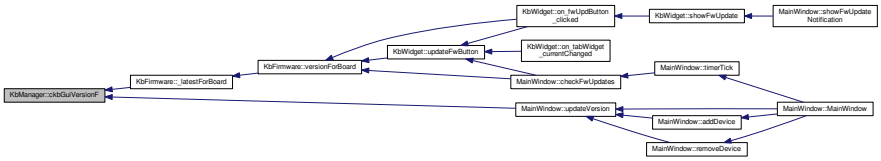

12.32.3.5 static const QSet<Kb*> KbManager::devices ( ) [inline], [static]

Definition at line 34 of file kbmanager.h.

References _devices, and _kbManager.

```
34 { return _kbManager ? _kbManager->_devices : QSet<Kb*>(); }
```

12.32.3.6 static QTimer* KbManager::eventTimer ( ) [inline], [static]

Definition at line 38 of file kbmanager.h.

References _eventTimer, and _kbManager.

Referenced by fps().

```
38 { return _kbManager ? _kbManager->_eventTimer : 0; }
```

Here is the caller graph for this function:

12.32.3.7 void KbManager::fps (int *framerate*) [static]

Definition at line 35 of file kbmanager.cpp.

References eventTimer().

Referenced by Kb::frameRate().

```
35                                {
36     QTimer* timer = eventTimer();
37     if(!timer)
38         return;
39     if(timer->isActive())
40         timer->setInterval(1000 / framerate);
41     else
42         timer->start(1000 / framerate);
43 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

12.32.3.8 void KbManager::init (QString *guiVersion*) [static]

Definition at line 12 of file kbmanager.cpp.

References _guiVersion, _kbManager, and KbManager().

Referenced by MainWindow::MainWindow().

```
12                                          {
13     _guiVersion = guiVersion;
14     if(_kbManager)
15         return;
16     _kbManager = new KbManager();
17 }
```

Here is the call graph for this function:

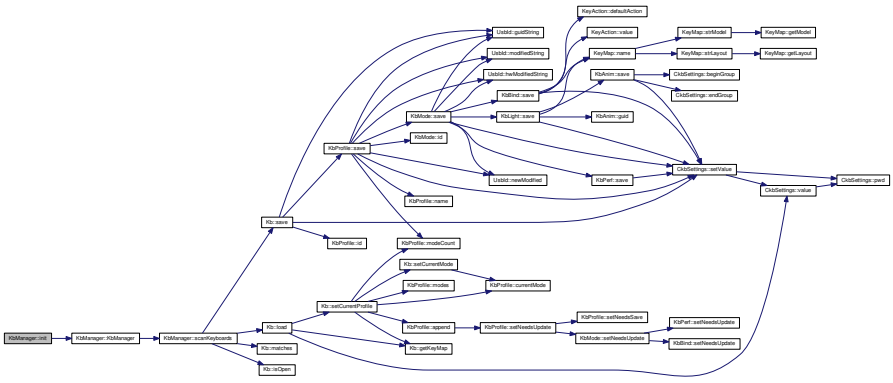

Here is the caller graph for this function:

12.32.3.9 void KbManager::kbConnected (Kb * *device*) [signal]

Definition at line 174 of file moc_kbmanager.cpp.

Referenced by scanKeyboards().

```
175 {
176     void *_a[] = { Q_NULLPTR, const_cast<void*>(reinterpret_cast<const void*>(&_t1)) };
177     QMetaObject::activate(this, &staticMetaObject, 0, _a);
178 }
```

Here is the caller graph for this function:



12.32.3.10 void KbManager::kbDisconnected (Kb * *device*) [signal]

Definition at line 181 of file moc_kbmanager.cpp.

Referenced by scanKeyboards().

```
182 {
183     void *_a[] = { Q_NULLPTR, const_cast<void*>(reinterpret_cast<const void*>(&_t1)) };
184     QMetaObject::activate(this, &staticMetaObject, 1, _a);
185 }
```

Here is the caller graph for this function:



12.32.3.11 static KbManager* KbManager::kbManager ( ) [inline], [static]

Definition at line 23 of file kbmanager.h.

References _kbManager.

Referenced by MainWindow::MainWindow().

```
23 { return _kbManager; }
```

Here is the caller graph for this function:

12.32.3.12 float KbManager::parseVersionString (QString *version*) [static]

Definition at line 45 of file kbmanager.cpp.

Referenced by ckbDaemonVersionF(), ckbGuiVersionF(), and KbFirmware::processDownload().

```
45                                                  {
46     // Remove extraneous info (anything after a +, anything non-numeric)
47     QStringList dots = version.replace(QRegExp("\\+.+"), "").replace(QRegExp("[^\\d\\.]"), "").split(".");
48     float base = 1.f;
49     float res = 0.f;
50     // A number like "1.2.3" will result in 1.0203
51     // NB: will fail if a point version goes over 99 or if using more than two dots. floats can only
       reliably encode 7 decimal digits.
52     foreach(const QString& dot, dots){
53         res += dot.toFloat() * base;
54         base /= 100.f;
55     }
56     return res;
57 }
```

Here is the caller graph for this function:



12.32.3.13 void KbManager::scanKeyboards ( ) [private], [slot]

Definition at line 59 of file kbmanager.cpp.

References _daemonVersion, _devices, _eventTimer, _scanTimer, DAEMON_UNAVAILABLE_STR, devpath, Kb::isOpen(), kbConnected(), kbDisconnected(), Kb::load(), Kb::matches(), Kb::save(), and versionUpdated().

Referenced by KbManager().

```
59                                {
60     QString rootdev = devpath.arg(0);
61     QFile connected(rootdev + "/connected");
62     if(!connected.open(QIODevice::ReadOnly)){
63         // No root controller - remove all keyboards
64         foreach(Kb* kb, _devices){
65             emit kbDisconnected(kb);
66             kb->save();
67             delete kb;
68         }
69         _devices.clear();
70         if(_daemonVersion != DAEMON_UNAVAILABLE_STR){
```

```
71              _daemonVersion = DAEMON_UNAVAILABLE_STR;
72              emit versionUpdated();
73          }
74          return;
75      }
76      // Check daemon version
77      QFile version(rootdev + "/version");
78      QString vString;
79      if(version.open(QIODevice::ReadOnly)){
80          vString = QString::fromUtf8(version.readLine()).trimmed();
81          version.close();
82      } else
83          vString = DAEMON_UNAVAILABLE_STR;
84      if(_daemonVersion != vString){
85          _daemonVersion = vString;
86          emit versionUpdated();
87      }
88
89      // Scan connected devices
90      QList<QStringList> lines;
91      while(1){
92          QString line = connected.readLine().trimmed();
93          if(line.isEmpty())
94              break;
95          QStringList components = line.split(" ");
96          if(components.length() < 2)             // "<path> <serial> <name>" (we're only interested in the
    first two)
97              continue;
98          lines.append(components);
99      }
100      connected.close();
101
102      // Remove any active devices not in the list
103      QMutableSetIterator<Kb*> i(_devices);
104      while(i.hasNext()){
105          Kb* kb = i.next();
106          bool matched = false;
107          foreach(const QStringList& line, lines){
108              if(kb->matches(line[0], line[1])){
109                  matched = true;
110                  break;
111              }
112          }
113          if(matched)
114              continue;
115          // Device not found, remove
116          i.remove();
117          emit kbDisconnected(kb);
118          kb->save();
119          delete kb;
120      }
121
122      // Add any new devices found in the list
123      foreach(const QStringList& line, lines){
124          bool matched = false;
125          foreach(Kb* kb, _devices){
126              if(kb->matches(line[0], line[1])){
127                  matched = true;
128                  break;
129              }
130          }
131          if(matched)
132              continue;
133          // Device not found, create new
134          Kb* kb = new Kb(this, line[0]);
135          if(!kb->isOpen()){
136              delete kb;
137              continue;
138          }
139          _devices.insert(kb);
140          // Load preferences and send signal
141          emit kbConnected(kb);
142          kb->load();
143          connect(_eventTimer, SIGNAL(timeout()), kb, SLOT(frameUpdate()));
144          connect(_scanTimer, SIGNAL(timeout()), kb, SLOT(autoSave()));
145      }
146  }
```

Here is the call graph for this function:

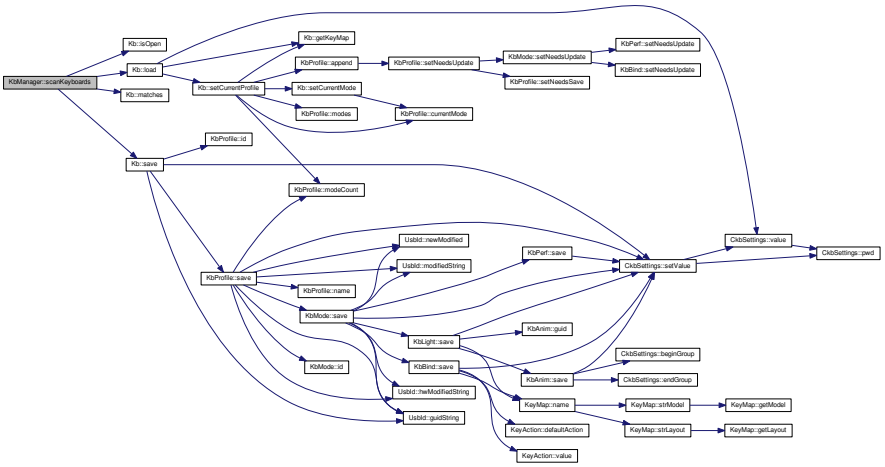

Here is the caller graph for this function:

12.32.3.14 static QTimer* KbManager::scanTimer ( ) [inline], [static]

Definition at line 43 of file kbmanager.h.

References _kbManager, and _scanTimer.

Referenced by MainWindow::MainWindow().

```
43 { return _kbManager ? _kbManager->_scanTimer : 0; }
```

Here is the caller graph for this function:



12.32.3.15 void KbManager::stop ( ) [static]

Definition at line 19 of file kbmanager.cpp.

References _kbManager.

Referenced by MainWindow::cleanup().

```
19                      {
20     if(!_kbManager)
21         return;
22     delete _kbManager;
23     _kbManager = 0;
24 }
```

Here is the caller graph for this function:



12.32.3.16 void KbManager::versionUpdated ( ) [signal]

Definition at line 188 of file moc_kbmanager.cpp.

Referenced by scanKeyboards().

```
189 {
190     QMetaObject::activate(this, &staticMetaObject, 2, Q_NULLPTR);
191 }
```

Here is the caller graph for this function:



12.32.4 Field Documentation

12.32.4.1 QString KbManager::_daemonVersion = "<unavailable>" [static], [private]

Definition at line 59 of file kbmanager.h.

Referenced by ckbDaemonVersion(), ckbDaemonVersionF(), and scanKeyboards().

12.32.4.2 QSet<Kb*> KbManager::_devices [private]

Definition at line 63 of file kbmanager.h.

Referenced by devices(), and scanKeyboards().

12.32.4.3 QTimer* KbManager::_eventTimer [private]

Definition at line 64 of file kbmanager.h.

Referenced by eventTimer(), KbManager(), and scanKeyboards().

12.32.4.4 QString KbManager::_guiVersion [static], [private]

Definition at line 59 of file kbmanager.h.

Referenced by ckbGuiVersion(), ckbGuiVersionF(), and init().

12.32.4.5 KbManager * KbManager::_kbManager = 0 [static], [private]

Definition at line 58 of file kbmanager.h.

Referenced by devices(), eventTimer(), init(), kbManager(), scanTimer(), and stop().

12.32.4.6 QTimer * KbManager::_scanTimer [private]

Definition at line 64 of file kbmanager.h.

Referenced by KbManager(), scanKeyboards(), and scanTimer().

The documentation for this class was generated from the following files:

- src/ckb/kbmanager.h
- src/ckb/kbmanager.cpp
- src/ckb/release/moc_kbmanager.cpp

12.33 KbMode Class Reference

`#include <src/ckb/kbmode.h>`

Inheritance diagram for KbMode:

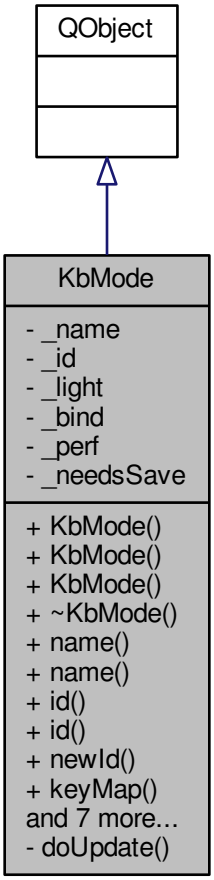

Collaboration diagram for KbMode:

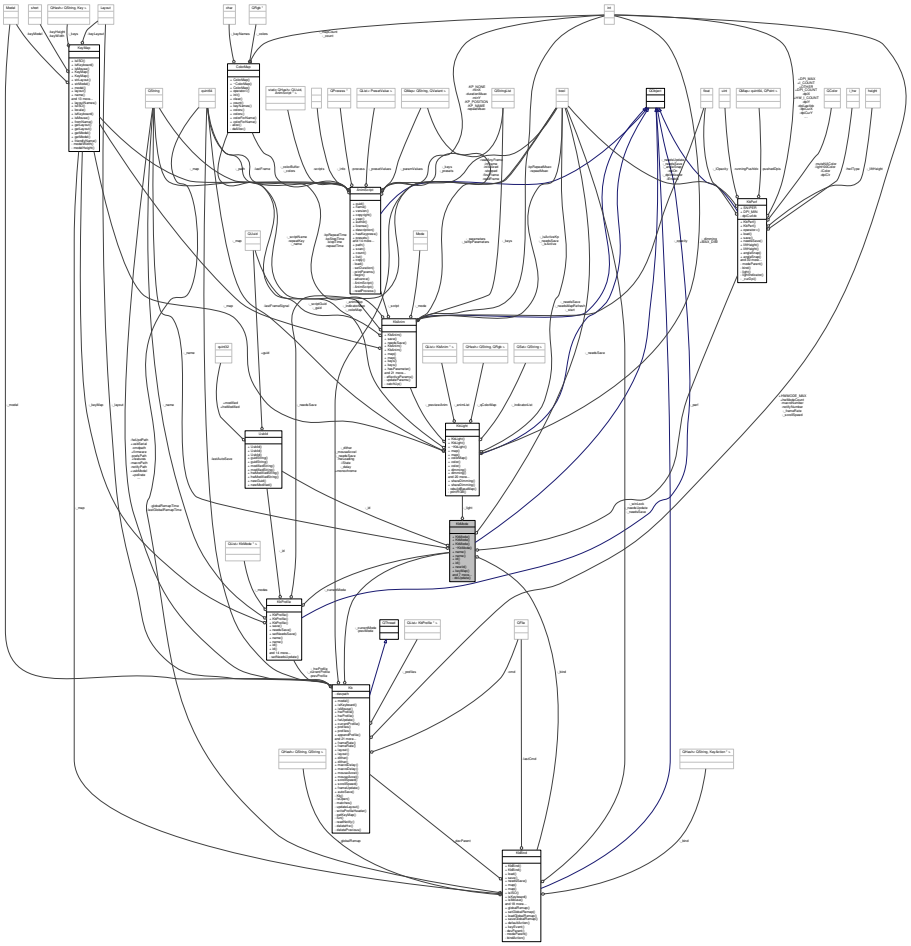

Signals

- void updated ()

Public Member Functions

- KbMode (Kb *parent, const KeyMap &keyMap, const QString &guid="", const QString &modified="")
- KbMode (Kb *parent, const KeyMap &keyMap, CkbSettings &settings)
- KbMode (Kb *parent, const KeyMap &keyMap, const KbMode &other)

  KbMode::KbMode.
- ~KbMode ()

  KbMode::~KbMode Destructor may be used for Debugging (issue #38 with SIGSEGV). Insert qDebug-statement.
- const QString & name () const
- void name (const QString &newName)
- UsbId & id ()
- void id (const UsbId &newId)
- void newId ()
- void keyMap (const KeyMap &keyMap)
- KbLight * light ()
- KbBind * bind ()
- KbPerf * perf ()

- void save (CkbSettings &settings)
- bool needsSave () const
- void setNeedsSave ()
- void setNeedsUpdate ()

Private Slots

- void doUpdate ()

Private Attributes

- QString _name
- UsbId _id
- KbLight * _light
- KbBind * _bind
- KbPerf * _perf
- bool _needsSave

12.33.1 Detailed Description

Definition at line 36 of file kbmode.h.

12.33.2 Constructor & Destructor Documentation

12.33.2.1 KbMode::KbMode (Kb * *parent*, const KeyMap & *keyMap*, const QString & *guid* = " ", const QString & *modified* = " ")

Definition at line 4 of file kbmode.cpp.

References _id, _light, doUpdate(), UsbId::guid, and updated().

```
4                                                                                                    :
5     QObject(parent),
6     _name("Unnamed"), _id(guid, modified),
7     _light(new KbLight(this, keyMap)), _bind(new KbBind(this, parent, keyMap)),
      _perf(new KbPerf(this)),
8     _needsSave(true)
9 {
10     connect(_light, SIGNAL(updated()), this, SLOT(doUpdate()));
11     if(_id.guid.isNull())
12         _id.guid = QUuid::createUuid();
13 }
```

Here is the call graph for this function:

12.33.2.2 KbMode::KbMode (Kb * *parent*, const KeyMap & *keyMap*, CkbSettings & *settings*)

Definition at line 30 of file kbmode.cpp.

References _bind, _id, _light, _name, _perf, CkbSettings::contains(), doUpdate(), UsbId::guid, UsbId::hwModified, UsbId::hwModifiedString(), KbPerf::load(), KbBind::load(), KbLight::load(), UsbId::modified, updated(), and CkbSettings::value().

```
30                                                                          :
31     QObject(parent),
32     _name(settings.value("Name").toString().trimmed()),
33     _id(settings.value("GUID").toString().trimmed(), settings.value("Modified").toString().
       trimmed()),
34     _light(new KbLight(this, keyMap)), _bind(new KbBind(this, parent, keyMap)),
       _perf(new KbPerf(this)),
35     _needsSave(false)
36 {
37     if(settings.contains("HwModified"))
38         _id.hwModifiedString(settings.value("HwModified").toString());
39     else
40         _id.hwModified = _id.modified;
41
42     connect(_light, SIGNAL(updated()), this, SLOT(doUpdate()));
43     if(_id.guid.isNull())
44         _id.guid = QUuid::createUuid();
45     if(_name == "")
46         _name = "Unnamed";
47     _light->load(settings);
48     _bind->load(settings);
49     _perf->load(settings);
50 }
```

Here is the call graph for this function:

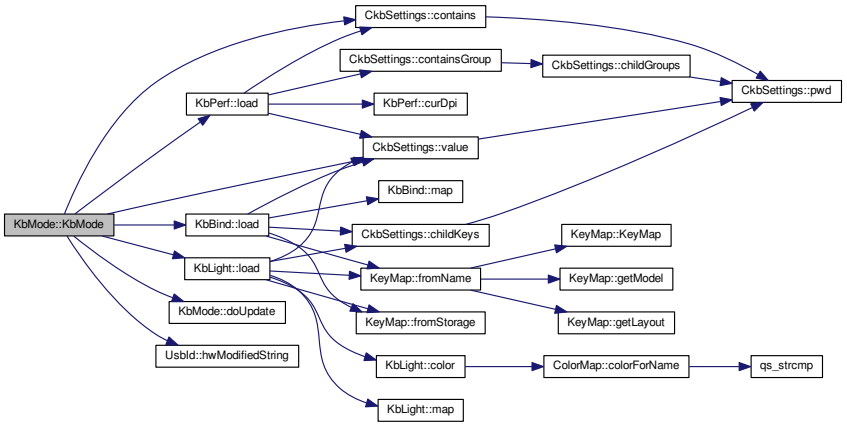

12.33.2.3 KbMode::KbMode (Kb * *parent*, const KeyMap & *keyMap*, const KbMode & *other*)

Parameters

parent	Kb as parent (append to the Keyboard list
keyMap	Map to copy from
other	Mode to copy from Constructor to copy an existing Keyboard-Mode KbMode &other

Definition at line 21 of file kbmode.cpp.

References _light, doUpdate(), and updated().

```
21                                                                          :
22     QObject(parent),
```

```
23     _name(other._name), _id(other._id),
24     _light(new KbLight(this, keyMap, *other._light)), _bind(new
       KbBind(this, parent, keyMap, *other._bind)), _perf(new KbPerf(this, *other.
       _perf)),
25     _needsSave(true)
26 {
27     connect(_light, SIGNAL(updated()), this, SLOT(doUpdate()));
28 }
```

Here is the call graph for this function:

12.33.2.4 KbMode::~KbMode ( )

Definition at line 89 of file kbmode.cpp.

```
89                 {
90 }
```

12.33.3 Member Function Documentation

12.33.3.1 KbBind* KbMode::bind ( ) [inline]

Definition at line 61 of file kbmode.h.

References _bind.

Referenced by KbPerf::bind(), Kb::currentBind(), Kb::frameUpdate(), KbBindWidget::on_copyButton_clicked(), and Kb::readNotify().

```
61 { return _bind; }
```

Here is the caller graph for this function:

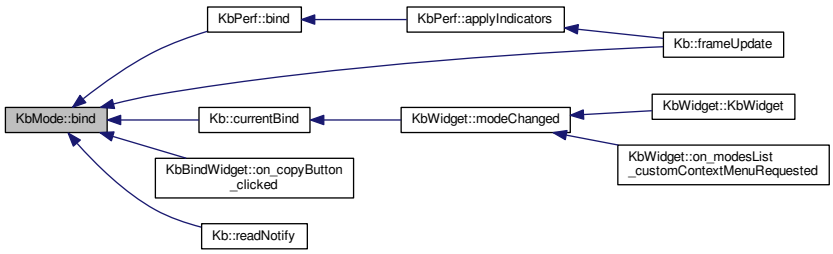

12.33.3.2 void KbMode::doUpdate ( ) [private], [slot]

Definition at line 82 of file kbmode.cpp.

References updated().

Referenced by KbMode().

```
82                      {
83     emit updated();
84 }
```

Here is the caller graph for this function:

12.33.3.3 UsbId& KbMode::id ( ) [inline]

Definition at line 52 of file kbmode.h.

References _id.

Referenced by KbProfile::find(), Kb::hwSave(), KbProfile::KbProfile(), KbWidget::on_modesList_customContextMenuRequested(), KbWidget::on_modesList_itemChanged(), KbWidget::on_modesList_itemClicked(), KbWidget::profileChanged(), Kb::readNotify(), and KbProfile::save().

```
52 { return _id; }
```

Here is the caller graph for this function:

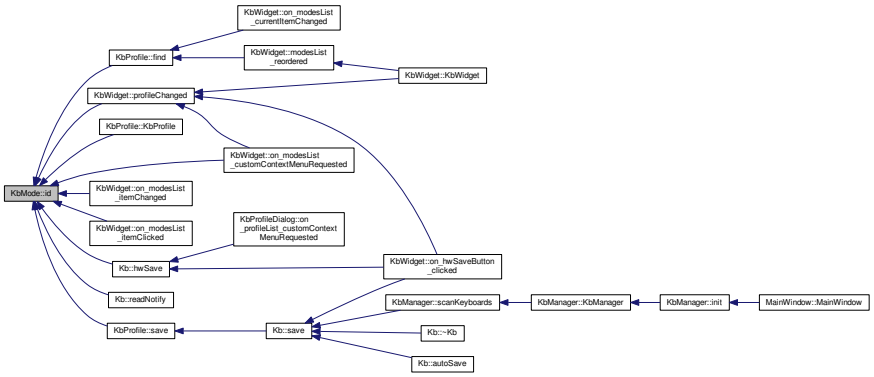

12.33.3.4 void KbMode::id (const UsbId & *newId*) [inline]

Definition at line 53 of file kbmode.h.

References _id, _needsSave, and newId().

```
53 { _needsSave = true; _id = newId; }
```

Here is the call graph for this function:



12.33.3.5 void KbMode::keyMap (const KeyMap & *keyMap*)

Definition at line 60 of file kbmode.cpp.

References _bind, _light, _needsSave, KbLight::map(), and KbBind::map().

Referenced by KbProfile::keyMap().

```
60                                          {
61     _needsSave = true;
62     _light->map(keyMap);
63     _bind->map(keyMap);
64 }
```

Here is the call graph for this function:

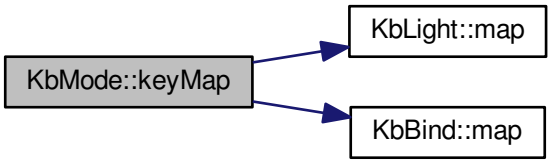

Here is the caller graph for this function:

12.33.3.6 KbLight* KbMode::light ( ) [inline]

Definition at line 60 of file kbmode.h.

References _light.

Referenced by Kb::currentLight(), Kb::frameUpdate(), Kb::hwSave(), KbBind::light(), KbPerf::light(), Kb::readNotify(), and Kb::updateLayout().

```
60 { return _light; }
```

Here is the caller graph for this function:

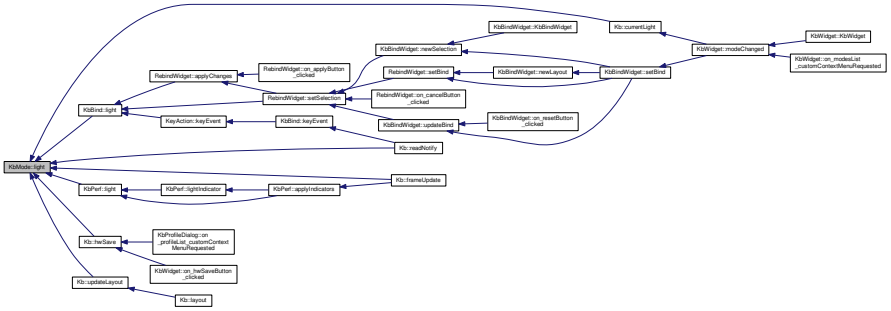

12.33.3.7 const QString& KbMode::name ( ) const [inline]

Definition at line 50 of file kbmode.h.

References _name.

Referenced by Kb::hwSave(), ModeSelectDialog::ModeSelectDialog(), KbWidget::on_modesList_itemChanged(), KbWidget::profileChanged(), Kb::readNotify(), and RebindWidget::setBind().

```
50 { return _name; }
```

Here is the caller graph for this function:

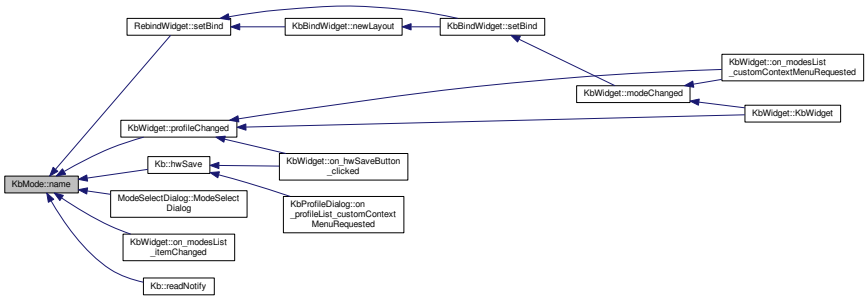

12.33.3.8 void KbMode::name (const QString & *newName*) [inline]

Definition at line 51 of file kbmode.h.

References _name, and _needsSave.

```
51 { _needsSave = true; _name = newName.trimmed(); if(_name == "")
      _name = "Unnamed"; }
```

12.33.3.9 bool KbMode::needsSave ( ) const

Definition at line 78 of file kbmode.cpp.

References _bind, _light, _needsSave, _perf, KbPerf::needsSave(), KbBind::needsSave(), and KbLight::needsSave().

Referenced by KbProfile::needsSave().

```
78                              {
79     return _needsSave || _light->needsSave() || _bind->
      needsSave() || _perf->needsSave();
80 }
```

Here is the call graph for this function:

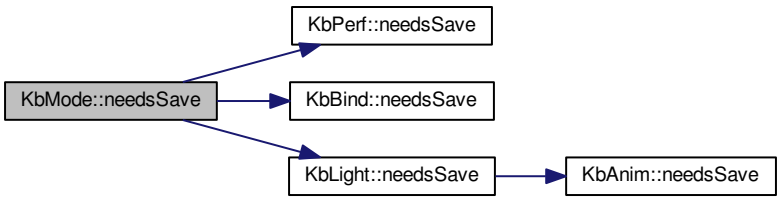

Here is the caller graph for this function:



12.33.3.10 void KbMode::newId ( )

Definition at line 52 of file kbmode.cpp.

References _id, _light, _needsSave, KbLight::animList(), and KbAnim::newId().

Referenced by id(), KbProfile::newId(), and KbWidget::on_modesList_customContextMenuRequested().

```
52                  {
53     _needsSave = true;
54     _id = UsbId();
55     // Create new IDs for animations
56     foreach(KbAnim* anim, _light->animList())
57         anim->newId();
58 }
```

Here is the call graph for this function:

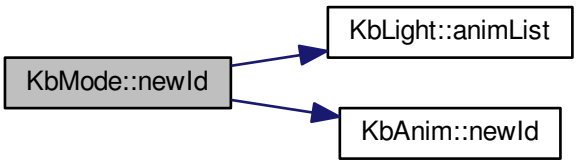

Here is the caller graph for this function:

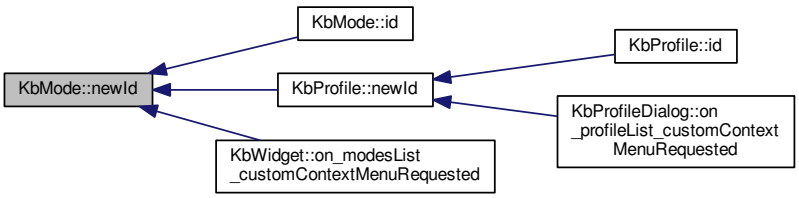

12.33.3.11 KbPerf* KbMode::perf ( ) [inline]

Definition at line 62 of file kbmode.h.

References _perf.

Referenced by Kb::currentPerf(), Kb::frameUpdate(), Kb::hwSave(), KPerfWidget::on_copyButton_clicked(), MPerfWidget::on_copyButton_clicked(), KbBind::perf(), and Kb::readNotify().

```
62 { return _perf; }
```

Here is the caller graph for this function:

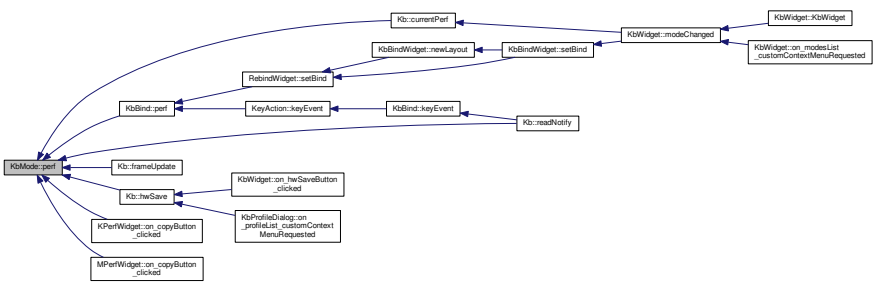

12.33.3.12 void KbMode::save (CkbSettings & *settings*)

Definition at line 66 of file kbmode.cpp.

References _bind, _id, _light, _name, _needsSave, _perf, UsbId::guidString(), UsbId::hwModifiedString(), UsbId::modifiedString(), UsbId::newModified(), KbPerf::save(), KbBind::save(), KbLight::save(), and CkbSettings::setValue().

Referenced by KbProfile::save().

```
66                                          {
67     _needsSave = false;
68     _id.newModified();
69     settings.setValue("GUID", _id.guidString());
70     settings.setValue("Modified", _id.modifiedString());
71     settings.setValue("HwModified", _id.hwModifiedString());
72     settings.setValue("Name", _name);
73     _light->save(settings);
74     _bind->save(settings);
75     _perf->save(settings);
76 }
```

Here is the call graph for this function:

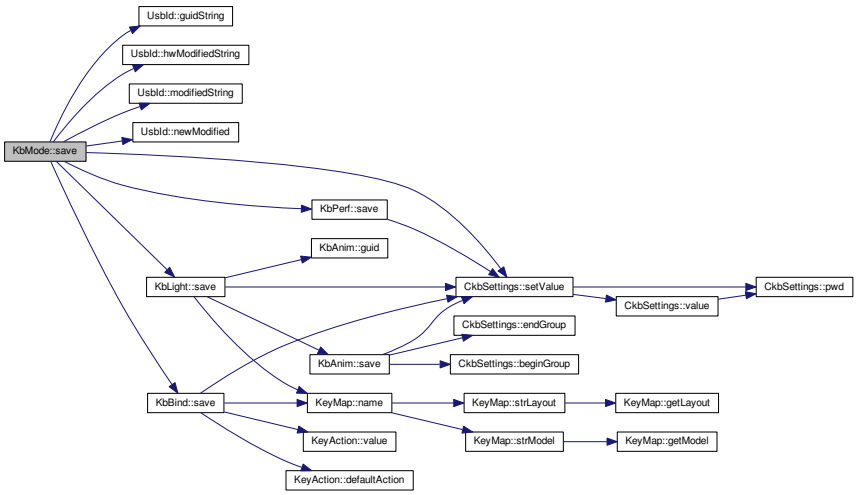

Here is the caller graph for this function:



12.33.3.13 void KbMode::setNeedsSave ( ) [inline]

Definition at line 67 of file kbmode.h.

References _needsSave.

Referenced by Kb::hwSave(), and Kb::readNotify().

```
67 { _needsSave = true; }
```

Here is the caller graph for this function:

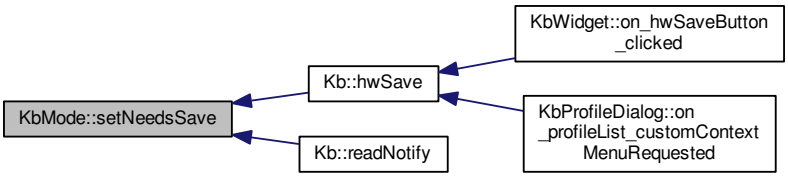

12.33.3.14 void KbMode::setNeedsUpdate ( ) [inline]

Definition at line 68 of file kbmode.h.

References _bind, _perf, KbBind::setNeedsUpdate(), and KbPerf::setNeedsUpdate().

Referenced by KbProfile::setNeedsUpdate().

```
68 { _bind->setNeedsUpdate(); _perf->setNeedsUpdate(); }
```

Here is the call graph for this function:

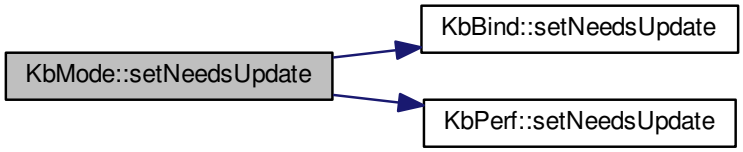

Here is the caller graph for this function:

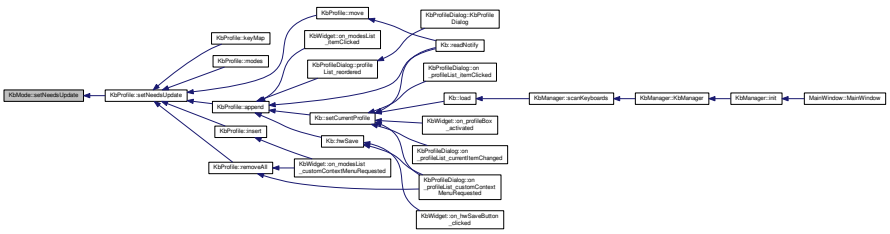

12.33.3.15 void KbMode::updated ( ) [signal]

Definition at line 131 of file moc_kbmode.cpp.

Referenced by doUpdate(), and KbMode().

```
132 {
133     QMetaObject::activate(this, &staticMetaObject, 0, Q_NULLPTR);
134 }
```

Here is the caller graph for this function:



12.33.4 Field Documentation

12.33.4.1 KbBind* KbMode::_bind [private]

Definition at line 78 of file kbmode.h.

Referenced by bind(), KbMode(), keyMap(), needsSave(), save(), and setNeedsUpdate().

12.33.4.2 UsbId KbMode::_id [private]

Definition at line 75 of file kbmode.h.

Referenced by id(), KbMode(), newId(), and save().

12.33.4.3 KbLight* KbMode::_light [private]

Definition at line 77 of file kbmode.h.

Referenced by KbMode(), keyMap(), light(), needsSave(), newId(), and save().

12.33.4.4 QString KbMode::_name [private]

Definition at line 74 of file kbmode.h.

Referenced by KbMode(), name(), and save().

12.33.4.5 bool KbMode::_needsSave [private]

Definition at line 81 of file kbmode.h.

Referenced by id(), keyMap(), name(), needsSave(), newId(), save(), and setNeedsSave().

12.33.4.6 KbPerf* KbMode::_perf [private]

Definition at line 79 of file kbmode.h.

Referenced by KbMode(), needsSave(), perf(), save(), and setNeedsUpdate().

The documentation for this class was generated from the following files:

- src/ckb/kbmode.h
- src/ckb/kbmode.cpp
- src/ckb/release/moc_kbmode.cpp

12.34 KbPerf Class Reference

`#include <src/ckb/kbperf.h>`

Inheritance diagram for KbPerf:

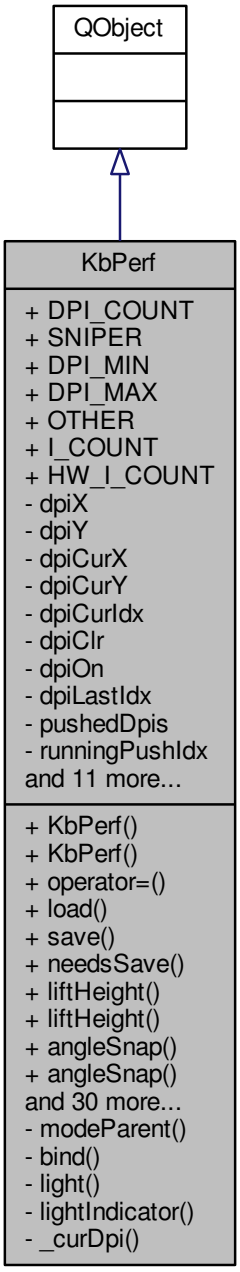

Collaboration diagram for KbPerf:

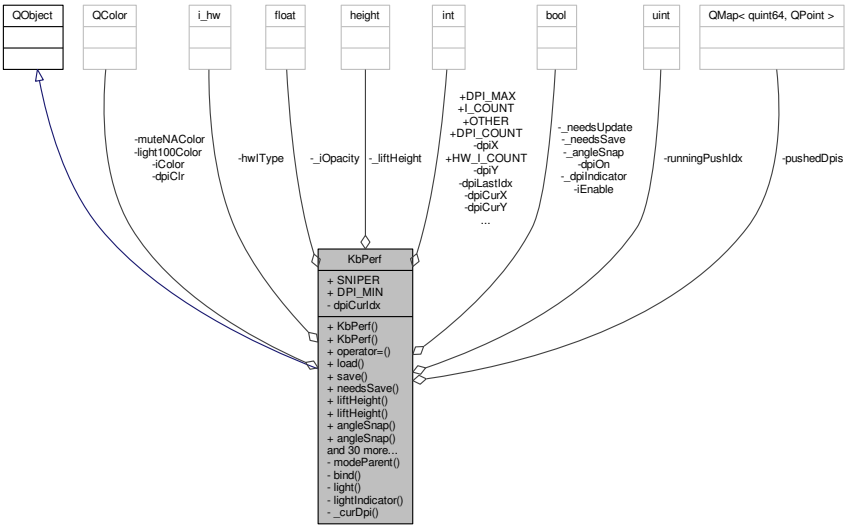

Public Types

- enum height {
  LOW = 1, LOWMED, MEDIUM, MEDHIGH,
  HIGH }
- enum indicator {
  NUM, CAPS, SCROLL, HW_IMAX = SCROLL,
  MODE, MACRO, LIGHT, LOCK,
  MUTE }
- enum i_hw { NONE = -1, NORMAL, ON, OFF }

Signals

- void didLoad ()
- void settingsUpdated ()

Public Member Functions

- KbPerf (KbMode *parent)
- KbPerf (KbMode *parent, const KbPerf &other)
- const KbPerf & operator= (const KbPerf &rhs)
- void load (CkbSettings &settings)
- void save (CkbSettings &settings)
- bool needsSave () const
- height liftHeight () const
- void liftHeight (height newHeight)
- bool angleSnap () const
- void angleSnap (bool newAngleSnap)
- QPoint dpi (int index) const
- void dpi (int index, const QPoint &newValue)
- QPoint sniperDpi () const
- void sniperDpi (const QPoint &newValue)

- void dpi (int index, int newValue)
- void sniperDpi (int newValue)
- QPoint curDpi () const
- void curDpi (const QPoint &newDpi)
- void curDpi (int newDpi)
- int curDpiIdx () const
- void curDpiIdx (int newIdx)
- void dpiUp ()
- void dpiDown ()
- bool dpiEnabled (int index) const
- void dpiEnabled (int index, bool newEnabled)
- quint64 pushDpi (const QPoint &newDpi)
- quint64 pushDpi (int newDpi)
- quint64 pushSniper ()
- void popDpi (quint64 pushIdx)
- float iOpacity () const
- void iOpacity (float newIOpacity)
- bool dpiIndicator () const
- void dpiIndicator (bool newDpiIndicator)
- QColor dpiColor (int index) const
- void dpiColor (int index, const QColor &newColor)
- void getIndicator (indicator index, QColor &color1, QColor &color2, QColor &color3, bool &software_enable, i_hw &hardware_enable)
- void setIndicator (indicator index, const QColor &color1, const QColor &color2, const QColor &color3=QColor(), bool software_enable=true, i_hw hardware_enable=NORMAL)
- void update (QFile &cmd, int notifyNumber, bool force=false, bool saveCustomDpi=true)
- void setNeedsUpdate ()
- void applyIndicators (int modeIndex, const bool indicatorState[HW_I_COUNT])

Static Public Attributes

- static const int DPI_COUNT = 6
- static const int SNIPER = 0
- static const int DPI_MIN = 100
- static const int DPI_MAX = 12000
- static const int OTHER = DPI_COUNT
- static const int I_COUNT = (int)MUTE + 1
- static const int HW_I_COUNT = (int)HW_IMAX + 1

Private Member Functions

- KbMode * modeParent () const
- KbBind * bind () const
- KbLight * light () const
- void lightIndicator (const char *name, QRgb rgba)
- void _curDpi (const QPoint &newDpi)

Private Attributes

- int dpiX [DPI_COUNT]
- int dpiY [DPI_COUNT]
- int dpiCurX
- int dpiCurY
- int dpiCurIdx
- QColor dpiClr [DPI_COUNT+1]
- bool dpiOn [DPI_COUNT]
- int dpiLastIdx
- QMap< quint64, QPoint > pushedDpis
- uint runningPushIdx
- float _iOpacity
- QColor iColor [I_COUNT][2]
- QColor light100Color
- QColor muteNAColor
- bool iEnable [I_COUNT]
- i_hw hwlType [HW_I_COUNT]
- bool _dpiIndicator
- height _liftHeight
- bool _angleSnap
- bool _needsUpdate
- bool _needsSave

12.34.1 Detailed Description

Definition at line 15 of file kbperf.h.

12.34.2 Member Enumeration Documentation

12.34.2.1 enum KbPerf::height

Enumerator

LOW

LOWMED

MEDIUM

MEDHIGH

HIGH

Definition at line 31 of file kbperf.h.

```
31                  {
32          LOW = 1,
33          LOWMED,
34          MEDIUM,
35          MEDHIGH,
36          HIGH
37      };
```

12.34.2.2 enum KbPerf::i_hw

Enumerator

NONE

NORMAL

ON

OFF

Definition at line 98 of file kbperf.h.

```
98              {
99          NONE = -1,  // For non-hardware indicators
100          NORMAL,
101          ON,
102          OFF
103      };
```

12.34.2.3 enum KbPerf::indicator

Enumerator

NUM

CAPS

SCROLL

HW_IMAX

MODE

MACRO

LIGHT

LOCK

MUTE

Definition at line 85 of file kbperf.h.

```
85                  {
86          // Hardware
87          NUM,
88          CAPS,
89          SCROLL, HW_IMAX = SCROLL,
90          // Software
91          MODE,
92          MACRO,
93          LIGHT,
94          LOCK,
95          MUTE
96      };
```

12.34.3 Constructor & Destructor Documentation

12.34.3.1 KbPerf::KbPerf (KbMode * *parent*) [explicit]

Definition at line 13 of file kbperf.cpp.

References CAPS, DPI_COUNT, dpiClr, dpiCurIdx, dpiCurX, dpiCurY, dpiLastIdx, dpiOn, dpiX, dpiY, HW_I_COUNT, hwIType, I_COUNT, iColor, iEnable, LIGHT, light100Color, LOCK, MACRO, MODE, MUTE, muteNAColor, NORMAL, NUM, and SCROLL.

```
13                              :
14     QObject(parent), runningPushIdx(1),
15     _iOpacity(1.f), _dpiIndicator(true), _liftHeight(
       MEDIUM), _angleSnap(false),
16     _needsUpdate(true), _needsSave(true) {
17     // Default DPI settings
18     dpiX[0] = dpiY[0] = 400;
19     dpiX[1] = dpiY[1] = 450;
20     dpiX[2] = dpiY[2] = 800;
21     dpiX[3] = dpiY[3] = 1500;
22     dpiX[4] = dpiY[4] = 3000;
23     dpiX[5] = dpiY[5] = 6000;
24     dpiClr[0] = QColor(255, 0, 0);
25     dpiClr[1] = QColor(255, 192, 0);
26     dpiClr[2] = QColor(255, 255, 0);
27     dpiClr[3] = QColor(0, 255, 0);
28     dpiClr[4] = QColor(0, 255, 255);
29     dpiClr[5] = QColor(255, 255, 255);
30     dpiClr[6] = QColor(192, 192, 192);
31     for(int i = 0; i < DPI_COUNT; i++)
32         dpiOn[i] = true;
33     dpiLastIdx = dpiCurIdx = 3;
34     dpiCurX = dpiX[dpiCurIdx];
35     dpiCurY = dpiY[dpiCurIdx];
36     // Default indicators
37     iColor[NUM][0] = iColor[CAPS][0] = iColor[SCROLL][0] = QColor(0, 255, 0)
       ;   // Lock lights: on = green, off = black
38     iColor[NUM][1] = iColor[CAPS][1] = iColor[SCROLL][1] = QColor(0, 0, 0);
39     iColor[MACRO][0] = QColor(255, 0, 0);                                    // Macro: on =
       red, off = black
40     iColor[LOCK][0] = QColor(255, 255, 255);                                 // Win lock: on =
       white, off = black
41     iColor[MODE][0] = iColor[MUTE][0] = QColor(255, 255, 255, 0);            //
       Mode, mute: on = transparent, off = black
42     iColor[MODE][1] = iColor[MACRO][1] = iColor[LOCK][1] =
      iColor[MUTE][1] = muteNAColor = QColor(0, 0, 0);
43     iColor[LIGHT][0] = QColor(255, 0, 0);       // Brightness: red, yellow, white
44     iColor[LIGHT][1] = QColor(255, 255, 0);
45     light100Color = QColor(255, 255, 255);
46     for(int i = 0; i < HW_I_COUNT; i++){
47         // Set all lock lights to HW mode
48         iEnable[i] = false;
49         hwIType[i] = NORMAL;
50     }
51     for(int i = HW_I_COUNT; i < I_COUNT; i++){
52         // Turn all other indicators on
53         iEnable[i] = true;
54     }
55 }
```

12.34.3.2 KbPerf::KbPerf (KbMode * *parent*, const KbPerf & *other*)

Definition at line 57 of file kbperf.cpp.

References curDpi(), DPI_COUNT, dpiClr, dpiOn, dpiX, dpiY, hwIType, I_COUNT, iColor, iEnable, and pushedDpis.

```
57                                                  :
58     QObject(parent), dpiCurX(other.dpiCurX), dpiCurY(other.
       dpiCurY), dpiCurIdx(other.dpiCurIdx), dpiLastIdx(other.
       dpiLastIdx), runningPushIdx(1),
59     _iOpacity(other._iOpacity), light100Color(other.
       light100Color), muteNAColor(other.muteNAColor),
       _dpiIndicator(other._dpiIndicator),
60     _liftHeight(other._liftHeight), _angleSnap(other.
       _angleSnap),
61     _needsUpdate(true), _needsSave(true) {
62     memcpy(dpiX, other.dpiX, sizeof(dpiX));
63     memcpy(dpiY, other.dpiY, sizeof(dpiY));
64     for(int i = 0; i < DPI_COUNT + 1; i++)
65         dpiClr[i] = other.dpiClr[i];
66     memcpy(dpiOn, other.dpiOn, sizeof(dpiOn));
67     for(int i = 0; i < I_COUNT; i++){
68         iColor[i][0] = other.iColor[i][0];
69         iColor[i][1] = other.iColor[i][1];
70     }
71     memcpy(iEnable, other.iEnable, sizeof(iEnable));
72     memcpy(hwIType, other.hwIType, sizeof(hwIType));
73     // Don't copy pushed DPI states. If the other mode has any, restore the original DPI
74     if(!other.pushedDpis.isEmpty())
75         curDpi(other.pushedDpis[0]);
76 }
```

Here is the call graph for this function:

12.34.4 Member Function Documentation

12.34.4.1 void KbPerf::_curDpi (const QPoint & *newDpi*) [private]

Definition at line 262 of file kbperf.cpp.

References _needsSave, _needsUpdate, DPI_COUNT, dpiCurIdx, dpiCurX, dpiCurY, dpiLastIdx, dpiX, and dpiY.

Referenced by curDpi(), popDpi(), and pushDpi().

```
262                                         {
263     dpiCurX = newDpi.x();
264     dpiCurY = newDpi.y();
265     // Set current/last index
266     dpiCurIdx = -1;
267     for(int i = 0; i < DPI_COUNT; i++){
268         if(dpiCurX == dpiX[i] && dpiCurY == dpiY[i]){
269             dpiCurIdx = i;
270             if(i != 0)
271                 dpiLastIdx = i;
272             break;
273         }
274     }
275     _needsUpdate = _needsSave = true;
276 }
```

Here is the caller graph for this function:

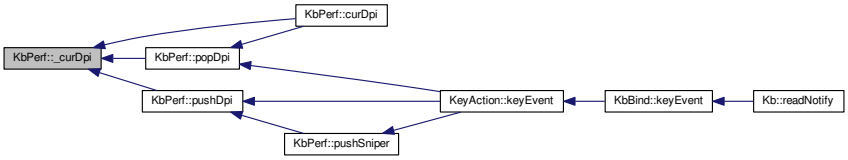

12.34.4.2 bool KbPerf::angleSnap ( ) const [inline]

Definition at line 42 of file kbperf.h.

References _angleSnap.

Referenced by MPerfWidget::on_aSnapBox_clicked(), Kb::readNotify(), and MPerfWidget::setPerf().

```
42 { return _angleSnap; }
```

Here is the caller graph for this function:

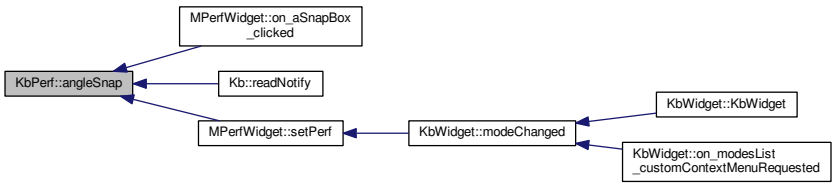

12.34.4.3 void KbPerf::angleSnap (bool *newAngleSnap*)

Definition at line 368 of file kbperf.cpp.

References _angleSnap, _needsSave, and _needsUpdate.

```
368                                         {
369     _angleSnap = newAngleSnap;
370     _needsUpdate = _needsSave = true;
371 }
```

12.34.4.4 void KbPerf::applyIndicators (int *modeIndex,* const bool *indicatorState[HW_I_COUNT]*)

Definition at line 432 of file kbperf.cpp.

References _dpiIndicator, _iOpacity, bind(), CAPS, curDpiIdx(), dpiClr, getMuteState(), Kb::HWMODE_MAX, iColor, iEnable, LIGHT, light(), light100Color, lightIndicator(), LOCK, MACRO, MODE, MUTE, MUTED, muteNAColor, NUM, OTHER, KbLight::resetIndicators(), SCROLL, and UNMUTED.

Referenced by Kb::frameUpdate().

```
432                                                                         {
433     light()->resetIndicators();
434     if(_iOpacity <= 0.f)
435         return;
436     if(_dpiIndicator){
437         // Set DPI indicator according to index
438         int index = curDpiIdx();
439         if(index == -1 || index > OTHER)
440             index = OTHER;
441         lightIndicator("dpi", dpiClr[index].rgba());
442     }
443     // KB indicators
444     if(iEnable[MODE]){
445         for(int i = 0; i < Kb::HWMODE_MAX; i++){
446             char name[4];
447             snprintf(name, sizeof(name), "m%d", i + 1);
448             if(modeIndex == i)
449                 lightIndicator(name, iColor[MODE][0].rgba());
450             else
451                 lightIndicator(name, iColor[MODE][1].rgba());
452         }
453     }
454     if(iEnable[MACRO])
455         lightIndicator("mr", iColor[MUTE][1].rgba());
456     if(iEnable[LIGHT]){
457         switch(light()->dimming()){
458         case 0: // 100%
459             lightIndicator("light", light100Color.rgba());
460             break;
461         case 1: // 67%
462             lightIndicator("light", iColor[LIGHT][1].rgba());
463             break;
464         case 2: // 33%
465         case 3: // light off
466             lightIndicator("light", iColor[LIGHT][0].rgba());
467             break;
```

```
468         }
469     }
470     if(iEnable[LOCK]){
471         if(bind()->winLock())
472             lightIndicator("lock", iColor[LOCK][0].rgba());
473         else
474             lightIndicator("lock", iColor[LOCK][1].rgba());
475     }
476     if(iEnable[MUTE]){
477         switch(getMuteState()){
478         case MUTED:
479             lightIndicator("mute", iColor[MUTE][0].rgba());
480             break;
481         case UNMUTED:
482             lightIndicator("mute", iColor[MUTE][1].rgba());
483             break;
484         default:
485             lightIndicator("mute", muteNAColor.rgba());
486             break;
487         }
488     }
489     // Lock lights
490     if(iEnable[NUM])
491         lightIndicator("numlock", indicatorState[0] ? iColor[NUM][0].rgba() :
    iColor[NUM][1].rgba());
492     if(iEnable[CAPS])
493         lightIndicator("caps", indicatorState[1] ? iColor[CAPS][0].rgba() :
    iColor[CAPS][1].rgba());
494     if(iEnable[SCROLL])
495         lightIndicator("scroll", indicatorState[2] ? iColor[SCROLL][0].rgba() :
    iColor[SCROLL][1].rgba());
496 }
```

Here is the call graph for this function:

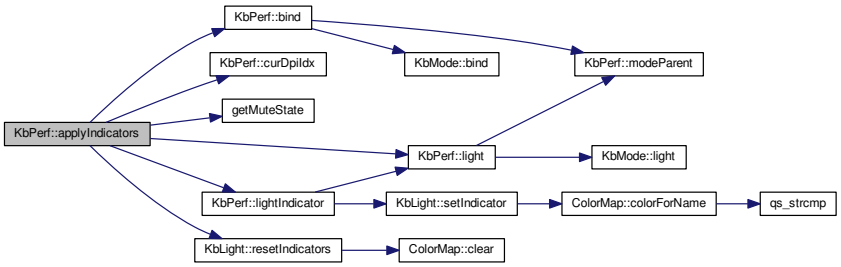

Here is the caller graph for this function:



12.34.4.5 KbBind * KbPerf::bind ( ) const [private]

Definition at line 100 of file kbperf.cpp.

References KbMode::bind(), and modeParent().

Referenced by applyIndicators().

```
100                             {
101     return modeParent()->bind();
102 }
```

Here is the call graph for this function:

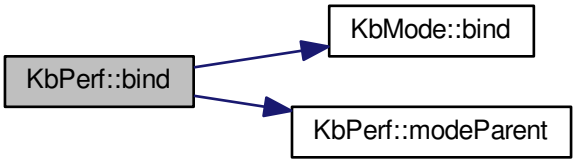

Here is the caller graph for this function:



12.34.4.6 QPoint KbPerf::curDpi ( ) const [inline]

Definition at line 57 of file kbperf.h.

References dpiCurX, and dpiCurY.

Referenced by curDpiIdx(), KbPerf(), load(), operator=(), and pushDpi().

```
57 { return QPoint(dpiCurX, dpiCurY); }
```

Here is the caller graph for this function:

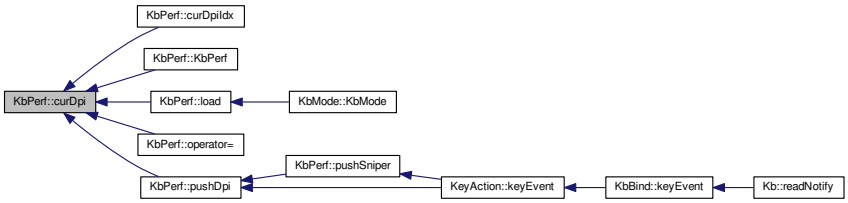

12.34.4.7 void KbPerf::curDpi (const QPoint & *newDpi*)

Definition at line 278 of file kbperf.cpp.

References _curDpi(), popDpi(), and pushedDpis.

```
278                                     {
279     while(pushedDpis.count() > 0)
280         popDpi(pushedDpis.keys().last());
281     _curDpi(newDpi);
282 }
```

Here is the call graph for this function:



12.34.4.8 void KbPerf::curDpi (int *newDpi*) [inline]

Definition at line 59 of file kbperf.h.

References curDpi().

Referenced by curDpi().

```
59 { curDpi(QPoint(newDpi, newDpi)); }
```

Here is the call graph for this function:



Here is the caller graph for this function:



12.34.4.9 int KbPerf::curDpiIdx ( ) const [inline]

Definition at line 61 of file kbperf.h.

References dpiCurIdx.

Referenced by applyIndicators(), dpiDown(), dpiUp(), and Kb::readNotify().

```
61 { return dpiCurIdx; }
```

Here is the caller graph for this function:

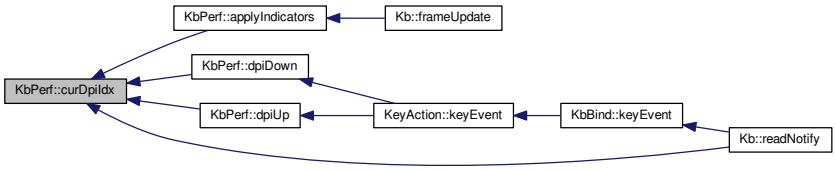

12.34.4.10 void KbPerf::curDpiIdx (int *newIdx*) [inline]

Definition at line 62 of file kbperf.h.

References curDpi(), and dpi().

```
62 { curDpi(dpi(newIdx)); }
```

Here is the call graph for this function:

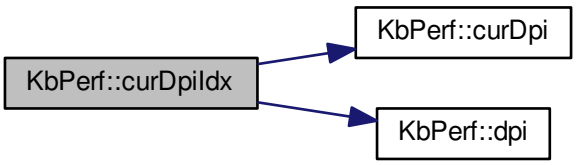

12.34.4.11 void KbPerf::didLoad ( ) [signal]

Definition at line 134 of file moc_kbperf.cpp.

Referenced by load().

```
135 {
136     QMetaObject::activate(this, &staticMetaObject, 0, Q_NULLPTR);
137 }
```

Here is the caller graph for this function:

12.34.4.12 QPoint KbPerf::dpi (int *index*) const [inline]

Definition at line 48 of file kbperf.h.

References DPI_COUNT, dpiX, and dpiY.

Referenced by MPerfWidget::boxXChanged(), MPerfWidget::boxYChanged(), curDpiIdx(), KeyAction::keyEvent(), Kb::readNotify(), RebindWidget::setBind(), MPerfWidget::setPerf(), MPerfWidget::sliderXMoved(), MPerfWidget::sliderYMoved(), and sniperDpi().

```
48 { if(index < 0 || index >= DPI_COUNT) return QPoint(); return QPoint(
      dpiX[index], dpiY[index]); }
```

Here is the caller graph for this function:

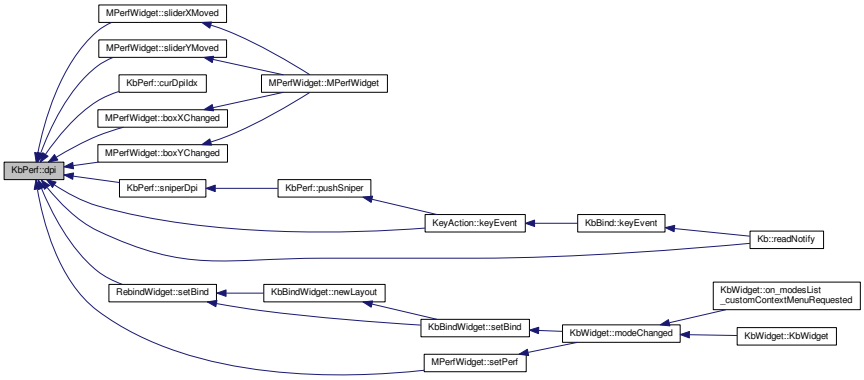

12.34.4.13 void KbPerf::dpi (int *index*, const QPoint & *newValue*)

Definition at line 249 of file kbperf.cpp.

References _needsSave, _needsUpdate, DPI_COUNT, dpiCurIdx, dpiCurX, dpiCurY, dpiX, and dpiY.

```
249                                                 {
250     if(index < 0 || index >= DPI_COUNT)
251         return;
252     dpiX[index] = newValue.x();
253     dpiY[index] = newValue.y();
254     // Update current DPI if needed
255     if(dpiCurIdx == index){
256         dpiCurX = newValue.x();
257         dpiCurY = newValue.y();
258     }
259     _needsUpdate = _needsSave = true;
260 }
```

12.34.4.14 void KbPerf::dpi (int *index*, int *newValue*) [inline]

Definition at line 53 of file kbperf.h.

References dpi().

Referenced by dpi().

```
53 { dpi(index, QPoint(newValue, newValue)); }
```

Here is the call graph for this function:

Here is the caller graph for this function:

12.34.4.15 QColor KbPerf::dpiColor (int *index*) const [inline]

Definition at line 82 of file kbperf.h.

References dpiClr.

Referenced by MPerfWidget::colorChanged(), Kb::readNotify(), MPerfWidget::setPerf(), and update().

```
82 { return dpiClr[index]; }
```

Here is the caller graph for this function:

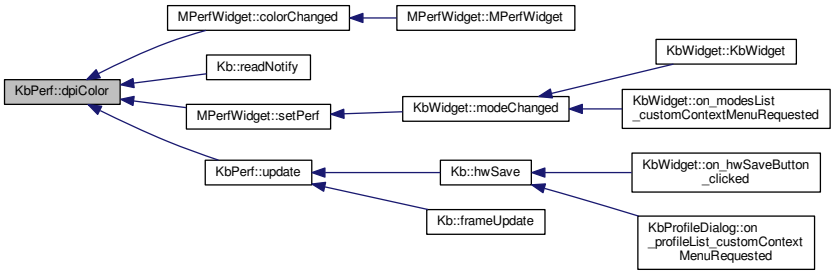

12.34.4.16 void KbPerf::dpiColor (int *index*, const QColor & *newColor*) [inline]

Definition at line 83 of file kbperf.h.

References _needsSave, _needsUpdate, and dpiClr.

```
83 { dpiClr[index] = newColor; _needsUpdate = _needsSave = true; }
```

12.34.4.17 void KbPerf::dpiDown ( )

Definition at line 319 of file kbperf.cpp.

References curDpiIdx(), dpiOn, and SNIPER.

Referenced by KeyAction::keyEvent().

```
319                     {
320     int idx = curDpiIdx();
321     do {
322         idx--;
323         if(idx <= SNIPER)
324             return;
325     } while(!dpiOn[idx]);
326     curDpiIdx(idx);
327 }
```

Here is the call graph for this function:

Here is the caller graph for this function:



12.34.4.18 bool KbPerf::dpiEnabled (int *index*) const [inline]

Definition at line 66 of file kbperf.h.

References dpiOn.

Referenced by MPerfWidget::enableChanged(), Kb::readNotify(), and MPerfWidget::setPerf().

```
66 { return dpiOn[index]; }
```

Here is the caller graph for this function:

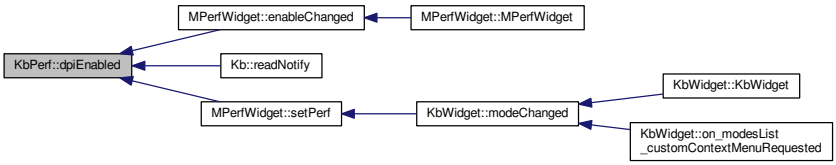

12.34.4.19 void KbPerf::dpiEnabled (int *index*, bool *newEnabled*) [inline]

Definition at line 67 of file kbperf.h.

References _needsSave, _needsUpdate, and dpiOn.

```
67 { if(index <= 0) return; dpiOn[index] = newEnabled; _needsUpdate =
      _needsSave = true; }
```

12.34.4.20 bool KbPerf::dpiIndicator ( ) const [inline]

Definition at line 79 of file kbperf.h.

References _dpiIndicator.

Referenced by MPerfWidget::on_indicBox_clicked(), and MPerfWidget::setPerf().

```
79 { return _dpiIndicator; }
```

Here is the caller graph for this function:



12.34.4.21 void KbPerf::dpiIndicator (bool *newDpiIndicator*) [inline]

Definition at line 80 of file kbperf.h.

References _dpiIndicator, and _needsSave.

```
80 { _dpiIndicator = newDpiIndicator; _needsSave = true; }
```

12.34.4.22 void KbPerf::dpiUp ( )

Definition at line 308 of file kbperf.cpp.

References curDpiIdx(), DPI_COUNT, and dpiOn.

Referenced by KeyAction::keyEvent().

```
308                     {
309     // Scroll past disabled DPIs and choose the next one up
310     int idx = curDpiIdx();
311     do {
312         idx++;
313         if(idx >= DPI_COUNT)
314             return;
315     } while(!dpiOn[idx]);
316     curDpiIdx(idx);
317 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

12.34.4.23 void KbPerf::getIndicator (indicator *index*, QColor & *color1*, QColor & *color2*, QColor & *color3*, bool & *software_enable*, i_hw & *hardware_enable*)

Definition at line 329 of file kbperf.cpp.

References HW_IMAX, hwIType, I_COUNT, iColor, iEnable, LIGHT, light100Color, MUTE, muteNAColor, and NONE.

Referenced by KPerfWidget::setPerf().

```
329
                                {
330     if(index < 0 || index >= I_COUNT)
331         return;
332     color1 = iColor[index][0];
333     color2 = iColor[index][1];
334     if(index == LIGHT)
335         color3 = light100Color;
336     else if(index == MUTE)
337         color3 = muteNAColor;
338     else
339         color3 = QColor();
340     software_enable = iEnable[index];
341     hardware_enable = (index <= HW_IMAX ? hwIType[index] : NONE);
342 }
```

Here is the caller graph for this function:



12.34.4.24 float KbPerf::iOpacity ( ) const [inline]

Definition at line 76 of file kbperf.h.

References _iOpacity.

Referenced by KPerfWidget::on_intensityBox_valueChanged(), MPerfWidget::on_spinBox_valueChanged(), KPerfWidget::setPerf(), and MPerfWidget::setPerf().

```
76 { return _iOpacity; }
```

Here is the caller graph for this function:

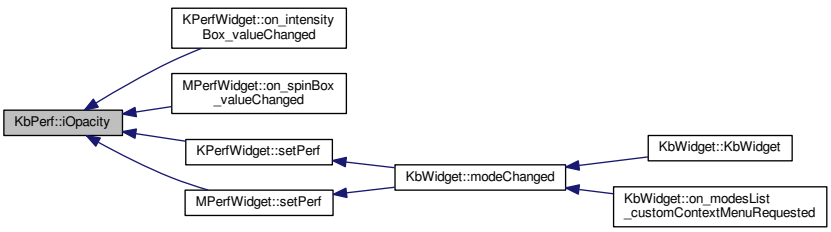

12.34.4.25 void KbPerf::iOpacity (float *newIOpacity*) [inline]

Definition at line 77 of file kbperf.h.

References _iOpacity, and _needsSave.

```
77 { _iOpacity = newIOpacity; _needsSave = true; }
```

12.34.4.26 height KbPerf::liftHeight ( ) const [inline]

Definition at line 38 of file kbperf.h.

References _liftHeight.

Referenced by MPerfWidget::on_lHeightBox_activated(), Kb::readNotify(), and MPerfWidget::setPerf().

```
38 { return _liftHeight; }
```

Here is the caller graph for this function:

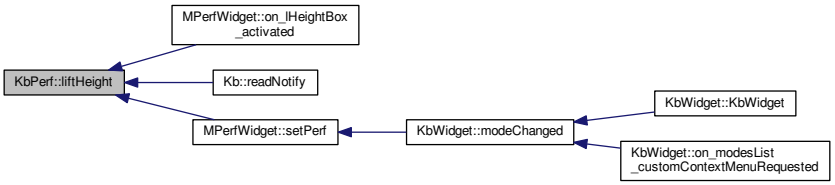

12.34.4.27 void KbPerf::liftHeight (height *newHeight*)

Definition at line 361 of file kbperf.cpp.

References _liftHeight, _needsSave, _needsUpdate, and HIGH.

```
361                                         {
362     if(newHeight < LOW || newHeight > HIGH)
363         return;
364     _liftHeight = newHeight;
365     _needsUpdate = _needsSave = true;
366 }
```

12.34.4.28 KbLight * KbPerf::light ( ) const [private]

Definition at line 104 of file kbperf.cpp.

References KbMode::light(), and modeParent().

Referenced by applyIndicators(), and lightIndicator().

```
104                                 {
105     return modeParent()->light();
106 }
```

Here is the call graph for this function:

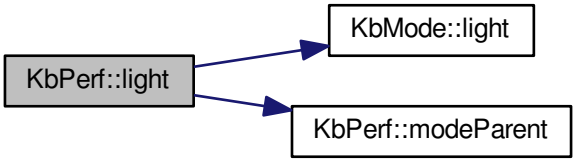

Here is the caller graph for this function:



12.34.4.29 void KbPerf::lightIndicator (const char * *name*, QRgb *rgba*) [private]

Definition at line 425 of file kbperf.cpp.

References _iOpacity, light(), and KbLight::setIndicator().

Referenced by applyIndicators().

```
425                                                     {
426     int a = round(qAlpha(rgba) * _iOpacity);
427     if(a <= 0)
428         return;
429     light()->setIndicator(name, qRgba(qRed(rgba), qGreen(rgba), qBlue(rgba), a));
430 }
```

Here is the call graph for this function:

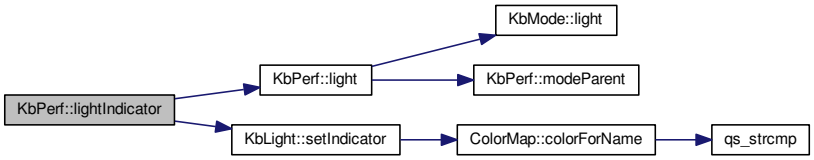

Here is the caller graph for this function:



12.34.4.30 void KbPerf::load (CkbSettings & *settings*)

Definition at line 108 of file kbperf.cpp.

References _angleSnap, _dpiIndicator, _iOpacity, _liftHeight, _needsSave, CkbSettings::contains(), CkbSettings::containsGroup(), curDpi(), didLoad(), DPI_COUNT, dpiClr, dpiLastIdx, dpiOn, dpiX, dpiY, HIGH, HW_IMAX, hwIType, I_COUNT, iColor, iEnable, LIGHT, light100Color, LOCK, MACRO, MEDIUM, MODE, MUTE, muteNAColor, NORMAL, OTHER, pushedDpis, runningPushIdx, and CkbSettings::value().

Referenced by KbMode::KbMode().

```
108                                     {
109     pushedDpis.clear();
110     runningPushIdx = 1;
111     _needsSave = false;
112     bool readIndicators = true;
113     if(!settings.containsGroup("Performance/Indicators")){
114         // Read old indicator settings from the lighting group, if present
115         // (ckb <= v0.2.0)
116         SGroup group(settings, "Lighting");
117         if(settings.contains("InactiveIndicators")){
118             bool inOk = false;
119             int inactive = settings.value("InactiveIndicators").toInt(&inOk);
120             if(!inOk || inactive > 2)
121                 inactive = 2;
122             if(inactive == 1)
123                 _iOpacity = 0.75f;
124             else if(inactive == 0)
125                 _iOpacity = 0.5f;
126             else if(inactive < 0){
127                 // Indicators disabled
128                 iEnable[MODE] = iEnable[MACRO] = iEnable[
    LIGHT] = iEnable[LOCK]  = iEnable[MUTE] = false;
129             }
130             bool showMute = (settings.value("ShowMute").toInt(&inOk) != 0);
131             if(inOk && !showMute)
132                 iEnable[MUTE] = false;
133             readIndicators = false;
134         }
135     }
136     SGroup group(settings, "Performance");
137     // Read DPI settings
138     {
139         SGroup group(settings, "DPI");
140         for(int i = 0; i < DPI_COUNT; i++){
141             QString iStr = QString::number(i);
142             QPoint value = settings.value(iStr).toPoint();
143             if(value.isNull())
144                 continue;
145             dpiX[i] = value.x(); dpiY[i] = value.y();
146             QColor color = settings.value(iStr + "RGB").toString();
147             if(color.isValid())
148                 dpiClr[i] = color;
149             if(i != 0)
150                 dpiOn[i] = !settings.value(iStr + "Disabled").toBool();
151         }
152         QColor color = settings.value("6RGB").toString();
153         if(color.isValid())
154             dpiClr[OTHER] = color;
155         if(settings.contains("LastIdx")){
156             dpiLastIdx = settings.value("LastIdx").toInt();
157             if(dpiLastIdx >= DPI_COUNT || dpiLastIdx < 0)
158                 dpiLastIdx = 1;
159         }
160         QPoint value = settings.value("Current").toPoint();
161         if(!value.isNull())
```

```
162             curDpi(value);
163     }
164     // Read misc. mouse settings
165     _liftHeight = (height)settings.value("LiftHeight").toInt();
166     if(_liftHeight < LOW || _liftHeight > HIGH)
167         _liftHeight = MEDIUM;
168     _angleSnap = settings.value("AngleSnap").toBool();
169     if(settings.contains("NoIndicator")){
170         // ckb <= v0.2.0
171         _dpiIndicator = !settings.value("NoIndicator").toBool();
172     } else {
173         _dpiIndicator = settings.value("Indicators/DPI", true).toBool();
174     }
175     // Read indicator settings
176     if(readIndicators){
177         SGroup group(settings, "Indicators");
178         _iOpacity = settings.value("Opacity", 100).toInt() / 100.f;
179         for(int i = 0; i < I_COUNT; i++){
180             SGroup group(settings, QString::number(i));
181             QColor color = settings.value("RGB0").toString();
182             if(color.isValid())
183                 iColor[i][0] = color;
184             color = settings.value("RGB1").toString();
185             if(color.isValid())
186                 iColor[i][1] = color;
187             if(i == LIGHT){
188                 color = settings.value("RGB2").toString();
189                 if(color.isValid())
190                     light100Color = color;
191             } else if(i == MUTE){
192                 color = settings.value("RGB2").toString();
193                 if(color.isValid())
194                     muteNAColor = color;
195             }
196             if(i <= HW_IMAX){
197                 iEnable[i] = settings.value("Enable", false).toBool();
198                 hwIType[i] = (i_hw)settings.value("Hardware", (int)
    NORMAL).toInt();
199             } else {
200                 iEnable[i] = settings.value("Enable", true).toBool();
201             }
202         }
203     }
204     emit didLoad();
205 }
```

Here is the call graph for this function:

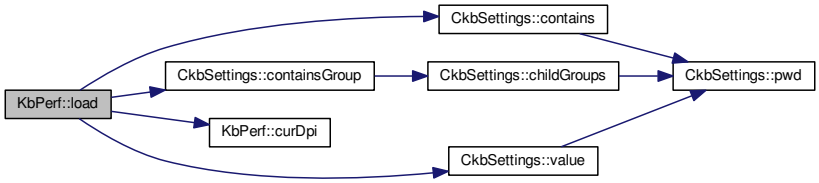

Here is the caller graph for this function:



12.34.4.31 KbMode* KbPerf::modeParent ( ) const [inline], [private]

Definition at line 124 of file kbperf.h.

Referenced by bind(), and light().

```
124 { return (KbMode*)parent(); }
```

Here is the caller graph for this function:



12.34.4.32 bool KbPerf::needsSave ( ) const [inline]

Definition at line 28 of file kbperf.h.

References _needsSave.

Referenced by KbMode::needsSave().

```
28 { return _needsSave; }
```

Here is the caller graph for this function:

12.34.4.33 const KbPerf & KbPerf::operator= (const KbPerf & *rhs*)

Definition at line 78 of file kbperf.cpp.

References _angleSnap, _dpiIndicator, _iOpacity, _liftHeight, _needsSave, _needsUpdate, curDpi(), DPI_COUNT, dpiClr, dpiCurIdx, dpiCurX, dpiCurY, dpiLastIdx, dpiOn, dpiX, dpiY, hwlType, I_COUNT, iColor, iEnable, light100Color, muteNAColor, pushedDpis, and runningPushIdx.

```
78                                                  {
79     dpiCurX = other.dpiCurX; dpiCurY = other.dpiCurY; dpiCurIdx = other.dpiCurIdx;
       dpiLastIdx = other.dpiLastIdx; runningPushIdx = 1;
80     _iOpacity = other._iOpacity; light100Color = other.light100Color;
       muteNAColor = other.muteNAColor; _dpiIndicator = other._dpiIndicator;
81     _liftHeight = other._liftHeight; _angleSnap = other._angleSnap;
82     _needsUpdate = true; _needsSave = true;
83     memcpy(dpiX, other.dpiX, sizeof(dpiX));
84     memcpy(dpiY, other.dpiY, sizeof(dpiY));
85     for(int i = 0; i < DPI_COUNT + 1; i++)
86         dpiClr[i] = other.dpiClr[i];
87     memcpy(dpiOn, other.dpiOn, sizeof(dpiOn));
88     for(int i = 0; i < I_COUNT; i++){
89         iColor[i][0] = other.iColor[i][0];
90         iColor[i][1] = other.iColor[i][1];
91     }
92     memcpy(iEnable, other.iEnable, sizeof(iEnable));
```

```
93     memcpy(hwIType, other.hwIType, sizeof(hwIType));
94     // Don't copy pushed DPI states. If the other mode has any, restore the original DPI
95     if(!other.pushedDpis.isEmpty())
96         curDpi(other.pushedDpis[0]);
97     return other;
98 }
```

Here is the call graph for this function:

12.34.4.34 void KbPerf::popDpi (quint64 *pushIdx*)

Definition at line 296 of file kbperf.cpp.

References _curDpi(), _needsSave, _needsUpdate, map_last, and pushedDpis.

Referenced by curDpi(), and KeyAction::keyEvent().

```
296                                     {
297     if(pushIdx == 0 || !pushedDpis.contains(pushIdx))
298         return;
299     pushedDpis.remove(pushIdx);
300     // Set the DPI to the last-pushed value still on the stack
301     _curDpi(map_last(pushedDpis));
302     // If all values have been popped, remove the original DPI
303     if(pushedDpis.count() == 1)
304         pushedDpis.clear();
305     _needsUpdate = _needsSave = true;
306 }
```

Here is the call graph for this function:

Here is the caller graph for this function:



12.34.4.35 quint64 KbPerf::pushDpi (const QPoint & *newDpi*)

Definition at line 284 of file kbperf.cpp.

References _curDpi(), curDpi(), pushedDpis, and runningPushIdx.

Referenced by KeyAction::keyEvent(), and pushSniper().

```
284                                             {
285     if(pushedDpis.isEmpty())
286         // Push original DPI
287         pushedDpis[0] = curDpi();
288     quint64 index = runningPushIdx++;
289     if(runningPushIdx == 0)
290         runningPushIdx = 1;
291     pushedDpis[index] = newDpi;
292     _curDpi(newDpi);
293     return index;
294 }
```

Here is the call graph for this function:

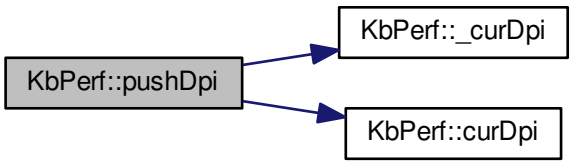

Here is the caller graph for this function:



12.34.4.36 quint64 KbPerf::pushDpi (int *newDpi*) [inline]

Definition at line 71 of file kbperf.h.

References pushDpi().

Referenced by pushDpi().

```
71 { return pushDpi(QPoint(newDpi, newDpi)); }
```

Here is the call graph for this function:



Here is the caller graph for this function:



12.34.4.37 quint64 KbPerf::pushSniper ( ) [inline]

Definition at line 72 of file kbperf.h.

References pushDpi(), and sniperDpi().

Referenced by KeyAction::keyEvent().

```
72 { return pushDpi(sniperDpi()); }
```

Here is the call graph for this function:

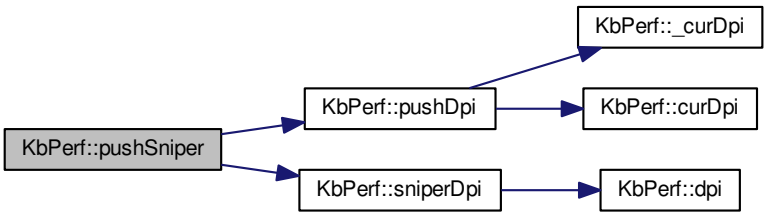

Here is the caller graph for this function:



12.34.4.38 void KbPerf::save (CkbSettings & *settings*)

Definition at line 207 of file kbperf.cpp.

References _angleSnap, _dpiIndicator, _liftHeight, _needsSave, DPI_COUNT, dpiClr, dpiCurX, dpiCurY, dpiLastIdx, dpiOn, dpiX, dpiY, HW_IMAX, hwIType, I_COUNT, iColor, iEnable, LIGHT, light100Color, MUTE, muteNAColor, OTHER, pushedDpis, and CkbSettings::setValue().

Referenced by KbMode::save().

```
207                                     {
208     _needsSave = false;
209     SGroup group(settings, "Performance");
210     {
211         SGroup group(settings, "DPI");
212         for(int i = 0; i < DPI_COUNT; i++){
213             QString iStr = QString::number(i);
214             settings.setValue(iStr, QPoint(dpiX[i], dpiY[i]));
215             settings.setValue(iStr + "RGB", dpiClr[i].name(QColor::HexArgb));
216             if(i != 0)
217                 settings.setValue(iStr + "Disabled", !dpiOn[i]);
218         }
219         settings.setValue("6RGB", dpiClr[OTHER].name(QColor::HexArgb));
220         settings.setValue("LastIdx", dpiLastIdx);
221         int curX = dpiCurX, curY = dpiCurY;
222         // Ignore any pushed modes
223         if(pushedDpis.count() > 0){
224             curX = pushedDpis.value(0).x();
225             curY = pushedDpis.value(0).y();
226         }
227         settings.setValue("Current", QPoint(curX, curY));
228     }
229     settings.setValue("LiftHeight", _liftHeight);
230     settings.setValue("AngleSnap", _angleSnap);
231     {
232         SGroup group(settings, "Indicators");
233         settings.setValue("DPI", _dpiIndicator);
234         for(int i = 0; i < I_COUNT; i++){
235             SGroup group(settings, QString::number(i));
236             settings.setValue("RGB0", iColor[i][0].name(QColor::HexArgb));
237             settings.setValue("RGB1", iColor[i][1].name(QColor::HexArgb));
238             if(i == LIGHT)
239                 settings.setValue("RGB2", light100Color.name(QColor::HexArgb));
240             else if(i == MUTE)
241                 settings.setValue("RGB2", muteNAColor.name(QColor::HexArgb));
242             settings.setValue("Enable", iEnable[i]);
243             if(i <= HW_IMAX)
244                 settings.setValue("Hardware", (int)hwIType[i]);
245         }
246     }
247 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

12.34.4.39 void KbPerf::setIndicator (indicator *index*, const QColor & *color1*, const QColor & *color2*, const QColor & *color3* = QColor(), bool *software_enable* = true, i_hw *hardware_enable* = NORMAL)

Definition at line 344 of file kbperf.cpp.

References _needsSave, _needsUpdate, HW_IMAX, hwIType, I_COUNT, iColor, iEnable, LIGHT, light100Color, MUTE, muteNAColor, NONE, and NORMAL.

Referenced by KPerfWidget::uiUpdated().

```
344
                                                {
345     if(index < 0 || index >= I_COUNT)
346         return;
347     iColor[index][0] = color1;
348     iColor[index][1] = color2;
349     if(index == LIGHT)
350         light100Color = color3;
351     else if(index == MUTE)
352         muteNAColor = color3;
353     iEnable[index] = software_enable;
354     if(hardware_enable == NONE)
355         hardware_enable = NORMAL;
356     if(index <= HW_IMAX)
357         hwIType[index] = hardware_enable;
358     _needsUpdate = _needsSave = true;
359 }
```

Here is the caller graph for this function:



12.34.4.40 void KbPerf::setNeedsUpdate ( ) [inline]

Definition at line 113 of file kbperf.h.

References _needsUpdate.

Referenced by KbMode::setNeedsUpdate().

```
113 { _needsUpdate = true; }
```

Here is the caller graph for this function:

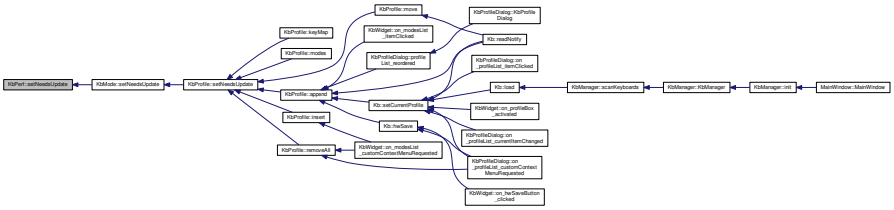

12.34.4.41 void KbPerf::settingsUpdated ( ) [signal]

Definition at line 140 of file moc_kbperf.cpp.

Referenced by update().

```
141 {
142     QMetaObject::activate(this, &staticMetaObject, 1, Q_NULLPTR);
143 }
```

Here is the caller graph for this function:



12.34.4.42 QPoint KbPerf::sniperDpi ( ) const [inline]

Definition at line 50 of file kbperf.h.

References dpi(), and SNIPER.

Referenced by pushSniper().

```
50 { return dpi(SNIPER); }
```

Here is the call graph for this function:



Here is the caller graph for this function:



12.34.4.43 void KbPerf::sniperDpi (const QPoint & *newValue*) [inline]

Definition at line 51 of file kbperf.h.

References dpi(), and SNIPER.

```
51 { dpi(SNIPER, newValue); }
```

Here is the call graph for this function:



12.34.4.44 void KbPerf::sniperDpi (int *newValue*) [inline]

Definition at line 54 of file kbperf.h.

References sniperDpi().

Referenced by sniperDpi().

```
54 { sniperDpi(QPoint(newValue, newValue)); }
```

Here is the call graph for this function:



Here is the caller graph for this function:



12.34.4.45 void KbPerf::update (QFile & *cmd*, int *notifyNumber*, bool *force* = `false`, bool *saveCustomDpi* = `true`)

Definition at line 373 of file kbperf.cpp.

References _angleSnap, _liftHeight, _needsUpdate, DPI_COUNT, dpiColor(), dpiCurIdx, dpiCurX, dpiCurY, dpiOn, dpiX, dpiY, HW_I_COUNT, hwIType, OFF, ON, and settingsUpdated().

Referenced by Kb::frameUpdate(), and Kb::hwSave().

```
373                                                                                 {
374     if(!force && !_needsUpdate)
375         return;
376     emit settingsUpdated();
377     _needsUpdate = false;
378     // Save DPI stage 0 (sniper)
379     cmd.write(QString("dpi 0:%1,%2").arg(dpiX[0]).arg(dpiY[0]).toLatin1());
380     // If the mouse is set to a custom DPI, save it in stage 1
381     int stage = dpiCurIdx;
382     if(stage < 0 && saveCustomDpi){
383         stage = 1;
384         cmd.write(QString(" 1:%1,%2").arg(dpiCurX).arg(dpiCurY).toLatin1());
385     } else {
386         // Otherwise, save stage 1 normally
387         if(!dpiOn[1] && stage != 1)
388             cmd.write(" 1:off");
389         else
390             cmd.write(QString(" 1:%1,%2").arg(dpiX[1]).arg(dpiY[1]).toLatin1());
391     }
392     // Save stages 1 - 5
393     for(int i = 2; i < DPI_COUNT; i++){
394         if(!dpiOn[i] && stage != i)
395             cmd.write(QString(" %1:off").arg(i).toLatin1());
396         else
397         cmd.write(QString(" %1:%2,%3").arg(i).arg(dpiX[i]).arg(dpiY[i]).toLatin1());
398     }
399     // Save stage selection, lift height, and angle snap
400     cmd.write(QString(" dpisel %1 lift %2 snap %3").arg(stage).arg(_liftHeight).arg(
    _angleSnap ? "on" : "off").toLatin1());
401     // Save DPI colors
402     cmd.write(" rgb");
403     for(int i = 0; i < DPI_COUNT; i++){
404         QColor color = dpiColor(i);
405         cmd.write(" dpi");
406         char output[9];
407         snprintf(output, sizeof(output), "%1d:%02x%02x%02x", i, color.red(), color.green(), color.blue());
408         cmd.write(output);
409     }
410     // Enable indicator notifications
411     cmd.write(QString("\n@%1 inotify all").arg(notifyNumber).toLatin1());
412     // Set indicator state
413     const char* iNames[HW_I_COUNT] = { "num", "caps", "scroll" };
414     for(int i = 0; i < HW_I_COUNT; i++){
415         if(hwIType[i] == ON)
416             cmd.write(" ion ");
417         else if(hwIType[i] == OFF)
418             cmd.write(" ioff ");
419         else
420             cmd.write(" iauto ");
421         cmd.write(iNames[i]);
422     }
423 }
```

Here is the call graph for this function:

Here is the caller graph for this function:

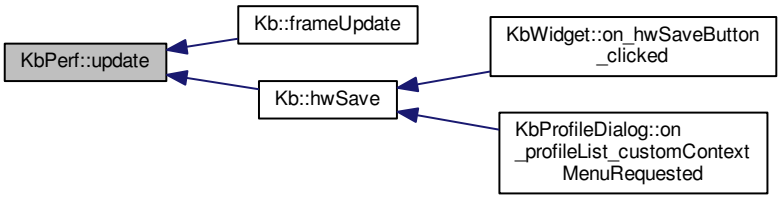

12.34.5 Field Documentation

12.34.5.1 bool KbPerf::_angleSnap [private]

Definition at line 158 of file kbperf.h.

Referenced by angleSnap(), load(), operator=(), save(), and update().

12.34.5.2 bool KbPerf::_dpiIndicator [private]

Definition at line 154 of file kbperf.h.

Referenced by applyIndicators(), dpiIndicator(), load(), operator=(), and save().

12.34.5.3 float KbPerf::_iOpacity [private]

Definition at line 149 of file kbperf.h.

Referenced by applyIndicators(), iOpacity(), lightIndicator(), load(), and operator=().

12.34.5.4 height KbPerf::_liftHeight [private]

Definition at line 157 of file kbperf.h.

Referenced by liftHeight(), load(), operator=(), save(), and update().

12.34.5.5 bool KbPerf::_needsSave [private]

Definition at line 160 of file kbperf.h.

Referenced by _curDpi(), angleSnap(), dpi(), dpiColor(), dpiEnabled(), dpiIndicator(), iOpacity(), liftHeight(), load(), needsSave(), operator=(), popDpi(), save(), and setIndicator().

12.34.5.6 bool KbPerf::_needsUpdate [private]

Definition at line 160 of file kbperf.h.

Referenced by _curDpi(), angleSnap(), dpi(), dpiColor(), dpiEnabled(), liftHeight(), operator=(), popDpi(), setIndicator(), setNeedsUpdate(), and update().

12.34.5.7 const int KbPerf::DPI_COUNT = 6 [static]

Definition at line 46 of file kbperf.h.

Referenced by _curDpi(), dpi(), dpiUp(), KbPerf(), KeyAction::keyEvent(), load(), operator=(), Kb::readNotify(), save(), RebindWidget::setBind(), and update().

12.34.5.8 const int KbPerf::DPI_MAX = 12000 [static]

Definition at line 47 of file kbperf.h.

12.34.5.9 const int KbPerf::DPI_MIN = 100 [static]

Definition at line 47 of file kbperf.h.

Referenced by dpiExp(), and dpiLog().

12.34.5.10 QColor KbPerf::dpiClr[DPI_COUNT+1] [private]

Definition at line 135 of file kbperf.h.

Referenced by applyIndicators(), dpiColor(), KbPerf(), load(), operator=(), and save().

12.34.5.11 int KbPerf::dpiCurIdx [private]

Definition at line 134 of file kbperf.h.

Referenced by _curDpi(), curDpiIdx(), dpi(), KbPerf(), operator=(), and update().

12.34.5.12 int KbPerf::dpiCurX [private]

Definition at line 134 of file kbperf.h.

Referenced by _curDpi(), curDpi(), dpi(), KbPerf(), operator=(), save(), and update().

12.34.5.13 int KbPerf::dpiCurY [private]

Definition at line 134 of file kbperf.h.

Referenced by _curDpi(), curDpi(), dpi(), KbPerf(), operator=(), save(), and update().

12.34.5.14 int KbPerf::dpiLastIdx [private]

Definition at line 138 of file kbperf.h.

Referenced by _curDpi(), KbPerf(), load(), operator=(), and save().

12.34.5.15 bool KbPerf::dpiOn[DPI_COUNT] [private]

Definition at line 136 of file kbperf.h.

Referenced by dpiDown(), dpiEnabled(), dpiUp(), KbPerf(), load(), operator=(), save(), and update().

12.34.5.16 int KbPerf::dpiX[DPI_COUNT] [private]

Definition at line 132 of file kbperf.h.

Referenced by _curDpi(), dpi(), KbPerf(), load(), operator=(), save(), and update().

12.34.5.17 int KbPerf::dpiY[DPI_COUNT] [private]

Definition at line 133 of file kbperf.h.

Referenced by _curDpi(), dpi(), KbPerf(), load(), operator=(), save(), and update().

12.34.5.18 const int KbPerf::HW_I_COUNT = (int)HW_IMAX + 1 [static]

Definition at line 104 of file kbperf.h.

Referenced by KbPerf(), and update().

12.34.5.19 i_hw KbPerf::hwiType[HW_I_COUNT] [private]

Definition at line 153 of file kbperf.h.

Referenced by getIndicator(), KbPerf(), load(), operator=(), save(), setIndicator(), and update().

12.34.5.20 const int KbPerf::I_COUNT = (int)MUTE + 1 [static]

Definition at line 104 of file kbperf.h.

Referenced by getIndicator(), KbPerf(), load(), operator=(), save(), and setIndicator().

12.34.5.21 QColor KbPerf::iColor[I_COUNT][2] [private]

Definition at line 150 of file kbperf.h.

Referenced by applyIndicators(), getIndicator(), KbPerf(), load(), operator=(), save(), and setIndicator().

12.34.5.22 bool KbPerf::iEnable[I_COUNT] [private]

Definition at line 152 of file kbperf.h.

Referenced by applyIndicators(), getIndicator(), KbPerf(), load(), operator=(), save(), and setIndicator().

12.34.5.23 QColor KbPerf::light100Color [private]

Definition at line 151 of file kbperf.h.

Referenced by applyIndicators(), getIndicator(), KbPerf(), load(), operator=(), save(), and setIndicator().

12.34.5.24 QColor KbPerf::muteNAColor [private]

Definition at line 151 of file kbperf.h.

Referenced by applyIndicators(), getIndicator(), KbPerf(), load(), operator=(), save(), and setIndicator().

12.34.5.25 const int KbPerf::OTHER = DPI_COUNT [static]

Definition at line 81 of file kbperf.h.

Referenced by applyIndicators(), MPerfWidget::colorChanged(), load(), save(), and MPerfWidget::setPerf().

12.34.5.26 QMap<quint64, QPoint> KbPerf::pushedDpis [private]

Definition at line 142 of file kbperf.h.

Referenced by curDpi(), KbPerf(), load(), operator=(), popDpi(), pushDpi(), and save().

12.34.5.27 uint KbPerf::runningPushIdx [private]

Definition at line 143 of file kbperf.h.

Referenced by load(), operator=(), and pushDpi().

12.34.5.28 const int KbPerf::SNIPER = 0 [static]

Definition at line 46 of file kbperf.h.

Referenced by dpiDown(), and sniperDpi().

The documentation for this class was generated from the following files:

- src/ckb/kbperf.h
- src/ckb/kbperf.cpp
- src/ckb/release/moc_kbperf.cpp

12.35 KbProfile Class Reference

`#include <src/ckb/kbprofile.h>`

Inheritance diagram for KbProfile:

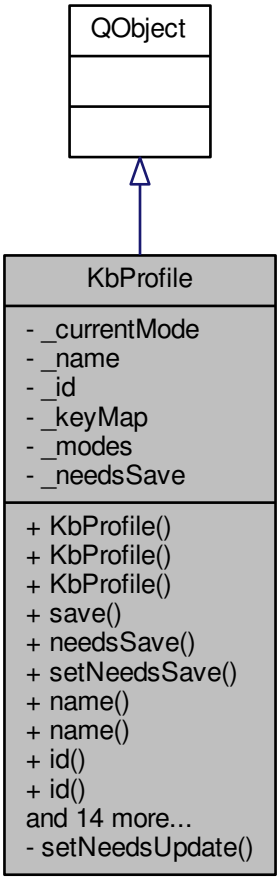

Collaboration diagram for KbProfile:

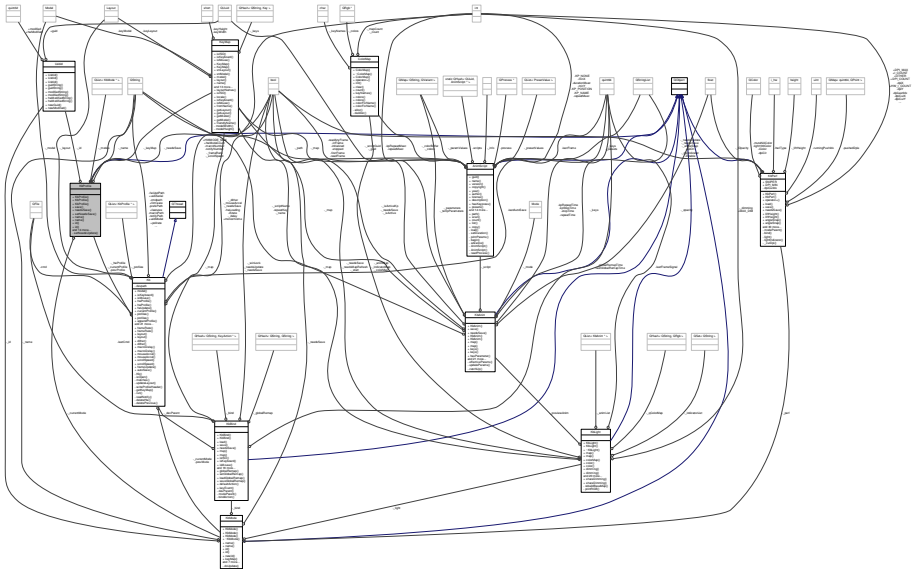

Public Types

- typedef QList< KbMode * > ModeList

Public Member Functions

- KbProfile (Kb *parent, const KeyMap &keyMap, const KbProfile &other)
- KbProfile (Kb *parent, const KeyMap &keyMap, const QString &guid="", const QString &modified="")
- KbProfile (Kb *parent, const KeyMap &keyMap, CkbSettings &settings, const QString &guid)
- void save (CkbSettings &settings)
- bool needsSave () const
- void setNeedsSave ()
- QString name () const
- void name (const QString &newName)
- UsbId & id ()
- void id (const UsbId &newId)
- void newId ()
- const KeyMap & keyMap () const
- void keyMap (const KeyMap &newKeyMap)
- const ModeList & modes () const
- void modes (const QList< KbMode * > &newModes)
- void append (KbMode *newMode)
- void insert (int index, KbMode *newMode)
- void removeAll (KbMode *mode)
- void move (int from, int to)
- int modeCount () const
- int indexOf (KbMode *mode) const
- KbMode * find (const QUuid &id)
- KbMode * currentMode () const
- void currentMode (KbMode *newCurrentMode)

Private Member Functions

- void setNeedsUpdate ()

Private Attributes

- KbMode * _currentMode
- QString _name
- UsbId _id
- KeyMap _keyMap
- ModeList _modes
- bool _needsSave

12.35.1 Detailed Description

Definition at line 11 of file kbprofile.h.

12.35.2 Member Typedef Documentation

12.35.2.1 typedef QList<KbMode*> KbProfile::ModeList

Definition at line 41 of file kbprofile.h.

12.35.3 Constructor & Destructor Documentation

12.35.3.1 KbProfile::KbProfile (Kb * *parent*, const KeyMap & *keyMap*, const KbProfile & *other*) [explicit]

Definition at line 4 of file kbprofile.cpp.

References _currentMode, _modes, and modes().

```
4                                                                                   :
5     QObject(parent), _currentMode(0), _name(other._name),
      _id(other._id), _keyMap(keyMap), _needsSave(true)
6 {
7     foreach(KbMode* mode, other.modes()){
8         KbMode* newMode = new KbMode(parent, keyMap, *mode);
9         if(!_currentMode || mode == other._currentMode)
10            _currentMode = newMode;
11        _modes.append(newMode);
12    }
13 }
```

Here is the call graph for this function:

12.35.3.2 KbProfile::KbProfile (Kb * *parent*, const KeyMap & *keyMap*, const QString & *guid* = "", const QString & *modified* = "") [explicit]

Definition at line 15 of file kbprofile.cpp.

References _id, and UsbId::guid.

```
15                                                                                                                  :
16     QObject(parent), _currentMode(0), _id(guid, modified.toUInt(0, 16)),
       _keyMap(keyMap), _needsSave(true)
17 {
18     if(_id.guid.isNull())
19         _id.guid = QUuid::createUuid();
20 }
```

12.35.3.3 KbProfile::KbProfile (Kb * *parent*, const KeyMap & *keyMap*, CkbSettings & *settings*, const QString & *guid*) [explicit]

Definition at line 22 of file kbprofile.cpp.

References _currentMode, _id, _keyMap, _modes, _name, CkbSettings::contains(), UsbId::guid, UsbId::hwModified, UsbId::hwModifiedString(), KbMode::id(), UsbId::modified, UsbId::modifiedString(), and CkbSettings::value().

```
22                                                                                                                  :
23     QObject(parent), _currentMode(0), _id(guid, 0),
       _keyMap(keyMap), _needsSave(false)
24 {
25     // Load data from preferences
26     SGroup group(settings, guid);
27     _name = settings.value("Name").toString().trimmed();
28     if(_name == "")
29         _name = "Unnamed";
30     _id.modifiedString(settings.value("Modified").toString());
31     if(settings.contains("HwModified"))
32         _id.hwModifiedString(settings.value("HwModified").toString());
33     else
34         _id.hwModified = _id.modified;
35     QUuid current = settings.value("CurrentMode").toString().trimmed();
36     // Load modes
37     uint count = settings.value("ModeCount").toUInt();
38     for(uint i = 0; i < count; i++){
39         SGroup group(settings, QString::number(i));
40         KbMode* mode = new KbMode(parent, _keyMap, settings);
41         _modes.append(mode);
42         // Set currentMode to the mode matching the current GUID, or the first mode in case it's not found
43         if(current == mode->id().guid || !_currentMode)
44             _currentMode = mode;
45     }
46 }
```

Here is the call graph for this function:

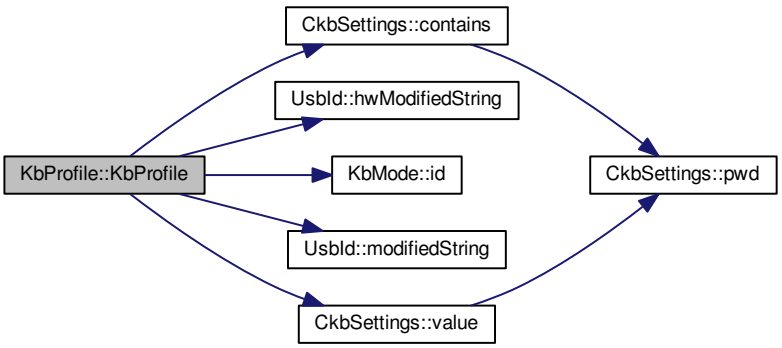

12.35.4 Member Function Documentation

12.35.4.1 void KbProfile::append (KbMode * *newMode*) [inline]

Definition at line 44 of file kbprofile.h.

References _modes, and setNeedsUpdate().

Referenced by Kb::hwSave(), KbWidget::on_modesList_itemClicked(), KbProfileDialog::profileList_reordered(), Kb::readNotify(), and Kb::setCurrentProfile().

```
44 { setNeedsUpdate(); _modes.append(newMode); }
```

Here is the call graph for this function:



Here is the caller graph for this function:

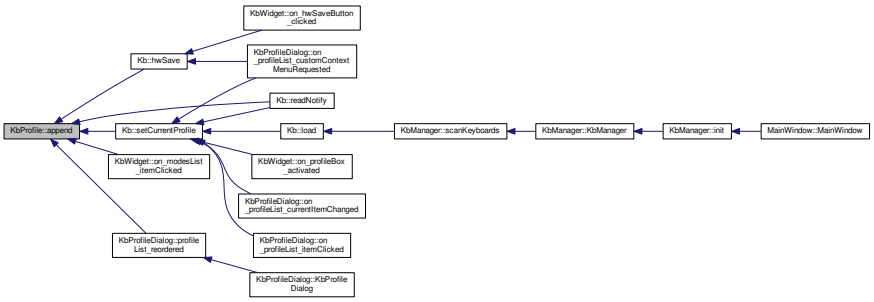

12.35.4.2 KbMode* KbProfile::currentMode ( ) const [inline]

Definition at line 54 of file kbprofile.h.

References _currentMode.

Referenced by KeyAction::keyEvent(), KbBindWidget::on_copyButton_clicked(), KPerfWidget::on_copyButton_clicked(), MPerfWidget::on_copyButton_clicked(), Kb::setCurrentMode(), and Kb::setCurrentProfile().

```
54 { return _currentMode; }
```

Here is the caller graph for this function:

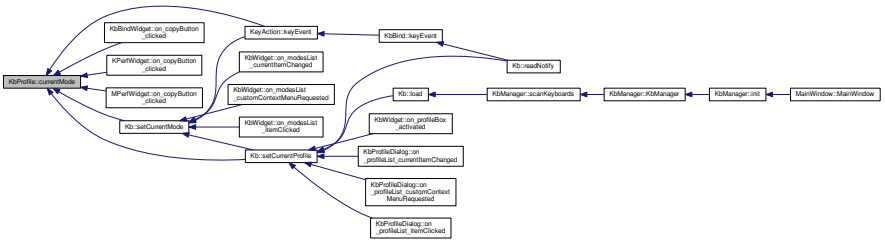

12.35.4.3 void KbProfile::currentMode (KbMode * *newCurrentMode*) [inline]

Definition at line 55 of file kbprofile.h.

References _currentMode, and _needsSave.

```
55 { _needsSave = true; _currentMode = newCurrentMode; }
```

12.35.4.4 KbMode* KbProfile::find (const QUuid & *id*) [inline]

Definition at line 51 of file kbprofile.h.

References _modes, UsbId::guid, id(), and KbMode::id().

Referenced by KbWidget::modesList_reordered(), and KbWidget::on_modesList_currentItemChanged().

```
51 { foreach(KbMode* mode, _modes) { if(mode->id().guid == id) return mode; } return 0; }
```

Here is the call graph for this function:

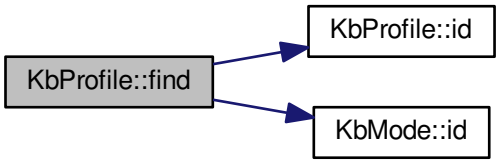

Here is the caller graph for this function:

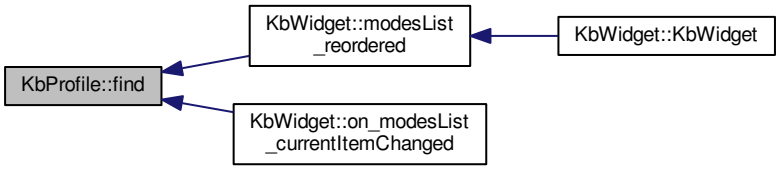

12.35.4.5 UsbId& KbProfile::id ( ) [inline]

Definition at line 30 of file kbprofile.h.

References _id.

Referenced by find(), Kb::find(), Kb::hwSave(), KbProfileDialog::on_profileList_customContextMenuRequested(), KbProfileDialog::on_profileList_itemChanged(), KbProfileDialog::on_profileList_itemClicked(), Kb::readNotify(), KbProfileDialog::repopulate(), Kb::save(), and Kb::writeProfileHeader().

```
30 { return _id; }
```

Here is the caller graph for this function:

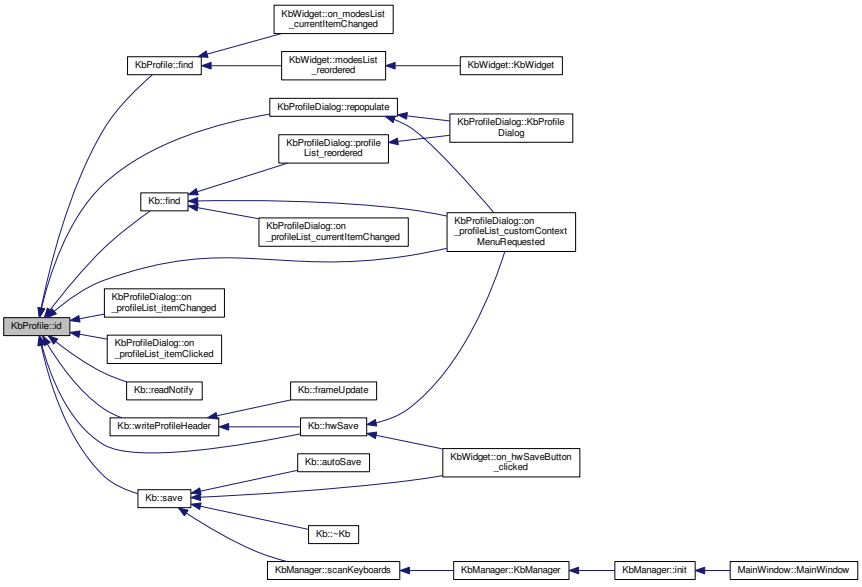

12.35.4.6 void KbProfile::id (const UsbId & *newId*) [inline]

Definition at line 31 of file kbprofile.h.

References _id, _needsSave, and newId().

```
31 { _needsSave = true; _id = newId; }
```

Here is the call graph for this function:



12.35.4.7 int KbProfile::indexOf (KbMode * *mode*) const [inline]

Definition at line 50 of file kbprofile.h.

References _modes.

Referenced by Kb::frameUpdate(), KeyAction::keyEvent(), KbWidget::modeChanged(), KbWidget::on_modesList_customContextMenuRequested(), and Kb::readNotify().

```
50 { return _modes.indexOf(mode); }
```

Here is the caller graph for this function:

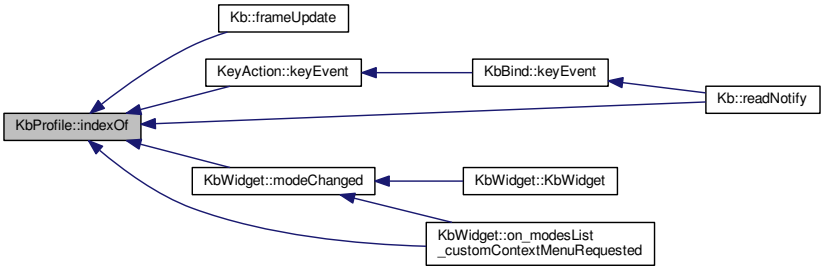

12.35.4.8 void KbProfile::insert (int *index*, KbMode * *newMode*) [inline]

Definition at line 45 of file kbprofile.h.

References _modes, and setNeedsUpdate().

Referenced by KbWidget::on_modesList_customContextMenuRequested().

```
45 { setNeedsUpdate(); _modes.insert(index, newMode); }
```

Here is the call graph for this function:



Here is the caller graph for this function:



12.35.4.9 const KeyMap& KbProfile::keyMap ( ) const [inline]

Definition at line 37 of file kbprofile.h.

References _keyMap.

Referenced by KPerfWidget::setPerf(), and Kb::updateLayout().

```
37 { return _keyMap; }
```

Here is the caller graph for this function:



12.35.4.10 void KbProfile::keyMap (const KeyMap & *newKeyMap*)

Definition at line 85 of file kbprofile.cpp.

References _keyMap, _modes, KbMode::keyMap(), and setNeedsUpdate().

```
85                                              {
86     _keyMap = newKeyMap;
87     foreach(KbMode* mode, _modes)
88         mode->keyMap(newKeyMap);
89     setNeedsUpdate();
90 }
```

Here is the call graph for this function:

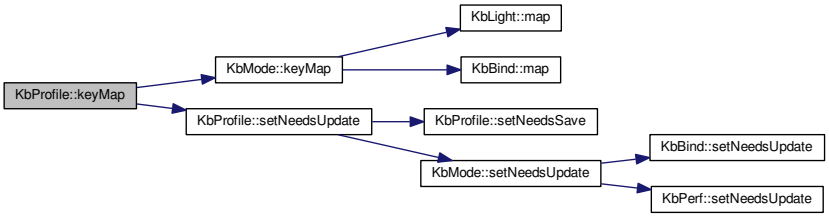

12.35.4.11 int KbProfile::modeCount ( ) const [inline]

Definition at line 49 of file kbprofile.h.

References _modes.

Referenced by Kb::hwSave(), KeyAction::keyEvent(), KbWidget::on_modesList_customContextMenuRequested(), Kb::readNotify(), save(), and Kb::setCurrentProfile().

```
49 { return _modes.count(); }
```

Here is the caller graph for this function:

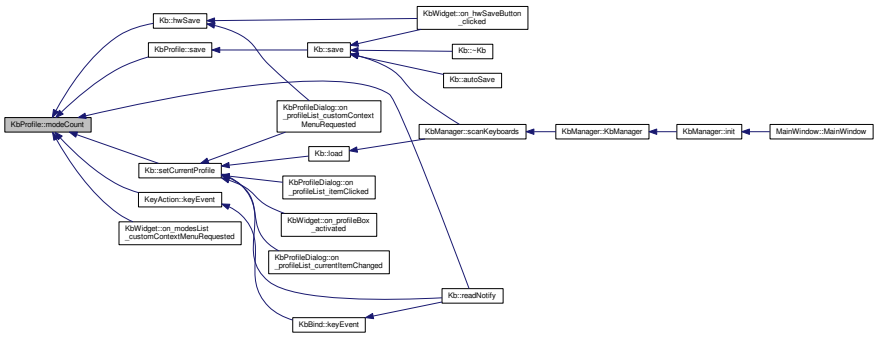

12.35.4.12 const ModeList& KbProfile::modes ( ) const [inline]

Definition at line 42 of file kbprofile.h.

References _modes.

Referenced by Kb::hwSave(), KbProfile(), KeyAction::keyEvent(), KbWidget::modesList_reordered(), KbBindWidget::on_copyButton_clicked(), KPerfWidget::on_copyButton_clicked(), MPerfWidget::on_copyButton_clicked(), KbWidget::on_modesList_customContextMenuRequested(), KbWidget::profileChanged(), Kb::readNotify(), RebindWidget::setBind(), Kb::setCurrentMode(), Kb::setCurrentProfile(), and Kb::updateLayout().

```
42 { return _modes; }
```

Here is the caller graph for this function:

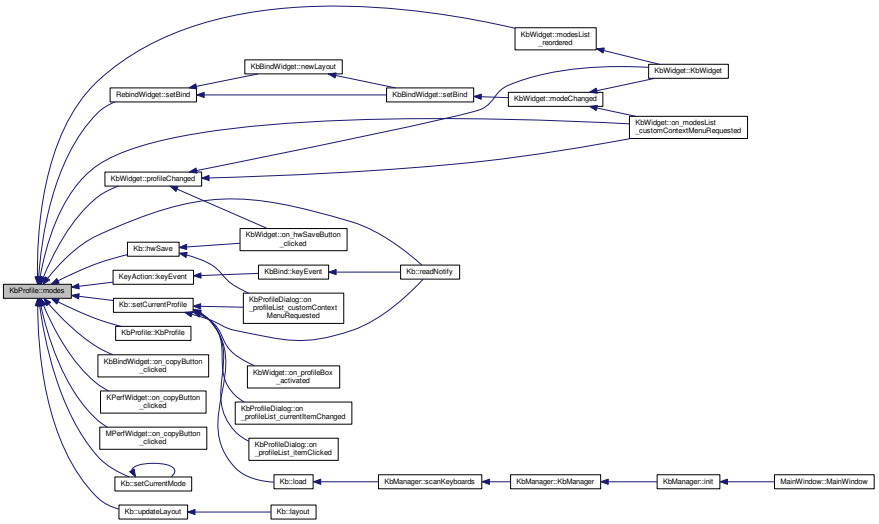

12.35.4.13 void KbProfile::modes (const QList< KbMode * > & *newModes*) [inline]

Definition at line 43 of file kbprofile.h.

References _modes, and setNeedsUpdate().

```
43 { setNeedsUpdate(); _modes = newModes; }
```

Here is the call graph for this function:



12.35.4.14 void KbProfile::move (int *from*, int *to*) [inline]

Definition at line 47 of file kbprofile.h.

References _modes, and setNeedsUpdate().

Referenced by Kb::readNotify().

```
47 { setNeedsUpdate(); _modes.move(from, to); }
```

Here is the call graph for this function:



Here is the caller graph for this function:

12.35.4.15 QString KbProfile::name ( ) const [inline]

Definition at line 28 of file kbprofile.h.

References _name.

Referenced by KbProfileDialog::on_profileList_itemChanged(), Kb::readNotify(), KbProfileDialog::repopulate(), save(), KbWidget::updateProfileList(), and Kb::writeProfileHeader().

```
28 { return _name; }
```

Here is the caller graph for this function:

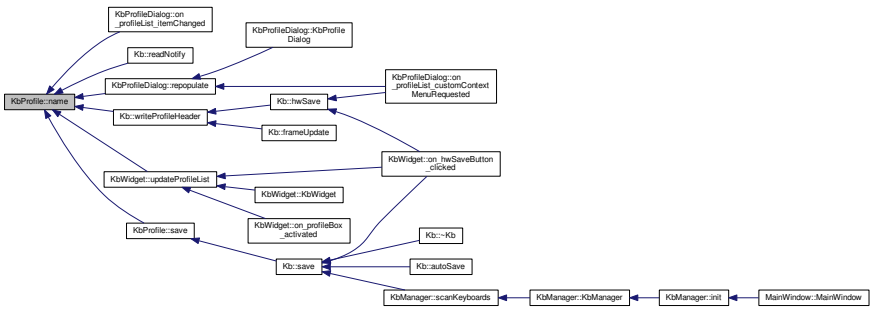

12.35.4.16 void KbProfile::name (const QString & *newName*) [inline]

Definition at line 29 of file kbprofile.h.

References _name, and _needsSave.

```
29 { _needsSave = true; _name = newName.trimmed(); if(_name == "")
      _name = "Unnamed"; }
```

12.35.4.17 bool KbProfile::needsSave ( ) const

Definition at line 68 of file kbprofile.cpp.

References _modes, _needsSave, and KbMode::needsSave().

Referenced by Kb::needsSave().

```
68                                  {
69     if(_needsSave)
70         return true;
71     foreach(KbMode* mode, _modes){
72         if(mode->needsSave())
73             return true;
74     }
75     return false;
76 }
```

Here is the call graph for this function:

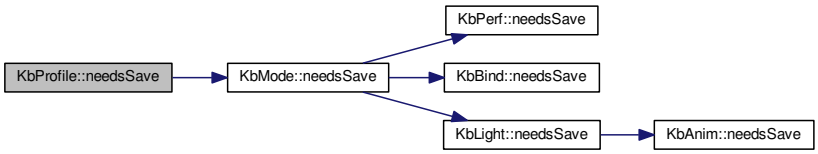

Here is the caller graph for this function:



12.35.4.18 void KbProfile::newId ( )

Definition at line 78 of file kbprofile.cpp.

References _id, _modes, _needsSave, and KbMode::newId().

Referenced by id(), and KbProfileDialog::on_profileList_customContextMenuRequested().

```
78                         {
79     _needsSave = true;
80     _id = UsbId();
81     foreach(KbMode* mode, _modes)
82         mode->newId();
83 }
```

Here is the call graph for this function:

Here is the caller graph for this function:

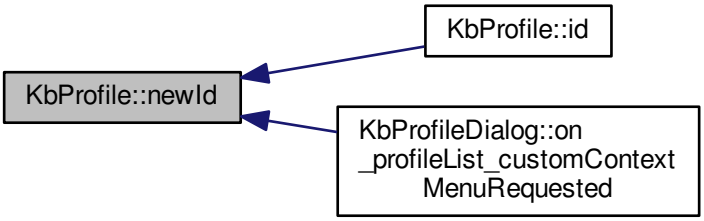

12.35.4.19 void KbProfile::removeAll (KbMode * *mode*) [inline]

Definition at line 46 of file kbprofile.h.

References _modes, and setNeedsUpdate().

Referenced by KbWidget::on_modesList_customContextMenuRequested(), and KbProfileDialog::on_profileList_-customContextMenuRequested().

```
46 { setNeedsUpdate(); _modes.removeAll(mode); }
```

Here is the call graph for this function:



Here is the caller graph for this function:

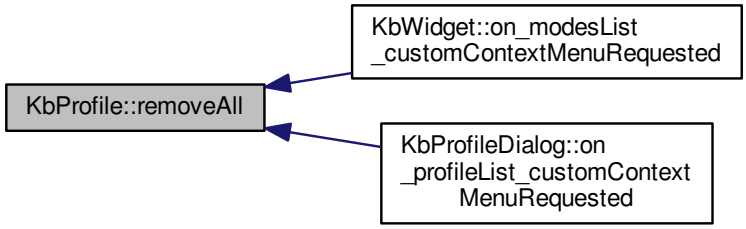

12.35.4.20 void KbProfile::save (CkbSettings & *settings*)

Definition at line 48 of file kbprofile.cpp.

References _currentMode, _id, _modes, _needsSave, UsbId::guidString(), UsbId::hwModifiedString(), KbMode::id(), modeCount(), UsbId::modifiedString(), name(), UsbId::newModified(), KbMode::save(), and CkbSettings::setValue().

Referenced by Kb::save().

```
48                                          {
49     _needsSave = false;
50     _id.newModified();
51     // Save data to preferences
52     SGroup group(settings, id().guidString());
53     settings.setValue("Name", name());
54     settings.setValue("Modified", _id.modifiedString());
55     settings.setValue("HwModified", _id.hwModifiedString());
56     if(_currentMode)
57         settings.setValue("CurrentMode", _currentMode->id().
      guidString());
58     // Save modes
59     uint count = modeCount();
60     settings.setValue("ModeCount", count);
61     for(uint i = 0; i < count; i++){
62         SGroup group(settings, QString::number(i));
63         KbMode* mode = _modes.at(i);
64         mode->save(settings);
65     }
66 }
```

Here is the call graph for this function:

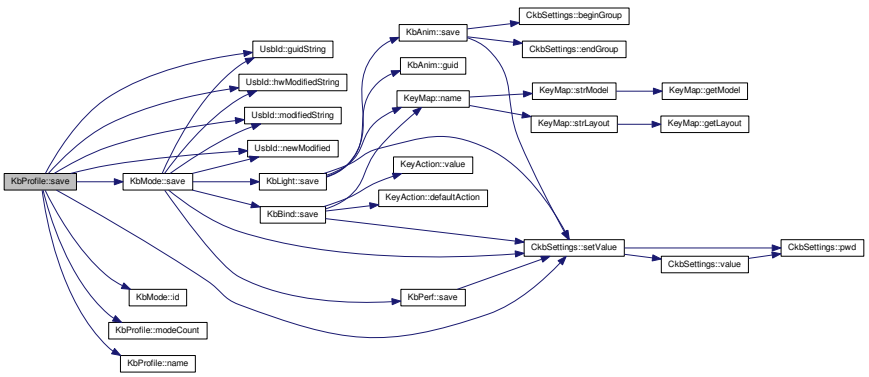

Here is the caller graph for this function:

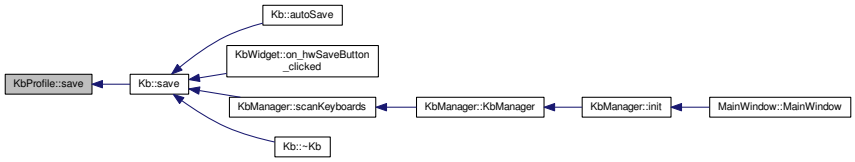

12.35.4.21 void KbProfile::setNeedsSave ( ) [inline]

Definition at line 25 of file kbprofile.h.

References _needsSave.

Referenced by Kb::hwSave(), Kb::readNotify(), and setNeedsUpdate().

```
25 { _needsSave = true; }
```

Here is the caller graph for this function:

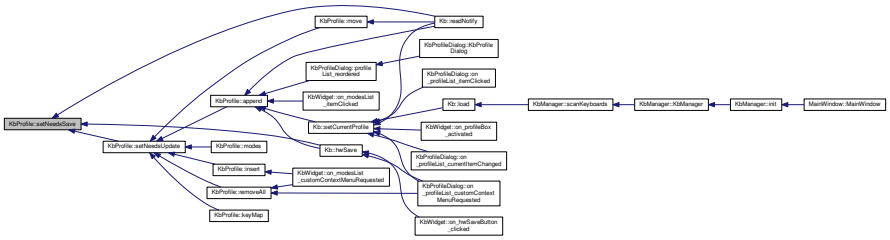

12.35.4.22 void KbProfile::setNeedsUpdate ( ) [inline], [private]

Definition at line 66 of file kbprofile.h.

References _modes, setNeedsSave(), and KbMode::setNeedsUpdate().

Referenced by append(), insert(), keyMap(), modes(), move(), and removeAll().

```
66 { setNeedsSave(); foreach(KbMode* mode, _modes){ mode->
       setNeedsUpdate(); } }
```

Here is the call graph for this function:



Here is the caller graph for this function:

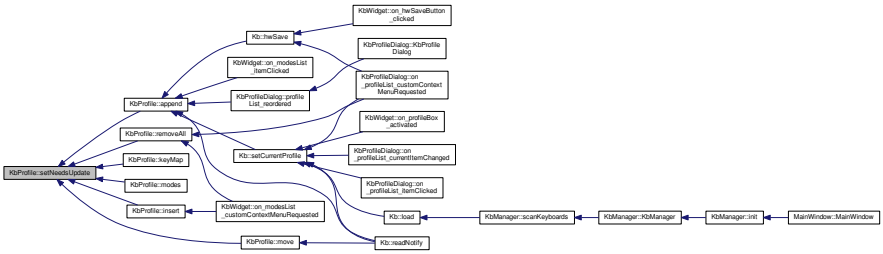

12.35.5 Field Documentation

12.35.5.1 KbMode* KbProfile::_currentMode [private]

Definition at line 58 of file kbprofile.h.

Referenced by currentMode(), KbProfile(), and save().

12.35.5.2 UsbId KbProfile::_id [private]

Definition at line 60 of file kbprofile.h.

Referenced by id(), KbProfile(), newId(), and save().

12.35.5.3 KeyMap KbProfile::_keyMap [private]

Definition at line 61 of file kbprofile.h.

Referenced by KbProfile(), and keyMap().

12.35.5.4 ModeList KbProfile::_modes [private]

Definition at line 62 of file kbprofile.h.

Referenced by append(), find(), indexOf(), insert(), KbProfile(), keyMap(), modeCount(), modes(), move(), needsSave(), newId(), removeAll(), save(), and setNeedsUpdate().

12.35.5.5 QString KbProfile::_name [private]

Definition at line 59 of file kbprofile.h.

Referenced by KbProfile(), and name().

12.35.5.6 bool KbProfile::_needsSave [private]

Definition at line 63 of file kbprofile.h.

Referenced by currentMode(), id(), name(), needsSave(), newId(), save(), and setNeedsSave().

The documentation for this class was generated from the following files:

- src/ckb/kbprofile.h
- src/ckb/kbprofile.cpp

12.36 KbProfileDialog Class Reference

`#include <src/ckb/kbprofiledialog.h>`

Inheritance diagram for KbProfileDialog:

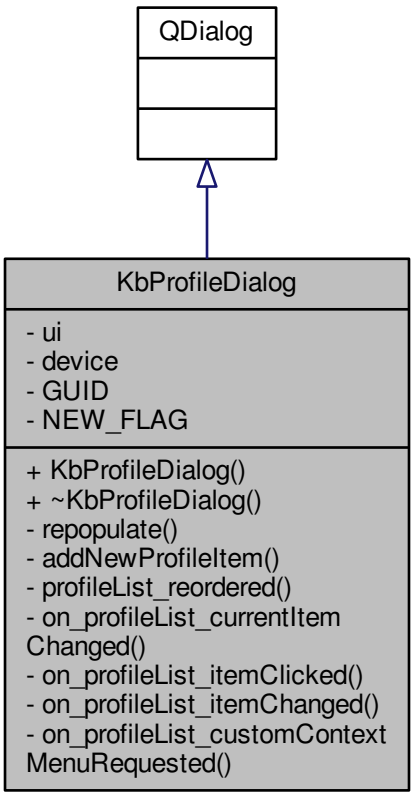

Collaboration diagram for KbProfileDialog:

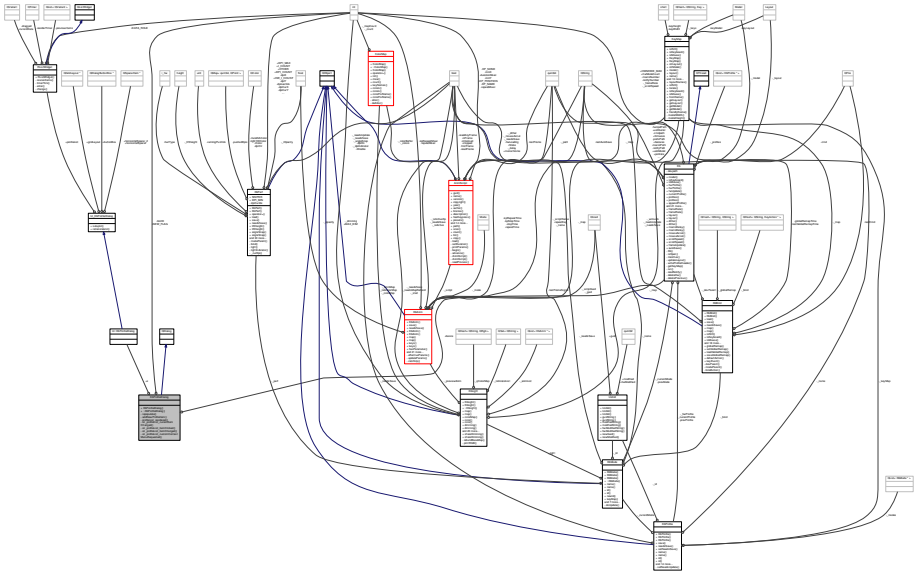

Public Member Functions

- KbProfileDialog (KbWidget ∗parent=0)
- ∼KbProfileDialog ()

Private Slots

- void profileList_reordered ()
- void on_profileList_currentItemChanged (QListWidgetItem ∗current, QListWidgetItem ∗previous)
- void on_profileList_itemClicked (QListWidgetItem ∗item)
- void on_profileList_itemChanged (QListWidgetItem ∗item)
- void on_profileList_customContextMenuRequested (const QPoint &pos)

Private Member Functions

- void repopulate ()
- void addNewProfileItem ()

Private Attributes

- Ui::KbProfileDialog ∗ ui
- Kb ∗ device

Static Private Attributes

- static const int GUID = Qt::UserRole
- static const int NEW_FLAG = Qt::UserRole + 1

12.36.1 Detailed Description

Definition at line 11 of file kbprofiledialog.h.

12.36.2 Constructor & Destructor Documentation

12.36.2.1 KbProfileDialog::KbProfileDialog (KbWidget * *parent* = 0) [explicit]

Definition at line 5 of file kbprofiledialog.cpp.

References Ui_KbProfileDialog::profileList, profileList_reordered(), repopulate(), Ui_KbProfileDialog::setupUi(), and ui.

```
5                                                :
6     QDialog(parent),
7     ui(new Ui::KbProfileDialog), device(parent->
      device)
8 {
9     ui->setupUi(this);
10     connect(ui->profileList, SIGNAL(orderChanged()), this, SLOT(
      profileList_reordered()));
11
12     // Populate profile list
13     repopulate();
14 }
```

Here is the call graph for this function:

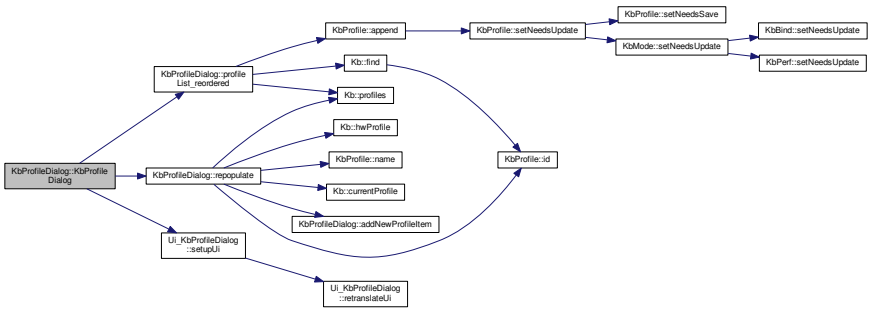

12.36.2.2 KbProfileDialog::~KbProfileDialog ( )

Definition at line 16 of file kbprofiledialog.cpp.

References ui.

```
16                                    {
17     delete ui;
18 }
```

12.36.3 Member Function Documentation

12.36.3.1 void KbProfileDialog::addNewProfileItem ( ) [private]

Definition at line 66 of file kbprofiledialog.cpp.

References NEW_FLAG, Ui_KbProfileDialog::profileList, and ui.

Referenced by on_profileList_itemClicked(), and repopulate().

```
66                                        {
67     // Add an item for creating a new profile. Make it editable but not dragable.
68     QListWidgetItem* item = new QListWidgetItem("New profile...", ui->
      profileList);
69     item->setFlags((item->flags() | Qt::ItemIsEditable) & ~Qt::ItemIsDragEnabled & ~Qt::ItemIsDropEnabled);
70     item->setData(NEW_FLAG, 1);
```

```
71     QFont font = item->font();
72     font.setItalic(true);
73     item->setFont(font);
74     item->setIcon(QIcon(":/img/icon_plus.png"));
75     ui->profileList->addItem(item);
76 }
```

Here is the caller graph for this function:

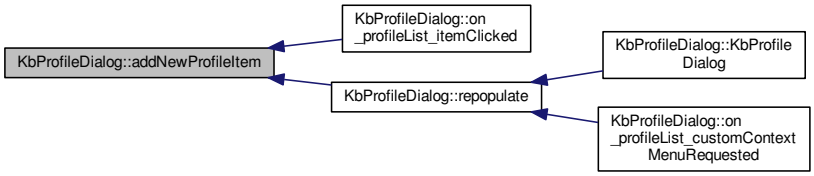

12.36.3.2 void KbProfileDialog::on_profileList_currentItemChanged (QListWidgetItem * *current*, QListWidgetItem * *previous*) [private], [slot]

Definition at line 39 of file kbprofiledialog.cpp.

References device, Kb::find(), GUID, and Kb::setCurrentProfile().

```
39                                                                                                  {
40     if(!current)
41         return;
42     KbProfile* profile = device->find(current->data(GUID).toUuid());
43     if(!profile)
44         return;
45     device->setCurrentProfile(profile);
46 }
```

Here is the call graph for this function:

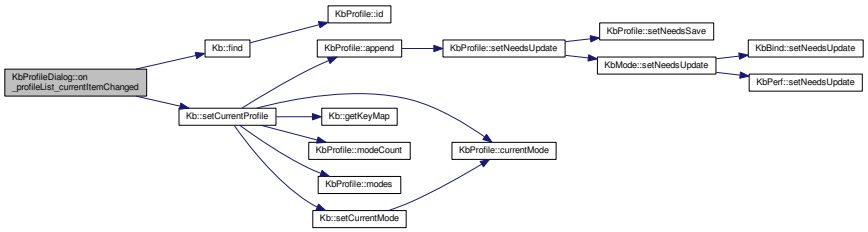

12.36.3.3 void KbProfileDialog::on_profileList_customContextMenuRequested (const QPoint & *pos*) [private], [slot]

Definition at line 109 of file kbprofiledialog.cpp.

References Kb::currentProfile(), device, Kb::find(), UsbId::guid, GUID, Kb::hwProfile(), Kb::hwSave(), KbProfile::id(), Kb::indexOf(), NEW_FLAG, KbProfile::newId(), Kb::newProfile(), Ui_KbProfileDialog::profileList, Kb::profiles(), KbProfile::removeAll(), repopulate(), Kb::setCurrentProfile(), and ui.

```
109                                                                                                 {
```

```
110     QListWidgetItem* item = ui->profileList->itemAt(pos);
111     KbProfile* currentProfile = device->currentProfile();
112     if(!item || !currentProfile || item->data(GUID).toUuid() != currentProfile->
    id().guid)
113         return;
114     int index = device->indexOf(currentProfile);
115     QList<KbProfile*> profiles = device->profiles();
116
117     QMenu menu(this);
118     QAction* rename = new QAction("Rename...", this);
119     QAction* duplicate = new QAction("Duplicate", this);
120     QAction* del = new QAction("Delete", this);
121     bool canDelete = (profiles.count() > 1);
122     if(!canDelete)
123         // Can't delete the last profile on the device
124         del->setEnabled(false);
125     QAction* hwsave = new QAction("Save to Hardware", this);
126     QAction* moveup = new QAction("Move Up", this);
127     if(index == 0)
128         moveup->setEnabled(false);
129     QAction* movedown = new QAction("Move Down", this);
130     if(index >= profiles.count() - 1)
131         movedown->setEnabled(false);
132     menu.addAction(rename);
133     menu.addAction(duplicate);
134     menu.addAction(del);
135     menu.addSeparator();
136     menu.addAction(hwsave);
137     menu.addSeparator();
138     menu.addAction(moveup);
139     menu.addAction(movedown);
140     QAction* result = menu.exec(QCursor::pos());
141     if(result == rename){
142         ui->profileList->editItem(item);
143     } else if(result == duplicate){
144         KbProfile* newProfile = device->newProfile(currentProfile);
145         newProfile->newId();
146         profiles.insert(index + 1, newProfile);
147         device->profiles(profiles);
148         device->setCurrentProfile(newProfile);
149     } else if(result == del){
150         if(!canDelete)
151             return;
152         profiles.removeAll(currentProfile);
153         device->profiles(profiles);
154         currentProfile->deleteLater();
155         // Select next profile
156         if(index < profiles.count())
157             device->setCurrentProfile(profiles.at(index));
158         else
159             device->setCurrentProfile(profiles.last());
160     } else if(result == hwsave){
161         device->hwSave();
162         // Refresh item icons
163         int count = ui->profileList->count();
164         for(int i = 0; i < count; i++){
165             QListWidgetItem* item = ui->profileList->item(i);
166             if(item->data(NEW_FLAG).toUInt() == 1)
167                 continue;
168             KbProfile* profile = device->find(item->data(GUID).toUuid());
169             item->setIcon(QIcon((profile == device->hwProfile()) ? "
    :/img/icon_profile_hardware.png" : ":/img/icon_profile.png"));
170         }
171     } else if(result == moveup){
172         profiles.removeAll(currentProfile);
173         profiles.insert(index - 1, currentProfile);
174         device->profiles(profiles);
175     } else if(result == movedown){
176         profiles.removeAll(currentProfile);
177         profiles.insert(index + 1, currentProfile);
178         device->profiles(profiles);
179     }
180     repopulate();
181 }
```

Here is the call graph for this function:

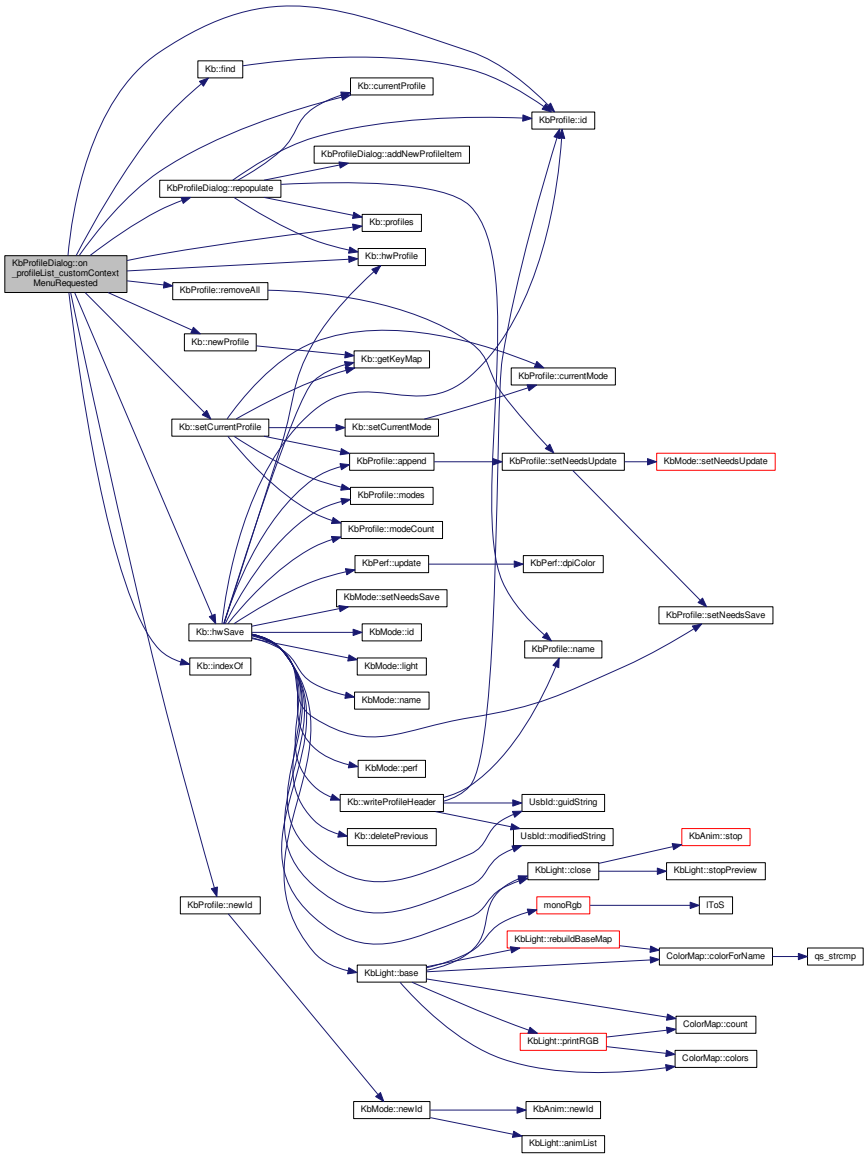

12.36.3.4 void KbProfileDialog::on_profileList_itemChanged (QListWidgetItem * *item*) [private], [slot]

Definition at line 100 of file kbprofiledialog.cpp.

References Kb::currentProfile(), device, UsbId::guid, GUID, KbProfile::id(), and KbProfile::name().

```
100                                                                 {
101     KbProfile* currentProfile = device->currentProfile();
102     if(!item || !currentProfile || item->data(GUID).toUuid() != currentProfile->
      id().guid)
103         return;
104     currentProfile->name(item->text());
105     // Set the text to the actual name (trimmed, "" replaced with "Unnamed")
106     item->setText(currentProfile->name());
107 }
```

Here is the call graph for this function:

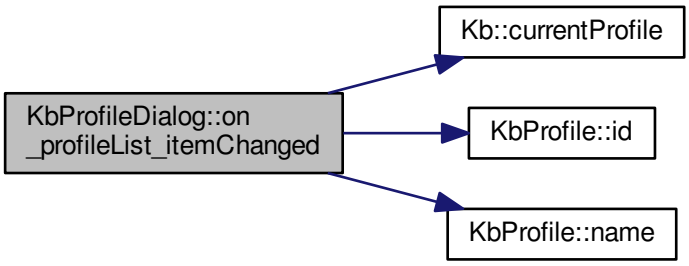

12.36.3.5 void KbProfileDialog::on_profileList_itemClicked (QListWidgetItem * *item*) [private], [slot]

Definition at line 78 of file kbprofiledialog.cpp.

References addNewProfileItem(), Kb::appendProfile(), device, UsbId::guid, GUID, KbProfile::id(), NEW_FLAG, Kb::newProfile(), Ui_KbProfileDialog::profileList, Kb::setCurrentProfile(), and ui.

```
78                                                                  {
79     QUuid guid = item->data(GUID).toUuid();
80     if(guid.isNull() && item->data(NEW_FLAG).toInt() == 1){
81         // New profile
82         item->setText("");
83         ui->profileList->editItem(item);
84         item->setFlags(item->flags() | Qt::ItemIsEditable | Qt::ItemIsDragEnabled | Qt::ItemIsDropEnabled);
85         QFont font = item->font();
86         font.setItalic(false);
87         item->setFont(font);
88         item->setIcon(QIcon(":/img/icon_profile.png"));
89         // Add the new profile and assign it to this item
90         KbProfile* newProfile = device->newProfile();
91         device->appendProfile(newProfile);
92         item->setData(GUID, newProfile->id().guid);
93         item->setData(NEW_FLAG, 0);
94         device->setCurrentProfile(newProfile);
95         // Create another "new profile" item to replace this one
96         addNewProfileItem();
97     }
98 }
```

Here is the call graph for this function:

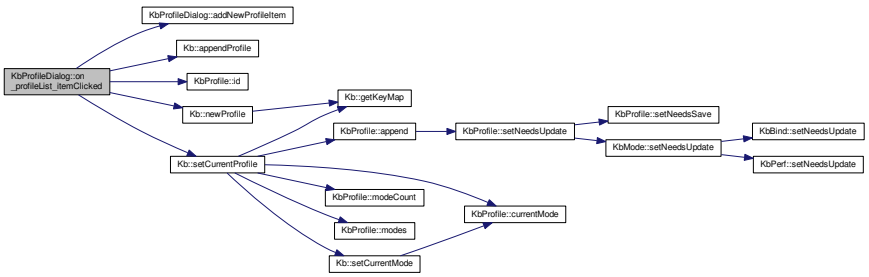

12.36.3.6 void KbProfileDialog::profileList_reordered ( ) [private],[slot]

Definition at line 20 of file kbprofiledialog.cpp.

References KbProfile::append(), device, Kb::find(), GUID, Ui_KbProfileDialog::profileList, Kb::profiles(), and ui.

Referenced by KbProfileDialog().

```
20                                          {
21     // Rebuild profile list from items
22     QList<KbProfile*> newProfiles;
23     int count = ui->profileList->count();
24     for(int i = 0; i < count; i++){
25         QListWidgetItem* item = ui->profileList->item(i);
26         KbProfile* profile = device->find(item->data(GUID).toUuid());
27         if(profile && !newProfiles.contains(profile))
28             newProfiles.append(profile);
29         item->setFlags(item->flags() | Qt::ItemIsEditable);
30     }
31     // Add any missing profiles at the end of the list
32     foreach(KbProfile* profile, device->profiles()){
33         if(!newProfiles.contains(profile))
34             newProfiles.append(profile);
35     }
36     device->profiles(newProfiles);
37 }
```

Here is the call graph for this function:



Here is the caller graph for this function:



12.36.3.7 void KbProfileDialog::repopulate ( ) [private]

Definition at line 48 of file kbprofiledialog.cpp.

References addNewProfileItem(), Kb::currentProfile(), device, UsbId::guid, GUID, Kb::hwProfile(), KbProfile::id(), KbProfile::name(), Ui_KbProfileDialog::profileList, Kb::profiles(), and ui.

Referenced by KbProfileDialog(), and on_profileList_customContextMenuRequested().

```
48                                          {
49     ui->profileList->clear();
50     QListWidgetItem* current = 0;
51     foreach(KbProfile* profile, device->profiles()){
52         QListWidgetItem* item = new QListWidgetItem(QIcon((profile == device->
      hwProfile()) ? ":/img/icon_profile_hardware.png" : ":/img/icon_profile.png"), profile->
```

```
      name(), ui->profileList);
53          item->setData(GUID, profile->id().guid);
54          item->setFlags(item->flags() | Qt::ItemIsEditable);
55          if(profile == device->currentProfile()){
56              item->setSelected(true);
57              current = item;
58          }
59          ui->profileList->addItem(item);
60      }
61      if(current)
62          ui->profileList->setCurrentItem(current);
63      addNewProfileItem();
64  }
```

Here is the call graph for this function:

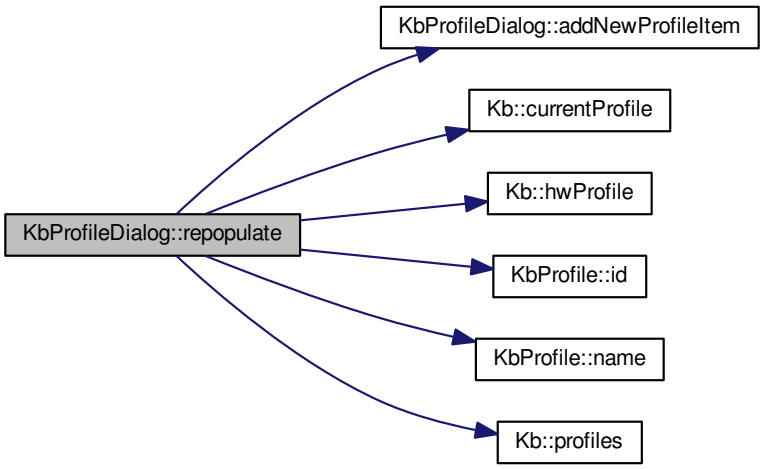

Here is the caller graph for this function:

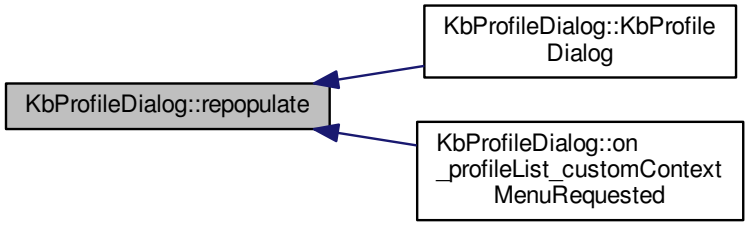

12.36.4 Field Documentation

12.36.4.1 Kb* KbProfileDialog::device [private]

Definition at line 29 of file kbprofiledialog.h.

Referenced by on_profileList_currentItemChanged(), on_profileList_customContextMenuRequested(), on_profileList_itemChanged(), on_profileList_itemClicked(), profileList_reordered(), and repopulate().

12.36.4.2 const int KbProfileDialog::GUID = Qt::UserRole [static], [private]

Definition at line 30 of file kbprofiledialog.h.

Referenced by on_profileList_currentItemChanged(), on_profileList_customContextMenuRequested(), on_profileList_itemChanged(), on_profileList_itemClicked(), profileList_reordered(), and repopulate().

12.36.4.3 const int KbProfileDialog::NEW_FLAG = Qt::UserRole + 1 [static], [private]

Definition at line 31 of file kbprofiledialog.h.

Referenced by addNewProfileItem(), on_profileList_customContextMenuRequested(), and on_profileList_itemClicked().

12.36.4.4 Ui::KbProfileDialog* KbProfileDialog::ui [private]

Definition at line 27 of file kbprofiledialog.h.

Referenced by addNewProfileItem(), KbProfileDialog(), on_profileList_customContextMenuRequested(), on_profileList_itemClicked(), profileList_reordered(), repopulate(), and ~KbProfileDialog().

The documentation for this class was generated from the following files:

- src/ckb/kbprofiledialog.h
- src/ckb/kbprofiledialog.cpp

12.37 Ui::KbProfileDialog Class Reference

#include <src/ckb/ui_kbprofiledialog.h>

Inheritance diagram for Ui::KbProfileDialog:

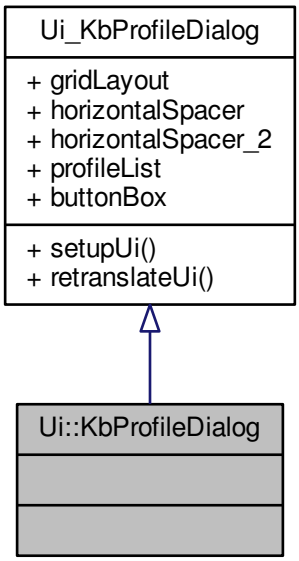

Collaboration diagram for Ui::KbProfileDialog:

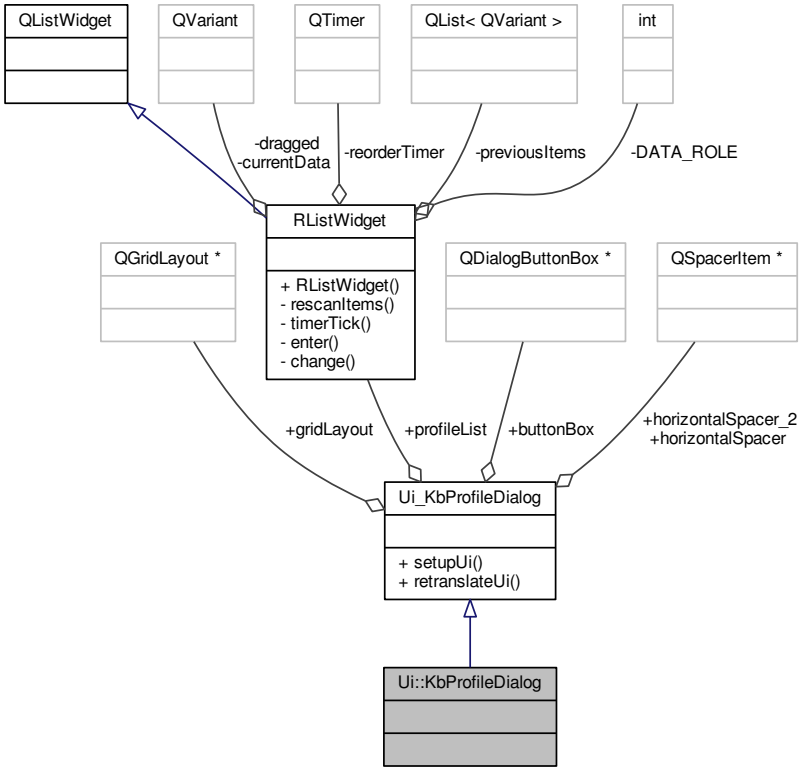

Public Member Functions

- void setupUi (QDialog *KbProfileDialog)
- void retranslateUi (QDialog *KbProfileDialog)

Data Fields

- QGridLayout * gridLayout
- QSpacerItem * horizontalSpacer
- QSpacerItem * horizontalSpacer_2
- RListWidget * profileList
- QDialogButtonBox * buttonBox

12.37.1 Detailed Description

Definition at line 81 of file ui_kbprofiledialog.h.

12.37.2 Member Function Documentation

12.37.2.1 void Ui_KbProfileDialog::retranslateUi (QDialog * *KbProfileDialog*) [inline], [inherited]

Definition at line 73 of file ui_kbprofiledialog.h.

Referenced by Ui_KbProfileDialog::setupUi().

```
74     {
75         KbProfileDialog->setWindowTitle(QApplication::translate("KbProfileDialog", "Keyboard Profiles",
       Q_NULLPTR));
76     } // retranslateUi
```

Here is the caller graph for this function:



12.37.2.2 void Ui_KbProfileDialog::setupUi (QDialog * *KbProfileDialog*) [inline],[inherited]

Definition at line 34 of file ui_kbprofiledialog.h.

References Ui_KbProfileDialog::buttonBox, Ui_KbProfileDialog::gridLayout, Ui_KbProfileDialog::horizontalSpacer, Ui_KbProfileDialog::horizontalSpacer_2, Ui_KbProfileDialog::profileList, and Ui_KbProfileDialog::retranslateUi().

Referenced by KbProfileDialog::KbProfileDialog().

```
35     {
36         if (KbProfileDialog->objectName().isEmpty())
37             KbProfileDialog->setObjectName(QStringLiteral("KbProfileDialog"));
38         KbProfileDialog->resize(400, 300);
39         KbProfileDialog->setFocusPolicy(Qt::ClickFocus);
40         gridLayout = new QGridLayout(KbProfileDialog);
41         gridLayout->setObjectName(QStringLiteral("gridLayout"));
42         horizontalSpacer = new QSpacerItem(40, 20, QSizePolicy::Expanding,
       QSizePolicy::Minimum);
43
44         gridLayout->addItem(horizontalSpacer, 0, 0, 1, 1);
45
46         horizontalSpacer_2 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
       QSizePolicy::Minimum);
47
48         gridLayout->addItem(horizontalSpacer_2, 0, 2, 1, 1);
49
50         profileList = new RListWidget(KbProfileDialog);
51         profileList->setObjectName(QStringLiteral("profileList"));
52         profileList->setContextMenuPolicy(Qt::CustomContextMenu);
53         profileList->setFrameShadow(QFrame::Plain);
54         profileList->setIconSize(QSize(24, 24));
55
56         gridLayout->addWidget(profileList, 0, 1, 1, 1);
57
58         buttonBox = new QDialogButtonBox(KbProfileDialog);
59         buttonBox->setObjectName(QStringLiteral("buttonBox"));
60         buttonBox->setOrientation(Qt::Horizontal);
61         buttonBox->setStandardButtons(QDialogButtonBox::Ok);
62
63         gridLayout->addWidget(buttonBox, 1, 0, 1, 3);
64
65
66         retranslateUi(KbProfileDialog);
67         QObject::connect(buttonBox, SIGNAL(accepted()), KbProfileDialog, SLOT(accept()));
68         QObject::connect(buttonBox, SIGNAL(rejected()), KbProfileDialog, SLOT(reject()));
69
70         QMetaObject::connectSlotsByName(KbProfileDialog);
71     } // setupUi
```

Here is the call graph for this function:

Here is the caller graph for this function:



12.37.3 Field Documentation

12.37.3.1 QDialogButtonBox* Ui_KbProfileDialog::buttonBox [inherited]

Definition at line 32 of file ui_kbprofiledialog.h.

Referenced by Ui_KbProfileDialog::setupUi().

12.37.3.2 QGridLayout* Ui_KbProfileDialog::gridLayout [inherited]

Definition at line 28 of file ui_kbprofiledialog.h.

Referenced by Ui_KbProfileDialog::setupUi().

12.37.3.3 QSpacerItem* Ui_KbProfileDialog::horizontalSpacer [inherited]

Definition at line 29 of file ui_kbprofiledialog.h.

Referenced by Ui_KbProfileDialog::setupUi().

12.37.3.4 QSpacerItem* Ui_KbProfileDialog::horizontalSpacer_2 [inherited]

Definition at line 30 of file ui_kbprofiledialog.h.

Referenced by Ui_KbProfileDialog::setupUi().

12.37.3.5 RListWidget* Ui_KbProfileDialog::profileList [inherited]

Definition at line 31 of file ui_kbprofiledialog.h.

Referenced by KbProfileDialog::addNewProfileItem(), KbProfileDialog::KbProfileDialog(), KbProfileDialog::on_profileList_customContextMenuRequested(), KbProfileDialog::on_profileList_itemClicked(), KbProfileDialog::profileList_reordered(), KbProfileDialog::repopulate(), and Ui_KbProfileDialog::setupUi().

The documentation for this class was generated from the following file:

- src/ckb/ui_kbprofiledialog.h

12.38 KbWidget Class Reference

`#include <src/ckb/kbwidget.h>`

Inheritance diagram for KbWidget:

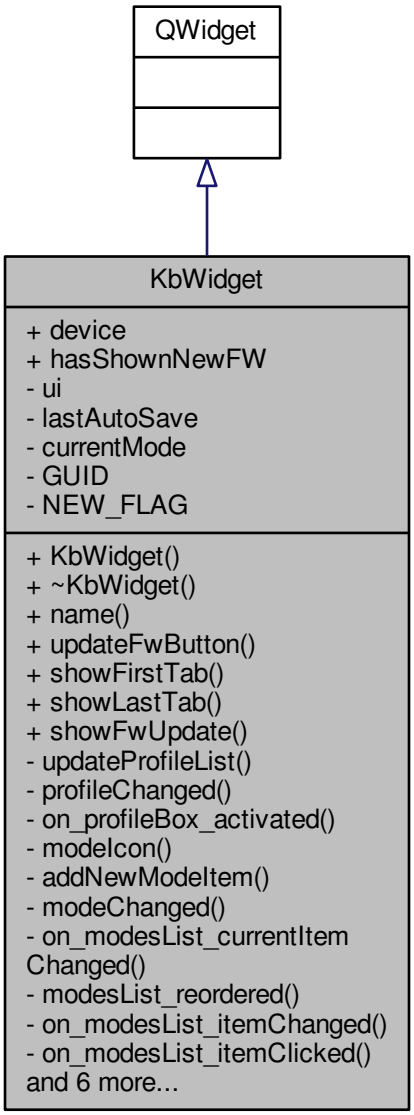

Collaboration diagram for KbWidget:

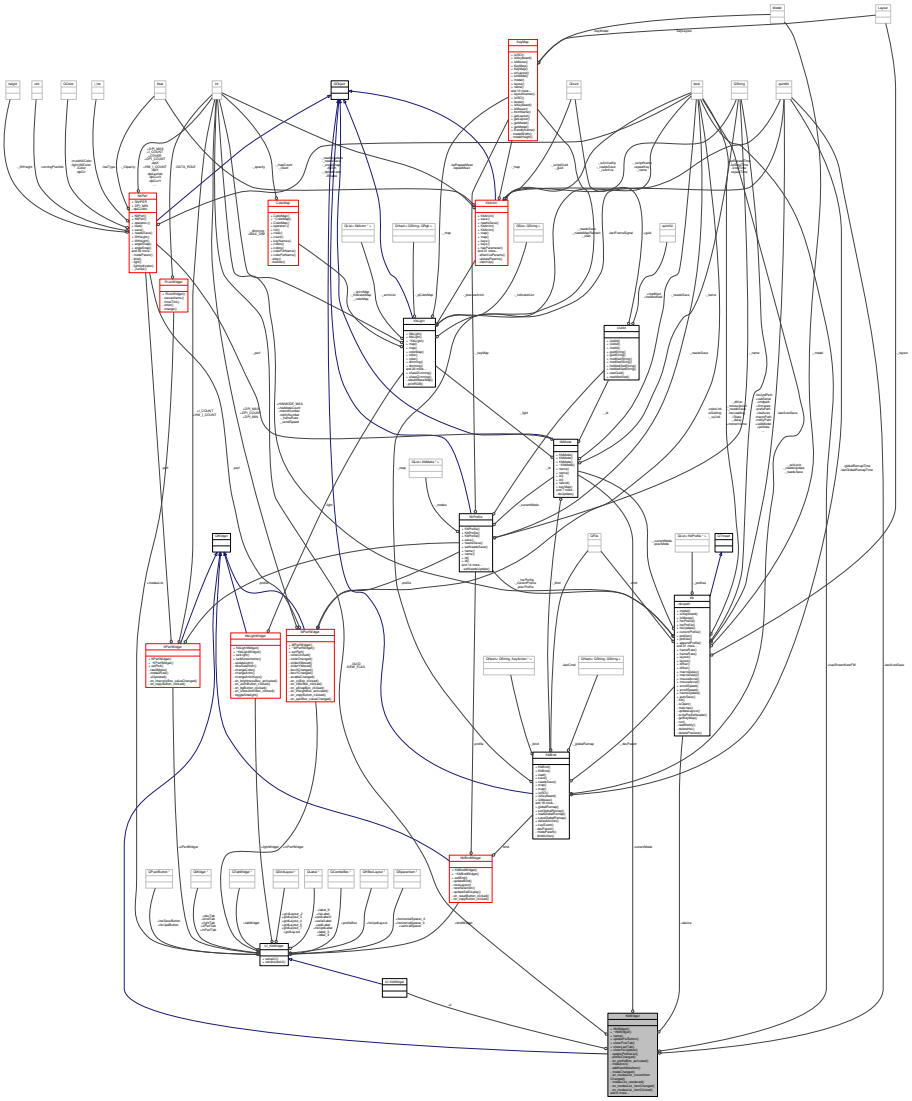

Public Slots

- void showFirstTab ()
- void showLastTab ()
- void showFwUpdate ()

Public Member Functions

- KbWidget (QWidget *parent, Kb *_device)
- ~KbWidget ()
- QString name () const
- void updateFwButton ()

Data Fields

- Kb * device
- bool hasShownNewFW

Private Slots

- void updateProfileList ()
- void profileChanged ()
- void on_profileBox_activated (int index)
- QIcon modeIcon (int i)
- void addNewModeItem ()
- void modeChanged (bool spontaneous=true)
- void on_modesList_currentItemChanged (QListWidgetItem ∗current, QListWidgetItem ∗previous)
- void modesList_reordered ()
- void on_modesList_itemChanged (QListWidgetItem ∗item)
- void on_modesList_itemClicked (QListWidgetItem ∗item)
- void on_modesList_customContextMenuRequested (const QPoint &pos)

  KbWidget::on_modesList_customContextMenuRequested.
- void devUpdate ()
- void modeUpdate ()
- void on_hwSaveButton_clicked ()
- void on_tabWidget_currentChanged (int index)
- void on_fwUpdButton_clicked ()

Private Attributes

- Ui::KbWidget ∗ ui
- quint64 lastAutoSave
- KbMode ∗ currentMode

Static Private Attributes

- static const int GUID = Qt::UserRole
- static const int NEW_FLAG = Qt::UserRole + 1

12.38.1 Detailed Description

Definition at line 15 of file kbwidget.h.

12.38.2 Constructor & Destructor Documentation

12.38.2.1 KbWidget::KbWidget (QWidget ∗ *parent*, Kb ∗ *_device*) [explicit]

Definition at line 15 of file kbwidget.cpp.

References device, devUpdate(), Kb::features, Ui_KbWidget::fwUpdButton, Ui_KbWidget::fwUpdLabel, Ui_KbWidget::fwUpdLayout, Kb::isKeyboard(), Kb::isMouse(), Ui_KbWidget::kPerfTab, Ui_KbWidget::lightTab, Ui_KbWidget::lightWidget, modeChanged(), Ui_KbWidget::modesList, modesList_reordered(), Kb::monochrome, Ui_KbWidget::mPerfTab, Ui_KbWidget::pollLabel, Ui_KbWidget::pollLabel2, profileChanged(), KbLightWidget::setMonochrome(), Ui_KbWidget::setupUi(), Ui_KbWidget::tabWidget, ui, and updateProfileList().

```
15                                          :
16     QWidget(parent),
17     device(_device), hasShownNewFW(false),
18     ui(new Ui::KbWidget),
19     currentMode(0)
20 {
21     ui->setupUi(this);
22     connect(ui->modesList, SIGNAL(orderChanged()), this, SLOT(
       modesList_reordered()));
23
```

```
24      connect(device, SIGNAL(infoUpdated()), this, SLOT(devUpdate()));
25      connect(device, SIGNAL(profileAdded()), this, SLOT(updateProfileList()));
26      connect(device, SIGNAL(profileChanged()), this, SLOT(
    profileChanged()));
27      connect(device, SIGNAL(profileRenamed()), this, SLOT(updateProfileList()));
28      connect(device, SIGNAL(modeRenamed()), this, SLOT(profileChanged()));
29      connect(device, SIGNAL(modeRenamed()), this, SLOT(modeChanged()));
30      connect(device, SIGNAL(modeChanged(bool)), this, SLOT(
    modeChanged(bool)));
31
32      // Remove the Lighting and Performance tabs from non-RGB keyboards
33      if(!device->features.contains("rgb")){
34          ui->tabWidget->removeTab(ui->tabWidget->indexOf(ui->
    lightTab));
35          ui->tabWidget->removeTab(ui->tabWidget->indexOf(ui->
    kPerfTab));
36          ui->tabWidget->removeTab(ui->tabWidget->indexOf(ui->
    mPerfTab));
37      } else {
38          // Remove mouse Performance tab from non-mice
39          if(!device->isMouse())
40              ui->tabWidget->removeTab(ui->tabWidget->indexOf(
    ui->mPerfTab));
41          // Remove keyboard Performance tab from non-keyboards
42          if(!device->isKeyboard())
43              ui->tabWidget->removeTab(ui->tabWidget->indexOf(
    ui->kPerfTab));
44      }
45      // Hide poll rate and FW update as appropriate
46      if(!device->features.contains("pollrate")){
47          ui->pollLabel->hide();
48          ui->pollLabel2->hide();
49      }
50      if(!device->features.contains("fwupdate")){
51          ui->fwUpdButton->hide();
52          ui->fwUpdLabel->hide();
53          ui->fwUpdLayout->removeItem(ui->fwUpdLayout->itemAt(1));
54      }
55      // Set monochrome mode according to hardware
56      if(device->monochrome)
57          ui->lightWidget->setMonochrome();
58  }
```

Here is the call graph for this function:

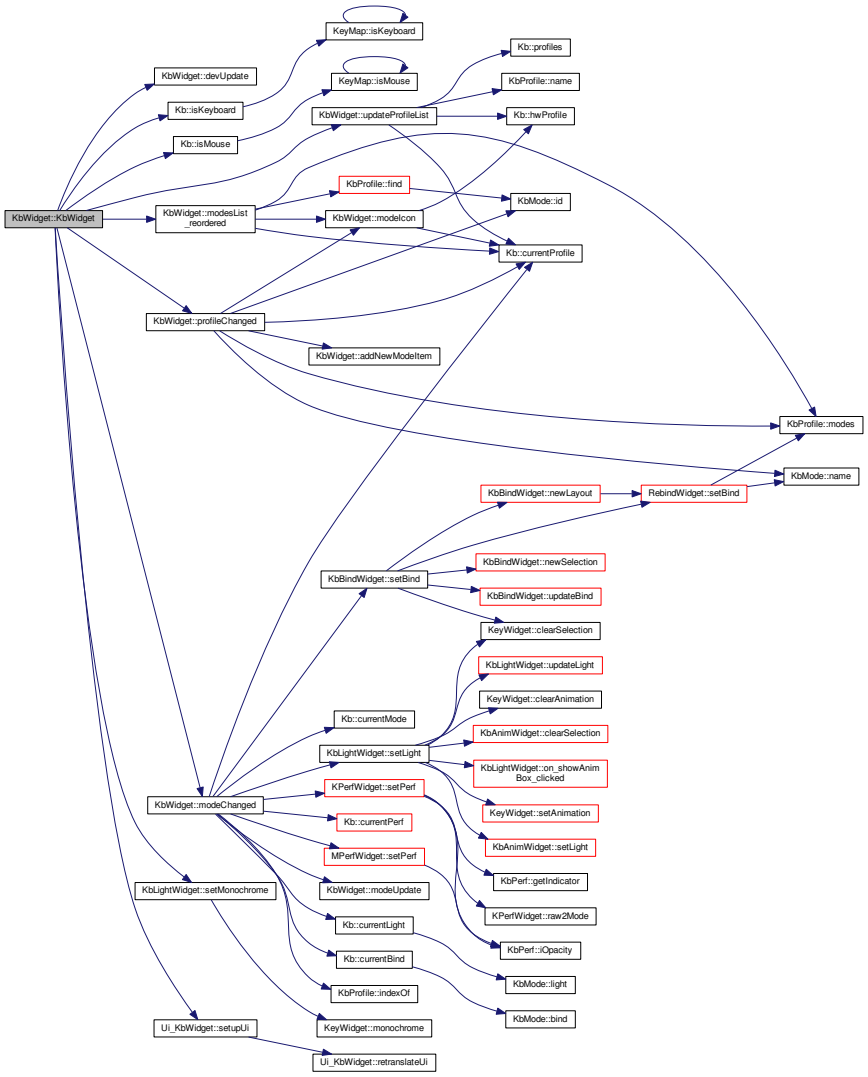

12.38.2.2 KbWidget::~KbWidget ( )

Definition at line 60 of file kbwidget.cpp.

References ui.

```
60                      {
61     delete ui;
62 }
```

12.38.3 Member Function Documentation

12.38.3.1 void KbWidget::addNewModeItem ( ) [private], [slot]

Definition at line 136 of file kbwidget.cpp.

References Ui_KbWidget::modesList, NEW_FLAG, and ui.

Referenced by on_modesList_itemClicked(), and profileChanged().

```
136                             {
137     // Add an item for creating a new mode. Make it editable but not dragable.
138     QListWidgetItem* item = new QListWidgetItem("New mode...", ui->modesList);
139     item->setFlags((item->flags() | Qt::ItemIsEditable) & ~Qt::ItemIsDragEnabled & ~Qt::ItemIsDropEnabled);
140     item->setData(NEW_FLAG, 1);
141     QFont font = item->font();
142     font.setItalic(true);
143     item->setFont(font);
144     item->setIcon(QIcon(":/img/icon_plus.png"));
145     ui->modesList->addItem(item);
146 }
```

Here is the caller graph for this function:

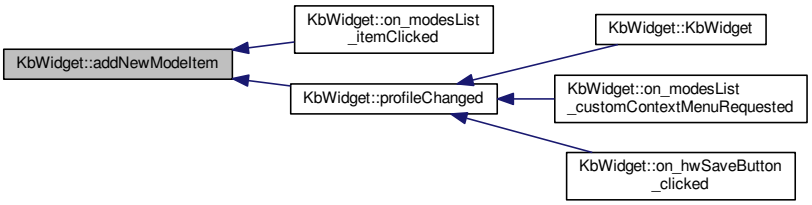

12.38.3.2 void KbWidget::devUpdate ( ) [private],[slot]

Definition at line 300 of file kbwidget.cpp.

References device, Kb::firmware, Ui_KbWidget::fwLabel, Ui_KbWidget::pollLabel, Kb::pollrate, Ui_KbWidget::serialLabel, ui, and Kb::usbSerial.

Referenced by KbWidget().

```
300                         {
301     // Update device tab
302     ui->serialLabel->setText(device->usbSerial);
303     ui->fwLabel->setText(device->firmware);
304     ui->pollLabel->setText(device->pollrate);
305 }
```

Here is the caller graph for this function:

12.38.3.3 void KbWidget::modeChanged (bool *spontaneous* = true) [private],[slot]

Definition at line 148 of file kbwidget.cpp.

References Ui_KbWidget::bindWidget, Kb::currentBind(), Kb::currentLight(), currentMode, Kb::currentMode(), Kb::currentPerf(), Kb::currentProfile(), device, KbProfile::indexOf(), Ui_KbWidget::kPerfWidget, Ui_KbWidget::lightWidget, Ui_KbWidget::modesList, modeUpdate(), Ui_KbWidget::mPerfWidget, KbBindWidget::setBind(), KbLightWidget::setLight(), KPerfWidget::setPerf(), MPerfWidget::setPerf(), and ui.

Referenced by KbWidget(), and on_modesList_customContextMenuRequested().

```
148                                         {
149     int index = device->currentProfile()->indexOf(
    device->currentMode());
150     if(index < 0)
151         return;
152     // Update tabs
153     ui->lightWidget->setLight(device->currentLight());
154     ui->bindWidget->setBind(device->currentBind(),
    device->currentProfile());
155     ui->kPerfWidget->setPerf(device->currentPerf(),
    device->currentProfile());
156     ui->mPerfWidget->setPerf(device->currentPerf(),
    device->currentProfile());
157     // Update selection
158     if(spontaneous)
159         ui->modesList->setCurrentRow(index);
160     // Connect signals
161     if(currentMode)
162         disconnect(currentMode, SIGNAL(updated()), this, SLOT(
    modeUpdate()));
163     currentMode = device->currentMode();
164     connect(currentMode, SIGNAL(updated()), this, SLOT(modeUpdate()));
165     modeUpdate();
166 }
```

Here is the call graph for this function:

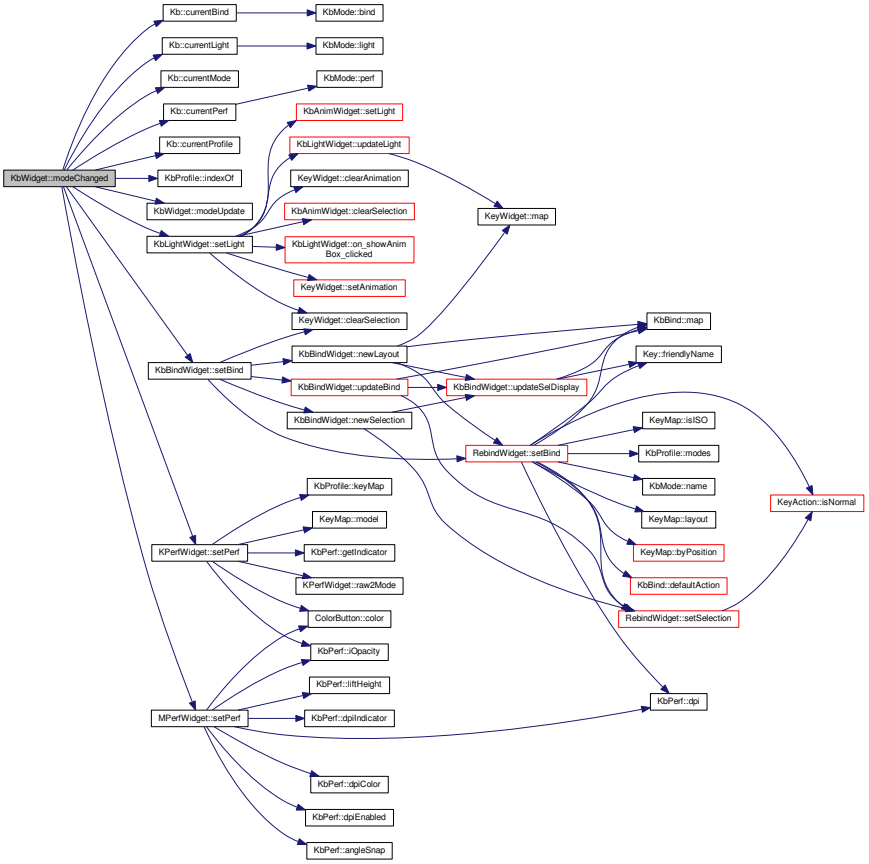

Here is the caller graph for this function:

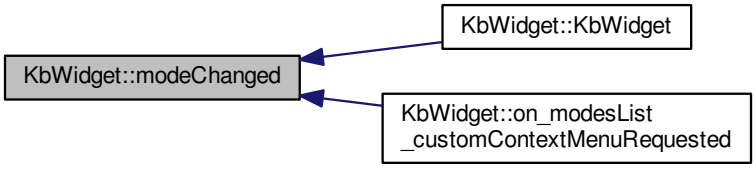

12.38.3.4 QIcon KbWidget::modeIcon (int *i*) [private], [slot]

Definition at line 127 of file kbwidget.cpp.

References Kb::currentProfile(), device, Kb::hwModeCount, and Kb::hwProfile().

Referenced by modesList_reordered(), and profileChanged().

```
127                             {
128     KbProfile* currentProfile = device->currentProfile(), *hwProfile =
      device->hwProfile();
129     int hwModeCount = device->hwModeCount;
130     if(i >= hwModeCount)
131         return QIcon(":/img/icon_mode.png");
132     else
133         return QIcon(QString(currentProfile == hwProfile ? ":/img/icon_mode%1_hardware.png" : "
      :/img/icon_mode%1.png").arg(i + 1));
134 }
```

Here is the call graph for this function:

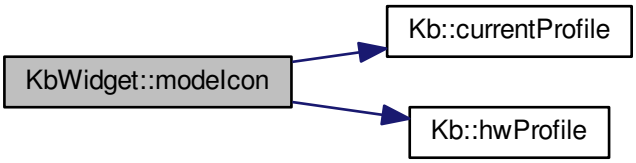

Here is the caller graph for this function:

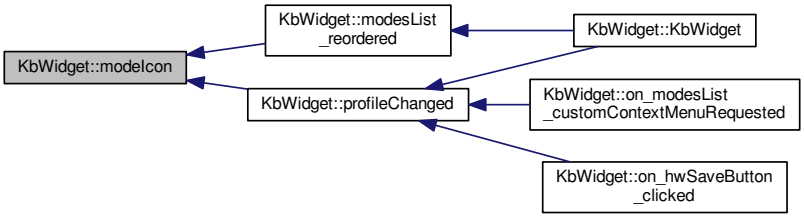

12.38.3.5 void KbWidget::modesList_reordered ( ) [private], [slot]

Definition at line 177 of file kbwidget.cpp.

References Kb::currentProfile(), device, KbProfile::find(), GUID, modelcon(), KbProfile::modes(), Ui_KbWidget::modesList, NEW_FLAG, and ui.

Referenced by KbWidget().

```
177                                 {
178     KbProfile* currentProfile = device->currentProfile();
179     // Rebuild mode list from items
180     QList<KbMode*> newModes;
181     int count = ui->modesList->count();
182     for(int i = 0; i < count; i++){
183         QListWidgetItem* item = ui->modesList->item(i);
184         KbMode* mode = currentProfile->find(item->data(GUID).toUuid());
185         if(mode && !newModes.contains(mode))
186             newModes.append(mode);
187         if(item->data(NEW_FLAG).toInt() != 1)
188             item->setIcon(modeIcon(i));
189         item->setFlags(item->flags() | Qt::ItemIsEditable);
190     }
191     // Add any missing modes at the end of the list
192     foreach(KbMode* mode, currentProfile->modes()){
193         if(!newModes.contains(mode))
194             newModes.append(mode);
195     }
196     currentProfile->modes(newModes);
197 }
```

Here is the call graph for this function:

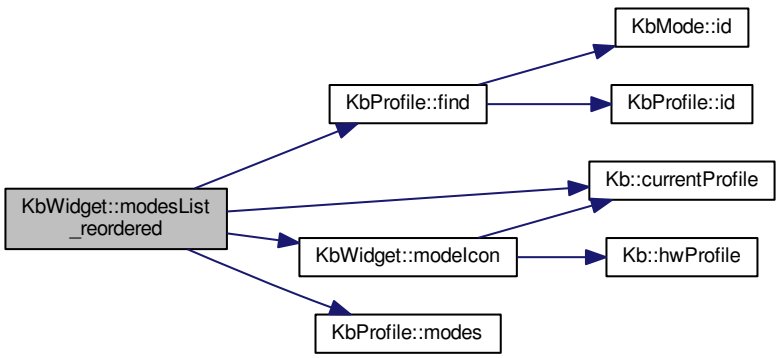

Here is the caller graph for this function:



12.38.3.6 void KbWidget::modeUpdate ( ) [private],[slot]

Definition at line 307 of file kbwidget.cpp.

Referenced by modeChanged().

```
307                          {
308 }
```

Here is the caller graph for this function:

12.38.3.7 QString KbWidget::name ( ) const [inline]

Definition at line 25 of file kbwidget.h.

References device, and Kb::usbModel.

Referenced by MainWindow::addDevice().

```
25 { return device->usbModel; }
```

Here is the caller graph for this function:



12.38.3.8 void KbWidget::on_fwUpdButton_clicked ( ) [private],[slot]

Definition at line 339 of file kbwidget.cpp.

References device, FwUpgradeDialog::exec(), Kb::features, Kb::firmware, Ui_KbWidget::fwUpdButton, KbFirmware::hasDownloaded(), ui, updateFwButton(), and KbFirmware::versionForBoard().

Referenced by showFwUpdate().

```
339                                     {
340     // If alt is pressed, ignore upgrades and go straight to the manual prompt
341     if(!(qApp->keyboardModifiers() & Qt::AltModifier)){
342         // Check version numbers
343         if(!KbFirmware::hasDownloaded()){
344             ui->fwUpdButton->setText("Checking...");
345             ui->fwUpdButton->setEnabled(false);
346         }
347         float newVersion = KbFirmware::versionForBoard(
    device->features, true);
348         float oldVersion = device->firmware.toFloat();
349         ui->fwUpdButton->setEnabled(true);
350         updateFwButton();
351         if(newVersion == -1.f){
352             QMessageBox::information(this, "Firmware update", "<center>There is a new firmware available
     for this device.<br />However, it requires a newer version of ckb.<br />Please upgrade ckb and try
     again.</center>");
353             return;
354         } else if(newVersion == 0.f){
355             if(QMessageBox::question(this, "Firmware update", "<center>There was a problem getting the
     status for this device.<br />Would you like to select a file manually?</center>") != QMessageBox::Yes)
356                 return;
357             // "Yes" -> fall through to browse file
358         } else if(newVersion <= oldVersion){
359             if(QMessageBox::question(this, "Firmware update", "<center>Your firmware is already up to
     date.<br />Would you like to select a file manually?</center>") != QMessageBox::Yes)
360                 return;
361             // "Yes" -> fall through to browse file
362         } else {
363             // Automatic upgrade. Fetch file from web.
364             // FwUpgradeDialog can't be parented to KbWidget because KbWidget may be deleted before the
     dialog exits
365             FwUpgradeDialog dialog(parentWidget(), newVersion, "",
    device);
366             dialog.exec();
367             return;
368         }
369     }
370     // Browse for file
371     QString path = QFileDialog::getOpenFileName(this, "Select firmware file",
    QStandardPaths::writableLocation(QStandardPaths::DownloadLocation), "Firmware blobs (*.bin)");
372     if(path.isEmpty())
373         return;
374     QFile file(path);
375     if(!file.open(QIODevice::ReadOnly)){
376         QMessageBox::warning(parentWidget(), "Error", "<center>File could not be read.</center>");
377         return;
378     }
379     QByteArray blob = file.readAll();
380     FwUpgradeDialog dialog(parentWidget(), 0.f, blob, device);
381     dialog.exec();
382 }
```

Here is the call graph for this function:

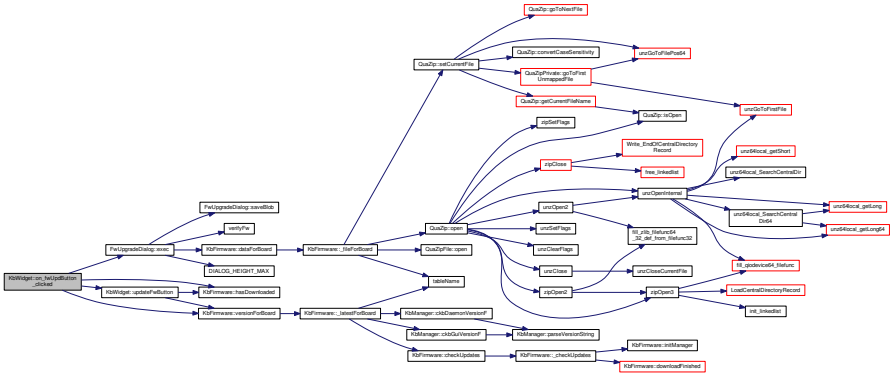

Here is the caller graph for this function:



12.38.3.9 void KbWidget::on_hwSaveButton_clicked ( ) [private], [slot]

Definition at line 310 of file kbwidget.cpp.

References device, Kb::hwSave(), profileChanged(), Kb::save(), and updateProfileList().

```
310                                    {
311     device->save();
312     device->hwSave();
313     updateProfileList();
314     profileChanged();
315 }
```

Here is the call graph for this function:

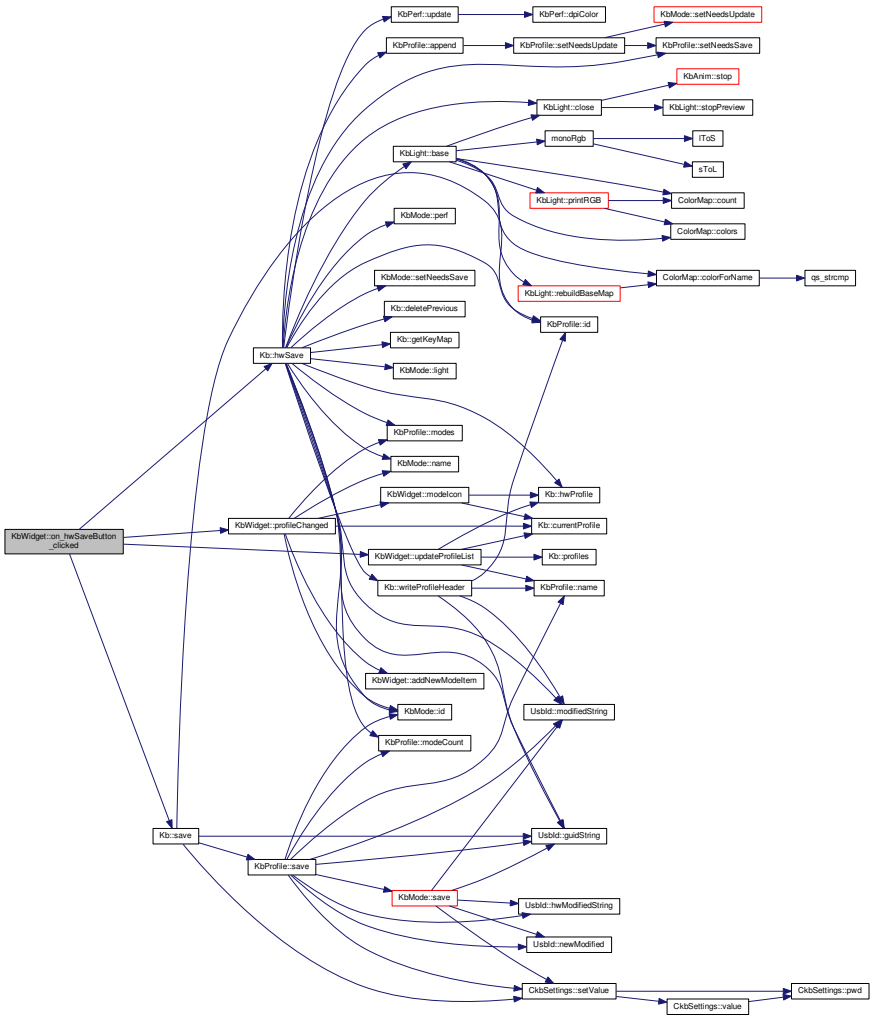

12.38.3.10 void KbWidget::on_modesList_currentItemChanged (QListWidgetItem * *current*, QListWidgetItem * *previous*) [private], [slot]

Definition at line 168 of file kbwidget.cpp.

References Kb::currentProfile(), device, KbProfile::find(), GUID, and Kb::setCurrentMode().

```
168                                                                                                 {
169     if(!current)
170         return;
171     KbMode* mode = device->currentProfile()->find(current->data(
    GUID).toUuid());
172     if(!mode)
173         return;
174     device->setCurrentMode(mode, false);
175 }
```

Here is the call graph for this function:

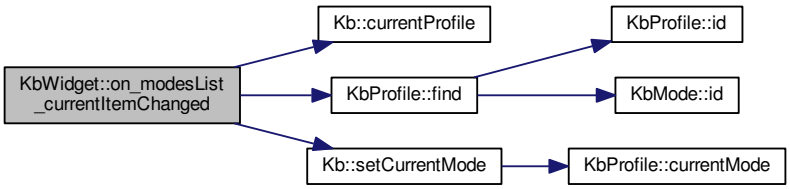

12.38.3.11 void KbWidget::on_modesList_customContextMenuRequested (const QPoint & *pos*) [private], [slot]

Parameters

pos	Opens on right click in the profiles list a context sensitive menue at position pos.

When clicking on a command it is located and executed.

Definition at line 236 of file kbwidget.cpp.

References currentMode, Kb::currentProfile(), device, UsbId::guid, GUID, Kb::hwModeCount, KbMode::id(), KbProfile::indexOf(), KbProfile::insert(), modeChanged(), KbProfile::modeCount(), KbProfile::modes(), Ui_KbWidget::modesList, KbMode::newId(), Kb::newMode(), profileChanged(), KbProfile::removeAll(), Kb::setCurrentMode(), and ui.

```
236                                                                    {
237     QListWidgetItem* item = ui->modesList->itemAt(pos);
238     if(!item || !currentMode || item->data(GUID).toUuid() !=
    currentMode->id().guid)
239         return;
240     KbProfile* currentProfile = device->currentProfile();
241     int index = currentProfile->indexOf(currentMode);
242
243     QMenu menu(this);
244     QAction* rename = new QAction("Rename...", this);
245     QAction* duplicate = new QAction("Duplicate", this);
246     QAction* del = new QAction("Delete", this);
247     bool canDelete = (device->currentProfile()->modeCount() >
    device->hwModeCount);
248     if(!canDelete)
249         // Can't delete modes if they're required by hardware
250         del->setEnabled(false);
251     QAction* moveup = new QAction("Move Up", this);
252     if(index == 0)
253         moveup->setEnabled(false);
254     QAction* movedown = new QAction("Move Down", this);
255     if(index >= currentProfile->modeCount() - 1)
256         movedown->setEnabled(false);
257     menu.addAction(rename);
258     menu.addAction(duplicate);
259     menu.addAction(del);
260     menu.addSeparator();
261     menu.addAction(moveup);
262     menu.addAction(movedown);
263     QAction* result = menu.exec(QCursor::pos());
264     if(result == rename){
265         ui->modesList->editItem(item);
266     } else if(result == duplicate){
267         KbMode* newMode = device->newMode(currentMode);
268         newMode->newId();
269         currentProfile->insert(index + 1, newMode);
270         // Update UI
271         profileChanged();
272         device->setCurrentMode(newMode);
273     } else if(result == del){
274         if(!canDelete)
275             return;
276         currentProfile->removeAll(currentMode);
277         currentMode->deleteLater();
```

```
278         currentMode = 0;
279         // Select next mode
280         profileChanged();
281         if(index < currentProfile->modeCount())
282             device->setCurrentMode(currentProfile->modes()[index]);
283         else
284             device->setCurrentMode(currentProfile->modes().last());
285     } else if(result == moveup){
286         currentProfile->removeAll(currentMode);
287         currentProfile->insert(index - 1, currentMode);
288         // Update UI
289         profileChanged();
290         modeChanged(true);
291     } else if(result == movedown){
292         currentProfile->removeAll(currentMode);
293         currentProfile->insert(index + 1, currentMode);
294         // Update UI
295         profileChanged();
296         modeChanged(true);
297     }
298 }
```

Here is the call graph for this function:

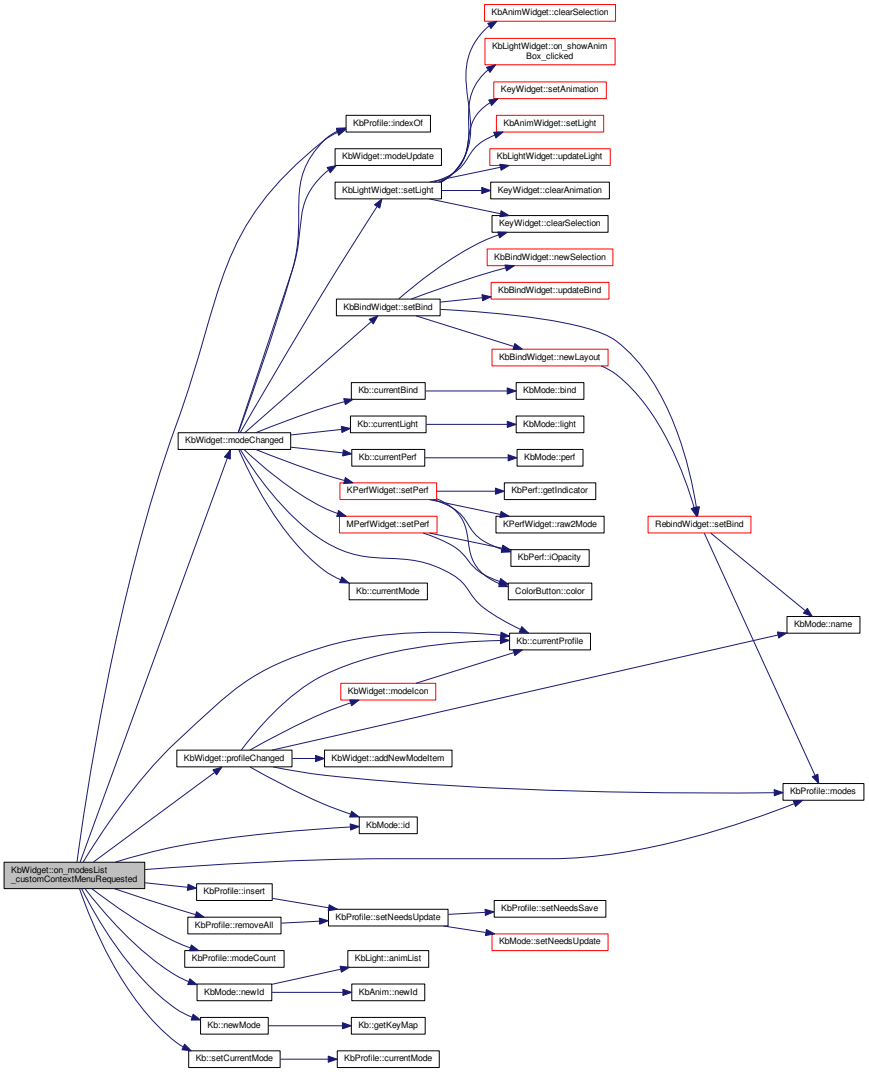

12.38.3.12 void KbWidget::on_modesList_itemChanged (QListWidgetItem * *item*) [private],[slot]

Definition at line 199 of file kbwidget.cpp.

References currentMode, UsbId::guid, GUID, KbMode::id(), and KbMode::name().

```
199                                                         {
200     if(!item || !currentMode || item->data(GUID).toUuid() !=
      currentMode->id().guid)
201         return;
202     currentMode->name(item->text());
203     // Set the text to the actual name (trimmed, "" replaced with "Unnamed")
204     item->setText(currentMode->name());
205 }
```

Here is the call graph for this function:

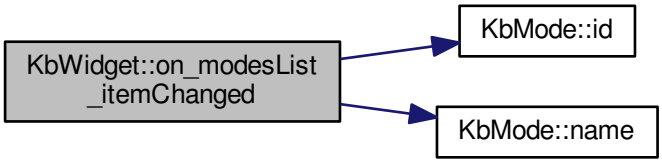

12.38.3.13 void KbWidget::on_modesList_itemClicked (QListWidgetItem * *item*) [private],[slot]

Definition at line 207 of file kbwidget.cpp.

References addNewModeItem(), KbProfile::append(), Kb::currentProfile(), device, UsbId::guid, GUID, KbMode::id(), Ui_KbWidget::modesList, NEW_FLAG, Kb::newMode(), Kb::setCurrentMode(), and ui.

```
207                                                         {
208     QUuid guid = item->data(GUID).toUuid();
209     if(guid.isNull() && item->data(NEW_FLAG).toInt() == 1){
210         // "New mode" item. Clear text and start editing
211         item->setText("");
212         ui->modesList->editItem(item);
213         item->setFlags(item->flags() | Qt::ItemIsEditable | Qt::ItemIsDragEnabled | Qt::ItemIsDropEnabled);
214         QFont font = item->font();
215         font.setItalic(false);
216         item->setFont(font);
217         item->setIcon(QIcon(":/img/icon_mode.png"));
218         // Add the new mode and assign it to this item
219         KbMode* newMode = device->newMode();
220         device->currentProfile()->append(newMode);
221         item->setData(GUID, newMode->id().guid);
222         item->setData(NEW_FLAG, 0);
223         device->setCurrentMode(newMode, false);
224         // Create another "new mode" item to replace this one
225         addNewModeItem();
226     }
227 }
```

Here is the call graph for this function:

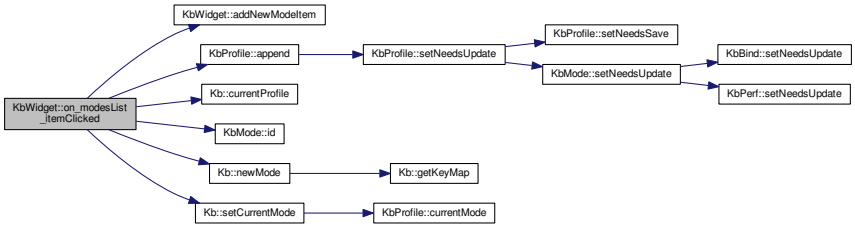

12.38.3.14 void KbWidget::on_profileBox_activated (int *index*) [private], [slot]

Definition at line 113 of file kbwidget.cpp.

References device, Kb::profiles(), Kb::setCurrentProfile(), and updateProfileList().

```
113                                                 {
114     if(index < 0)
115         return;
116     if(index >= device->profiles().count()){
117         // "Manage profiles" option
118         KbProfileDialog dialog(this);
119         dialog.exec();
120         updateProfileList();
121         return;
122     }
123     device->setCurrentProfile(device->profiles()[index]);
124     // Device will emit profileChanged() and modeChanged() signals to update UI
125 }
```

Here is the call graph for this function:

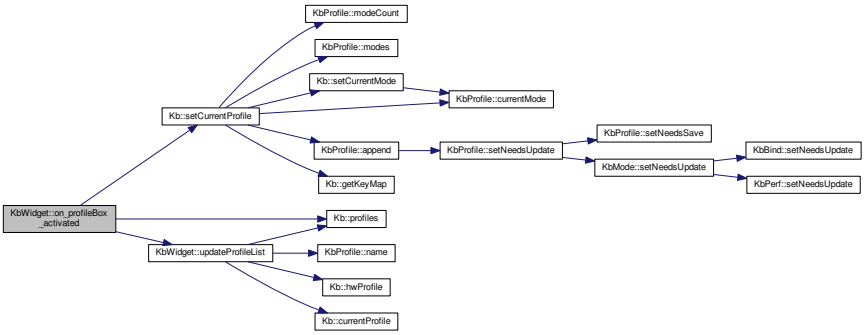

12.38.3.15 void KbWidget::on_tabWidget_currentChanged (int *index*) [private], [slot]

Definition at line 317 of file kbwidget.cpp.

References device, Ui_KbWidget::tabWidget, ui, and updateFwButton().

```
317                                                     {
318     if(!device)
319         return;
320     if(index == ui->tabWidget->count() - 1){
321         // Device tab
```

```
322         updateFwButton();
323     }
324 }
```

Here is the call graph for this function:

12.38.3.16 void KbWidget::profileChanged ( ) [private], [slot]

Definition at line 91 of file kbwidget.cpp.

References addNewModeItem(), currentMode, Kb::currentProfile(), device, UsbId::guid, GUID, KbMode::id(), modeIcon(), KbProfile::modes(), Ui_KbWidget::modesList, KbMode::name(), and ui.

Referenced by KbWidget(), on_hwSaveButton_clicked(), and on_modesList_customContextMenuRequested().

```
91                              {
92     // Rebuild mode list
93     ui->modesList->clear();
94     int i = 0;
95     QListWidgetItem* current = 0;
96     foreach(KbMode* mode, device->currentProfile()->
      modes()){
97         QListWidgetItem* item = new QListWidgetItem(modeIcon(i), mode->
      name(), ui->modesList);
98         item->setData(GUID, mode->id().guid);
99         item->setFlags(item->flags() | Qt::ItemIsEditable);
100         if(mode == currentMode){
101             item->setSelected(true);
102             current = item;
103         }
104         ui->modesList->addItem(item);
105         i++;
106     }
107     if(current)
108         ui->modesList->setCurrentItem(current);
109     addNewModeItem();
110     // Wait for modeChanged() to refresh the rest of the UI
111 }
```

Here is the call graph for this function:

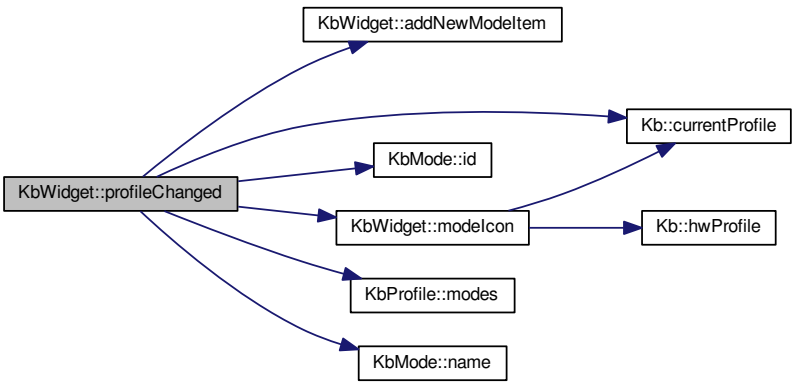

Here is the caller graph for this function:

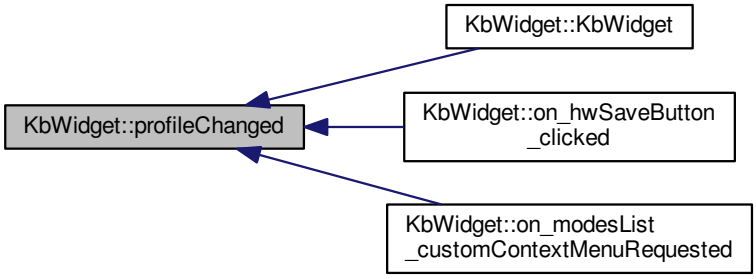

12.38.3.17 void KbWidget::showFirstTab ( ) [slot]

Definition at line 64 of file kbwidget.cpp.

References Ui_KbWidget::tabWidget, and ui.

```
64                              {
65     ui->tabWidget->setCurrentIndex(0);
66 }
```

12.38.3.18 void KbWidget::showFwUpdate ( ) [inline], [slot]

Definition at line 38 of file kbwidget.h.

References on_fwUpdButton_clicked().

Referenced by MainWindow::showFwUpdateNotification().

```
38 { on_fwUpdButton_clicked(); }
```

Here is the call graph for this function:

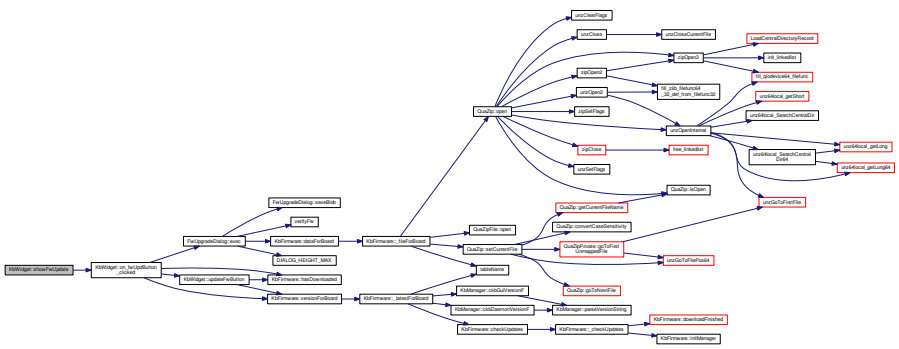

Here is the caller graph for this function:



12.38.3.19 void KbWidget::showLastTab ( ) [slot]

Definition at line 68 of file kbwidget.cpp.

References Ui_KbWidget::tabWidget, and ui.

Referenced by MainWindow::showFwUpdateNotification().

```
68                            {
69     ui->tabWidget->setCurrentIndex(ui->tabWidget->count() - 1);
70 }
```

Here is the caller graph for this function:



12.38.3.20 void KbWidget::updateFwButton ( )

Definition at line 326 of file kbwidget.cpp.

References device, Kb::features, Kb::firmware, Ui_KbWidget::fwUpdButton, KbFirmware::hasDownloaded(), ui, and KbFirmware::versionForBoard().

Referenced by MainWindow::checkFwUpdates(), on_fwUpdButton_clicked(), and on_tabWidget_currentChanged().

```
326                               {
327     if(!KbFirmware::hasDownloaded())
328         ui->fwUpdButton->setText("Check for updates");
329     else {
330         float newVersion = KbFirmware::versionForBoard(
      device->features);
331         float oldVersion = device->firmware.toFloat();
332         if(newVersion <= 0.f || newVersion <= oldVersion)
333             ui->fwUpdButton->setText("Up to date");
334         else
335             ui->fwUpdButton->setText(tr("Upgrade to v%1").arg(QString::number(newVersion, 'f',
       2)));
336     }
337 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

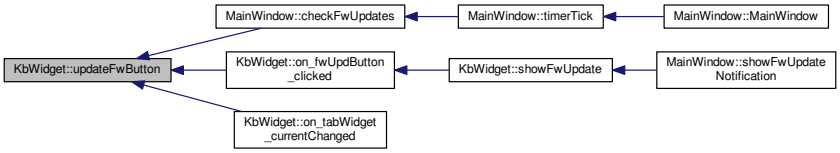

12.38.3.21 void KbWidget::updateProfileList ( ) [private], [slot]

Definition at line 73 of file kbwidget.cpp.

References Kb::currentProfile(), device, Kb::hwProfile(), KbProfile::name(), Ui_KbWidget::profileBox, Kb::profiles(), and ui.

Referenced by KbWidget(), on_hwSaveButton_clicked(), and on_profileBox_activated().

```
73                                {
74     // Clear profile list and rebuild
75     KbProfile* hwProfile = device->hwProfile(), *currentProfile =
       device->currentProfile();
76     ui->profileBox->clear();
77     int i = 0;
78     foreach(KbProfile* profile, device->profiles()){
79         ui->profileBox->addItem((profile == hwProfile) ? QIcon(":/img/icon_profile_hardware.png
       ") : QIcon(":/img/icon_profile.png"),
80                                 profile->name());
81         if(profile == currentProfile)
82             ui->profileBox->setCurrentIndex(i);
83         i++;
84     }
85     ui->profileBox->addItem(QIcon(":/img/icon_blank.png"), "Manage profiles...");
86     QFont font = ui->profileBox->font();
87     font.setItalic(true);
88     ui->profileBox->setItemData(ui->profileBox->count() - 1, font, Qt::FontRole);
89 }
```

Here is the call graph for this function:

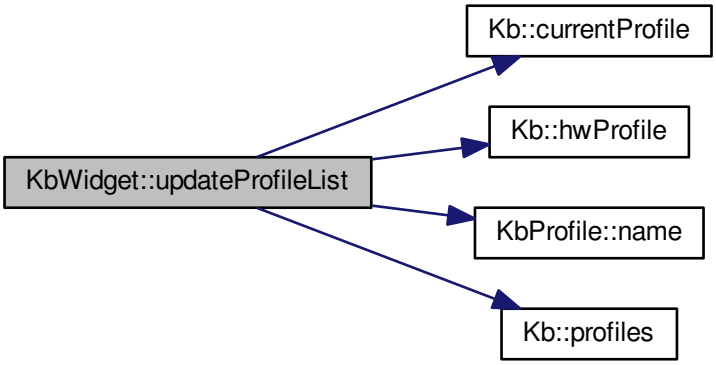

Here is the caller graph for this function:

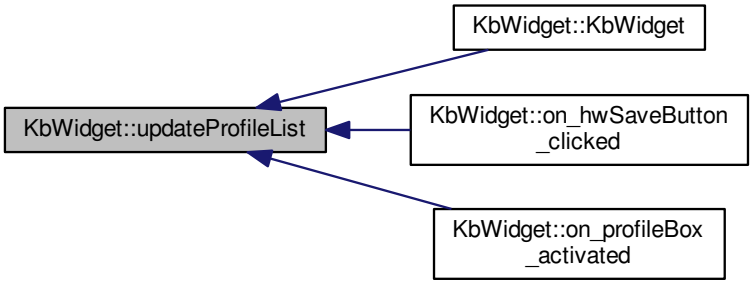

12.38.4 Field Documentation

12.38.4.1 KbMode* KbWidget::currentMode [private]

Definition at line 44 of file kbwidget.h.

Referenced by modeChanged(), on_modesList_customContextMenuRequested(), on_modesList_itemChanged(), and profileChanged().

12.38.4.2 Kb* KbWidget::device

Definition at line 24 of file kbwidget.h.

Referenced by MainWindow::addDevice(), MainWindow::checkFwUpdates(), devUpdate(), KbWidget(), modeChanged(), modeIcon(), modesList_reordered(), name(), on_fwUpdButton_clicked(), on_hwSaveButton_clicked(), on_modesList_currentItemChanged(), on_modesList_customContextMenuRequested(), on_modesList_item-

Clicked(), on_profileBox_activated(), on_tabWidget_currentChanged(), profileChanged(), MainWindow::removeDevice(), MainWindow::showFwUpdateNotification(), updateFwButton(), and updateProfileList().

12.38.4.3 const int KbWidget::GUID = Qt::UserRole [static], [private]

Definition at line 46 of file kbwidget.h.

Referenced by modesList_reordered(), on_modesList_currentItemChanged(), on_modesList_customContextMenuRequested(), on_modesList_itemChanged(), on_modesList_itemClicked(), and profileChanged().

12.38.4.4 bool KbWidget::hasShownNewFW

Definition at line 28 of file kbwidget.h.

Referenced by MainWindow::checkFwUpdates().

12.38.4.5 quint64 KbWidget::lastAutoSave [private]

Definition at line 42 of file kbwidget.h.

12.38.4.6 const int KbWidget::NEW_FLAG = Qt::UserRole + 1 [static], [private]

Definition at line 47 of file kbwidget.h.

Referenced by addNewModeItem(), modesList_reordered(), and on_modesList_itemClicked().

12.38.4.7 Ui::KbWidget* KbWidget::ui [private]

Definition at line 41 of file kbwidget.h.

Referenced by addNewModeItem(), devUpdate(), KbWidget(), modeChanged(), modesList_reordered(), on_fwUpdButton_clicked(), on_modesList_customContextMenuRequested(), on_modesList_itemClicked(), on_tabWidget_currentChanged(), profileChanged(), showFirstTab(), showLastTab(), updateFwButton(), updateProfileList(), and ~KbWidget().

The documentation for this class was generated from the following files:

- src/ckb/kbwidget.h
- src/ckb/kbwidget.cpp

12.39 Ui::KbWidget Class Reference

`#include <src/ckb/ui_kbwidget.h>`

Inheritance diagram for Ui::KbWidget:

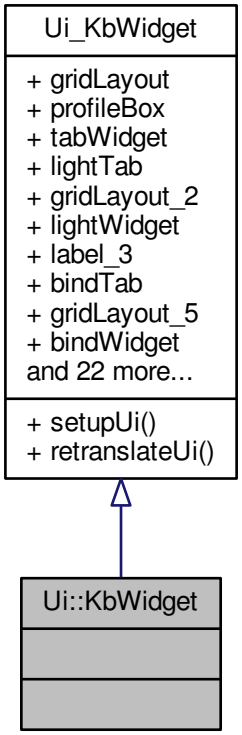

Collaboration diagram for Ui::KbWidget:

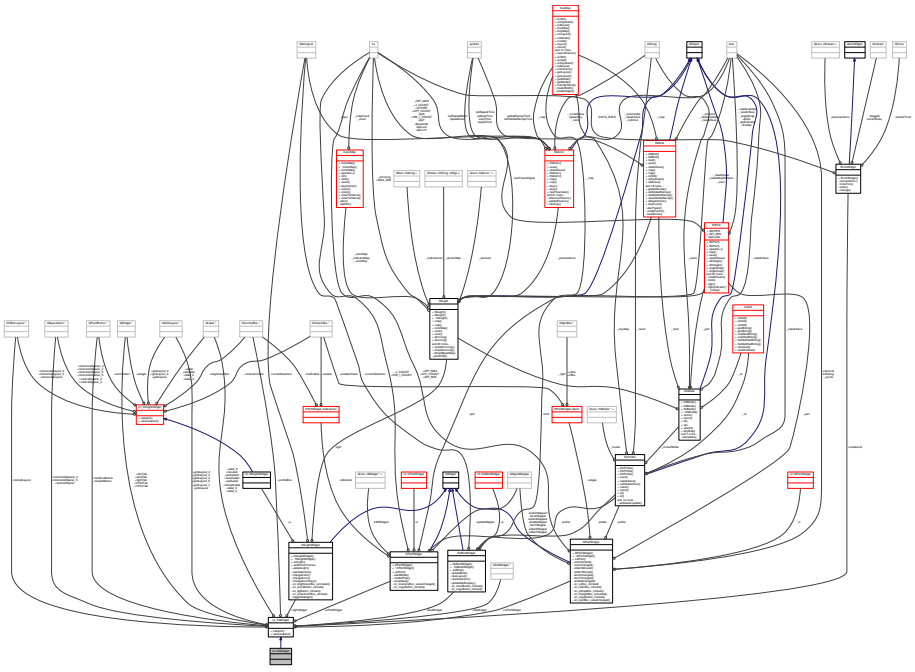

Public Member Functions

- void setupUi (QWidget *KbWidget)
- void retranslateUi (QWidget *KbWidget)

Data Fields

- QGridLayout * gridLayout
- QComboBox * profileBox
- QTabWidget * tabWidget
- QWidget * lightTab
- QGridLayout * gridLayout_2
- KbLightWidget * lightWidget
- QLabel * label_3
- QWidget * bindTab
- QGridLayout * gridLayout_5
- KbBindWidget * bindWidget
- QWidget * kPerfTab
- QGridLayout * gridLayout_4
- KPerfWidget * kPerfWidget
- QWidget * mPerfTab
- QGridLayout * gridLayout_7
- MPerfWidget * mPerfWidget
- QWidget * devTab
- QGridLayout * gridLayout_3
- QLabel * fwUpdLabel
- QSpacerItem * verticalSpacer
- QLabel * fwLabel
- QLabel * label_4
- QSpacerItem * horizontalSpacer_2
- QLabel * label_9
- QLabel * serialLabel
- QHBoxLayout * fwUpdLayout
- QPushButton * fwUpdButton
- QSpacerItem * horizontalSpacer_3
- QLabel * pollLabel2
- QLabel * pollLabel
- RListWidget * modesList
- QPushButton * hwSaveButton

12.39.1 Detailed Description

Definition at line 291 of file ui_kbwidget.h.

12.39.2 Member Function Documentation

12.39.2.1 void Ui_KbWidget::retranslateUi (QWidget * *KbWidget*) [inline], [inherited]

Definition at line 268 of file ui_kbwidget.h.

References Ui_KbWidget::bindTab, Ui_KbWidget::devTab, Ui_KbWidget::fwLabel, Ui_KbWidget::fwUpdButton, Ui_KbWidget::fwUpdLabel, Ui_KbWidget::hwSaveButton, Ui_KbWidget::kPerfTab, Ui_KbWidget::label_3, Ui_KbWidget::label_4, Ui_KbWidget::label_9, Ui_KbWidget::lightTab, Ui_KbWidget::mPerfTab, Ui_KbWidget::pollLabel, Ui_KbWidget::pollLabel2, Ui_KbWidget::serialLabel, and Ui_KbWidget::tabWidget.

Referenced by Ui_KbWidget::setupUi().

```
269     {
270         KbWidget->setWindowTitle(QApplication::translate("KbWidget", "Form", Q_NULLPTR));
271         label_3->setText(QApplication::translate("KbWidget", "Tip: Drag+drop items to reorder.
     Right-click for menu.", Q_NULLPTR));
272         tabWidget->setTabText(tabWidget->indexOf(lightTab),
    QApplication::translate("KbWidget", "Lighting", Q_NULLPTR));
273         tabWidget->setTabText(tabWidget->indexOf(bindTab), QApplication::translate
    ("KbWidget", "Binding", Q_NULLPTR));
274         tabWidget->setTabText(tabWidget->indexOf(kPerfTab),
    QApplication::translate("KbWidget", "Performance", Q_NULLPTR));
275         tabWidget->setTabText(tabWidget->indexOf(mPerfTab),
    QApplication::translate("KbWidget", "Performance", Q_NULLPTR));
276         fwUpdLabel->setText(QApplication::translate("KbWidget", "Status:", Q_NULLPTR));
277         fwLabel->setText(QApplication::translate("KbWidget", "N/A", Q_NULLPTR));
278         label_4->setText(QApplication::translate("KbWidget", "USB device ID:", Q_NULLPTR));
279         label_9->setText(QApplication::translate("KbWidget", "Firmware version:", Q_NULLPTR));
280         serialLabel->setText(QApplication::translate("KbWidget", "N/A", Q_NULLPTR));
281         fwUpdButton->setText(QApplication::translate("KbWidget", "Check for updates", Q_NULLPTR)
    );
282         pollLabel2->setText(QApplication::translate("KbWidget", "Poll rate:", Q_NULLPTR));
283         pollLabel->setText(QApplication::translate("KbWidget", "N/A", Q_NULLPTR));
284         tabWidget->setTabText(tabWidget->indexOf(devTab), QApplication::translate("
    KbWidget", "Device", Q_NULLPTR));
285         hwSaveButton->setText(QApplication::translate("KbWidget", "Save to hardware", Q_NULLPTR
    ));
286     } // retranslateUi
```

Here is the caller graph for this function:



12.39.2.2 void Ui_KbWidget::setupUi (QWidget * *KbWidget*) [inline], [inherited]

Definition at line 69 of file ui_kbwidget.h.

References Ui_KbWidget::bindTab, Ui_KbWidget::bindWidget, Ui_KbWidget::devTab, Ui_KbWidget::fwLabel, Ui_KbWidget::fwUpdButton, Ui_KbWidget::fwUpdLabel, Ui_KbWidget::fwUpdLayout, Ui_KbWidget::gridLayout, Ui_KbWidget::gridLayout_2, Ui_KbWidget::gridLayout_3, Ui_KbWidget::gridLayout_4, Ui_KbWidget::gridLayout_5, Ui_KbWidget::gridLayout_7, Ui_KbWidget::horizontalSpacer_2, Ui_KbWidget::horizontalSpacer_3, Ui_KbWidget::hwSaveButton, Ui_KbWidget::kPerfTab, Ui_KbWidget::kPerfWidget, Ui_KbWidget::label_3, Ui_KbWidget::label_4, Ui_KbWidget::label_9, Ui_KbWidget::lightTab, Ui_KbWidget::lightWidget, Ui_KbWidget::modesList, Ui_KbWidget::mPerfTab, Ui_KbWidget::mPerfWidget, Ui_KbWidget::pollLabel, Ui_KbWidget::pollLabel2, Ui_KbWidget::profileBox, Ui_KbWidget::retranslateUi(), Ui_KbWidget::serialLabel, Ui_KbWidget::tabWidget, and Ui_KbWidget::verticalSpacer.

Referenced by KbWidget::KbWidget().

```
70     {
71         if (KbWidget->objectName().isEmpty())
72             KbWidget->setObjectName(QStringLiteral("KbWidget"));
73         KbWidget->resize(773, 539);
74         gridLayout = new QGridLayout(KbWidget);
75         gridLayout->setSpacing(9);
76         gridLayout->setObjectName(QStringLiteral("gridLayout"));
77         gridLayout->setContentsMargins(9, -1, 9, 9);
78         profileBox = new QComboBox(KbWidget);
79         profileBox->setObjectName(QStringLiteral("profileBox"));
80         QSizePolicy sizePolicy(QSizePolicy::Preferred, QSizePolicy::Fixed);
81         sizePolicy.setHorizontalStretch(18);
82         sizePolicy.setVerticalStretch(0);
83         sizePolicy.setHeightForWidth(profileBox->sizePolicy().hasHeightForWidth());
84         profileBox->setSizePolicy(sizePolicy);
85         profileBox->setIconSize(QSize(24, 24));
86
87         gridLayout->addWidget(profileBox, 0, 0, 1, 1);
88
```

```
89          tabWidget = new QTabWidget(KbWidget);
90          tabWidget->setObjectName(QStringLiteral("tabWidget"));
91          QSizePolicy sizePolicy1(QSizePolicy::Expanding, QSizePolicy::Expanding);
92          sizePolicy1.setHorizontalStretch(82);
93          sizePolicy1.setVerticalStretch(0);
94          sizePolicy1.setHeightForWidth(tabWidget->sizePolicy().hasHeightForWidth());
95          tabWidget->setSizePolicy(sizePolicy1);
96          lightTab = new QWidget();
97          lightTab->setObjectName(QStringLiteral("lightTab"));
98          gridLayout_2 = new QGridLayout(lightTab);
99          gridLayout_2->setObjectName(QStringLiteral("gridLayout_2"));
100          gridLayout_2->setHorizontalSpacing(0);
101          gridLayout_2->setVerticalSpacing(6);
102          gridLayout_2->setContentsMargins(6, 6, 6, 6);
103          lightWidget = new KbLightWidget(lightTab);
104          lightWidget->setObjectName(QStringLiteral("lightWidget"));
105          QSizePolicy sizePolicy2(QSizePolicy::Preferred, QSizePolicy::Expanding);
106          sizePolicy2.setHorizontalStretch(0);
107          sizePolicy2.setVerticalStretch(0);
108          sizePolicy2.setHeightForWidth(lightWidget->sizePolicy().hasHeightForWidth());
109          lightWidget->setSizePolicy(sizePolicy2);
110
111          gridLayout_2->addWidget(lightWidget, 0, 0, 1, 1);
112
113          label_3 = new QLabel(lightTab);
114          label_3->setObjectName(QStringLiteral("label_3"));
115          QSizePolicy sizePolicy3(QSizePolicy::Preferred, QSizePolicy::Minimum);
116          sizePolicy3.setHorizontalStretch(0);
117          sizePolicy3.setVerticalStretch(0);
118          sizePolicy3.setHeightForWidth(label_3->sizePolicy().hasHeightForWidth());
119          label_3->setSizePolicy(sizePolicy3);
120
121          gridLayout_2->addWidget(label_3, 1, 0, 1, 1);
122
123          tabWidget->addTab(lightTab, QString());
124          bindTab = new QWidget();
125          bindTab->setObjectName(QStringLiteral("bindTab"));
126          gridLayout_5 = new QGridLayout(bindTab);
127          gridLayout_5->setSpacing(0);
128          gridLayout_5->setObjectName(QStringLiteral("gridLayout_5"));
129          gridLayout_5->setContentsMargins(6, 6, 6, 6);
130          bindWidget = new KbBindWidget(bindTab);
131          bindWidget->setObjectName(QStringLiteral("bindWidget"));
132          sizePolicy2.setHeightForWidth(bindWidget->sizePolicy().hasHeightForWidth());
133          bindWidget->setSizePolicy(sizePolicy2);
134
135          gridLayout_5->addWidget(bindWidget, 0, 0, 1, 1);
136
137          tabWidget->addTab(bindTab, QString());
138          kPerfTab = new QWidget();
139          kPerfTab->setObjectName(QStringLiteral("kPerfTab"));
140          gridLayout_4 = new QGridLayout(kPerfTab);
141          gridLayout_4->setObjectName(QStringLiteral("gridLayout_4"));
142          gridLayout_4->setContentsMargins(6, 6, 6, 6);
143          kPerfWidget = new KPerfWidget(kPerfTab);
144          kPerfWidget->setObjectName(QStringLiteral("kPerfWidget"));
145
146          gridLayout_4->addWidget(kPerfWidget, 0, 0, 1, 1);
147
148          tabWidget->addTab(kPerfTab, QString());
149          mPerfTab = new QWidget();
150          mPerfTab->setObjectName(QStringLiteral("mPerfTab"));
151          gridLayout_7 = new QGridLayout(mPerfTab);
152          gridLayout_7->setObjectName(QStringLiteral("gridLayout_7"));
153          gridLayout_7->setContentsMargins(6, 6, 6, 6);
154          mPerfWidget = new MPerfWidget(mPerfTab);
155          mPerfWidget->setObjectName(QStringLiteral("mPerfWidget"));
156
157          gridLayout_7->addWidget(mPerfWidget, 0, 0, 1, 1);
158
159          tabWidget->addTab(mPerfTab, QString());
160          devTab = new QWidget();
161          devTab->setObjectName(QStringLiteral("devTab"));
162          gridLayout_3 = new QGridLayout(devTab);
163          gridLayout_3->setObjectName(QStringLiteral("gridLayout_3"));
164          gridLayout_3->setContentsMargins(6, 6, 6, 6);
165          fwUpdLabel = new QLabel(devTab);
166          fwUpdLabel->setObjectName(QStringLiteral("fwUpdLabel"));
167          fwUpdLabel->setMinimumSize(QSize(0, 34));
168
169          gridLayout_3->addWidget(fwUpdLabel, 4, 0, 1, 1);
170
171          verticalSpacer = new QSpacerItem(20, 40, QSizePolicy::Minimum, QSizePolicy::Expanding
    );
172
173          gridLayout_3->addItem(verticalSpacer, 6, 2, 1, 1);
174
```

```
175         fwLabel = new QLabel(devTab);
176         fwLabel->setObjectName(QStringLiteral("fwLabel"));
177         fwLabel->setCursor(QCursor(Qt::IBeamCursor));
178         fwLabel->setTextInteractionFlags(Qt::LinksAccessibleByMouse|Qt::TextSelectableByMouse);
179 
180         gridLayout_3->addWidget(fwLabel, 2, 2, 1, 1);
181 
182         label_4 = new QLabel(devTab);
183         label_4->setObjectName(QStringLiteral("label_4"));
184         label_4->setMinimumSize(QSize(0, 34));
185 
186         gridLayout_3->addWidget(label_4, 0, 0, 1, 1);
187 
188         horizontalSpacer_2 = new QSpacerItem(40, 1, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
189 
190         gridLayout_3->addItem(horizontalSpacer_2, 2, 1, 1, 1);
191 
192         label_9 = new QLabel(devTab);
193         label_9->setObjectName(QStringLiteral("label_9"));
194         label_9->setMinimumSize(QSize(0, 34));
195 
196         gridLayout_3->addWidget(label_9, 2, 0, 1, 1);
197 
198         serialLabel = new QLabel(devTab);
199         serialLabel->setObjectName(QStringLiteral("serialLabel"));
200         serialLabel->setCursor(QCursor(Qt::IBeamCursor));
201         serialLabel->setTextInteractionFlags(Qt::LinksAccessibleByMouse|
    Qt::TextSelectableByMouse);
202 
203         gridLayout_3->addWidget(serialLabel, 0, 2, 1, 1);
204 
205         fwUpdLayout = new QHBoxLayout();
206         fwUpdLayout->setObjectName(QStringLiteral("fwUpdLayout"));
207         fwUpdButton = new QPushButton(devTab);
208         fwUpdButton->setObjectName(QStringLiteral("fwUpdButton"));
209 
210         fwUpdLayout->addWidget(fwUpdButton);
211 
212         horizontalSpacer_3 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
213 
214         fwUpdLayout->addItem(horizontalSpacer_3);
215 
216 
217         gridLayout_3->addLayout(fwUpdLayout, 4, 2, 1, 1);
218 
219         pollLabel2 = new QLabel(devTab);
220         pollLabel2->setObjectName(QStringLiteral("pollLabel2"));
221         pollLabel2->setMinimumSize(QSize(0, 34));
222 
223         gridLayout_3->addWidget(pollLabel2, 1, 0, 1, 1);
224 
225         pollLabel = new QLabel(devTab);
226         pollLabel->setObjectName(QStringLiteral("pollLabel"));
227 
228         gridLayout_3->addWidget(pollLabel, 1, 2, 1, 1);
229 
230         tabWidget->addTab(devTab, QString());
231 
232         gridLayout->addWidget(tabWidget, 0, 1, 3, 1);
233 
234         modesList = new RListWidget(KbWidget);
235         modesList->setObjectName(QStringLiteral("modesList"));
236         QSizePolicy sizePolicy4(QSizePolicy::Expanding, QSizePolicy::Expanding);
237         sizePolicy4.setHorizontalStretch(18);
238         sizePolicy4.setVerticalStretch(0);
239         sizePolicy4.setHeightForWidth(modesList->sizePolicy().hasHeightForWidth());
240         modesList->setSizePolicy(sizePolicy4);
241         modesList->setContextMenuPolicy(Qt::CustomContextMenu);
242         modesList->setFrameShadow(QFrame::Plain);
243         modesList->setDragDropMode(QAbstractItemView::InternalMove);
244         modesList->setIconSize(QSize(24, 24));
245         modesList->setMovement(QListView::Snap);
246 
247         gridLayout->addWidget(modesList, 1, 0, 1, 1);
248 
249         hwSaveButton = new QPushButton(KbWidget);
250         hwSaveButton->setObjectName(QStringLiteral("hwSaveButton"));
251         QSizePolicy sizePolicy5(QSizePolicy::Minimum, QSizePolicy::Fixed);
252         sizePolicy5.setHorizontalStretch(18);
253         sizePolicy5.setVerticalStretch(0);
254         sizePolicy5.setHeightForWidth(hwSaveButton->sizePolicy().hasHeightForWidth());
255         hwSaveButton->setSizePolicy(sizePolicy5);
256 
257         gridLayout->addWidget(hwSaveButton, 2, 0, 1, 1);
258 
```

```
259
260         retranslateUi(KbWidget);
261
262         tabWidget->setCurrentIndex(0);
263
264
265         QMetaObject::connectSlotsByName(KbWidget);
266     } // setupUi
```

Here is the call graph for this function:



Here is the caller graph for this function:

12.39.3 Field Documentation

12.39.3.1 QWidget* Ui_KbWidget::bindTab [inherited]

Definition at line 43 of file ui_kbwidget.h.

Referenced by Ui_KbWidget::retranslateUi(), and Ui_KbWidget::setupUi().

12.39.3.2 KbBindWidget* Ui_KbWidget::bindWidget [inherited]

Definition at line 45 of file ui_kbwidget.h.

Referenced by KbWidget::modeChanged(), and Ui_KbWidget::setupUi().

12.39.3.3 QWidget* Ui_KbWidget::devTab [inherited]

Definition at line 52 of file ui_kbwidget.h.

Referenced by Ui_KbWidget::retranslateUi(), and Ui_KbWidget::setupUi().

12.39.3.4 QLabel* Ui_KbWidget::fwLabel [inherited]

Definition at line 56 of file ui_kbwidget.h.

Referenced by KbWidget::devUpdate(), Ui_KbWidget::retranslateUi(), and Ui_KbWidget::setupUi().

12.39.3.5 QPushButton* Ui_KbWidget::fwUpdButton [inherited]

Definition at line 62 of file ui_kbwidget.h.

Referenced by KbWidget::KbWidget(), KbWidget::on_fwUpdButton_clicked(), Ui_KbWidget::retranslateUi(), Ui_KbWidget::setupUi(), and KbWidget::updateFwButton().

12.39.3.6 QLabel* Ui_KbWidget::fwUpdLabel [inherited]

Definition at line 54 of file ui_kbwidget.h.

Referenced by KbWidget::KbWidget(), Ui_KbWidget::retranslateUi(), and Ui_KbWidget::setupUi().

12.39.3.7 QHBoxLayout* Ui_KbWidget::fwUpdLayout [inherited]

Definition at line 61 of file ui_kbwidget.h.

Referenced by KbWidget::KbWidget(), and Ui_KbWidget::setupUi().

12.39.3.8 QGridLayout* Ui_KbWidget::gridLayout [inherited]

Definition at line 36 of file ui_kbwidget.h.

Referenced by Ui_KbWidget::setupUi().

12.39.3.9 QGridLayout* Ui_KbWidget::gridLayout_2 [inherited]

Definition at line 40 of file ui_kbwidget.h.

Referenced by Ui_KbWidget::setupUi().

12.39.3.10 QGridLayout* Ui_KbWidget::gridLayout_3 [inherited]

Definition at line 53 of file ui_kbwidget.h.

Referenced by Ui_KbWidget::setupUi().

12.39.3.11 QGridLayout* Ui_KbWidget::gridLayout_4 [inherited]

Definition at line 47 of file ui_kbwidget.h.

Referenced by Ui_KbWidget::setupUi().

12.39.3.12 QGridLayout* Ui_KbWidget::gridLayout_5 [inherited]

Definition at line 44 of file ui_kbwidget.h.

Referenced by Ui_KbWidget::setupUi().

12.39.3.13 QGridLayout* Ui_KbWidget::gridLayout_7 [inherited]

Definition at line 50 of file ui_kbwidget.h.

Referenced by Ui_KbWidget::setupUi().

12.39.3.14 QSpacerItem* Ui_KbWidget::horizontalSpacer_2 [inherited]

Definition at line 58 of file ui_kbwidget.h.

Referenced by Ui_KbWidget::setupUi().

12.39.3.15 QSpacerItem* Ui_KbWidget::horizontalSpacer_3 [inherited]

Definition at line 63 of file ui_kbwidget.h.

Referenced by Ui_KbWidget::setupUi().

12.39.3.16 QPushButton* Ui_KbWidget::hwSaveButton [inherited]

Definition at line 67 of file ui_kbwidget.h.

Referenced by Ui_KbWidget::retranslateUi(), and Ui_KbWidget::setupUi().

12.39.3.17 QWidget* Ui_KbWidget::kPerfTab [inherited]

Definition at line 46 of file ui_kbwidget.h.

Referenced by KbWidget::KbWidget(), Ui_KbWidget::retranslateUi(), and Ui_KbWidget::setupUi().

12.39.3.18 KPerfWidget* Ui_KbWidget::kPerfWidget [inherited]

Definition at line 48 of file ui_kbwidget.h.

Referenced by KbWidget::modeChanged(), and Ui_KbWidget::setupUi().

12.39.3.19 QLabel* Ui_KbWidget::label_3 [inherited]

Definition at line 42 of file ui_kbwidget.h.

Referenced by Ui_KbWidget::retranslateUi(), and Ui_KbWidget::setupUi().

12.39.3.20 QLabel* Ui_KbWidget::label_4 [inherited]

Definition at line 57 of file ui_kbwidget.h.

Referenced by Ui_KbWidget::retranslateUi(), and Ui_KbWidget::setupUi().

12.39.3.21 QLabel* Ui_KbWidget::label_9 [inherited]

Definition at line 59 of file ui_kbwidget.h.

Referenced by Ui_KbWidget::retranslateUi(), and Ui_KbWidget::setupUi().

12.39.3.22 QWidget* Ui_KbWidget::lightTab [inherited]

Definition at line 39 of file ui_kbwidget.h.

Referenced by KbWidget::KbWidget(), Ui_KbWidget::retranslateUi(), and Ui_KbWidget::setupUi().

12.39.3.23 KbLightWidget* Ui_KbWidget::lightWidget [inherited]

Definition at line 41 of file ui_kbwidget.h.

Referenced by KbWidget::KbWidget(), KbWidget::modeChanged(), and Ui_KbWidget::setupUi().

12.39.3.24 RListWidget* Ui_KbWidget::modesList [inherited]

Definition at line 66 of file ui_kbwidget.h.

Referenced by KbWidget::addNewModeItem(), KbWidget::KbWidget(), KbWidget::modeChanged(), KbWidget::modesList_reordered(), KbWidget::on_modesList_customContextMenuRequested(), KbWidget::on_modesList_itemClicked(), KbWidget::profileChanged(), and Ui_KbWidget::setupUi().

12.39.3.25 QWidget* Ui_KbWidget::mPerfTab [inherited]

Definition at line 49 of file ui_kbwidget.h.

Referenced by KbWidget::KbWidget(), Ui_KbWidget::retranslateUi(), and Ui_KbWidget::setupUi().

12.39.3.26 MPerfWidget* Ui_KbWidget::mPerfWidget [inherited]

Definition at line 51 of file ui_kbwidget.h.

Referenced by KbWidget::modeChanged(), and Ui_KbWidget::setupUi().

12.39.3.27 QLabel* Ui_KbWidget::pollLabel [inherited]

Definition at line 65 of file ui_kbwidget.h.

Referenced by KbWidget::devUpdate(), KbWidget::KbWidget(), Ui_KbWidget::retranslateUi(), and Ui_KbWidget::setupUi().

12.39.3.28 QLabel* Ui_KbWidget::pollLabel2 [inherited]

Definition at line 64 of file ui_kbwidget.h.

Referenced by KbWidget::KbWidget(), Ui_KbWidget::retranslateUi(), and Ui_KbWidget::setupUi().

12.39.3.29 QComboBox* Ui_KbWidget::profileBox [inherited]

Definition at line 37 of file ui_kbwidget.h.

Referenced by Ui_KbWidget::setupUi(), and KbWidget::updateProfileList().

12.39.3.30 QLabel* Ui_KbWidget::serialLabel [inherited]

Definition at line 60 of file ui_kbwidget.h.

Referenced by KbWidget::devUpdate(), Ui_KbWidget::retranslateUi(), and Ui_KbWidget::setupUi().

12.39.3.31 QTabWidget* Ui_KbWidget::tabWidget [inherited]

Definition at line 38 of file ui_kbwidget.h.

Referenced by KbWidget::KbWidget(), KbWidget::on_tabWidget_currentChanged(), Ui_KbWidget::retranslateUi(), Ui_KbWidget::setupUi(), KbWidget::showFirstTab(), and KbWidget::showLastTab().

12.39.3.32 QSpacerItem* Ui_KbWidget::verticalSpacer [inherited]

Definition at line 55 of file ui_kbwidget.h.

Referenced by Ui_KbWidget::setupUi().

The documentation for this class was generated from the following file:

- src/ckb/ui_kbwidget.h

12.40 Key Struct Reference

`#include <src/ckb/keymap.h>`

Collaboration diagram for Key:

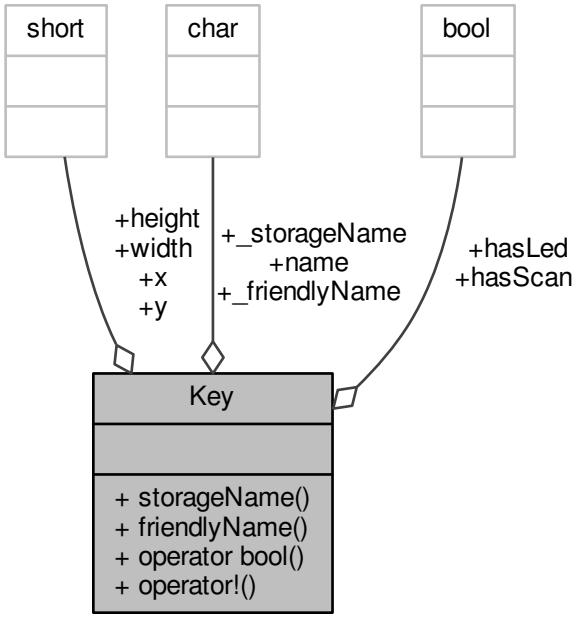

Public Member Functions

- const char * storageName () const
- QString friendlyName (bool os=true) const
- operator bool () const
- bool operator! () const

Data Fields

- const char * _storageName
- const char * _friendlyName
- const char * name

- short x
- short y
- short width
- short height
- bool hasLed
- bool hasScan

12.40.1 Detailed Description

Definition at line 8 of file keymap.h.

12.40.2 Member Function Documentation

12.40.2.1 QString Key::friendlyName (bool *os* = `true`) const [inline]

Definition at line 23 of file keymap.h.

References _friendlyName, and name.

Referenced by KbBind::friendlyName(), KeyWidget::mouseMoveEvent(), KeyWidget::paintEvent(), RebindWidget::setBind(), and KbBindWidget::updateSelDisplay().

```
23                                                      {
24         if(os){
25 #ifdef Q_OS_MACX
26             if(!strcmp(name, "lwin")) return "Left Cmd";
27             if(!strcmp(name, "rwin")) return "Right Cmd";
28             if(!strcmp(name, "lalt")) return "Left Option";
29             if(!strcmp(name, "ralt")) return "Right Option";
30             if(!strcmp(name, "prtscn")) return "F13";
31             if(!strcmp(name, "scroll")) return "F14";
32             if(!strcmp(name, "pause")) return "F15";
33             if(!strcmp(name, "ins")) return "Help";
34             if(!strcmp(name, "numlock")) return "Clear";
35 #elif defined(Q_OS_LINUX)
36             if(!strcmp(name, "lwin")) return "Left Super";
37             if(!strcmp(name, "rwin")) return "Right Super";
38 #endif
39         }
40         return _friendlyName ? _friendlyName : QString(
      name).toUpper();
41     }
```

Here is the caller graph for this function:

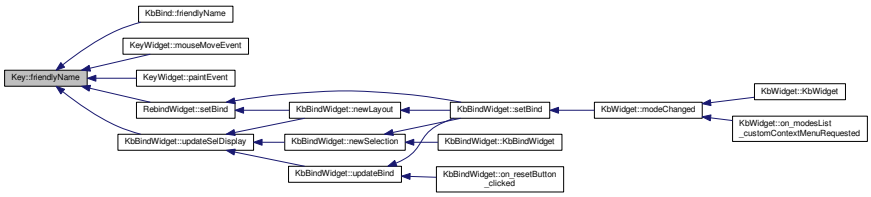

12.40.2.2 Key::operator bool ( ) const [inline]

Definition at line 44 of file keymap.h.

References name.

```
44 { return name != 0; }
```

12.40.2.3 bool Key::operator! ( ) const [inline]

Definition at line 45 of file keymap.h.

```
45 { return !(bool)*this; }
```

12.40.2.4 const char* Key::storageName ( ) const [inline]

Definition at line 11 of file keymap.h.

References _storageName, and name.

Referenced by KeyMap::toStorage().

```
11 { return _storageName ? _storageName : name; }
```

Here is the caller graph for this function:

12.40.3 Field Documentation

12.40.3.1 const char* Key::_friendlyName

Definition at line 13 of file keymap.h.

Referenced by _patch(), and friendlyName().

12.40.3.2 const char* Key::_storageName

Definition at line 10 of file keymap.h.

Referenced by _patch(), and storageName().

12.40.3.3 bool Key::hasLed

Definition at line 19 of file keymap.h.

Referenced by ColorMap::init(), KeyWidget::mouseMoveEvent(), KeyWidget::mousePressEvent(), KeyWidget::paintEvent(), and KeyWidget::selectAll().

12.40.3.4 bool Key::hasScan

Definition at line 20 of file keymap.h.

Referenced by KeyWidget::mouseMoveEvent(), KeyWidget::mousePressEvent(), KeyWidget::paintEvent(), and KeyWidget::selectAll().

12.40.3.5 short Key::height

Definition at line 17 of file keymap.h.

Referenced by getMap(), KeyWidget::mouseMoveEvent(), KeyWidget::mousePressEvent(), KeyWidget::paintEvent(), and patchANSI().

12.40.3.6 const char* Key::name

Definition at line 14 of file keymap.h.

Referenced by friendlyName(), ColorMap::init(), KeyWidget::mouseMoveEvent(), KeyWidget::mousePressEvent(), operator bool(), KeyWidget::paintEvent(), KeyWidget::selectAll(), and storageName().

12.40.3.7 short Key::width

Definition at line 17 of file keymap.h.

Referenced by getMap(), KeyWidget::mouseMoveEvent(), KeyWidget::mousePressEvent(), KeyWidget::paintEvent(), and patchANSI().

12.40.3.8 short Key::x

Definition at line 16 of file keymap.h.

Referenced by AnimScript::begin(), KeyMap::byPosition(), getMap(), AnimScript::keypress(), KeyWidget::mouseMoveEvent(), KeyWidget::mousePressEvent(), KeyWidget::paintEvent(), and patchANSI().

12.40.3.9 short Key::y

Definition at line 16 of file keymap.h.

Referenced by AnimScript::begin(), KeyMap::byPosition(), getMap(), AnimScript::keypress(), KeyWidget::mouseMoveEvent(), KeyWidget::mousePressEvent(), KeyWidget::paintEvent(), and patchANSI().

The documentation for this struct was generated from the following file:

- src/ckb/keymap.h

12.41 KeyAction Class Reference

`#include <src/ckb/keyaction.h>`

Inheritance diagram for KeyAction:

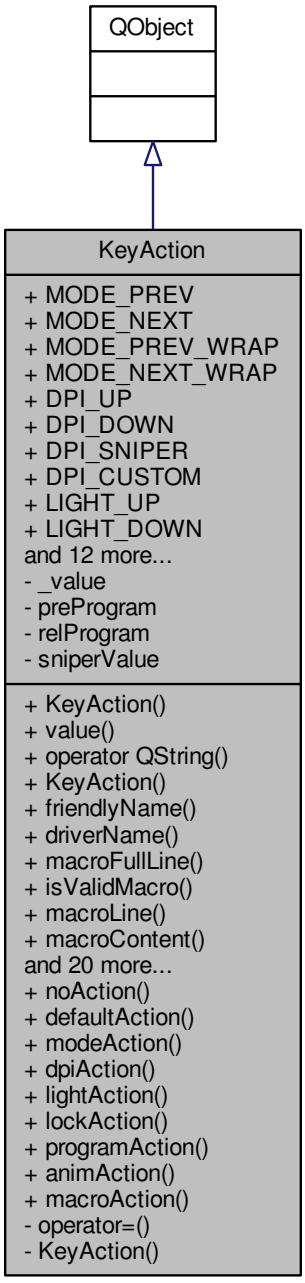

Collaboration diagram for KeyAction:

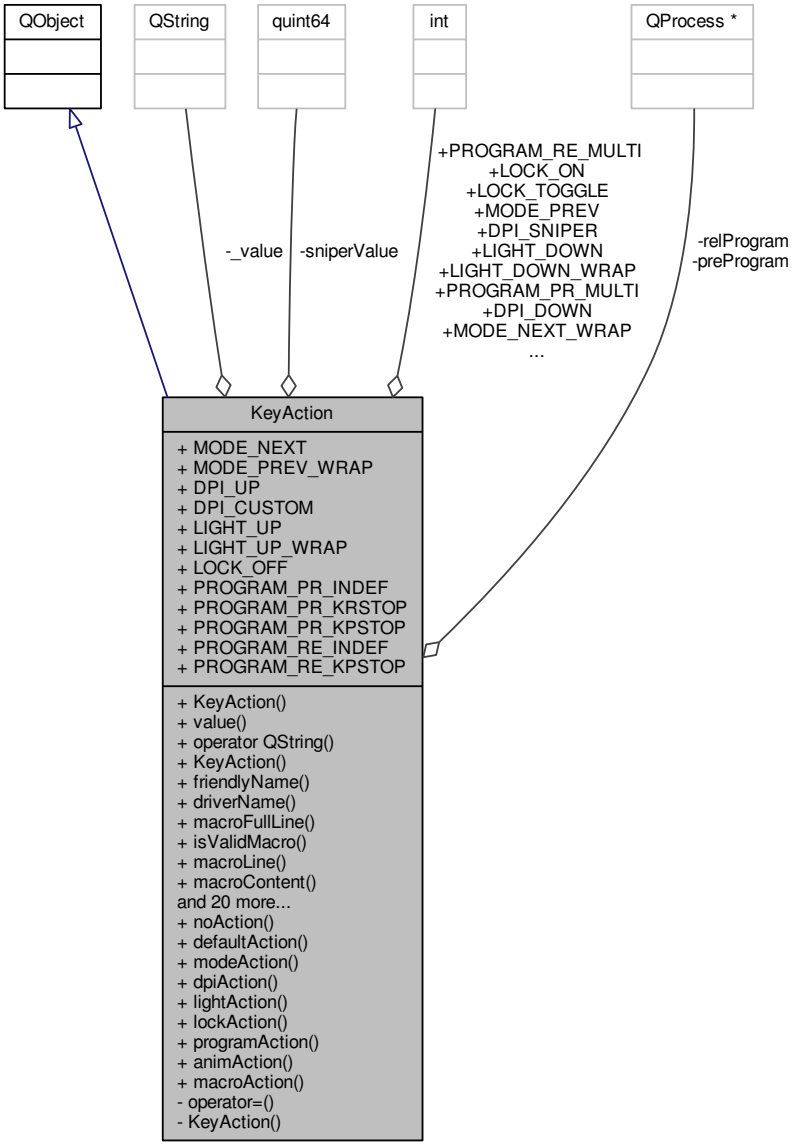

Public Types

- enum Type { UNBOUND, NORMAL, SPECIAL }

Public Member Functions

- KeyAction (const QString &action, QObject *parent=0)
- QString value () const
- operator QString () const
- KeyAction (QObject *parent=0)
- QString friendlyName (const KeyMap &map) const
- QString driverName () const

- QString macroFullLine () const

  macroFullLine If a macro command and a macro definition exists for the given key, returns the complete string except the leading "$" (the $ may confuse some caller).

- bool isValidMacro () const

  isValidMacro checks whether a keyAction contains a valid macro. This is done easily: If the macro action starts with $macro: and has five elements, delimited by ":", we may assume, that is a structural correct macro action. If it has 4 entries only, it is an older definition and ok also.

- QStringList macroLine () const

  macroLine returns all interresting content for a macro definition.

- QString macroContent () const

  macroContent returns the macro key definition only (the second part of the macro action).

- QString macroTiming () const

  macroTiming returns the macro key definition with original timing infos (the fifth and up to now last part of the macro action). If the implementation does not know anything about delays and has no 5th part, return first part.

- void macroDisplay ()

  Debug output for invalid macro Definitions.

- Type type () const
- bool isUnbound () const
- bool isNormal () const
- bool isSpecial () const
- bool isMedia () const
- bool isProgram () const
- bool isAnim () const
- bool isMacro () const
- bool isDPI () const
- bool isMouse () const
- QString specialInfo (int &parameter) const
- int programInfo (QString &onPress, QString &onRelease) const
- int dpiInfo (QPoint &custom) const
- QUuid animInfo (bool &onlyOnce, bool &stopOnRelease) const
- void keyEvent (KbBind *bind, bool down)
- void keyRelease (KbBind *bind)
- void adjustDisplay ()
- ~KeyAction ()

Static Public Member Functions

- static QString noAction ()
- static QString defaultAction (const QString &key)
- static QString modeAction (int mode)
- static QString dpiAction (int level, int customX=0, int customY=0)
- static QString lightAction (int type=LIGHT_UP_WRAP)
- static QString lockAction (int type=LOCK_TOGGLE)
- static QString programAction (const QString &onPress, const QString &onRelease, int stop)
- static QString animAction (const QUuid &guid, bool onlyOnce, bool stopOnRelease)
- static QString macroAction (QString macroDef)

  well documented in cpp file

Static Public Attributes

- static const int MODE_PREV = -2
- static const int MODE_NEXT = -1
- static const int MODE_PREV_WRAP = -4
- static const int MODE_NEXT_WRAP = -3
- static const int DPI_UP = -2
- static const int DPI_DOWN = -1
- static const int DPI_SNIPER = 0
- static const int DPI_CUSTOM = 6
- static const int LIGHT_UP = 0
- static const int LIGHT_DOWN = 1
- static const int LIGHT_UP_WRAP = 2
- static const int LIGHT_DOWN_WRAP = 3
- static const int LOCK_TOGGLE = 0
- static const int LOCK_ON = 1
- static const int LOCK_OFF = 2
- static const int PROGRAM_PR_MULTI = 0x04
- static const int PROGRAM_PR_INDEF = 0x00
- static const int PROGRAM_PR_KRSTOP = 0x01
- static const int PROGRAM_PR_KPSTOP = 0x02
- static const int PROGRAM_RE_MULTI = 0x40
- static const int PROGRAM_RE_INDEF = 0x00
- static const int PROGRAM_RE_KPSTOP = 0x20

Private Member Functions

- void operator= (const KeyAction &rhs)

  ccMSC: Don't copy key actions (the old one needs to be deleted first) frickler24: statement left as described, but copying is done in KbBind copy constructor
- KeyAction (const KeyAction &rhs)

Private Attributes

- QString _value
- QProcess * preProgram
- QProcess * relProgram
- quint64 sniperValue

12.41.1 Detailed Description

Definition at line 13 of file keyaction.h.

12.41.2 Member Enumeration Documentation

12.41.2.1 enum KeyAction::Type

Enumerator

UNBOUND

NORMAL

SPECIAL

Definition at line 145 of file keyaction.h.

```
145                 {
146         UNBOUND,
147         NORMAL,
148         SPECIAL,
149     };
```

12.41.3 Constructor & Destructor Documentation

12.41.3.1 KeyAction::KeyAction (const QString & *action,* QObject * *parent* = 0)

Definition at line 22 of file keyaction.cpp.

```
23     : QObject(parent), _value(action), preProgram(0),
      relProgram(0), sniperValue(0)
24 {
25 }
```

12.41.3.2 KeyAction::KeyAction (QObject * *parent* = 0) [explicit]

Definition at line 27 of file keyaction.cpp.

```
28     : QObject(parent), _value(""), preProgram(0),
      relProgram(0), sniperValue(0)
29 {
30 }
```

12.41.3.3 KeyAction::~KeyAction ( )

Definition at line 32 of file keyaction.cpp.

References preProgram, and relProgram.

```
32                      {
33     // Clean up processes
34     if(preProgram){
35         preProgram->kill();
36         delete preProgram;
37     }
38     if(relProgram){
39         relProgram->kill();
40         delete relProgram;
41     }
42 }
```

12.41.3.4 KeyAction::KeyAction (const KeyAction & *rhs*) [inline], [private]

Definition at line 186 of file keyaction.h.

```
186 : QObject() {}
```

12.41.4 Member Function Documentation

12.41.4.1 void KeyAction::adjustDisplay ( )

Definition at line 445 of file keyaction.cpp.

Referenced by keyEvent().

```
445                             {
446 #ifdef USE_LIBX11
447     // Try to get the current display from the X server
448     char* display_name = XDisplayName(NULL);
449     if(!display_name)
450         return;
451     Display* display = XOpenDisplay(display_name);
452     if(!display)
453         return;
454     char* display_string = DisplayString(display);
455     if(!display_string || strlen(display_string) == 0){
456         XCloseDisplay(display);
457         return;
458     }
459     size_t envstr_size = strlen(display_string) + 4;
460     char* envstr = new char[envstr_size];
461     strncpy(envstr, display_string, envstr_size);
462     envstr[envstr_size - 1] = 0;
463 
464     Window root_window = XRootWindow(display, DefaultScreen(display));
465     Window root_window_ret, child_window_ret, window;
466     XWindowAttributes attr;
467     int root_x, root_y, win_x, win_y;
468     unsigned int mask_ret;
469 
470     // Find the screen which currently has the mouse
471     XQueryPointer(display, root_window, &root_window_ret, &child_window_ret, &root_x, &root_y, &win_x, &
    win_y, &mask_ret);
472     if(child_window_ret == (Window)NULL)
473         window = root_window_ret;
474     else
475         window = child_window_ret;
476     XGetWindowAttributes(display, window,  &attr);
477 
478     char* ptr = strchr(envstr, ':');
479     if(ptr){
480         ptr = strchr(ptr, '.');
481         if(ptr)
482             *ptr = '\0';
483         char buf[16];
484         snprintf(buf, sizeof(buf), ".%i", XScreenNumberOfScreen(attr.screen));
485         strncat(envstr, buf, envstr_size - 1 - strlen(envstr));
486 
487         // Update environment variable
488         setenv("DISPLAY", envstr, 1);
489     }
490 
491     delete[] envstr;
492     XCloseDisplay(display);
493 #endif
494 }
```

Here is the caller graph for this function:

12.41.4.2 QString KeyAction::animAction (const QUuid & *guid,* bool *onlyOnce,* bool *stopOnRelease*) [static]

Definition at line 175 of file keyaction.cpp.

References ANIM_KRSTOP, and ANIM_ONCE.

Referenced by RebindWidget::applyChanges().

```
175                                                                                 {
176     int flags = (onlyOnce ? ANIM_ONCE : 0) | (stopOnRelease ?
    ANIM_KRSTOP : 0);
177     return "$anim:" + guid.toString() + QString("+%1").arg(flags);
178 }
```

Here is the caller graph for this function:

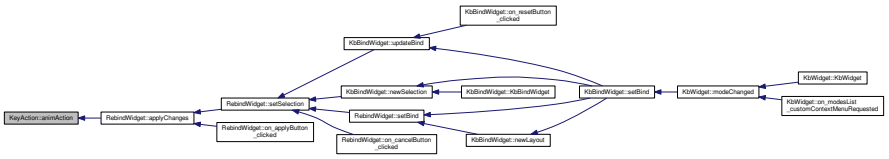

12.41.4.3 QUuid KeyAction::animInfo (bool & *onlyOnce,* bool & *stopOnRelease*) const

Definition at line 216 of file keyaction.cpp.

References _value, ANIM_KRSTOP, ANIM_ONCE, and isAnim().

Referenced by keyEvent(), and RebindWidget::setSelection().

```
216                                                                 {
217     if(!isAnim())
218         return QUuid();
219     QString param = _value.mid(6);
220     QStringList split = param.split("+");
221     if(split.length() < 2)
222         return QUuid();
223     QUuid id = split[0];
224     int flags = split[1].toInt();
225     onlyOnce = !!(flags & ANIM_ONCE);
226     stopOnRelease = !!(flags & ANIM_KRSTOP);
227     return id;
228 }
```

Here is the call graph for this function:

Here is the caller graph for this function:

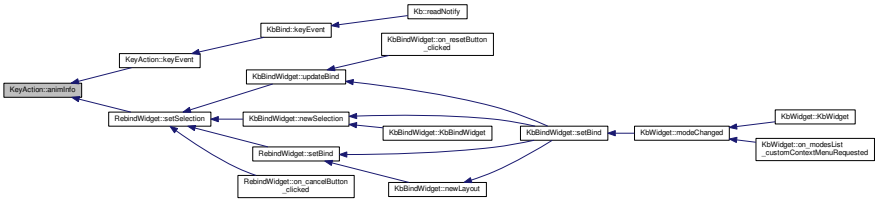

12.41.4.4 QString KeyAction::defaultAction (const QString & *key*) [static]

Definition at line 44 of file keyaction.cpp.

Referenced by KbBind::bindAction(), KbBind::defaultAction(), and KbBind::save().

```
44                                                  {
45      // G1-G18 are unbound by default
46      if(key.length() >= 2 && key[0] == 'g'
47          && ((key.length() == 2 && key[1] >= '0' && key[1] <= '9')
48          || (key.length() == 3 && key[1] == '1' && key[2] >= '0' && key[2] <= '8')))
49          return "";
50      // So are thumbgrid buttons
51      if(key.startsWith("thumb"))
52          return "";
53      // TODO: default action for MR
54      if(key == "mr")
55          return "";
56      // M1-M3 switch modes
57      if(key == "m1")
58          return "$mode:0";
59      if(key == "m2")
60          return "$mode:1";
61      if(key == "m3")
62          return "$mode:2";
63      // Brightness and Win Lock are their own functions
64      if(key == "light")
65          return "$light:2";
66      if(key == "lock")
67          return "$lock:0";
68      // DPI buttons
69      if(key == "dpiup")
70          return "$dpi:-2";
71      if(key == "dpidn")
72          return "$dpi:-1";
73      if(key == "sniper")
74          return "$dpi:0";
75      // Everything else is a standard keypress
76      return key;
77  }
```

Here is the caller graph for this function:

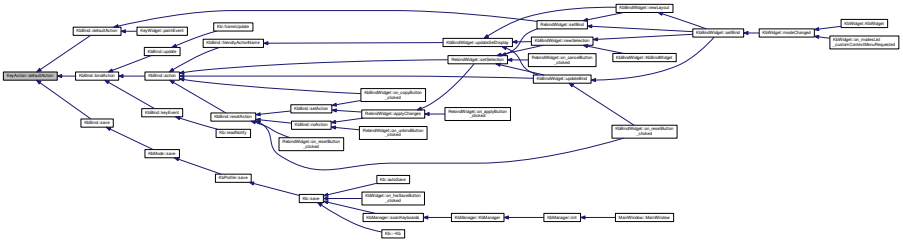

12.41.4.5 QString KeyAction::dpiAction (int *level*, int *customX* = 0, int *customY* = 0) [static]

Definition at line 153 of file keyaction.cpp.

References DPI_CUSTOM.

Referenced by RebindWidget::applyChanges().

```
153                                                                 {
154      QString action = tr("$dpi:%1").arg(level);
155      if(level == DPI_CUSTOM)
156          action += tr("+%1+%2").arg(customX).arg(customY);
157      return action;
158  }
```

Here is the caller graph for this function:

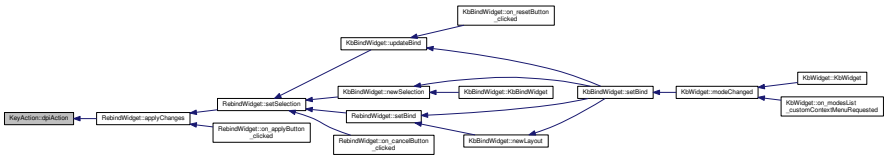

12.41.4.6 int KeyAction::dpiInfo (QPoint & *custom*) const

Definition at line 202 of file keyaction.cpp.

References _value, DPI_CUSTOM, and isDPI().

Referenced by friendlyName(), keyEvent(), and RebindWidget::setSelection().

```
202                                         {
203     if(!isDPI())
204         return 0;
205     QString param = _value.mid(5);
206     QStringList lxy = param.split("+");
207     int level = lxy[0].toInt();
208     if(level == DPI_CUSTOM){
209         if(lxy.length() != 3)
210             return 0;
211         custom = QPoint(lxy[1].toInt(), lxy[2].toInt());
212     }
213     return level;
214 }
```

Here is the call graph for this function:

Here is the caller graph for this function:

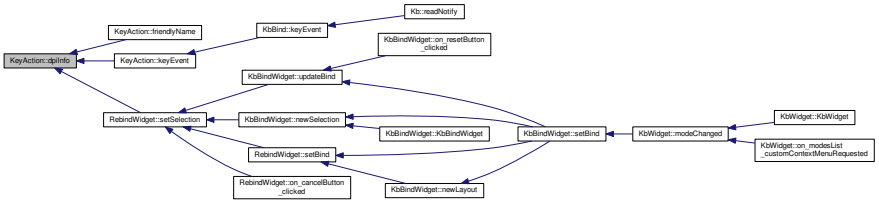

12.41.4.7 QString KeyAction::driverName ( ) const

Definition at line 230 of file keyaction.cpp.

References _value, and isSpecial().

Referenced by KbBind::update().

```
230                                     {
231     if(isSpecial())
232         return "";
233     return _value;
234 }
```

Here is the call graph for this function:



Here is the caller graph for this function:



12.41.4.8 QString KeyAction::friendlyName (const KeyMap & *map*) const

Definition at line 79 of file keyaction.cpp.

References _value, DPI_CUSTOM, DPI_DOWN, DPI_SNIPER, DPI_UP, dpiInfo(), KeyMap::friendlyName(), KeyMap::layout(), LIGHT_DOWN, LIGHT_DOWN_WRAP, LIGHT_UP, LIGHT_UP_WRAP, LOCK_OFF, LOCK_ON, LOCK_TOGGLE, MODE_NEXT, MODE_NEXT_WRAP, MODE_PREV, and MODE_PREV_WRAP.

```
79                                                      {
80     if(_value.isEmpty())
81         return "Unbound";
82     QStringList parts = _value.split(":");
83     QString prefix = parts[0];
84     if(parts.length() < 2){
85         KeyMap::Layout layout = map.layout();
86         QString name = KeyMap::friendlyName(_value, layout);
87         if(name.isEmpty())
88             return "(Unknown)";
89         return name;
90     }
91     int suffix = parts[1].toInt();
92     if(prefix == "$mode"){
93         switch(suffix){
94         case MODE_PREV:
95         case MODE_PREV_WRAP:
96             return "Switch to previous mode";
97         case MODE_NEXT:
98         case MODE_NEXT_WRAP:
99             return "Switch to next mode";
100         default:
101             return tr("Switch to mode %1").arg(suffix + 1);
102         }
103     } else if(prefix == "$dpi"){
104         // Split off custom parameters (if any)
105         int level = parts[1].split("+")[0].toInt();
106         switch(level){
107         case DPI_UP:
```

```
108             return "DPI up";
109         case DPI_DOWN:
110             return "DPI down";
111         case DPI_SNIPER:
112             return "Sniper";
113         case DPI_CUSTOM:{
114             QPoint xy;
115             dpiInfo(xy);
116             return tr("DPI: %1, %2").arg(xy.x()).arg(xy.y());
117         }
118         default:
119             return tr("DPI stage %1").arg(level);
120         }
121     } else if(prefix == "$light"){
122         switch(suffix){
123         case LIGHT_UP:
124         case LIGHT_UP_WRAP:
125             return "Brightness up";
126         case LIGHT_DOWN:
127         case LIGHT_DOWN_WRAP:
128             return "Brightness down";
129         }
130     } else if(prefix == "$lock"){
131         switch(suffix){
132         case LOCK_TOGGLE:
133             return "Toggle Windows lock";
134         case LOCK_ON:
135             return "Windows lock on";
136         case LOCK_OFF:
137             return "Windows lock off";
138         }
139     } else if(prefix == "$anim"){
140         return "Start animation";
141     } else if(prefix == "$program"){
142         return "Launch program";
143     } else if(prefix == "$macro"){
144         return "Send G-key macro";
145     }
146     return "(Unknown)";
147 }
```

Here is the call graph for this function:

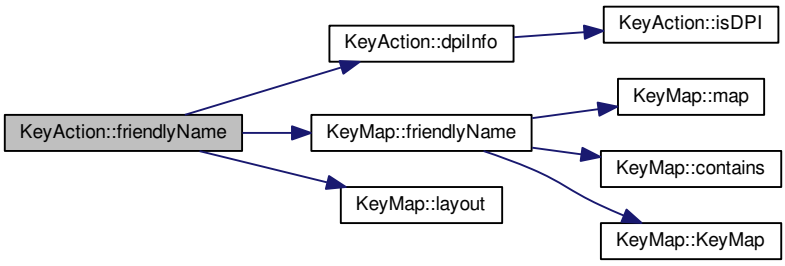

12.41.4.9 bool KeyAction::isAnim ( ) const [inline]

Definition at line 158 of file keyaction.h.

References _value.

Referenced by animInfo(), and RebindWidget::setSelection().

```
158 { return _value.startsWith("$anim:"); }
```

Here is the caller graph for this function:

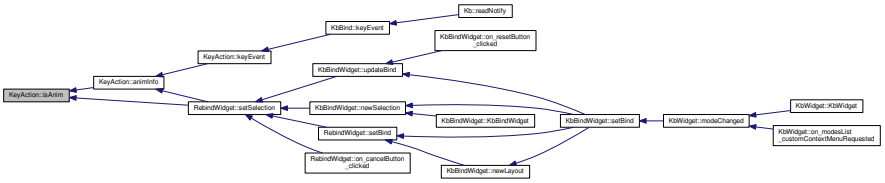

12.41.4.10 bool KeyAction::isDPI ( ) const [inline]

Definition at line 161 of file keyaction.h.

References _value.

Referenced by dpiInfo(), isMouse(), and RebindWidget::setSelection().

```
161 { return _value.startsWith("$dpi:"); }
```

Here is the caller graph for this function:

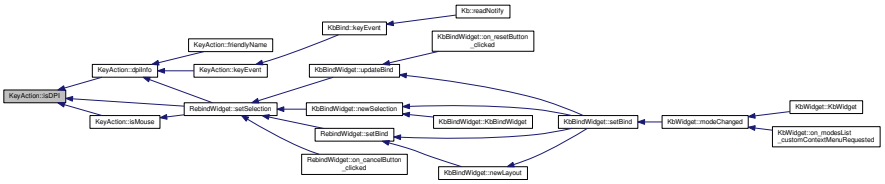

12.41.4.11 bool KeyAction::isMacro ( ) const [inline]

Definition at line 159 of file keyaction.h.

References _value.

Referenced by isValidMacro(), macroDisplay(), and macroFullLine().

```
159 { return _value.startsWith("$macro:"); }
```

Here is the caller graph for this function:

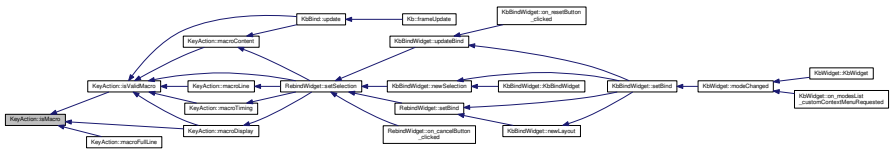

12.41.4.12 bool KeyAction::isMedia ( ) const [inline]

Definition at line 155 of file keyaction.h.

References _value.

```
155 { return _value == "mute" || _value == "volup" || _value == "voldn" ||
      _value == "stop" || _value == "prev" || _value == "play" ||
      _value == "next"; }
```

12.41.4.13 bool KeyAction::isMouse ( ) const [inline]

Definition at line 162 of file keyaction.h.

References _value, isDPI(), and isNormal().

Referenced by RebindWidget::setSelection().

```
162 { return (isNormal() && (_value.startsWith("mouse") || _value.startsWith("wheel"))) ||
      isDPI(); }
```

Here is the call graph for this function:



Here is the caller graph for this function:

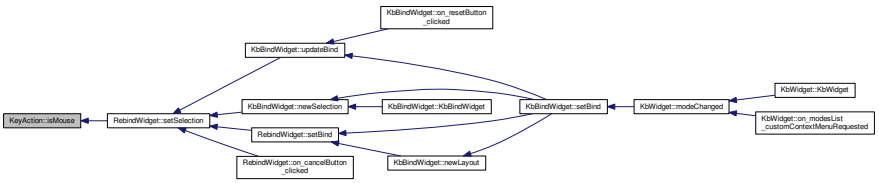

12.41.4.14 bool KeyAction::isNormal ( ) const [inline]

Definition at line 152 of file keyaction.h.

References NORMAL, and type().

Referenced by isMouse(), RebindWidget::setBind(), and RebindWidget::setSelection().

```
152 { return type() == NORMAL; }
```

Here is the call graph for this function:



Here is the caller graph for this function:

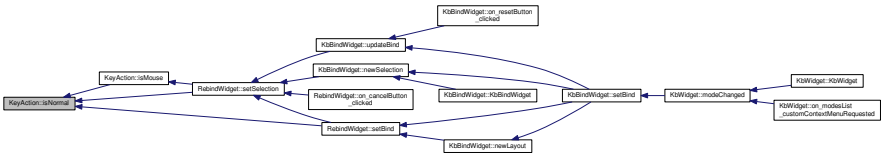

12.41.4.15 bool KeyAction::isProgram ( ) const [inline]

Definition at line 157 of file keyaction.h.

References _value.

Referenced by programInfo(), and RebindWidget::setSelection().

```
157 { return _value.startsWith("$program:"); }
```

Here is the caller graph for this function:

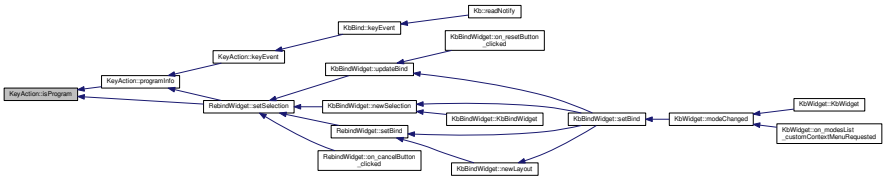

12.41.4.16 bool KeyAction::isSpecial ( ) const [inline]

Definition at line 153 of file keyaction.h.

References SPECIAL, and type().

Referenced by driverName(), keyEvent(), and RebindWidget::setSelection().

```
153 { return type() == SPECIAL; }
```

Here is the call graph for this function:



Here is the caller graph for this function:

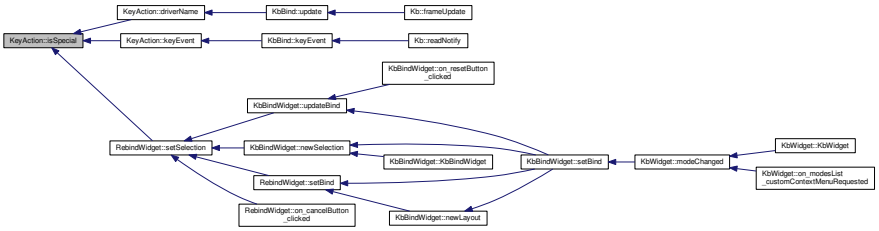

12.41.4.17 bool KeyAction::isUnbound ( ) const [inline]

Definition at line 151 of file keyaction.h.

References type(), and UNBOUND.

```
151 { return type() == UNBOUND; }
```

Here is the call graph for this function:



12.41.4.18 bool KeyAction::isValidMacro ( ) const [inline]

Returns

bool as true iff the macro definition contains all four elements.

Definition at line 55 of file keyaction.h.

References _value, and isMacro().

Referenced by macroContent(), macroDisplay(), macroLine(), macroTiming(), RebindWidget::setSelection(), and KbBind::update().

```
55                                      {
56          if (isMacro()) {
57              QStringList ret;
58              ret =_value.split(":");
59              return ((ret.count() >= 4) && (ret.count() <= 5));
60          } else {
61              return false;
62          }
63      }
```

Here is the call graph for this function:



Here is the caller graph for this function:

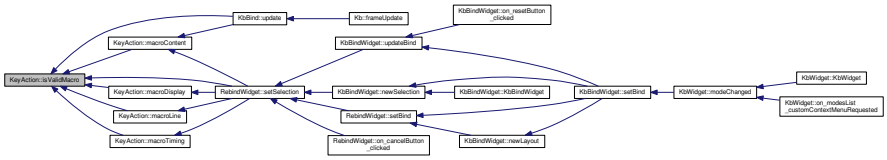

12.41.4.19 void KeyAction::keyEvent (KbBind * *bind*, bool *down*)

Definition at line 236 of file keyaction.cpp.

References _value, adjustDisplay(), animInfo(), KbProfile::currentMode(), Kb::currentProfile(), KbBind::devParent(), KbLight::dimming(), KbPerf::dpi(), KbPerf::DPI_COUNT, DPI_CUSTOM, DPI_DOWN, DPI_SNIPER, DPI_UP, KbPerf::dpiDown(), dpiInfo(), KbPerf::dpiUp(), KbLight::findAnim(), KbProfile::indexOf(), KbAnim::isActive(), isSpecial(), KbBind::light(), LIGHT_DOWN, LIGHT_DOWN_WRAP, LIGHT_UP, LIGHT_UP_WRAP, LOCK_OFF, LOCK_ON, LOCK_TOGGLE, KbLight::MAX_DIM, MODE_NEXT, MODE_NEXT_WRAP, MODE_PREV, MODE_PREV_WRAP, KbProfile::modeCount(), KbProfile::modes(), KbBind::perf(), KbPerf::popDpi(), preProgram, PROGRAM_PR_KPSTOP, PROGRAM_PR_KRSTOP, PROGRAM_PR_MULTI, PROGRAM_RE_KPSTOP, PROGRAM_RE_MULTI, programInfo(), KbPerf::pushDpi(), KbPerf::pushSniper(), relProgram, Kb::setCurrentMode(), sniperValue, KbAnim::stop(), KbAnim::trigger(), and KbBind::winLock().

Referenced by KbBind::keyEvent().

```
236                                             {
237     // No need to respond to standard actions
238     if(!isSpecial())
239         return;
240     QStringList parts = _value.split(":");
241     if(parts.length() < 2)
242         return;
243     QString prefix = parts[0];
244     int suffix = parts[1].toInt();
245     if(prefix == "$mode"){
246         if(!down)
247             return;
248         // Change mode
249         Kb* device = bind->devParent();
250         KbProfile* currentProfile = device->currentProfile();
251         int mode = currentProfile->indexOf(currentProfile->currentMode());
```

```
252         int modeCount = currentProfile->modeCount();
253         switch(suffix){
254         case MODE_PREV_WRAP:
255             mode--;
256             if(mode < 0)
257                 mode = modeCount - 1;
258             break;
259         case MODE_NEXT_WRAP:
260             mode++;
261             if(mode >= modeCount)
262                 mode = 0;
263             break;
264         case MODE_PREV:
265             mode--;
266             break;
267         case MODE_NEXT:
268             mode++;
269             break;
270         default:
271             // Absolute
272             mode = suffix;
273             break;
274         }
275         if(mode < 0 || mode >= modeCount)
276             return;
277         device->setCurrentMode(currentProfile->modes()[mode]);
278     } else if(prefix == "$dpi"){
279         KbPerf* perf = bind->perf();
280         int level = parts[1].split("+")[0].toInt();
281         switch(level){
282         case DPI_UP:
283             if(!down)
284                 return;
285             perf->dpiUp();
286             break;
287         case DPI_DOWN:
288             if(!down)
289                 return;
290             perf->dpiDown();
291             break;
292         case DPI_SNIPER:
293             if(down)
294                 sniperValue = perf->pushSniper();
295             else {
296                 perf->popDpi(sniperValue);
297                 sniperValue = 0;
298             }
299             break;
300         case DPI_CUSTOM:{
301             QPoint xy;
302             dpiInfo(xy);
303             if(xy.x() <= 0 || xy.y() <= 0)
304                 break;
305             if(down)
306                 sniperValue = perf->pushDpi(xy);
307             else {
308                 perf->popDpi(sniperValue);
309                 sniperValue = 0;
310             }
311             break;
312         }
313         default:
314             if(level < 1 || level >= KbPerf::DPI_COUNT
315                     || !down)
316                 return;
317             perf->dpi(level);
318             break;
319         }
320     } else if(prefix == "$light"){
321         if(!down)
322             return;
323         // Change brightness
324         KbLight* light = bind->light();
325         int dim = light->dimming();
326         switch(suffix){
327         case LIGHT_UP:
328             if(dim > 0)
329                 dim--;
330             break;
331         case LIGHT_DOWN:
332             if(dim < KbLight::MAX_DIM)
333                 dim++;
334             break;
335         case LIGHT_UP_WRAP:
336             dim--;
337             if(dim < 0)
338                 dim = KbLight::MAX_DIM;
```

```
339             break;
340         case LIGHT_DOWN_WRAP:
341             dim++;
342             if(dim > KbLight::MAX_DIM)
343                 dim = 0;
344             break;
345         }
346         light->dimming(dim);
347     } else if(prefix == "$lock"){
348         if(!down)
349             return;
350         // Change win lock
351         switch(suffix){
352         case LOCK_TOGGLE:
353             bind->winLock(!bind->winLock());
354             break;
355         case LOCK_ON:
356             bind->winLock(true);
357             break;
358         case LOCK_OFF:
359             bind->winLock(false);
360             break;
361         }
362     } else if(prefix == "$anim"){
363         // Start animation
364         bool onlyOnce = false, stopOnRelease = false;
365         QUuid id = animInfo(onlyOnce, stopOnRelease);
366         KbAnim* anim = bind->light()->findAnim(id);
367         if(!anim)
368             return;
369         if(down){
370             if(!onlyOnce || !anim->isActive())
371                 // If "only once" is enabled, don't start the animation when it's already running
372                 anim->trigger(QDateTime::currentMSecsSinceEpoch(), true);
373         } else if(stopOnRelease){
374             // Key released - stop animation
375             anim->stop();
376         }
377     } else if(prefix == "$program"){
378         // Launch program
379         QString onPress, onRelease;
380         int stop = programInfo(onPress, onRelease);
381         // Stop running programs based on setting
382         QProcess* process = 0;
383         if(down){
384             if(stop & PROGRAM_PR_KPSTOP){
385                 process = preProgram;
386                 if(process)
387                     process->kill();
388                 process = 0;
389             }
390             if(stop & PROGRAM_RE_KPSTOP)
391                 process = relProgram;
392         } else {
393             if(stop & PROGRAM_PR_KRSTOP)
394                 process = preProgram;
395         }
396         if(process)
397             process->kill();
398         // Launch new process if requested
399         QString& program = down ? onPress : onRelease;
400         if(program.isEmpty())
401             return;
402         // Check if the program is running already. If so, don't start it again.
403         process = down ? preProgram : relProgram;
404         if(process){
405             if(process->state() == QProcess::NotRunning)
406                 delete process;
407             else
408                 return;
409         }
410
411         // Adjust the selected display.
412         adjustDisplay();
413
414         // Start the program. Wrap it around sh to parse arguments.
415         if((down && (stop & PROGRAM_PR_MULTI))
416                 || (!down && (stop & PROGRAM_RE_MULTI))){
417             // Multiple instances allowed? Start detached process
418             QProcess::startDetached("sh", QStringList() << "-c" << program);
419         } else {
420             process = new QProcess(this);
421             process->start("sh", QStringList() << "-c" << program);
422             if(down)
423                 preProgram = process;
424             else
425                 relProgram = process;
```

```
426         }
427     } else if (prefix == "$macro") {
428         // Do nothing, because all work is done by the keyboard itself.
429         // For now, there is no reason to react on G-key press or release.
430         // If u find some reason, then here is the place for it.
431     }
432 }
```

Here is the call graph for this function:

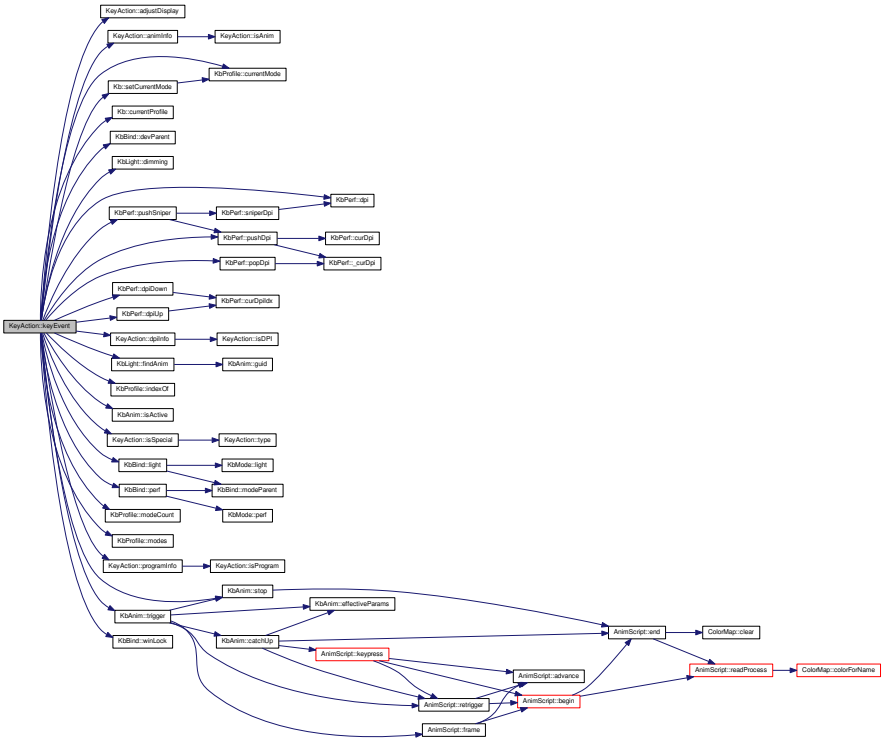

Here is the caller graph for this function:



12.41.4.20 void KeyAction::keyRelease (KbBind * *bind*)

12.41.4.21 QString KeyAction::lightAction (int *type* = LIGHT_UP_WRAP) [static]

Definition at line 160 of file keyaction.cpp.

Referenced by RebindWidget::applyChanges().

```
160                                         {
161     return QString("$light:%1").arg(type);
162 }
```

Here is the caller graph for this function:

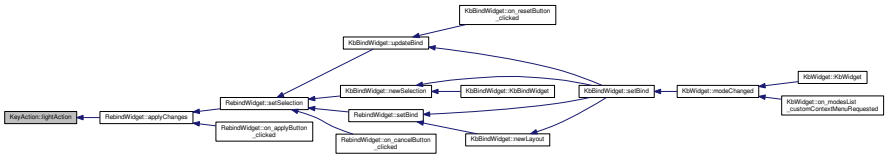

12.41.4.22 QString KeyAction::lockAction (int *type* = LOCK_TOGGLE) [static]

Definition at line 164 of file keyaction.cpp.

Referenced by RebindWidget::applyChanges().

```
164                                          {
165     return QString("$lock:%1").arg(type);
166 }
```

Here is the caller graph for this function:

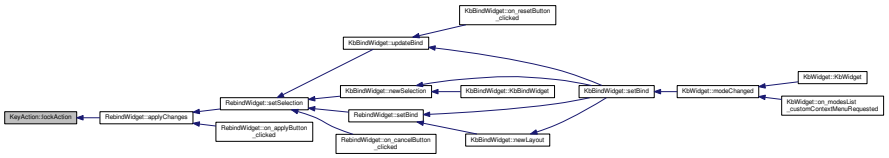

12.41.4.23 QString KeyAction::macroAction (QString *macroDef*) [static]

KeyAction::macroAction is called when applying changes on a macro definition. macroAction ist called while being in the macro pane and clicking Apply with something in the Macro Text Box. It tags that input with "$macro:" for further recognition.

Parameters

macroDef	holds the String containing parts 2-5 of a complete macro definition.

Returns

QString holding the complete G-Key macro definition (parts 1-5)

Definition at line 504 of file keyaction.cpp.

Referenced by RebindWidget::applyChanges().

```
504                                             {
505     return QString ("$macro:%1").arg(macroDef);
506 }
```

Here is the caller graph for this function:

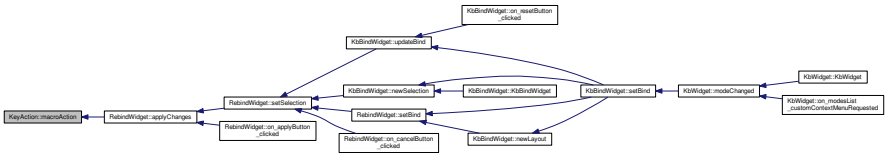

12.41.4.24 QString KeyAction::macroContent ( ) const [inline]

Returns

QString macroContent

Definition at line 86 of file keyaction.h.

References _value, and isValidMacro().

Referenced by RebindWidget::setSelection(), and KbBind::update().

```
86                                      {
87         // return isValidMacro() ? _value.split(":")[1].replace(QRegExp("=\\d+"), "") : ""; ///< Is used if
       we have ckb without delay handling
88         return isValidMacro() ? _value.split(":")[1] : "";
89     }
```

Here is the call graph for this function:



Here is the caller graph for this function:

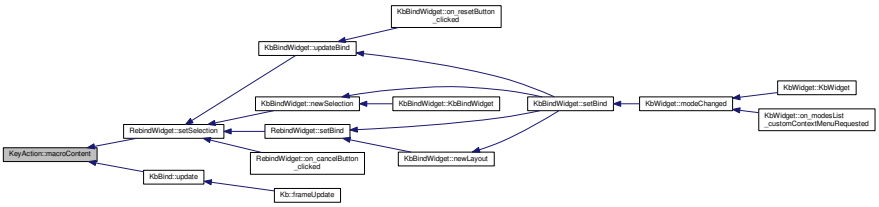

12.41.4.25 void KeyAction::macroDisplay ( )

KeyAction::macroDisplay is just for debugging. It shows the content of the key action and some other info.

General Info on KeyAction::_value for macros: That string consists of 4 elements, all delimited by ":".

1. Macro command indicator "$macro:"

2. Macro Key Definition (coming from pteMacroBox): This sequence will program the keyboard and is hardly readable

3. Readable Macro String: This is displayed in pteMacroText

4. Readable Macro Comment:This is displayed in pteMacroComment

5. completely unreadable original macro information with timing values

Definition at line 437 of file keyaction.cpp.

References _value, isMacro(), and isValidMacro().

Referenced by RebindWidget::setSelection().

```
437                             {
438     qDebug() << "isMacro returns" << (isMacro() ? "true" : "false");
439     qDebug() << "isValidMacro returns" << (isValidMacro() ? "true" : "false");
440     QStringList ret =_value.split(":");
441     qDebug() << "Macro definition conains" << ret.count() << "elements";
442     qDebug() << "Macro definition is" << _value;
443 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

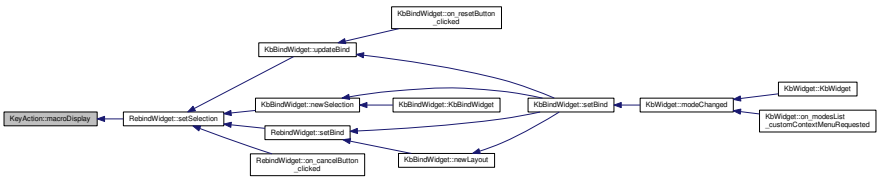

12.41.4.26 QString KeyAction::macroFullLine ( ) const [inline]

Returns

QString All 5 parts are returned in one QString. If no definition exists, return ""

Definition at line 43 of file keyaction.h.

References _value, and isMacro().

```
43                                  {
44         return isMacro() ? _value.right(_value.length()-1) : "";
45     }
```

Here is the call graph for this function:



12.41.4.27 QStringList KeyAction::macroLine ( ) const [inline]

Returns

QStringList returns the Macro Key Definition, Readble Macro String, Readable Macro Comment and the original timing information (if it exists as a 5th part) as QStringList.

Definition at line 73 of file keyaction.h.

References _value, and isValidMacro().

Referenced by RebindWidget::setSelection().

```
73                                          {
74         if (isValidMacro()) {
75             QStringList ret =_value.split(":");
76             ret.removeFirst();
77             return ret;
78         } else return QStringList();
79     }
```

Here is the call graph for this function:



Here is the caller graph for this function:

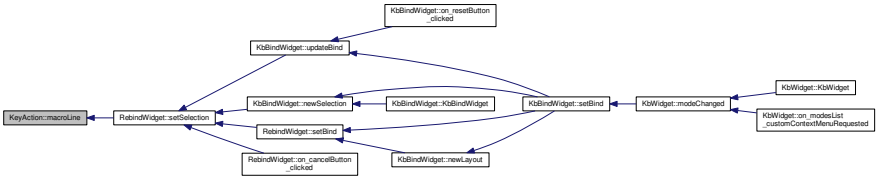

12.41.4.28 QString KeyAction::macroTiming ( ) const [inline]

Returns

QString macroTiming

Definition at line 98 of file keyaction.h.

References _value, and isValidMacro().

Referenced by RebindWidget::setSelection().

```
98                                      {
99          if (isValidMacro()) {
100             QStringList rval = _value.split(":");
101             return (rval.length() == 4)? rval[1] : rval[4];
102         }
103         return QString("");
104     }
```

Here is the call graph for this function:



Here is the caller graph for this function:

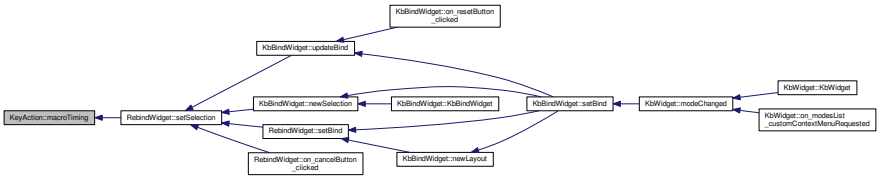

12.41.4.29 QString KeyAction::modeAction (int *mode*) [static]

Definition at line 149 of file keyaction.cpp.

Referenced by RebindWidget::applyChanges().

```
149                                         {
150     return QString("$mode:%1").arg(mode);
151 }
```

Here is the caller graph for this function:

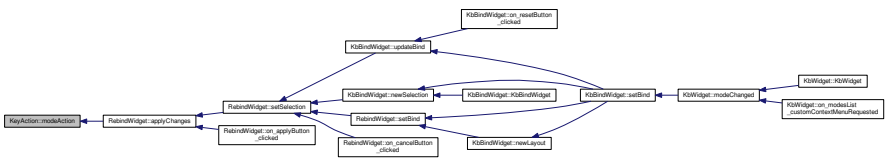

12.41.4.30 static QString KeyAction::noAction ( ) [inline], [static]

Definition at line 25 of file keyaction.h.

```
25 { return ""; }
```

12.41.4.31 KeyAction::operator QString ( ) const [inline]

Definition at line 20 of file keyaction.h.

References _value.

```
20 { return _value; }
```

12.41.4.32 void KeyAction::operator= (const KeyAction & *rhs*) [inline], [private]

Definition at line 185 of file keyaction.h.

```
185 {}
```

12.41.4.33 QString KeyAction::programAction (const QString & *onPress*, const QString & *onRelease*, int *stop*) [static]

Definition at line 168 of file keyaction.cpp.

Referenced by RebindWidget::applyChanges().

```
168                                                                                                 {
169     // URL-encode the commands and place them in the string (":" and "+" are both replaced, so they won't
      interfere)
170     return "$program:" + QString::fromUtf8(QUrl::toPercentEncoding(onPress.trimmed())) + "+" +
      QString::fromUtf8(QUrl::toPercentEncoding(onRelease.trimmed())) + QString("+%1").arg(stop);
171 }
```

Here is the caller graph for this function:

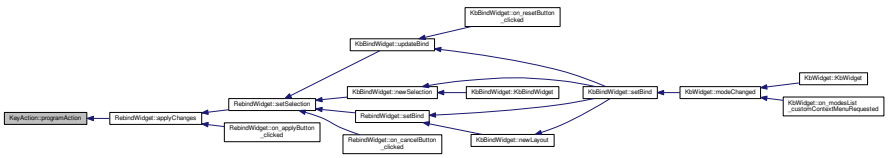

12.41.4.34 int KeyAction::programInfo (QString & *onPress*, QString & *onRelease*) const

Definition at line 190 of file keyaction.cpp.

References _value, and isProgram().

Referenced by keyEvent(), and RebindWidget::setSelection().

```
190                                                                                 {
191     if(!isProgram())
192         return 0;
193     QString param = _value.mid(9);
194     QStringList programs = param.split("+");
```

```
195     if(programs.length() != 3)
196         return 0;
197     onPress = QUrl::fromPercentEncoding(programs[0].toUtf8());
198     onRelease = QUrl::fromPercentEncoding(programs[1].toUtf8());
199     return programs[2].toInt();
200 }
```

Here is the call graph for this function:

Here is the caller graph for this function:

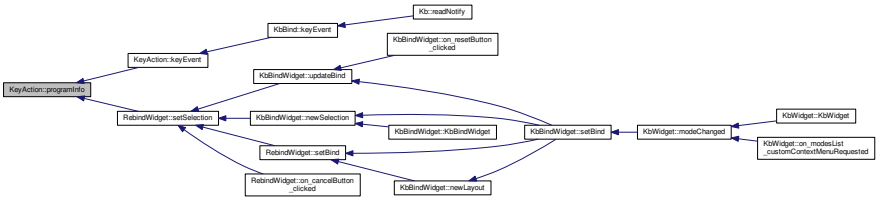

12.41.4.35 QString KeyAction::specialInfo (int & *parameter*) const

Definition at line 180 of file keyaction.cpp.

References _value.

Referenced by RebindWidget::setSelection().

```
180                                                 {
181     QStringList list = _value.split(":");
182     if(list.length() < 2){
183         parameter = INT_MIN;
184         return "";
185     }
186     parameter = list[1].toInt();
187     return list[0].replace("$", "");
188 }
```

Here is the caller graph for this function:

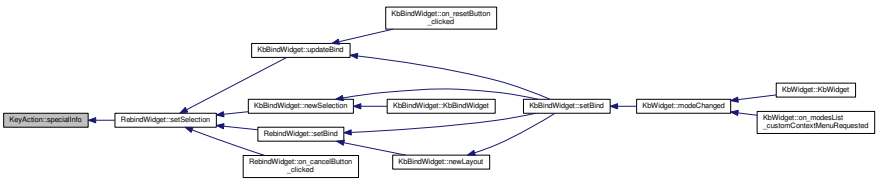

12.41.4.36 KeyAction::Type KeyAction::type ( ) const

Definition at line 14 of file keyaction.cpp.

References _value, NORMAL, SPECIAL, and UNBOUND.

Referenced by isNormal(), isSpecial(), isUnbound(), KbBindWidget::on_copyButton_clicked(), and KbBindWidget::on_resetButton_clicked().

```
14                                      {
15     if(_value.isEmpty())
16         return UNBOUND;
17     if(_value.at(0) == '$')
18         return SPECIAL;
19     return NORMAL;
20 }
```

Here is the caller graph for this function:

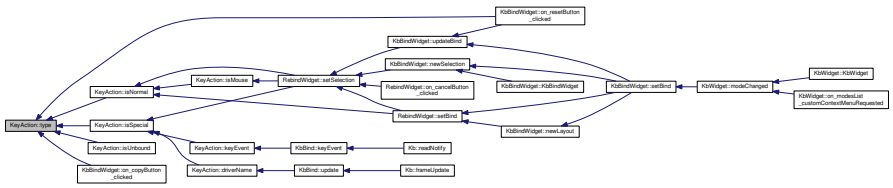

12.41.4.37 QString KeyAction::value ( ) const [inline]

Definition at line 19 of file keyaction.h.

References _value.

Referenced by KbBind::action(), KbBind::KbBind(), KbBind::save(), and KbBind::update().

```
19 { return _value; }
```

Here is the caller graph for this function:

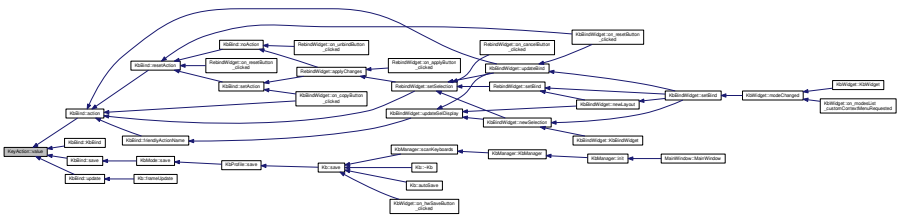

12.41.5 Field Documentation

12.41.5.1 QString KeyAction::_value [private]

Definition at line 188 of file keyaction.h.

Referenced by animInfo(), dpiInfo(), driverName(), friendlyName(), isAnim(), isDPI(), isMacro(), isMedia(), isMouse(), isProgram(), isValidMacro(), keyEvent(), macroContent(), macroDisplay(), macroFullLine(), macroLine(), macroTiming(), operator QString(), programInfo(), specialInfo(), type(), and value().

12.41.5.2 const int KeyAction::DPI_CUSTOM = 6 [static]

Definition at line 127 of file keyaction.h.

Referenced by dpiAction(), dpiInfo(), friendlyName(), keyEvent(), and RebindWidget::setSelection().

12.41.5.3 const int KeyAction::DPI_DOWN = -1 [static]

Definition at line 126 of file keyaction.h.

Referenced by friendlyName(), and keyEvent().

12.41.5.4 const int KeyAction::DPI_SNIPER = 0 [static]

Definition at line 127 of file keyaction.h.

Referenced by friendlyName(), and keyEvent().

12.41.5.5 const int KeyAction::DPI_UP = -2 [static]

Definition at line 126 of file keyaction.h.

Referenced by friendlyName(), and keyEvent().

12.41.5.6 const int KeyAction::LIGHT_DOWN = 1 [static]

Definition at line 130 of file keyaction.h.

Referenced by friendlyName(), keyEvent(), and RebindWidget::setSelection().

12.41.5.7 const int KeyAction::LIGHT_DOWN_WRAP = 3 [static]

Definition at line 131 of file keyaction.h.

Referenced by friendlyName(), keyEvent(), and RebindWidget::setSelection().

12.41.5.8 const int KeyAction::LIGHT_UP = 0 [static]

Definition at line 130 of file keyaction.h.

Referenced by friendlyName(), keyEvent(), and RebindWidget::setSelection().

12.41.5.9 const int KeyAction::LIGHT_UP_WRAP = 2 [static]

Definition at line 131 of file keyaction.h.

Referenced by friendlyName(), keyEvent(), and RebindWidget::setSelection().

12.41.5.10 const int KeyAction::LOCK_OFF = 2 [static]

Definition at line 134 of file keyaction.h.

Referenced by friendlyName(), and keyEvent().

12.41.5.11 const int KeyAction::LOCK_ON = 1 [static]

Definition at line 134 of file keyaction.h.

Referenced by friendlyName(), and keyEvent().

12.41.5.12 const int KeyAction::LOCK_TOGGLE = 0 [static]

Definition at line 134 of file keyaction.h.

Referenced by friendlyName(), and keyEvent().

12.41.5.13 const int KeyAction::MODE_NEXT = -1 [static]

Definition at line 122 of file keyaction.h.

Referenced by friendlyName(), keyEvent(), and RebindWidget::setSelection().

12.41.5.14 const int KeyAction::MODE_NEXT_WRAP = -3 [static]

Definition at line 123 of file keyaction.h.

Referenced by friendlyName(), keyEvent(), and RebindWidget::setSelection().

12.41.5.15 const int KeyAction::MODE_PREV = -2 [static]

Definition at line 122 of file keyaction.h.

Referenced by friendlyName(), keyEvent(), and RebindWidget::setSelection().

12.41.5.16 const int KeyAction::MODE_PREV_WRAP = -4 [static]

Definition at line 123 of file keyaction.h.

Referenced by friendlyName(), keyEvent(), and RebindWidget::setSelection().

12.41.5.17 QProcess* KeyAction::preProgram [private]

Definition at line 191 of file keyaction.h.

Referenced by keyEvent(), and ~KeyAction().

12.41.5.18 const int KeyAction::PROGRAM_PR_INDEF = 0x00 [static]

Definition at line 137 of file keyaction.h.

12.41.5.19 const int KeyAction::PROGRAM_PR_KPSTOP = 0x02 [static]

Definition at line 137 of file keyaction.h.

Referenced by keyEvent().

12.41.5.20 const int KeyAction::PROGRAM_PR_KRSTOP = 0x01 [static]

Definition at line 137 of file keyaction.h.

Referenced by keyEvent().

12.41.5.21 const int KeyAction::PROGRAM_PR_MULTI = 0x04 [static]

Definition at line 137 of file keyaction.h.

Referenced by RebindWidget::applyChanges(), keyEvent(), and RebindWidget::setSelection().

12.41.5.22 const int KeyAction::PROGRAM_RE_INDEF = 0x00 [static]

Definition at line 138 of file keyaction.h.

Referenced by RebindWidget::applyChanges(), and RebindWidget::setSelection().

12.41.5.23 const int KeyAction::PROGRAM_RE_KPSTOP = 0x20 [static]

Definition at line 138 of file keyaction.h.

Referenced by RebindWidget::applyChanges(), keyEvent(), and RebindWidget::setSelection().

12.41.5.24 const int KeyAction::PROGRAM_RE_MULTI = 0x40 [static]

Definition at line 138 of file keyaction.h.

Referenced by RebindWidget::applyChanges(), keyEvent(), and RebindWidget::setSelection().

12.41.5.25 QProcess* KeyAction::relProgram [private]

Definition at line 192 of file keyaction.h.

Referenced by keyEvent(), and ~KeyAction().

12.41.5.26 quint64 KeyAction::sniperValue [private]

Definition at line 195 of file keyaction.h.

Referenced by keyEvent().

The documentation for this class was generated from the following files:

- src/ckb/keyaction.h
- src/ckb/keyaction.cpp

12.42 KeyMap Class Reference

`#include <src/ckb/keymap.h>`

Collaboration diagram for KeyMap:

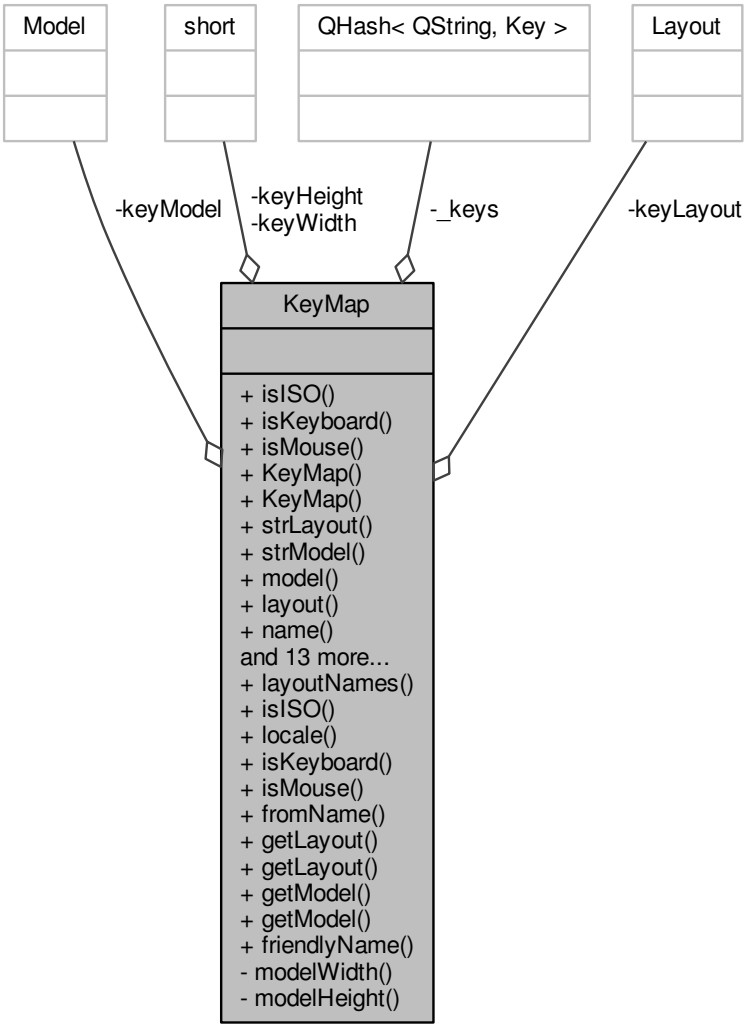

Public Types

- enum Model {
  NO_MODEL = -1, K65, K70, K95,
  STRAFE, M65, SABRE, SCIMITAR,
  _MODEL_MAX }
- enum Layout {
  NO_LAYOUT = -1, DK, EU, EU_DVORAK,
  GB, GB_DVORAK, US, US_DVORAK,
  FR, DE, IT, NO,
  PL, MX, ES, SE,
  _LAYOUT_MAX }

Public Member Functions

- bool isISO () const
- bool isKeyboard () const
- bool isMouse () const
- KeyMap ()
- KeyMap (Model _keyModel, Layout _keyLayout)
- QString strLayout () const
- QString strModel () const
- Model model () const
- Layout layout () const
- QString name () const
- uint count () const
- uint width () const
- uint height () const
- Key key (const QString &name) const
- Key operator[] (const QString &name) const
- bool contains (const QString &name) const
- const QHash< QString, Key > & map () const
- operator const QHash< QString, Key > & () const
- QStringList keys () const
- QList< Key > positions () const
- QString toStorage (const QString &name)
- QString fromStorage (const QString &storage)
- QStringList byPosition () const

Static Public Member Functions

- static QStringList layoutNames ()
- static bool isISO (Layout layout)
- static Layout locale ()
- static bool isKeyboard (Model model)
- static bool isMouse (Model model)
- static KeyMap fromName (const QString &name)
- static Layout getLayout (const QString &name)
- static QString getLayout (Layout layout)
- static Model getModel (const QString &name)
- static QString getModel (Model model)
- static QString friendlyName (const QString &key, Layout layout=US)

Static Private Member Functions

- static int modelWidth (Model model)
- static int modelHeight (Model model)

Private Attributes

- QHash< QString, Key > _keys
- short keyWidth
- short keyHeight
- Model keyModel:8
- Layout keyLayout:8

12.42.1 Detailed Description

Definition at line 49 of file keymap.h.

12.42.2 Member Enumeration Documentation

12.42.2.1 enum KeyMap::Layout

Enumerator

NO_LAYOUT

DK

EU

EU_DVORAK

GB

GB_DVORAK

US

US_DVORAK

FR

DE

IT

NO

PL

MX

ES

SE

_LAYOUT_MAX

Definition at line 65 of file keymap.h.

```
65                 {
66         NO_LAYOUT = -1,
67         DK,                     // Danish
68         EU,                     // English (EU)
69         EU_DVORAK,
70         GB,                     // English (UK)
71         GB_DVORAK,
72         US,                     // English (US)
73         US_DVORAK,
74         FR,                     // French
75         DE,                     // German
76         IT,                     // Italian
77         NO,                     // Norwegian
78         PL,                     // Polish (identical to US)
79         MX,                     // Spanish (Mexico/Latin America)
80         ES,                     // Spanish (Spain)
81         SE,                     // Swedish
82         _LAYOUT_MAX
83     };
```

12.42.2.2 enum KeyMap::Model

Enumerator

NO_MODEL

K65

K70

K95

STRAFE

M65

SABRE

SCIMITAR

_MODEL_MAX

Definition at line 51 of file keymap.h.

```
51                {
52          NO_MODEL = -1,
53          // Keyboard models
54          K65,
55          K70,
56          K95,
57          STRAFE,
58          // Mouse models
59          M65,
60          SABRE,
61          SCIMITAR,
62          _MODEL_MAX
63      };
```

12.42.3 Constructor & Destructor Documentation

12.42.3.1 KeyMap::KeyMap ( )

Definition at line 583 of file keymap.cpp.

Referenced by friendlyName(), and fromName().

```
583                 :
584       keyWidth(0), keyHeight(0),
585       keyModel(NO_MODEL), keyLayout(NO_LAYOUT)
586 {}
```

Here is the caller graph for this function:

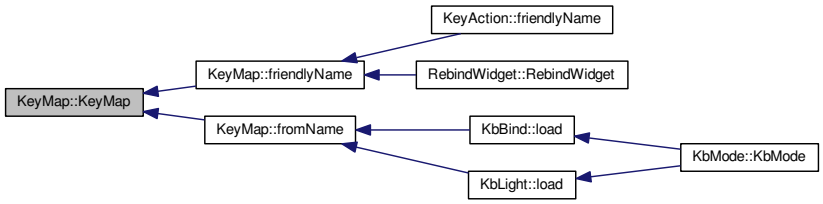

12.42.3.2 KeyMap::KeyMap (Model *_keyModel,* Layout *_keyLayout*)

Definition at line 577 of file keymap.cpp.

```
577                                                :
578     _keys(getMap(_keyModel, _keyLayout)),
579     keyWidth(modelWidth(_keyModel)), keyHeight(
      modelHeight(_keyModel)),
580     keyModel(_keyModel), keyLayout(_keyLayout)
581 {}
```

12.42.4 Member Function Documentation

12.42.4.1 QStringList KeyMap::byPosition ( ) const

Definition at line 588 of file keymap.cpp.

References key(), Key::x, and Key::y.

Referenced by RebindWidget::setBind().

```
588                                     {
589     // Use QMaps to order the keys
590     QMap<int, QMap<int, QString> > ordered;
591     QHashIterator<QString, Key> i(*this);
592     while(i.hasNext()){
593         i.next();
594         const Key& key = i.value();
595         ordered[key.y][key.x] = i.key();
596     }
597     // Merge them into a single list
598     QStringList result;
599     QMapIterator<int, QMap<int, QString> > y(ordered);
600     while(y.hasNext()){
601         y.next();
602         QMapIterator<int, QString> x(y.value());
603         while(x.hasNext()){
604             x.next();
605             result << x.value();
606         }
607     }
608     return result;
609 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

12.42.4.2 bool KeyMap::contains (const QString & *name*) const [inline]

Definition at line 127 of file keymap.h.

References _keys.

Referenced by friendlyName(), and KbAnimWidget::on_keyButton_clicked().

```
127 { return _keys.contains(name); }
```

Here is the caller graph for this function:

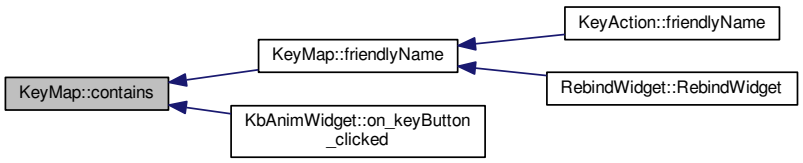

12.42.4.3 uint KeyMap::count ( ) const [inline]

Definition at line 118 of file keymap.h.

References _keys.

Referenced by KeyWidget::map(), KbBindWidget::on_copyButton_clicked(), and KbBindWidget::on_resetButton_-clicked().

```
118 { return _keys.count(); }
```

Here is the caller graph for this function:

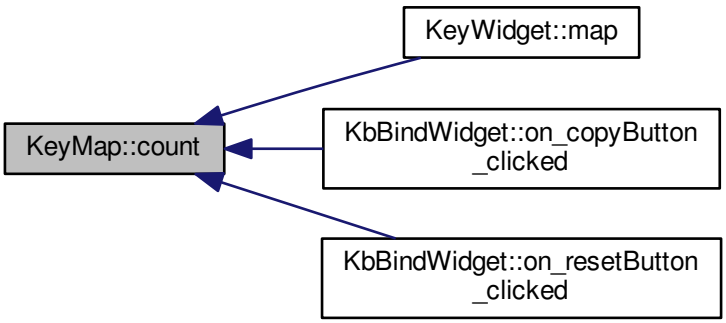

12.42.4.4 QString KeyMap::friendlyName (const QString & *key*, Layout *layout* = US) [static]

Definition at line 611 of file keymap.cpp.

References contains(), K95, KeyMap(), M65, map(), SCIMITAR, and STRAFE.

Referenced by KeyAction::friendlyName(), and RebindWidget::RebindWidget().

```
611                                                    {
612     // Try K95 map first
613     // FIXME: This is an odd function and probably should be refactored
614     // it would probably be best to remove the friendly names from the maps and have a completely separate
        name->friendlyName store
615     KeyMap map(K95, layout);
```

```
616     if(map.contains(key))
617         return map[key].friendlyName();
618
619     // The only key missing from it should be Fn, which is found on STRAFE
620     map = KeyMap(STRAFE, layout);
621     if(map.contains(key))
622         return map[key].friendlyName();
623
624     // Additionally, there are a handful of keys not present on any physical keyboard, but we need names
       for them
625     if(key == "f13" || key == "f14" || key == "f15" || key == "f16" ||
      key == "f17" || key == "f18" || key == "f19" || key == "f20")
626         return key.toUpper();
627     else if(key == "lightup")
628         return "Screen Brightness Up";
629     else if(key == "lightdn")
630         return "Screen Brightness Down";
631     else if(key == "eject" || key == "power")
632         return key[0].toUpper() + key.mid(1);   // capitalize first letter
633
634     // All other names are found on mice
635     map = KeyMap(SCIMITAR, layout);
636     if(map.contains(key))
637         return map[key].friendlyName();
638     map = KeyMap(M65, layout);
639     if(map.contains(key))
640         return map[key].friendlyName();
641
642     // Not found at all
643     return "";
644 }
```

Here is the call graph for this function:

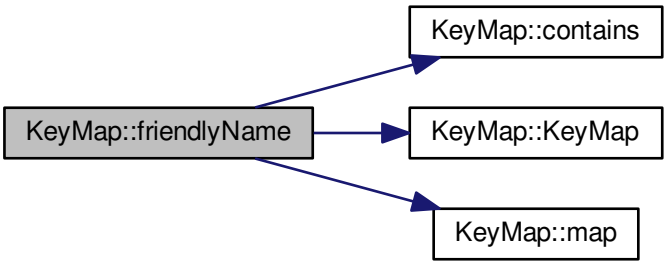

Here is the caller graph for this function:

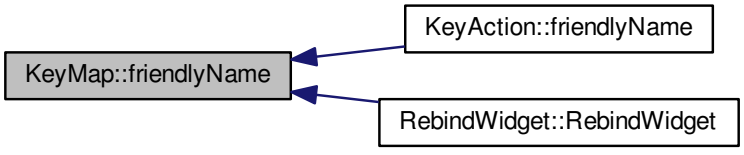

12.42.4.5 KeyMap KeyMap::fromName (const QString & *name*) [static]

Definition at line 535 of file keymap.cpp.

References getLayout(), getModel(), and KeyMap().

Referenced by KbBind::load(), and KbLight::load().

```
535                                          {
536     QStringList list = name.trimmed().split(" ");
537     if(list.length() != 2)
538         return KeyMap();
539     return KeyMap(getModel(list[0]), getLayout(list[1]));
540 }
```

Here is the call graph for this function:

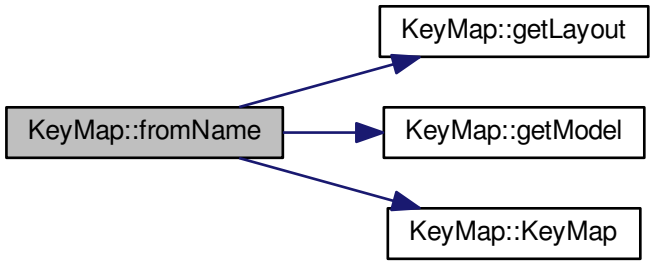

Here is the caller graph for this function:



12.42.4.6 QString KeyMap::fromStorage (const QString & *storage*) [inline]

Definition at line 135 of file keymap.h.

Referenced by KbAnim::KbAnim(), KbBind::load(), and KbLight::load().

```
135 { QHashIterator<QString, Key> i(*this); while(i.hasNext()) { i.next(); const char* s = i.value().
      storageName(); if(s == storage) return i.value().name; } return storage; }
```

Here is the caller graph for this function:

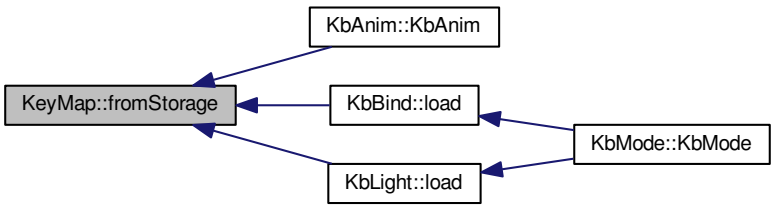

12.42.4.7 KeyMap::Layout KeyMap::getLayout (const QString & *name*) [static]

Definition at line 407 of file keymap.cpp.

References DE, DK, ES, EU, EU_DVORAK, FR, GB, GB_DVORAK, IT, MX, NO, NO_LAYOUT, PL, SE, US, and US_DVORAK.

Referenced by fromName(), SettingsWidget::on_layoutBox_activated(), SettingsWidget::SettingsWidget(), and str-Layout().

```
407                                                 {
408     QString lower = name.toLower();
409     if(lower == "dk")
410         return DK;
411     if(lower == "eu")
412         return EU;
413     if(lower == "eu_dvorak")
414         return EU_DVORAK;
415     if(lower == "gb_dvorak")
416         return GB_DVORAK;
417     if(lower == "us")
418         return US;
419     if(lower == "us_dvorak")
420         return US_DVORAK;
421     if(lower == "fr")
422         return FR;
423     if(lower == "de")
424         return DE;
425     if(lower == "it")
426         return IT;
427     if(lower == "no")
428         return NO;
429     if(lower == "pl")
430         return PL;
431     if(lower == "mx")
432         return MX;
433     if(lower == "es")
434         return ES;
435     if(lower == "se")
436         return SE;
437     if(lower == "gb")
438         return GB;
439     return NO_LAYOUT;
440 }
```

Here is the caller graph for this function:

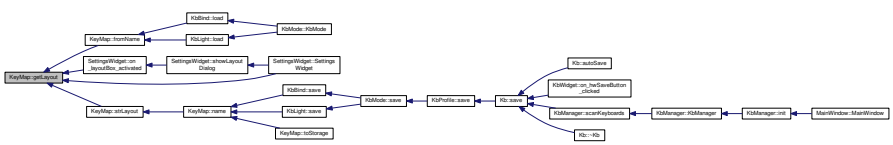

12.42.4.8 QString KeyMap::getLayout (KeyMap::Layout *layout*) [static]

Definition at line 442 of file keymap.cpp.

References DE, DK, ES, EU, EU_DVORAK, FR, GB, GB_DVORAK, IT, MX, NO, PL, SE, US, and US_DVORAK.

```
442                                             {
443     switch(layout){
444     case DK:
445         return "dk";
446     case EU:
447         return "eu";
448     case EU_DVORAK:
449         return "eu_dvorak";
450     case GB:
451         return "gb";
452     case GB_DVORAK:
453         return "gb_dvorak";
454     case US:
455         return "us";
456     case US_DVORAK:
457         return "us_dvorak";
458     case FR:
459         return "fr";
460     case DE:
461         return "de";
462     case IT:
463         return "it";
464     case NO:
465         return "no";
466     case PL:
467         return "pl";
468     case MX:
469         return "mx";
470     case ES:
471         return "es";
472     case SE:
473         return "se";
474     default:
475         return "";
476     }
477 }
```

12.42.4.9 KeyMap::Model KeyMap::getModel (const QString & *name*) [static]

Definition at line 495 of file keymap.cpp.

References K65, K70, K95, M65, NO_MODEL, SABRE, SCIMITAR, and STRAFE.

Referenced by fromName(), Kb::Kb(), and strModel().

```
495                                                 {
496     QString lower = name.toLower();
497     if(lower == "k65")
498         return K65;
499     if(lower == "k70")
500         return K70;
501     if(lower == "k95")
502         return K95;
503     if(lower == "strafe")
504         return STRAFE;
505     if(lower == "m65")
506         return M65;
507     if(lower == "sabre")
508         return SABRE;
509     if(lower == "scimitar")
510         return SCIMITAR;
511     return NO_MODEL;
512 }
```

Here is the caller graph for this function:

12.42.4.10 QString KeyMap::getModel (KeyMap::Model *model*) [static]

Definition at line 514 of file keymap.cpp.

References K65, K70, K95, M65, SABRE, SCIMITAR, and STRAFE.

```
514                                          {
515     switch(model){
516     case K65:
517         return "k65";
518     case K70:
519         return "k70";
520     case K95:
521         return "k95";
522     case STRAFE:
523         return "strafe";
524     case M65:
525         return "m65";
526     case SABRE:
527         return "sabre";
528     case SCIMITAR:
529         return "scimitar";
530     default:
531         return "";
532     }
533 }
```

12.42.4.11 uint KeyMap::height ( ) const [inline]

Definition at line 122 of file keymap.h.

References keyHeight.

Referenced by KeyWidget::drawInfo(), and KeyWidget::map().

```
122 { return keyHeight; }
```

Here is the caller graph for this function:

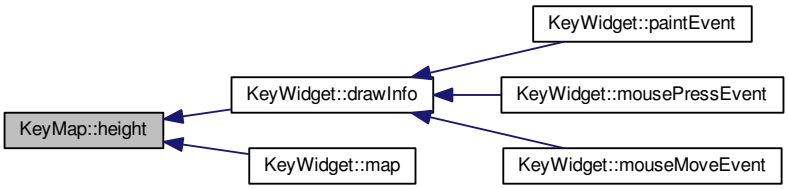

12.42.4.12 static bool KeyMap::isISO (Layout *layout*) [inline], [static]

Definition at line 87 of file keymap.h.

References PL, US, and US_DVORAK.

Referenced by KbBind::isISO(), and RebindWidget::setBind().

```
87 { return layout != US && layout != US_DVORAK && layout !=
      PL; }
```

Here is the caller graph for this function:

12.42.4.13 bool KeyMap::isISO ( ) const [inline]

Definition at line 88 of file keymap.h.

References isISO(), and keyLayout.

Referenced by getMap(), isISO(), Kb::Kb(), and Kb::updateLayout().

```
88 { return isISO(keyLayout); }
```

Here is the call graph for this function:



Here is the caller graph for this function:

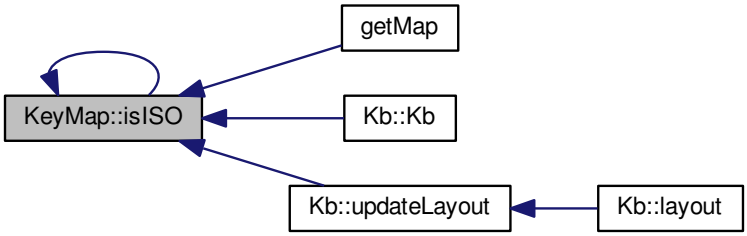

12.42.4.14 static bool KeyMap::isKeyboard (Model *model*) [inline], [static]

Definition at line 93 of file keymap.h.

References isMouse(), and NO_MODEL.

Referenced by KbBind::isKeyboard().

```
93 { return !isMouse(model) && model != NO_MODEL; }
```

Here is the call graph for this function:



Here is the caller graph for this function:

12.42.4.15 bool KeyMap::isKeyboard ( ) const [inline]

Definition at line 94 of file keymap.h.

References isKeyboard(), and keyModel.

Referenced by Kb::isKeyboard(), and isKeyboard().

```
94 { return isKeyboard(keyModel); }
```

Here is the call graph for this function:

Here is the caller graph for this function:



12.42.4.16 static bool KeyMap::isMouse (Model *model*) [inline], [static]

Definition at line 95 of file keymap.h.

References M65, SABRE, and SCIMITAR.

Referenced by KbBind::isMouse(), KeyWidget::map(), KbLightWidget::newSelection(), and KeyWidget::paintEvent().

```
95 { return model == M65 || model == SABRE || model ==
      SCIMITAR; }
```

Here is the caller graph for this function:

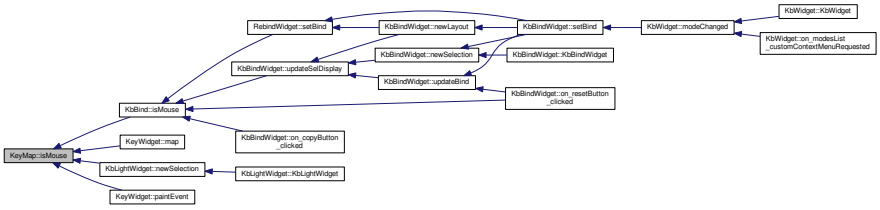

12.42.4.17 bool KeyMap::isMouse ( ) const [inline]

Definition at line 96 of file keymap.h.

References isMouse(), and keyModel.

Referenced by isKeyboard(), Kb::isMouse(), isMouse(), and KeyWidget::paintEvent().

```
96 { return isMouse(keyModel); }
```

Here is the call graph for this function:

Here is the caller graph for this function:

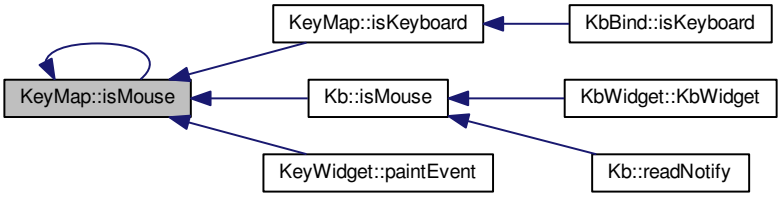

12.42.4.18 Key KeyMap::key (const QString & *name*) const [inline]

Definition at line 125 of file keymap.h.

References _keys.

Referenced by AnimScript::begin(), byPosition(), AnimScript::keypress(), KbBind::noAction(), operator[](), KbBind::setAction(), and toStorage().

```
125 { Key empty = {0,0,0,0,0,0,0,0,0}; return _keys.value(name, empty); }
```

Here is the caller graph for this function:

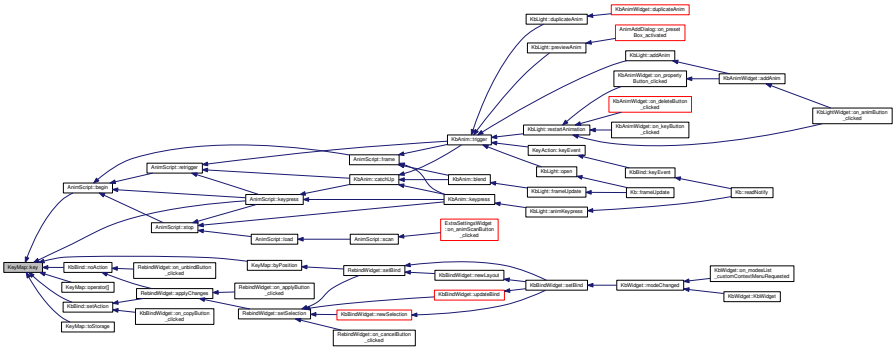

12.42.4.19 QStringList KeyMap::keys ( ) const [inline]

Definition at line 131 of file keymap.h.

References _keys.

Referenced by KeyWidget::mouseReleaseEvent(), KbBindWidget::on_copyButton_clicked(), KbBindWidget::on_resetButton_clicked(), KeyWidget::setAnimation(), KeyWidget::setSelection(), and KbBindWidget::updateBind().

```
131 { return _keys.keys(); }
```

Here is the caller graph for this function:

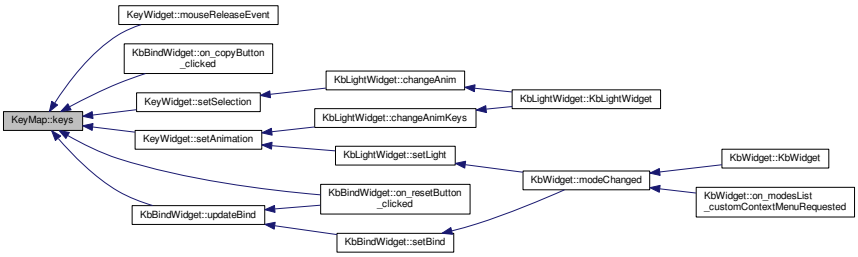

12.42.4.20 Layout KeyMap::layout ( ) const [inline]

Definition at line 114 of file keymap.h.

References keyLayout.

Referenced by KeyAction::friendlyName(), KeyWidget::paintEvent(), and RebindWidget::setBind().

```
114 { return keyLayout; }
```

Here is the caller graph for this function:



12.42.4.21 QStringList KeyMap::layoutNames ( ) [static]

Definition at line 479 of file keymap.cpp.

Referenced by LayoutDialog::LayoutDialog(), and SettingsWidget::SettingsWidget().

```
479                                {
480     return QStringList()
481             << "Danish"
482             << "English (ISO/European)" << "English (ISO/European, Dvorak)"
483             << "English (United Kingdom)" << "English (United Kingdom, Dvorak)"
484             << "English (United States)" << "English (United States, Dvorak)"
485             << "French"
486             << "German"
487             << "Italian"
488             << "Norwegian"
489             << "Polish"
490             << "Spanish (Latin America)"
491             << "Spanish (Spain)"
492             << "Swedish";
493 }
```

Here is the caller graph for this function:

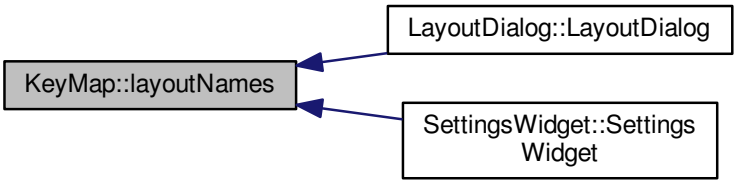

12.42.4.22 KeyMap::Layout KeyMap::locale ( ) [static]

Definition at line 375 of file keymap.cpp.

References DE, DK, ES, FR, GB, IT, MX, NO, PL, SE, and US.

Referenced by SettingsWidget::SettingsWidget().

```
375                         {
376     setlocale(LC_ALL, "");
377     QString loc = setlocale(LC_CTYPE, 0);
378     loc = loc.toLower().replace('_', '-');
379     if(loc.startsWith("dk-"))
380         return KeyMap::DK;
381     else if(loc.startsWith("fr-"))
382         return KeyMap::FR;
383     else if(loc.startsWith("de-"))
384         return KeyMap::DE;
385     else if(loc.startsWith("it-"))
386         return KeyMap::IT;
387     else if(loc.startsWith("pl-"))
388         return KeyMap::PL;
389     else if(loc.startsWith("no-"))
390         return KeyMap::NO;
391     else if(loc.startsWith("es-es"))
392         // Spain uses the ES layout
393         return KeyMap::ES;
394     else if(loc.startsWith("es-"))
395         // Other Spanish locales use MX
396         return KeyMap::MX;
397     else if(loc.startsWith("se-"))
398         return KeyMap::SE;
399     else if(loc.startsWith("en-us") || loc.startsWith("en-au") || loc.startsWith("en-ca") || loc.startsWith
    ("en-hk") || loc.startsWith("en-in") || loc.startsWith("en-nz") || loc.startsWith("en-ph") || loc.startsWith
    ("en-sg") || loc.startsWith("en-za"))
400         // Most English locales use US
401         return KeyMap::US;
402     else
403         // Default to GB
404         return KeyMap::GB;
405 }
```

Here is the caller graph for this function:



12.42.4.23 const QHash<QString, Key>& KeyMap::map ( ) const [inline]

Definition at line 129 of file keymap.h.

References _keys.

Referenced by friendlyName().

```
129 { return _keys; }
```

Here is the caller graph for this function:



12.42.4.24 Model KeyMap::model ( ) const [inline]

Definition at line 113 of file keymap.h.

References keyModel.

Referenced by KeyWidget::mouseMoveEvent(), KeyWidget::paintEvent(), and KPerfWidget::setPerf().

```
113 { return keyModel; }
```

Here is the caller graph for this function:

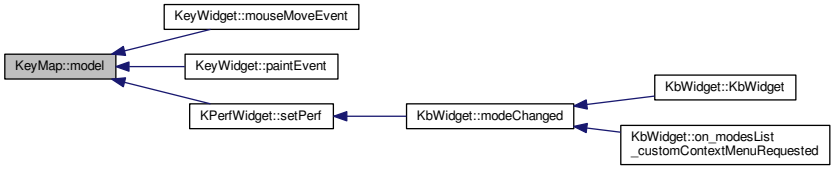

12.42.4.25 int KeyMap::modelHeight (Model *model*) [static],[private]

Definition at line 561 of file keymap.cpp.

References K65, K70, K95, K95_HEIGHT, M65, M65_HEIGHT, SABRE, SCIMITAR, and STRAFE.

```
561                                  {
562     switch(model){
563     case K65:
564     case K70:
565     case K95:
566     case STRAFE:
567         return K95_HEIGHT;
568     case M65:
569     case SABRE:
570     case SCIMITAR:
571         return M65_HEIGHT;
572     default:
573         return 0;
574     }
575 }
```

12.42.4.26 int KeyMap::modelWidth (Model *model*) [static],[private]

Definition at line 542 of file keymap.cpp.

References K65, K65_WIDTH, K70, K70_WIDTH, K95, K95_WIDTH, KSTRAFE_WIDTH, M65, M65_WIDTH, SABRE, SCIMITAR, and STRAFE.

```
542                                  {
543     switch(model){
544     case K65:
545         return K65_WIDTH;
546     case K70:
547         return K70_WIDTH;
548     case K95:
549         return K95_WIDTH;
550     case STRAFE:
551         return KSTRAFE_WIDTH;
552     case M65:
553     case SABRE:
554     case SCIMITAR:
555         return M65_WIDTH;
556     default:
557         return 0;
558     }
559 }
```

12.42.4.27 QString KeyMap::name ( ) const [inline]

Definition at line 115 of file keymap.h.

References strLayout(), and strModel().

Referenced by KbBind::save(), KbLight::save(), and toStorage().

```
115 { return (strModel() + " " + strLayout()).toUpper(); }
```

Here is the call graph for this function:



Here is the caller graph for this function:

12.42.4.28 KeyMap::operator const QHash< QString, Key > & ( ) const [inline]

Definition at line 130 of file keymap.h.

References _keys.

```
130 { return _keys; }
```

12.42.4.29 Key KeyMap::operator[] (const QString & *name*) const [inline]

Definition at line 126 of file keymap.h.

References key().

```
126 { return key(name); }
```

Here is the call graph for this function:



12.42.4.30 QList<Key> KeyMap::positions ( ) const [inline]

Definition at line 132 of file keymap.h.

References _keys.

Referenced by ColorMap::init(), and KeyWidget::selectAll().

```
132 { return _keys.values(); }
```

Here is the caller graph for this function:

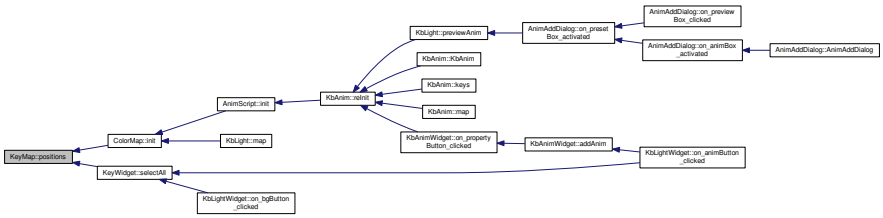

12.42.4.31 QString KeyMap::strLayout ( ) const [inline]

Definition at line 106 of file keymap.h.

References getLayout(), and keyLayout.

Referenced by name().

```
106 { return getLayout(keyLayout); }
```

Here is the call graph for this function:

Here is the caller graph for this function:



12.42.4.32 QString KeyMap::strModel ( ) const [inline]

Definition at line 110 of file keymap.h.

References getModel(), and keyModel.

Referenced by name().

```
110 { return getModel(keyModel); }
```

Here is the call graph for this function:

Here is the caller graph for this function:



12.42.4.33 QString KeyMap::toStorage (const QString & *name*) [inline]

Definition at line 134 of file keymap.h.

References key(), name(), and Key::storageName().

```
134 { const char* storage = key(name).storageName(); if(!storage) return
      name; return storage; }
```

Here is the call graph for this function:

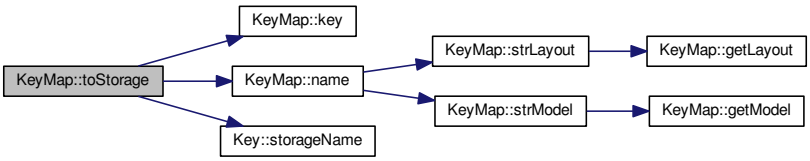

12.42.4.34 uint KeyMap::width ( ) const [inline]

Definition at line 120 of file keymap.h.

References keyWidth.

Referenced by KeyWidget::drawInfo(), and KeyWidget::map().

```
120 { return keyWidth; }
```

Here is the caller graph for this function:

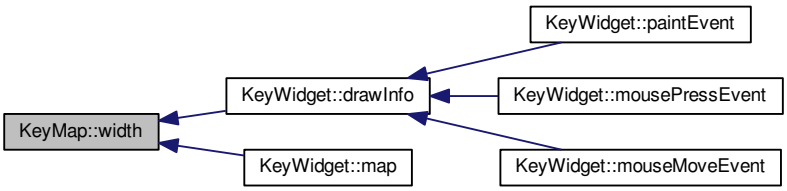

12.42.5 Field Documentation

12.42.5.1 QHash<QString, Key> KeyMap::_keys [private]

Definition at line 147 of file keymap.h.

Referenced by contains(), count(), key(), keys(), map(), operator const QHash< QString, Key > &(), and positions().

12.42.5.2 short KeyMap::keyHeight [private]

Definition at line 148 of file keymap.h.

Referenced by height().

12.42.5.3 Layout KeyMap::keyLayout [private]

Definition at line 150 of file keymap.h.

Referenced by isISO(), layout(), and strLayout().

12.42.5.4 Model KeyMap::keyModel [private]

Definition at line 149 of file keymap.h.

Referenced by isKeyboard(), isMouse(), model(), and strModel().

12.42.5.5 short KeyMap::keyWidth [private]

Definition at line 148 of file keymap.h.

Referenced by width().

The documentation for this class was generated from the following files:

- src/ckb/keymap.h
- src/ckb/keymap.cpp

12.43 KeyWidget Class Reference

`#include <src/ckb/keywidget.h>`

Inheritance diagram for KeyWidget:

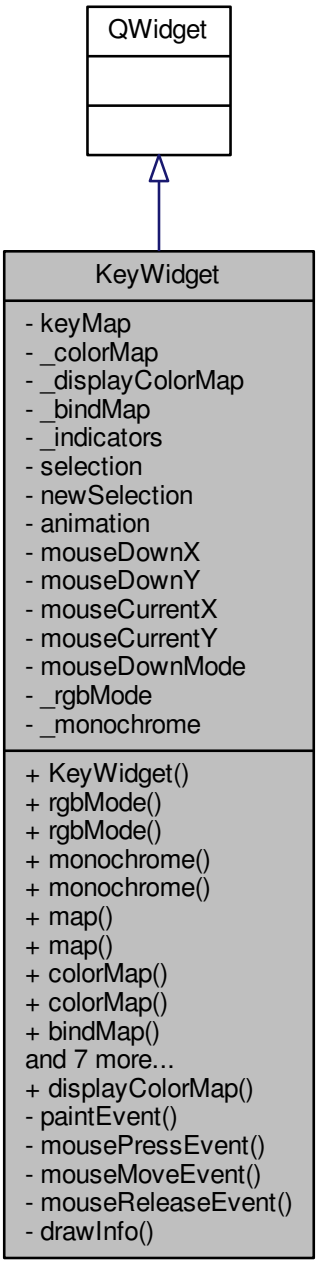

Collaboration diagram for KeyWidget:

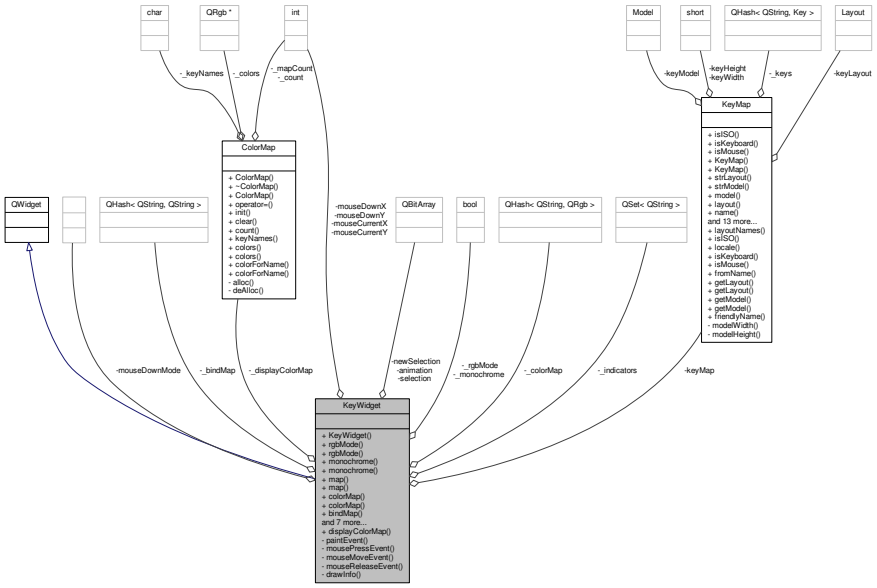

Public Types

- typedef QHash< QString, QString > BindMap

Public Slots

- void displayColorMap (const ColorMap &newDisplayMap, const QSet< QString > &indicators=QSet< QString >())

Signals

- void selectionChanged (QStringList selected)
- void sidelightToggled ()

Public Member Functions

- KeyWidget (QWidget *parent=0, bool rgbMode=true)
- bool rgbMode ()
- void rgbMode (bool newRgbMode)
- bool monochrome ()
- void monochrome (bool newMono)
- const KeyMap & map () const
- void map (const KeyMap &newMap)
- const QColorMap & colorMap () const
- void colorMap (const QColorMap &newColorMap)
- const BindMap & bindMap () const
- void bindMap (const BindMap &newBindMap)
- void setSelection (const QStringList &keys)
- void selectAll ()
- void clearSelection ()

- void setAnimation (const QStringList &keys)
- void setAnimationToSelection ()
- void clearAnimation ()

Private Types

- enum {
  NONE, SET, ADD, SUBTRACT,
  TOGGLE }

Private Member Functions

- void paintEvent (QPaintEvent *)
- void mousePressEvent (QMouseEvent *event)
- void mouseMoveEvent (QMouseEvent *event)
- void mouseReleaseEvent (QMouseEvent *event)
- void drawInfo (float &scale, float &offsetX, float &offsetY, int ratio=1)

Private Attributes

- KeyMap keyMap
- QColorMap _colorMap
- ColorMap _displayColorMap
- BindMap _bindMap
- QSet< QString > _indicators
- QBitArray selection
- QBitArray newSelection
- QBitArray animation
- int mouseDownX
- int mouseDownY
- int mouseCurrentX
- int mouseCurrentY
- enum KeyWidget:: { ... } mouseDownMode
- bool _rgbMode
- bool _monochrome

12.43.1 Detailed Description

Definition at line 11 of file keywidget.h.

12.43.2 Member Typedef Documentation

12.43.2.1 typedef QHash<QString, QString> KeyWidget::BindMap

Definition at line 30 of file keywidget.h.

12.43.3 Member Enumeration Documentation

12.43.3.1 anonymous enum [private]

Enumerator

NONE

SET

ADD

SUBTRACT

TOGGLE

Definition at line 66 of file keywidget.h.

```
66          {
67         NONE,
68         SET,
69         ADD,
70         SUBTRACT,
71         TOGGLE,
72     } mouseDownMode;
```

12.43.4 Constructor & Destructor Documentation

12.43.4.1 KeyWidget::KeyWidget (QWidget * *parent* = 0, bool *rgbMode* = true) [explicit]

Definition at line 17 of file keywidget.cpp.

```
17                                                  :
18     QWidget(parent), mouseDownX(-1), mouseDownY(-1),
       mouseCurrentX(-1), mouseCurrentY(-1), mouseDownMode(
       NONE), _rgbMode(rgbMode), _monochrome(false)
19 {
20     setMouseTracking(true);
21     setAutoFillBackground(false);
22 }
```

12.43.5 Member Function Documentation

12.43.5.1 const BindMap& KeyWidget::bindMap ( ) const [inline]

Definition at line 31 of file keywidget.h.

References _bindMap.

Referenced by KbBindWidget::updateBind().

```
31 { return _bindMap; }
```

Here is the caller graph for this function:



12.43.5.2 void KeyWidget::bindMap (const BindMap & *newBindMap*)

Definition at line 65 of file keywidget.cpp.

References _bindMap.

```
65                                                  {
66     _bindMap = newBindMap;
67     update();
68 }
```

12.43.5.3 void KeyWidget::clearAnimation ( )

Definition at line 632 of file keywidget.cpp.

References animation.

Referenced by KbLightWidget::setLight().

```
632                                 {
633     animation.fill(false);
634     update();
635 }
```

Here is the caller graph for this function:



12.43.5.4 void KeyWidget::clearSelection ( )

Definition at line 605 of file keywidget.cpp.

References mouseDownMode, newSelection, NONE, selection, and selectionChanged().

Referenced by KbLightWidget::changeAnim(), KbBindWidget::setBind(), and KbLightWidget::setLight().

```
605                                 {
606     selection.fill(false);
607     newSelection.fill(false);
608     mouseDownMode = NONE;
609     update();
610     emit selectionChanged(QStringList());
611 }
```

Here is the caller graph for this function:



12.43.5.5 const QColorMap& KeyWidget::colorMap ( ) const [inline]

Definition at line 27 of file keywidget.h.

References _colorMap.

Referenced by KbLightWidget::changeColor(), KbLightWidget::toggleSidelight(), and KbLightWidget::updateLight().

```
27 { return _colorMap; }
```

Here is the caller graph for this function:

12.43.5.6 void KeyWidget::colorMap (const QColorMap & *newColorMap*)

Definition at line 52 of file keywidget.cpp.

References _colorMap.

```
52                                                  {
53     _colorMap = newColorMap;
54     update();
55 }
```

12.43.5.7 void KeyWidget::displayColorMap (const ColorMap & *newDisplayMap*, const QSet< QString > & *indicators* = QSet<QString>()) [slot]

Definition at line 57 of file keywidget.cpp.

References _displayColorMap, and _indicators.

Referenced by KbLightWidget::on_showAnimBox_clicked().

```
57                                                                                  {
58     if(!isVisible())
59         return;
60     _displayColorMap = newDisplayMap;
61     _indicators = indicators;
62     update();
63 }
```

Here is the caller graph for this function:

12.43.5.8 void KeyWidget::drawInfo (float & *scale*, float & *offsetX*, float & *offsetY*, int *ratio* = 1) [private]

Definition at line 43 of file keywidget.cpp.

References KeyMap::height(), KEY_SIZE, keyMap, and KeyMap::width().

Referenced by mouseMoveEvent(), mousePressEvent(), and paintEvent().

```
43                                                                                  {
44     int w = width() * ratio, h = height() * ratio;
45     float xScale = (float)w / (keyMap.width() + KEY_SIZE);
46     float yScale = (float)h / (keyMap.height() + KEY_SIZE);
47     scale = fmin(xScale, yScale);
48     offsetX = (w / scale - keyMap.width()) / 2.f;
49     offsetY = (h / scale - keyMap.height()) / 2.f;
50 }
```

Here is the call graph for this function:

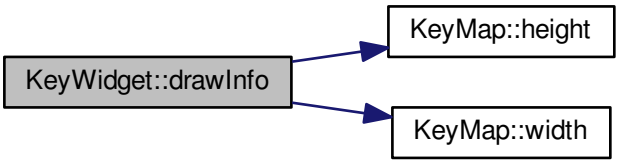

Here is the caller graph for this function:

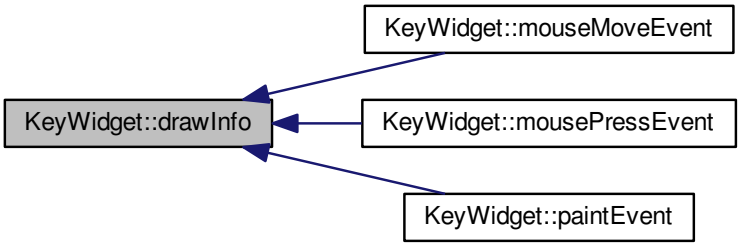

12.43.5.9 const KeyMap& KeyWidget::map ( ) const [inline]

Definition at line 24 of file keywidget.h.

References keyMap.

Referenced by KbBindWidget::newLayout(), and KbLightWidget::updateLight().

```
24 { return keyMap; }
```

Here is the caller graph for this function:



12.43.5.10 void KeyWidget::map (const KeyMap & *newMap*)

Definition at line 24 of file keywidget.cpp.

References animation, KeyMap::count(), KeyMap::height(), KeyMap::isMouse(), KEY_SIZE, keyMap, newSelection, selection, and KeyMap::width().

```
24                                      {
25     keyMap = newMap;
26     selection = QBitArray(keyMap.count());
27     newSelection = QBitArray(keyMap.count());
28     animation = QBitArray(keyMap.count());
29     int width, height;
30     if(keyMap.isMouse()){
31         width = (keyMap.width() + KEY_SIZE) * 2.6;
32         height = (keyMap.height() + KEY_SIZE) * 2.6;
33     } else {
34         width = (keyMap.width() + KEY_SIZE) * 2.3;
35         height = (keyMap.height() + KEY_SIZE) * 2.3;
36     }
37     if(width < 500)
38         width = 500;
39     setFixedSize(width, height);
40     update();
41 }
```

Here is the call graph for this function:

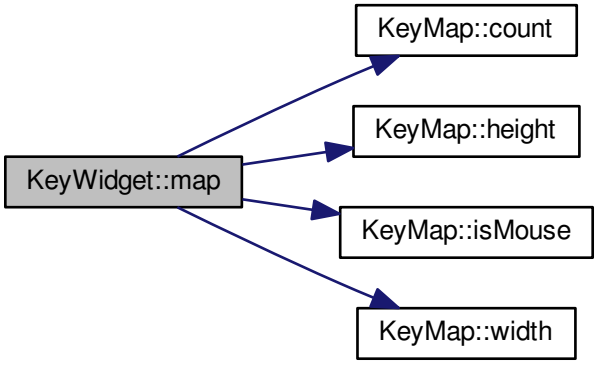

12.43.5.11 bool KeyWidget::monochrome ( ) [inline]

Definition at line 20 of file keywidget.h.

References _monochrome.

Referenced by KbLightWidget::setMonochrome().

```
20 { return _monochrome; }
```

Here is the caller graph for this function:



12.43.5.12 void KeyWidget::monochrome (bool *newMono*) [inline]

Definition at line 21 of file keywidget.h.

References _monochrome.

```
21 { _monochrome = newMono; update(); }
```

12.43.5.13 void KeyWidget::mouseMoveEvent (QMouseEvent * *event*) [private]

Definition at line 475 of file keywidget.cpp.

References _indicators, _rgbMode, drawInfo(), Key::friendlyName(), Key::hasLed, Key::hasScan, Key::height, keyMap, KeyMap::model(), mouseCurrentX, mouseCurrentY, mouseDownMode, mouseDownX, mouseDownY, Key::name, newSelection, NONE, KeyMap::STRAFE, Key::width, Key::x, and Key::y.

```
475                                                 {
476     event->accept();
477     QString tooltip;
478
479     // Find selection rectangle
480     mouseCurrentX = event->x();
481     mouseCurrentY = event->y();
482     float scale, offX, offY;
483     drawInfo(scale, offX, offY);
484     float mx = mouseCurrentX / scale - offX, my = mouseCurrentY / scale - offY;
485     float mx1, mx2, my1, my2;
486     if(mouseCurrentX >= mouseDownX){
487         mx1 = mouseDownX / scale - offX;
488         mx2 = mouseCurrentX / scale - offX;
489     } else {
490         mx1 = mouseCurrentX / scale - offX;
491         mx2 = mouseDownX / scale - offX;
492     }
493     if(mouseCurrentY >= mouseDownY){
494         my1 = mouseDownY / scale - offY;
495         my2 = mouseCurrentY / scale - offY;
496     } else {
497         my1 = mouseCurrentY / scale - offY;
498         my2 = mouseDownY / scale - offY;
499     }
500     // Clear new selection
501     if(mouseDownMode != NONE)
502         newSelection.fill(false);
503     // See if the event hit any keys
504     QHashIterator<QString, Key> k(keyMap);
505     uint i = -1;
506     while(k.hasNext()){
507         k.next();
508         i++;
509         const Key& key = k.value();
510         if((_rgbMode && !key.hasLed)
511                 || (!_rgbMode && !key.hasScan))
512             continue;
513         // Update tooltip with the mouse hover (if any), even if it's not selectable
514         if(fabs(key.x - mx) <= key.width / 2.f - 1.f && fabs(key.y - my) <= key.
```

```
    height / 2.f - 1.f
515                 && tooltip.isEmpty())
516             tooltip = key.friendlyName(false);
517         // on STRAFE Sidelights and indicators can't be assigned color the way other keys are colored
518         if(keyMap.model() == KeyMap::STRAFE && (!strcmp(key.
    name, "lsidel") || !strcmp(key.name, "rsidel") || _indicators.contains(key.
    name))) // FIX: _indicators check fails whenever _indicators is empty because "show animated" is
     unchecked
519             continue;
520         float kx1 = key.x - key.width / 2.f + 1.f;
521         float ky1 = key.y - key.height / 2.f + 1.f;
522         float kx2 = kx1 + key.width - 2.f;
523         float ky2 = ky1 + key.height - 2.f;
524         // If they overlap, add the key to the selection
525         if(!(mx1 >= kx2 || kx1 >= mx2)
526                 && !(my1 >= ky2 || ky1 >= my2)
527                 && mouseDownMode != NONE)
528             newSelection.setBit(i);
529     }
530
531     if(mouseDownMode != NONE)
532         update();
533     setToolTip(tooltip);
534 }
```

Here is the call graph for this function:

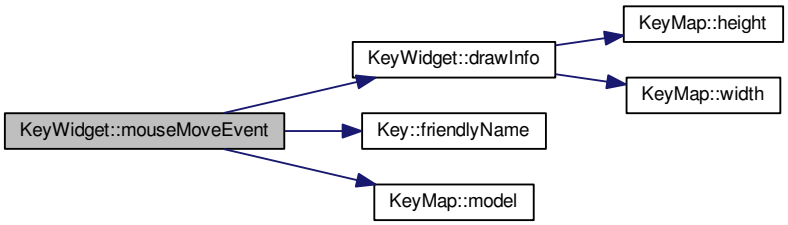

12.43.5.14 void KeyWidget::mousePressEvent (QMouseEvent * *event*) [private]

Definition at line 443 of file keywidget.cpp.

References _rgbMode, ADD, drawInfo(), Key::hasLed, Key::hasScan, Key::height, keyMap, mouseCurrentX, mouseCurrentY, mouseDownMode, mouseDownX, mouseDownY, Key::name, newSelection, SET, sidelightToggled(), SUBTRACT, TOGGLE, Key::width, Key::x, and Key::y.

```
443                                                 {
444     event->accept();
445     mouseDownMode = (event->modifiers() & Qt::AltModifier) ?
    SUBTRACT : (event->modifiers() & Qt::ShiftModifier) ? ADD : (event->modifiers() &
    Qt::ControlModifier) ? TOGGLE : SET;
446     mouseDownX = mouseCurrentX = event->x();
447     mouseDownY = mouseCurrentY = event->y();
448     // See if the event hit a key
449     float scale, offX, offY;
450     drawInfo(scale, offX, offY);
451     float mx = mouseCurrentX / scale - offX, my = mouseCurrentY / scale - offY;
452     QHashIterator<QString, Key> k(keyMap);
453     uint i = -1;
454     while(k.hasNext()){
455         k.next();
456         i++;
457         const Key& key = k.value();
458         if((_rgbMode && !key.hasLed)
459                 || (!_rgbMode && !key.hasScan))
460             continue;
461         if(fabs(key.x - mx) <= key.width / 2.f - 1.f && fabs(key.y - my) <= key.
    height / 2.f - 1.f){
462             // Sidelights can't have a color, but they can be toggled
463             if(!strcmp(key.name, "lsidel") || !strcmp(key.name, "rsidel")){
```

```
464                 emit sidelightToggled(); // get the kblightwidget to record it
465                 update();
466                 break;
467             }
468             newSelection.setBit(i);
469             update();
470             break;
471         }
472     }
473 }
```

Here is the call graph for this function:

12.43.5.15 void KeyWidget::mouseReleaseEvent (QMouseEvent * *event*) [private]

Definition at line 536 of file keywidget.cpp.

References ADD, keyMap, KeyMap::keys(), mouseDownMode, newSelection, NONE, selection, selectionChanged(), SET, SUBTRACT, and TOGGLE.

```
536                                                 {
537     event->accept();
538     if(mouseDownMode == NONE)
539         return;
540     // Apply the new selection
541     switch(mouseDownMode){
542     case SET:
543         selection = newSelection;
544         break;
545     case ADD:
546         selection |= newSelection;
547         break;
548     case SUBTRACT:
549         selection &= ~newSelection;
550         break;
551     case TOGGLE:
552         selection ^= newSelection;
553         break;
554     default:;
555     }
556     // Clear mousedown state.
557     newSelection.fill(false);
558     mouseDownMode = NONE;
559     // Emit signal with the names of the keys
560     QStringList selectedNames;
561     uint i = 0;
562     foreach(const QString& key, keyMap.keys()){
563         if(selection.testBit(i++))
564             selectedNames << key;
565     }
566     emit selectionChanged(selectedNames);
567     update();
568 }
```

Here is the call graph for this function:

12.43.5.16 void KeyWidget::paintEvent (QPaintEvent *) [private]

Definition at line 70 of file keywidget.cpp.

References _bindMap, _colorMap, _displayColorMap, _indicators, _monochrome, _rgbMode, ADD, animation, ColorMap::colorForName(), KbBind::defaultAction(), drawInfo(), KeyMap::EU, KeyMap::EU_DVORAK, Key::friendlyName(), KbBind::globalRemap(), Key::hasLed, Key::hasScan, Key::height, KeyMap::isMouse(), KeyMap::K65, keyMap, KeyMap::layout(), KeyMap::M65, m65Overlay, KeyMap::model(), monoRgb(), mouseCurrentX, mouseCurrentY, mouseDownMode, mouseDownX, mouseDownY, Key::name, newSelection, NONE, sabOverlay, KeyMap::SABRE, KeyMap::SCIMITAR, scimOverlay, selection, SET, KeyMap::STRAFE, SUBTRACT, TOGGLE, Key::width, Key::x, and Key::y.

```
70                                      {
71     const QColor bgColor(68, 64, 64);
72     const QColor keyColor(112, 110, 110);
73     const QColor sniperColor(130, 90, 90);
74     const QColor thumbColor(34, 32, 32);
75     const QColor transparentColor(0, 0, 0, 0);
76     const QColor highlightColor(136, 176, 240);
77     const QColor highlightAnimColor(136, 200, 240);
78     const QColor animColor(112, 200, 110);
79
80     // Determine which keys to highlight
81     QBitArray highlight;
82     switch(mouseDownMode){
83     case SET:
84         highlight = newSelection;
85         break;
86     case ADD:
87         highlight = selection | newSelection;
88         break;
89     case SUBTRACT:
90         highlight = selection & ~newSelection;
91         break;
92     case TOGGLE:
93         highlight = selection ^ newSelection;
94         break;
95     default:
96         highlight = selection;
97     }
98
99     QPainter painter(this);
100 #if QT_VERSION >= QT_VERSION_CHECK(5, 3, 0)
101     int ratio = painter.device()->devicePixelRatio();
102 #else
103     int ratio = 1;
104 #endif
105     int wWidth = width(), wHeight = height();
106     KeyMap::Model model = keyMap.model();
107     KeyMap::Layout layout = keyMap.layout();
108     float scale, offX, offY;
109     drawInfo(scale, offX, offY, ratio);
110     // Draw background
111     painter.setPen(Qt::NoPen);
112     painter.setRenderHint(QPainter::Antialiasing, true);
113
114     if(keyMap.isMouse()){
115         // Draw mouse overlays
116         const QImage* overlay = 0;
117         float xpos = 0.f, ypos = 0.f;
118         if(model == KeyMap::M65){
```

```
119             if(!m65Overlay)
120                 m65Overlay = new QImage(":/img/overlay_m65.png");
121             overlay = m65Overlay;
122             xpos = 2.f;
123             ypos = -2.f;
124         } else if(model == KeyMap::SABRE){
125             if(!sabOverlay)
126                 sabOverlay = new QImage(":/img/overlay_sabre.png");
127             overlay = sabOverlay;
128             xpos = 1.f;
129             ypos = -2.f;
130         } else if(model == KeyMap::SCIMITAR){
131             if(!scimOverlay)
132                 scimOverlay = new QImage(":/img/overlay_scimitar.png");
133             overlay = scimOverlay;
134             xpos = 3.5f;
135             ypos = -2.f;
136         }
137         if(overlay){
138             painter.setBrush(palette().brush(QPalette::Window));
139             painter.drawRect(0, 0, width(), height());
140             float oXScale = scale / 9.f, oYScale = scale / 9.f;             // The overlay has a resolution
     of 9px per keymap unit
141             float x = (xpos + offX) * scale, y = (ypos + offY) * scale;
142             int w = overlay->width() * oXScale, h = overlay->height() * oYScale;
143             // We need to transform the image with QImage::scaled() because painter.drawImage() will
     butcher it, even with smoothing enabled
144             // However, the width/height need to be rounded to integers
145             int iW = round(w), iH = round(h);
146             painter.drawImage(QRectF((x - (iW - w) / 2.f) / ratio, (y - (iH - h) / 2.f) / ratio, iW / ratio
    , iH / ratio), overlay->scaled(iW, iH, Qt::IgnoreAspectRatio, Qt::SmoothTransformation));
147         }
148     } else {
149         // Otherwise, draw a solid background
150         painter.setBrush(QBrush(bgColor));
151         painter.drawRect(0, 0, width(), height());
152     }
153
154     // Draw mouse highlight (if any)
155     if(mouseDownMode != NONE && (mouseDownX !=
    mouseCurrentX || mouseDownY != mouseCurrentY)){
156         int x1 = (mouseDownX > mouseCurrentX) ?
    mouseCurrentX : mouseDownX;
157         int x2 = (mouseDownX > mouseCurrentX) ?
    mouseDownX : mouseCurrentX;
158         int y1 = (mouseDownY > mouseCurrentY) ?
    mouseCurrentY : mouseDownY;
159         int y2 = (mouseDownY > mouseCurrentY) ?
    mouseDownY : mouseCurrentY;
160         painter.setPen(QPen(highlightColor, 0.5));
161         QColor bColor = highlightColor;
162         bColor.setAlpha(128);
163         painter.setBrush(QBrush(bColor));
164         painter.drawRect(x1, y1, x2 - x1, y2 - y1);
165     }
166
167     // Draw key backgrounds on a separate pixmap so that a drop shadow can be applied to them.
168     QPixmap keyBG(wWidth * ratio, wHeight * ratio);
169     keyBG.fill(QColor(0, 0, 0, 0));
170     QPainter bgPainter(&keyBG);
171     bgPainter.setRenderHints(QPainter::Antialiasing | QPainter::TextAntialiasing);
172     bgPainter.setPen(Qt::NoPen);
173     QHashIterator<QString, Key> k(keyMap);
174     uint i = -1;
175     while(k.hasNext()){
176         k.next();
177         i++;
178         const Key& key = k.value();
179         float x = key.x + offX - key.width / 2.f + 1.f;
180         float y = key.y + offY - key.height / 2.f + 1.f;
181         float w = key.width - 2.f;
182         float h = key.height - 2.f;
183         // In RGB mode, ignore keys without LEDs
184         if((_rgbMode && !key.hasLed)
185                 || (!_rgbMode && !key.hasScan))
186             continue;
187         // Set color based on key highlight
188         bgPainter.setOpacity(1.);
189         if(highlight.testBit(i)){
190             if(animation.testBit(i))
191                 bgPainter.setBrush(QBrush(highlightAnimColor));
192             else
193                 bgPainter.setBrush(QBrush(highlightColor));
194         } else if(animation.testBit(i)){
195             bgPainter.setBrush(QBrush(animColor));
196         } else {
197             if(!strcmp(key.name, "sniper"))
```

```
198                 // Sniper key uses a reddish base color instead of the usual grey
199                 bgPainter.setBrush(QBrush(sniperColor));
200             else if(model == KeyMap::SCIMITAR && !strncmp(key.
    name, "thumb", 5) && strcmp(key.name, "thumb"))
201                 // Thumbgrid keys use a black color
202                 bgPainter.setBrush(QBrush(thumbColor));
203             else if(!strcmp(key.name, "lsidel") || !strcmp(key.name, "rsidel") || !strcmp(key.
    name, "logo"))
204                 // Strafe side lights have different background
205                 bgPainter.setBrush(QBrush(transparentColor));
206             else {
207                 bgPainter.setBrush(QBrush(keyColor));
208                 if(KeyMap::isMouse(model))
209                     bgPainter.setOpacity(0.7);
210             }
211         }
212         if(model != KeyMap::STRAFE && (!strcmp(key.name, "mr") || !strcmp(key.
    name, "m1") || !strcmp(key.name, "m2") || !strcmp(key.name, "m3")
213                 || !strcmp(key.name, "light") || !strcmp(key.name, "lock") || (model ==
    KeyMap::K65 && !strcmp(key.name, "mute")))){
214             // Switch keys are circular except for Strafe. All Strafe keys are square
215             x += w / 8.f;
216             y += h / 8.f;
217             w *= 0.75f;
218             h *= 0.75f;
219             bgPainter.drawEllipse(QRectF(x * scale, y * scale, w * scale, h * scale));
220         } else {
221             if(!strcmp(key.name, "enter")){
222                 if(key.height == 24){
223                     // ISO enter key isn't rectangular
224                     y = key.y + 1.f;
225                     h = 10.f;
226                     bgPainter.drawRect(QRectF((x + w - 13.f) * scale, y * scale, 13.f * scale, 22.f * scale
    ));
227                 } else {
228                     // US enter key isn't perfectly centered, needs an extra pixel on the left to appear
     correctly
229                     x -= 1.f;
230                     w += 1.f;
231                 }
232             } else if(!strcmp(key.name, "rshift") || !strcmp(key.name, "stop")){
233                 // A few other keys also need extra pixels
234                 x -= 1.f;
235                 w += 1.f;
236             } else if(!strcmp(key.name, "caps") || !strcmp(key.name, "lshift") || !strcmp(key.
    name, "next")){
237                 w += 1.f;
238             }
239             bgPainter.drawRect(QRectF(x * scale, y * scale, w * scale, h * scale));
240         }
241     }
242
243     // Render the key decorations (RGB -> light circles, binding -> key names) on yet another layer
244     QPixmap decoration(wWidth * ratio, wHeight * ratio);
245     decoration.fill(QColor(0, 0, 0, 0));
246     QPainter decPainter(&decoration);
247     decPainter.setRenderHints(QPainter::Antialiasing | QPainter::TextAntialiasing);
248     if(_rgbMode){
249         // Draw key colors (RGB mode)
250         QHashIterator<QString, Key> k(keyMap);
251         uint i = -1;
252         while(k.hasNext()){
253             k.next();
254             i++;
255             const Key& key = k.value();
256             if(!key.hasLed)
257                 continue;
258             float x = key.x + offX - 1.8f;
259             float y = key.y + offY - 1.8f;
260             float w = 3.6f;
261             float h = 3.6f;
262             // Display a white circle around regular keys, red circle around indicators
263             if(_indicators.contains(key.name))
264                 decPainter.setPen(QPen(QColor(255, 248, 136), 1.5));
265             else
266                 decPainter.setPen(QPen(QColor(255, 255, 255), 1.5));
267             QRgb color;
268             const QRgb* inDisplay = _displayColorMap.
    colorForName(key.name);
269             if(inDisplay)
270                 // Color in display map? Grab it from there
271                 // (monochrome conversion not necessary as this would have been done by the animation)
272                 color = *inDisplay;
273             else {
274                 // Otherwise, read from base map
275                 color = _colorMap.value(k.key());
276                 if(_monochrome)
```

```
277                     color = monoRgb(qRed(color), qGreen(color), qBlue(color));
278             }
279             decPainter.setBrush(QBrush(color));
280             if (model == KeyMap::STRAFE) { // STRAFE custom design and special keys
281                 float kx = key.x + offX - key.width / 2.f + 1.f;
282                 float ky = key.y + offY - key.height / 2.f + 1.f;
283                 float kw = key.width - 2.f;
284                 float kh = key.height - 2.f;
285                 decPainter.setPen(QPen(QColor(255, 255, 255), 1.2)); // less invasive outline to show the
    key color better
286                 if(!strcmp(key.name, "logo")) { // stylized logo
287                     float lx = key.x + offX - key.width / 2.f + 2.f;
288                     float ly = key.y + offY - key.height / 2.f + 2.f;
289                     float lw = key.width - 4.f;
290                     float lh = key.height - 4.f;
291                     QPainterPath logo;
292                     logo.moveTo(lx*scale,(ly+lh)*scale);
293                     logo.quadTo((lx+2.f)*scale,(ly+lh/2.f)*scale,lx*scale,ly*scale);
294                     logo.quadTo((lx+lw)*scale,ly*scale,(lx+lw)*scale,(ly+lh)*scale);
295                     logo.quadTo((lx+lw/2.f)*scale,(ly+lh-4.f)*scale,lx*scale,(ly+lh)*scale);
296                     decPainter.drawPath(logo);
297                     //decPainter.setPen(QPen(Qt::green, 1.2)); //QColor(125,125,125)
298                     //decPainter.drawRect(QRectF(lx * scale, ly * scale, lw * scale, lh * scale)); // don't
    really know why the 12 and 24 make it work here, but they do
299                 } else if(!strcmp(key.name, "lsidel") || !strcmp(key.name, "rsidel")) { // Strafe
    side lights (toggle lights with no animation)
300                     QRadialGradient gradient(QPointF(wWidth/2.f * ratio, wHeight/2.f * ratio), wWidth/2.f *
    ratio);//,QPointF(10, 5));
301                     gradient.setColorAt(0, color);
302                     gradient.setColorAt(0.9, color); // bring up intensity
303                     gradient.setColorAt(1, bgColor);
304                     decPainter.setBrush(QBrush(gradient));
305                     decPainter.setPen(QPen(keyColor, 1.2)); //QColor(125,125,125)
306                     decPainter.drawRect(QRectF(kx * scale, ky * scale - 12 , kw * scale, kh * scale+24));
    // don't really know why the 12 and 24 make it work here, but they do
307                 } else if(_indicators.contains(key.name)) { // FIX: This check fails
    whenever _indicators is empty because "show animated" is unchecked
308                     decPainter.setPen(QPen(QColor(0,0,0,0), 1));    // no outline for the indicators, you
    can't change their color the standard way
309                     decPainter.drawRect(QRectF((kx+2.f) * scale, (ky+2.f) * scale, (kw-4.f) * scale, (kh-4.
    f) * scale)); // square indicators
310                 } else //everything else is a circle, just a tad bigger to show the key color better
311                     decPainter.drawEllipse(QRectF((x-1.f) * scale, (y-1.f) * scale, (w+2.f) * scale, (h+2.f
    ) * scale));
312             } else
313                 decPainter.drawEllipse(QRectF(x * scale, y * scale, w * scale, h * scale));
314         }
315     } else {
316         // Draw key names
317         decPainter.setBrush(Qt::NoBrush);
318         QFont font = painter.font();
319         font.setBold(true);
320         font.setPixelSize(5.25f * scale);
321         QFont font0 = font;
322         QHashIterator<QString, Key> k(keyMap);
323         uint i = -1;
324         while(k.hasNext()){
325             k.next();
326             i++;
327             const Key& key = k.value();
328             if(!key.hasScan)
329                 continue;
330             float x = key.x + offX - key.width / 2.f + 1.f;
331             float y = key.y + offY - key.height / 2.f;
332             float w = key.width - 2.f;
333             float h = key.height;
334             // Print the key's friendly name (with some exceptions)
335             QString keyName = KbBind::globalRemap(key.name);
336             QString name = key.friendlyName(false);
337             name = name.split(" ").last();
338             struct {
339                 const char* keyName, *displayName;
340             } names[] = {
341                 {"light", ""}, {"lock", ""}, {"mute", ""}, {"volup", keyMap.
    model() == KeyMap::K65 ? "))" : ""}, {"voldn", keyMap.
    model() == KeyMap::K65 ? ")" : ""},
342                 {"prtscn",  "PrtScn\nSysRq"}, {"scroll", "Scroll\nLock"}, {"pause", "Pause\nBreak"}, {"stop
    ", ""}, {"prev", "|"}, {"play", "||"}, {"next", "|"},
343                 {"pgup", "Page\nUp"}, {"pgdn", "Page\nDown"}, {"numlock", "Num\nLock"},
344                 {"caps", "Caps"}, {"lshift", "Shift"}, {"rshift", "Shift"},
345 #ifdef Q_OS_MACX
346                 {"lctrl", ""}, {"rctrl", ""}, {"lwin", ""}, {"rwin", ""}, {"lalt", ""}, {"ralt", ""},
347 #else
348                 {"lctrl", "Ctrl"}, {"rctrl", "Ctrl"}, {"lwin", ""}, {"rwin", ""}, {"lalt", "Alt"}, {"ralt
    ", "Alt"},
349 #endif
350                 {"rmenu", ""}, {"up", ""}, {"left", ""}, {"down", ""}, {"right", ""}, {"fn","Fn"},
```

```
351                 {"mouse1", ""}, {"mouse2", ""}, {"mouse3", ""}, {"dpiup", ""}, {"dpidn", ""}, {"wheelup"
    , ""}, {"wheeldn", ""}, {"dpi", ""}, {"mouse5", ""}, {"mouse4", ""}, {"sniper", ""}
352             };
353             for(uint k = 0; k < sizeof(names) / sizeof(names[0]); k++){
354                 if(keyName == names[k].keyName){
355                     name = names[k].displayName;
356                     break;
357                 }
358             }
359             if(keyName == "thumb1" && model == KeyMap::SABRE)
360                 name = "";
361             if(keyName == "mr" || keyName == "m1" || keyName == "m2" || keyName == "m3" || keyName == "up"
    || keyName == "down" || keyName == "left" || keyName == "right")
362                 // Use a smaller size for MR, M1 - M3, and arrow keys
363                 font.setPixelSize(font.pixelSize() * 0.75);
364             else if(keyName == "end")
365                 // Use a smaller size for "End" to match everything else in that area
366                 font.setPixelSize(font.pixelSize() * 0.65);
367             else if(keyName == "light"
368 #ifndef Q_OS_MACX
369                     || keyName == "lwin" || keyName == "rwin"
370 #endif
371                     )
372                 // Use a larger font size for Super (Linux only) and Brightness to compensate for the
     unicode symbols looking smaller
373                 font.setPixelSize(font.pixelSize() * 1.3);
374             if((layout == KeyMap::EU || layout == KeyMap::EU_DVORAK) && (keyName
     == "hash" || keyName == "bslash_iso"))
375                 // Don't differentiate backslashes on the EU layout
376                 name = "\\";
377             // Determine the appropriate size to draw the text at
378             decPainter.setFont(font);
379             QRectF rect(x * scale, y * scale - 1, w * scale, h * scale);
380             int flags = Qt::AlignHCenter | Qt::AlignVCenter | Qt::TextWordWrap;
381             QRectF bounds = decPainter.boundingRect(rect, flags, name);
382             while((bounds.height() >= rect.height() - 8. || bounds.width() >= rect.width() - 2.) && font.
    pixelSize() >= 5){
383                 // Scale font size down until it fits inside the key
384                 font.setPixelSize(font.pixelSize() - 2);
385                 decPainter.setFont(font);
386                 bounds = decPainter.boundingRect(rect, flags, name);
387             }
388             // Pick color based on key function
389             QString bind = _bindMap.value(key.name);
390             QString def = KbBind::defaultAction(key.name);
391             if(bind.isEmpty())
392                 // Unbound - red
393                 decPainter.setPen(QColor(255, 136, 136));
394             else if(KeyAction(bind).isProgram())
395                 // Custom program - orange
396                 decPainter.setPen(QColor(255, 224, 192));
397             else if(KeyAction(bind).isSpecial() && (bind == def || !
    KeyAction(def).isSpecial()))
398                 // Special function - blue (only if not mapped to a different function - if a special
     function is remapped, color it yellow)
399                 decPainter.setPen(QColor(128, 224, 255));
400             else if(KeyAction(bind).isMedia() && (bind == def || !
    KeyAction(def).isMedia()))
401                 // Media key - green
402                 decPainter.setPen(QColor(160, 255, 168));
403             else if(bind == def)
404                 // Standard key - white
405                 decPainter.setPen(QColor(255, 255, 255));
406             else
407                 // Remapped key - yellow
408                 decPainter.setPen(QColor(255, 248, 128));
409             decPainter.drawText(rect, flags, name);
410             font = font0;
411         }
412     }
413     // Create drop shadow effects
414     QGraphicsDropShadowEffect* bgEffect = new QGraphicsDropShadowEffect;  // Have to use "new", creating
     these on the stack causes a crash...
415     bgEffect->setBlurRadius(2.);
416     bgEffect->setColor(QColor(0, 0, 0, 32));
417     bgEffect->setOffset(0, 1);
418     QGraphicsDropShadowEffect* decEffect = new QGraphicsDropShadowEffect;
419     decEffect->setBlurRadius(4.);
420     decEffect->setColor(QColor(0, 0, 0, 104));
421     decEffect->setOffset(0, 1);
422     // Apply them to the pixmaps
423     QGraphicsPixmapItem* bgItem = new QGraphicsPixmapItem(keyBG);
424     bgItem->setGraphicsEffect(bgEffect);
425     QGraphicsPixmapItem* decItem = new QGraphicsPixmapItem(decoration);
426     decItem->setGraphicsEffect(decEffect);
427     // Render everything
428     QGraphicsScene* scene = new QGraphicsScene;
```

```
429     scene->addItem(bgItem);
430     scene->addItem(decItem);
431     // It has to be rendered onto yet another pixmap or else DPI scaling will look terrible...
432     QPixmap final(wWidth * ratio, wHeight * ratio);
433     final.fill(QColor(0, 0, 0, 0));
434     QPainter finalPainter(&final);
435     scene->render(&finalPainter, QRectF(0, 0, wWidth * ratio, wHeight * ratio), QRectF(0, 0, wWidth * ratio
      , wHeight * ratio));
436     delete scene;   // <- Automatically cleans up the rest of the objects
437 #if QT_VERSION >= QT_VERSION_CHECK(5, 3, 0)
438     final.setDevicePixelRatio(ratio);
439 #endif
440     painter.drawPixmap(QPointF(0., 0.), final);
441 }
```

Here is the call graph for this function:

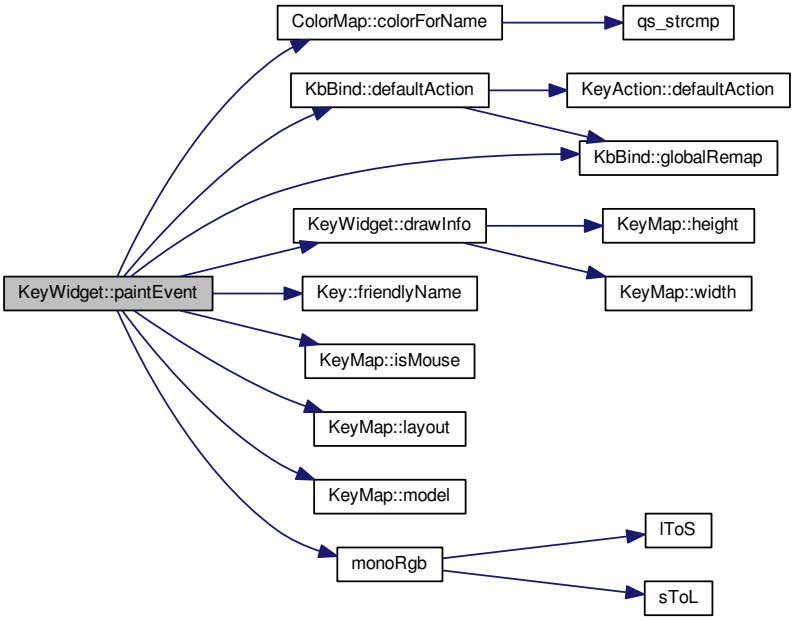

12.43.5.17 bool KeyWidget::rgbMode ( ) [inline]

Definition at line 17 of file keywidget.h.

References _rgbMode.

Referenced by KbBindWidget::KbBindWidget().

```
17 { return _rgbMode; }
```

Here is the caller graph for this function:



12.43.5.18 void KeyWidget::rgbMode (bool *newRgbMode*) [inline]

Definition at line 18 of file keywidget.h.

References _rgbMode.

```
18 { _rgbMode = newRgbMode; update(); }
```

12.43.5.19 void KeyWidget::selectAll ( )

Definition at line 584 of file keywidget.cpp.

References _rgbMode, Key::hasLed, Key::hasScan, keyMap, mouseDownMode, Key::name, newSelection, NONE, KeyMap::positions(), selection, and selectionChanged().

Referenced by KbLightWidget::on_animButton_clicked(), and KbLightWidget::on_bgButton_clicked().

```
584                          {
585     selection.fill(false);
586     // Fill the selection with all keys that have an LED/scancode (depending on widget mode)
587     int i = 0;
588     QStringList selectedNames;
589     foreach(const Key& key, keyMap.positions()){
590         // Sidelights can't be selected
591         if(strcmp(key.name, "lsidel") && strcmp(key.name, "rsidel")
592            && ((_rgbMode && key.hasLed) || !(_rgbMode && key.
    hasScan))){
593             selection.setBit(i);
594             selectedNames << key.name;
595         }
596         i++;
597     }
598     // Clear mousedown state
599     newSelection.fill(false);
600     mouseDownMode = NONE;
601     update();
602     emit selectionChanged(selectedNames);
603 }
```

Here is the call graph for this function:

Here is the caller graph for this function:

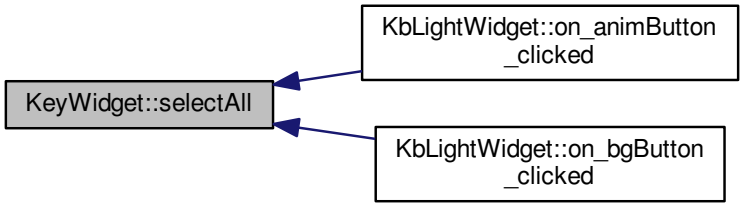

12.43.5.20 void KeyWidget::selectionChanged (QStringList *selected*) [signal]

Definition at line 164 of file moc_keywidget.cpp.

Referenced by clearSelection(), mouseReleaseEvent(), selectAll(), and setSelection().

```
165 {
166     void *_a[] = { Q_NULLPTR, const_cast<void*>(reinterpret_cast<const void*>(&_t1)) };
167     QMetaObject::activate(this, &staticMetaObject, 0, _a);
168 }
```

Here is the caller graph for this function:

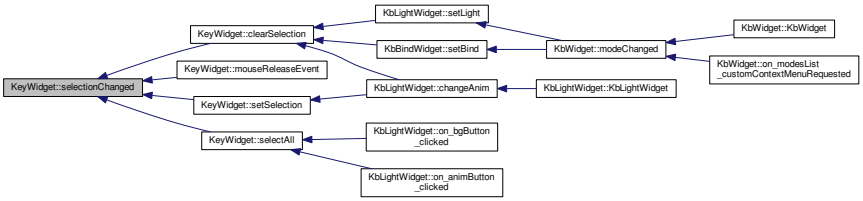

12.43.5.21 void KeyWidget::setAnimation (const QStringList & *keys*)

Definition at line 613 of file keywidget.cpp.

References animation, keyMap, and KeyMap::keys().

Referenced by KbLightWidget::changeAnimKeys(), and KbLightWidget::setLight().

```
613                                                 {
614     animation.fill(false);
615     QStringList allNames = keyMap.keys();
616     foreach(const QString& key, keys){
617         // Sidelights can't be selected
618         if(!strcmp(key.toLatin1(), "lsidel") || !strcmp(key.toLatin1(), "rsidel"))
619             continue;
620         int index = allNames.indexOf(key);
621         if(index >= 0)
622             animation.setBit(index);
623     }
624     update();
625 }
```

Here is the call graph for this function:



Here is the caller graph for this function:



12.43.5.22 void KeyWidget::setAnimationToSelection ( )

Definition at line 627 of file keywidget.cpp.

References animation, and selection.

Referenced by KbLightWidget::changeAnim().

```
627                                         {
628     animation = selection;
629     update();
630 }
```

Here is the caller graph for this function:

12.43.5.23 void KeyWidget::setSelection (const QStringList & *keys*)

Definition at line 570 of file keywidget.cpp.

References keyMap, KeyMap::keys(), mouseDownMode, newSelection, NONE, selection, and selectionChanged().

Referenced by KbLightWidget::changeAnim().

```
570                                                 {
571     selection.fill(false);
572     QStringList allNames = keyMap.keys();
573     foreach(const QString& key, keys){
574         int index = allNames.indexOf(key);
575         if(index >= 0)
```

```
576             selection.setBit(index);
577     }
578     newSelection.fill(false);
579     mouseDownMode = NONE;
580     update();
581     emit selectionChanged(keys);
582 }
```

Here is the call graph for this function:



Here is the caller graph for this function:



12.43.5.24 void KeyWidget::sidelightToggled ( ) [signal]

Definition at line 171 of file moc_keywidget.cpp.

Referenced by mousePressEvent().

```
172 {
173     QMetaObject::activate(this, &staticMetaObject, 1, Q_NULLPTR);
174 }
```

Here is the caller graph for this function:

12.43.6 Field Documentation

12.43.6.1 BindMap KeyWidget::_bindMap [private]

Definition at line 58 of file keywidget.h.

Referenced by bindMap(), and paintEvent().

12.43.6.2 QColorMap KeyWidget::_colorMap [private]

Definition at line 56 of file keywidget.h.

Referenced by colorMap(), and paintEvent().

12.43.6.3 ColorMap KeyWidget::_displayColorMap [private]

Definition at line 57 of file keywidget.h.

Referenced by displayColorMap(), and paintEvent().

12.43.6.4 QSet<QString> KeyWidget::_indicators [private]

Definition at line 59 of file keywidget.h.

Referenced by displayColorMap(), mouseMoveEvent(), and paintEvent().

12.43.6.5 bool KeyWidget::_monochrome [private]

Definition at line 73 of file keywidget.h.

Referenced by monochrome(), and paintEvent().

12.43.6.6 bool KeyWidget::_rgbMode [private]

Definition at line 73 of file keywidget.h.

Referenced by mouseMoveEvent(), mousePressEvent(), paintEvent(), rgbMode(), and selectAll().

12.43.6.7 QBitArray KeyWidget::animation [private]

Definition at line 63 of file keywidget.h.

Referenced by clearAnimation(), map(), paintEvent(), setAnimation(), and setAnimationToSelection().

12.43.6.8 KeyMap KeyWidget::keyMap [private]

Definition at line 55 of file keywidget.h.

Referenced by drawInfo(), map(), mouseMoveEvent(), mousePressEvent(), mouseReleaseEvent(), paintEvent(), selectAll(), setAnimation(), and setSelection().

12.43.6.9 int KeyWidget::mouseCurrentX [private]

Definition at line 65 of file keywidget.h.

Referenced by mouseMoveEvent(), mousePressEvent(), and paintEvent().

12.43.6.10 int KeyWidget::mouseCurrentY [private]

Definition at line 65 of file keywidget.h.

Referenced by mouseMoveEvent(), mousePressEvent(), and paintEvent().

12.43.6.11 enum { ... } KeyWidget::mouseDownMode [private]

Referenced by clearSelection(), mouseMoveEvent(), mousePressEvent(), mouseReleaseEvent(), paintEvent(), selectAll(), and setSelection().

12.43.6.12 int KeyWidget::mouseDownX [private]

Definition at line 64 of file keywidget.h.

Referenced by mouseMoveEvent(), mousePressEvent(), and paintEvent().

12.43.6.13 int KeyWidget::mouseDownY [private]

Definition at line 64 of file keywidget.h.

Referenced by mouseMoveEvent(), mousePressEvent(), and paintEvent().

12.43.6.14 QBitArray KeyWidget::newSelection [private]

Definition at line 62 of file keywidget.h.

Referenced by clearSelection(), map(), mouseMoveEvent(), mousePressEvent(), mouseReleaseEvent(), paintEvent(), selectAll(), and setSelection().

12.43.6.15 QBitArray KeyWidget::selection [private]

Definition at line 61 of file keywidget.h.

Referenced by clearSelection(), map(), mouseReleaseEvent(), paintEvent(), selectAll(), setAnimationToSelection(), and setSelection().

The documentation for this class was generated from the following files:

- src/ckb/keywidget.h
- src/ckb/keywidget.cpp
- src/ckb/release/moc_keywidget.cpp

12.44 Ui::KPerfWidget Class Reference

`#include <src/ckb/ui_kperfwidget.h>`

Inheritance diagram for Ui::KPerfWidget:

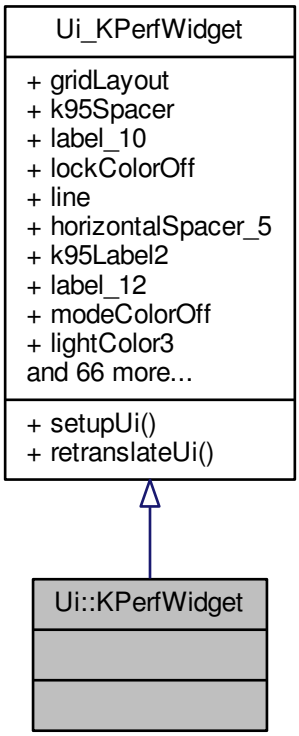

Collaboration diagram for Ui::KPerfWidget:

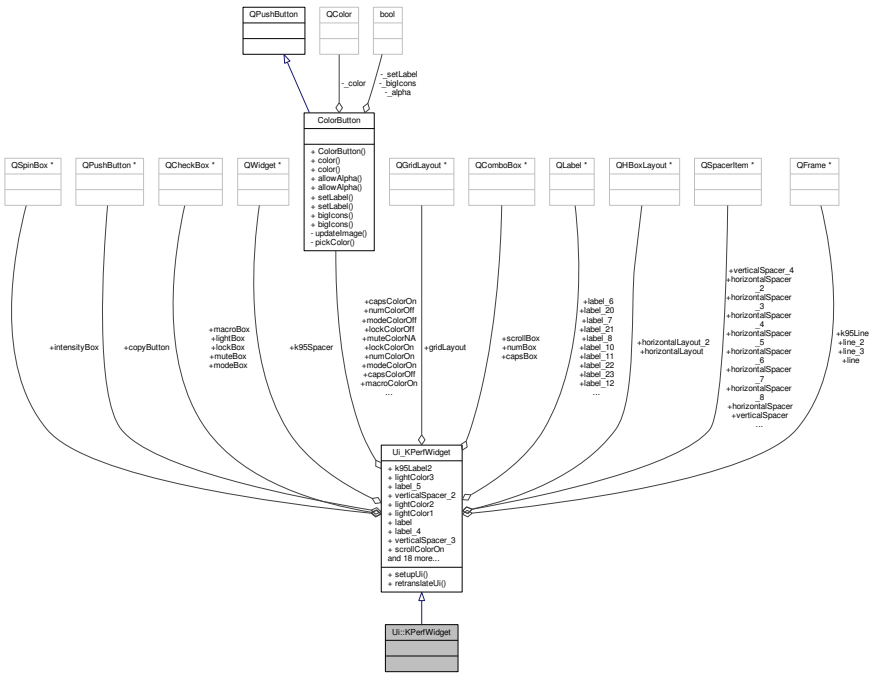

Public Member Functions

- void setupUi (QWidget *KPerfWidget)
- void retranslateUi (QWidget *KPerfWidget)

Data Fields

- QGridLayout * gridLayout
- QWidget * k95Spacer
- QLabel * label_10
- ColorButton * lockColorOff
- QFrame * line
- QSpacerItem * horizontalSpacer_5
- QLabel * k95Label2
- QLabel * label_12
- ColorButton * modeColorOff
- ColorButton * lightColor3
- QSpacerItem * horizontalSpacer
- QCheckBox * lockBox
- ColorButton * modeColorOn
- QCheckBox * macroBox
- ColorButton * numColorOn
- QComboBox * numBox
- QLabel * label_5
- QSpacerItem * verticalSpacer_2
- ColorButton * lightColor2
- QSpacerItem * horizontalSpacer_7
- QLabel * label_8

- QCheckBox * lightBox
- ColorButton * lightColor1
- QSpacerItem * verticalSpacer_4
- QLabel * label_6
- QLabel * label
- QSpacerItem * horizontalSpacer_6
- ColorButton * lockColorOn
- QLabel * label_4
- QSpacerItem * verticalSpacer
- QSpacerItem * verticalSpacer_3
- QCheckBox * modeBox
- ColorButton * capsColorOff
- ColorButton * numColorOff
- ColorButton * capsColorOn
- QFrame * line_3
- QLabel * label_22
- QComboBox * scrollBox
- QLabel * label_7
- ColorButton * scrollColorOn
- QComboBox * capsBox
- ColorButton * scrollColorOff
- QCheckBox * muteBox
- ColorButton * muteColorOn
- ColorButton * macroColorOff
- QLabel * label_3
- ColorButton * muteColorOff
- QLabel * k95Label3
- ColorButton * macroColorOn
- ColorButton * muteColorNA
- QLabel * label_19
- QFrame * k95Line
- QLabel * label_21
- QLabel * label_24
- QLabel * label_20
- QLabel * label_16
- QLabel * label_14
- QLabel * label_18
- QSpacerItem * horizontalSpacer_2
- QLabel * label_15
- QLabel * k95Label4
- QLabel * label_17
- QLabel * label_11
- QLabel * label_23
- QLabel * k95Label1
- QHBoxLayout * horizontalLayout_2
- QPushButton * copyButton
- QSpacerItem * horizontalSpacer_8
- QHBoxLayout * horizontalLayout
- QLabel * label_2
- QSpacerItem * horizontalSpacer_4
- QSpinBox * intensityBox
- QSpacerItem * horizontalSpacer_3
- QLabel * k95Label5
- QFrame * line_2
- QLabel * k95Label6

12.44.1 Detailed Description

Definition at line 677 of file ui_kperfwidget.h.

12.44.2 Member Function Documentation

12.44.2.1 void Ui_KPerfWidget::retranslateUi (QWidget * *KPerfWidget*) [inline],[inherited]

Definition at line 589 of file ui_kperfwidget.h.

References Ui_KPerfWidget::capsBox, Ui_KPerfWidget::capsColorOff, Ui_KPerfWidget::capsColorOn, Ui_KPerfWidget::copyButton, Ui_KPerfWidget::intensityBox, Ui_KPerfWidget::k95Label1, Ui_KPerfWidget::k95Label2, Ui_KPerfWidget::k95Label3, Ui_KPerfWidget::k95Label4, Ui_KPerfWidget::k95Label5, Ui_KPerfWidget::k95Label6, Ui_KPerfWidget::label, Ui_KPerfWidget::label_10, Ui_KPerfWidget::label_11, Ui_KPerfWidget::label_12, Ui_KPerfWidget::label_14, Ui_KPerfWidget::label_15, Ui_KPerfWidget::label_16, Ui_KPerfWidget::label_17, Ui_KPerfWidget::label_18, Ui_KPerfWidget::label_19, Ui_KPerfWidget::label_2, Ui_KPerfWidget::label_20, Ui_KPerfWidget::label_21, Ui_KPerfWidget::label_22, Ui_KPerfWidget::label_23, Ui_KPerfWidget::label_24, Ui_KPerfWidget::label_3, Ui_KPerfWidget::label_4, Ui_KPerfWidget::label_5, Ui_KPerfWidget::label_6, Ui_KPerfWidget::label_7, Ui_KPerfWidget::label_8, Ui_KPerfWidget::lightBox, Ui_KPerfWidget::lightColor1, Ui_KPerfWidget::lightColor2, Ui_KPerfWidget::lightColor3, Ui_KPerfWidget::lockBox, Ui_KPerfWidget::lockColorOff, Ui_KPerfWidget::lockColorOn, Ui_KPerfWidget::macroBox, Ui_KPerfWidget::macroColorOff, Ui_KPerfWidget::macroColorOn, Ui_KPerfWidget::modeBox, Ui_KPerfWidget::modeColorOff, Ui_KPerfWidget::modeColorOn, Ui_KPerfWidget::muteBox, Ui_KPerfWidget::muteColorNA, Ui_KPerfWidget::muteColorOff, Ui_KPerfWidget::muteColorOn, Ui_KPerfWidget::numBox, Ui_KPerfWidget::numColorOff, Ui_KPerfWidget::numColorOn, Ui_KPerfWidget::scrollBox, Ui_KPerfWidget::scrollColorOff, and Ui_KPerfWidget::scrollColorOn.

Referenced by Ui_KPerfWidget::setupUi().

```
590     {
591         KPerfWidget->setWindowTitle(QApplication::translate("KPerfWidget", "Form", Q_NULLPTR));
592         label_10->setText(QApplication::translate("KPerfWidget", "100%", Q_NULLPTR));
593         lockColorOff->setText(QString());
594         k95Label2->setText(QApplication::translate("KPerfWidget", "On", Q_NULLPTR));
595         label_12->setText(QApplication::translate("KPerfWidget", "On", Q_NULLPTR));
596         modeColorOff->setText(QString());
597         lightColor3->setText(QString());
598         lockBox->setText(QApplication::translate("KPerfWidget", "Indicate Windows Lock:", Q_NULLPTR)
    );
599         modeColorOn->setText(QString());
600         macroBox->setText(QApplication::translate("KPerfWidget", "Indicate macro recording:",
    Q_NULLPTR));
601         numColorOn->setText(QString());
602         numBox->clear();
603         numBox->insertItems(0, QStringList()
604          << QApplication::translate("KPerfWidget", "Normal", Q_NULLPTR)
605          << QApplication::translate("KPerfWidget", "Always on", Q_NULLPTR)
606          << QApplication::translate("KPerfWidget", "Always off", Q_NULLPTR)
607          << QApplication::translate("KPerfWidget", "RGB indicator", Q_NULLPTR)
608          << QApplication::translate("KPerfWidget", "RGB + normal", Q_NULLPTR)
609         );
610         label_5->setText(QApplication::translate("KPerfWidget", "Num lock:", Q_NULLPTR));
611         lightColor2->setText(QString());
612         label_8->setText(QApplication::translate("KPerfWidget", "Note: many desktop environments do
     not use scroll lock. The indicator may not turn on even when enabled.", Q_NULLPTR));
613         lightBox->setText(QApplication::translate("KPerfWidget", "Indicate brightness:", Q_NULLPTR)
    );
614         lightColor1->setText(QString());
615         label_6->setText(QApplication::translate("KPerfWidget", "Caps lock:", Q_NULLPTR));
616         label->setText(QApplication::translate("KPerfWidget", "Miscellaneous", Q_NULLPTR));
617         lockColorOn->setText(QString());
618         label_4->setText(QApplication::translate("KPerfWidget", "Lock lights", Q_NULLPTR));
619         modeBox->setText(QApplication::translate("KPerfWidget", "Indicate current mode:", Q_NULLPTR)
    );
620         capsColorOff->setText(QString());
621         numColorOff->setText(QString());
622         capsColorOn->setText(QString());
623         label_22->setText(QApplication::translate("KPerfWidget", "Off", Q_NULLPTR));
624         scrollBox->clear();
625         scrollBox->insertItems(0, QStringList()
626          << QApplication::translate("KPerfWidget", "Normal", Q_NULLPTR)
627          << QApplication::translate("KPerfWidget", "Always on", Q_NULLPTR)
628          << QApplication::translate("KPerfWidget", "Always off", Q_NULLPTR)
629          << QApplication::translate("KPerfWidget", "RGB indicator", Q_NULLPTR)
```

```
630          << QApplication::translate("KPerfWidget", "RGB + normal", Q_NULLPTR)
631         );
632         label_7->setText(QApplication::translate("KPerfWidget", "Scroll lock:", Q_NULLPTR));
633         scrollColorOn->setText(QString());
634         capsBox->clear();
635         capsBox->insertItems(0, QStringList()
636          << QApplication::translate("KPerfWidget", "Normal", Q_NULLPTR)
637          << QApplication::translate("KPerfWidget", "Always on", Q_NULLPTR)
638          << QApplication::translate("KPerfWidget", "Always off", Q_NULLPTR)
639          << QApplication::translate("KPerfWidget", "RGB indicator", Q_NULLPTR)
640          << QApplication::translate("KPerfWidget", "RGB + normal", Q_NULLPTR)
641         );
642         scrollColorOff->setText(QString());
643         muteBox->setText(QApplication::translate("KPerfWidget", "Indicate mute:", Q_NULLPTR));
644         muteColorOn->setText(QString());
645         macroColorOff->setText(QString());
646         label_3->setText(QApplication::translate("KPerfWidget", "Top row", Q_NULLPTR));
647         muteColorOff->setText(QString());
648         k95Label3->setText(QApplication::translate("KPerfWidget", "Off", Q_NULLPTR));
649         macroColorOn->setText(QString());
650 #ifndef QT_NO_TOOLTIP
651         muteColorNA->setToolTip(QApplication::translate("KPerfWidget", "If the sound device does
       not support muting, or if mute status is unknown, this color will be displayed.", Q_NULLPTR));
652 #endif // QT_NO_TOOLTIP
653         muteColorNA->setText(QString());
654         label_19->setText(QApplication::translate("KPerfWidget", "On", Q_NULLPTR));
655         label_21->setText(QApplication::translate("KPerfWidget", "On", Q_NULLPTR));
656         label_24->setText(QApplication::translate("KPerfWidget", "Off", Q_NULLPTR));
657         label_20->setText(QApplication::translate("KPerfWidget", "On", Q_NULLPTR));
658         label_16->setText(QApplication::translate("KPerfWidget", "67%", Q_NULLPTR));
659         label_14->setText(QApplication::translate("KPerfWidget", "Off", Q_NULLPTR));
660         label_18->setText(QApplication::translate("KPerfWidget", "33%", Q_NULLPTR));
661         label_15->setText(QApplication::translate("KPerfWidget", "Off", Q_NULLPTR));
662         k95Label4->setText(QApplication::translate("KPerfWidget", "On", Q_NULLPTR));
663         label_17->setText(QApplication::translate("KPerfWidget", "Unknown", Q_NULLPTR));
664         label_11->setText(QApplication::translate("KPerfWidget", "On", Q_NULLPTR));
665         label_23->setText(QApplication::translate("KPerfWidget", "Off", Q_NULLPTR));
666         k95Label1->setText(QApplication::translate("KPerfWidget", "K95 buttons", Q_NULLPTR));
667         copyButton->setText(QApplication::translate("KPerfWidget", "Copy to mode...", Q_NULLPTR))
    ;
668         label_2->setText(QApplication::translate("KPerfWidget", "Indicator intensity:", Q_NULLPTR));
669         intensityBox->setSuffix(QApplication::translate("KPerfWidget", "%", Q_NULLPTR));
670         k95Label5->setText(QApplication::translate("KPerfWidget", "Off", Q_NULLPTR));
671         k95Label6->setText(QApplication::translate("KPerfWidget", "Note: macro recording not yet
      implemented. Indicator will always display \"off\".", Q_NULLPTR));
672     } // retranslateUi
```

Here is the caller graph for this function:



12.44.2.2 void Ui_KPerfWidget::setupUi (QWidget * *KPerfWidget*) [inline], [inherited]

Definition at line 111 of file ui_kperfwidget.h.

References Ui_KPerfWidget::capsBox, Ui_KPerfWidget::capsColorOff, Ui_KPerfWidget::capsColorOn, Ui_KPerfWidget::copyButton, Ui_KPerfWidget::gridLayout, Ui_KPerfWidget::horizontalLayout, Ui_KPerfWidget::horizontalLayout_2, Ui_KPerfWidget::horizontalSpacer, Ui_KPerfWidget::horizontalSpacer_2, Ui_KPerfWidget::horizontalSpacer_3, Ui_KPerfWidget::horizontalSpacer_4, Ui_KPerfWidget::horizontalSpacer_5, Ui_KPerfWidget::horizontalSpacer_6, Ui_KPerfWidget::horizontalSpacer_7, Ui_KPerfWidget::horizontalSpacer_8, Ui_KPerfWidget::intensityBox, Ui_KPerfWidget::k95Label1, Ui_KPerfWidget::k95Label2, Ui_KPerfWidget::k95Label3, Ui_KPerfWidget::k95Label4, Ui_KPerfWidget::k95Label5, Ui_KPerfWidget::k95Label6, Ui_KPerfWidget::k95Line, Ui_KPerfWidget::k95Spacer, Ui_KPerfWidget::label, Ui_KPerfWidget::label_10, Ui_KPerfWidget::label_11, Ui_KPerfWidget::label_12, Ui_KPerfWidget::label_14, Ui_KPerfWidget::label_15, Ui_KPerfWidget::label_16, Ui_KPerfWidget::label_17, Ui_KPerfWidget::label_18, Ui_KPerfWidget::label_19, Ui_KPerfWidget::label_2, Ui_KPerfWidget::label_20, Ui_KPerfWidget::label_21, Ui_KPerfWidget::label_22, Ui_KPerfWidget::label_23, Ui_KPerfWidget::label_24, Ui_KPerfWidget::label_3, Ui_KPerfWidget::label_4, Ui_KPerfWidget::label_5, Ui_KPerfWidget::label_6, Ui_KPerfWidget-

::label_7, Ui_KPerfWidget::label_8, Ui_KPerfWidget::lightBox, Ui_KPerfWidget::lightColor1, Ui_KPerfWidget::lightColor2, Ui_KPerfWidget::lightColor3, Ui_KPerfWidget::line, Ui_KPerfWidget::line_2, Ui_KPerfWidget::line_3, Ui_KPerfWidget::lockBox, Ui_KPerfWidget::lockColorOff, Ui_KPerfWidget::lockColorOn, Ui_KPerfWidget::macroBox, Ui_KPerfWidget::macroColorOff, Ui_KPerfWidget::macroColorOn, Ui_KPerfWidget::modeBox, Ui_KPerfWidget::modeColorOff, Ui_KPerfWidget::modeColorOn, Ui_KPerfWidget::muteBox, Ui_KPerfWidget::muteColorNA, Ui_KPerfWidget::muteColorOff, Ui_KPerfWidget::muteColorOn, Ui_KPerfWidget::numBox, Ui_KPerfWidget::numColorOff, Ui_KPerfWidget::numColorOn, Ui_KPerfWidget::retranslateUi(), Ui_KPerfWidget::scrollBox, Ui_KPerfWidget::scrollColorOff, Ui_KPerfWidget::scrollColorOn, Ui_KPerfWidget::verticalSpacer, Ui_KPerfWidget::verticalSpacer_2, Ui_KPerfWidget::verticalSpacer_3, and Ui_KPerfWidget::verticalSpacer_4.

Referenced by KPerfWidget::KPerfWidget().

```
112     {
113         if (KPerfWidget->objectName().isEmpty())
114             KPerfWidget->setObjectName(QStringLiteral("KPerfWidget"));
115         KPerfWidget->resize(840, 679);
116         gridLayout = new QGridLayout(KPerfWidget);
117         gridLayout->setObjectName(QStringLiteral("gridLayout"));
118         k95Spacer = new QWidget(KPerfWidget);
119         k95Spacer->setObjectName(QStringLiteral("k95Spacer"));
120         QSizePolicy sizePolicy(QSizePolicy::Fixed, QSizePolicy::Fixed);
121         sizePolicy.setHorizontalStretch(0);
122         sizePolicy.setVerticalStretch(0);
123         sizePolicy.setHeightForWidth(k95Spacer->sizePolicy().hasHeightForWidth());
124         k95Spacer->setSizePolicy(sizePolicy);
125         k95Spacer->setMinimumSize(QSize(15, 10));
126         k95Spacer->setMaximumSize(QSize(15, 10));
127 
128         gridLayout->addWidget(k95Spacer, 12, 4, 1, 1);
129 
130         label_10 = new QLabel(KPerfWidget);
131         label_10->setObjectName(QStringLiteral("label_10"));
132 
133         gridLayout->addWidget(label_10, 15, 5, 1, 1);
134 
135         lockColorOff = new ColorButton(KPerfWidget);
136         lockColorOff->setObjectName(QStringLiteral("lockColorOff"));
137         sizePolicy.setHeightForWidth(lockColorOff->sizePolicy().hasHeightForWidth());
138         lockColorOff->setSizePolicy(sizePolicy);
139         lockColorOff->setMinimumSize(QSize(0, 40));
140         lockColorOff->setMaximumSize(QSize(16777215, 40));
141 
142         gridLayout->addWidget(lockColorOff, 16, 7, 1, 1);
143 
144         line = new QFrame(KPerfWidget);
145         line->setObjectName(QStringLiteral("line"));
146         line->setFrameShape(QFrame::HLine);
147         line->setFrameShadow(QFrame::Sunken);
148 
149         gridLayout->addWidget(line, 2, 0, 1, 13);
150 
151         horizontalSpacer_5 = new QSpacerItem(10, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
152 
153         gridLayout->addItem(horizontalSpacer_5, 17, 6, 1, 1);
154 
155         k95Label2 = new QLabel(KPerfWidget);
156         k95Label2->setObjectName(QStringLiteral("k95Label2"));
157 
158         gridLayout->addWidget(k95Label2, 9, 5, 1, 1);
159 
160         label_12 = new QLabel(KPerfWidget);
161         label_12->setObjectName(QStringLiteral("label_12"));
162 
163         gridLayout->addWidget(label_12, 17, 5, 1, 1);
164 
165         modeColorOff = new ColorButton(KPerfWidget);
166         modeColorOff->setObjectName(QStringLiteral("modeColorOff"));
167         sizePolicy.setHeightForWidth(modeColorOff->sizePolicy().hasHeightForWidth());
168         modeColorOff->setSizePolicy(sizePolicy);
169         modeColorOff->setMinimumSize(QSize(0, 40));
170         modeColorOff->setMaximumSize(QSize(16777215, 40));
171 
172         gridLayout->addWidget(modeColorOff, 9, 7, 1, 1);
173 
174         lightColor3 = new ColorButton(KPerfWidget);
175         lightColor3->setObjectName(QStringLiteral("lightColor3"));
176         sizePolicy.setHeightForWidth(lightColor3->sizePolicy().hasHeightForWidth());
177         lightColor3->setSizePolicy(sizePolicy);
178         lightColor3->setMinimumSize(QSize(0, 40));
179         lightColor3->setMaximumSize(QSize(16777215, 40));
180 
181         gridLayout->addWidget(lightColor3, 15, 4, 1, 1);
```

```
182
183         horizontalSpacer = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
184
185         gridLayout->addItem(horizontalSpacer, 15, 12, 1, 1);
186
187         lockBox = new QCheckBox(KPerfWidget);
188         lockBox->setObjectName(QStringLiteral("lockBox"));
189
190         gridLayout->addWidget(lockBox, 16, 1, 1, 2);
191
192         modeColorOn = new ColorButton(KPerfWidget);
193         modeColorOn->setObjectName(QStringLiteral("modeColorOn"));
194         sizePolicy.setHeightForWidth(modeColorOn->sizePolicy().hasHeightForWidth());
195         modeColorOn->setSizePolicy(sizePolicy);
196         modeColorOn->setMinimumSize(QSize(0, 40));
197         modeColorOn->setMaximumSize(QSize(16777215, 40));
198
199         gridLayout->addWidget(modeColorOn, 9, 4, 1, 1);
200
201         macroBox = new QCheckBox(KPerfWidget);
202         macroBox->setObjectName(QStringLiteral("macroBox"));
203
204         gridLayout->addWidget(macroBox, 10, 1, 1, 2);
205
206         numColorOn = new ColorButton(KPerfWidget);
207         numColorOn->setObjectName(QStringLiteral("numColorOn"));
208         sizePolicy.setHeightForWidth(numColorOn->sizePolicy().hasHeightForWidth());
209         numColorOn->setSizePolicy(sizePolicy);
210         numColorOn->setMinimumSize(QSize(0, 40));
211         numColorOn->setMaximumSize(QSize(16777215, 40));
212
213         gridLayout->addWidget(numColorOn, 21, 4, 1, 1);
214
215         numBox = new QComboBox(KPerfWidget);
216         numBox->setObjectName(QStringLiteral("numBox"));
217
218         gridLayout->addWidget(numBox, 21, 2, 1, 1);
219
220         label_5 = new QLabel(KPerfWidget);
221         label_5->setObjectName(QStringLiteral("label_5"));
222
223         gridLayout->addWidget(label_5, 21, 1, 1, 1);
224
225         verticalSpacer_2 = new QSpacerItem(20, 20, QSizePolicy::Minimum, QSizePolicy::Fixed
    );
226
227         gridLayout->addItem(verticalSpacer_2, 4, 1, 1, 1);
228
229         lightColor2 = new ColorButton(KPerfWidget);
230         lightColor2->setObjectName(QStringLiteral("lightColor2"));
231         sizePolicy.setHeightForWidth(lightColor2->sizePolicy().hasHeightForWidth());
232         lightColor2->setSizePolicy(sizePolicy);
233         lightColor2->setMinimumSize(QSize(0, 40));
234         lightColor2->setMaximumSize(QSize(16777215, 40));
235
236         gridLayout->addWidget(lightColor2, 15, 7, 1, 1);
237
238         horizontalSpacer_7 = new QSpacerItem(10, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
239
240         gridLayout->addItem(horizontalSpacer_7, 17, 3, 1, 1);
241
242         label_8 = new QLabel(KPerfWidget);
243         label_8->setObjectName(QStringLiteral("label_8"));
244         QFont font;
245         font.setPointSize(8);
246         font.setItalic(true);
247         label_8->setFont(font);
248
249         gridLayout->addWidget(label_8, 25, 1, 1, 12);
250
251         lightBox = new QCheckBox(KPerfWidget);
252         lightBox->setObjectName(QStringLiteral("lightBox"));
253
254         gridLayout->addWidget(lightBox, 15, 1, 1, 2);
255
256         lightColor1 = new ColorButton(KPerfWidget);
257         lightColor1->setObjectName(QStringLiteral("lightColor1"));
258         sizePolicy.setHeightForWidth(lightColor1->sizePolicy().hasHeightForWidth());
259         lightColor1->setSizePolicy(sizePolicy);
260         lightColor1->setMinimumSize(QSize(0, 40));
261         lightColor1->setMaximumSize(QSize(16777215, 40));
262
263         gridLayout->addWidget(lightColor1, 15, 10, 1, 1);
264
265         verticalSpacer_4 = new QSpacerItem(0, 5, QSizePolicy::Minimum, QSizePolicy::Fixed);
```

```
266
267         gridLayout->addItem(verticalSpacer_4, 24, 4, 1, 1);
268
269         label_6 = new QLabel(KPerfWidget);
270         label_6->setObjectName(QStringLiteral("label_6"));
271
272         gridLayout->addWidget(label_6, 22, 1, 1, 1);
273
274         label = new QLabel(KPerfWidget);
275         label->setObjectName(QStringLiteral("label"));
276         QFont font1;
277         font1.setBold(true);
278         font1.setWeight(75);
279         label->setFont(font1);
280
281         gridLayout->addWidget(label, 1, 0, 1, 13);
282
283         horizontalSpacer_6 = new QSpacerItem(10, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
284
285         gridLayout->addItem(horizontalSpacer_6, 17, 9, 1, 1);
286
287         lockColorOn = new ColorButton(KPerfWidget);
288         lockColorOn->setObjectName(QStringLiteral("lockColorOn"));
289         sizePolicy.setHeightForWidth(lockColorOn->sizePolicy().hasHeightForWidth());
290         lockColorOn->setSizePolicy(sizePolicy);
291         lockColorOn->setMinimumSize(QSize(0, 40));
292         lockColorOn->setMaximumSize(QSize(16777215, 40));
293
294         gridLayout->addWidget(lockColorOn, 16, 4, 1, 1);
295
296         label_4 = new QLabel(KPerfWidget);
297         label_4->setObjectName(QStringLiteral("label_4"));
298         label_4->setFont(font1);
299
300         gridLayout->addWidget(label_4, 19, 0, 1, 13);
301
302         verticalSpacer = new QSpacerItem(20, 40, QSizePolicy::Minimum, QSizePolicy::Expanding
    );
303
304         gridLayout->addItem(verticalSpacer, 26, 2, 1, 1);
305
306         verticalSpacer_3 = new QSpacerItem(20, 20, QSizePolicy::Minimum, QSizePolicy::Fixed
    );
307
308         gridLayout->addItem(verticalSpacer_3, 18, 4, 1, 1);
309
310         modeBox = new QCheckBox(KPerfWidget);
311         modeBox->setObjectName(QStringLiteral("modeBox"));
312
313         gridLayout->addWidget(modeBox, 9, 1, 1, 2);
314
315         capsColorOff = new ColorButton(KPerfWidget);
316         capsColorOff->setObjectName(QStringLiteral("capsColorOff"));
317         sizePolicy.setHeightForWidth(capsColorOff->sizePolicy().hasHeightForWidth());
318         capsColorOff->setSizePolicy(sizePolicy);
319         capsColorOff->setMinimumSize(QSize(0, 40));
320         capsColorOff->setMaximumSize(QSize(16777215, 40));
321
322         gridLayout->addWidget(capsColorOff, 22, 7, 1, 1);
323
324         numColorOff = new ColorButton(KPerfWidget);
325         numColorOff->setObjectName(QStringLiteral("numColorOff"));
326         QSizePolicy sizePolicy1(QSizePolicy::Fixed, QSizePolicy::Fixed);
327         sizePolicy1.setHorizontalStretch(0);
328         sizePolicy1.setVerticalStretch(40);
329         sizePolicy1.setHeightForWidth(numColorOff->sizePolicy().hasHeightForWidth());
330         numColorOff->setSizePolicy(sizePolicy1);
331         numColorOff->setMaximumSize(QSize(16777215, 40));
332
333         gridLayout->addWidget(numColorOff, 21, 7, 1, 1);
334
335         capsColorOn = new ColorButton(KPerfWidget);
336         capsColorOn->setObjectName(QStringLiteral("capsColorOn"));
337         sizePolicy.setHeightForWidth(capsColorOn->sizePolicy().hasHeightForWidth());
338         capsColorOn->setSizePolicy(sizePolicy);
339         capsColorOn->setMinimumSize(QSize(0, 40));
340         capsColorOn->setMaximumSize(QSize(16777215, 40));
341
342         gridLayout->addWidget(capsColorOn, 22, 4, 1, 1);
343
344         line_3 = new QFrame(KPerfWidget);
345         line_3->setObjectName(QStringLiteral("line_3"));
346         line_3->setFrameShape(QFrame::HLine);
347         line_3->setFrameShadow(QFrame::Sunken);
348
349         gridLayout->addWidget(line_3, 20, 0, 1, 13);
```

```
350
351         label_22 = new QLabel(KPerfWidget);
352         label_22->setObjectName(QStringLiteral("label_22"));
353
354         gridLayout->addWidget(label_22, 21, 8, 1, 1);
355
356         scrollBox = new QComboBox(KPerfWidget);
357         scrollBox->setObjectName(QStringLiteral("scrollBox"));
358
359         gridLayout->addWidget(scrollBox, 23, 2, 1, 1);
360
361         label_7 = new QLabel(KPerfWidget);
362         label_7->setObjectName(QStringLiteral("label_7"));
363
364         gridLayout->addWidget(label_7, 23, 1, 1, 1);
365
366         scrollColorOn = new ColorButton(KPerfWidget);
367         scrollColorOn->setObjectName(QStringLiteral("scrollColorOn"));
368         sizePolicy.setHeightForWidth(scrollColorOn->sizePolicy().hasHeightForWidth());
369         scrollColorOn->setSizePolicy(sizePolicy);
370         scrollColorOn->setMinimumSize(QSize(0, 40));
371         scrollColorOn->setMaximumSize(QSize(16777215, 40));
372
373         gridLayout->addWidget(scrollColorOn, 23, 4, 1, 1);
374
375         capsBox = new QComboBox(KPerfWidget);
376         capsBox->setObjectName(QStringLiteral("capsBox"));
377
378         gridLayout->addWidget(capsBox, 22, 2, 1, 1);
379
380         scrollColorOff = new ColorButton(KPerfWidget);
381         scrollColorOff->setObjectName(QStringLiteral("scrollColorOff"));
382         sizePolicy.setHeightForWidth(scrollColorOff->sizePolicy().hasHeightForWidth());
383         scrollColorOff->setSizePolicy(sizePolicy);
384         scrollColorOff->setMinimumSize(QSize(0, 40));
385         scrollColorOff->setMaximumSize(QSize(16777215, 40));
386
387         gridLayout->addWidget(scrollColorOff, 23, 7, 1, 1);
388
389         muteBox = new QCheckBox(KPerfWidget);
390         muteBox->setObjectName(QStringLiteral("muteBox"));
391
392         gridLayout->addWidget(muteBox, 17, 1, 1, 2);
393
394         muteColorOn = new ColorButton(KPerfWidget);
395         muteColorOn->setObjectName(QStringLiteral("muteColorOn"));
396         sizePolicy.setHeightForWidth(muteColorOn->sizePolicy().hasHeightForWidth());
397         muteColorOn->setSizePolicy(sizePolicy);
398         muteColorOn->setMinimumSize(QSize(0, 40));
399         muteColorOn->setMaximumSize(QSize(16777215, 40));
400
401         gridLayout->addWidget(muteColorOn, 17, 4, 1, 1);
402
403         macroColorOff = new ColorButton(KPerfWidget);
404         macroColorOff->setObjectName(QStringLiteral("macroColorOff"));
405         QSizePolicy sizePolicy2(QSizePolicy::Minimum, QSizePolicy::Fixed);
406         sizePolicy2.setHorizontalStretch(0);
407         sizePolicy2.setVerticalStretch(40);
408         sizePolicy2.setHeightForWidth(macroColorOff->sizePolicy().hasHeightForWidth());
409         macroColorOff->setSizePolicy(sizePolicy2);
410         macroColorOff->setMinimumSize(QSize(0, 40));
411
412         gridLayout->addWidget(macroColorOff, 10, 7, 1, 1);
413
414         label_3 = new QLabel(KPerfWidget);
415         label_3->setObjectName(QStringLiteral("label_3"));
416         label_3->setFont(font1);
417
418         gridLayout->addWidget(label_3, 13, 0, 1, 3);
419
420         muteColorOff = new ColorButton(KPerfWidget);
421         muteColorOff->setObjectName(QStringLiteral("muteColorOff"));
422         sizePolicy.setHeightForWidth(muteColorOff->sizePolicy().hasHeightForWidth());
423         muteColorOff->setSizePolicy(sizePolicy);
424         muteColorOff->setMinimumSize(QSize(0, 40));
425         muteColorOff->setMaximumSize(QSize(16777215, 40));
426
427         gridLayout->addWidget(muteColorOff, 17, 7, 1, 1);
428
429         k95Label3 = new QLabel(KPerfWidget);
430         k95Label3->setObjectName(QStringLiteral("k95Label3"));
431
432         gridLayout->addWidget(k95Label3, 9, 8, 1, 1);
433
434         macroColorOn = new ColorButton(KPerfWidget);
435         macroColorOn->setObjectName(QStringLiteral("macroColorOn"));
436         sizePolicy2.setHeightForWidth(macroColorOn->sizePolicy().hasHeightForWidth());
```

```
437         macroColorOn->setSizePolicy(sizePolicy2);
438         macroColorOn->setMinimumSize(QSize(0, 40));
439 
440         gridLayout->addWidget(macroColorOn, 10, 4, 1, 1);
441 
442         muteColorNA = new ColorButton(KPerfWidget);
443         muteColorNA->setObjectName(QStringLiteral("muteColorNA"));
444         muteColorNA->setMinimumSize(QSize(0, 40));
445         muteColorNA->setMaximumSize(QSize(16777215, 40));
446 
447         gridLayout->addWidget(muteColorNA, 17, 10, 1, 1);
448 
449         label_19 = new QLabel(KPerfWidget);
450         label_19->setObjectName(QStringLiteral("label_19"));
451 
452         gridLayout->addWidget(label_19, 21, 5, 1, 1);
453 
454         k95Line = new QFrame(KPerfWidget);
455         k95Line->setObjectName(QStringLiteral("k95Line"));
456         k95Line->setFrameShape(QFrame::HLine);
457         k95Line->setFrameShadow(QFrame::Sunken);
458 
459         gridLayout->addWidget(k95Line, 8, 0, 1, 13);
460 
461         label_21 = new QLabel(KPerfWidget);
462         label_21->setObjectName(QStringLiteral("label_21"));
463 
464         gridLayout->addWidget(label_21, 23, 5, 1, 1);
465 
466         label_24 = new QLabel(KPerfWidget);
467         label_24->setObjectName(QStringLiteral("label_24"));
468 
469         gridLayout->addWidget(label_24, 23, 8, 1, 1);
470 
471         label_20 = new QLabel(KPerfWidget);
472         label_20->setObjectName(QStringLiteral("label_20"));
473 
474         gridLayout->addWidget(label_20, 22, 5, 1, 1);
475 
476         label_16 = new QLabel(KPerfWidget);
477         label_16->setObjectName(QStringLiteral("label_16"));
478 
479         gridLayout->addWidget(label_16, 15, 8, 1, 1);
480 
481         label_14 = new QLabel(KPerfWidget);
482         label_14->setObjectName(QStringLiteral("label_14"));
483 
484         gridLayout->addWidget(label_14, 17, 8, 1, 1);
485 
486         label_18 = new QLabel(KPerfWidget);
487         label_18->setObjectName(QStringLiteral("label_18"));
488 
489         gridLayout->addWidget(label_18, 15, 11, 1, 1);
490 
491         horizontalSpacer_2 = new QSpacerItem(5, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
492 
493         gridLayout->addItem(horizontalSpacer_2, 15, 0, 1, 1);
494 
495         label_15 = new QLabel(KPerfWidget);
496         label_15->setObjectName(QStringLiteral("label_15"));
497 
498         gridLayout->addWidget(label_15, 16, 8, 1, 1);
499 
500         k95Label4 = new QLabel(KPerfWidget);
501         k95Label4->setObjectName(QStringLiteral("k95Label4"));
502 
503         gridLayout->addWidget(k95Label4, 10, 5, 1, 1);
504 
505         label_17 = new QLabel(KPerfWidget);
506         label_17->setObjectName(QStringLiteral("label_17"));
507 
508         gridLayout->addWidget(label_17, 17, 11, 1, 1);
509 
510         label_11 = new QLabel(KPerfWidget);
511         label_11->setObjectName(QStringLiteral("label_11"));
512 
513         gridLayout->addWidget(label_11, 16, 5, 1, 1);
514 
515         label_23 = new QLabel(KPerfWidget);
516         label_23->setObjectName(QStringLiteral("label_23"));
517 
518         gridLayout->addWidget(label_23, 22, 8, 1, 1);
519 
520         k95Label1 = new QLabel(KPerfWidget);
521         k95Label1->setObjectName(QStringLiteral("k95Label1"));
522         k95Label1->setFont(font1);
```

```
523
524         gridLayout->addWidget(k95Label1, 7, 0, 1, 5);
525
526         horizontalLayout_2 = new QHBoxLayout();
527         horizontalLayout_2->setObjectName(QStringLiteral("horizontalLayout_2"));
528         copyButton = new QPushButton(KPerfWidget);
529         copyButton->setObjectName(QStringLiteral("copyButton"));
530
531         horizontalLayout_2->addWidget(copyButton);
532
533         horizontalSpacer_8 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
534
535         horizontalLayout_2->addItem(horizontalSpacer_8);
536
537
538         gridLayout->addLayout(horizontalLayout_2, 3, 10, 1, 3);
539
540         horizontalLayout = new QHBoxLayout();
541         horizontalLayout->setObjectName(QStringLiteral("horizontalLayout"));
542         label_2 = new QLabel(KPerfWidget);
543         label_2->setObjectName(QStringLiteral("label_2"));
544
545         horizontalLayout->addWidget(label_2);
546
547         horizontalSpacer_4 = new QSpacerItem(10, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
548
549         horizontalLayout->addItem(horizontalSpacer_4);
550
551         intensityBox = new QSpinBox(KPerfWidget);
552         intensityBox->setObjectName(QStringLiteral("intensityBox"));
553         intensityBox->setMaximum(100);
554         intensityBox->setValue(100);
555
556         horizontalLayout->addWidget(intensityBox);
557
558         horizontalSpacer_3 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
559
560         horizontalLayout->addItem(horizontalSpacer_3);
561
562
563         gridLayout->addLayout(horizontalLayout, 3, 1, 1, 9);
564
565         k95Label5 = new QLabel(KPerfWidget);
566         k95Label5->setObjectName(QStringLiteral("k95Label5"));
567
568         gridLayout->addWidget(k95Label5, 10, 8, 1, 1);
569
570         line_2 = new QFrame(KPerfWidget);
571         line_2->setObjectName(QStringLiteral("line_2"));
572         line_2->setFrameShape(QFrame::HLine);
573         line_2->setFrameShadow(QFrame::Sunken);
574
575         gridLayout->addWidget(line_2, 14, 0, 1, 13);
576
577         k95Label6 = new QLabel(KPerfWidget);
578         k95Label6->setObjectName(QStringLiteral("k95Label6"));
579         k95Label6->setFont(font);
580
581         gridLayout->addWidget(k95Label6, 11, 1, 1, 10);
582
583
584         retranslateUi(KPerfWidget);
585
586         QMetaObject::connectSlotsByName(KPerfWidget);
587     } // setupUi
```

Here is the call graph for this function:



Here is the caller graph for this function:

12.44.3 Field Documentation

12.44.3.1 QComboBox* Ui_KPerfWidget::capsBox [inherited]

Definition at line 74 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.2 ColorButton* Ui_KPerfWidget::capsColorOff [inherited]

Definition at line 66 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.3 ColorButton* Ui_KPerfWidget::capsColorOn [inherited]

Definition at line 68 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.4 QPushButton* Ui_KPerfWidget::copyButton [inherited]

Definition at line 100 of file ui_kperfwidget.h.

Referenced by Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.5 QGridLayout* Ui_KPerfWidget::gridLayout [inherited]

Definition at line 34 of file ui_kperfwidget.h.

Referenced by Ui_KPerfWidget::setupUi().

12.44.3.6 QHBoxLayout* Ui_KPerfWidget::horizontalLayout [inherited]

Definition at line 102 of file ui_kperfwidget.h.

Referenced by Ui_KPerfWidget::setupUi().

12.44.3.7 QHBoxLayout* Ui_KPerfWidget::horizontalLayout_2 [inherited]

Definition at line 99 of file ui_kperfwidget.h.

Referenced by Ui_KPerfWidget::setupUi().

12.44.3.8 QSpacerItem* Ui_KPerfWidget::horizontalSpacer [inherited]

Definition at line 44 of file ui_kperfwidget.h.

Referenced by Ui_KPerfWidget::setupUi().

12.44.3.9 QSpacerItem* Ui_KPerfWidget::horizontalSpacer_2 [inherited]

Definition at line 92 of file ui_kperfwidget.h.

Referenced by Ui_KPerfWidget::setupUi().

12.44.3.10 QSpacerItem* Ui_KPerfWidget::horizontalSpacer_3 [inherited]

Definition at line 106 of file ui_kperfwidget.h.

Referenced by Ui_KPerfWidget::setupUi().

12.44.3.11 QSpacerItem* Ui_KPerfWidget::horizontalSpacer_4 [inherited]

Definition at line 104 of file ui_kperfwidget.h.

Referenced by Ui_KPerfWidget::setupUi().

12.44.3.12 QSpacerItem* Ui_KPerfWidget::horizontalSpacer_5 [inherited]

Definition at line 39 of file ui_kperfwidget.h.

Referenced by Ui_KPerfWidget::setupUi().

12.44.3.13 QSpacerItem* Ui_KPerfWidget::horizontalSpacer_6 [inherited]

Definition at line 60 of file ui_kperfwidget.h.

Referenced by Ui_KPerfWidget::setupUi().

12.44.3.14 QSpacerItem* Ui_KPerfWidget::horizontalSpacer_7 [inherited]

Definition at line 53 of file ui_kperfwidget.h.

Referenced by Ui_KPerfWidget::setupUi().

12.44.3.15 QSpacerItem* Ui_KPerfWidget::horizontalSpacer_8 [inherited]

Definition at line 101 of file ui_kperfwidget.h.

Referenced by Ui_KPerfWidget::setupUi().

12.44.3.16 QSpinBox* Ui_KPerfWidget::intensityBox [inherited]

Definition at line 105 of file ui_kperfwidget.h.

Referenced by Ui_KPerfWidget::retranslateUi(), KPerfWidget::setPerf(), and Ui_KPerfWidget::setupUi().

12.44.3.17 QLabel* Ui_KPerfWidget::k95Label1 [inherited]

Definition at line 98 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.18 QLabel* Ui_KPerfWidget::k95Label2 [inherited]

Definition at line 40 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.19 QLabel* Ui_KPerfWidget::k95Label3 [inherited]

Definition at line 81 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.20 QLabel* Ui_KPerfWidget::k95Label4 [inherited]

Definition at line 94 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.21 QLabel* Ui_KPerfWidget::k95Label5 [inherited]

Definition at line 107 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.22 QLabel* Ui_KPerfWidget::k95Label6 [inherited]

Definition at line 109 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.23 QFrame* Ui_KPerfWidget::k95Line [inherited]

Definition at line 85 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), and Ui_KPerfWidget::setupUi().

12.44.3.24 QWidget* Ui_KPerfWidget::k95Spacer [inherited]

Definition at line 35 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), and Ui_KPerfWidget::setupUi().

12.44.3.25 QLabel* Ui_KPerfWidget::label [inherited]

Definition at line 59 of file ui_kperfwidget.h.

Referenced by Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.26 QLabel* Ui_KPerfWidget::label_10 [inherited]

Definition at line 36 of file ui_kperfwidget.h.

Referenced by Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.27 QLabel* Ui_KPerfWidget::label_11 [inherited]

Definition at line 96 of file ui_kperfwidget.h.

Referenced by Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.28 QLabel* Ui_KPerfWidget::label_12 [inherited]

Definition at line 41 of file ui_kperfwidget.h.

Referenced by Ui_KPerfWidget::retranslateUi(), KPerfWidget::setPerf(), and Ui_KPerfWidget::setupUi().

12.44.3.29 QLabel* Ui_KPerfWidget::label_14 [inherited]

Definition at line 90 of file ui_kperfwidget.h.

Referenced by Ui_KPerfWidget::retranslateUi(), KPerfWidget::setPerf(), and Ui_KPerfWidget::setupUi().

12.44.3.30 QLabel* Ui_KPerfWidget::label_15 [inherited]

Definition at line 93 of file ui_kperfwidget.h.

Referenced by Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.31 QLabel* Ui_KPerfWidget::label_16 [inherited]

Definition at line 89 of file ui_kperfwidget.h.

Referenced by Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.32 QLabel* Ui_KPerfWidget::label_17 [inherited]

Definition at line 95 of file ui_kperfwidget.h.

Referenced by Ui_KPerfWidget::retranslateUi(), KPerfWidget::setPerf(), and Ui_KPerfWidget::setupUi().

12.44.3.33 QLabel* Ui_KPerfWidget::label_18 [inherited]

Definition at line 91 of file ui_kperfwidget.h.

Referenced by Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.34 QLabel* Ui_KPerfWidget::label_19 [inherited]

Definition at line 84 of file ui_kperfwidget.h.

Referenced by Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.35 QLabel* Ui_KPerfWidget::label_2 [inherited]

Definition at line 103 of file ui_kperfwidget.h.

Referenced by Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.36 QLabel* Ui_KPerfWidget::label_20 [inherited]

Definition at line 88 of file ui_kperfwidget.h.

Referenced by Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.37 QLabel* Ui_KPerfWidget::label_21 [inherited]

Definition at line 86 of file ui_kperfwidget.h.

Referenced by Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.38 QLabel* Ui_KPerfWidget::label_22 [inherited]

Definition at line 70 of file ui_kperfwidget.h.

Referenced by Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.39 QLabel* Ui_KPerfWidget::label_23 [inherited]

Definition at line 97 of file ui_kperfwidget.h.

Referenced by Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.40 QLabel* Ui_KPerfWidget::label_24 [inherited]

Definition at line 87 of file ui_kperfwidget.h.

Referenced by Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.41 QLabel* Ui_KPerfWidget::label_3 [inherited]

Definition at line 79 of file ui_kperfwidget.h.

Referenced by Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.42 QLabel* Ui_KPerfWidget::label_4 [inherited]

Definition at line 62 of file ui_kperfwidget.h.

Referenced by Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.43 QLabel* Ui_KPerfWidget::label_5 [inherited]

Definition at line 50 of file ui_kperfwidget.h.

Referenced by Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.44 QLabel* Ui_KPerfWidget::label_6 [inherited]

Definition at line 58 of file ui_kperfwidget.h.

Referenced by Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.45 QLabel* Ui_KPerfWidget::label_7 [inherited]

Definition at line 72 of file ui_kperfwidget.h.

Referenced by Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.46 QLabel* Ui_KPerfWidget::label_8 [inherited]

Definition at line 54 of file ui_kperfwidget.h.

Referenced by Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.47 QCheckBox* Ui_KPerfWidget::lightBox [inherited]

Definition at line 55 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.48 ColorButton* Ui_KPerfWidget::lightColor1 [inherited]

Definition at line 56 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.49 ColorButton* Ui_KPerfWidget::lightColor2 [inherited]

Definition at line 52 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.50 ColorButton* Ui_KPerfWidget::lightColor3 [inherited]

Definition at line 43 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.51 QFrame* Ui_KPerfWidget::line [inherited]

Definition at line 38 of file ui_kperfwidget.h.

Referenced by Ui_KPerfWidget::setupUi().

12.44.3.52 QFrame* Ui_KPerfWidget::line_2 [inherited]

Definition at line 108 of file ui_kperfwidget.h.

Referenced by Ui_KPerfWidget::setupUi().

12.44.3.53 QFrame* Ui_KPerfWidget::line_3 [inherited]

Definition at line 69 of file ui_kperfwidget.h.

Referenced by Ui_KPerfWidget::setupUi().

12.44.3.54 QCheckBox* Ui_KPerfWidget::lockBox [inherited]

Definition at line 45 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.55 ColorButton* Ui_KPerfWidget::lockColorOff [inherited]

Definition at line 37 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.56 ColorButton* Ui_KPerfWidget::lockColorOn [inherited]

Definition at line 61 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.57 QCheckBox* Ui_KPerfWidget::macroBox [inherited]

Definition at line 47 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.58 ColorButton* Ui_KPerfWidget::macroColorOff [inherited]

Definition at line 78 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.59 ColorButton* Ui_KPerfWidget::macroColorOn [inherited]

Definition at line 82 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.60 QCheckBox* Ui_KPerfWidget::modeBox [inherited]

Definition at line 65 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.61 ColorButton* Ui_KPerfWidget::modeColorOff [inherited]

Definition at line 42 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.62 ColorButton* Ui_KPerfWidget::modeColorOn [inherited]

Definition at line 46 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.63 QCheckBox* Ui_KPerfWidget::muteBox [inherited]

Definition at line 76 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), Ui_KPerfWidget::retranslateUi(), KPerfWidget::setPerf(), and Ui_KPerfWidget::setupUi().

12.44.3.64 ColorButton* Ui_KPerfWidget::muteColorNA [inherited]

Definition at line 83 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), Ui_KPerfWidget::retranslateUi(), KPerfWidget::setPerf(), and Ui_KPerfWidget::setupUi().

12.44.3.65 ColorButton* Ui_KPerfWidget::muteColorOff [inherited]

Definition at line 80 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), Ui_KPerfWidget::retranslateUi(), KPerfWidget::setPerf(), and Ui_KPerfWidget::setupUi().

12.44.3.66 ColorButton* Ui_KPerfWidget::muteColorOn [inherited]

Definition at line 77 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), Ui_KPerfWidget::retranslateUi(), KPerfWidget::setPerf(), and Ui_KPerfWidget::setupUi().

12.44.3.67 QComboBox* Ui_KPerfWidget::numBox [inherited]

Definition at line 49 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.68 ColorButton* Ui_KPerfWidget::numColorOff [inherited]

Definition at line 67 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.69 ColorButton* Ui_KPerfWidget::numColorOn [inherited]

Definition at line 48 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.70 QComboBox* Ui_KPerfWidget::scrollBox [inherited]

Definition at line 71 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.71 ColorButton* Ui_KPerfWidget::scrollColorOff [inherited]

Definition at line 75 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.72 ColorButton* Ui_KPerfWidget::scrollColorOn [inherited]

Definition at line 73 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), Ui_KPerfWidget::retranslateUi(), and Ui_KPerfWidget::setupUi().

12.44.3.73 QSpacerItem* Ui_KPerfWidget::verticalSpacer [inherited]

Definition at line 63 of file ui_kperfwidget.h.

Referenced by Ui_KPerfWidget::setupUi().

12.44.3.74 QSpacerItem* Ui_KPerfWidget::verticalSpacer_2 [inherited]

Definition at line 51 of file ui_kperfwidget.h.

Referenced by Ui_KPerfWidget::setupUi().

12.44.3.75 QSpacerItem* Ui_KPerfWidget::verticalSpacer_3 [inherited]

Definition at line 64 of file ui_kperfwidget.h.

Referenced by Ui_KPerfWidget::setupUi().

12.44.3.76 QSpacerItem* Ui_KPerfWidget::verticalSpacer_4 [inherited]

Definition at line 57 of file ui_kperfwidget.h.

Referenced by Ui_KPerfWidget::setupUi().

The documentation for this class was generated from the following file:

- src/ckb/ui_kperfwidget.h

12.45 KPerfWidget Class Reference

`#include <src/ckb/kperfwidget.h>`

Inheritance diagram for KPerfWidget:

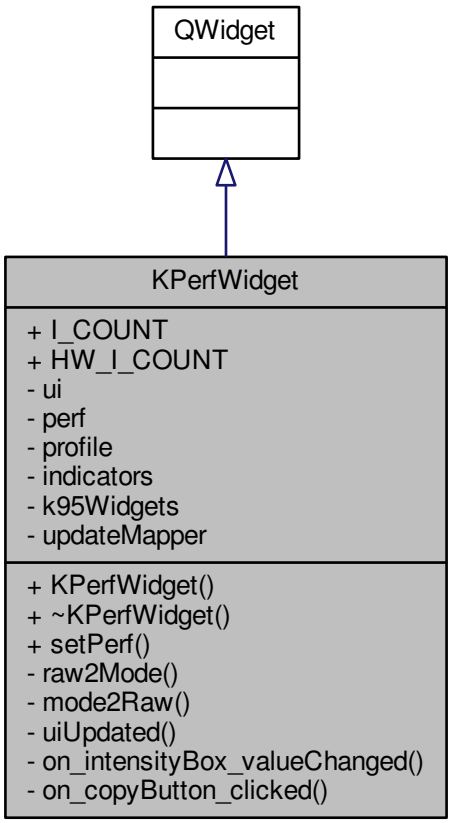

Collaboration diagram for KPerfWidget:

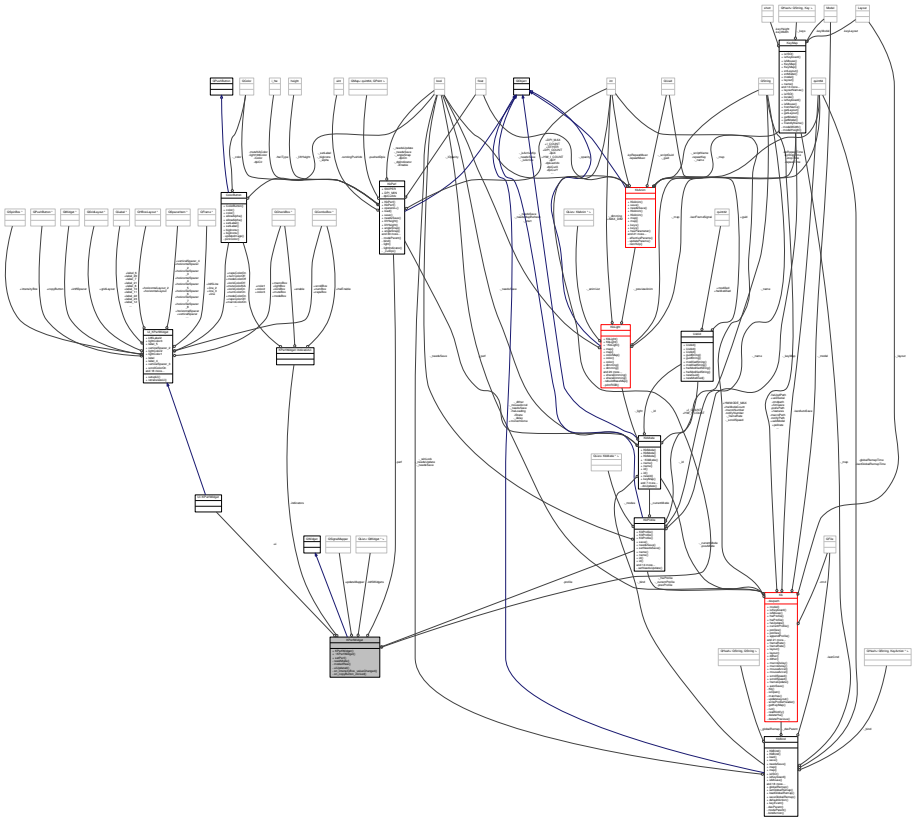

Data Structures

- struct IndicatorUi

Public Types

- typedef KbPerf::indicator indicator
- typedef KbPerf::i_hw i_hw

Public Member Functions

- KPerfWidget (QWidget ∗parent=0)

  KPerfWidget::KPerfWidget sets up the UI for Keyboard Performace panel.
- ∼KPerfWidget ()

  KPerfWidget::∼KPerfWidget nothing unusual - just delete the ui object.
- void setPerf (KbPerf ∗newPerf, KbProfile ∗newProfile)

Static Public Attributes

- static const int I_COUNT = KbPerf::I_COUNT
- static const int HW_I_COUNT = KbPerf::HW_I_COUNT

Private Types

- enum HwMode {
  NORMAL, ALWAYS_ON, ALWAYS_OFF, RGB,
  BOTH }

Private Slots

- void uiUpdated (int index)
- void on_intensityBox_valueChanged (int arg1)
- void on_copyButton_clicked ()

Private Member Functions

- HwMode raw2Mode (bool sw_enable, i_hw hw_enable)

  KPerfWidget::raw2Mode return hardware mode depending on setiings in sw_enable and hw_enable.
- void mode2Raw (HwMode mode, bool &sw_enable, i_hw &hw_enable)

  KPerfWidget::mode2Raw Set values of sw_enable and hw_enable to hte value corresponding to input var mode.

Private Attributes

- Ui::KPerfWidget * ui
- KbPerf * perf
- KbProfile * profile
- IndicatorUi indicators [I_COUNT]
- QList< QWidget * > k95Widgets
- QSignalMapper updateMapper

12.45.1 Detailed Description

Definition at line 16 of file kperfwidget.h.

12.45.2 Data Structure Documentation

12.45.2.1 struct KPerfWidget::IndicatorUi

Definition at line 54 of file kperfwidget.h.

Collaboration diagram for KPerfWidget::IndicatorUi:

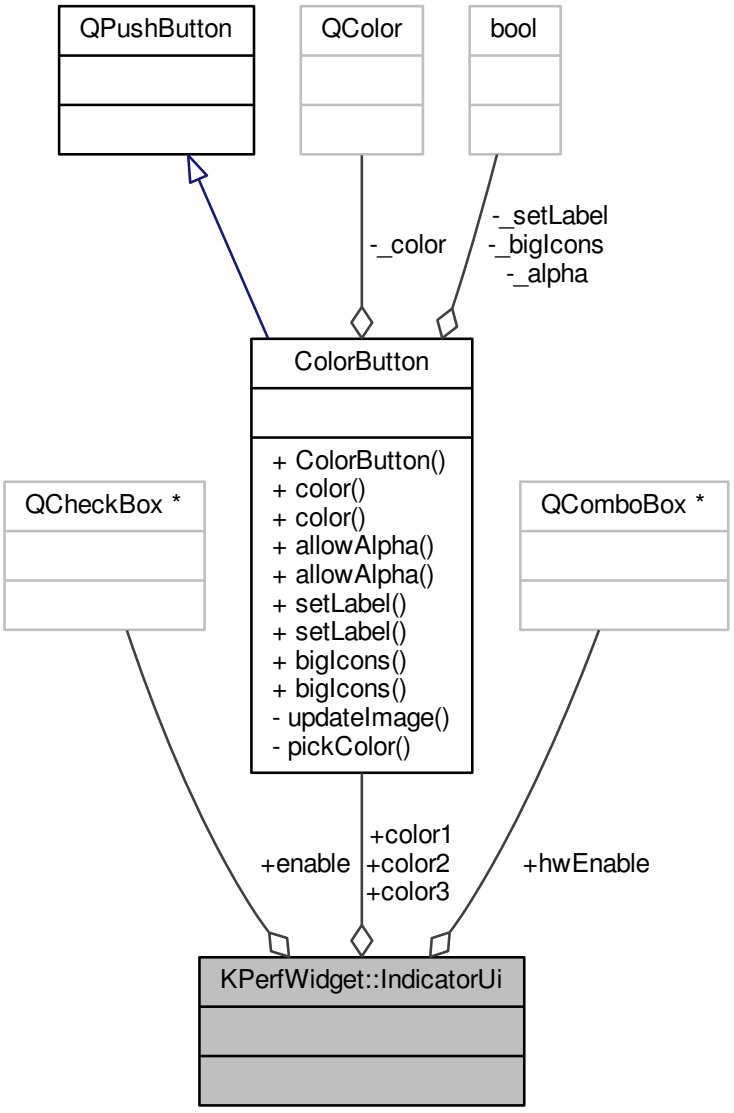

Data Fields

ColorButton *	color1	
ColorButton *	color2	
ColorButton *	color3	
QCheckBox *	enable	
QComboBox *	hwEnable	

12.45.3 Member Typedef Documentation

12.45.3.1 typedef KbPerf::i_hw KPerfWidget::i_hw

Definition at line 29 of file kperfwidget.h.

12.45.3.2 typedef KbPerf::indicator KPerfWidget::indicator

Definition at line 28 of file kperfwidget.h.

12.45.4 Member Enumeration Documentation

12.45.4.1 enum KPerfWidget::HwMode [private]

Enumerator

NORMAL

ALWAYS_ON

ALWAYS_OFF

RGB

BOTH

Definition at line 38 of file kperfwidget.h.

```
38                  {
39          NORMAL,
40          ALWAYS_ON,
41          ALWAYS_OFF,
42          RGB,
43          BOTH
44      };
```

12.45.5 Constructor & Destructor Documentation

12.45.5.1 KPerfWidget::KPerfWidget (QWidget * *parent* = 0) [explicit]

Parameters

parent	

Definition at line 10 of file kperfwidget.cpp.

References ColorButton::allowAlpha(), ColorButton::bigIcons(), Ui_KPerfWidget::capsBox, Ui_KPerfWidget::capsColorOff, Ui_KPerfWidget::capsColorOn, KPerfWidget::IndicatorUi::color1, KPerfWidget::IndicatorUi::color2, KPerfWidget::IndicatorUi::color3, KPerfWidget::IndicatorUi::enable, KPerfWidget::IndicatorUi::hwEnable, I_COUNT, indicators, Ui_KPerfWidget::k95Label1, Ui_KPerfWidget::k95Label2, Ui_KPerfWidget::k95Label3, Ui_KPerfWidget::k95Label4, Ui_KPerfWidget::k95Label5, Ui_KPerfWidget::k95Label6, Ui_KPerfWidget::k95Line, Ui_KPerfWidget::k95Spacer, k95Widgets, Ui_KPerfWidget::lightBox, Ui_KPerfWidget::lightColor1, Ui_KPerfWidget::lightColor2, Ui_KPerfWidget::lightColor3, Ui_KPerfWidget::lockBox, Ui_KPerfWidget::lockColorOff, Ui_KPerfWidget::lockColorOn, Ui_KPerfWidget::macroBox, Ui_KPerfWidget::macroColorOff, Ui_KPerfWidget::macroColorOn, Ui_KPerfWidget::modeBox, Ui_KPerfWidget::modeColorOff, Ui_KPerfWidget::modeColorOn, Ui_KPerfWidget::muteBox, Ui_KPerfWidget::muteColorNA, Ui_KPerfWidget::muteColorOff, Ui_KPerfWidget::muteColorOn, Ui_KPerfWidget::numBox, Ui_KPerfWidget::numColorOff, Ui_KPerfWidget::numColorOn, Ui_KPerfWidget::scrollBox, Ui_KPerfWidget::scrollColorOff, Ui_KPerfWidget::scrollColorOn, ColorButton::setLabel(), Ui_KPerfWidget::setupUi(), ui, uiUpdated(), and updateMapper.

```
10                                      :
11      QWidget(parent),
12      ui(new Ui::KPerfWidget)
13  {
14      ui->setupUi(this);
15      // Set up indicators
```

```
16      indicators[0].enable = 0; indicators[0].hwEnable =
       ui->numBox; indicators[0].color1 = ui->numColorOn;
       indicators[0].color2 = ui->numColorOff; indicators[0].
       color3 = 0;
17      indicators[1].enable = 0; indicators[1].hwEnable =
       ui->capsBox; indicators[1].color1 = ui->capsColorOn;
       indicators[1].color2 = ui->capsColorOff;
       indicators[1].color3 = 0;
18      indicators[2].enable = 0; indicators[2].hwEnable =
       ui->scrollBox; indicators[2].color1 = ui->
       scrollColorOn; indicators[2].color2 = ui->
       scrollColorOff; indicators[2].color3 = 0;
19      indicators[3].enable = ui->modeBox; indicators[3].
       hwEnable = 0; indicators[3].color1 = ui->modeColorOn;
       indicators[3].color2 = ui->modeColorOff;
       indicators[3].color3 = 0;
20      indicators[4].enable = ui->macroBox; indicators[4].
       hwEnable = 0; indicators[4].color1 = ui->macroColorOn;
       indicators[4].color2 = ui->macroColorOff;
       indicators[4].color3 = 0;
21      indicators[5].enable = ui->lightBox; indicators[5].
       hwEnable = 0; indicators[5].color1 = ui->lightColor1;
       indicators[5].color2 = ui->lightColor2; indicators[5].
       color3 = ui->lightColor3;
22      indicators[6].enable = ui->lockBox; indicators[6].
       hwEnable = 0; indicators[6].color1 = ui->lockColorOn;
       indicators[6].color2 = ui->lockColorOff;
       indicators[6].color3 = 0;
23      indicators[7].enable = ui->muteBox; indicators[7].
       hwEnable = 0; indicators[7].color1 = ui->muteColorOn;
       indicators[7].color2 = ui->muteColorOff;
       indicators[7].color3 = ui->muteColorNA;
24      for(int i = 0; i < I_COUNT; i++){
25          indicators[i].color1->setLabel(false);
26          indicators[i].color1->bigIcons(true);
27          indicators[i].color1->allowAlpha(true);
28          indicators[i].color2->setLabel(false);
29          indicators[i].color2->bigIcons(true);
30          indicators[i].color2->allowAlpha(true);
31          if(indicators[i].color3){
32              indicators[i].color3->setLabel(false);
33              indicators[i].color3->bigIcons(true);
34              indicators[i].color3->allowAlpha(true);
35          }
36          // Map signals
37          if(indicators[i].enable){
38              connect(indicators[i].enable, SIGNAL(clicked(bool)), &
       updateMapper, SLOT(map()));
39              updateMapper.setMapping(indicators[i].enable, i);
40          }
41          if(indicators[i].hwEnable){
42              connect(indicators[i].hwEnable, SIGNAL(activated(int)), &
       updateMapper, SLOT(map()));
43              updateMapper.setMapping(indicators[i].hwEnable, i);
44          }
45          connect(indicators[i].color1, SIGNAL(colorChanged(QColor)), &
       updateMapper, SLOT(map()));
46          updateMapper.setMapping(indicators[i].color1, i);
47          connect(indicators[i].color2, SIGNAL(colorChanged(QColor)), &
       updateMapper, SLOT(map()));
48          updateMapper.setMapping(indicators[i].color2, i);
49          if(indicators[i].color3){
50              connect(indicators[i].color3, SIGNAL(colorChanged(QColor)), &
       updateMapper, SLOT(map()));
51              updateMapper.setMapping(indicators[i].color3, i);
52          }
53      }
54      connect(&updateMapper, SIGNAL(mapped(int)), this, SLOT(uiUpdated(int)));
55      k95Widgets << ui->modeBox << ui->modeColorOn <<
       ui->modeColorOff << ui->macroBox << ui->macroColorOn <<
       ui->macroColorOff << ui->k95Label1 << ui->k95Label2 <<
       ui->k95Label3 << ui->k95Label4 << ui->k95Label5 <<
       ui->k95Label6 << ui->k95Line << ui->k95Spacer;
56  }
```

Here is the call graph for this function:

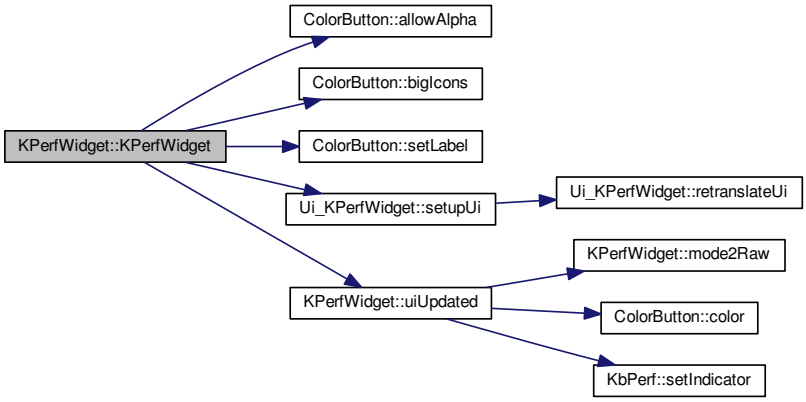

12.45.5.2 KPerfWidget::~KPerfWidget ( )

Definition at line 61 of file kperfwidget.cpp.

References ui.

```
61                              {
62     delete ui;
63 }
```

12.45.6 Member Function Documentation

12.45.6.1 void KPerfWidget::mode2Raw (HwMode *mode*, bool & *sw_enable*, i_hw & *hw_enable*) [private]

Parameters

[IN]	mode
[OUT]	sw_enable
[OUT]	hw_enable
[IN]	mode
[OUT]	sw_enable
[OUT]	hw_enable mode determines how colors at a key and separate indicators should be handled: Mode | sw | hw _ | _ | _ NORMAL | No color change at the key | use the separate indicator depending on key state ALWAYS_ON | No color change at the key | switch on separate indicator ALWAYS_OFF | No color change at the key | switch off separate indicator RGB | use color change at the key depending on color sliders | switch off separate indicator BOTH | use color change at the key depending on color sliders | use the separate indicator depending on key state

Definition at line 100 of file kperfwidget.cpp.

References ALWAYS_OFF, ALWAYS_ON, BOTH, NORMAL, KbPerf::NORMAL, KbPerf::OFF, KbPerf::ON, and RGB.

Referenced by uiUpdated().

```
100                                                                 {
101     switch(mode){
102     case NORMAL:
```

```
103         sw_enable = false;
104         hw_enable = KbPerf::NORMAL;
105         break;
106     case ALWAYS_ON:
107         sw_enable = false;
108         hw_enable = KbPerf::ON;
109         break;
110     case ALWAYS_OFF:
111         sw_enable = false;
112         hw_enable = KbPerf::OFF;
113         break;
114     case RGB:
115         sw_enable = true;
116         hw_enable = KbPerf::OFF;
117         break;
118     case BOTH:
119         sw_enable = true;
120         hw_enable = KbPerf::NORMAL;
121         break;
122     }
123 }
```

Here is the caller graph for this function:



12.45.6.2 void KPerfWidget::on_copyButton_clicked ( ) [private],[slot]

Definition at line 221 of file kperfwidget.cpp.

References KbProfile::currentMode(), KbProfile::modes(), perf, KbMode::perf(), profile, and ModeSelectDialog::selection().

```
221                                     {
222     ModeSelectDialog dialog(this, profile->currentMode(),
      profile->modes(), "Copy performance settings to:");
223     if(dialog.exec() != QDialog::Accepted)
224         return;
225     QList<KbMode*> selectedModes = dialog.selection();
226     foreach(KbMode* mode, selectedModes){
227         *mode->perf() = *perf;
228     }
229 }
```

Here is the call graph for this function:

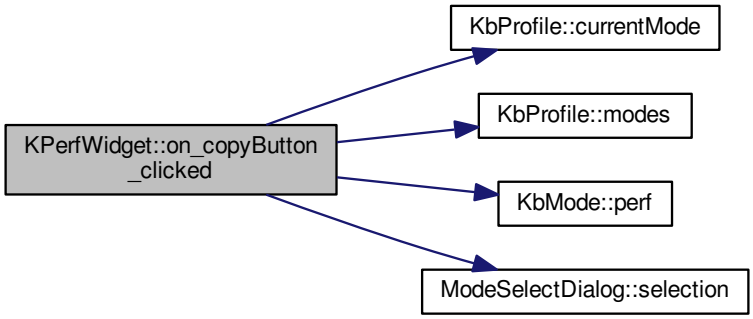

12.45.6.3 void KPerfWidget::on_intensityBox_valueChanged (int *arg1*) [private], [slot]

Definition at line 215 of file kperfwidget.cpp.

References KbPerf::iOpacity(), and perf.

```
215                                                 {
216     if(!perf)
217         return;
218     perf->iOpacity(arg1 / 100.f);
219 }
```

Here is the call graph for this function:



12.45.6.4 KPerfWidget::HwMode KPerfWidget::raw2Mode (bool *sw_enable,* i_hw *hw_enable*) [private]

Parameters

sw_enable	
hw_enable	

Returns

the mode of operation for key-coloring and separate indicators.

See Also

KPerfWidget::mode2Raw for details.

Definition at line 72 of file kperfwidget.cpp.

References ALWAYS_OFF, ALWAYS_ON, BOTH, NORMAL, KbPerf::NORMAL, KbPerf::OFF, KbPerf::ON, and RGB.

Referenced by setPerf().

```
72                                                                  {
73     if(sw_enable){
74         if(hw_enable == KbPerf::NORMAL)
75             return BOTH;
76         return RGB;
77     } else {
78         if(hw_enable == KbPerf::ON)
79             return ALWAYS_ON;
80         else if(hw_enable == KbPerf::OFF)
81             return ALWAYS_OFF;
82         return NORMAL;
83     }
84 }
```

Here is the caller graph for this function:

12.45.6.5 void KPerfWidget::setPerf (KbPerf * *newPerf,* KbProfile * *newProfile*)

Definition at line 125 of file kperfwidget.cpp.

References BOTH, ColorButton::color(), KPerfWidget::IndicatorUi::color1, KPerfWidget::IndicatorUi::color2, KPerfWidget::IndicatorUi::color3, KPerfWidget::IndicatorUi::enable, KbPerf::getIndicator(), HW_I_COUNT, KPerfWidget::IndicatorUi::hwEnable, I_COUNT, indicators, Ui_KPerfWidget::intensityBox, KbPerf::iOpacity(), KeyMap::K95, k95Widgets, KbProfile::keyMap(), Ui_KPerfWidget::label_12, Ui_KPerfWidget::label_14, Ui_KPerfWidget::label_17, KeyMap::model(), Ui_KPerfWidget::muteBox, Ui_KPerfWidget::muteColorNA, Ui_KPerfWidget::muteColorOff, Ui_KPerfWidget::muteColorOn, perf, profile, raw2Mode(), RGB, KeyMap::STRAFE, and ui.

Referenced by KbWidget::modeChanged().

```
125                                                     {
126     perf = newPerf;
127     profile = newProfile;
128     // Set intensity
129     ui->intensityBox->setValue(round(perf->iOpacity() * 100.f));
130     // Set hardware indicator values
131     for(int i = 0; i < HW_I_COUNT; i++){
132         QColor c1, c2, c3;
133         bool software;
134         i_hw hardware;
135         perf->getIndicator((indicator)i, c1, c2, c3, software, hardware);
136         HwMode mode = raw2Mode(software, hardware);
137         indicators[i].hwEnable->setCurrentIndex((int)mode);
138         indicators[i].color1->color(c1);
139         indicators[i].color2->color(c2);
140         if(mode == RGB || mode == BOTH){
141             indicators[i].color1->setEnabled(true);
142             indicators[i].color2->setEnabled(true);
143         } else {
144             indicators[i].color1->setEnabled(false);
145             indicators[i].color2->setEnabled(false);
146         }
147     }
148     // Set software indicators
149     for(int i = HW_I_COUNT; i < I_COUNT; i++){
150         QColor c1, c2, c3;
151         bool software;
152         i_hw hardware;
153         perf->getIndicator((indicator)i, c1, c2, c3, software, hardware);
154         indicators[i].enable->setChecked(software);
155         indicators[i].color1->color(c1);
156         indicators[i].color2->color(c2);
157         if(indicators[i].color3) indicators[i].color3->
    color(c3);
158         if(software){
159             indicators[i].color1->setEnabled(true);
160             indicators[i].color2->setEnabled(true);
161             if(indicators[i].color3) indicators[i].color3->setEnabled(true);
162         } else {
163             indicators[i].color1->setEnabled(false);
164             indicators[i].color2->setEnabled(false);
165             if(indicators[i].color3) indicators[i].color3->setEnabled(false);
166         }
167     }
168     // Hide K95 indicators on non-K95s
169     if(profile->keyMap().model() == KeyMap::K95){
170         foreach(QWidget* w, k95Widgets)
171             w->show();
172     } else {
173         foreach(QWidget* w, k95Widgets)
174             w->hide();
175         if(profile->keyMap().model() == KeyMap::STRAFE) { // hide
```

```
        indicators unsupported by STRAFE
176             ui->muteBox->hide();
177             ui->muteColorOn->hide();
178             ui->muteColorOff->hide();
179             ui->muteColorNA->hide();
180             ui->label_12->hide();
181             ui->label_14->hide();
182             ui->label_17->hide();
183         }
184     }
185 }
```

Here is the call graph for this function:

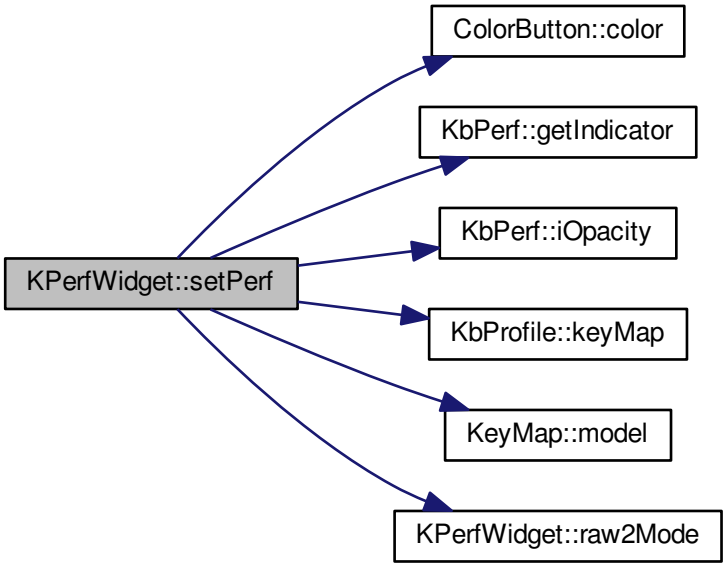

Here is the caller graph for this function:

12.45.6.6 void KPerfWidget::uiUpdated (int *index*) [private],[slot]

Definition at line 187 of file kperfwidget.cpp.

References ColorButton::color(), KPerfWidget::IndicatorUi::color1, KPerfWidget::IndicatorUi::color2, KPerfWidget::IndicatorUi::color3, KPerfWidget::IndicatorUi::enable, indicators, mode2Raw(), KbPerf::NONE, perf, and KbPerf::setIndicator().

Referenced by KPerfWidget().

```
187                                     {
188     if(!perf)
189         return;
190     // Read HW/SW enable state
191     bool software;
192     i_hw hardware;
193     if(indicators[index].enable){
194         software = indicators[index].enable->isChecked();
195         hardware = KbPerf::NONE;
196     } else {
197         mode2Raw((HwMode)indicators[index].hwEnable->currentIndex(), software,
      hardware);
198     }
199     // Enable/disable color buttons based on whether or not the indicator is turned on
200     if(software){
201         indicators[index].color1->setEnabled(true);
202         indicators[index].color2->setEnabled(true);
203         if(indicators[index].color3) indicators[index].
      color3->setEnabled(true);
204     } else {
205         indicators[index].color1->setEnabled(false);
206         indicators[index].color2->setEnabled(false);
207         if(indicators[index].color3) indicators[index].
      color3->setEnabled(false);
208     }
209     QColor c1 = indicators[index].color1->color();
210     QColor c2 = indicators[index].color2->color();
211     QColor c3 = indicators[index].color3 ? indicators[index].
      color3->color() : QColor();
212     perf->setIndicator((indicator)index, c1, c2, c3, software, hardware);
213 }
```

Here is the call graph for this function:

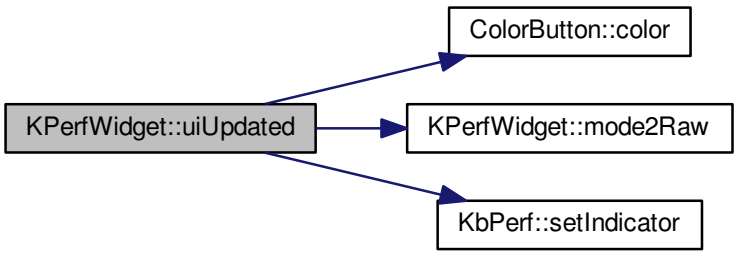

Here is the caller graph for this function:



12.45.7 Field Documentation

12.45.7.1 const int KPerfWidget::HW_I_COUNT = KbPerf::HW_I_COUNT [static]

Definition at line 27 of file kperfwidget.h.

Referenced by setPerf().

12.45.7.2 const int KPerfWidget::I_COUNT = KbPerf::I_COUNT [static]

Definition at line 26 of file kperfwidget.h.

Referenced by KPerfWidget(), and setPerf().

12.45.7.3 IndicatorUi KPerfWidget::indicators[I_COUNT] [private]

Definition at line 59 of file kperfwidget.h.

Referenced by KPerfWidget(), setPerf(), and uiUpdated().

12.45.7.4 QList<QWidget*> KPerfWidget::k95Widgets [private]

Definition at line 60 of file kperfwidget.h.

Referenced by KPerfWidget(), and setPerf().

12.45.7.5 KbPerf* KPerfWidget::perf [private]

Definition at line 34 of file kperfwidget.h.

Referenced by on_copyButton_clicked(), on_intensityBox_valueChanged(), setPerf(), and uiUpdated().

12.45.7.6 KbProfile* KPerfWidget::profile [private]

Definition at line 35 of file kperfwidget.h.

Referenced by on_copyButton_clicked(), and setPerf().

12.45.7.7 Ui::KPerfWidget* KPerfWidget::ui [private]

Definition at line 32 of file kperfwidget.h.

Referenced by KPerfWidget(), setPerf(), and ~KPerfWidget().

12.45.7.8 QSignalMapper KPerfWidget::updateMapper [private]

Definition at line 62 of file kperfwidget.h.

Referenced by KPerfWidget().

The documentation for this class was generated from the following files:

- src/ckb/kperfwidget.h
- src/ckb/kperfwidget.cpp

12.46 Ui::LayoutDialog Class Reference

`#include <src/ckb/ui_layoutdialog.h>`

Inheritance diagram for Ui::LayoutDialog:

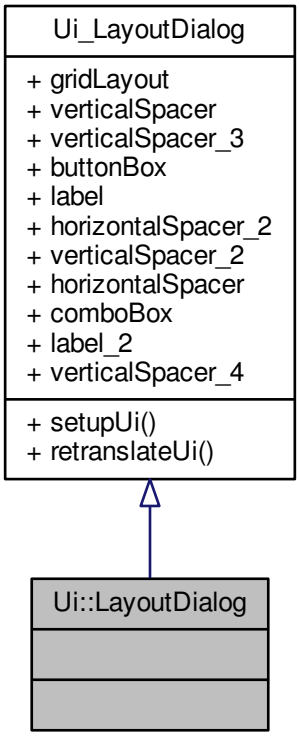

Collaboration diagram for Ui::LayoutDialog:

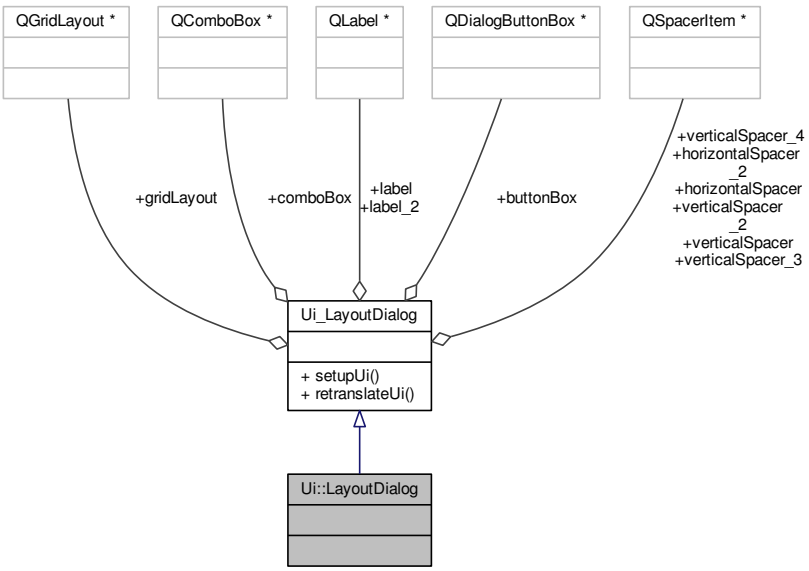

Public Member Functions

- void setupUi (QDialog *LayoutDialog)
- void retranslateUi (QDialog *LayoutDialog)

Data Fields

- QGridLayout * gridLayout
- QSpacerItem * verticalSpacer
- QSpacerItem * verticalSpacer_3
- QDialogButtonBox * buttonBox
- QLabel * label
- QSpacerItem * horizontalSpacer_2
- QSpacerItem * verticalSpacer_2
- QSpacerItem * horizontalSpacer
- QComboBox * comboBox
- QLabel * label_2
- QSpacerItem * verticalSpacer_4

12.46.1 Detailed Description

Definition at line 119 of file ui_layoutdialog.h.

12.46.2 Member Function Documentation

12.46.2.1 void Ui_LayoutDialog::retranslateUi (QDialog * *LayoutDialog*) [inline], [inherited]

Definition at line 109 of file ui_layoutdialog.h.

References Ui_LayoutDialog::label, and Ui_LayoutDialog::label_2.

Referenced by Ui_LayoutDialog::setupUi().

```
110     {
111         LayoutDialog->setWindowTitle(QApplication::translate("LayoutDialog", "Keyboard Layout", Q_NULLPTR))
    ;
112         label->setText(QApplication::translate("LayoutDialog", "Please select your keyboard layout:",
    Q_NULLPTR));
113         label_2->setText(QApplication::translate("LayoutDialog", "Note: this only controls the
     layout within the ckb application. If your keys are typing the wrong characters, check your system preferences.",
     Q_NULLPTR));
114     } // retranslateUi
```

Here is the caller graph for this function:

12.46.2.2 void Ui_LayoutDialog::setupUi (QDialog * *LayoutDialog*) [inline], [inherited]

Definition at line 41 of file ui_layoutdialog.h.

References Ui_LayoutDialog::buttonBox, Ui_LayoutDialog::comboBox, Ui_LayoutDialog::gridLayout, Ui_LayoutDialog::horizontalSpacer, Ui_LayoutDialog::horizontalSpacer_2, Ui_LayoutDialog::label, Ui_LayoutDialog::label_2, Ui_LayoutDialog::retranslateUi(), Ui_LayoutDialog::verticalSpacer, Ui_LayoutDialog::verticalSpacer_2, Ui_LayoutDialog::verticalSpacer_3, and Ui_LayoutDialog::verticalSpacer_4.

Referenced by LayoutDialog::LayoutDialog().

```
42     {
43         if (LayoutDialog->objectName().isEmpty())
44             LayoutDialog->setObjectName(QStringLiteral("LayoutDialog"));
45         LayoutDialog->resize(400, 240);
46         gridLayout = new QGridLayout(LayoutDialog);
47         gridLayout->setObjectName(QStringLiteral("gridLayout"));
48         verticalSpacer = new QSpacerItem(20, 40, QSizePolicy::Minimum, QSizePolicy::Expanding
    );
49
50         gridLayout->addItem(verticalSpacer, 6, 0, 1, 3);
51
52         verticalSpacer_3 = new QSpacerItem(20, 40, QSizePolicy::Minimum,
    QSizePolicy::Expanding);
53
54         gridLayout->addItem(verticalSpacer_3, 0, 1, 1, 1);
55
56         buttonBox = new QDialogButtonBox(LayoutDialog);
57         buttonBox->setObjectName(QStringLiteral("buttonBox"));
58         buttonBox->setOrientation(Qt::Horizontal);
59         buttonBox->setStandardButtons(QDialogButtonBox::Ok);
60
61         gridLayout->addWidget(buttonBox, 7, 0, 1, 3);
62
63         label = new QLabel(LayoutDialog);
64         label->setObjectName(QStringLiteral("label"));
65         label->setAlignment(Qt::AlignCenter);
66
67         gridLayout->addWidget(label, 1, 0, 1, 3);
68
69         horizontalSpacer_2 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
70
71         gridLayout->addItem(horizontalSpacer_2, 3, 2, 1, 1);
72
73         verticalSpacer_2 = new QSpacerItem(20, 15, QSizePolicy::Minimum, QSizePolicy::Fixed
    );
74
75         gridLayout->addItem(verticalSpacer_2, 4, 1, 1, 1);
76
77         horizontalSpacer = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
78
79         gridLayout->addItem(horizontalSpacer, 3, 0, 1, 1);
80
81         comboBox = new QComboBox(LayoutDialog);
82         comboBox->setObjectName(QStringLiteral("comboBox"));
83
84         gridLayout->addWidget(comboBox, 3, 1, 1, 1);
85
86         label_2 = new QLabel(LayoutDialog);
87         label_2->setObjectName(QStringLiteral("label_2"));
88         QFont font;
89         font.setPointSize(8);
90         font.setItalic(true);
91         label_2->setFont(font);
92         label_2->setAlignment(Qt::AlignCenter);
93         label_2->setWordWrap(true);
94
95         gridLayout->addWidget(label_2, 5, 0, 1, 3);
96
97         verticalSpacer_4 = new QSpacerItem(20, 5, QSizePolicy::Minimum, QSizePolicy::Fixed)
    ;
98
99         gridLayout->addItem(verticalSpacer_4, 2, 1, 1, 1);
100
101
102         retranslateUi(LayoutDialog);
103         QObject::connect(buttonBox, SIGNAL(accepted()), LayoutDialog, SLOT(accept()));
104         QObject::connect(buttonBox, SIGNAL(rejected()), LayoutDialog, SLOT(reject()));
105
106         QMetaObject::connectSlotsByName(LayoutDialog);
107     } // setupUi
```

Here is the call graph for this function:



Here is the caller graph for this function:

12.46.3 Field Documentation

12.46.3.1 QDialogButtonBox* Ui_LayoutDialog::buttonBox [inherited]

Definition at line 32 of file ui_layoutdialog.h.

Referenced by Ui_LayoutDialog::setupUi().

12.46.3.2 QComboBox* Ui_LayoutDialog::comboBox [inherited]

Definition at line 37 of file ui_layoutdialog.h.

Referenced by LayoutDialog::LayoutDialog(), LayoutDialog::selected(), and Ui_LayoutDialog::setupUi().

12.46.3.3 QGridLayout* Ui_LayoutDialog::gridLayout [inherited]

Definition at line 29 of file ui_layoutdialog.h.

Referenced by Ui_LayoutDialog::setupUi().

12.46.3.4 QSpacerItem* Ui_LayoutDialog::horizontalSpacer [inherited]

Definition at line 36 of file ui_layoutdialog.h.

Referenced by Ui_LayoutDialog::setupUi().

12.46.3.5 QSpacerItem* Ui_LayoutDialog::horizontalSpacer_2 [inherited]

Definition at line 34 of file ui_layoutdialog.h.

Referenced by Ui_LayoutDialog::setupUi().

12.46.3.6 QLabel* Ui_LayoutDialog::label [inherited]

Definition at line 33 of file ui_layoutdialog.h.

Referenced by Ui_LayoutDialog::retranslateUi(), and Ui_LayoutDialog::setupUi().

12.46.3.7 QLabel* Ui_LayoutDialog::label_2 [inherited]

Definition at line 38 of file ui_layoutdialog.h.

Referenced by Ui_LayoutDialog::retranslateUi(), and Ui_LayoutDialog::setupUi().

12.46.3.8 QSpacerItem* Ui_LayoutDialog::verticalSpacer [inherited]

Definition at line 30 of file ui_layoutdialog.h.

Referenced by Ui_LayoutDialog::setupUi().

12.46.3.9 QSpacerItem* Ui_LayoutDialog::verticalSpacer_2 [inherited]

Definition at line 35 of file ui_layoutdialog.h.

Referenced by Ui_LayoutDialog::setupUi().

12.46.3.10 QSpacerItem* Ui_LayoutDialog::verticalSpacer_3 [inherited]

Definition at line 31 of file ui_layoutdialog.h.

Referenced by Ui_LayoutDialog::setupUi().

12.46.3.11 QSpacerItem* Ui_LayoutDialog::verticalSpacer_4 [inherited]

Definition at line 39 of file ui_layoutdialog.h.

Referenced by Ui_LayoutDialog::setupUi().

The documentation for this class was generated from the following file:

- src/ckb/ui_layoutdialog.h

12.47 LayoutDialog Class Reference

`#include <src/ckb/layoutdialog.h>`

Inheritance diagram for LayoutDialog:

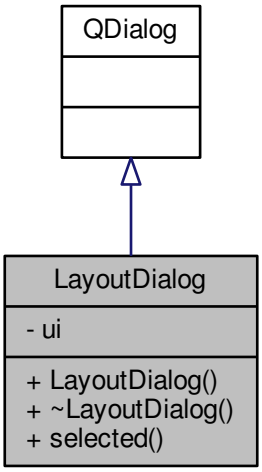

Collaboration diagram for LayoutDialog:

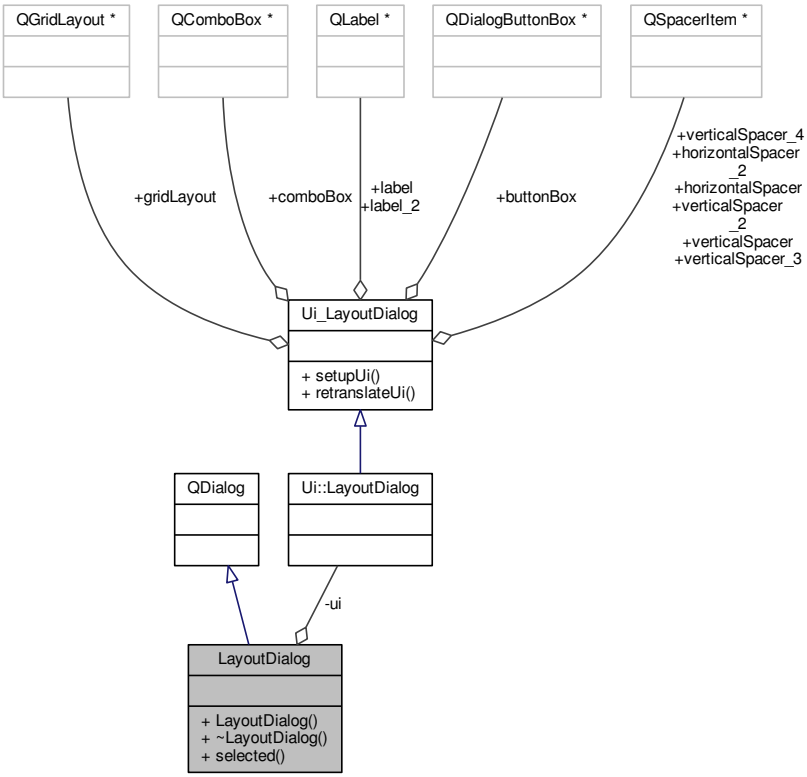

Public Member Functions

- LayoutDialog (QWidget *parent=0)
- ~LayoutDialog ()
- KeyMap::Layout selected () const

Private Attributes

- Ui::LayoutDialog * ui

12.47.1 Detailed Description

Definition at line 13 of file layoutdialog.h.

12.47.2 Constructor & Destructor Documentation

12.47.2.1 LayoutDialog::LayoutDialog (QWidget * *parent* = 0) [explicit]

Definition at line 5 of file layoutdialog.cpp.

References Ui_LayoutDialog::comboBox, Kb::layout(), KeyMap::layoutNames(), Ui_LayoutDialog::setupUi(), and ui.

```
5                                       :
6     QDialog(parent),
7     ui(new Ui::LayoutDialog) {
8     ui->setupUi(this);
9     // Populate layout list
10     ui->comboBox->addItems(KeyMap::layoutNames());
11     ui->comboBox->setCurrentIndex((int)Kb::layout());
12 }
```

Here is the call graph for this function:

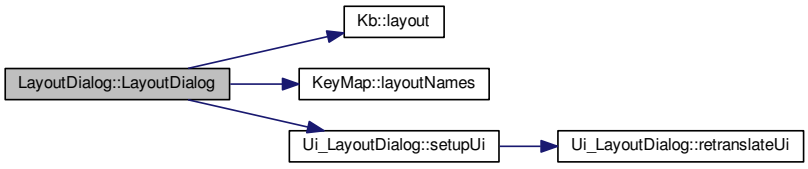

12.47.2.2 LayoutDialog::~LayoutDialog ( )

Definition at line 14 of file layoutdialog.cpp.

References ui.

```
14                              {
15     delete ui;
16 }
```

12.47.3 Member Function Documentation

12.47.3.1 KeyMap::Layout LayoutDialog::selected ( ) const

Definition at line 18 of file layoutdialog.cpp.

References Ui_LayoutDialog::comboBox, and ui.

Referenced by SettingsWidget::showLayoutDialog().

```
18                                          {
19     return (KeyMap::Layout)ui->comboBox->currentIndex();
20 }
```

Here is the caller graph for this function:



12.47.4 Field Documentation

12.47.4.1 Ui::LayoutDialog* LayoutDialog::ui [private]

Definition at line 24 of file layoutdialog.h.

Referenced by LayoutDialog(), selected(), and ~LayoutDialog().

The documentation for this class was generated from the following files:

- src/ckb/layoutdialog.h
- src/ckb/layoutdialog.cpp

12.48 MacroReader Class Reference

The MacroReader class creates a worker thread object. It does a connect do delayed deletion of thread local variables in the case the worker thread terminates.

`#include <src/ckb/macroreader.h>`

Inheritance diagram for MacroReader:

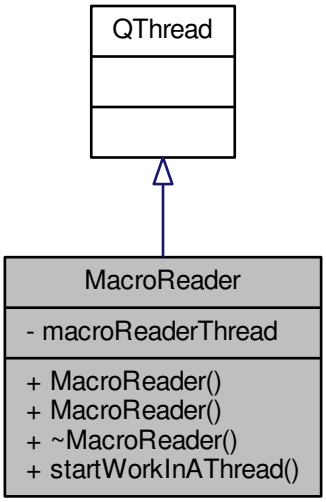

Collaboration diagram for MacroReader:

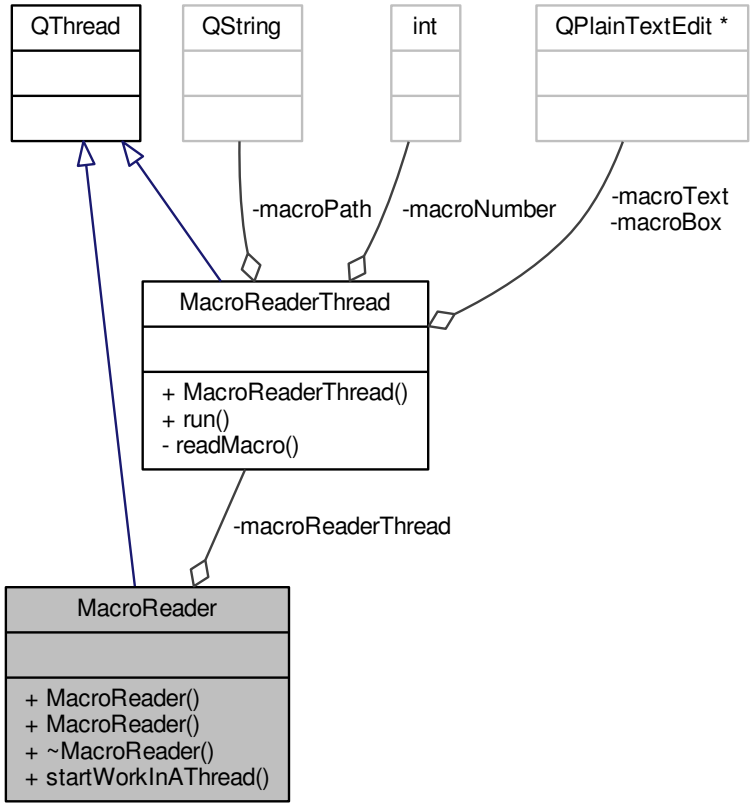

Public Member Functions

- MacroReader ()

  MacroReader Calling MacroReader without params is not allowed.
- MacroReader (int macroNumber, QString macroPath, QPlainTextEdit ∗macBox, QPlainTextEdit ∗macText)

  MacroReader This is the only allowed constructor. It only calls startWorkInAThread() with the four params.
- ∼MacroReader ()
- void startWorkInAThread (int macroNumber, QString macroPath, QPlainTextEdit ∗macBox, QPlainTextEdit ∗macText)

  startWorkInAThread This member function creates the new thread object and starts it with the four params.

Private Attributes

- MacroReaderThread ∗ macroReaderThread

12.48.1 Detailed Description

Definition at line 87 of file macroreader.h.

12.48.2 Constructor & Destructor Documentation

12.48.2.1 MacroReader::MacroReader ( )

Definition at line 9 of file macroreader.cpp.

```
9                           {
10     qDebug() << "Calling MacroReader without params is not allowed.";
11 }
```

12.48.2.2 MacroReader::MacroReader (int *macroNumber*, QString *macroPath*, QPlainTextEdit * *macBox*, QPlainTextEdit * *macText*)

Parameters

macroNumber	
macroPath	
macBox	
macText	

Definition at line 13 of file macroreader.cpp.

References startWorkInAThread().

```
13
       {
14     startWorkInAThread(macroNumber, macroPath, macBox, macText);
15 }
```

Here is the call graph for this function:



12.48.2.3 MacroReader::~MacroReader ( )

Definition at line 16 of file macroreader.cpp.

```
16 {}
```

12.48.3 Member Function Documentation

12.48.3.1 void MacroReader::startWorkInAThread (int *macroNumber*, QString *macroPath*, QPlainTextEdit * *macBox*, QPlainTextEdit * *macText*)

Parameters

macroNumber	
macroPath	
macBox	
macText	

Definition at line 18 of file macroreader.cpp.

References macroReaderThread.

Referenced by MacroReader().

```
18                                                  {
19      macroReaderThread = new MacroReaderThread(macroNumber, macroPath,
        macBox, macText);
20      connect(macroReaderThread, &MacroReaderThread::finished,
        macroReaderThread, &QObject::deleteLater);
21      macroReaderThread->start();
22  }
```

Here is the caller graph for this function:



12.48.4 Field Documentation

12.48.4.1 MacroReaderThread* MacroReader::macroReaderThread [private]

Definition at line 123 of file macroreader.h.

Referenced by startWorkInAThread().

The documentation for this class was generated from the following files:

- src/ckb/macroreader.h
- src/ckb/macroreader.cpp

12.49 MacroReaderThread Class Reference

The MacroReaderThread class is responsible for reading Macro Key Values. It is created as a separate thread (worker thread) for reading macro commands from an fresh opened notify channel. Standard notify channel for macro definitions is number 2.

`#include <src/ckb/macroreader.h>`

Inheritance diagram for MacroReaderThread:

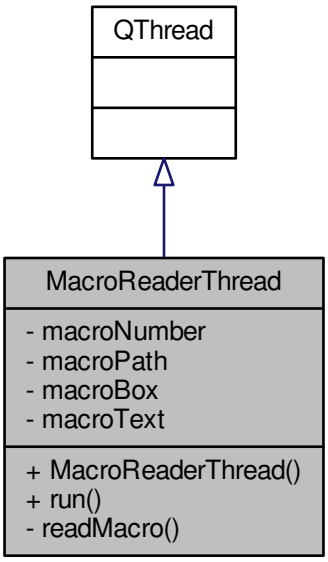

Collaboration diagram for MacroReaderThread:

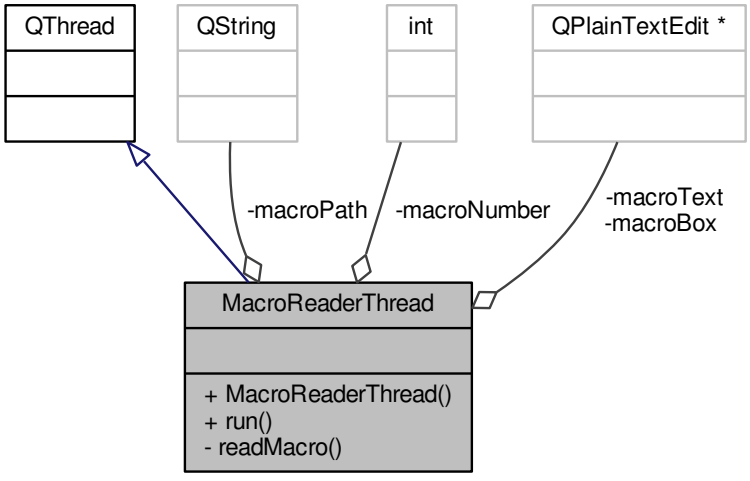

Public Member Functions

- MacroReaderThread (int macNum, QString macPath, QPlainTextEdit ∗macBox, QPlainTextEdit ∗macText)

  MacroReaderThread saves the four params to local vars with similar varNames.

- void run () Q_DECL_OVERRIDE

  run is the notification reader main loop.

Private Slots

- void readMacro (QString line)

  readMacro is called for each line received by the worker thread. The method ist called via signal (metaObject) from the worker thread, which reads the keyboard input. Just display the key code in the macroBox Widget without he trailing newline and reposition the cursor in the macro pane.

Private Attributes

- int macroNumber

  macroNumber Filenames of nofity channels have the structure <input-device-path>/ckb1/notify<number> First part is hold in macroPath, the number is hold in macroNumber. macroNumber may range from 0 to 9.
- QString macroPath

  macroPath holds the path for the notify channel
- QPlainTextEdit * macroBox

  macroBox will receive the Macro Key Values sent from the keyboard while defining a new macro.
- QPlainTextEdit * macroText

  macroText is the other textpane used in the UI while typing new macros. That variable is used for setting the focus to that textpane and to set the cursor at EOT.

12.49.1 Detailed Description

While the worker Thread gets input from the keyboard, the lines are sent via signalling (metaobject) to run a member function in the context of the Qt UI manager.

When the notify channel is closed (that's normally done by pressing "Stop"-Button in the UI), the worker thread closes the channelFile and leaves.

See Also

MacroReaderThread(), ~MacroReaderThread(), readMaco(), run()

Definition at line 22 of file macroreader.h.

12.49.2 Constructor & Destructor Documentation

12.49.2.1 MacroReaderThread::MacroReaderThread (int *macNum*, QString *macPath*, QPlainTextEdit * *macBox*, QPlainTextEdit * *macText*) [inline]

Parameters

macNum	
macPath	
macBox	
macText	

Definition at line 55 of file macroreader.h.

References macroBox, macroNumber, macroPath, and macroText.

```
55                                                                                  {
56         macroNumber = macNum;
57         macroPath = macPath;
58         macroBox = macBox;
59         macroText = macText;
60     }
```

12.49.3 Member Function Documentation

12.49.3.1 void MacroReaderThread::readMacro (QString *line*) [private],[slot]

This is used, because the worker thread shouldn't get access to the UI elements (and normally has none, because the pointers macroBox and macroText remain on the stack). That mechanism guarantees, that the UI does not freeze if it happens something magic to the reading function.

Parameters

line	holds the line just got from keyboard

We want to see the keys as they appear in the macroText Widget.

Because it is possible to change the Focus via keyboard, we must set the focus on each call.

Definition at line 27 of file macroreader.cpp.

References macroBox, and macroText.

```
27                                              {
32     macroText->setFocus();
33     QTextCursor c = macroText->textCursor();
34     c.setPosition(macroText->toPlainText().length());
35     macroText->setTextCursor(c);
36     macroBox->appendPlainText(line.left(line.size()-1));
37 }
```

12.49.3.2 void MacroReaderThread::run ( )

MacroReaderThread::run is the standard main function for a thread. Tries to open a file <macroPath><macroNumber> several times (in this case, it should be possible the first time (the code was recycled from kb.cpp).

While the file is open, read lines an signal them via metaObject() to the main thread. When the file is closed by the sender, close it as reader and terminate.

Definition at line 47 of file macroreader.cpp.

References macroBox, macroNumber, macroPath, and macroText.

```
47                              {
48     qDebug() << "MacroReader::run() started with" << macroNumber << "and" <<
       macroPath << "and" << macroBox << "and" << macroText;
49
50     QFile macroFile(macroPath);
51     // Wait a small amount of time for the node to open (100ms) (code reused from kb.cpp)
52     QThread::usleep(100000);
53     if(!macroFile.open(QIODevice::ReadOnly)){
54         // If it's still not open, try again before giving up (1s at a time, 10s total)
55         QThread::usleep(900000);
56         for(int i = 1; i < 10; i++){
57             if(macroFile.open(QIODevice::ReadOnly))
58                 break;
59             QThread::sleep(1);
60         }
61         if(!macroFile.isOpen()) {
62             qDebug() << QString("unable to open macroFile (%1)").arg(macroPath);
63             return;
64         }
65     }
66     // Read data from notification node macroPath
67     // Count time between lines read from the interface
68     QByteArray line;
69     timeval t;
70     gettimeofday(&t, NULL);
71     double tstart = t.tv_sec+(t.tv_usec/1000000.0);
72     bool firstline = true;
73
74     while(macroFile.isOpen() && (line = macroFile.readLine()).length() > 0){
75         QString text = QString::fromUtf8(line);
76         gettimeofday(&t, NULL);
77         double tnow = t.tv_sec+(t.tv_usec/1000000.0);
78
79         // in the first line, there is only a delay "before start". Don't use it.
80         if (!firstline) {
```

```
81              text.prepend ("\n");
82              text.prepend (QString::number ((tnow - tstart) * 1000000.0, 'f', 0));
83              text.prepend ("=");
84          } else firstline = false;
85          tstart = tnow;
86
87          metaObject()->invokeMethod(this, "readMacro", Qt::QueuedConnection, Q_ARG(QString, text));
88      }
89      qDebug() << "MacroReader::run() ends.";
90      macroFile.close();
91      QThread::exit ();
92  }
```

12.49.4 Field Documentation

12.49.4.1 QPlainTextEdit* MacroReaderThread::macroBox [private]

Definition at line 40 of file macroreader.h.

Referenced by MacroReaderThread(), readMacro(), and run().

12.49.4.2 int MacroReaderThread::macroNumber [private]

Definition at line 31 of file macroreader.h.

Referenced by MacroReaderThread(), and run().

12.49.4.3 QString MacroReaderThread::macroPath [private]

See Also

macroNumber

Definition at line 36 of file macroreader.h.

Referenced by MacroReaderThread(), and run().

12.49.4.4 QPlainTextEdit* MacroReaderThread::macroText [private]

Definition at line 45 of file macroreader.h.

Referenced by MacroReaderThread(), readMacro(), and run().

The documentation for this class was generated from the following files:

- src/ckb/macroreader.h
- src/ckb/macroreader.cpp

12.50 Ui::MainWindow Class Reference

`#include <src/ckb/ui_mainwindow.h>`

Inheritance diagram for Ui::MainWindow:

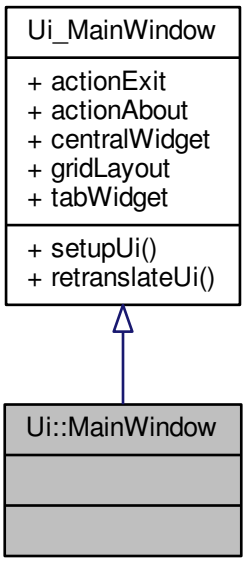

Collaboration diagram for Ui::MainWindow:

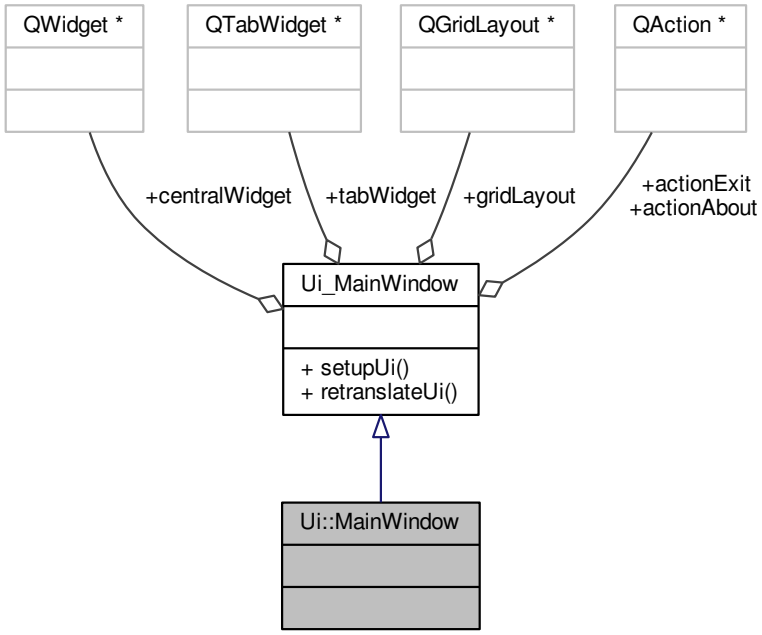

Public Member Functions

- void setupUi (QMainWindow *MainWindow)
- void retranslateUi (QMainWindow *MainWindow)

Data Fields

- QAction * actionExit
- QAction * actionAbout
- QWidget * centralWidget
- QGridLayout * gridLayout
- QTabWidget * tabWidget

12.50.1 Detailed Description

Definition at line 79 of file ui_mainwindow.h.

12.50.2 Member Function Documentation

12.50.2.1 void Ui_MainWindow::retranslateUi (QMainWindow * *MainWindow*) [inline], [inherited]

Definition at line 68 of file ui_mainwindow.h.

References Ui_MainWindow::actionAbout, and Ui_MainWindow::actionExit.

Referenced by Ui_MainWindow::setupUi().

```
69     {
70         MainWindow->setWindowTitle(QApplication::translate("MainWindow", "ckb-next", Q_NULLPTR));
71         actionExit->setText(QApplication::translate("MainWindow", "Exit", Q_NULLPTR));
72         actionExit->setShortcut(QApplication::translate("MainWindow", "Ctrl+Q", Q_NULLPTR));
73         actionAbout->setText(QApplication::translate("MainWindow", "About", Q_NULLPTR));
74     } // retranslateUi
```

Here is the caller graph for this function:



12.50.2.2 void Ui_MainWindow::setupUi (QMainWindow * *MainWindow*) [inline], [inherited]

Definition at line 33 of file ui_mainwindow.h.

References Ui_MainWindow::actionAbout, Ui_MainWindow::actionExit, Ui_MainWindow::centralWidget, Ui_MainWindow::gridLayout, Ui_MainWindow::retranslateUi(), and Ui_MainWindow::tabWidget.

Referenced by MainWindow::MainWindow().

```
34     {
35         if (MainWindow->objectName().isEmpty())
36             MainWindow->setObjectName(QStringLiteral("MainWindow"));
37         MainWindow->resize(1000, 750);
38         MainWindow->setMinimumSize(QSize(1000, 750));
39         QIcon icon;
40         icon.addFile(QStringLiteral(":/img/ckb-logo.png"), QSize(), QIcon::Normal, QIcon::Off);
```

```
41          MainWindow->setWindowIcon(icon);
42          MainWindow->setUnifiedTitleAndToolBarOnMac(true);
43          actionExit = new QAction(MainWindow);
44          actionExit->setObjectName(QStringLiteral("actionExit"));
45          actionAbout = new QAction(MainWindow);
46          actionAbout->setObjectName(QStringLiteral("actionAbout"));
47          centralWidget = new QWidget(MainWindow);
48          centralWidget->setObjectName(QStringLiteral("centralWidget"));
49          gridLayout = new QGridLayout(centralWidget);
50          gridLayout->setSpacing(6);
51          gridLayout->setContentsMargins(11, 11, 11, 11);
52          gridLayout->setObjectName(QStringLiteral("gridLayout"));
53          tabWidget = new QTabWidget(centralWidget);
54          tabWidget->setObjectName(QStringLiteral("tabWidget"));
55
56          gridLayout->addWidget(tabWidget, 0, 0, 1, 1);
57
58          MainWindow->setCentralWidget(centralWidget);
59
60          retranslateUi(MainWindow);
61
62          tabWidget->setCurrentIndex(-1);
63
64
65          QMetaObject::connectSlotsByName(MainWindow);
66      } // setupUi
```

Here is the call graph for this function:



Here is the caller graph for this function:

12.50.3 Field Documentation

12.50.3.1 QAction* Ui_MainWindow::actionAbout [inherited]

Definition at line 28 of file ui_mainwindow.h.

Referenced by Ui_MainWindow::retranslateUi(), and Ui_MainWindow::setupUi().

12.50.3.2 QAction* Ui_MainWindow::actionExit [inherited]

Definition at line 27 of file ui_mainwindow.h.

Referenced by MainWindow::MainWindow(), Ui_MainWindow::retranslateUi(), and Ui_MainWindow::setupUi().

12.50.3.3 QWidget* Ui_MainWindow::centralWidget [inherited]

Definition at line 29 of file ui_mainwindow.h.

Referenced by Ui_MainWindow::setupUi().

12.50.3.4 QGridLayout* Ui_MainWindow::gridLayout [inherited]

Definition at line 30 of file ui_mainwindow.h.

Referenced by Ui_MainWindow::setupUi().

12.50.3.5 QTabWidget* Ui_MainWindow::tabWidget [inherited]

Definition at line 31 of file ui_mainwindow.h.

Referenced by MainWindow::addDevice(), MainWindow::MainWindow(), MainWindow::removeDevice(), Ui_MainWindow::setupUi(), and MainWindow::showFwUpdateNotification().

The documentation for this class was generated from the following file:

- src/ckb/ui_mainwindow.h

12.51 MainWindow Class Reference

`#include <src/ckb/mainwindow.h>`

Inheritance diagram for MainWindow:

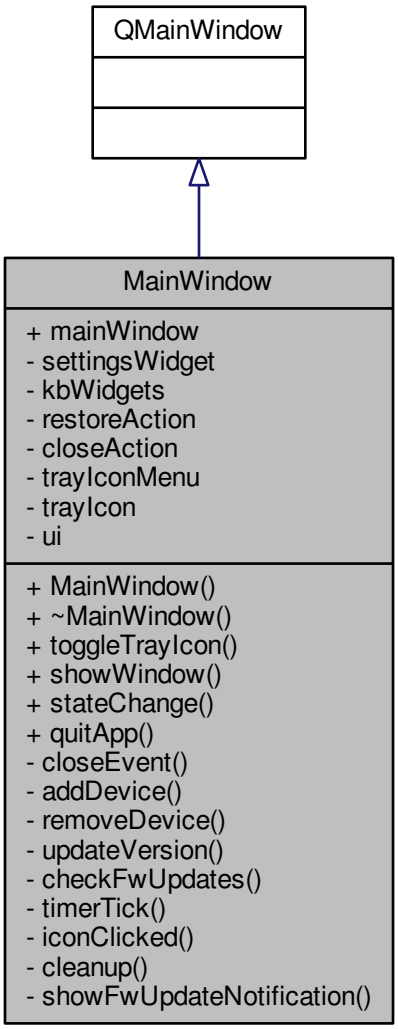

Collaboration diagram for MainWindow:

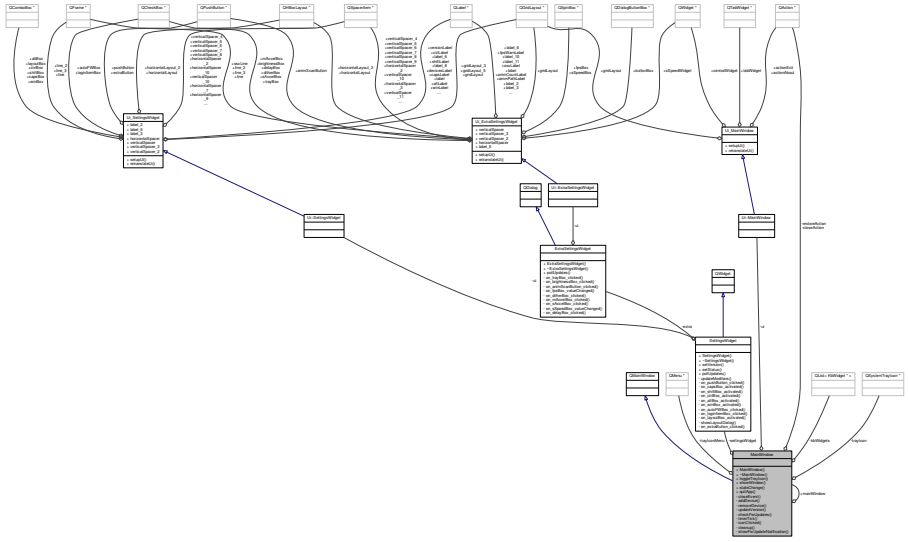

Public Slots

- void showWindow ()
- void stateChange (Qt::ApplicationState state)
- void quitApp ()

Public Member Functions

- MainWindow (QWidget ∗parent=0)
- ∼MainWindow ()
- void toggleTrayIcon (bool visible)

Static Public Attributes

- static MainWindow ∗ mainWindow = 0

Private Slots

- void addDevice (Kb ∗device)
- void removeDevice (Kb ∗device)
- void updateVersion ()
- void checkFwUpdates ()
- void timerTick ()
- void iconClicked (QSystemTrayIcon::ActivationReason reason)
- void cleanup ()
- void showFwUpdateNotification (QWidget ∗widget, float version)

Private Member Functions

- void closeEvent (QCloseEvent ∗event)

Private Attributes

- SettingsWidget * settingsWidget
- QList< KbWidget * > kbWidgets
- QAction * restoreAction
- QAction * closeAction
- QMenu * trayIconMenu
- QSystemTrayIcon * trayIcon
- Ui::MainWindow * ui

12.51.1 Detailed Description

Definition at line 27 of file mainwindow.h.

12.51.2 Constructor & Destructor Documentation

12.51.2.1 MainWindow::MainWindow (QWidget * *parent* = 0) [explicit]

Definition at line 35 of file mainwindow.cpp.

References Ui_MainWindow::actionExit, addDevice(), cleanup(), closeAction, configLabel, CkbSettings::get(), iconClicked(), KbManager::init(), KbManager::kbManager(), mainWindow, quitApp(), removeDevice(), restoreAction, KbManager::scanTimer(), settingsWidget, Ui_MainWindow::setupUi(), SettingsWidget::setVersion(), showWindow(), stateChange(), Ui_MainWindow::tabWidget, timerTick(), toggleTrayIcon(), trayIcon, trayIconMenu, ui, and updateVersion().

```
35                                      :
36     QMainWindow(parent),
37     ui(new Ui::MainWindow)
38 {
39     ui->setupUi(this);
40     mainWindow = this;
41
42     // Start device manager
43     KbManager::init(CKB_VERSION_STR);
44     connect(KbManager::kbManager(), SIGNAL(kbConnected(Kb*)), this, SLOT(
       addDevice(Kb*)));
45     connect(KbManager::kbManager(), SIGNAL(kbDisconnected(Kb*)), this, SLOT(
       removeDevice(Kb*)));
46     connect(KbManager::kbManager(), SIGNAL(versionUpdated()), this, SLOT(
       updateVersion()));
47     connect(KbManager::scanTimer(), SIGNAL(timeout()), this, SLOT(
       timerTick()));
48
49     // Set up tray icon
50     restoreAction = new QAction(tr("Restore"), this);
51     closeAction = new QAction(tr("Quit ckb"), this);
52 #ifdef USE_LIBAPPINDICATOR
53     QString desktop = std::getenv("XDG_CURRENT_DESKTOP");
54     unityDesktop = (desktop.toLower() == "unity");
55
56     if(unityDesktop){
57         trayIcon = 0;
58
59         indicatorMenu = gtk_menu_new();
60         indicatorMenuRestoreItem = gtk_menu_item_new_with_label("Restore");
61         indicatorMenuQuitItem = gtk_menu_item_new_with_label("Quit ckb");
62
63         gtk_menu_shell_append(GTK_MENU_SHELL(indicatorMenu), indicatorMenuRestoreItem);
64         gtk_menu_shell_append(GTK_MENU_SHELL(indicatorMenu), indicatorMenuQuitItem);
65
66         g_signal_connect(indicatorMenuQuitItem, "activate",
67             G_CALLBACK(quitIndicator), this);
68         g_signal_connect(indicatorMenuRestoreItem, "activate",
69             G_CALLBACK(restoreIndicator), this);
70
71         gtk_widget_show(indicatorMenuRestoreItem);
72         gtk_widget_show(indicatorMenuQuitItem);
73
74         indicator = app_indicator_new("ckb", "indicator-messages",
       APP_INDICATOR_CATEGORY_APPLICATION_STATUS);
75
```

```
76         app_indicator_set_status(indicator, APP_INDICATOR_STATUS_ACTIVE);
77         app_indicator_set_menu(indicator, GTK_MENU(indicatorMenu));
78         app_indicator_set_icon(indicator, "ckb");
79     } else
80 #endif // USE_LIBAPPINDICATOR
81     {
82         trayIconMenu = new QMenu(this);
83         trayIconMenu->addAction(restoreAction);
84         trayIconMenu->addAction(closeAction);
85         trayIcon = new QSystemTrayIcon(QIcon(":/img/ckb-logo.png"), this);
86         trayIcon->setContextMenu(trayIconMenu);
87         connect(trayIcon, SIGNAL(activated(QSystemTrayIcon::ActivationReason)), this, SLOT(
       iconClicked(QSystemTrayIcon::ActivationReason)));
88       }
89       toggleTrayIcon(!CkbSettings::get("Program/SuppressTrayIcon").toBool());
90
91 #ifdef Q_OS_MACX
92     // Make a custom "Close" menu action for OSX, as the default one brings up the "still running" popup
       unnecessarily
93     QMenuBar* menuBar = new QMenuBar(this);
94     setMenuBar(menuBar);
95     this->menuBar()->addMenu("ckb")->addAction(closeAction);
96 #else
97     // On linux, add a handler for Ctrl+Q
98     new QShortcut(QKeySequence("Ctrl+Q"), this, SLOT(quitApp()));
99 #endif
100
101     connect(ui->actionExit, SIGNAL(triggered()), this, SLOT(quitApp()));
102     connect(closeAction, SIGNAL(triggered()), this, SLOT(quitApp()));
103     connect(restoreAction, SIGNAL(triggered()), this, SLOT(
       showWindow()));
104     connect(qApp, SIGNAL(applicationStateChanged(Qt::ApplicationState)), this, SLOT(
       stateChange(Qt::ApplicationState)));
105
106     connect(qApp, SIGNAL(aboutToQuit()), this, SLOT(cleanup()));
107
108     ui->tabWidget->addTab(settingsWidget = new
       SettingsWidget(this), configLabel);
109     settingsWidget->setVersion("ckb-next " CKB_VERSION_STR);
110 }
```

Here is the call graph for this function:

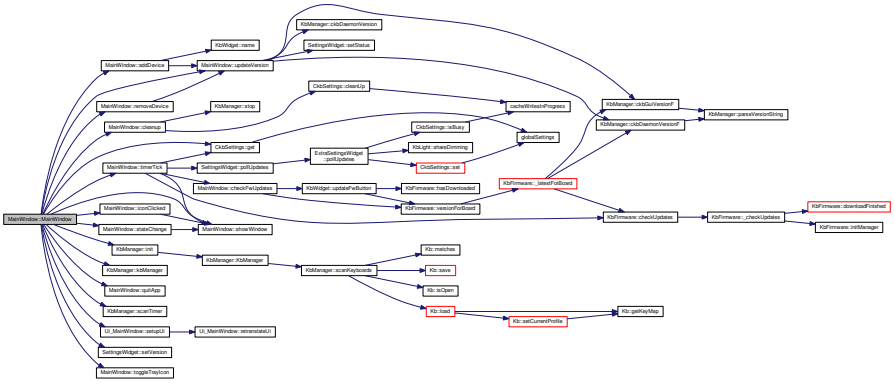

12.51.2.2 MainWindow::~MainWindow ( )

Definition at line 303 of file mainwindow.cpp.

References cleanup(), and ui.

```
303                         {
304     cleanup();
305     delete ui;
306 }
```

Here is the call graph for this function:



12.51.3 Member Function Documentation

12.51.3.1 void MainWindow::addDevice (Kb * *device*) [private],[slot]

Definition at line 121 of file mainwindow.cpp.

References KbWidget::device, kbWidgets, KbWidget::name(), Ui_MainWindow::tabWidget, ui, and updateVersion().

Referenced by MainWindow().

```
121                                     {
122     // Connected already?
123     foreach(KbWidget* w, kbWidgets){
124         if(w->device == device)
125             return;
126     }
127     // Add the keyboard
128     KbWidget* widget = new KbWidget(this, device);
129     kbWidgets.append(widget);
130     // Add to tabber; switch to this device if on the settings screen
131     int count = ui->tabWidget->count();
132     ui->tabWidget->insertTab(count - 1, widget, widget->name());
133     if(ui->tabWidget->currentIndex() == count)
134         ui->tabWidget->setCurrentIndex(count - 1);
135     // Update connected device count
136     updateVersion();
137 }
```

Here is the call graph for this function:

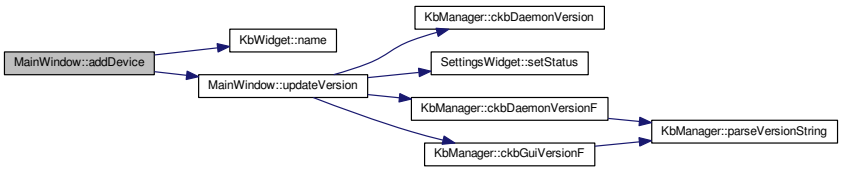

Here is the caller graph for this function:

12.51.3.2 void MainWindow::checkFwUpdates ( ) [private], [slot]

Definition at line 172 of file mainwindow.cpp.

References KbWidget::device, Kb::features, Kb::firmware, KbWidget::hasShownNewFW, kbWidgets, mainWindow, KbWidget::updateFwButton(), and KbFirmware::versionForBoard().

Referenced by timerTick().

```
172                                {
173     if(!mainWindow->isVisible())
174         return;
175     foreach(KbWidget* w, kbWidgets){
176         // Display firmware upgrade notification if a new version is available
177         float version = KbFirmware::versionForBoard(w->
    device->features);
178         if(version > w->device->firmware.toFloat()){
179             if(w->hasShownNewFW)
180                 continue;
181             w->hasShownNewFW = true;
182             w->updateFwButton();
183             // Don't run this method here because it will lock up the timer and prevent devices from
     working properly
184             // Use a queued invocation instead
185             metaObject()->invokeMethod(this, "showFwUpdateNotification", Qt::QueuedConnection, Q_ARG(
    QWidget*, w), Q_ARG(float, version));
186             // Don't display more than one of these at once
187             return;
188         }
189     }
190 }
```

Here is the call graph for this function:



Here is the caller graph for this function:



12.51.3.3 void MainWindow::cleanup ( ) [private], [slot]

Definition at line 295 of file mainwindow.cpp.

References CkbSettings::cleanUp(), kbWidgets, and KbManager::stop().

Referenced by MainWindow(), and ~MainWindow().

```
295                        {
296     foreach(KbWidget* w, kbWidgets)
297         delete w;
298     kbWidgets.clear();
299     KbManager::stop();
300     CkbSettings::cleanUp();
301 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

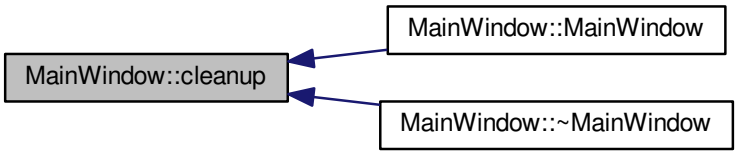

12.51.3.4 void MainWindow::closeEvent (QCloseEvent * *event*) [private]

Definition at line 209 of file mainwindow.cpp.

References CkbSettings::get(), and CkbSettings::set().

```
209                                          {
210     // If the window is hidden already or the event is non-spontaneous (can happen on OSX when using the
      Quit menu), accept it and close
211     if(!event->spontaneous() || isHidden()){
212         event->accept();
213         return;
214     }
215     if(!CkbSettings::get("Popups/BGWarning").toBool()){
216         QMessageBox::information(this, "ckb", "ckb will still run in the background.\nTo close it, choose
      Exit from the tray menu\nor click \"Quit ckb\" on the Settings screen.");
217         CkbSettings::set("Popups/BGWarning", true);
218     }
219     hide();
220     event->ignore();
221 }
```

Here is the call graph for this function:



12.51.3.5 void MainWindow::iconClicked (QSystemTrayIcon::ActivationReason *reason*) [private],[slot]

Definition at line 257 of file mainwindow.cpp.

References showWindow().

Referenced by MainWindow().

```
257                                                                 {
258     // On Linux, hide/show the app when the tray icon is clicked
259     // On OSX this just shows the menu
260 #ifndef Q_OS_MACX
261     if(reason == QSystemTrayIcon::DoubleClick || reason == QSystemTrayIcon::Trigger){
262         if(isVisible())
263             hide();
264         else
265             showWindow();
266     }
267 #endif
268 }
```

Here is the call graph for this function:

Here is the caller graph for this function:

12.51.3.6 void MainWindow::quitApp ( ) [slot]

Definition at line 291 of file mainwindow.cpp.

Referenced by MainWindow().

```
291                         {
292     qApp->quit();
293 }
```

Here is the caller graph for this function:



12.51.3.7 void MainWindow::removeDevice (Kb * *device*) [private], [slot]

Definition at line 139 of file mainwindow.cpp.

References KbWidget::device, kbWidgets, Ui_MainWindow::tabWidget, ui, and updateVersion().

Referenced by MainWindow().

```
139                                         {
140     foreach(KbWidget* w, kbWidgets){
141         // Remove this device from the UI
142         if(w->device == device){
143             int i = kbWidgets.indexOf(w);
144             ui->tabWidget->removeTab(i);
145             kbWidgets.removeAt(i);
146             w->deleteLater();
147         }
148     }
149     // Update connected device count
150     updateVersion();
151 }
```

Here is the call graph for this function:

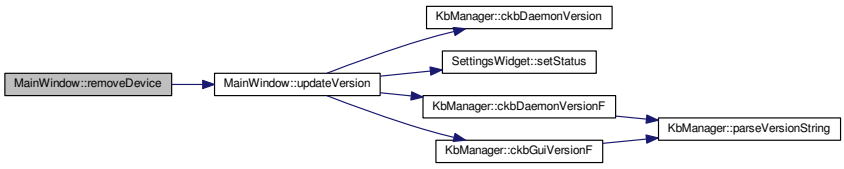

Here is the caller graph for this function:

12.51.3.8 void MainWindow::showFwUpdateNotification (QWidget * *widget*, float *version*) [private], [slot]

Definition at line 192 of file mainwindow.cpp.

References KbWidget::device, kbWidgets, KbWidget::showFwUpdate(), KbWidget::showLastTab(), showWindow(), Ui_MainWindow::tabWidget, ui, and Kb::usbModel.

```
192                                                                 {
193     static bool isShowing = false;
194     if(isShowing)
195         return;
196     isShowing = true;
197     showWindow();
198     KbWidget* w = (KbWidget*)widget;
199     // Ask for update
200     if(QMessageBox::information(this, "Firmware update", tr("A new firmware is available for your %1 (v%2)
      \nWould you like to install it now?").arg(w->device->usbModel, QString::number(version, 'f', 2)
      ), QMessageBox::StandardButtons(QMessageBox::Yes | QMessageBox::No), QMessageBox::Yes) == QMessageBox::Yes){
201         // If accepted, switch to firmware tab and bring up update window
202         w->showLastTab();
203         ui->tabWidget->setCurrentIndex(kbWidgets.indexOf(w));
204         w->showFwUpdate();
205     }
206     isShowing = false;
207 }
```

Here is the call graph for this function:

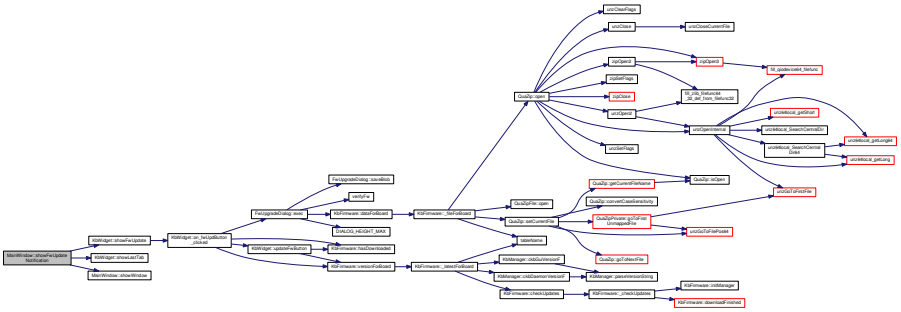

12.51.3.9 void MainWindow::showWindow ( ) [slot]

Definition at line 270 of file mainwindow.cpp.

Referenced by iconClicked(), MainWindow(), showFwUpdateNotification(), stateChange(), and timerTick().

```
270                             {
271     showNormal();
272     raise();
273     activateWindow();
274 }
```

Here is the caller graph for this function:

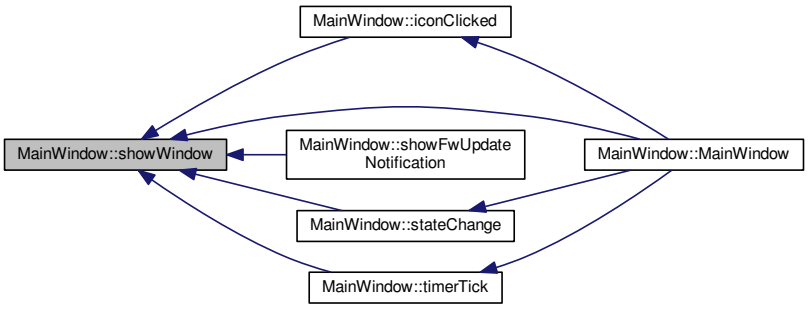

12.51.3.10 void MainWindow::stateChange (Qt::ApplicationState *state*) [slot]

Definition at line 276 of file mainwindow.cpp.

References showWindow().

Referenced by MainWindow().

```
276                                                 {
277     // On OSX it's possible for the app to be brought to the foreground without the window actually
      reappearing.
278     // We want to make sure it's shown when this happens.
279 #ifdef Q_OS_MAC
280     static quint64 lastStateChange = 0;
281     quint64 now = QDateTime::currentMSecsSinceEpoch();
282     if(state == Qt::ApplicationActive){
283         // This happens once at startup so ignore it. Also don't allow it to be called more than once every
      2s.
284         if(lastStateChange != 0 && now >= lastStateChange + 2 * 1000)
285             showWindow();
286         lastStateChange = now;
287     }
288 #endif
289 }
```

Here is the call graph for this function:

Here is the caller graph for this function:

12.51.3.11 void MainWindow::timerTick ( ) [private], [slot]

Definition at line 223 of file mainwindow.cpp.

References appShare, checkFwUpdates(), KbFirmware::checkUpdates(), CkbSettings::get(), SettingsWidget::pollUpdates(), settingsWidget, and showWindow().

Referenced by MainWindow().

```
223                         {
224     // Check shared memory for changes
225     if(appShare.lock()){
226         void* data = appShare.data();
227         QStringList commands = QString((const char*)data).split("\n");
228         // Restore PID, remove all other data
229         snprintf((char*)appShare.data(), appShare.size(), "PID %ld", (long)getpid());
230         appShare.unlock();
```

```
231         // Parse commands
232         foreach(const QString& line, commands){
233             // Old ckb option line - bring application to foreground
234             if(line == "Open")
235                 showWindow();
236             if(line.startsWith("Option ")){
237                 // New ckb option line
238                 QString option = line.split(" ")[1];
239                 if(option == "Open")
240                     // Bring to foreground
241                     showWindow();
242                 else if(option == "Close")
243                     // Quit application
244                     qApp->quit();
245             }
246         }
247     }
248     // Check for firmware updates (when appropriate)
249     if(!CkbSettings::get("Program/DisableAutoFWCheck").toBool()){
250         KbFirmware::checkUpdates();
251         checkFwUpdates();
252     }
253     // Poll for setting updates
254     settingsWidget->pollUpdates();
255 }
```

Here is the call graph for this function:

Here is the caller graph for this function:

12.51.3.12 void MainWindow::toggleTrayIcon (bool *visible*)

Definition at line 112 of file mainwindow.cpp.

References trayIcon.

Referenced by MainWindow(), and ExtraSettingsWidget::on_trayBox_clicked().

```
112                                         {
113 #ifdef USE_LIBAPPINDICATOR
114     if(unityDesktop)
115         app_indicator_set_status(indicator, visible ? APP_INDICATOR_STATUS_ACTIVE :
      APP_INDICATOR_STATUS_PASSIVE);
116     else
117 #endif // USE_LIBAPPINDICATOR
118         trayIcon->setVisible(visible);
119 }
```

Here is the caller graph for this function:

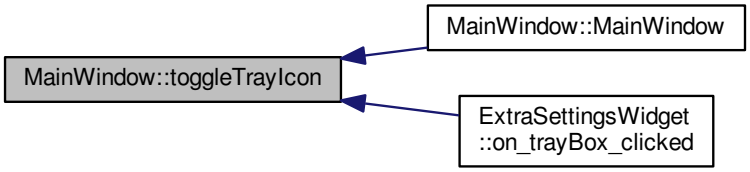

12.51.3.13 void MainWindow::updateVersion ( ) [private], [slot]

Definition at line 153 of file mainwindow.cpp.

References KbManager::ckbDaemonVersion(), KbManager::ckbDaemonVersionF(), KbManager::ckbGuiVersionF(), DAEMON_UNAVAILABLE_STR, kbWidgets, SettingsWidget::setStatus(), and settingsWidget.

Referenced by addDevice(), MainWindow(), and removeDevice().

```
153                             {
154     QString daemonVersion = KbManager::ckbDaemonVersion();
155     if(daemonVersion == DAEMON_UNAVAILABLE_STR){
156         settingsWidget->setStatus("Driver inactive");
157         return;
158     }
159     int count = kbWidgets.count();
160     // Warn if the daemon version doesn't match the GUI
161     QString daemonWarning;
162     if(daemonVersion != CKB_VERSION_STR)
163         daemonWarning = "<br /><br /><b>Warning:</b> Driver version mismatch (" + daemonVersion + ").
       Please upgrade ckb" + QString(KbManager::ckbDaemonVersionF() >
      KbManager::ckbGuiVersionF() ? "" : "-daemon") + ". If the problem persists, try
       rebooting.";
164     if(count == 0)
165         settingsWidget->setStatus("No devices connected" + daemonWarning);
166     else if(count == 1)
167         settingsWidget->setStatus("1 device connected" + daemonWarning);
168     else
169         settingsWidget->setStatus(QString("%1 devices connected").arg(count) +
      daemonWarning);
170 }
```

Here is the call graph for this function:

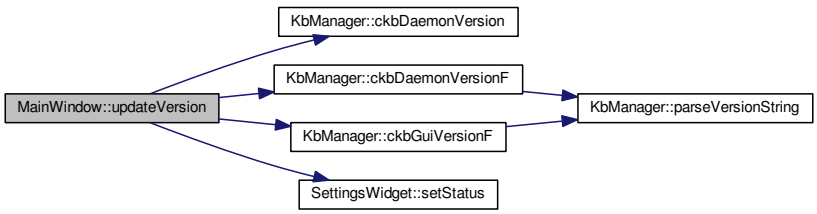

Here is the caller graph for this function:

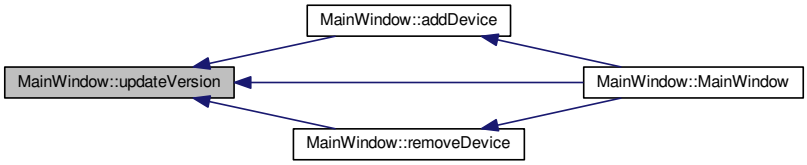

12.51.4 Field Documentation

12.51.4.1 QAction* MainWindow::closeAction [private]

Definition at line 44 of file mainwindow.h.

Referenced by MainWindow().

12.51.4.2 QList<KbWidget*> MainWindow::kbWidgets [private]

Definition at line 41 of file mainwindow.h.

Referenced by addDevice(), checkFwUpdates(), cleanup(), removeDevice(), showFwUpdateNotification(), and updateVersion().

12.51.4.3 MainWindow * MainWindow::mainWindow = 0 [static]

Definition at line 35 of file mainwindow.h.

Referenced by checkFwUpdates(), MainWindow(), and ExtraSettingsWidget::on_trayBox_clicked().

12.51.4.4 QAction* MainWindow::restoreAction [private]

Definition at line 43 of file mainwindow.h.

Referenced by MainWindow().

12.51.4.5 SettingsWidget* MainWindow::settingsWidget [private]

Definition at line 40 of file mainwindow.h.

Referenced by MainWindow(), timerTick(), and updateVersion().

12.51.4.6 QSystemTrayIcon* MainWindow::trayIcon [private]

Definition at line 54 of file mainwindow.h.

Referenced by MainWindow(), and toggleTrayIcon().

12.51.4.7 QMenu* MainWindow::trayIconMenu [private]

Definition at line 53 of file mainwindow.h.

Referenced by MainWindow().

12.51.4.8 Ui::MainWindow* MainWindow::ui [private]

Definition at line 75 of file mainwindow.h.

Referenced by addDevice(), MainWindow(), removeDevice(), showFwUpdateNotification(), and ~MainWindow().

The documentation for this class was generated from the following files:

- src/ckb/mainwindow.h
- src/ckb/mainwindow.cpp

12.52 Ui::ModeSelectDialog Class Reference

`#include <src/ckb/ui_modeselectdialog.h>`

Inheritance diagram for Ui::ModeSelectDialog:

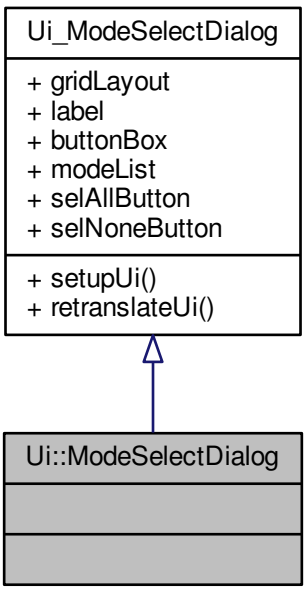

Collaboration diagram for Ui::ModeSelectDialog:

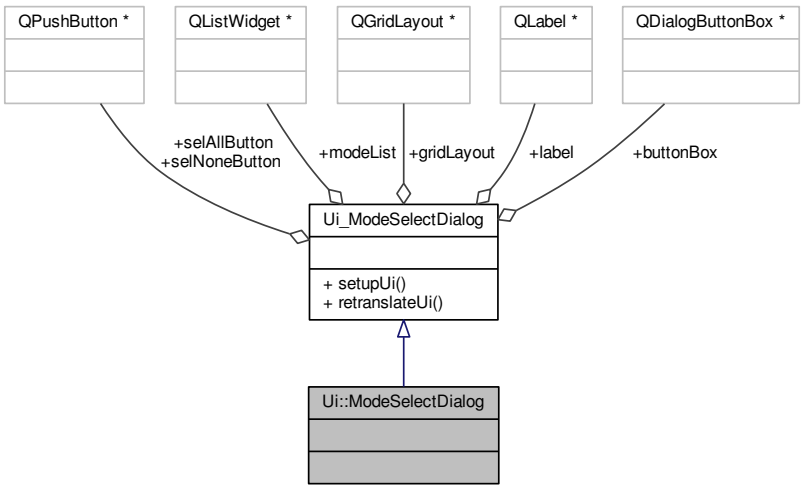

Public Member Functions

- void setupUi (QDialog *ModeSelectDialog)
- void retranslateUi (QDialog *ModeSelectDialog)

Data Fields

- QGridLayout * gridLayout
- QLabel * label
- QDialogButtonBox * buttonBox
- QListWidget * modeList
- QPushButton * selAllButton
- QPushButton * selNoneButton

12.52.1 Detailed Description

Definition at line 93 of file ui_modeselectdialog.h.

12.52.2 Member Function Documentation

12.52.2.1 void Ui_ModeSelectDialog::retranslateUi (QDialog * *ModeSelectDialog*) [inline], [inherited]

Definition at line 82 of file ui_modeselectdialog.h.

References Ui_ModeSelectDialog::label, Ui_ModeSelectDialog::selAllButton, and Ui_ModeSelectDialog::selNoneButton.

Referenced by Ui_ModeSelectDialog::setupUi().

```
83     {
84         ModeSelectDialog->setWindowTitle(QApplication::translate("ModeSelectDialog", "Select Modes",
     Q_NULLPTR));
85         label->setText(QApplication::translate("ModeSelectDialog", "TextLabel", Q_NULLPTR));
```

```
86          selAllButton->setText(QApplication::translate("ModeSelectDialog", "Select All",
    Q_NULLPTR));
87          selNoneButton->setText(QApplication::translate("ModeSelectDialog", "Select None",
    Q_NULLPTR));
88      } // retranslateUi
```

Here is the caller graph for this function:



12.52.2.2 void Ui_ModeSelectDialog::setupUi (QDialog * *ModeSelectDialog*) [inline],[inherited]

Definition at line 36 of file ui_modeselectdialog.h.

References Ui_ModeSelectDialog::buttonBox, Ui_ModeSelectDialog::gridLayout, Ui_ModeSelectDialog::label, Ui_-ModeSelectDialog::modeList, Ui_ModeSelectDialog::retranslateUi(), Ui_ModeSelectDialog::selAllButton, and Ui_-ModeSelectDialog::selNoneButton.

Referenced by ModeSelectDialog::ModeSelectDialog().

```
37      {
38          if (ModeSelectDialog->objectName().isEmpty())
39              ModeSelectDialog->setObjectName(QStringLiteral("ModeSelectDialog"));
40          ModeSelectDialog->resize(320, 320);
41          gridLayout = new QGridLayout(ModeSelectDialog);
42          gridLayout->setObjectName(QStringLiteral("gridLayout"));
43          label = new QLabel(ModeSelectDialog);
44          label->setObjectName(QStringLiteral("label"));
45          label->setAlignment(Qt::AlignLeading|Qt::AlignLeft|Qt::AlignTop);
46
47          gridLayout->addWidget(label, 0, 0, 1, 2);
48
49          buttonBox = new QDialogButtonBox(ModeSelectDialog);
50          buttonBox->setObjectName(QStringLiteral("buttonBox"));
51          buttonBox->setOrientation(Qt::Vertical);
52          buttonBox->setStandardButtons(QDialogButtonBox::Cancel|QDialogButtonBox::Ok);
53          buttonBox->setCenterButtons(false);
54
55          gridLayout->addWidget(buttonBox, 0, 2, 3, 1);
56
57          modeList = new QListWidget(ModeSelectDialog);
58          modeList->setObjectName(QStringLiteral("modeList"));
59          modeList->setFrameShadow(QFrame::Plain);
60          modeList->setSelectionMode(QAbstractItemView::ExtendedSelection);
61
62          gridLayout->addWidget(modeList, 1, 0, 1, 2);
63
64          selAllButton = new QPushButton(ModeSelectDialog);
65          selAllButton->setObjectName(QStringLiteral("selAllButton"));
66
67          gridLayout->addWidget(selAllButton, 2, 0, 1, 1);
68
69          selNoneButton = new QPushButton(ModeSelectDialog);
70          selNoneButton->setObjectName(QStringLiteral("selNoneButton"));
71
72          gridLayout->addWidget(selNoneButton, 2, 1, 1, 1);
73
74
75          retranslateUi(ModeSelectDialog);
76          QObject::connect(buttonBox, SIGNAL(accepted()), ModeSelectDialog, SLOT(accept()));
77          QObject::connect(buttonBox, SIGNAL(rejected()), ModeSelectDialog, SLOT(reject()));
78
79          QMetaObject::connectSlotsByName(ModeSelectDialog);
80      } // setupUi
```

Here is the call graph for this function:

Here is the caller graph for this function:



12.52.3 Field Documentation

12.52.3.1 QDialogButtonBox* Ui_ModeSelectDialog::buttonBox [inherited]

Definition at line 31 of file ui_modeselectdialog.h.

Referenced by Ui_ModeSelectDialog::setupUi().

12.52.3.2 QGridLayout* Ui_ModeSelectDialog::gridLayout [inherited]

Definition at line 29 of file ui_modeselectdialog.h.

Referenced by Ui_ModeSelectDialog::setupUi().

12.52.3.3 QLabel* Ui_ModeSelectDialog::label [inherited]

Definition at line 30 of file ui_modeselectdialog.h.

Referenced by ModeSelectDialog::ModeSelectDialog(), Ui_ModeSelectDialog::retranslateUi(), and Ui_ModeSelectDialog::setupUi().

12.52.3.4 QListWidget* Ui_ModeSelectDialog::modeList [inherited]

Definition at line 32 of file ui_modeselectdialog.h.

Referenced by ModeSelectDialog::ModeSelectDialog(), ModeSelectDialog::on_selAllButton_clicked(), ModeSelectDialog::on_selNoneButton_clicked(), ModeSelectDialog::selection(), and Ui_ModeSelectDialog::setupUi().

12.52.3.5 QPushButton* Ui_ModeSelectDialog::selAllButton [inherited]

Definition at line 33 of file ui_modeselectdialog.h.

Referenced by Ui_ModeSelectDialog::retranslateUi(), and Ui_ModeSelectDialog::setupUi().

12.52.3.6 QPushButton* Ui_ModeSelectDialog::selNoneButton [inherited]

Definition at line 34 of file ui_modeselectdialog.h.

Referenced by Ui_ModeSelectDialog::retranslateUi(), and Ui_ModeSelectDialog::setupUi().

The documentation for this class was generated from the following file:

- src/ckb/ui_modeselectdialog.h

12.53 ModeSelectDialog Class Reference

`#include <src/ckb/modeselectdialog.h>`

Inheritance diagram for ModeSelectDialog:

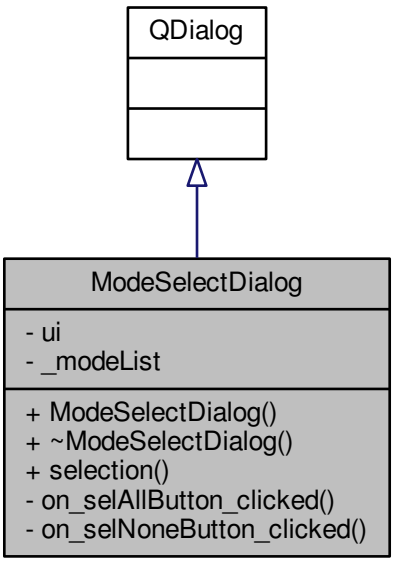

Collaboration diagram for ModeSelectDialog:

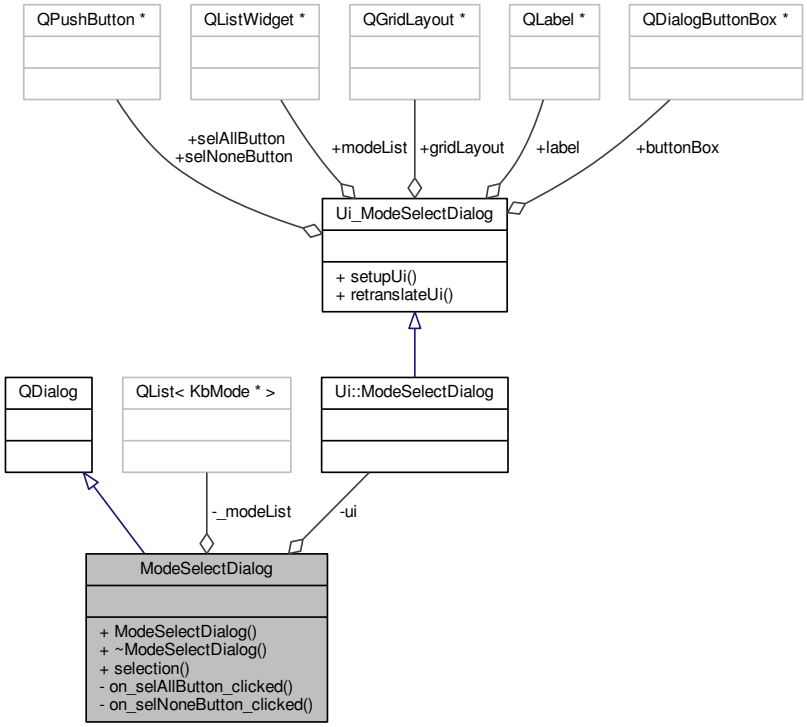

Public Member Functions

- ModeSelectDialog (QWidget *parent, KbMode *currentMode, QList< KbMode * > modeList, const QString &textLabel)
- ~ModeSelectDialog ()
- QList< KbMode * > selection ()

Private Slots

- void on_selAllButton_clicked ()
- void on_selNoneButton_clicked ()

Private Attributes

- Ui::ModeSelectDialog * ui
- QList< KbMode * > _modeList

12.53.1 Detailed Description

Definition at line 13 of file modeselectdialog.h.

12.53.2 Constructor & Destructor Documentation

12.53.2.1 ModeSelectDialog::ModeSelectDialog (QWidget ∗ *parent,* KbMode ∗ *currentMode,* QList< KbMode ∗ > *modeList,* const QString & *textLabel*)

Definition at line 4 of file modeselectdialog.cpp.

References _modeList, Ui_ModeSelectDialog::label, Ui_ModeSelectDialog::modeList, KbMode::name(), Ui_ModeSelectDialog::setupUi(), and ui.

```
4
                      :
5     QDialog(parent), ui(new Ui::ModeSelectDialog),
6     _modeList(modeList)
7 {
8     ui->setupUi(this);
9     _modeList.removeAll(currentMode);
10     ui->label->setText(textLabel);
11     // Populate list
12     foreach(KbMode* mode, _modeList)
13         ui->modeList->addItem(mode->name());
14 }
```

Here is the call graph for this function:

12.53.2.2 ModeSelectDialog::∼ModeSelectDialog ( )

Definition at line 16 of file modeselectdialog.cpp.

References ui.

```
16                                  {
17     delete ui;
18 }
```

12.53.3 Member Function Documentation

12.53.3.1 void ModeSelectDialog::on_selAllButton_clicked ( ) [private], [slot]

Definition at line 30 of file modeselectdialog.cpp.

References Ui_ModeSelectDialog::modeList, and ui.

```
30                                             {
31     int count = ui->modeList->count();
32     for(int i = 0; i < count; i++)
33         ui->modeList->item(i)->setSelected(true);
34 }
```

12.53.3.2 void ModeSelectDialog::on_selNoneButton_clicked ( ) [private], [slot]

Definition at line 36 of file modeselectdialog.cpp.

References Ui_ModeSelectDialog::modeList, and ui.

```
36                                                  {
37     int count = ui->modeList->count();
38     for(int i = 0; i < count; i++)
39         ui->modeList->item(i)->setSelected(false);
40 }
```

12.53.3.3 QList< KbMode * > ModeSelectDialog::selection ( )

Definition at line 20 of file modeselectdialog.cpp.

References _modeList, Ui_ModeSelectDialog::modeList, and ui.

Referenced by KbBindWidget::on_copyButton_clicked(), KPerfWidget::on_copyButton_clicked(), and MPerfWidget-::on_copyButton_clicked().

```
20                                              {
21     QList<KbMode*> res;
22     int count = ui->modeList->count();
23     for(int i = 0; i < count; i++){
24         if(ui->modeList->item(i)->isSelected())
25             res.append(_modeList[i]);
26     }
27     return res;
28 }
```

Here is the caller graph for this function:

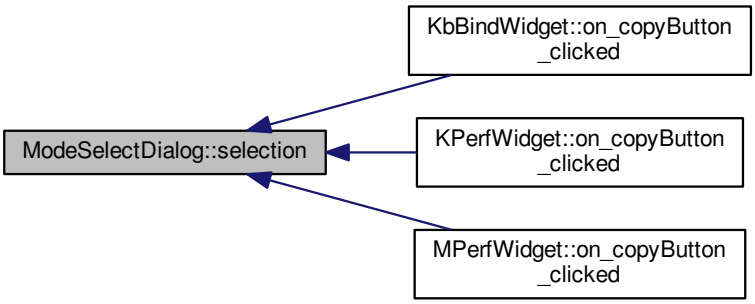

12.53.4 Field Documentation

12.53.4.1 QList<KbMode*> ModeSelectDialog::_modeList [private]

Definition at line 31 of file modeselectdialog.h.

Referenced by ModeSelectDialog(), and selection().

12.53.4.2 Ui::ModeSelectDialog* ModeSelectDialog::ui [private]

Definition at line 30 of file modeselectdialog.h.

Referenced by ModeSelectDialog(), on_selAllButton_clicked(), on_selNoneButton_clicked(), selection(), and ~-ModeSelectDialog().

The documentation for this class was generated from the following files:

- src/ckb/modeselectdialog.h
- src/ckb/modeselectdialog.cpp

12.54 Ui::MPerfWidget Class Reference

`#include <src/ckb/ui_mperfwidget.h>`

Inheritance diagram for Ui::MPerfWidget:

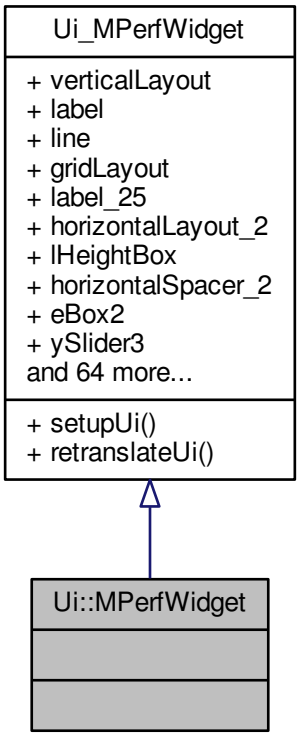

Collaboration diagram for Ui::MPerfWidget:

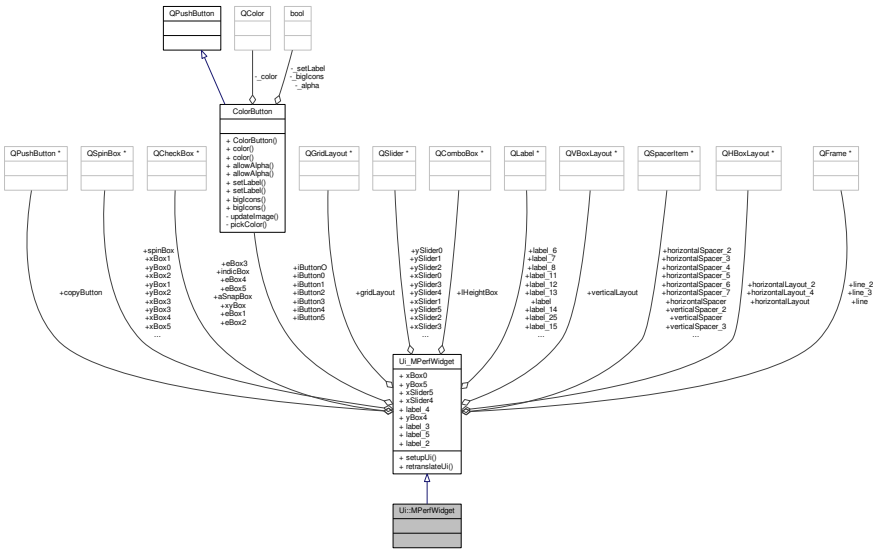

Public Member Functions

- void setupUi (QWidget *MPerfWidget)
- void retranslateUi (QWidget *MPerfWidget)

Data Fields

- QVBoxLayout * verticalLayout
- QLabel * label
- QFrame * line
- QGridLayout * gridLayout
- QLabel * label_25
- QHBoxLayout * horizontalLayout_2
- QComboBox * lHeightBox
- QSpacerItem * horizontalSpacer_2
- QCheckBox * eBox2
- QSlider * ySlider3
- QSlider * xSlider2
- QSpinBox * xBox3
- QSpinBox * yBox0
- QSlider * ySlider0
- ColorButton * iButton4
- ColorButton * iButton5
- QSpacerItem * horizontalSpacer_4
- QSpacerItem * verticalSpacer_3
- QSpacerItem * horizontalSpacer_5
- ColorButton * iButton3
- QLabel * label_12
- QSpinBox * xBox4
- QSpinBox * xBox0
- QSpinBox * yBox5
- QCheckBox * eBox5

- QSlider * xSlider5
- QSpinBox * xBox1
- QSpinBox * yBox2
- QSpinBox * yBox3
- QSlider * xSlider4
- QLabel * label_4
- QSlider * xSlider0
- ColorButton * iButton2
- QFrame * line_3
- ColorButton * iButtonO
- QSpinBox * yBox1
- QSlider * ySlider2
- QSpinBox * xBox2
- QSlider * xSlider1
- QSpacerItem * horizontalSpacer
- QSpinBox * yBox4
- ColorButton * iButton1
- QSlider * ySlider4
- QSlider * ySlider1
- ColorButton * iButton0
- QSlider * xSlider3
- QSpinBox * xBox5
- QLabel * label_3
- QLabel * label_6
- QSlider * ySlider5
- QLabel * label_7
- QLabel * label_8
- QLabel * label_5
- QLabel * label_15
- QLabel * label_13
- QLabel * label_14
- QCheckBox * eBox4
- QLabel * label_11
- QCheckBox * eBox3
- QCheckBox * eBox1
- QLabel * label_2
- QSpacerItem * verticalSpacer
- QCheckBox * aSnapBox
- QFrame * line_2
- QHBoxLayout * horizontalLayout_4
- QCheckBox * indicBox
- QSpacerItem * horizontalSpacer_3
- QSpinBox * spinBox
- QSpacerItem * horizontalSpacer_7
- QCheckBox * xyBox
- QSpacerItem * verticalSpacer_2
- QHBoxLayout * horizontalLayout
- QPushButton * copyButton
- QSpacerItem * horizontalSpacer_6

12.54.1 Detailed Description

Definition at line 727 of file ui_mperfwidget.h.

12.54.2 Member Function Documentation

12.54.2.1 void Ui_MPerfWidget::retranslateUi (QWidget * *MPerfWidget*) [inline],[inherited]

Definition at line 641 of file ui_mperfwidget.h.

References Ui_MPerfWidget::aSnapBox, Ui_MPerfWidget::copyButton, Ui_MPerfWidget::eBox1, Ui_MPerfWidget::eBox2, Ui_MPerfWidget::eBox3, Ui_MPerfWidget::eBox4, Ui_MPerfWidget::eBox5, Ui_MPerfWidget::iButton0, Ui_MPerfWidget::iButton1, Ui_MPerfWidget::iButton2, Ui_MPerfWidget::iButton3, Ui_MPerfWidget::iButton4, Ui_MPerfWidget::iButton5, Ui_MPerfWidget::iButtonO, Ui_MPerfWidget::indicBox, Ui_MPerfWidget::label, Ui_MPerfWidget::label_11, Ui_MPerfWidget::label_12, Ui_MPerfWidget::label_13, Ui_MPerfWidget::label_14, Ui_MPerfWidget::label_15, Ui_MPerfWidget::label_2, Ui_MPerfWidget::label_25, Ui_MPerfWidget::label_3, Ui_MPerfWidget::label_4, Ui_MPerfWidget::label_5, Ui_MPerfWidget::label_6, Ui_MPerfWidget::label_7, Ui_MPerfWidget::label_8, Ui_MPerfWidget::lHeightBox, Ui_MPerfWidget::spinBox, and Ui_MPerfWidget::xyBox.

Referenced by Ui_MPerfWidget::setupUi().

```
642     {
643         MPerfWidget->setWindowTitle(QApplication::translate("MPerfWidget", "Form", Q_NULLPTR));
644         label->setText(QApplication::translate("MPerfWidget", "DPI", Q_NULLPTR));
645         label_25->setText(QApplication::translate("MPerfWidget", "Lift height:", Q_NULLPTR));
646         lHeightBox->clear();
647         lHeightBox->insertItems(0, QStringList()
648          << QApplication::translate("MPerfWidget", "Low", Q_NULLPTR)
649          << QApplication::translate("MPerfWidget", "Medium-low", Q_NULLPTR)
650          << QApplication::translate("MPerfWidget", "Medium", Q_NULLPTR)
651          << QApplication::translate("MPerfWidget", "Medium-high", Q_NULLPTR)
652          << QApplication::translate("MPerfWidget", "High", Q_NULLPTR)
653         );
654 #ifndef QT_NO_TOOLTIP
655         eBox2->setToolTip(QApplication::translate("MPerfWidget", "Uncheck this box to skip the stage
    while moving up or down.", Q_NULLPTR));
656 #endif // QT_NO_TOOLTIP
657         eBox2->setText(QString());
658 #ifndef QT_NO_TOOLTIP
659         iButton4->setToolTip(QApplication::translate("MPerfWidget", "Tip: alt+click to set all
    colors at once", Q_NULLPTR));
660 #endif // QT_NO_TOOLTIP
661         iButton4->setText(QString());
662 #ifndef QT_NO_TOOLTIP
663         iButton5->setToolTip(QApplication::translate("MPerfWidget", "Tip: alt+click to set all
    colors at once", Q_NULLPTR));
664 #endif // QT_NO_TOOLTIP
665         iButton5->setText(QString());
666 #ifndef QT_NO_TOOLTIP
667         iButton3->setToolTip(QApplication::translate("MPerfWidget", "Tip: alt+click to set all
    colors at once", Q_NULLPTR));
668 #endif // QT_NO_TOOLTIP
669         iButton3->setText(QString());
670         label_12->setText(QApplication::translate("MPerfWidget", "X Value:", Q_NULLPTR));
671 #ifndef QT_NO_TOOLTIP
672         eBox5->setToolTip(QApplication::translate("MPerfWidget", "Uncheck this box to skip the stage
    while moving up or down.", Q_NULLPTR));
673 #endif // QT_NO_TOOLTIP
674         eBox5->setText(QString());
675         label_4->setText(QApplication::translate("MPerfWidget", "Y Value:", Q_NULLPTR));
676 #ifndef QT_NO_TOOLTIP
677         iButton2->setToolTip(QApplication::translate("MPerfWidget", "Tip: alt+click to set all
    colors at once", Q_NULLPTR));
678 #endif // QT_NO_TOOLTIP
679         iButton2->setText(QString());
680 #ifndef QT_NO_TOOLTIP
681         iButtonO->setToolTip(QApplication::translate("MPerfWidget", "Tip: alt+click to set all
    colors at once", Q_NULLPTR));
682 #endif // QT_NO_TOOLTIP
683         iButtonO->setText(QString());
684 #ifndef QT_NO_TOOLTIP
685         iButton1->setToolTip(QApplication::translate("MPerfWidget", "Tip: alt+click to set all
    colors at once", Q_NULLPTR));
686 #endif // QT_NO_TOOLTIP
687         iButton1->setText(QString());
688 #ifndef QT_NO_TOOLTIP
689         iButton0->setToolTip(QApplication::translate("MPerfWidget", "Tip: alt+click to set all
    colors at once", Q_NULLPTR));
690 #endif // QT_NO_TOOLTIP
691         iButton0->setText(QString());
692         label_3->setText(QApplication::translate("MPerfWidget", "You can assign other DPIs in the
    Binding tab.", Q_NULLPTR));
693         label_6->setText(QApplication::translate("MPerfWidget", "2:", Q_NULLPTR));
694         label_7->setText(QApplication::translate("MPerfWidget", "3:", Q_NULLPTR));
695         label_8->setText(QApplication::translate("MPerfWidget", "4:", Q_NULLPTR));
```

```
696         label_5->setText(QApplication::translate("MPerfWidget", "1:", Q_NULLPTR));
697         label_15->setText(QApplication::translate("MPerfWidget", "Other:", Q_NULLPTR));
698         label_13->setText(QApplication::translate("MPerfWidget", "5:", Q_NULLPTR));
699         label_14->setText(QApplication::translate("MPerfWidget", "Sniper:", Q_NULLPTR));
700 #ifndef QT_NO_TOOLTIP
701         eBox4->setToolTip(QApplication::translate("MPerfWidget", "Uncheck this box to skip the stage
    while moving up or down.", Q_NULLPTR));
702 #endif // QT_NO_TOOLTIP
703         eBox4->setText(QString());
704         label_11->setText(QApplication::translate("MPerfWidget", "DPI Stage:", Q_NULLPTR));
705 #ifndef QT_NO_TOOLTIP
706         eBox3->setToolTip(QApplication::translate("MPerfWidget", "Uncheck this box to skip the stage
    while moving up or down.", Q_NULLPTR));
707 #endif // QT_NO_TOOLTIP
708         eBox3->setText(QString());
709 #ifndef QT_NO_TOOLTIP
710         eBox1->setToolTip(QApplication::translate("MPerfWidget", "Uncheck this box to skip the stage
    while moving up or down.", Q_NULLPTR));
711 #endif // QT_NO_TOOLTIP
712         eBox1->setText(QString());
713         label_2->setText(QApplication::translate("MPerfWidget", "Movement", Q_NULLPTR));
714         aSnapBox->setText(QApplication::translate("MPerfWidget", "Angle snap", Q_NULLPTR));
715         indicBox->setText(QApplication::translate("MPerfWidget", "Use DPI indicator:", Q_NULLPTR));
716 #ifndef QT_NO_TOOLTIP
717         spinBox->setToolTip(QApplication::translate("MPerfWidget", "Indicator intensity", Q_NULLPTR)
  );
718 #endif // QT_NO_TOOLTIP
719         spinBox->setSuffix(QApplication::translate("MPerfWidget", "%", Q_NULLPTR));
720         xyBox->setText(QApplication::translate("MPerfWidget", "Independent X/Y states", Q_NULLPTR));
721         copyButton->setText(QApplication::translate("MPerfWidget", "Copy to mode...", Q_NULLPTR))
    ;
722     } // retranslateUi
```

Here is the caller graph for this function:



12.54.2.2 void Ui_MPerfWidget::setupUi (QWidget * *MPerfWidget*) [inline],[inherited]

Definition at line 111 of file ui_mperfwidget.h.

References Ui_MPerfWidget::aSnapBox, Ui_MPerfWidget::copyButton, Ui_MPerfWidget::eBox1, Ui_MPerfWidget::eBox2, Ui_MPerfWidget::eBox3, Ui_MPerfWidget::eBox4, Ui_MPerfWidget::eBox5, Ui_MPerfWidget::gridLayout, Ui_MPerfWidget::horizontalLayout, Ui_MPerfWidget::horizontalLayout_2, Ui_MPerfWidget::horizontalLayout_4, Ui_MPerfWidget::horizontalSpacer, Ui_MPerfWidget::horizontalSpacer_2, Ui_MPerfWidget::horizontalSpacer_3, Ui_MPerfWidget::horizontalSpacer_4, Ui_MPerfWidget::horizontalSpacer_5, Ui_MPerfWidget::horizontalSpacer_6, Ui_MPerfWidget::horizontalSpacer_7, Ui_MPerfWidget::iButton0, Ui_MPerfWidget::iButton1, Ui_MPerfWidget::iButton2, Ui_MPerfWidget::iButton3, Ui_MPerfWidget::iButton4, Ui_MPerfWidget::iButton5, Ui_MPerfWidget::iButtonO, Ui_MPerfWidget::indicBox, Ui_MPerfWidget::label, Ui_MPerfWidget::label_11, Ui_MPerfWidget::label_12, Ui_MPerfWidget::label_13, Ui_MPerfWidget::label_14, Ui_MPerfWidget::label_15, Ui_MPerfWidget::label_2, Ui_MPerfWidget::label_25, Ui_MPerfWidget::label_3, Ui_MPerfWidget::label_4, Ui_MPerfWidget::label_5, Ui_MPerfWidget::label_6, Ui_MPerfWidget::label_7, Ui_MPerfWidget::label_8, Ui_MPerfWidget::lHeightBox, Ui_MPerfWidget::line, Ui_MPerfWidget::line_2, Ui_MPerfWidget::line_3, Ui_MPerfWidget::retranslateUi(), Ui_MPerfWidget::spinBox, Ui_MPerfWidget::verticalLayout, Ui_MPerfWidget::verticalSpacer, Ui_MPerfWidget::verticalSpacer_2, Ui_MPerfWidget::verticalSpacer_3, Ui_MPerfWidget::xBox0, Ui_MPerfWidget::xBox1, Ui_MPerfWidget::xBox2, Ui_MPerfWidget::xBox3, Ui_MPerfWidget::xBox4, Ui_MPerfWidget::xBox5, Ui_MPerfWidget::xSlider0, Ui_MPerfWidget::xSlider1, Ui_MPerfWidget::xSlider2, Ui_MPerfWidget::xSlider3, Ui_MPerfWidget::xSlider4, Ui_MPerfWidget::xSlider5, Ui_MPerfWidget::xyBox, Ui_MPerfWidget::yBox0, Ui_MPerfWidget::yBox1, Ui_MPerfWidget::yBox2, Ui_MPerfWidget::yBox3, Ui_MPerfWidget::yBox4, Ui_MPerfWidget::yBox5, Ui_MPerfWidget::ySlider0, Ui_MPerfWidget::ySlider1, Ui_MPerfWidget::ySlider2, Ui_MPerfWidget::ySlider3, Ui_MPerfWidget::ySlider4, and Ui_MPerfWidget::ySlider5.

Referenced by MPerfWidget::MPerfWidget().

```
112     {
113         if (MPerfWidget->objectName().isEmpty())
114             MPerfWidget->setObjectName(QStringLiteral("MPerfWidget"));
115         MPerfWidget->resize(932, 637);
116         verticalLayout = new QVBoxLayout(MPerfWidget);
117         verticalLayout->setObjectName(QStringLiteral("verticalLayout"));
118         label = new QLabel(MPerfWidget);
119         label->setObjectName(QStringLiteral("label"));
120         QFont font;
121         font.setBold(true);
122         font.setWeight(75);
123         label->setFont(font);
124 
125         verticalLayout->addWidget(label);
126 
127         line = new QFrame(MPerfWidget);
128         line->setObjectName(QStringLiteral("line"));
129         line->setFrameShape(QFrame::HLine);
130         line->setFrameShadow(QFrame::Sunken);
131 
132         verticalLayout->addWidget(line);
133 
134         gridLayout = new QGridLayout();
135         gridLayout->setObjectName(QStringLiteral("gridLayout"));
136         label_25 = new QLabel(MPerfWidget);
137         label_25->setObjectName(QStringLiteral("label_25"));
138         label_25->setAlignment(Qt::AlignRight|Qt::AlignTrailing|Qt::AlignVCenter);
139 
140         gridLayout->addWidget(label_25, 16, 5, 1, 2);
141 
142         horizontalLayout_2 = new QHBoxLayout();
143         horizontalLayout_2->setObjectName(QStringLiteral("horizontalLayout_2"));
144         lHeightBox = new QComboBox(MPerfWidget);
145         lHeightBox->setObjectName(QStringLiteral("lHeightBox"));
146 
147         horizontalLayout_2->addWidget(lHeightBox);
148 
149         horizontalSpacer_2 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
150 
151         horizontalLayout_2->addItem(horizontalSpacer_2);
152 
153 
154         gridLayout->addLayout(horizontalLayout_2, 16, 8, 1, 3);
155 
156         eBox2 = new QCheckBox(MPerfWidget);
157         eBox2->setObjectName(QStringLiteral("eBox2"));
158 
159         gridLayout->addWidget(eBox2, 7, 1, 1, 1);
160 
161         ySlider3 = new QSlider(MPerfWidget);
162         ySlider3->setObjectName(QStringLiteral("ySlider3"));
163         ySlider3->setMinimum(0);
164         ySlider3->setMaximum(1000);
165         ySlider3->setSingleStep(10);
166         ySlider3->setPageStep(50);
167         ySlider3->setValue(0);
168         ySlider3->setOrientation(Qt::Horizontal);
169 
170         gridLayout->addWidget(ySlider3, 8, 8, 1, 1);
171 
172         xSlider2 = new QSlider(MPerfWidget);
173         xSlider2->setObjectName(QStringLiteral("xSlider2"));
174         xSlider2->setMinimum(0);
175         xSlider2->setMaximum(1000);
176         xSlider2->setSingleStep(10);
177         xSlider2->setPageStep(50);
178         xSlider2->setValue(0);
179         xSlider2->setOrientation(Qt::Horizontal);
180 
181         gridLayout->addWidget(xSlider2, 7, 5, 1, 1);
182 
183         xBox3 = new QSpinBox(MPerfWidget);
184         xBox3->setObjectName(QStringLiteral("xBox3"));
185         xBox3->setMinimum(100);
186         xBox3->setMaximum(12000);
187         xBox3->setSingleStep(50);
188 
189         gridLayout->addWidget(xBox3, 8, 6, 1, 1);
190 
191         yBox0 = new QSpinBox(MPerfWidget);
192         yBox0->setObjectName(QStringLiteral("yBox0"));
193         yBox0->setMinimum(100);
194         yBox0->setMaximum(12000);
195         yBox0->setSingleStep(50);
196 
197         gridLayout->addWidget(yBox0, 11, 9, 1, 1);
```

```
198
199         ySlider0 = new QSlider(MPerfWidget);
200         ySlider0->setObjectName(QStringLiteral("ySlider0"));
201         ySlider0->setMinimum(0);
202         ySlider0->setMaximum(1000);
203         ySlider0->setSingleStep(10);
204         ySlider0->setPageStep(50);
205         ySlider0->setValue(0);
206         ySlider0->setOrientation(Qt::Horizontal);
207
208         gridLayout->addWidget(ySlider0, 11, 8, 1, 1);
209
210         iButton4 = new ColorButton(MPerfWidget);
211         iButton4->setObjectName(QStringLiteral("iButton4"));
212         QSizePolicy sizePolicy(QSizePolicy::Fixed, QSizePolicy::Fixed);
213         sizePolicy.setHorizontalStretch(0);
214         sizePolicy.setVerticalStretch(0);
215         sizePolicy.setHeightForWidth(iButton4->sizePolicy().hasHeightForWidth());
216         iButton4->setSizePolicy(sizePolicy);
217         iButton4->setMinimumSize(QSize(0, 40));
218
219         gridLayout->addWidget(iButton4, 9, 2, 1, 1);
220
221         iButton5 = new ColorButton(MPerfWidget);
222         iButton5->setObjectName(QStringLiteral("iButton5"));
223         sizePolicy.setHeightForWidth(iButton5->sizePolicy().hasHeightForWidth());
224         iButton5->setSizePolicy(sizePolicy);
225         iButton5->setMinimumSize(QSize(0, 40));
226
227         gridLayout->addWidget(iButton5, 10, 2, 1, 1);
228
229         horizontalSpacer_4 = new QSpacerItem(5, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
230
231         gridLayout->addItem(horizontalSpacer_4, 4, 4, 1, 1);
232
233         verticalSpacer_3 = new QSpacerItem(20, 15, QSizePolicy::Minimum, QSizePolicy::Fixed
    );
234
235         gridLayout->addItem(verticalSpacer_3, 3, 2, 1, 1);
236
237         horizontalSpacer_5 = new QSpacerItem(5, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
238
239         gridLayout->addItem(horizontalSpacer_5, 4, 7, 1, 1);
240
241         iButton3 = new ColorButton(MPerfWidget);
242         iButton3->setObjectName(QStringLiteral("iButton3"));
243         sizePolicy.setHeightForWidth(iButton3->sizePolicy().hasHeightForWidth());
244         iButton3->setSizePolicy(sizePolicy);
245         iButton3->setMinimumSize(QSize(0, 40));
246
247         gridLayout->addWidget(iButton3, 8, 2, 1, 1);
248
249         label_12 = new QLabel(MPerfWidget);
250         label_12->setObjectName(QStringLiteral("label_12"));
251         QSizePolicy sizePolicy1(QSizePolicy::Expanding, QSizePolicy::Preferred);
252         sizePolicy1.setHorizontalStretch(0);
253         sizePolicy1.setVerticalStretch(0);
254         sizePolicy1.setHeightForWidth(label_12->sizePolicy().hasHeightForWidth());
255         label_12->setSizePolicy(sizePolicy1);
256
257         gridLayout->addWidget(label_12, 4, 5, 1, 1);
258
259         xBox4 = new QSpinBox(MPerfWidget);
260         xBox4->setObjectName(QStringLiteral("xBox4"));
261         xBox4->setMinimum(100);
262         xBox4->setMaximum(12000);
263         xBox4->setSingleStep(50);
264
265         gridLayout->addWidget(xBox4, 9, 6, 1, 1);
266
267         xBox0 = new QSpinBox(MPerfWidget);
268         xBox0->setObjectName(QStringLiteral("xBox0"));
269         xBox0->setMinimum(100);
270         xBox0->setMaximum(12000);
271         xBox0->setSingleStep(50);
272
273         gridLayout->addWidget(xBox0, 11, 6, 1, 1);
274
275         yBox5 = new QSpinBox(MPerfWidget);
276         yBox5->setObjectName(QStringLiteral("yBox5"));
277         yBox5->setMinimum(100);
278         yBox5->setMaximum(12000);
279         yBox5->setSingleStep(50);
280
281         gridLayout->addWidget(yBox5, 10, 9, 1, 1);
```

```
282
283         eBox5 = new QCheckBox(MPerfWidget);
284         eBox5->setObjectName(QStringLiteral("eBox5"));
285
286         gridLayout->addWidget(eBox5, 10, 1, 1, 1);
287
288         xSlider5 = new QSlider(MPerfWidget);
289         xSlider5->setObjectName(QStringLiteral("xSlider5"));
290         xSlider5->setMinimum(0);
291         xSlider5->setMaximum(1000);
292         xSlider5->setSingleStep(10);
293         xSlider5->setPageStep(50);
294         xSlider5->setValue(0);
295         xSlider5->setOrientation(Qt::Horizontal);
296
297         gridLayout->addWidget(xSlider5, 10, 5, 1, 1);
298
299         xBox1 = new QSpinBox(MPerfWidget);
300         xBox1->setObjectName(QStringLiteral("xBox1"));
301         sizePolicy.setHeightForWidth(xBox1->sizePolicy().hasHeightForWidth());
302         xBox1->setSizePolicy(sizePolicy);
303         xBox1->setMinimum(100);
304         xBox1->setMaximum(12000);
305         xBox1->setSingleStep(50);
306
307         gridLayout->addWidget(xBox1, 6, 6, 1, 1);
308
309         yBox2 = new QSpinBox(MPerfWidget);
310         yBox2->setObjectName(QStringLiteral("yBox2"));
311         yBox2->setMinimum(100);
312         yBox2->setMaximum(12000);
313         yBox2->setSingleStep(50);
314
315         gridLayout->addWidget(yBox2, 7, 9, 1, 1);
316
317         yBox3 = new QSpinBox(MPerfWidget);
318         yBox3->setObjectName(QStringLiteral("yBox3"));
319         yBox3->setMinimum(100);
320         yBox3->setMaximum(12000);
321         yBox3->setSingleStep(50);
322
323         gridLayout->addWidget(yBox3, 8, 9, 1, 1);
324
325         xSlider4 = new QSlider(MPerfWidget);
326         xSlider4->setObjectName(QStringLiteral("xSlider4"));
327         xSlider4->setMinimum(0);
328         xSlider4->setMaximum(1000);
329         xSlider4->setSingleStep(10);
330         xSlider4->setPageStep(50);
331         xSlider4->setValue(0);
332         xSlider4->setOrientation(Qt::Horizontal);
333
334         gridLayout->addWidget(xSlider4, 9, 5, 1, 1);
335
336         label_4 = new QLabel(MPerfWidget);
337         label_4->setObjectName(QStringLiteral("label_4"));
338         sizePolicy1.setHeightForWidth(label_4->sizePolicy().hasHeightForWidth());
339         label_4->setSizePolicy(sizePolicy1);
340
341         gridLayout->addWidget(label_4, 4, 8, 1, 1);
342
343         xSlider0 = new QSlider(MPerfWidget);
344         xSlider0->setObjectName(QStringLiteral("xSlider0"));
345         xSlider0->setMinimum(0);
346         xSlider0->setMaximum(1000);
347         xSlider0->setSingleStep(10);
348         xSlider0->setPageStep(50);
349         xSlider0->setValue(0);
350         xSlider0->setOrientation(Qt::Horizontal);
351
352         gridLayout->addWidget(xSlider0, 11, 5, 1, 1);
353
354         iButton2 = new ColorButton(MPerfWidget);
355         iButton2->setObjectName(QStringLiteral("iButton2"));
356         sizePolicy.setHeightForWidth(iButton2->sizePolicy().hasHeightForWidth());
357         iButton2->setSizePolicy(sizePolicy);
358         iButton2->setMinimumSize(QSize(0, 40));
359
360         gridLayout->addWidget(iButton2, 7, 2, 1, 1);
361
362         line_3 = new QFrame(MPerfWidget);
363         line_3->setObjectName(QStringLiteral("line_3"));
364         line_3->setFrameShape(QFrame::HLine);
365         line_3->setFrameShadow(QFrame::Sunken);
366
367         gridLayout->addWidget(line_3, 5, 0, 1, 11);
368
```

```
369         iButton0 = new ColorButton(MPerfWidget);
370         iButton0->setObjectName(QStringLiteral("iButton0"));
371         sizePolicy.setHeightForWidth(iButton0->sizePolicy().hasHeightForWidth());
372         iButton0->setSizePolicy(sizePolicy);
373         iButton0->setMinimumSize(QSize(0, 40));
374 
375         gridLayout->addWidget(iButton0, 12, 2, 1, 1);
376 
377         yBox1 = new QSpinBox(MPerfWidget);
378         yBox1->setObjectName(QStringLiteral("yBox1"));
379         sizePolicy.setHeightForWidth(yBox1->sizePolicy().hasHeightForWidth());
380         yBox1->setSizePolicy(sizePolicy);
381         yBox1->setMinimum(100);
382         yBox1->setMaximum(12000);
383         yBox1->setSingleStep(50);
384 
385         gridLayout->addWidget(yBox1, 6, 9, 1, 1);
386 
387         ySlider2 = new QSlider(MPerfWidget);
388         ySlider2->setObjectName(QStringLiteral("ySlider2"));
389         ySlider2->setMinimum(0);
390         ySlider2->setMaximum(1000);
391         ySlider2->setSingleStep(10);
392         ySlider2->setPageStep(50);
393         ySlider2->setValue(0);
394         ySlider2->setOrientation(Qt::Horizontal);
395 
396         gridLayout->addWidget(ySlider2, 7, 8, 1, 1);
397 
398         xBox2 = new QSpinBox(MPerfWidget);
399         xBox2->setObjectName(QStringLiteral("xBox2"));
400         xBox2->setMinimum(100);
401         xBox2->setMaximum(12000);
402         xBox2->setSingleStep(50);
403 
404         gridLayout->addWidget(xBox2, 7, 6, 1, 1);
405 
406         xSlider1 = new QSlider(MPerfWidget);
407         xSlider1->setObjectName(QStringLiteral("xSlider1"));
408         QSizePolicy sizePolicy2(QSizePolicy::Expanding, QSizePolicy::Fixed);
409         sizePolicy2.setHorizontalStretch(0);
410         sizePolicy2.setVerticalStretch(0);
411         sizePolicy2.setHeightForWidth(xSlider1->sizePolicy().hasHeightForWidth());
412         xSlider1->setSizePolicy(sizePolicy2);
413         xSlider1->setMinimum(0);
414         xSlider1->setMaximum(1000);
415         xSlider1->setSingleStep(10);
416         xSlider1->setPageStep(50);
417         xSlider1->setValue(0);
418         xSlider1->setOrientation(Qt::Horizontal);
419 
420         gridLayout->addWidget(xSlider1, 6, 5, 1, 1);
421 
422         horizontalSpacer = new QSpacerItem(5, 20, QSizePolicy::Fixed, QSizePolicy::Minimum)
    ;
423 
424         gridLayout->addItem(horizontalSpacer, 0, 0, 1, 1);
425 
426         yBox4 = new QSpinBox(MPerfWidget);
427         yBox4->setObjectName(QStringLiteral("yBox4"));
428         yBox4->setMinimum(100);
429         yBox4->setMaximum(12000);
430         yBox4->setSingleStep(50);
431 
432         gridLayout->addWidget(yBox4, 9, 9, 1, 1);
433 
434         iButton1 = new ColorButton(MPerfWidget);
435         iButton1->setObjectName(QStringLiteral("iButton1"));
436         sizePolicy.setHeightForWidth(iButton1->sizePolicy().hasHeightForWidth());
437         iButton1->setSizePolicy(sizePolicy);
438         iButton1->setMinimumSize(QSize(0, 40));
439 
440         gridLayout->addWidget(iButton1, 6, 2, 1, 1);
441 
442         ySlider4 = new QSlider(MPerfWidget);
443         ySlider4->setObjectName(QStringLiteral("ySlider4"));
444         ySlider4->setMinimum(0);
445         ySlider4->setMaximum(1000);
446         ySlider4->setSingleStep(10);
447         ySlider4->setPageStep(50);
448         ySlider4->setValue(0);
449         ySlider4->setOrientation(Qt::Horizontal);
450 
451         gridLayout->addWidget(ySlider4, 9, 8, 1, 1);
452 
453         ySlider1 = new QSlider(MPerfWidget);
454         ySlider1->setObjectName(QStringLiteral("ySlider1"));
```

```
455         ySlider1->setMinimum(0);
456         ySlider1->setMaximum(1000);
457         ySlider1->setSingleStep(10);
458         ySlider1->setPageStep(50);
459         ySlider1->setValue(0);
460         ySlider1->setOrientation(Qt::Horizontal);
461 
462         gridLayout->addWidget(ySlider1, 6, 8, 1, 1);
463 
464         iButton0 = new ColorButton(MPerfWidget);
465         iButton0->setObjectName(QStringLiteral("iButton0"));
466         sizePolicy.setHeightForWidth(iButton0->sizePolicy().hasHeightForWidth());
467         iButton0->setSizePolicy(sizePolicy);
468         iButton0->setMinimumSize(QSize(0, 40));
469 
470         gridLayout->addWidget(iButton0, 11, 2, 1, 1);
471 
472         xSlider3 = new QSlider(MPerfWidget);
473         xSlider3->setObjectName(QStringLiteral("xSlider3"));
474         xSlider3->setMinimum(0);
475         xSlider3->setMaximum(1000);
476         xSlider3->setSingleStep(10);
477         xSlider3->setPageStep(50);
478         xSlider3->setValue(0);
479         xSlider3->setOrientation(Qt::Horizontal);
480 
481         gridLayout->addWidget(xSlider3, 8, 5, 1, 1);
482 
483         xBox5 = new QSpinBox(MPerfWidget);
484         xBox5->setObjectName(QStringLiteral("xBox5"));
485         xBox5->setMinimum(100);
486         xBox5->setMaximum(12000);
487         xBox5->setSingleStep(50);
488 
489         gridLayout->addWidget(xBox5, 10, 6, 1, 1);
490 
491         label_3 = new QLabel(MPerfWidget);
492         label_3->setObjectName(QStringLiteral("label_3"));
493 
494         gridLayout->addWidget(label_3, 12, 5, 1, 5);
495 
496         label_6 = new QLabel(MPerfWidget);
497         label_6->setObjectName(QStringLiteral("label_6"));
498 
499         gridLayout->addWidget(label_6, 7, 3, 1, 1);
500 
501         ySlider5 = new QSlider(MPerfWidget);
502         ySlider5->setObjectName(QStringLiteral("ySlider5"));
503         ySlider5->setMinimum(0);
504         ySlider5->setMaximum(1000);
505         ySlider5->setSingleStep(10);
506         ySlider5->setPageStep(50);
507         ySlider5->setValue(0);
508         ySlider5->setOrientation(Qt::Horizontal);
509 
510         gridLayout->addWidget(ySlider5, 10, 8, 1, 1);
511 
512         label_7 = new QLabel(MPerfWidget);
513         label_7->setObjectName(QStringLiteral("label_7"));
514 
515         gridLayout->addWidget(label_7, 8, 3, 1, 1);
516 
517         label_8 = new QLabel(MPerfWidget);
518         label_8->setObjectName(QStringLiteral("label_8"));
519 
520         gridLayout->addWidget(label_8, 9, 3, 1, 1);
521 
522         label_5 = new QLabel(MPerfWidget);
523         label_5->setObjectName(QStringLiteral("label_5"));
524 
525         gridLayout->addWidget(label_5, 6, 3, 1, 1);
526 
527         label_15 = new QLabel(MPerfWidget);
528         label_15->setObjectName(QStringLiteral("label_15"));
529 
530         gridLayout->addWidget(label_15, 12, 3, 1, 1);
531 
532         label_13 = new QLabel(MPerfWidget);
533         label_13->setObjectName(QStringLiteral("label_13"));
534 
535         gridLayout->addWidget(label_13, 10, 3, 1, 1);
536 
537         label_14 = new QLabel(MPerfWidget);
538         label_14->setObjectName(QStringLiteral("label_14"));
539 
540         gridLayout->addWidget(label_14, 11, 3, 1, 1);
541 
```

```
542         eBox4 = new QCheckBox(MPerfWidget);
543         eBox4->setObjectName(QStringLiteral("eBox4"));
544 
545         gridLayout->addWidget(eBox4, 9, 1, 1, 1);
546 
547         label_11 = new QLabel(MPerfWidget);
548         label_11->setObjectName(QStringLiteral("label_11"));
549 
550         gridLayout->addWidget(label_11, 4, 2, 1, 2);
551 
552         eBox3 = new QCheckBox(MPerfWidget);
553         eBox3->setObjectName(QStringLiteral("eBox3"));
554 
555         gridLayout->addWidget(eBox3, 8, 1, 1, 1);
556 
557         eBox1 = new QCheckBox(MPerfWidget);
558         eBox1->setObjectName(QStringLiteral("eBox1"));
559 
560         gridLayout->addWidget(eBox1, 6, 1, 1, 1);
561 
562         label_2 = new QLabel(MPerfWidget);
563         label_2->setObjectName(QStringLiteral("label_2"));
564         label_2->setFont(font);
565 
566         gridLayout->addWidget(label_2, 14, 0, 1, 10);
567 
568         verticalSpacer = new QSpacerItem(20, 30, QSizePolicy::Minimum, QSizePolicy::Fixed);
569 
570         gridLayout->addItem(verticalSpacer, 13, 2, 1, 1);
571 
572         aSnapBox = new QCheckBox(MPerfWidget);
573         aSnapBox->setObjectName(QStringLiteral("aSnapBox"));
574 
575         gridLayout->addWidget(aSnapBox, 16, 1, 1, 4);
576 
577         line_2 = new QFrame(MPerfWidget);
578         line_2->setObjectName(QStringLiteral("line_2"));
579         line_2->setFrameShape(QFrame::HLine);
580         line_2->setFrameShadow(QFrame::Sunken);
581 
582         gridLayout->addWidget(line_2, 15, 0, 1, 10);
583 
584         horizontalLayout_4 = new QHBoxLayout();
585         horizontalLayout_4->setObjectName(QStringLiteral("horizontalLayout_4"));
586         indicBox = new QCheckBox(MPerfWidget);
587         indicBox->setObjectName(QStringLiteral("indicBox"));
588 
589         horizontalLayout_4->addWidget(indicBox);
590 
591         horizontalSpacer_3 = new QSpacerItem(5, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
592 
593         horizontalLayout_4->addItem(horizontalSpacer_3);
594 
595         spinBox = new QSpinBox(MPerfWidget);
596         spinBox->setObjectName(QStringLiteral("spinBox"));
597         spinBox->setMaximum(100);
598         spinBox->setValue(100);
599 
600         horizontalLayout_4->addWidget(spinBox);
601 
602         horizontalSpacer_7 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
603 
604         horizontalLayout_4->addItem(horizontalSpacer_7);
605 
606 
607         gridLayout->addLayout(horizontalLayout_4, 0, 1, 1, 9);
608 
609         xyBox = new QCheckBox(MPerfWidget);
610         xyBox->setObjectName(QStringLiteral("xyBox"));
611 
612         gridLayout->addWidget(xyBox, 2, 1, 1, 9);
613 
614 
615         verticalLayout->addLayout(gridLayout);
616 
617         verticalSpacer_2 = new QSpacerItem(20, 40, QSizePolicy::Minimum,
    QSizePolicy::Expanding);
618 
619         verticalLayout->addItem(verticalSpacer_2);
620 
621         horizontalLayout = new QHBoxLayout();
622         horizontalLayout->setObjectName(QStringLiteral("horizontalLayout"));
623         copyButton = new QPushButton(MPerfWidget);
624         copyButton->setObjectName(QStringLiteral("copyButton"));
625 
```

```
626         horizontalLayout->addWidget(copyButton);
627
628         horizontalSpacer_6 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
629
630         horizontalLayout->addItem(horizontalSpacer_6);
631
632
633         verticalLayout->addLayout(horizontalLayout);
634
635
636         retranslateUi(MPerfWidget);
637
638         QMetaObject::connectSlotsByName(MPerfWidget);
639     } // setupUi
```

Here is the call graph for this function:



Here is the caller graph for this function:

12.54.3 Field Documentation

12.54.3.1 QCheckBox* Ui_MPerfWidget::aSnapBox [inherited]

Definition at line 98 of file ui_mperfwidget.h.

Referenced by Ui_MPerfWidget::retranslateUi(), MPerfWidget::setPerf(), and Ui_MPerfWidget::setupUi().

12.54.3.2 QPushButton* Ui_MPerfWidget::copyButton [inherited]

Definition at line 108 of file ui_mperfwidget.h.

Referenced by Ui_MPerfWidget::retranslateUi(), and Ui_MPerfWidget::setupUi().

12.54.3.3 QCheckBox* Ui_MPerfWidget::eBox1 [inherited]

Definition at line 95 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), Ui_MPerfWidget::retranslateUi(), and Ui_MPerfWidget::setupUi().

12.54.3.4 QCheckBox* Ui_MPerfWidget::eBox2 [inherited]

Definition at line 44 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), Ui_MPerfWidget::retranslateUi(), and Ui_MPerfWidget::setupUi().

12.54.3.5 QCheckBox* Ui_MPerfWidget::eBox3 [inherited]

Definition at line 94 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), Ui_MPerfWidget::retranslateUi(), and Ui_MPerfWidget::setupUi().

12.54.3.6 QCheckBox* Ui_MPerfWidget::eBox4 [inherited]

Definition at line 92 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), Ui_MPerfWidget::retranslateUi(), and Ui_MPerfWidget::setupUi().

12.54.3.7 QCheckBox* Ui_MPerfWidget::eBox5 [inherited]

Definition at line 60 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), Ui_MPerfWidget::retranslateUi(), and Ui_MPerfWidget::setupUi().

12.54.3.8 QGridLayout* Ui_MPerfWidget::gridLayout [inherited]

Definition at line 39 of file ui_mperfwidget.h.

Referenced by Ui_MPerfWidget::setupUi().

12.54.3.9 QHBoxLayout* Ui_MPerfWidget::horizontalLayout [inherited]

Definition at line 107 of file ui_mperfwidget.h.

Referenced by Ui_MPerfWidget::setupUi().

12.54.3.10 QHBoxLayout* Ui_MPerfWidget::horizontalLayout_2 [inherited]

Definition at line 41 of file ui_mperfwidget.h.

Referenced by Ui_MPerfWidget::setupUi().

12.54.3.11 QHBoxLayout* Ui_MPerfWidget::horizontalLayout_4 [inherited]

Definition at line 100 of file ui_mperfwidget.h.

Referenced by Ui_MPerfWidget::setupUi().

12.54.3.12 QSpacerItem* Ui_MPerfWidget::horizontalSpacer [inherited]

Definition at line 75 of file ui_mperfwidget.h.

Referenced by Ui_MPerfWidget::setupUi().

12.54.3.13 QSpacerItem* Ui_MPerfWidget::horizontalSpacer_2 [inherited]

Definition at line 43 of file ui_mperfwidget.h.

Referenced by Ui_MPerfWidget::setupUi().

12.54.3.14 QSpacerItem* Ui_MPerfWidget::horizontalSpacer_3 [inherited]

Definition at line 102 of file ui_mperfwidget.h.

Referenced by Ui_MPerfWidget::setupUi().

12.54.3.15 QSpacerItem* Ui_MPerfWidget::horizontalSpacer_4 [inherited]

Definition at line 52 of file ui_mperfwidget.h.

Referenced by Ui_MPerfWidget::setupUi().

12.54.3.16 QSpacerItem* Ui_MPerfWidget::horizontalSpacer_5 [inherited]

Definition at line 54 of file ui_mperfwidget.h.

Referenced by Ui_MPerfWidget::setupUi().

12.54.3.17 QSpacerItem* Ui_MPerfWidget::horizontalSpacer_6 [inherited]

Definition at line 109 of file ui_mperfwidget.h.

Referenced by Ui_MPerfWidget::setupUi().

12.54.3.18 QSpacerItem* Ui_MPerfWidget::horizontalSpacer_7 [inherited]

Definition at line 104 of file ui_mperfwidget.h.

Referenced by Ui_MPerfWidget::setupUi().

12.54.3.19 ColorButton* Ui_MPerfWidget::iButton0 [inherited]

Definition at line 80 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), Ui_MPerfWidget::retranslateUi(), and Ui_MPerfWidget::setupUi().

12.54.3.20 ColorButton* Ui_MPerfWidget::iButton1 [inherited]

Definition at line 77 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), Ui_MPerfWidget::retranslateUi(), and Ui_MPerfWidget::setupUi().

12.54.3.21 ColorButton* Ui_MPerfWidget::iButton2 [inherited]

Definition at line 68 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), Ui_MPerfWidget::retranslateUi(), and Ui_MPerfWidget::setupUi().

12.54.3.22 ColorButton* Ui_MPerfWidget::iButton3 [inherited]

Definition at line 55 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), Ui_MPerfWidget::retranslateUi(), and Ui_MPerfWidget::setupUi().

12.54.3.23 ColorButton* Ui_MPerfWidget::iButton4 [inherited]

Definition at line 50 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), Ui_MPerfWidget::retranslateUi(), and Ui_MPerfWidget::setupUi().

12.54.3.24 ColorButton* Ui_MPerfWidget::iButton5 [inherited]

Definition at line 51 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), Ui_MPerfWidget::retranslateUi(), and Ui_MPerfWidget::setupUi().

12.54.3.25 ColorButton* Ui_MPerfWidget::iButtonO [inherited]

Definition at line 70 of file ui_mperfwidget.h.

Referenced by MPerfWidget::colorChanged(), MPerfWidget::MPerfWidget(), Ui_MPerfWidget::retranslateUi(), MPerfWidget::setPerf(), and Ui_MPerfWidget::setupUi().

12.54.3.26 QCheckBox* Ui_MPerfWidget::indicBox [inherited]

Definition at line 101 of file ui_mperfwidget.h.

Referenced by Ui_MPerfWidget::retranslateUi(), MPerfWidget::setPerf(), and Ui_MPerfWidget::setupUi().

12.54.3.27 QLabel* Ui_MPerfWidget::label [inherited]

Definition at line 37 of file ui_mperfwidget.h.

Referenced by Ui_MPerfWidget::retranslateUi(), and Ui_MPerfWidget::setupUi().

12.54.3.28 QLabel* Ui_MPerfWidget::label_11 [inherited]

Definition at line 93 of file ui_mperfwidget.h.

Referenced by Ui_MPerfWidget::retranslateUi(), and Ui_MPerfWidget::setupUi().

12.54.3.29 QLabel* Ui_MPerfWidget::label_12 [inherited]

Definition at line 56 of file ui_mperfwidget.h.

Referenced by Ui_MPerfWidget::retranslateUi(), and Ui_MPerfWidget::setupUi().

12.54.3.30 QLabel* Ui_MPerfWidget::label_13 [inherited]

Definition at line 90 of file ui_mperfwidget.h.

Referenced by Ui_MPerfWidget::retranslateUi(), and Ui_MPerfWidget::setupUi().

12.54.3.31 QLabel* Ui_MPerfWidget::label_14 [inherited]

Definition at line 91 of file ui_mperfwidget.h.

Referenced by Ui_MPerfWidget::retranslateUi(), and Ui_MPerfWidget::setupUi().

12.54.3.32 QLabel* Ui_MPerfWidget::label_15 [inherited]

Definition at line 89 of file ui_mperfwidget.h.

Referenced by Ui_MPerfWidget::retranslateUi(), and Ui_MPerfWidget::setupUi().

12.54.3.33 QLabel* Ui_MPerfWidget::label_2 [inherited]

Definition at line 96 of file ui_mperfwidget.h.

Referenced by Ui_MPerfWidget::retranslateUi(), and Ui_MPerfWidget::setupUi().

12.54.3.34 QLabel* Ui_MPerfWidget::label_25 [inherited]

Definition at line 40 of file ui_mperfwidget.h.

Referenced by Ui_MPerfWidget::retranslateUi(), and Ui_MPerfWidget::setupUi().

12.54.3.35 QLabel* Ui_MPerfWidget::label_3 [inherited]

Definition at line 83 of file ui_mperfwidget.h.

Referenced by Ui_MPerfWidget::retranslateUi(), and Ui_MPerfWidget::setupUi().

12.54.3.36 QLabel* Ui_MPerfWidget::label_4 [inherited]

Definition at line 66 of file ui_mperfwidget.h.

Referenced by Ui_MPerfWidget::retranslateUi(), and Ui_MPerfWidget::setupUi().

12.54.3.37 QLabel* Ui_MPerfWidget::label_5 [inherited]

Definition at line 88 of file ui_mperfwidget.h.

Referenced by Ui_MPerfWidget::retranslateUi(), and Ui_MPerfWidget::setupUi().

12.54.3.38 QLabel* Ui_MPerfWidget::label_6 [inherited]

Definition at line 84 of file ui_mperfwidget.h.

Referenced by Ui_MPerfWidget::retranslateUi(), and Ui_MPerfWidget::setupUi().

12.54.3.39 QLabel* Ui_MPerfWidget::label_7 [inherited]

Definition at line 86 of file ui_mperfwidget.h.

Referenced by Ui_MPerfWidget::retranslateUi(), and Ui_MPerfWidget::setupUi().

12.54.3.40 QLabel* Ui_MPerfWidget::label_8 [inherited]

Definition at line 87 of file ui_mperfwidget.h.

Referenced by Ui_MPerfWidget::retranslateUi(), and Ui_MPerfWidget::setupUi().

12.54.3.41 QComboBox* Ui_MPerfWidget::lHeightBox [inherited]

Definition at line 42 of file ui_mperfwidget.h.

Referenced by Ui_MPerfWidget::retranslateUi(), MPerfWidget::setPerf(), and Ui_MPerfWidget::setupUi().

12.54.3.42 QFrame* Ui_MPerfWidget::line [inherited]

Definition at line 38 of file ui_mperfwidget.h.

Referenced by Ui_MPerfWidget::setupUi().

12.54.3.43 QFrame* Ui_MPerfWidget::line_2 [inherited]

Definition at line 99 of file ui_mperfwidget.h.

Referenced by Ui_MPerfWidget::setupUi().

12.54.3.44 QFrame* Ui_MPerfWidget::line_3 [inherited]

Definition at line 69 of file ui_mperfwidget.h.

Referenced by Ui_MPerfWidget::setupUi().

12.54.3.45 QSpinBox* Ui_MPerfWidget::spinBox [inherited]

Definition at line 103 of file ui_mperfwidget.h.

Referenced by Ui_MPerfWidget::retranslateUi(), MPerfWidget::setPerf(), and Ui_MPerfWidget::setupUi().

12.54.3.46 QVBoxLayout* Ui_MPerfWidget::verticalLayout [inherited]

Definition at line 36 of file ui_mperfwidget.h.

Referenced by Ui_MPerfWidget::setupUi().

12.54.3.47 QSpacerItem* Ui_MPerfWidget::verticalSpacer [inherited]

Definition at line 97 of file ui_mperfwidget.h.

Referenced by Ui_MPerfWidget::setupUi().

12.54.3.48 QSpacerItem* Ui_MPerfWidget::verticalSpacer_2 [inherited]

Definition at line 106 of file ui_mperfwidget.h.

Referenced by Ui_MPerfWidget::setupUi().

12.54.3.49 QSpacerItem* Ui_MPerfWidget::verticalSpacer_3 [inherited]

Definition at line 53 of file ui_mperfwidget.h.

Referenced by Ui_MPerfWidget::setupUi().

12.54.3.50 QSpinBox* Ui_MPerfWidget::xBox0 [inherited]

Definition at line 58 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and Ui_MPerfWidget::setupUi().

12.54.3.51 QSpinBox* Ui_MPerfWidget::xBox1 [inherited]

Definition at line 62 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and Ui_MPerfWidget::setupUi().

12.54.3.52 QSpinBox* Ui_MPerfWidget::xBox2 [inherited]

Definition at line 73 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and Ui_MPerfWidget::setupUi().

12.54.3.53 QSpinBox* Ui_MPerfWidget::xBox3 [inherited]

Definition at line 47 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and Ui_MPerfWidget::setupUi().

12.54.3.54 QSpinBox* Ui_MPerfWidget::xBox4 [inherited]

Definition at line 57 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and Ui_MPerfWidget::setupUi().

12.54.3.55 QSpinBox* Ui_MPerfWidget::xBox5 [inherited]

Definition at line 82 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and Ui_MPerfWidget::setupUi().

12.54.3.56 QSlider* Ui_MPerfWidget::xSlider0 [inherited]

Definition at line 67 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and Ui_MPerfWidget::setupUi().

12.54.3.57 QSlider* Ui_MPerfWidget::xSlider1 [inherited]

Definition at line 74 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and Ui_MPerfWidget::setupUi().

12.54.3.58 QSlider* Ui_MPerfWidget::xSlider2 [inherited]

Definition at line 46 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and Ui_MPerfWidget::setupUi().

12.54.3.59 QSlider* Ui_MPerfWidget::xSlider3 [inherited]

Definition at line 81 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and Ui_MPerfWidget::setupUi().

12.54.3.60 QSlider* Ui_MPerfWidget::xSlider4 [inherited]

Definition at line 65 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and Ui_MPerfWidget::setupUi().

12.54.3.61 QSlider* Ui_MPerfWidget::xSlider5 [inherited]

Definition at line 61 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and Ui_MPerfWidget::setupUi().

12.54.3.62 QCheckBox* Ui_MPerfWidget::xyBox [inherited]

Definition at line 105 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), Ui_MPerfWidget::retranslateUi(), Ui_MPerfWidget::setupUi(), and MPerfWidget::sliderYMoved().

12.54.3.63 QSpinBox* Ui_MPerfWidget::yBox0 [inherited]

Definition at line 48 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and Ui_MPerfWidget::setupUi().

12.54.3.64 QSpinBox* Ui_MPerfWidget::yBox1 [inherited]

Definition at line 71 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and Ui_MPerfWidget::setupUi().

12.54.3.65 QSpinBox* Ui_MPerfWidget::yBox2 [inherited]

Definition at line 63 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and Ui_MPerfWidget::setupUi().

12.54.3.66 QSpinBox* Ui_MPerfWidget::yBox3 [inherited]

Definition at line 64 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and Ui_MPerfWidget::setupUi().

12.54.3.67 QSpinBox* Ui_MPerfWidget::yBox4 [inherited]

Definition at line 76 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and Ui_MPerfWidget::setupUi().

12.54.3.68 QSpinBox* Ui_MPerfWidget::yBox5 [inherited]

Definition at line 59 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and Ui_MPerfWidget::setupUi().

12.54.3.69 QSlider* Ui_MPerfWidget::ySlider0 [inherited]

Definition at line 49 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and Ui_MPerfWidget::setupUi().

12.54.3.70 QSlider* Ui_MPerfWidget::ySlider1 [inherited]

Definition at line 79 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and Ui_MPerfWidget::setupUi().

12.54.3.71 QSlider* Ui_MPerfWidget::ySlider2 [inherited]

Definition at line 72 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and Ui_MPerfWidget::setupUi().

12.54.3.72 QSlider* Ui_MPerfWidget::ySlider3 [inherited]

Definition at line 45 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and Ui_MPerfWidget::setupUi().

12.54.3.73 QSlider* Ui_MPerfWidget::ySlider4 [inherited]

Definition at line 78 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and Ui_MPerfWidget::setupUi().

12.54.3.74 QSlider* Ui_MPerfWidget::ySlider5 [inherited]

Definition at line 85 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and Ui_MPerfWidget::setupUi().

The documentation for this class was generated from the following file:

- src/ckb/ui_mperfwidget.h

12.55 MPerfWidget Class Reference

`#include <src/ckb/mperfwidget.h>`

Inheritance diagram for MPerfWidget:

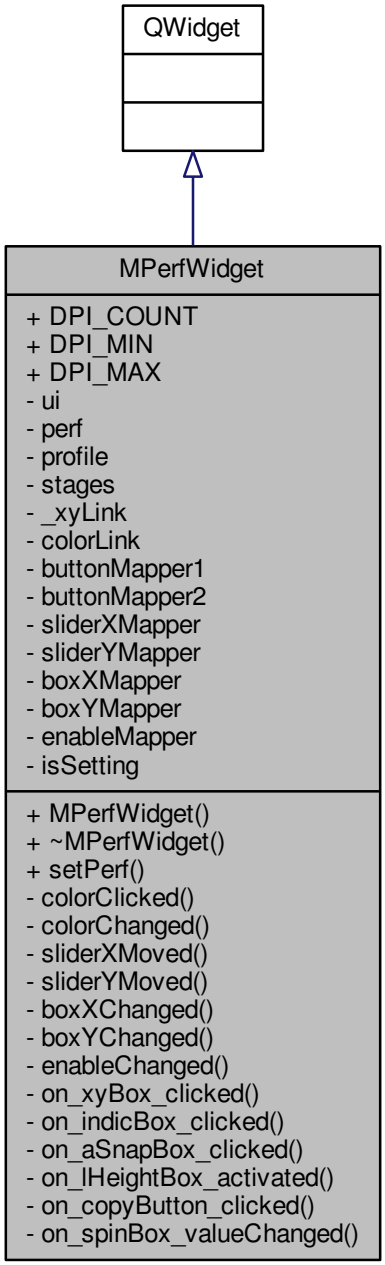

Collaboration diagram for MPerfWidget:

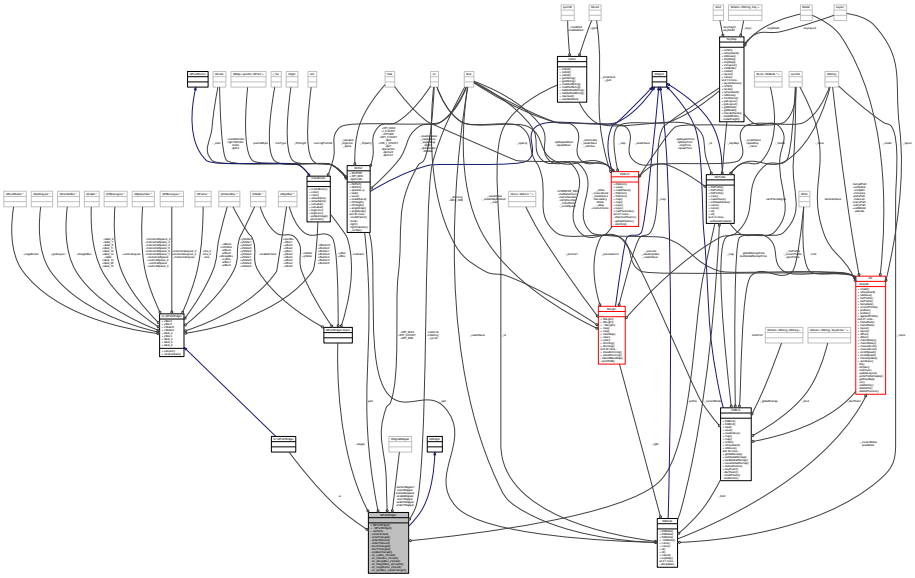

Data Structures

- struct DpiUi

Public Member Functions

- MPerfWidget (QWidget *parent=0)
- ~MPerfWidget ()
- void setPerf (KbPerf *newPerf, KbProfile *newProfile)

Static Public Attributes

- static const int DPI_COUNT = KbPerf::DPI_COUNT
- static const int DPI_MIN = KbPerf::DPI_MIN
- static const int DPI_MAX = KbPerf::DPI_MAX

Private Slots

- void colorClicked (int index)
- void colorChanged (int index)
- void sliderXMoved (int index)
- void sliderYMoved (int index)
- void boxXChanged (int index)
- void boxYChanged (int index)
- void enableChanged (int index)
- void on_xyBox_clicked (bool checked)
- void on_indicBox_clicked (bool checked)
- void on_aSnapBox_clicked (bool checked)
- void on_lHeightBox_activated (int index)
- void on_copyButton_clicked ()
- void on_spinBox_valueChanged (int arg1)

Private Attributes

- Ui::MPerfWidget * ui
- KbPerf * perf
- KbProfile * profile
- DpiUi stages [DPI_COUNT]
- bool _xyLink
- bool colorLink
- QSignalMapper buttonMapper1
- QSignalMapper buttonMapper2
- QSignalMapper sliderXMapper
- QSignalMapper sliderYMapper
- QSignalMapper boxXMapper
- QSignalMapper boxYMapper
- QSignalMapper enableMapper
- bool isSetting

12.55.1 Detailed Description

Definition at line 18 of file mperfwidget.h.

12.55.2 Data Structure Documentation

12.55.2.1 struct MPerfWidget::DpiUi

Definition at line 37 of file mperfwidget.h.

Collaboration diagram for MPerfWidget::DpiUi:

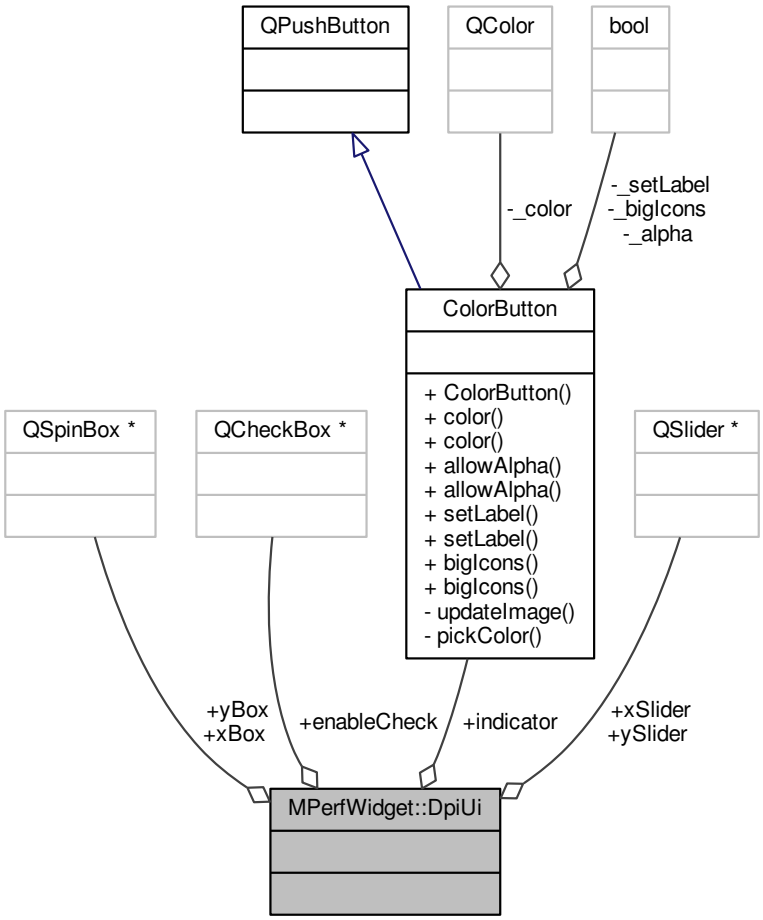

Data Fields

QCheckBox *	enableCheck	
ColorButton *	indicator	
QSpinBox *	xBox	
QSlider *	xSlider	
QSpinBox *	yBox	
QSlider *	ySlider	

12.55.3 Constructor & Destructor Documentation

12.55.3.1 MPerfWidget::MPerfWidget (QWidget * *parent* = 0) [explicit]

Definition at line 8 of file mperfwidget.cpp.

References _xyLink, ColorButton::allowAlpha(), ColorButton::bigIcons(), boxXChanged(), boxXMapper, boxYChanged(), boxYMapper, buttonMapper1, buttonMapper2, colorChanged(), colorClicked(), DPI_COUNT, Ui_MPerfWidget::eBox1, Ui_MPerfWidget::eBox2, Ui_MPerfWidget::eBox3, Ui_MPerfWidget::eBox4, Ui_MPerfWidget::eBox5, enableChanged(), MPerfWidget::DpiUi::enableCheck, enableMapper, Ui_MPerfWidget::iButton0,

Ui_MPerfWidget::iButton1, Ui_MPerfWidget::iButton2, Ui_MPerfWidget::iButton3, Ui_MPerfWidget::iButton4, Ui_MPerfWidget::iButton5, Ui_MPerfWidget::iButtonO, MPerfWidget::DpiUi::indicator, ColorButton::setLabel(), Ui_MPerfWidget::setupUi(), sliderXMapper, sliderXMoved(), sliderYMapper, sliderYMoved(), stages, ui, MPerfWidget::DpiUi::xBox, Ui_MPerfWidget::xBox0, Ui_MPerfWidget::xBox1, Ui_MPerfWidget::xBox2, Ui_MPerfWidget::xBox3, Ui_MPerfWidget::xBox4, Ui_MPerfWidget::xBox5, MPerfWidget::DpiUi::xSlider, Ui_MPerfWidget::xSlider0, Ui_MPerfWidget::xSlider1, Ui_MPerfWidget::xSlider2, Ui_MPerfWidget::xSlider3, Ui_MPerfWidget::xSlider4, Ui_MPerfWidget::xSlider5, Ui_MPerfWidget::xyBox, MPerfWidget::DpiUi::yBox, Ui_MPerfWidget::yBox0, Ui_MPerfWidget::yBox1, Ui_MPerfWidget::yBox2, Ui_MPerfWidget::yBox3, Ui_MPerfWidget::yBox4, Ui_MPerfWidget::yBox5, MPerfWidget::DpiUi::ySlider, Ui_MPerfWidget::ySlider0, Ui_MPerfWidget::ySlider1, Ui_MPerfWidget::ySlider2, Ui_MPerfWidget::ySlider3, Ui_MPerfWidget::ySlider4, and Ui_MPerfWidget::ySlider5.

```
8                                       :
9     QWidget(parent), ui(new Ui::MPerfWidget), perf(0),
      profile(0), _xyLink(!CkbSettings::get(xyLinkPath).toBool()),
      colorLink(false), isSetting(false) {
10     ui->setupUi(this);
11     ui->xyBox->setChecked(!_xyLink);
12     // Set up DPI stages
13     stages[0].indicator = ui->iButton0; stages[0].
      xSlider = ui->xSlider0; stages[0].ySlider = ui->
      ySlider0; stages[0].xBox = ui->xBox0; stages[0].
      yBox = ui->yBox0; stages[0].enableCheck = 0;
14     stages[1].indicator = ui->iButton1; stages[1].
      xSlider = ui->xSlider1; stages[1].ySlider = ui->
      ySlider1; stages[1].xBox = ui->xBox1; stages[1].
      yBox = ui->yBox1; stages[1].enableCheck = ui->
      eBox1;
15     stages[2].indicator = ui->iButton2; stages[2].
      xSlider = ui->xSlider2; stages[2].ySlider = ui->
      ySlider2; stages[2].xBox = ui->xBox2; stages[2].
      yBox = ui->yBox2; stages[2].enableCheck = ui->
      eBox2;
16     stages[3].indicator = ui->iButton3; stages[3].
      xSlider = ui->xSlider3; stages[3].ySlider = ui->
      ySlider3; stages[3].xBox = ui->xBox3; stages[3].
      yBox = ui->yBox3; stages[3].enableCheck = ui->
      eBox3;
17     stages[4].indicator = ui->iButton4; stages[4].
      xSlider = ui->xSlider4; stages[4].ySlider = ui->
      ySlider4; stages[4].xBox = ui->xBox4; stages[4].
      yBox = ui->yBox4; stages[4].enableCheck = ui->
      eBox4;
18     stages[5].indicator = ui->iButton5; stages[5].
      xSlider = ui->xSlider5; stages[5].ySlider = ui->
      ySlider5; stages[5].xBox = ui->xBox5; stages[5].
      yBox = ui->yBox5; stages[5].enableCheck = ui->
      eBox5;
19     ui->iButtonO->setLabel(false);
20     ui->iButtonO->bigIcons(true);
21     ui->iButtonO->allowAlpha(true);
22     for(int i = 0; i < DPI_COUNT; i++){
23         stages[i].indicator->setLabel(false);
24         stages[i].indicator->bigIcons(true);
25         stages[i].indicator->allowAlpha(true);
26         // Map signals
27         connect(stages[i].indicator, SIGNAL(clicked(bool)), &buttonMapper1, SLOT(map()))
      ;
28         connect(stages[i].indicator, SIGNAL(colorChanged(QColor)), &
      buttonMapper2, SLOT(map()));
29         connect(stages[i].xSlider, SIGNAL(valueChanged(int)), &
      sliderXMapper, SLOT(map()));
30         connect(stages[i].ySlider, SIGNAL(valueChanged(int)), &
      sliderYMapper, SLOT(map()));
31         connect(stages[i].xBox, SIGNAL(valueChanged(int)), &boxXMapper, SLOT(map()));
32         connect(stages[i].yBox, SIGNAL(valueChanged(int)), &boxYMapper, SLOT(map()));
33         if(stages[i].enableCheck)
34             // Sniper has no enable
35             connect(stages[i].enableCheck, SIGNAL(stateChanged(int)), &
      enableMapper, SLOT(map()));
36         // Set names
37         buttonMapper1.setMapping(stages[i].indicator, i);
38         buttonMapper2.setMapping(stages[i].indicator, i);
39         sliderXMapper.setMapping(stages[i].xSlider, i);
40         sliderYMapper.setMapping(stages[i].ySlider, i);
41         boxXMapper.setMapping(stages[i].xBox, i);
42         boxYMapper.setMapping(stages[i].yBox, i);
43         if(stages[i].enableCheck)
44             enableMapper.setMapping(stages[i].enableCheck, i);
45     }
46     // Connect to slots
47     connect(&buttonMapper1, SIGNAL(mapped(int)), this, SLOT(
      colorClicked(int)));
```

```
48     connect(&buttonMapper2, SIGNAL(mapped(int)), this, SLOT(
       colorChanged(int)));
49     connect(&sliderXMapper, SIGNAL(mapped(int)), this, SLOT(
       sliderXMoved(int)));
50     connect(&sliderYMapper, SIGNAL(mapped(int)), this, SLOT(
       sliderYMoved(int)));
51     connect(&boxXMapper, SIGNAL(mapped(int)), this, SLOT(boxXChanged(int)));
52     connect(&boxYMapper, SIGNAL(mapped(int)), this, SLOT(boxYChanged(int)));
53     connect(&enableMapper, SIGNAL(mapped(int)), this, SLOT(
       enableChanged(int)));
54 }
```

Here is the call graph for this function:

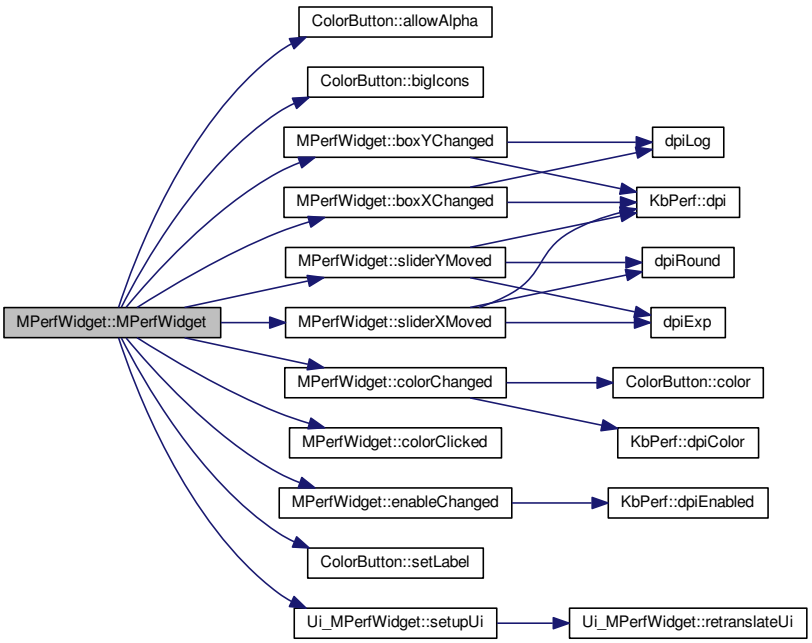

12.55.3.2 MPerfWidget::~MPerfWidget ( )

Definition at line 56 of file mperfwidget.cpp.

References ui.

```
56                          {
57     delete ui;
58 }
```

12.55.4 Member Function Documentation

12.55.4.1 void MPerfWidget::boxXChanged (int *index*) [private], [slot]

Definition at line 157 of file mperfwidget.cpp.

References _xyLink, KbPerf::dpi(), dpiLog(), perf, SET_END, SET_START, stages, MPerfWidget::DpiUi::xBox, MPerfWidget::DpiUi::xSlider, and MPerfWidget::DpiUi::yBox.

Referenced by MPerfWidget().

```
157                                     {
158     SET_START;
159     QSpinBox* box = stages[index].xBox;
160     QSlider* slider = stages[index].xSlider;
161     int value = box->value();
162     slider->setValue(dpiLog(value, slider->minimum(), slider->maximum()));
163     if(_xyLink)
164         perf->dpi(index, value);
165     else
166         perf->dpi(index, QPoint(value, perf->dpi(index).y()));
167     SET_END;
168     if(_xyLink)
169         stages[index].yBox->setValue(value);
170 }
```

Here is the call graph for this function:

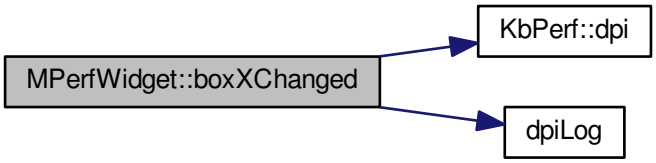

Here is the caller graph for this function:

12.55.4.2 void MPerfWidget::boxYChanged (int *index*) [private],[slot]

Definition at line 172 of file mperfwidget.cpp.

References _xyLink, KbPerf::dpi(), dpiLog(), perf, SET_END, SET_START, stages, MPerfWidget::DpiUi::xBox, MPerfWidget::DpiUi::yBox, and MPerfWidget::DpiUi::ySlider.

Referenced by MPerfWidget().

```
172                                     {
173     SET_START;
174     QSpinBox* box = stages[index].yBox;
175     QSlider* slider = stages[index].ySlider;
176     int value = box->value();
177     slider->setValue(dpiLog(value, slider->minimum(), slider->maximum()));
178     if(_xyLink)
179         perf->dpi(index, value);
180     else
181         perf->dpi(index, QPoint(perf->dpi(index).x(), value));
182     SET_END;
183     if(_xyLink)
184         stages[index].xBox->setValue(value);
185 }
```

Here is the call graph for this function:

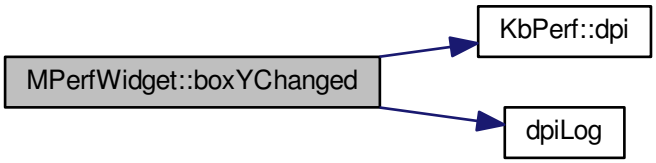

Here is the caller graph for this function:

12.55.4.3 void MPerfWidget::colorChanged (int *index*) [private],[slot]

Definition at line 86 of file mperfwidget.cpp.

References ColorButton::color(), colorLink, DPI_COUNT, KbPerf::dpiColor(), Ui_MPerfWidget::iButtonO, MPerfWidget::DpiUi::indicator, KbPerf::OTHER, perf, stages, and ui.

Referenced by MPerfWidget().

```
86                                      {
87     QColor color = stages[index].indicator->color();
88     if(colorLink){
89         // Alt was held down - set all
90         for(int i = 0; i < DPI_COUNT; i++){
91             stages[i].indicator->color(color);
92             perf->dpiColor(i, color);
93         }
94         ui->iButtonO->color(color);
95         perf->dpiColor(KbPerf::OTHER, color);
96     } else {
97         // Set one
98         perf->dpiColor(index, color);
99     }
100     colorLink = false;
101 }
```

Here is the call graph for this function:

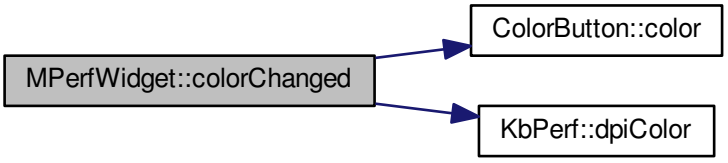

Here is the caller graph for this function:

12.55.4.4 void MPerfWidget::colorClicked (int *index*) [private],[slot]

Definition at line 81 of file mperfwidget.cpp.

References colorLink.

Referenced by MPerfWidget().

```
81                                      {
82     // Set all colors at once if Alt is held down
83     colorLink = !!(qApp->keyboardModifiers() & Qt::AltModifier);
84 }
```

Here is the caller graph for this function:

12.55.4.5 void MPerfWidget::enableChanged (int *index*) [private],[slot]

Definition at line 187 of file mperfwidget.cpp.

References KbPerf::dpiEnabled(), perf, and stages.

Referenced by MPerfWidget().

```
187                                         {
188     perf->dpiEnabled(index, stages[index].enableCheck->isChecked());
189 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

12.55.4.6 void MPerfWidget::on_aSnapBox_clicked (bool *checked*) [private], [slot]

Definition at line 201 of file mperfwidget.cpp.

References KbPerf::angleSnap(), and perf.

```
201                                                 {
202     perf->angleSnap(checked);
203 }
```

Here is the call graph for this function:



12.55.4.7 void MPerfWidget::on_copyButton_clicked ( ) [private], [slot]

Definition at line 209 of file mperfwidget.cpp.

References KbProfile::currentMode(), KbProfile::modes(), perf, KbMode::perf(), profile, and ModeSelectDialog::selection().

```
209                                     {
210     ModeSelectDialog dialog(this, profile->currentMode(),
      profile->modes(), "Copy performance settings to:");
211     if(dialog.exec() != QDialog::Accepted)
212         return;
213     QList<KbMode*> selectedModes = dialog.selection();
214     foreach(KbMode* mode, selectedModes){
215         *mode->perf() = *perf;
216     }
217 }
```

Here is the call graph for this function:

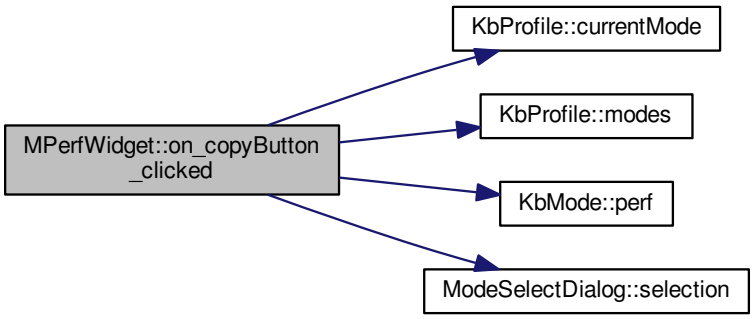

12.55.4.8 void MPerfWidget::on_indicBox_clicked (bool *checked*) [private], [slot]

Definition at line 197 of file mperfwidget.cpp.

References KbPerf::dpiIndicator(), and perf.

```
197                                                 {
198     perf->dpiIndicator(checked);
199 }
```

Here is the call graph for this function:



12.55.4.9 void MPerfWidget::on_lHeightBox_activated (int *index*) [private], [slot]

Definition at line 205 of file mperfwidget.cpp.

References KbPerf::liftHeight(), and perf.

```
205                                                 {
206     perf->liftHeight((KbPerf::height)(index + 1));
207 }
```

Here is the call graph for this function:



12.55.4.10 void MPerfWidget::on_spinBox_valueChanged (int *arg1*) [private], [slot]

Definition at line 219 of file mperfwidget.cpp.

References KbPerf::iOpacity(), and perf.

```
219                                                 {
220     if(!perf)
221         return;
222     perf->iOpacity(arg1 / 100.f);
223 }
```

Here is the call graph for this function:



12.55.4.11 void MPerfWidget::on_xyBox_clicked (bool *checked*) [private], [slot]

Definition at line 191 of file mperfwidget.cpp.

References _xyLink, CkbSettings::set(), and xyLinkPath.

```
191                                                 {
192     _xyLink = !checked;
193     CkbSettings::set(xyLinkPath, checked);
194     // FIXME: update other MPerfWidgets, since this is a global setting
195 }
```

Here is the call graph for this function:



12.55.4.12 void MPerfWidget::setPerf (KbPerf * *newPerf,* KbProfile * *newProfile*)

Definition at line 60 of file mperfwidget.cpp.

References _xyLink, KbPerf::angleSnap(), Ui_MPerfWidget::aSnapBox, ColorButton::color(), KbPerf::dpi(), DPI_COUNT, KbPerf::dpiColor(), KbPerf::dpiEnabled(), KbPerf::dpiIndicator(), MPerfWidget::DpiUi::enableCheck, Ui_MPerfWidget::iButtonO, MPerfWidget::DpiUi::indicator, Ui_MPerfWidget::indicBox, KbPerf::iOpacity(), Ui_MPerfWidget::lHeightBox, KbPerf::liftHeight(), KbPerf::OTHER, perf, profile, Ui_MPerfWidget::spinBox, stages, ui, MPerfWidget::DpiUi::xBox, and MPerfWidget::DpiUi::yBox.

Referenced by KbWidget::modeChanged().

```
60                                                          {
61     perf = newPerf;
62     profile = newProfile;
63     ui->spinBox->setValue(round(perf->iOpacity() * 100.f));
64     for(int i = 0; i < DPI_COUNT; i++){
65         stages[i].indicator->color(perf->dpiColor(i));
66         bool oldLink = _xyLink;
67         // Don't force X/Y to the same value if they were set differently in the past
68         _xyLink = false;
69         stages[i].xBox->setValue(perf->dpi(i).x());
70         stages[i].yBox->setValue(perf->dpi(i).y());
71         _xyLink = oldLink;
72         if(stages[i].enableCheck)
73             stages[i].enableCheck->setChecked(perf->
      dpiEnabled(i));
74     }
75     ui->iButtonO->color(perf->dpiColor(KbPerf::OTHER));
76     ui->aSnapBox->setChecked(perf->angleSnap());
77     ui->lHeightBox->setCurrentIndex(perf->liftHeight() - 1);
78     ui->indicBox->setChecked(perf->dpiIndicator());
79 }
```

Here is the call graph for this function:

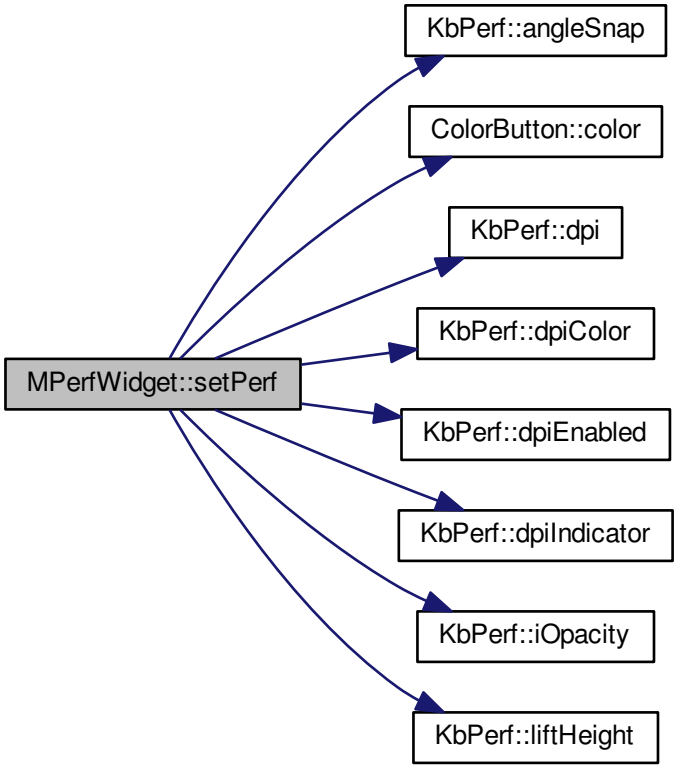

Here is the caller graph for this function:



12.55.4.13 void MPerfWidget::sliderXMoved (int *index*) [private], [slot]

Definition at line 128 of file mperfwidget.cpp.

References _xyLink, KbPerf::dpi(), dpiExp(), dpiRound(), perf, SET_END, SET_START, stages, MPerfWidget::DpiUi::xBox, MPerfWidget::DpiUi::xSlider, and MPerfWidget::DpiUi::ySlider.

Referenced by MPerfWidget().

```
128                                    {
129     SET_START;
```

```
130     QSlider* slider = stages[index].xSlider;
131     int value = dpiRound(dpiExp(slider->value(), slider->minimum(), slider->maximum()));
132     stages[index].xBox->setValue(value);
133     if(_xyLink)
134         perf->dpi(index, value);
135     else
136         perf->dpi(index, QPoint(value, perf->dpi(index).y()));
137     SET_END;
138     if(_xyLink)
139         stages[index].ySlider->setValue(slider->value());
140 }
```

Here is the call graph for this function:

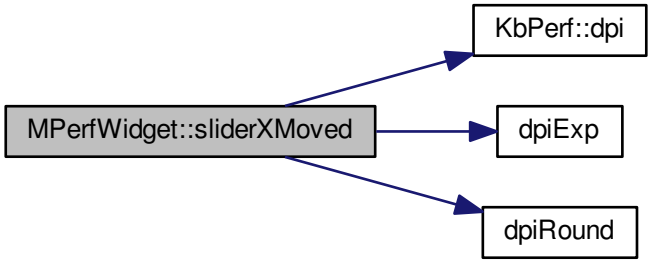

Here is the caller graph for this function:

12.55.4.14 void MPerfWidget::sliderYMoved (int *index*) [private],[slot]

Definition at line 142 of file mperfwidget.cpp.

References _xyLink, KbPerf::dpi(), dpiExp(), dpiRound(), perf, SET_END, SET_START, stages, ui, Ui_MPerfWidget::xyBox, MPerfWidget::DpiUi::yBox, and MPerfWidget::DpiUi::ySlider.

Referenced by MPerfWidget().

```
142                                         {
143     SET_START;
144     QSlider* slider = stages[index].ySlider;
145     int value = dpiRound(dpiExp(slider->value(), slider->minimum(), slider->maximum()));
146     stages[index].yBox->setValue(value);
147     if(_xyLink)
148         perf->dpi(index, value);
149     else
150         perf->dpi(index, QPoint(perf->dpi(index).x(), value));
151     SET_END;
152     if(!ui->xyBox->isChecked())
153         // X/Y linked?
154         stages[index].xSlider->setValue(slider->value());
155 }
```

Here is the call graph for this function:

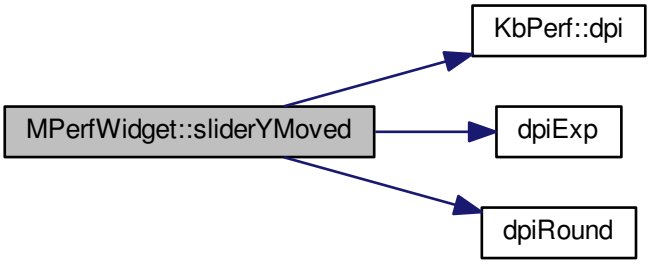

Here is the caller graph for this function:

12.55.5 Field Documentation

12.55.5.1 bool MPerfWidget::_xyLink [private]

Definition at line 44 of file mperfwidget.h.

Referenced by boxXChanged(), boxYChanged(), MPerfWidget(), on_xyBox_clicked(), setPerf(), sliderXMoved(), and sliderYMoved().

12.55.5.2 QSignalMapper MPerfWidget::boxXMapper [private]

Definition at line 49 of file mperfwidget.h.

Referenced by MPerfWidget().

12.55.5.3 QSignalMapper MPerfWidget::boxYMapper [private]

Definition at line 49 of file mperfwidget.h.

Referenced by MPerfWidget().

12.55.5.4 QSignalMapper MPerfWidget::buttonMapper1 [private]

Definition at line 47 of file mperfwidget.h.

Referenced by MPerfWidget().

12.55.5.5 QSignalMapper MPerfWidget::buttonMapper2 [private]

Definition at line 47 of file mperfwidget.h.

Referenced by MPerfWidget().

12.55.5.6 bool MPerfWidget::colorLink [private]

Definition at line 45 of file mperfwidget.h.

Referenced by colorChanged(), and colorClicked().

12.55.5.7 const int MPerfWidget::DPI_COUNT = KbPerf::DPI_COUNT [static]

Definition at line 28 of file mperfwidget.h.

Referenced by colorChanged(), MPerfWidget(), and setPerf().

12.55.5.8 const int MPerfWidget::DPI_MAX = KbPerf::DPI_MAX [static]

Definition at line 29 of file mperfwidget.h.

12.55.5.9 const int MPerfWidget::DPI_MIN = KbPerf::DPI_MIN [static]

Definition at line 29 of file mperfwidget.h.

12.55.5.10 QSignalMapper MPerfWidget::enableMapper [private]

Definition at line 50 of file mperfwidget.h.

Referenced by MPerfWidget().

12.55.5.11 bool MPerfWidget::isSetting [private]

Definition at line 53 of file mperfwidget.h.

12.55.5.12 KbPerf* MPerfWidget::perf [private]

Definition at line 34 of file mperfwidget.h.

Referenced by boxXChanged(), boxYChanged(), colorChanged(), enableChanged(), on_aSnapBox_clicked(), on_copyButton_clicked(), on_indicBox_clicked(), on_lHeightBox_activated(), on_spinBox_valueChanged(), setPerf(), sliderXMoved(), and sliderYMoved().

12.55.5.13 KbProfile* MPerfWidget::profile [private]

Definition at line 35 of file mperfwidget.h.

Referenced by on_copyButton_clicked(), and setPerf().

12.55.5.14 QSignalMapper MPerfWidget::sliderXMapper [private]

Definition at line 48 of file mperfwidget.h.

Referenced by MPerfWidget().

12.55.5.15 QSignalMapper MPerfWidget::sliderYMapper [private]

Definition at line 48 of file mperfwidget.h.

Referenced by MPerfWidget().

12.55.5.16 DpiUi MPerfWidget::stages[DPI_COUNT] [private]

Definition at line 43 of file mperfwidget.h.

Referenced by boxXChanged(), boxYChanged(), colorChanged(), enableChanged(), MPerfWidget(), setPerf(), sliderXMoved(), and sliderYMoved().

12.55.5.17 Ui::MPerfWidget* MPerfWidget::ui [private]

Definition at line 32 of file mperfwidget.h.

Referenced by colorChanged(), MPerfWidget(), setPerf(), sliderYMoved(), and ~MPerfWidget().

The documentation for this class was generated from the following files:

- src/ckb/mperfwidget.h
- src/ckb/mperfwidget.cpp

12.56 GradientDialog::Preset Struct Reference

Collaboration diagram for GradientDialog::Preset:

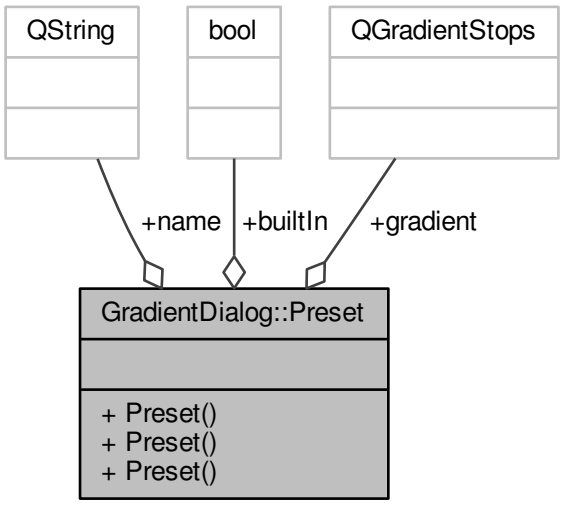

Public Member Functions

- Preset (QString _name, bool _builtIn=false)
- Preset (QString _name, const QGradientStops &_gradient)

- Preset ()

Data Fields

- QString name
- QGradientStops gradient
- bool builtIn

12.56.1 Detailed Description

Definition at line 23 of file gradientdialog.h.

12.56.2 Constructor & Destructor Documentation

12.56.2.1 GradientDialog::Preset::Preset (QString *_name,* bool *_builtIn* = false) [inline]

Definition at line 27 of file gradientdialog.h.

```
27 : name(_name), builtIn(_builtIn) {}
```

12.56.2.2 GradientDialog::Preset::Preset (QString *_name,* const QGradientStops & *_gradient*) [inline]

Definition at line 28 of file gradientdialog.h.

```
28 : name(_name), gradient(_gradient), builtIn(false) {}
```

12.56.2.3 GradientDialog::Preset::Preset ( ) [inline]

Definition at line 29 of file gradientdialog.h.

```
29 : builtIn(false) {}
```

12.56.3 Field Documentation

12.56.3.1 bool GradientDialog::Preset::builtIn

Definition at line 26 of file gradientdialog.h.

Referenced by GradientDialog::on_presetDelete_clicked(), GradientDialog::on_presetSave_clicked(), GradientDialog::setPreset(), and GradientDialog::~GradientDialog().

12.56.3.2 QGradientStops GradientDialog::Preset::gradient

Definition at line 25 of file gradientdialog.h.

Referenced by GradientDialog::GradientDialog(), GradientDialog::makeIcon(), GradientDialog::setPreset(), and GradientDialog::~GradientDialog().

12.56.3.3 QString GradientDialog::Preset::name

Definition at line 24 of file gradientdialog.h.

Referenced by GradientDialog::addPreset(), GradientDialog::on_presetDelete_clicked(), GradientDialog::on_presetSave_clicked(), GradientDialog::setPreset(), GradientDialog::updatePresets(), and GradientDialog::~GradientDialog().

The documentation for this struct was generated from the following file:

- src/ckb/gradientdialog.h

12.57 QDialog Class Reference

Inheritance diagram for QDialog:

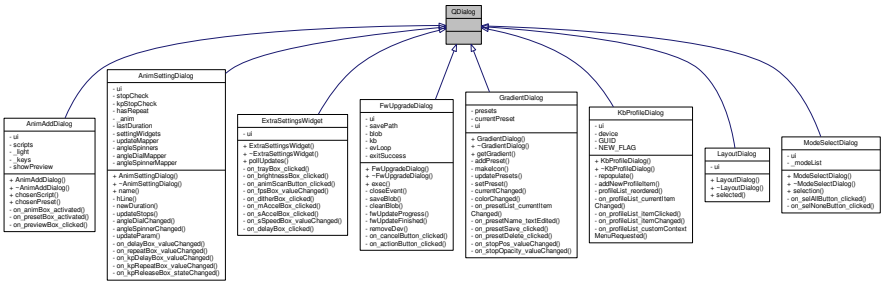

Collaboration diagram for QDialog:

The documentation for this class was generated from the following file:

- src/ckb/extrasettingswidget.h

12.58 QIODevice Class Reference

Inheritance diagram for QIODevice:

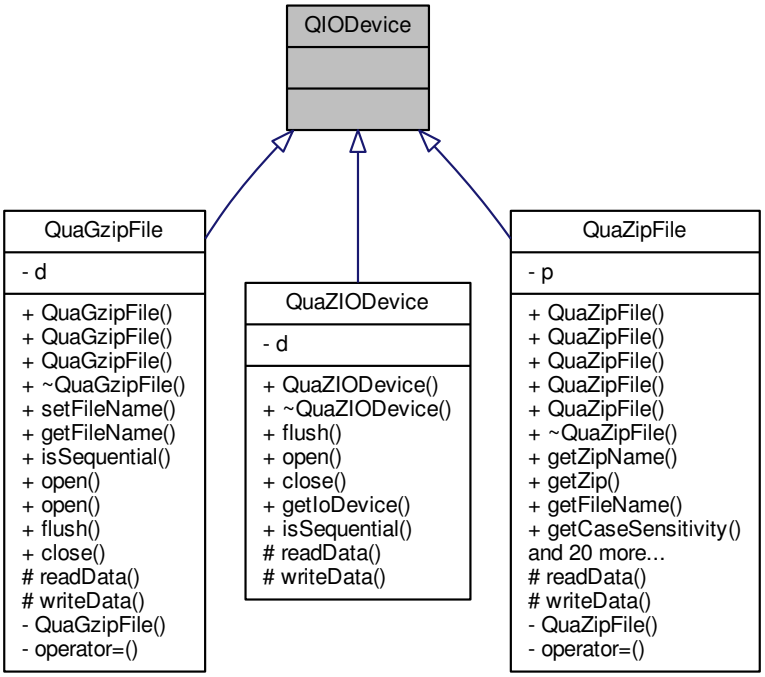

Collaboration diagram for QIODevice:



The documentation for this class was generated from the following file:

- src/ckb/quazip/quazipfile.h

12.59 QIODevice_descriptor Struct Reference

Collaboration diagram for QIODevice_descriptor:

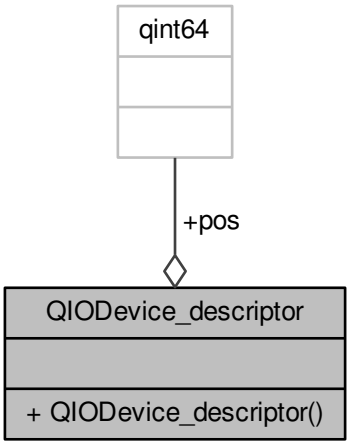

Public Member Functions

- QIODevice_descriptor ()

Data Fields

- qint64 pos

12.59.1 Detailed Description

Definition at line 78 of file qioapi.cpp.

12.59.2 Constructor & Destructor Documentation

12.59.2.1 QIODevice_descriptor::QIODevice_descriptor ( ) [inline]

Definition at line 81 of file qioapi.cpp.

```
81                                  :
82          pos(0)
83      {}
```

12.59.3 Field Documentation

12.59.3.1 qint64 QIODevice_descriptor::pos

Definition at line 80 of file qioapi.cpp.

Referenced by qiodevice64_tell_file_func(), qiodevice_open_file_func(), qiodevice_read_file_func(), qiodevice_tell_file_func(), and qiodevice_write_file_func().

The documentation for this struct was generated from the following file:

- src/ckb/quazip/qioapi.cpp

12.60 QListWidget Class Reference

Inheritance diagram for QListWidget:

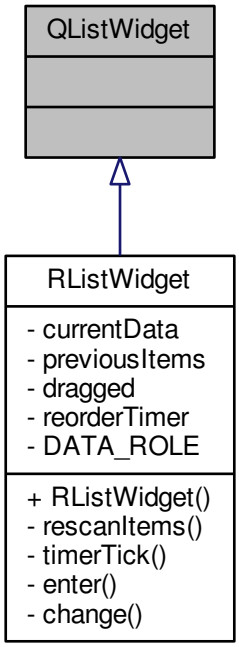

Collaboration diagram for QListWidget:

The documentation for this class was generated from the following file:

- src/ckb/rlistwidget.h

12.61 QMainWindow Class Reference

Inheritance diagram for QMainWindow:

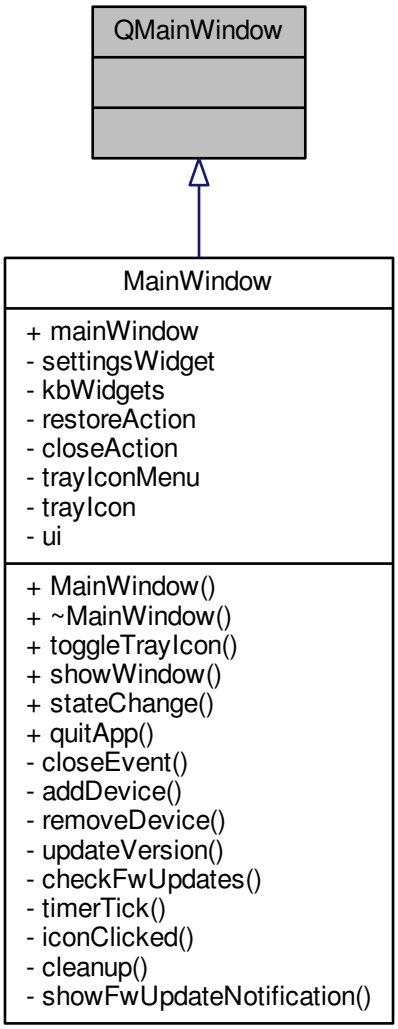

Collaboration diagram for QMainWindow:



The documentation for this class was generated from the following file:

- src/ckb/mainwindow.h

12.62 QObject Class Reference

Inheritance diagram for QObject:

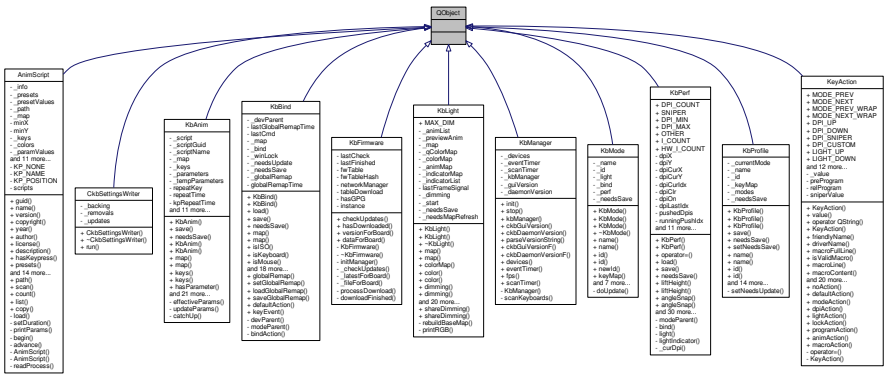

Collaboration diagram for QObject:



The documentation for this class was generated from the following file:

- src/ckb/kbprofile.h

12.63 QPushButton Class Reference

Inheritance diagram for QPushButton:

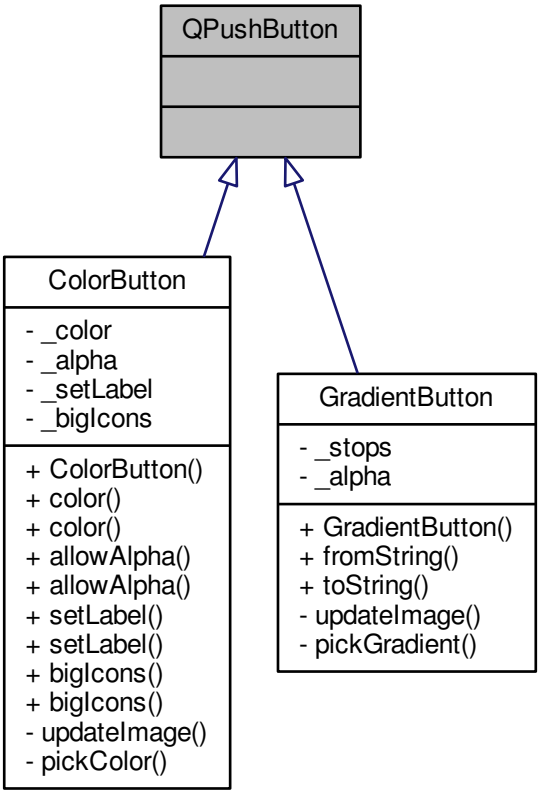

Collaboration diagram for QPushButton:



The documentation for this class was generated from the following file:

- src/ckb/colorbutton.h

12.64 QThread Class Reference

Inheritance diagram for QThread:

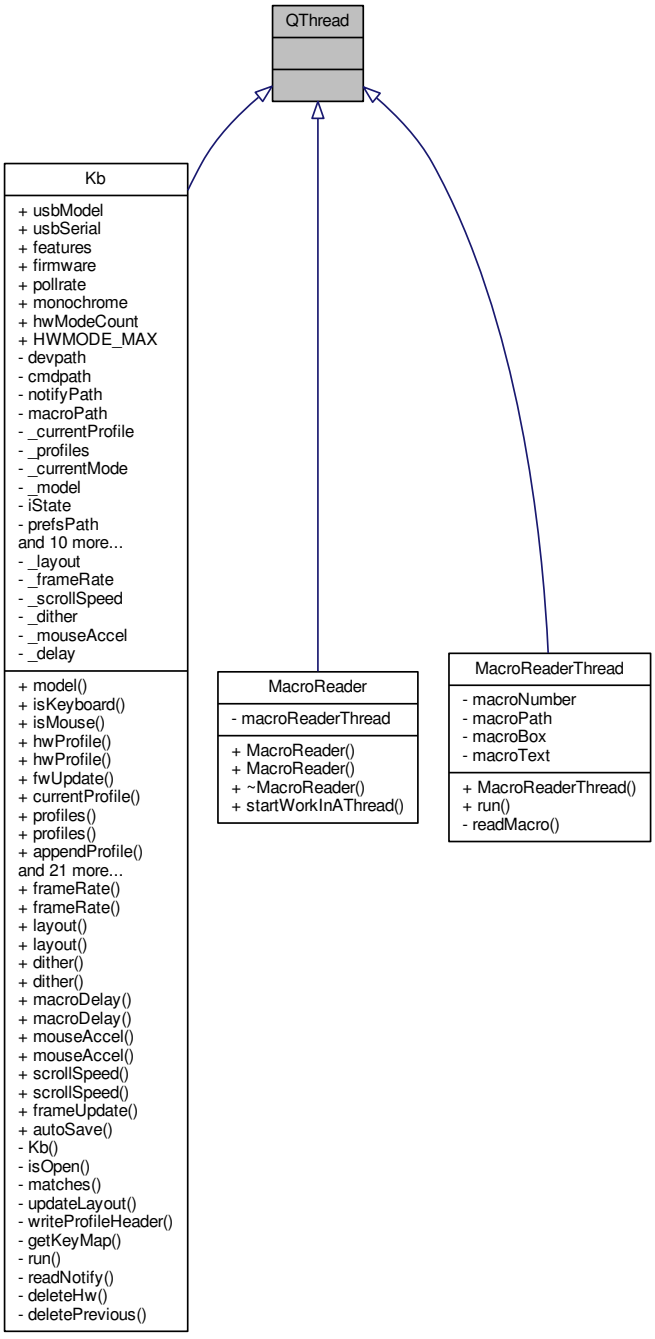

Collaboration diagram for QThread:



The documentation for this class was generated from the following file:

- src/ckb/macroreader.h

12.65 QuaAdler32 Class Reference

Adler32 checksum.

`#include <quazip/quaadler32.h>`

Inheritance diagram for QuaAdler32:

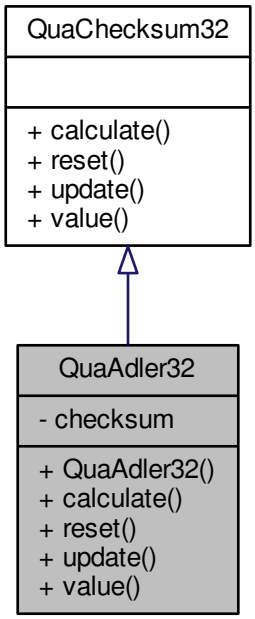

Collaboration diagram for QuaAdler32:

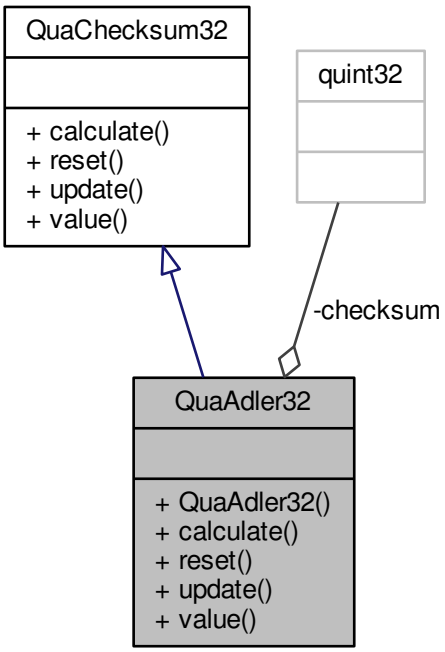

Public Member Functions

- QuaAdler32 ()
- quint32 calculate (const QByteArray &data)

  Calculates the checksum for data.
- void reset ()

  Resets the calculation on a checksun for a stream.
- void update (const QByteArray &buf)

  Updates the calculated checksum for the stream.
- quint32 value ()

  Value of the checksum calculated for the stream passed throw update().

Private Attributes

- quint32 checksum

12.65.1 Detailed Description

This class wrappers the adler32 function with the QuaChecksum32 interface. See QuaChecksum32 for more info.

Definition at line 38 of file quaadler32.h.

12.65.2 Constructor & Destructor Documentation

12.65.2.1 QuaAdler32::QuaAdler32 ( )

Definition at line 30 of file quaadler32.cpp.

References reset().

```
31 {
32     reset();
33 }
```

Here is the call graph for this function:



12.65.3 Member Function Documentation

12.65.3.1 quint32 QuaAdler32::calculate (const QByteArray & *data*) [virtual]

data source data

Returns

data checksum

This function has no efect on the value returned by value().

Implements QuaChecksum32.

Definition at line 35 of file quaadler32.cpp.

```
36 {
37     return adler32( adler32(0L, Z_NULL, 0), (const Bytef*)data.data(), data.size() );
38 }
```

12.65.3.2 void QuaAdler32::reset ( ) [virtual]

Implements QuaChecksum32.

Definition at line 40 of file quaadler32.cpp.

References checksum.

Referenced by QuaAdler32().

```
41 {
42     checksum = adler32(0L, Z_NULL, 0);
43 }
```

Here is the caller graph for this function:



12.65.3.3 void QuaAdler32::update (const QByteArray & *buf*) [virtual]

buf next portion of data from the stream

Implements QuaChecksum32.

Definition at line 45 of file quaadler32.cpp.

References checksum.

```
46 {
47     checksum = adler32( checksum, (const Bytef*)buf.data(), buf.size() );
48 }
```

12.65.3.4 quint32 QuaAdler32::value ( ) [virtual]

Returns

checksum

Implements QuaChecksum32.

Definition at line 50 of file quaadler32.cpp.

References checksum.

```
51 {
52     return checksum;
53 }
```

12.65.4 Field Documentation

12.65.4.1 quint32 QuaAdler32::checksum [private]

Definition at line 51 of file quaadler32.h.

Referenced by reset(), update(), and value().

The documentation for this class was generated from the following files:

- src/ckb/quazip/quaadler32.h
- src/ckb/quazip/quaadler32.cpp

12.66 QuaChecksum32 Class Reference

Checksum interface.

`#include <quazip/quachecksum32.h>`

Inheritance diagram for QuaChecksum32:

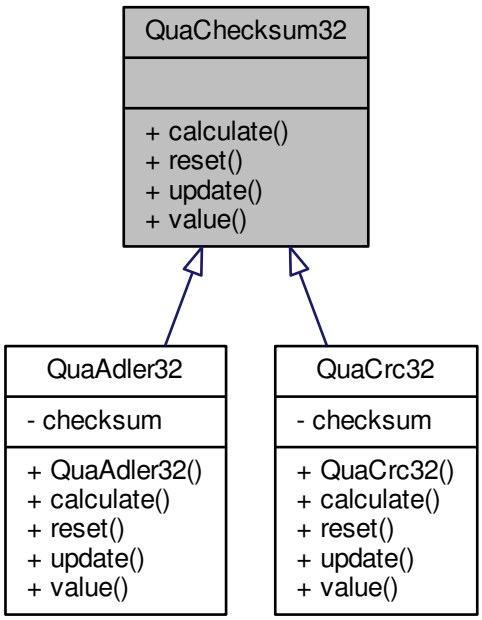

Collaboration diagram for QuaChecksum32:



Public Member Functions

- virtual quint32 calculate (const QByteArray &data)=0

  Calculates the checksum for data.
- virtual void reset ()=0

  Resets the calculation on a checksun for a stream.
- virtual void update (const QByteArray &buf)=0

Updates the calculated checksum for the stream.

- virtual quint32 value ()=0

  Value of the checksum calculated for the stream passed throw update().

12.66.1 Detailed Description

This is an interface for 32 bit checksums. Classes implementing this interface can calcunate a certin checksum in a single step:

```
QChecksum32 *crc32 = new QuaCrc32();
rasoult = crc32->calculate(data);
```

or by streaming the data:

```
QChecksum32 *crc32 = new QuaCrc32();
while(!fileA.atEnd())
    crc32->update(fileA.read(bufSize));
resoultA = crc32->value();
crc32->reset();
while(!fileB.atEnd())
    crc32->update(fileB.read(bufSize));
resoultB = crc32->value();
```

Definition at line 52 of file quachecksum32.h.

12.66.2 Member Function Documentation

12.66.2.1 virtual quint32 QuaChecksum32::calculate (const QByteArray & *data*) [pure virtual]

data source data

Returns

data checksum

This function has no efect on the value returned by value().

Implemented in QuaAdler32, and QuaCrc32.

12.66.2.2 virtual void QuaChecksum32::reset ( ) [pure virtual]

Implemented in QuaAdler32, and QuaCrc32.

12.66.2.3 virtual void QuaChecksum32::update (const QByteArray & *buf*) [pure virtual]

buf next portion of data from the stream

Implemented in QuaAdler32, and QuaCrc32.

12.66.2.4 virtual quint32 QuaChecksum32::value ( ) [pure virtual]

Returns

checksum

Implemented in QuaAdler32, and QuaCrc32.

The documentation for this class was generated from the following file:

- src/ckb/quazip/quachecksum32.h

12.67 QuaCrc32 Class Reference

CRC32 checksum.

`#include <quazip/quacrc32.h>`

Inheritance diagram for QuaCrc32:

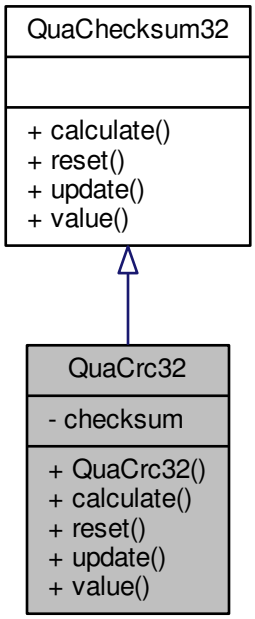

Collaboration diagram for QuaCrc32:

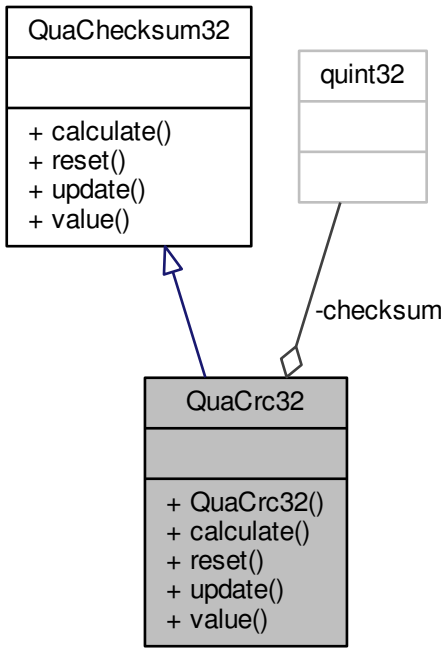

Public Member Functions

- QuaCrc32 ()
- quint32 calculate (const QByteArray &data)

  Calculates the checksum for data.
- void reset ()

  Resets the calculation on a checksun for a stream.
- void update (const QByteArray &buf)

  Updates the calculated checksum for the stream.
- quint32 value ()

  Value of the checksum calculated for the stream passed throw update().

Private Attributes

- quint32 checksum

12.67.1 Detailed Description

This class wrappers the crc32 function with the QuaChecksum32 interface. See QuaChecksum32 for more info.

Definition at line 35 of file quacrc32.h.

12.67.2 Constructor & Destructor Documentation

12.67.2.1 QuaCrc32::QuaCrc32 ( )

Definition at line 29 of file quacrc32.cpp.

References reset().

```
30 {
31     reset();
32 }
```

Here is the call graph for this function:



12.67.3 Member Function Documentation

12.67.3.1 quint32 QuaCrc32::calculate (const QByteArray & *data*) [virtual]

data source data

Returns

data checksum

This function has no efect on the value returned by value().

Implements QuaChecksum32.

Definition at line 34 of file quacrc32.cpp.

```
35 {
36     return crc32( crc32(0L, Z_NULL, 0), (const Bytef*)data.data(), data.size() );
37 }
```

12.67.3.2 void QuaCrc32::reset ( ) [virtual]

Implements QuaChecksum32.

Definition at line 39 of file quacrc32.cpp.

References checksum.

Referenced by QuaCrc32().

```
40 {
41     checksum = crc32(0L, Z_NULL, 0);
42 }
```

Here is the caller graph for this function:



12.67.3.3 void QuaCrc32::update (const QByteArray & *buf*) [virtual]

buf next portion of data from the stream

Implements QuaChecksum32.

Definition at line 44 of file quacrc32.cpp.

References checksum.

```
45 {
46     checksum = crc32( checksum, (const Bytef*)buf.data(), buf.size() );
47 }
```

12.67.3.4 quint32 QuaCrc32::value ( ) [virtual]

Returns

checksum

Implements QuaChecksum32.

Definition at line 49 of file quacrc32.cpp.

References checksum.

```
50 {
51     return checksum;
52 }
```

12.67.4 Field Documentation

12.67.4.1 quint32 QuaCrc32::checksum [private]

Definition at line 47 of file quacrc32.h.

Referenced by reset(), update(), and value().

The documentation for this class was generated from the following files:

- src/ckb/quazip/quacrc32.h
- src/ckb/quazip/quacrc32.cpp

12.68 QuaGzipFile Class Reference

GZIP file.

`#include <src/ckb/quazip/quagzipfile.h>`

Inheritance diagram for QuaGzipFile:

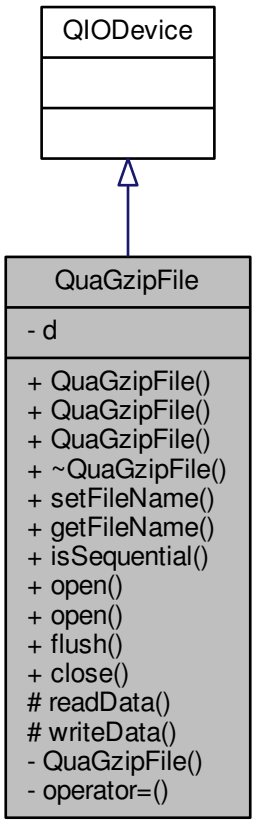

Collaboration diagram for QuaGzipFile:

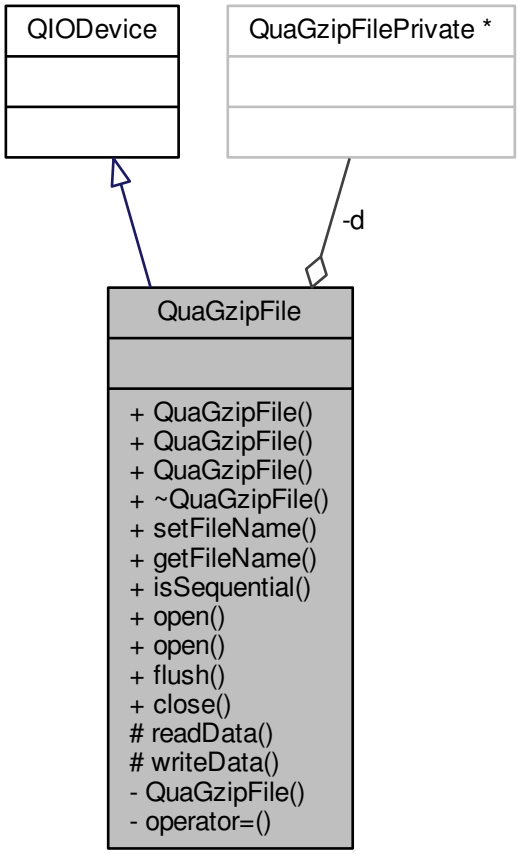

Public Member Functions

- QuaGzipFile ()

  Empty constructor.
- QuaGzipFile (QObject *parent)

  Empty constructor with a parent.
- QuaGzipFile (const QString &fileName, QObject *parent=NULL)

  Constructor.
- virtual ~QuaGzipFile ()

  Destructor.
- void setFileName (const QString &fileName)

  Sets the name of the GZIP file to be opened.
- QString getFileName () const

  Returns the name of the GZIP file.
- virtual bool isSequential () const

  Returns true.
- virtual bool open (QIODevice::OpenMode mode)

  Opens the file.

- virtual bool open (int fd, QIODevice::OpenMode mode)

  Opens the file.
- virtual bool flush ()

  Flushes data to file.
- virtual void close ()

  Closes the file.

Protected Member Functions

- virtual qint64 readData (char *data, qint64 maxSize)

  Implementation of QIODevice::readData().
- virtual qint64 writeData (const char *data, qint64 maxSize)

  Implementation of QIODevice::writeData().

Private Member Functions

- QuaGzipFile (const QuaGzipFile &that)
- QuaGzipFile & operator= (const QuaGzipFile &that)

Private Attributes

- QuaGzipFilePrivate * d

12.68.1 Detailed Description

This class is a wrapper around GZIP file access functions in zlib. Unlike QuaZip classes, it doesn't allow reading from a GZIP file opened as QIODevice, for example, if your GZIP file is in QBuffer. It only provides QIODevice access to a GZIP file contents, but the GZIP file itself must be identified by its name on disk or by descriptor id.

Definition at line 39 of file quagzipfile.h.

12.68.2 Constructor & Destructor Documentation

12.68.2.1 QuaGzipFile::QuaGzipFile ( )

Must call setFileName() before trying to open.

Definition at line 87 of file quagzipfile.cpp.

```
87                          :
88 d(new QuaGzipFilePrivate())
89 {
90 }
```

12.68.2.2 QuaGzipFile::QuaGzipFile (QObject * *parent*)

Must call setFileName() before trying to open.

Parameters

parent	The parent object, as per QObject logic.

Definition at line 92 of file quagzipfile.cpp.

```
92                                       :
93 QIODevice(parent),
94 d(new QuaGzipFilePrivate())
95 {
96 }
```

12.68.2.3 QuaGzipFile::QuaGzipFile (const QString & *fileName*, QObject * *parent* = NULL)

Parameters

fileName	The name of the GZIP file.
parent	The parent object, as per QObject logic.

Definition at line 98 of file quagzipfile.cpp.

```
98                                                                  :
99   QIODevice(parent),
100 d(new QuaGzipFilePrivate(fileName))
101 {
102 }
```

12.68.2.4 QuaGzipFile::~QuaGzipFile ( ) [virtual]

Definition at line 104 of file quagzipfile.cpp.

References close(), and d.

```
105 {
106   if (isOpen()) {
107     close();
108   }
109   delete d;
110 }
```

Here is the call graph for this function:



12.68.2.5 QuaGzipFile::QuaGzipFile (const QuaGzipFile & *that*) [private]

12.68.3 Member Function Documentation

12.68.3.1 void QuaGzipFile::close ( ) [virtual]

Definition at line 152 of file quagzipfile.cpp.

References d.

Referenced by ~QuaGzipFile().

```
153 {
154   QIODevice::close();
155   gzclose(d->gzd);
156 }
```

Here is the caller graph for this function:



12.68.3.2 bool QuaGzipFile::flush ( ) [virtual]

The data is written using Z_SYNC_FLUSH mode. Doesn't make any sense when reading.

Definition at line 147 of file quagzipfile.cpp.

References d.

```
148 {
149     return gzflush(d->gzd, Z_SYNC_FLUSH) == Z_OK;
150 }
```

12.68.3.3 QString QuaGzipFile::getFileName ( ) const

Definition at line 117 of file quagzipfile.cpp.

References d.

```
118 {
119     return d->fileName;
120 }
```

12.68.3.4 bool QuaGzipFile::isSequential ( ) const [virtual]

Strictly speaking, zlib supports seeking for GZIP files, but it is poorly implemented, because there is no way to implement it properly. For reading, seeking backwards is very slow, and for writing, it is downright impossible. Therefore, QuaGzipFile does not support seeking at all.

Definition at line 122 of file quagzipfile.cpp.

```
123 {
124   return true;
125 }
```

12.68.3.5 bool QuaGzipFile::open (QIODevice::OpenMode *mode*) [virtual]

Parameters

mode	Can be either QIODevice::Write or QIODevice::Read. ReadWrite and Append aren't supported.

Definition at line 127 of file quagzipfile.cpp.

References d.

```
128 {
129     QString error;
130     if (!d->open(d->fileName, mode, error)) {
131         setErrorString(error);
132         return false;
133     }
134     return QIODevice::open(mode);
135 }
```

12.68.3.6 bool QuaGzipFile::open (int *fd*, QIODevice::OpenMode *mode*) [virtual]

This is an overloaded member function, provided for convenience. It differs from the above function only in what argument(s) it accepts.

Parameters

fd	The file descriptor to read/write the GZIP file from/to.
mode	Can be either QIODevice::Write or QIODevice::Read. ReadWrite and Append aren't supported.

Definition at line 137 of file quagzipfile.cpp.

References d.

```
138 {
139     QString error;
140     if (!d->open(fd, mode, error)) {
141         setErrorString(error);
142         return false;
143     }
144     return QIODevice::open(mode);
145 }
```

12.68.3.7 QuaGzipFile& QuaGzipFile::operator= (const QuaGzipFile & *that*) [private]

12.68.3.8 qint64 QuaGzipFile::readData (char * *data*, qint64 *maxSize*) [protected], [virtual]

Definition at line 158 of file quagzipfile.cpp.

References d.

```
159 {
160     return gzread(d->gzd, (voidp)data, (unsigned)maxSize);
161 }
```

12.68.3.9 void QuaGzipFile::setFileName (const QString & *fileName*)

Definition at line 112 of file quagzipfile.cpp.

References d.

```
113 {
114     d->fileName = fileName;
115 }
```

12.68.3.10 qint64 QuaGzipFile::writeData (const char * *data*, qint64 *maxSize*) [protected], [virtual]

Definition at line 163 of file quagzipfile.cpp.

References d.

```
164 {
165     if (maxSize == 0)
166         return 0;
167     int written = gzwrite(d->gzd, (voidp)data, (unsigned)maxSize);
168     if (written == 0)
169         return -1;
170     else
171         return written;
172 }
```

12.68.4 Field Documentation

12.68.4.1 QuaGzipFilePrivate* QuaGzipFile::d [private]

Definition at line 105 of file quagzipfile.h.

Referenced by close(), flush(), getFileName(), open(), readData(), setFileName(), writeData(), and ~QuaGzipFile().

The documentation for this class was generated from the following files:

- src/ckb/quazip/quagzipfile.h
- src/ckb/quazip/quagzipfile.cpp

12.69 QuaZIODevice Class Reference

A class to compress/decompress QIODevice.

`#include <src/ckb/quazip/quaziodevice.h>`

Inheritance diagram for QuaZIODevice:

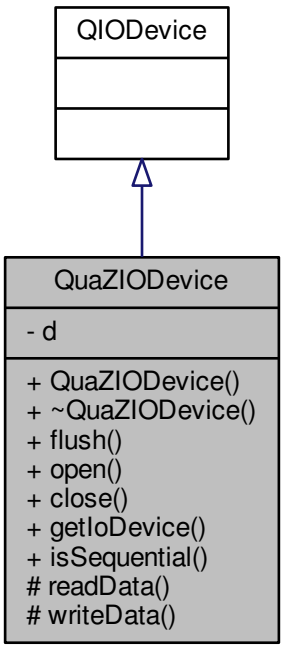

Collaboration diagram for QuaZIODevice:

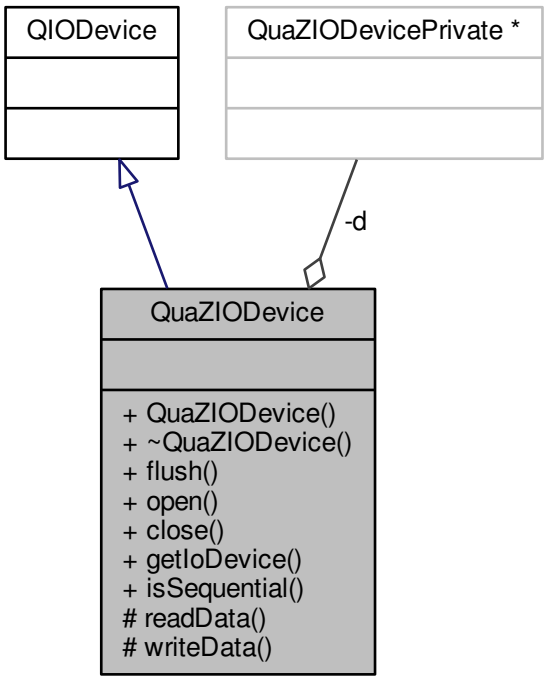

Public Member Functions

- QuaZIODevice (QIODevice ∗io, QObject ∗parent=NULL)

  Constructor.
- ∼QuaZIODevice ()

  Destructor.
- virtual bool flush ()

  Flushes data waiting to be written.
- virtual bool open (QIODevice::OpenMode mode)

  Opens the device.
- virtual void close ()

  Closes this device, but not the underlying one.
- QIODevice ∗ getIoDevice () const

  Returns the underlying device.
- virtual bool isSequential () const

  Returns true.

Protected Member Functions

- virtual qint64 readData (char ∗data, qint64 maxSize)

  Implementation of QIODevice::readData().
- virtual qint64 writeData (const char ∗data, qint64 maxSize)

  Implementation of QIODevice::writeData().

Private Attributes

- QuaZIODevicePrivate * d

12.69.1 Detailed Description

This class can be used to compress any data written to QIODevice or decompress it back. Compressing data sent over a QTcpSocket is a good example.

Definition at line 41 of file quaziodevice.h.

12.69.2 Constructor & Destructor Documentation

12.69.2.1 QuaZIODevice::QuaZIODevice (QIODevice * *io*, QObject * *parent* = NULL)

Parameters

io	The QIODevice to read/write.
parent	The parent object, as per QObject logic.

Definition at line 123 of file quaziodevice.cpp.

```
123                                                     :
124     QIODevice(parent),
125     d(new QuaZIODevicePrivate(io))
126 {
127   connect(io, SIGNAL(readyRead()), SIGNAL(readyRead()));
128 }
```

12.69.2.2 QuaZIODevice::~QuaZIODevice ( )

Definition at line 130 of file quaziodevice.cpp.

References close(), and d.

```
131 {
132     if (isOpen())
133         close();
134     delete d;
135 }
```

Here is the call graph for this function:



12.69.3 Member Function Documentation

12.69.3.1 void QuaZIODevice::close ( ) [virtual]

The underlying QIODevice is not closed in case you want to write something else to it.

Definition at line 169 of file quaziodevice.cpp.

References d, and flush().

Referenced by ~QuaZIODevice().

```
170 {
171     if ((openMode() & QIODevice::ReadOnly) != 0) {
172         if (inflateEnd(&d->zins) != Z_OK) {
173             setErrorString(d->zins.msg);
174         }
175     }
176     if ((openMode() & QIODevice::WriteOnly) != 0) {
177         flush();
178         if (deflateEnd(&d->zouts) != Z_OK) {
179             setErrorString(d->zouts.msg);
180         }
181     }
182     QIODevice::close();
183 }
```

Here is the call graph for this function:

Here is the caller graph for this function:



12.69.3.2 bool QuaZIODevice::flush ( ) [virtual]

Unfortunately, as QIODevice doesn't support flush() by itself, the only thing this method does is write the compressed data into the device using Z_SYNC_FLUSH mode. If you need the compressed data to actually be flushed from the buffer of the underlying QIODevice, you need to call its flush() method as well, providing it supports it (like QTcpSocket does). Example:

```
QuaZIODevice dev(&sock);
dev.open(QIODevice::Write);
dev.write(yourDataGoesHere);
dev.flush();
sock->flush(); // this actually sends data to network
```

This may change in the future versions of QuaZIP by implementing an ugly hack: trying to cast the QIODevice using qobject_cast to known flush()-supporting subclasses, and calling flush if the resulting pointer is not zero.

Definition at line 281 of file quaziodevice.cpp.

References d, and QUAZIO_OUTBUFSIZE.

Referenced by close().

```
282 {
283     QString error;
284     if (d->doFlush(error) < 0) {
```

```
285         setErrorString(error);
286         return false;
287     }
288     // can't flush buffer, some data is still waiting
289     if (d->outBufPos < d->outBufSize)
290         return true;
291     Bytef c = 0;
292     d->zouts.next_in = &c; // fake input buffer
293     d->zouts.avail_in = 0; // of zero size
294     do {
295         d->zouts.next_out = (Bytef *) d->outBuf;
296         d->zouts.avail_out = QUAZIO_OUTBUFSIZE;
297         switch (deflate(&d->zouts, Z_SYNC_FLUSH)) {
298         case Z_OK:
299           d->outBufSize = (char *) d->zouts.next_out - d->outBuf;
300           if (d->doFlush(error) < 0) {
301               setErrorString(error);
302               return false;
303           }
304           if (d->outBufPos < d->outBufSize)
305               return true;
306           break;
307         case Z_BUF_ERROR: // nothing to write?
308           return true;
309         default:
310           setErrorString(QString::fromLocal8Bit(d->zouts.msg));
311           return false;
312         }
313     } while (d->zouts.avail_out == 0);
314     return true;
315 }
```

Here is the caller graph for this function:



12.69.3.3 QIODevice * QuaZIODevice::getIoDevice ( ) const

Definition at line 137 of file quaziodevice.cpp.

References d.

```
138 {
139     return d->io;
140 }
```

12.69.3.4 bool QuaZIODevice::isSequential ( ) const [virtual]

Definition at line 317 of file quaziodevice.cpp.

```
318 {
319   return true;
320 }
```

12.69.3.5 bool QuaZIODevice::open (QIODevice::OpenMode *mode*) [virtual]

Parameters

mode	Neither QIODevice::ReadWrite nor QIODevice::Append are not supported.

Definition at line 142 of file quaziodevice.cpp.

References d.

```
143 {
144     if ((mode & QIODevice::Append) != 0) {
145         setErrorString(trUtf8("QIODevice::Append is not supported for"
146                     " QuaZIODevice"));
147         return false;
148     }
149     if ((mode & QIODevice::ReadWrite) == QIODevice::ReadWrite) {
150         setErrorString(trUtf8("QIODevice::ReadWrite is not supported for"
151                     " QuaZIODevice"));
152         return false;
153     }
154     if ((mode & QIODevice::ReadOnly) != 0) {
155         if (inflateInit(&d->zins) != Z_OK) {
156             setErrorString(d->zins.msg);
157             return false;
158         }
159     }
160     if ((mode & QIODevice::WriteOnly) != 0) {
161         if (deflateInit(&d->zouts, Z_DEFAULT_COMPRESSION) != Z_OK) {
162             setErrorString(d->zouts.msg);
163             return false;
164         }
165     }
166     return QIODevice::open(mode);
167 }
```

12.69.3.6 qint64 QuaZIODevice::readData (char * *data*, qint64 *maxSize*) [protected], [virtual]

Definition at line 185 of file quaziodevice.cpp.

References d, and QUAZIO_INBUFSIZE.

```
186 {
187   int read = 0;
188   while (read < maxSize) {
189     if (d->inBufPos == d->inBufSize) {
190       d->inBufPos = 0;
191       d->inBufSize = d->io->read(d->inBuf, QUAZIO_INBUFSIZE);
192       if (d->inBufSize == -1) {
193         d->inBufSize = 0;
194         setErrorString(d->io->errorString());
195         return -1;
196       }
197       if (d->inBufSize == 0)
198         break;
199     }
200     while (read < maxSize && d->inBufPos < d->inBufSize) {
201       d->zins.next_in = (Bytef *) (d->inBuf + d->inBufPos);
202       d->zins.avail_in = d->inBufSize - d->inBufPos;
203       d->zins.next_out = (Bytef *) (data + read);
204       d->zins.avail_out = (uInt) (maxSize - read); // hope it's less than 2GB
205       int more = 0;
206       switch (inflate(&d->zins, Z_SYNC_FLUSH)) {
207       case Z_OK:
208         read = (char *) d->zins.next_out - data;
209         d->inBufPos = (char *) d->zins.next_in - d->inBuf;
210         break;
211       case Z_STREAM_END:
212         read = (char *) d->zins.next_out - data;
213         d->inBufPos = (char *) d->zins.next_in - d->inBuf;
214         return read;
215       case Z_BUF_ERROR: // this should never happen, but just in case
216         if (!d->zBufError) {
217           qWarning("Z_BUF_ERROR detected with %d/%d in/out, weird",
218               d->zins.avail_in, d->zins.avail_out);
219           d->zBufError = true;
220         }
221         memmove(d->inBuf, d->inBuf + d->inBufPos, d->inBufSize - d->inBufPos);
222         d->inBufSize -= d->inBufPos;
223         d->inBufPos = 0;
224         more = d->io->read(d->inBuf + d->inBufSize, QUAZIO_INBUFSIZE -
      d->inBufSize);
```

```
225         if (more == -1) {
226           setErrorString(d->io->errorString());
227           return -1;
228         }
229         if (more == 0)
230           return read;
231         d->inBufSize += more;
232         break;
233       default:
234         setErrorString(QString::fromLocal8Bit(d->zins.msg));
235         return -1;
236       }
237     }
238   }
239 #ifdef QUAZIP_ZIODEVICE_DEBUG_INPUT
240   indebug.write(data, read);
241 #endif
242   return read;
243 }
```

12.69.3.7 qint64 QuaZIODevice::writeData (const char * *data*, qint64 *maxSize*) [protected], [virtual]

Definition at line 245 of file quaziodevice.cpp.

References d, and QUAZIO_OUTBUFSIZE.

```
246 {
247   int written = 0;
248   QString error;
249   if (d->doFlush(error) == -1) {
250     setErrorString(error);
251     return -1;
252   }
253   while (written < maxSize) {
254       // there is some data waiting in the output buffer
255     if (d->outBufPos < d->outBufSize)
256       return written;
257     d->zouts.next_in = (Bytef *) (data + written);
258     d->zouts.avail_in = (uInt) (maxSize - written); // hope it's less than 2GB
259     d->zouts.next_out = (Bytef *) d->outBuf;
260     d->zouts.avail_out = QUAZIO_OUTBUFSIZE;
261     switch (deflate(&d->zouts, Z_NO_FLUSH)) {
262     case Z_OK:
263       written = (char *) d->zouts.next_in - data;
264       d->outBufSize = (char *) d->zouts.next_out - d->outBuf;
265       break;
266     default:
267       setErrorString(QString::fromLocal8Bit(d->zouts.msg));
268       return -1;
269     }
270     if (d->doFlush(error) == -1) {
271       setErrorString(error);
272       return -1;
273     }
274   }
275 #ifdef QUAZIP_ZIODEVICE_DEBUG_OUTPUT
276   debug.write(data, written);
277 #endif
278   return written;
279 }
```

12.69.4 Field Documentation

12.69.4.1 QuaZIODevicePrivate* QuaZIODevice::d [private]

Definition at line 96 of file quaziodevice.h.

Referenced by close(), flush(), getIoDevice(), open(), readData(), writeData(), and ~QuaZIODevice().

The documentation for this class was generated from the following files:

- src/ckb/quazip/quaziodevice.h
- src/ckb/quazip/quaziodevice.cpp

12.70 QuaZip Class Reference

ZIP archive.

`#include <quazip/quazip.h>`

Collaboration diagram for QuaZip:

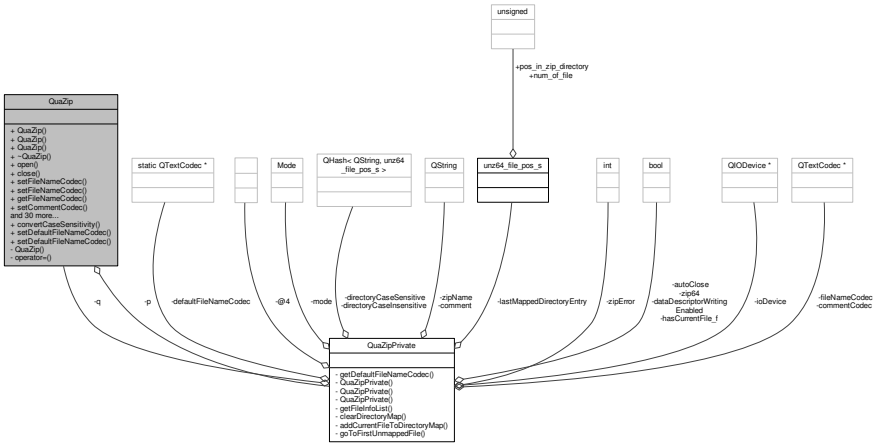

Public Types

- enum Constants { MAX_FILE_NAME_LENGTH =256 }

  Useful constants.
- enum Mode {
  mdNotOpen, mdUnzip, mdCreate, mdAppend,
  mdAdd }

  Open mode of the ZIP file.
- enum CaseSensitivity { csDefault =0, csSensitive =1, csInsensitive =2 }

  Case sensitivity for the file names.

Public Member Functions

- QuaZip ()

  Constructs QuaZip object.
- QuaZip (const QString &zipName)

  Constructs QuaZip object associated with ZIP file zipName.
- QuaZip (QIODevice *ioDevice)

  Constructs QuaZip object associated with ZIP file represented by ioDevice.
- ~QuaZip ()

  Destroys QuaZip object.
- bool open (Mode mode, zlib_filefunc_def *ioApi=NULL)

  Opens ZIP file.
- void close ()

  Closes ZIP file.
- void setFileNameCodec (QTextCodec *fileNameCodec)

  Sets the codec used to encode/decode file names inside archive.
- void setFileNameCodec (const char *fileNameCodecName)

Sets the codec used to encode/decode file names inside archive.

- QTextCodec * getFileNameCodec () const

  Returns the codec used to encode/decode comments inside archive.
- void setCommentCodec (QTextCodec *commentCodec)

  Sets the codec used to encode/decode comments inside archive.
- void setCommentCodec (const char *commentCodecName)

  Sets the codec used to encode/decode comments inside archive.
- QTextCodec * getCommentCodec () const

  Returns the codec used to encode/decode comments inside archive.
- QString getZipName () const

  Returns the name of the ZIP file.
- void setZipName (const QString &zipName)

  Sets the name of the ZIP file.
- QIODevice * getIoDevice () const

  Returns the device representing this ZIP file.
- void setIoDevice (QIODevice *ioDevice)

  Sets the device representing the ZIP file.
- Mode getMode () const

  Returns the mode in which ZIP file was opened.
- bool isOpen () const

  Returns `true` if ZIP file is open, `false` otherwise.
- int getZipError () const

  Returns the error code of the last operation.
- int getEntriesCount () const

  Returns number of the entries in the ZIP central directory.
- QString getComment () const

  Returns global comment in the ZIP file.
- void setComment (const QString &comment)

  Sets the global comment in the ZIP file.
- bool goToFirstFile ()

  Sets the current file to the first file in the archive.
- bool goToNextFile ()

  Sets the current file to the next file in the archive.
- bool setCurrentFile (const QString &fileName, CaseSensitivity cs=csDefault)

  Sets current file by its name.
- bool hasCurrentFile () const

  Returns `true` if the current file has been set.
- bool getCurrentFileInfo (QuaZipFileInfo *info) const

  Retrieves information about the current file.
- bool getCurrentFileInfo (QuaZipFileInfo64 *info) const

  Retrieves information about the current file.
- QString getCurrentFileName () const

  Returns the current file name.
- unzFile getUnzFile ()

  Returns `unzFile` handle.
- zipFile getZipFile ()

  Returns `zipFile` handle.
- void setDataDescriptorWritingEnabled (bool enabled)

  Changes the data descriptor writing mode.
- bool isDataDescriptorWritingEnabled () const

  Returns the data descriptor default writing mode.

- QStringList getFileNameList () const

  Returns a list of files inside the archive.
- QList< QuaZipFileInfo > getFileInfoList () const

  Returns information list about all files inside the archive.
- QList< QuaZipFileInfo64 > getFileInfoList64 () const

  Returns information list about all files inside the archive.
- void setZip64Enabled (bool zip64)

  Enables the zip64 mode.
- bool isZip64Enabled () const

  Returns whether the zip64 mode is enabled.
- bool isAutoClose () const

  Returns the auto-close flag.
- void setAutoClose (bool autoClose) const

  Sets or unsets the auto-close flag.

Static Public Member Functions

- static Qt::CaseSensitivity convertCaseSensitivity (CaseSensitivity cs)

  Returns the actual case sensitivity for the specified QuaZIP one.
- static void setDefaultFileNameCodec (QTextCodec *codec)

  Sets the default file name codec to use.
- static void setDefaultFileNameCodec (const char *codecName)

  This is an overloaded member function, provided for convenience. It differs from the above function only in what argument(s) it accepts. Equivalent to calling setDefltFileNameCodec(QTextCodec::codecForName(codecName)).

Private Member Functions

- QuaZip (const QuaZip &that)
- QuaZip & operator= (const QuaZip &that)

Private Attributes

- QuaZipPrivate * p

Friends

- class QuaZipPrivate

12.70.1 Detailed Description

This class implements basic interface to the ZIP archive. It can be used to read table contents of the ZIP archive and retreiving information about the files inside it.

You can also use this class to open files inside archive by passing pointer to the instance of this class to the constructor of the QuaZipFile class. But see QuaZipFile::QuaZipFile(QuaZip*, QObject*) for the possible pitfalls.

This class is indended to provide interface to the ZIP subpackage of the ZIP/UNZIP package as well as to the UNZIP subpackage. But currently it supports only UNZIP.

The use of this class is simple - just create instance using constructor, then set ZIP archive file name using setFile() function (if you did not passed the name to the constructor), then open() and then use different functions to work with it! Well, if you are paranoid, you may also wish to call close before destructing the instance, to check for errors on close.

You may also use getUnzFile() and getZipFile() functions to get the ZIP archive handle and use it with ZIP/UNZIP package API directly.

This class supports localized file names inside ZIP archive, but you have to set up proper codec with setCodec() function. By default, locale codec will be used, which is probably ok for UNIX systems, but will almost certainly fail with ZIP archives created in Windows. This is because Windows ZIP programs have strange habit of using DOS encoding for file names in ZIP archives. For example, ZIP archive with cyrillic names created in Windows will have file names in `IBM866` encoding instead of `WINDOWS-1251`. I think that calling one function is not much trouble, but for true platform independency it would be nice to have some mechanism for file name encoding auto detection using locale information. Does anyone know a good way to do it?

Definition at line 84 of file quazip.h.

12.70.2 Member Enumeration Documentation

12.70.2.1 enum QuaZip::CaseSensitivity

This is what you specify when accessing files in the archive. Works perfectly fine with any characters thanks to Qt's great unicode support. This is different from ZIP/UNZIP API, where only US-ASCII characters was supported.

Enumerator

csDefault Default for platform. Case sensitive for UNIX, not for Windows.

csSensitive Case sensitive.

csInsensitive Case insensitive.

Definition at line 114 of file quazip.h.

```
114                         {
115       csDefault=0,
116       csSensitive=1,
117       csInsensitive=2
118     };
```

12.70.2.2 enum QuaZip::Constants

Enumerator

MAX_FILE_NAME_LENGTH Maximum file name length. Taken from `UNZ_MAXFILENAMEINZIP` constant in unzip.c.

Definition at line 88 of file quazip.h.

```
88                  {
89       MAX_FILE_NAME_LENGTH=256
92     };
```

12.70.2.3 enum QuaZip::Mode

Enumerator

mdNotOpen ZIP file is not open. This is the initial mode.

mdUnzip ZIP file is open for reading files inside it.

mdCreate ZIP file was created with open() call.

mdAppend ZIP file was opened in append mode. This refers to `APPEND_STATUS_CREATEAFTER` mode in ZIP/UNZIP package and means that zip is appended to some existing file what is useful when that file contains self-extractor code. This is obviously *not* what you whant to use to add files to the existing ZIP archive.

mdAdd ZIP file was opened for adding files in the archive.

Definition at line 94 of file quazip.h.

```
94              {
95       mdNotOpen,
96       mdUnzip,
97       mdCreate,
98       mdAppend,
106       mdAdd
107     };
```

12.70.3 Constructor & Destructor Documentation

12.70.3.1 QuaZip::QuaZip (const QuaZip & *that*) [private]

12.70.3.2 QuaZip::QuaZip ( )

Call setName() before opening constructed object.

Definition at line 193 of file quazip.cpp.

```
193               :
194   p(new QuaZipPrivate(this))
195 {
196 }
```

12.70.3.3 QuaZip::QuaZip (const QString & *zipName*)

Definition at line 198 of file quazip.cpp.

```
198                                    :
199   p(new QuaZipPrivate(this, zipName))
200 {
201 }
```

12.70.3.4 QuaZip::QuaZip (QIODevice * *ioDevice*)

The IO device must be seekable, otherwise an error will occur when opening.

Definition at line 203 of file quazip.cpp.

```
203                                  :
204   p(new QuaZipPrivate(this, ioDevice))
205 {
206 }
```

12.70.3.5 QuaZip::~QuaZip ( )

Calls close() if necessary.

Definition at line 208 of file quazip.cpp.

References close(), isOpen(), and p.

```
209 {
210   if(isOpen())
211     close();
212   delete p;
213 }
```

Here is the call graph for this function:

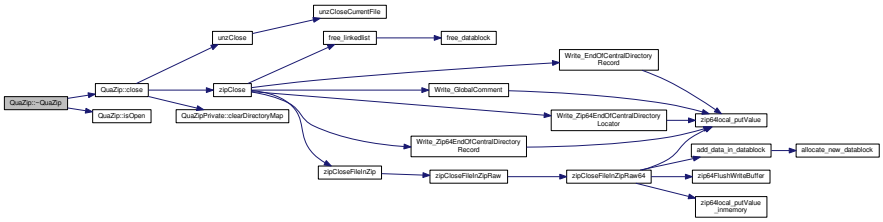

12.70.4 Member Function Documentation

12.70.4.1 void QuaZip::close ( )

Call getZipError() to determine if the close was successful.

If the file was opened by name, then the underlying QIODevice is closed and deleted.

If the underlying QIODevice was set explicitly using setIoDevice() or the appropriate constructor, then it is closed if the auto-close flag is set (which it is by default). Call setAutoClose() to clear the auto-close flag if this behavior is undesirable.

Since Qt 5.1, the QSaveFile was introduced. It breaks the QIODevice API by making close() private and crashing the application if it is called from the base class where it is public. It is an excellent example of poor design that illustrates why you should never ever break an is-a relationship between the base class and a subclass. QuaZIP works around this bug by checking if the QIODevice is an instance of QSaveFile, using qobject_cast<>, and if it is, calls QSaveFile::commit() instead of close(). It is a really ugly hack, but at least it makes your programs work instead of crashing. Note that if the auto-close flag is cleared, then this is a non-issue, and commit() isn't called.

Definition at line 324 of file quazip.cpp.

References QuaZipPrivate::clearDirectoryMap(), QuaZipPrivate::comment, QuaZipPrivate::commentCodec, QuaZipPrivate::ioDevice, mdAdd, mdAppend, mdCreate, mdNotOpen, mdUnzip, QuaZipPrivate::mode, p, UNZ_OK, unzClose(), zipClose(), QuaZipPrivate::zipError, and QuaZipPrivate::zipName.

Referenced by QuaZipFile::close(), JlCompress::compressDir(), JlCompress::compressFile(), JlCompress::compressFiles(), JlCompress::extractDir(), JlCompress::extractFile(), JlCompress::extractFiles(), JlCompress::getFileList(), QuaZipFile::open(), and ~QuaZip().

```
325 {
326   p->zipError=UNZ_OK;
327   switch(p->mode) {
328     case mdNotOpen:
329       qWarning("QuaZip::close(): ZIP is not open");
330       return;
331     case mdUnzip:
332       p->zipError=unzClose(p->unzFile_f);
333       break;
334     case mdCreate:
335     case mdAppend:
336     case mdAdd:
337       p->zipError=zipClose(p->zipFile_f,
338           p->comment.isNull() ? NULL
339           : p->commentCodec->fromUnicode(p->comment).constData());
340       break;
341     default:
342       qWarning("QuaZip::close(): unknown mode: %d", (int)p->mode);
343       return;
344   }
345   // opened by name, need to delete the internal IO device
346   if (!p->zipName.isEmpty()) {
347       delete p->ioDevice;
348       p->ioDevice = NULL;
349   }
350   p->clearDirectoryMap();
351   if(p->zipError==UNZ_OK)
352     p->mode=mdNotOpen;
353 }
```

Here is the call graph for this function:

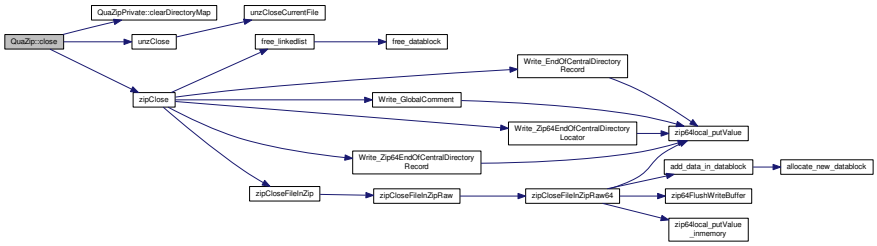

Here is the caller graph for this function:

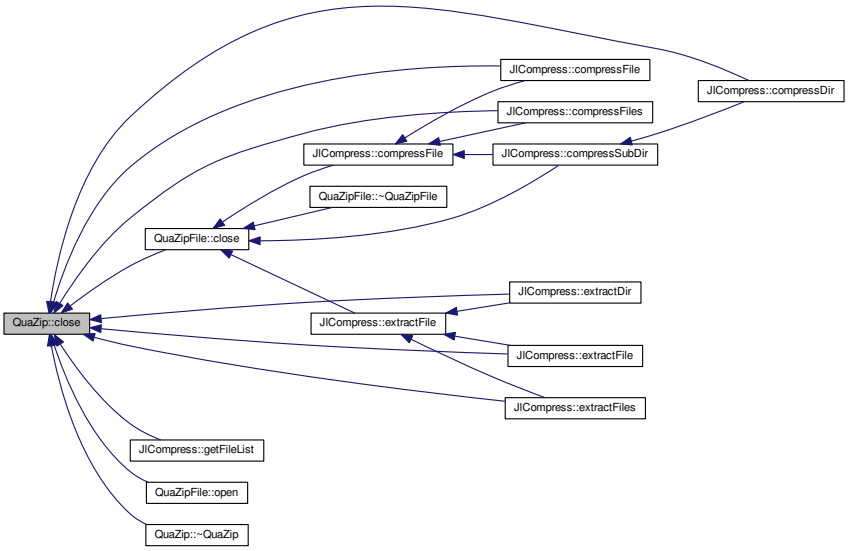

12.70.4.2 Qt::CaseSensitivity QuaZip::convertCaseSensitivity (QuaZip::CaseSensitivity *cs*) [static]

Parameters

cs	The value to convert.

Returns

If CaseSensitivity::csDefault, then returns the default file name case sensitivity for the platform. Otherwise, just returns the appropriate value from the Qt::CaseSensitivity enum.

Definition at line 747 of file quazip.cpp.

References csDefault, and csSensitive.

Referenced by QuaZipDir::exists(), and setCurrentFile().

```
748 {
749   if (cs == csDefault) {
750 #ifdef Q_WS_WIN
751       return Qt::CaseInsensitive;
752 #else
```

```
753       return Qt::CaseSensitive;
754 #endif
755   } else {
756       return cs == csSensitive ? Qt::CaseSensitive : Qt::CaseInsensitive;
757   }
758 }
```

Here is the caller graph for this function:

12.70.4.3 QString QuaZip::getComment ( ) const

Definition at line 389 of file quazip.cpp.

References QuaZipPrivate::commentCodec, mdUnzip, QuaZipPrivate::mode, p, unz_global_info64_s::size_comment, UNZ_OK, unzGetGlobalComment(), unzGetGlobalInfo64(), and QuaZipPrivate::zipError.

```
390 {
391   QuaZip *fakeThis=(QuaZip*)this; // non-const
392   fakeThis->p->zipError=UNZ_OK;
393   if(p->mode!=mdUnzip) {
394     qWarning("QuaZip::getComment(): ZIP is not open in mdUnzip mode");
395     return QString();
396   }
397   unz_global_info64 globalInfo;
398   QByteArray comment;
399   if((fakeThis->p->zipError=unzGetGlobalInfo64(p->unzFile_f, &globalInfo))!=
      UNZ_OK)
400     return QString();
401   comment.resize(globalInfo.size_comment);
402   if((fakeThis->p->zipError=unzGetGlobalComment(p->unzFile_f, comment.data(),
      comment.size())) < 0)
403     return QString();
404   fakeThis->p->zipError = UNZ_OK;
405   return p->commentCodec->toUnicode(comment);
406 }
```

Here is the call graph for this function:

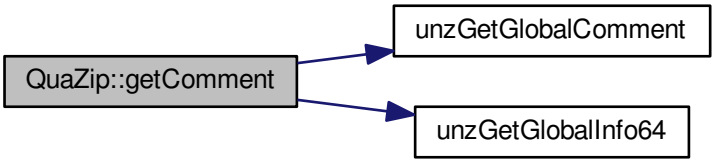

12.70.4.4 QTextCodec * QuaZip::getCommentCodec ( ) const

Definition at line 597 of file quazip.cpp.

References QuaZipPrivate::commentCodec, and p.

Referenced by QuaZipFile::open().

```
598 {
599   return p->commentCodec;
600 }
```

Here is the caller graph for this function:



12.70.4.5 bool QuaZip::getCurrentFileInfo (QuaZipFileInfo * *info*) const

Fills the structure pointed by *info*. Returns `true` on success, `false` otherwise. In the latter case structure pointed by *info* remains untouched. If there was an error, getZipError() returns error code.

Should be used only in QuaZip::mdUnzip mode.

Does nothing and returns `false` in any of the following cases.

- ZIP is not open;
- ZIP does not have current file.

In both cases getZipError() returns `UNZ_OK` since there is no ZIP/UNZIP API call.

This overload doesn't support zip64, but will work OK on zip64 archives except that if one of the sizes (compressed or uncompressed) is greater than 0xFFFFFFFFu, it will be set to exactly 0xFFFFFFFFu.

See Also

getCurrentFileInfo(QuaZipFileInfo64* info)const
QuaZipFileInfo64::toQuaZipFileInfo(QuaZipFileInfo&)const

Definition at line 492 of file quazip.cpp.

References QuaZipFileInfo64::toQuaZipFileInfo().

Referenced by JlCompress::extractFile(), QuaZipFile::getFileInfo(), JlCompress::getFileList(), QuaZip_getFileInfo(), and QuaZipDir_getFileInfo().

```
493 {
494     QuaZipFileInfo64 info64;
495     if (info == NULL) { // Very unlikely because of the overloads
496         return false;
497     }
498     if (getCurrentFileInfo(&info64)) {
499         info64.toQuaZipFileInfo(*info);
500         return true;
501     } else {
502         return false;
503     }
504 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

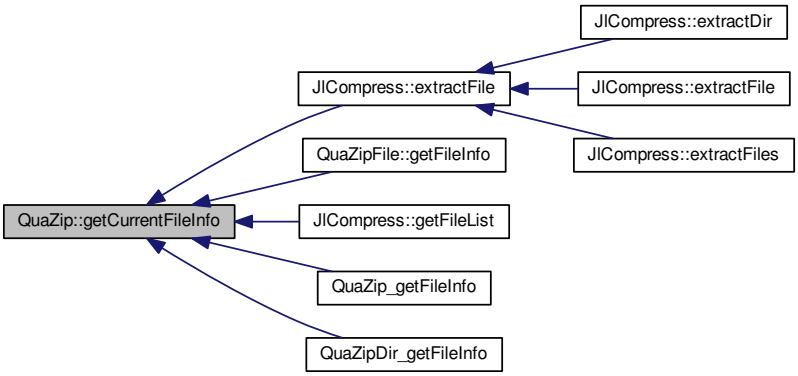

12.70.4.6 bool QuaZip::getCurrentFileInfo (QuaZipFileInfo64 * *info*) const

This is an overloaded member function, provided for convenience. It differs from the above function only in what argument(s) it accepts.

This function supports zip64. If the archive doesn't use zip64, it is completely equivalent to getCurrentFileInfo(QuaZipFileInfo* info) except for the argument type.

See Also

Definition at line 506 of file quazip.cpp.

References QuaZipPrivate::addCurrentFileToDirectoryMap(), QuaZipFileInfo64::comment, QuaZipPrivate::commentCodec, unz_file_info64_s::compressed_size, QuaZipFileInfo64::compressedSize, unz_file_info64_s::compression_method, QuaZipFileInfo64::crc, unz_file_info64_s::crc, QuaZipFileInfo64::dateTime, unz_file_info64_s::disk_num_start, QuaZipFileInfo64::diskNumberStart, unz_file_info64_s::external_fa, QuaZipFileInfo64::externalAttr, QuaZipFileInfo64::extra, QuaZipPrivate::fileNameCodec, unz_file_info64_s::flag, QuaZipFileInfo64::flags, hasCurrentFile(), unz_file_info64_s::internal_fa, QuaZipFileInfo64::internalAttr, isOpen(), mdUnzip, QuaZipFileInfo64::method, QuaZipPrivate::mode, QuaZipFileInfo64::name, p, unz_file_info64_s::size_file_comment, unz_file_info64_s::size_file_extra, unz_file_info64_s::size_filename, tm_unz_s::tm_hour, tm_unz_s::tm_mday, tm_unz_s::tm_min, tm_unz_s::tm_mon, tm_unz_s::tm_sec, tm_unz_s::tm_year, unz_file_info64_s::tmu_date, unz_file_info64_s::uncompressed_size, QuaZipFileInfo64::uncompressedSize, UNZ_OK, unzGetCurrentFileInfo64(), unz_file_info64_s::version, unz_file_info64_s::version_needed, QuaZipFileInfo64::versionCreated, QuaZipFileInfo64::versionNeeded, and QuaZipPrivate::zipError.

```
507 {
508   QuaZip *fakeThis=(QuaZip*)this; // non-const
509   fakeThis->p->zipError=UNZ_OK;
510   if(p->mode!=mdUnzip) {
511     qWarning("QuaZip::getCurrentFileInfo(): ZIP is not open in mdUnzip mode");
512     return false;
513   }
514   unz_file_info64 info_z;
515   QByteArray fileName;
516   QByteArray extra;
517   QByteArray comment;
518   if(info==NULL) return false;
519   if(!isOpen()||!hasCurrentFile()) return false;
520   if((fakeThis->p->zipError=unzGetCurrentFileInfo64(
      p->unzFile_f, &info_z, NULL, 0, NULL, 0, NULL, 0))!=UNZ_OK)
521     return false;
522   fileName.resize(info_z.size_filename);
523   extra.resize(info_z.size_file_extra);
524   comment.resize(info_z.size_file_comment);
525   if((fakeThis->p->zipError=unzGetCurrentFileInfo64(
      p->unzFile_f, NULL,
526       fileName.data(), fileName.size(),
527       extra.data(), extra.size(),
528       comment.data(), comment.size()))!=UNZ_OK)
529     return false;
530   info->versionCreated=info_z.version;
531   info->versionNeeded=info_z.version_needed;
532   info->flags=info_z.flag;
533   info->method=info_z.compression_method;
534   info->crc=info_z.crc;
535   info->compressedSize=info_z.compressed_size;
536   info->uncompressedSize=info_z.uncompressed_size;
537   info->diskNumberStart=info_z.disk_num_start;
538   info->internalAttr=info_z.internal_fa;
539   info->externalAttr=info_z.external_fa;
540   info->name=p->fileNameCodec->toUnicode(fileName);
541   info->comment=p->commentCodec->toUnicode(comment);
542   info->extra=extra;
543   info->dateTime=QDateTime(
544       QDate(info_z.tmu_date.tm_year, info_z.tmu_date.
      tm_mon+1, info_z.tmu_date.tm_mday),
545       QTime(info_z.tmu_date.tm_hour, info_z.tmu_date.
      tm_min, info_z.tmu_date.tm_sec));
546   // Add to directory map
547   p->addCurrentFileToDirectoryMap(info->name);
548   return true;
549 }
```

Here is the call graph for this function:

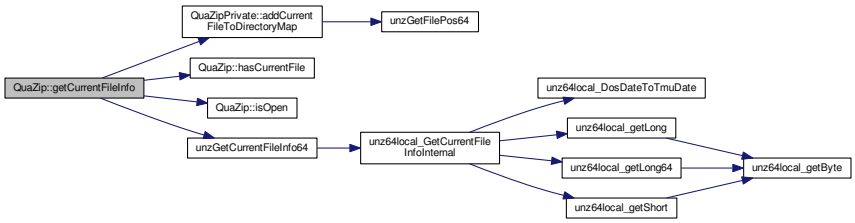

12.70.4.7 QString QuaZip::getCurrentFileName ( ) const

Equivalent to calling getCurrentFileInfo() and then getting `name` field of the QuaZipFileInfo structure, but faster and more convenient.

Should be used only in QuaZip::mdUnzip mode.

Definition at line 551 of file quazip.cpp.

References QuaZipPrivate::addCurrentFileToDirectoryMap(), QuaZipPrivate::fileNameCodec, hasCurrentFile(), isOpen(), MAX_FILE_NAME_LENGTH, mdUnzip, QuaZipPrivate::mode, p, UNZ_OK, unzGetCurrentFileInfo64(), and QuaZipPrivate::zipError.

Referenced by JlCompress::extractDir(), QuaZipFile::getActualFileName(), QuaZipPrivate::getFileInfoList(), QuaZip_getFileInfo(), and setCurrentFile().

```
552 {
553   QuaZip *fakeThis=(QuaZip*)this; // non-const
554   fakeThis->p->zipError=UNZ_OK;
555   if(p->mode!=mdUnzip) {
556     qWarning("QuaZip::getCurrentFileName(): ZIP is not open in mdUnzip mode");
557     return QString();
558   }
559   if(!isOpen()||!hasCurrentFile()) return QString();
560   QByteArray fileName(MAX_FILE_NAME_LENGTH, 0);
561   if((fakeThis->p->zipError=unzGetCurrentFileInfo64(
      p->unzFile_f, NULL, fileName.data(), fileName.size(),
562       NULL, 0, NULL, 0))!=UNZ_OK)
563     return QString();
564   QString result = p->fileNameCodec->toUnicode(fileName.constData());
565   if (result.isEmpty())
566       return result;
567   // Add to directory map
568   p->addCurrentFileToDirectoryMap(result);
569   return result;
570 }
```

Here is the call graph for this function:

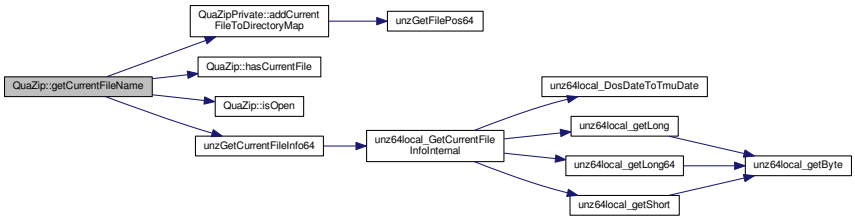

Here is the caller graph for this function:

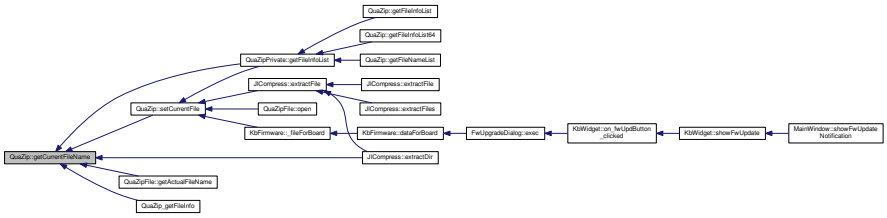

12.70.4.8 int QuaZip::getEntriesCount ( ) const

Returns negative error code in the case of error. The same error code will be returned by subsequent getZipError() call.

Definition at line 375 of file quazip.cpp.

References mdUnzip, QuaZipPrivate::mode, unz_global_info64_s::number_entry, p, UNZ_OK, unzGetGlobalInfo64(), and QuaZipPrivate::zipError.

```
376 {
377   QuaZip *fakeThis=(QuaZip*)this; // non-const
378   fakeThis->p->zipError=UNZ_OK;
379   if(p->mode!=mdUnzip) {
380     qWarning("QuaZip::getEntriesCount(): ZIP is not open in mdUnzip mode");
381     return -1;
```

```
382   }
383   unz_global_info64 globalInfo;
384   if((fakeThis->p->zipError=unzGetGlobalInfo64(p->unzFile_f, &globalInfo))!=
      UNZ_OK)
385     return p->zipError;
386   return (int)globalInfo.number_entry;
387 }
```

Here is the call graph for this function:



12.70.4.9 QList< QuaZipFileInfo > QuaZip::getFileInfoList ( ) const

Returns

A list of QuaZipFileInfo objects or an empty list if there was an error or if the archive is empty (call getZipError() to figure out which).

This function doesn't support zip64, but will still work with zip64 archives, converting results using QuaZipFileInfo64::toQuaZipFileInfo(). If all file sizes are below 4 GB, it will work just fine.

See Also

getFileNameList()
getFileInfoList64()

Definition at line 729 of file quazip.cpp.

References QuaZipPrivate::getFileInfoList(), and p.

```
730 {
731     QList<QuaZipFileInfo> list;
732     if (p->getFileInfoList(&list))
733         return list;
734     else
735         return QList<QuaZipFileInfo>();
736 }
```

Here is the call graph for this function:

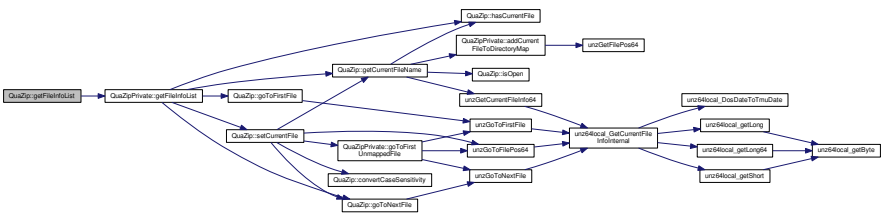

12.70.4.10 QList< QuaZipFileInfo64 > QuaZip::getFileInfoList64 ( ) const

This is an overloaded member function, provided for convenience. It differs from the above function only in what argument(s) it accepts.

This function supports zip64.

See Also

getFileNameList()
getFileInfoList()

Definition at line 738 of file quazip.cpp.

References QuaZipPrivate::getFileInfoList(), and p.

```
739 {
740     QList<QuaZipFileInfo64> list;
741     if (p->getFileInfoList(&list))
742         return list;
743     else
744         return QList<QuaZipFileInfo64>();
745 }
```

Here is the call graph for this function:

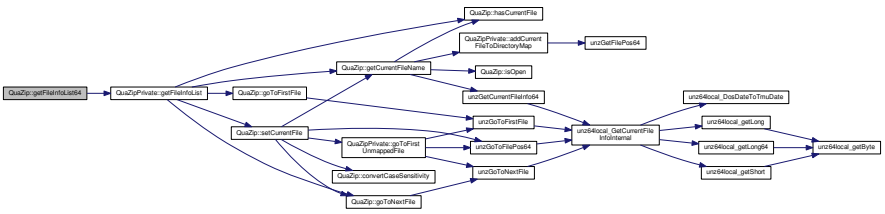

12.70.4.11 QTextCodec * QuaZip::getFileNameCodec ( ) const

Definition at line 582 of file quazip.cpp.

References QuaZipPrivate::fileNameCodec, and p.

Referenced by QuaZipFile::open().

```
583 {
584   return p->fileNameCodec;
585 }
```

Here is the caller graph for this function:



12.70.4.12 QStringList QuaZip::getFileNameList ( ) const

Returns

A list of file names or an empty list if there was an error or if the archive is empty (call getZipError() to figure out which).

See Also

getFileInfoList()

Definition at line 720 of file quazip.cpp.

References QuaZipPrivate::getFileInfoList(), and p.

```
721 {
722     QStringList list;
723     if (p->getFileInfoList(&list))
724         return list;
725     else
726         return QStringList();
727 }
```

Here is the call graph for this function:

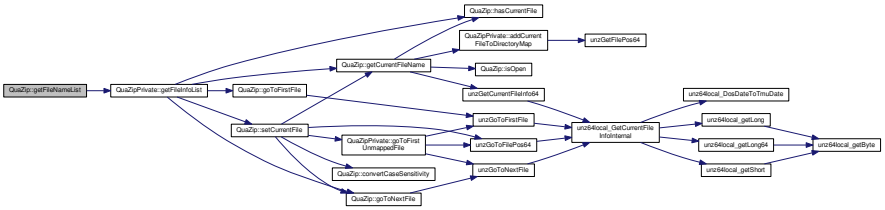

12.70.4.13 QIODevice * QuaZip::getIoDevice ( ) const

Returns null string if no device has been set explicitly, for example when opening a ZIP file by name.

See Also

setIoDevice(), getZipName(), setZipName()

Definition at line 607 of file quazip.cpp.

References QuaZipPrivate::ioDevice, p, and QuaZipPrivate::zipName.

```
608 {
609   if (!p->zipName.isEmpty()) // opened by name, using an internal QIODevice
610     return NULL;
611   return p->ioDevice;
612 }
```

12.70.4.14 QuaZip::Mode QuaZip::getMode ( ) const

Definition at line 614 of file quazip.cpp.

References QuaZipPrivate::mode, and p.

Referenced by JlCompress::compressFile(), JlCompress::compressSubDir(), QuaZipFile::csize(), JlCompress::extractFile(), QuaZipFile::getFileInfo(), QuaZipFile::open(), and QuaZipFile::usize().

```
615 {
616   return p->mode;
617 }
```

Here is the caller graph for this function:

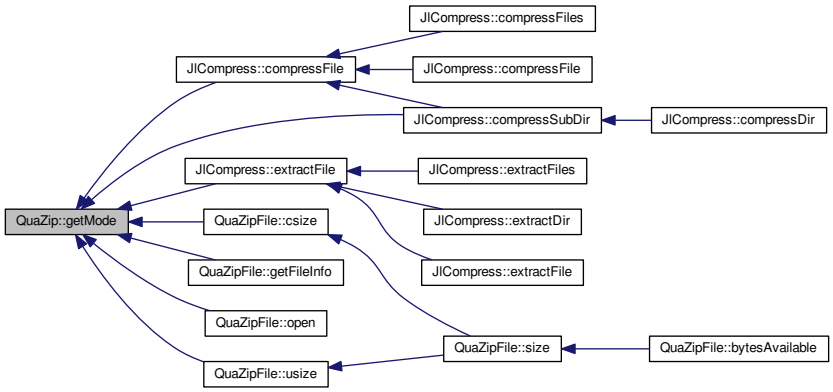

12.70.4.15 unzFile QuaZip::getUnzFile ( )

You can use this handle to directly call UNZIP part of the ZIP/UNZIP package functions (see unzip.h).

Warning

> When using the handle returned by this function, please keep in mind that QuaZip class is unable to detect any changes you make in the ZIP file state (e. g. changing current file, or closing the handle). So please do not do anything with this handle that is possible to do with the functions of this class. Or at least return the handle in the original state before calling some another function of this class (including implicit destructor calls and calls from the QuaZipFile objects that refer to this QuaZip instance!). So if you have changed the current file in the ZIP archive - then change it back or you may experience some strange behavior or even crashes.

Definition at line 639 of file quazip.cpp.

References p.

Referenced by QuaZipFile::atEnd(), QuaZipFile::close(), QuaZipFile::csize(), QuaZipFile::open(), QuaZipFile::pos(), QuaZipFile::readData(), and QuaZipFile::usize().

```
640 {
641   return p->unzFile_f;
642 }
```

Here is the caller graph for this function:

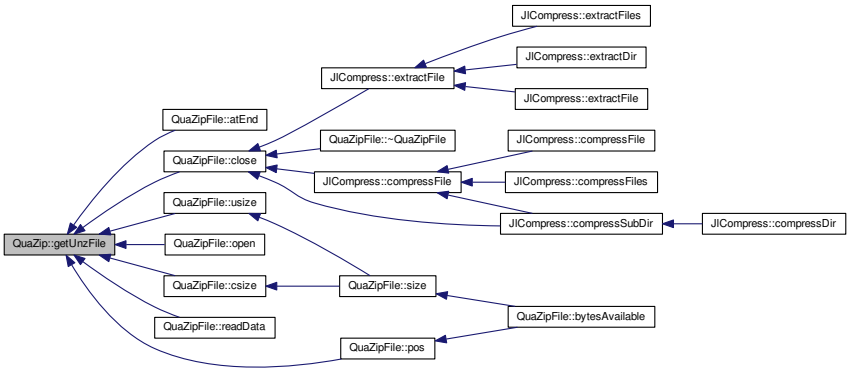

12.70.4.16 int QuaZip::getZipError ( ) const

Returns `UNZ_OK` if the last operation was successful.

Error code resets to `UNZ_OK` every time you call any function that accesses something inside ZIP archive, even if it is `const` (like getEntriesCount()). open() and close() calls reset error code too. See documentation for the specific functions for details on error detection.

Definition at line 624 of file quazip.cpp.

References p, and QuaZipPrivate::zipError.

Referenced by QuaZipFile::close(), JlCompress::compressDir(), JlCompress::compressFile(), JlCompress::compressFiles(), JlCompress::extractDir(), JlCompress::extractFile(), JlCompress::extractFiles(), QuaZipFile::getActualFileName(), QuaZipFile::getFileInfo(), JlCompress::getFileList(), and QuaZipFile::open().

```
625 {
626   return p->zipError;
627 }
```

Here is the caller graph for this function:

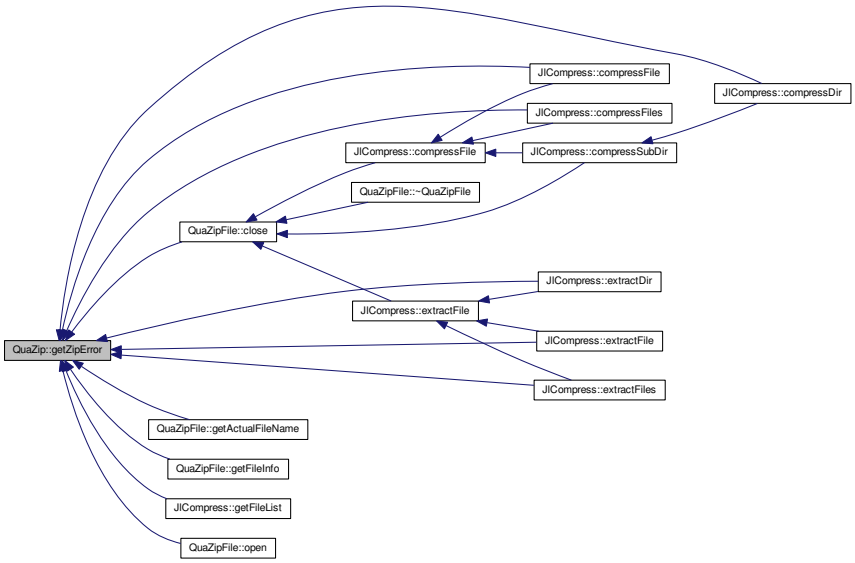

12.70.4.17 zipFile QuaZip::getZipFile ( )

You can use this handle to directly call ZIP part of the ZIP/UNZIP package functions (see zip.h). Warnings about the getUnzFile() function also apply to this function.

Definition at line 644 of file quazip.cpp.

References p.

Referenced by QuaZipFile::close(), QuaZipFile::open(), and QuaZipFile::writeData().

```
645 {
646   return p->zipFile_f;
647 }
```

Here is the caller graph for this function:

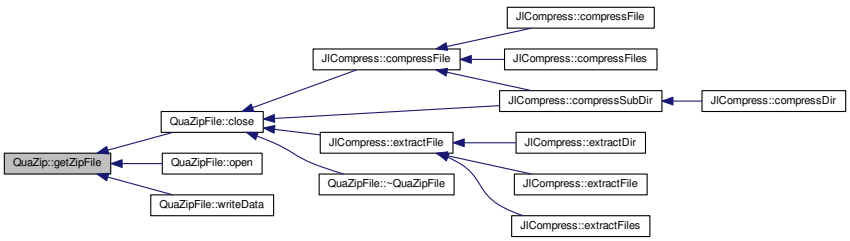

12.70.4.18 QString QuaZip::getZipName ( ) const

Returns null string if no ZIP file name has been set, for example when the QuaZip instance is set up to use a QIODevice instead.

See Also

setZipName(), setIoDevice(), getIoDevice()

Definition at line 602 of file quazip.cpp.

References p, and QuaZipPrivate::zipName.

Referenced by JlCompress::compressSubDir(), and QuaZipFile::getZipName().

```
603 {
604   return p->zipName;
605 }
```

Here is the caller graph for this function:



12.70.4.19 bool QuaZip::goToFirstFile ( )

Returns `true` on success, `false` otherwise. Call getZipError() to get the error code.

Definition at line 466 of file quazip.cpp.

References QuaZipPrivate::hasCurrentFile_f, mdUnzip, QuaZipPrivate::mode, p, UNZ_OK, unzGoToFirstFile(), and QuaZipPrivate::zipError.

Referenced by JlCompress::extractDir(), QuaZipPrivate::getFileInfoList(), and JlCompress::getFileList().

```
467 {
468   p->zipError=UNZ_OK;
469   if(p->mode!=mdUnzip) {
470     qWarning("QuaZip::goToFirstFile(): ZIP is not open in mdUnzip mode");
471     return false;
472   }
473   p->zipError=unzGoToFirstFile(p->unzFile_f);
474   p->hasCurrentFile_f=p->zipError==UNZ_OK;
475   return p->hasCurrentFile_f;
476 }
```

Here is the call graph for this function:

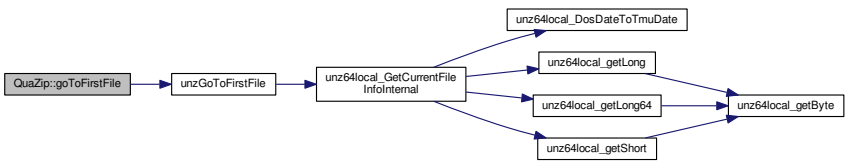

Here is the caller graph for this function:

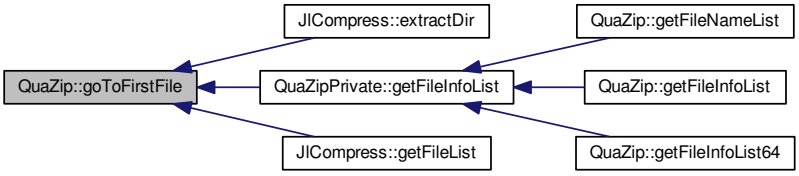

12.70.4.20 bool QuaZip::goToNextFile ( )

Returns `true` on success, `false` otherwise. Call getZipError() to determine if there was an error.

Should be used only in QuaZip::mdUnzip mode.

Note

If the end of file was reached, getZipError() will return `UNZ_OK` instead of `UNZ_END_OF_LIST_OF_FILE`. This is to make things like this easier:

```
for(bool more=zip.goToFirstFile(); more; more=zip.goToNextFile()) {
  // do something
}
if(zip.getZipError()==UNZ_OK) {
  // ok, there was no error
}
```

Definition at line 478 of file quazip.cpp.

References QuaZipPrivate::hasCurrentFile_f, mdUnzip, QuaZipPrivate::mode, p, UNZ_END_OF_LIST_OF_FILE, UNZ_OK, unzGoToNextFile(), and QuaZipPrivate::zipError.

Referenced by JlCompress::extractDir(), QuaZipPrivate::getFileInfoList(), JlCompress::getFileList(), and setCurrentFile().

```
479 {
480   p->zipError=UNZ_OK;
481   if(p->mode!=mdUnzip) {
482     qWarning("QuaZip::goToFirstFile(): ZIP is not open in mdUnzip mode");
483     return false;
484   }
485   p->zipError=unzGoToNextFile(p->unzFile_f);
486   p->hasCurrentFile_f=p->zipError==UNZ_OK;
487   if(p->zipError==UNZ_END_OF_LIST_OF_FILE)
488     p->zipError=UNZ_OK;
489   return p->hasCurrentFile_f;
490 }
```

Here is the call graph for this function:

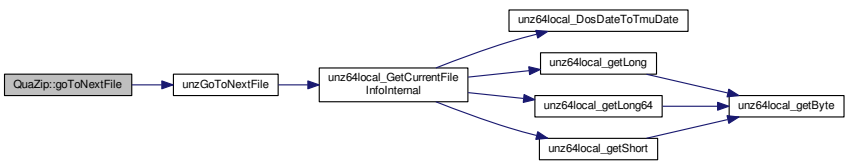

Here is the caller graph for this function:

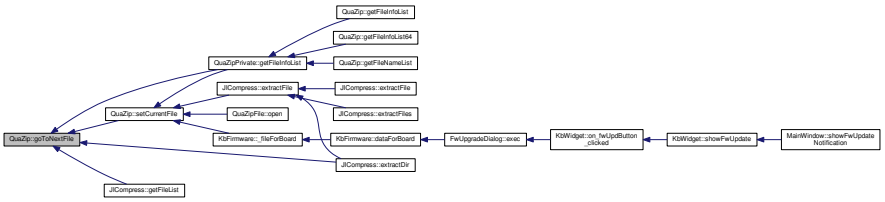

12.70.4.21 bool QuaZip::hasCurrentFile ( ) const

Definition at line 634 of file quazip.cpp.

References QuaZipPrivate::hasCurrentFile_f, and p.

Referenced by getCurrentFileInfo(), getCurrentFileName(), QuaZipPrivate::getFileInfoList(), and QuaZipFile::open().

```
635 {
636   return p->hasCurrentFile_f;
637 }
```

Here is the caller graph for this function:

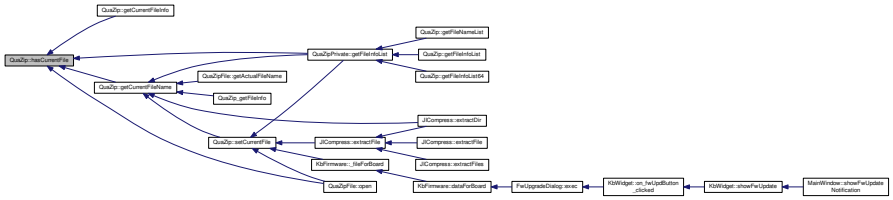

12.70.4.22 bool QuaZip::isAutoClose ( ) const

See Also

setAutoClose()

Definition at line 780 of file quazip.cpp.

References QuaZipPrivate::autoClose, and p.

```
781 {
782     return p->autoClose;
783 }
```

12.70.4.23 bool QuaZip::isDataDescriptorWritingEnabled ( ) const

See Also

setDataDescriptorWritingEnabled()

Definition at line 654 of file quazip.cpp.

References QuaZipPrivate::dataDescriptorWritingEnabled, and p.

Referenced by QuaZipFile::open().

```
655 {
656     return p->dataDescriptorWritingEnabled;
657 }
```

Here is the caller graph for this function:



12.70.4.24 bool QuaZip::isOpen ( ) const

Definition at line 619 of file quazip.cpp.

References mdNotOpen, QuaZipPrivate::mode, and p.

Referenced by QuaZipFile::close(), getCurrentFileInfo(), getCurrentFileName(), open(), setIoDevice(), setZipName(), and ~QuaZip().

```
620 {
621   return p->mode!=mdNotOpen;
622 }
```

Here is the caller graph for this function:

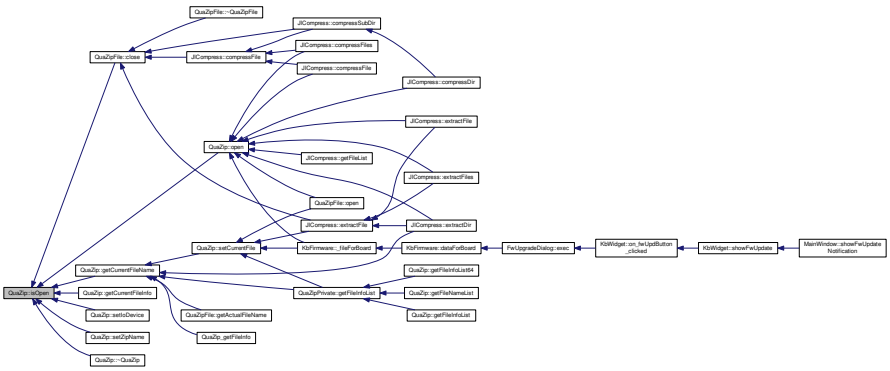

12.70.4.25 bool QuaZip::isZip64Enabled ( ) const

Returns

`true` if and only if the zip64 mode is enabled.

See Also

setZip64Enabled()

Definition at line 775 of file quazip.cpp.

References p, and QuaZipPrivate::zip64.

Referenced by QuaZipFile::open().

```
776 {
777     return p->zip64;
778 }
```

Here is the caller graph for this function:



12.70.4.26 bool QuaZip::open (Mode *mode*, zlib_filefunc_def * *ioApi* = NULL)

Argument *mode* specifies open mode of the ZIP archive. See Mode for details. Note that there is zipOpen2() function in the ZIP/UNZIP API which accepts *globalcomment* argument, but it does not use it anywhere, so this open() function does not have this argument. See setComment() if you need to set global comment.

If the ZIP file is accessed via explicitly set QIODevice, then this device is opened in the necessary mode. If the device was already opened by some other means, then QuaZIP checks if the open mode is compatible to the mode needed for the requested operation. If necessary, seeking is performed to position the device properly.

Returns

`true` if successful, `false` otherwise.

Note

ZIP/UNZIP API open calls do not return error code - they just return `NULL` indicating an error. But to make things easier, quazip.h header defines additional error code `UNZ_ERROROPEN` and getZipError() will return it if the open call of the ZIP/UNZIP API returns `NULL`.

Argument *ioApi* specifies IO function set for ZIP/UNZIP package to use. See unzip.h, zip.h and ioapi.h for details. Note that IO API for QuaZip is different from the original package. The file path argument was changed to be of type `voidpf`, and QuaZip passes a QIODevice pointer there. This QIODevice is either set explicitly via setIoDevice() or the QuaZip(QIODevice*) constructor, or it is created internally when opening the archive by its file name. The default API (qioapi.cpp) just delegates everything to the QIODevice API. Not only this allows to use a QIODevice instead of file name, but also has a nice side effect of raising the file size limit from 2G to 4G (in non-zip64 archives).

Note

If the zip64 support is needed, the ioApi argument *must* be NULL because due to the backwards compatibility issues it can be used to provide a 32-bit API only.
If the no-auto-close feature is used, then the *ioApi* argument *should* be NULL because the old API doesn't support the 'fake close' operation, causing slight memory leaks and other possible troubles (like closing the output device in case when an error occurs during opening).

In short: just forget about the *ioApi* argument and you'll be fine.

Definition at line 215 of file quazip.cpp.

References APPEND_STATUS_ADDINZIP, APPEND_STATUS_CREATE, APPEND_STATUS_CREATEAFTER, QuaZipPrivate::autoClose, QuaZipPrivate::dataDescriptorWritingEnabled, QuaZipPrivate::ioDevice, isOpen(), mdAdd, mdAppend, mdCreate, mdUnzip, QuaZipPrivate::mode, p, UNZ_AUTO_CLOSE, UNZ_OK, UNZ_OPENERROR, unzClearFlags(), unzClose(), unzOpen2(), unzOpenInternal(), unzSetFlags(), ZIP_AUTO_CLOSE, ZIP_SEQUENTIAL, ZIP_WRITE_DATA_DESCRIPTOR, zipClose(), QuaZipPrivate::zipError, QuaZipPrivate::zipName, zipOpen2(), zipOpen3(), and zipSetFlags().

Referenced by KbFirmware::_fileForBoard(), JlCompress::compressDir(), JlCompress::compressFile(), JlCompress::compressFiles(), JlCompress::extractDir(), JlCompress::extractFile(), JlCompress::extractFiles(), JlCompress::getFileList(), and QuaZipFile::open().

```
216 {
217   p->zipError=UNZ_OK;
218   if(isOpen()) {
219     qWarning("QuaZip::open(): ZIP already opened");
220     return false;
221   }
222   QIODevice *ioDevice = p->ioDevice;
223   if (ioDevice == NULL) {
224     if (p->zipName.isEmpty()) {
225       qWarning("QuaZip::open(): set either ZIP file name or IO device first");
226       return false;
227     } else {
228       ioDevice = new QFile(p->zipName);
229     }
230   }
231   unsigned flags = 0;
232   switch(mode) {
233     case mdUnzip:
234       if (ioApi == NULL) {
235           if (p->autoClose)
236               flags |= UNZ_AUTO_CLOSE;
237           p->unzFile_f=unzOpenInternal(ioDevice, NULL, 1, flags);
238       } else {
239           // QuaZIP pre-zip64 compatibility mode
240           p->unzFile_f=unzOpen2(ioDevice, ioApi);
241           if (p->unzFile_f != NULL) {
242               if (p->autoClose) {
243                   unzSetFlags(p->unzFile_f, UNZ_AUTO_CLOSE);
244               } else {
245                   unzClearFlags(p->unzFile_f, UNZ_AUTO_CLOSE);
246               }
247           }
248       }
249       if(p->unzFile_f!=NULL) {
250         if (ioDevice->isSequential()) {
251             unzClose(p->unzFile_f);
252             if (!p->zipName.isEmpty())
253                 delete ioDevice;
254             qWarning("QuaZip::open(): "
255                      "only mdCreate can be used with "
256                      "sequential devices");
257             return false;
258         }
259         p->mode=mode;
260         p->ioDevice = ioDevice;
261         return true;
262       } else {
263         p->zipError=UNZ_OPENERROR;
264         if (!p->zipName.isEmpty())
265           delete ioDevice;
266         return false;
267       }
268     case mdCreate:
269     case mdAppend:
270     case mdAdd:
271       if (ioApi == NULL) {
```

```
272             if (p->autoClose)
273                 flags |= ZIP_AUTO_CLOSE;
274             if (p->dataDescriptorWritingEnabled)
275                 flags |= ZIP_WRITE_DATA_DESCRIPTOR;
276             p->zipFile_f=zipOpen3(ioDevice,
277                 mode==mdCreate?APPEND_STATUS_CREATE:
278                 mode==mdAppend?APPEND_STATUS_CREATEAFTER:
279                 APPEND_STATUS_ADDINZIP,
280                 NULL, NULL, flags);
281         } else {
282             // QuaZIP pre-zip64 compatibility mode
283             p->zipFile_f=zipOpen2(ioDevice,
284                 mode==mdCreate?APPEND_STATUS_CREATE:
285                 mode==mdAppend?APPEND_STATUS_CREATEAFTER:
286                 APPEND_STATUS_ADDINZIP,
287                 NULL,
288                 ioApi);
289             if (p->zipFile_f != NULL) {
290                 zipSetFlags(p->zipFile_f, flags);
291             }
292         }
293         if(p->zipFile_f!=NULL) {
294           if (ioDevice->isSequential()) {
295               if (mode != mdCreate) {
296                   zipClose(p->zipFile_f, NULL);
297                   qWarning("QuaZip::open(): "
298                           "only mdCreate can be used with "
299                            "sequential devices");
300                   if (!p->zipName.isEmpty())
301                       delete ioDevice;
302                   return false;
303               }
304               zipSetFlags(p->zipFile_f, ZIP_SEQUENTIAL);
305           }
306           p->mode=mode;
307           p->ioDevice = ioDevice;
308           return true;
309         } else {
310           p->zipError=UNZ_OPENERROR;
311           if (!p->zipName.isEmpty())
312             delete ioDevice;
313           return false;
314         }
315       default:
316         qWarning("QuaZip::open(): unknown mode: %d", (int)mode);
317         if (!p->zipName.isEmpty())
318           delete ioDevice;
319         return false;
320         break;
321     }
322 }
```

Here is the call graph for this function:

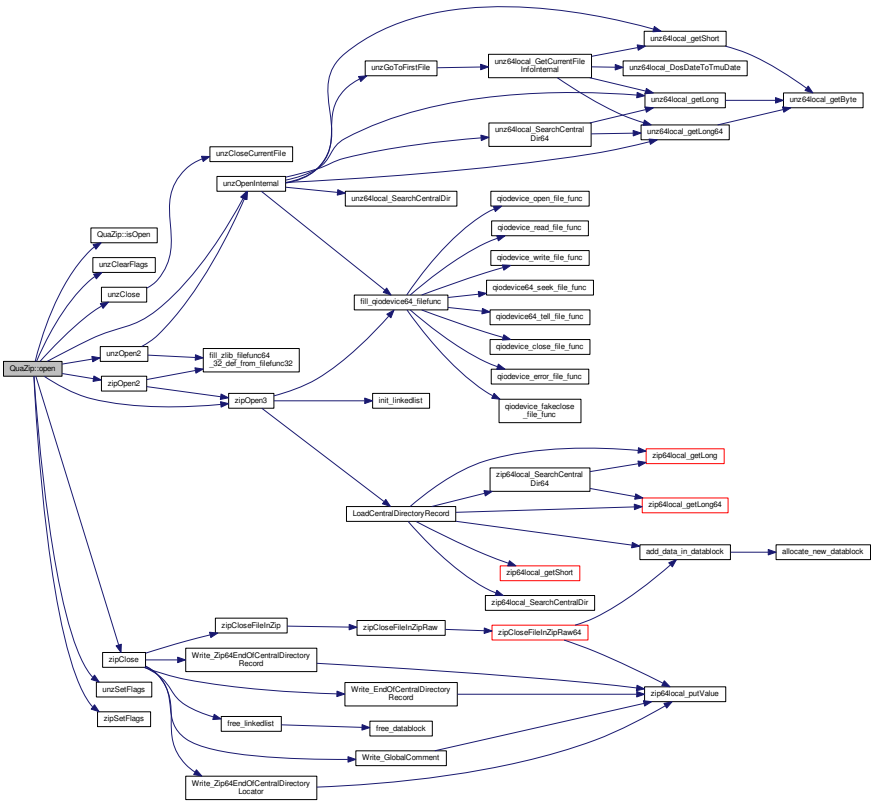

Here is the caller graph for this function:

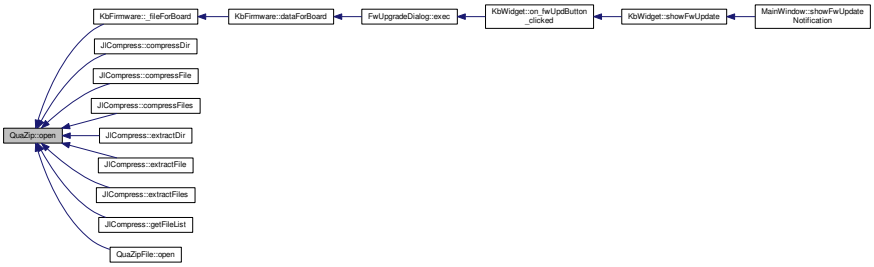

12.70.4.27 QuaZip& QuaZip::operator= (const QuaZip & *that*) [private]

12.70.4.28 void QuaZip::setAutoClose (bool *autoClose*) const

By default, QuaZIP opens the underlying QIODevice when open() is called, and closes it when close() is called. In some cases, when the device is set explicitly using setIoDevice(), it may be desirable to leave the device open. If the auto-close flag is unset using this method, then the device isn't closed automatically if it was set explicitly.

If it is needed to clear this flag, it is recommended to do so before opening the archive because otherwise QuaZIP may close the device during the open() call if an error is encountered after the device is opened.

If the device was not set explicitly, but rather the setZipName() or the appropriate constructor was used to set the

ZIP file name instead, then the auto-close flag has no effect, and the internal device is closed nevertheless because there is no other way to close it.

See Also

isAutoClose()
setIoDevice()

Definition at line 785 of file quazip.cpp.

References QuaZipPrivate::autoClose, and p.

```
786 {
787     p->autoClose = autoClose;
788 }
```

12.70.4.29 void QuaZip::setComment (const QString & *comment*)

The comment will be written to the archive on close operation. QuaZip makes a distinction between a null QByteArray() comment and an empty "" comment in the QuaZip::mdAdd mode. A null comment is the default and it means "don't change the comment". An empty comment removes the original comment.

See Also

open()

Definition at line 629 of file quazip.cpp.

References QuaZipPrivate::comment, and p.

```
630 {
631   p->comment=comment;
632 }
```

12.70.4.30 void QuaZip::setCommentCodec (QTextCodec * *commentCodec*)

This codec defaults to locale codec, which is probably ok.

Definition at line 587 of file quazip.cpp.

References QuaZipPrivate::commentCodec, and p.

```
588 {
589   p->commentCodec=commentCodec;
590 }
```

12.70.4.31 void QuaZip::setCommentCodec (const char * *commentCodecName*)

This is an overloaded member function, provided for convenience. It differs from the above function only in what argument(s) it accepts. Equivalent to calling setCommentCodec(QTextCodec::codecForName(codecName));

Definition at line 592 of file quazip.cpp.

References QuaZipPrivate::commentCodec, and p.

```
593 {
594   p->commentCodec=QTextCodec::codecForName(commentCodecName);
595 }
```

12.70.4.32 bool QuaZip::setCurrentFile (const QString & *fileName*, CaseSensitivity *cs* = csDefault)

Returns `true` if successful, `false` otherwise. Argument *cs* specifies case sensitivity of the file name. Call getZipError() in the case of a failure to get error code.

This is not a wrapper to unzLocateFile() function. That is because I had to implement locale-specific case-insensitive comparison.

Here are the differences from the original implementation:

- If the file was not found, error code is `UNZ_OK`, not `UNZ_END_OF_LIST_OF_FILE` (see also goToNextFile()).
- If this function fails, it unsets the current file rather than resetting it back to what it was before the call.

If *fileName* is null string then this function unsets the current file and return `true`. Note that you should close the file first if it is open! See QuaZipFile::QuaZipFile(QuaZip*,QObject*) for the details.

Should be used only in QuaZip::mdUnzip mode.

See Also

setFileNameCodec(), CaseSensitivity

Definition at line 408 of file quazip.cpp.

References convertCaseSensitivity(), QuaZipPrivate::directoryCaseInsensitive, QuaZipPrivate::directoryCaseSensitive, getCurrentFileName(), QuaZipPrivate::goToFirstUnmappedFile(), goToNextFile(), QuaZipPrivate::hasCurrentFile_f, MAX_FILE_NAME_LENGTH, mdUnzip, QuaZipPrivate::mode, p, unz64_file_pos_s::pos_in_zip_directory, UNZ_OK, UNZ_PARAMERROR, unzGoToFilePos64(), and QuaZipPrivate::zipError.

Referenced by KbFirmware::_fileForBoard(), JlCompress::extractFile(), QuaZipPrivate::getFileInfoList(), and QuaZipFile::open().

```
409 {
410   p->zipError=UNZ_OK;
411   if(p->mode!=mdUnzip) {
412     qWarning("QuaZip::setCurrentFile(): ZIP is not open in mdUnzip mode");
413     return false;
414   }
415   if(fileName.isEmpty()) {
416     p->hasCurrentFile_f=false;
417     return true;
418   }
419   // Unicode-aware reimplementation of the unzLocateFile function
420   if(p->unzFile_f==NULL) {
421     p->zipError=UNZ_PARAMERROR;
422     return false;
423   }
424   if(fileName.length()>MAX_FILE_NAME_LENGTH) {
425     p->zipError=UNZ_PARAMERROR;
426     return false;
427   }
428   // Find the file by name
429   bool sens = convertCaseSensitivity(cs) == Qt::CaseSensitive;
430   QString lower, current;
431   if(!sens) lower=fileName.toLower();
432   p->hasCurrentFile_f=false;
433
434   // Check the appropriate Map
435   unz64_file_pos fileDirPos;
436   fileDirPos.pos_in_zip_directory = 0;
437   if (sens) {
438       if (p->directoryCaseSensitive.contains(fileName))
439           fileDirPos = p->directoryCaseSensitive.value(fileName);
440   } else {
441       if (p->directoryCaseInsensitive.contains(lower))
442           fileDirPos = p->directoryCaseInsensitive.value(lower);
443   }
444
445   if (fileDirPos.pos_in_zip_directory != 0) {
446       p->zipError = unzGoToFilePos64(p->unzFile_f, &fileDirPos);
447       p->hasCurrentFile_f = p->zipError == UNZ_OK;
448   }
```

```
449
450   if (p->hasCurrentFile_f)
451       return p->hasCurrentFile_f;
452
453   // Not mapped yet, start from where we have got to so far
454   for(bool more=p->goToFirstUnmappedFile(); more; more=
      goToNextFile()) {
455     current=getCurrentFileName();
456     if(current.isEmpty()) return false;
457     if(sens) {
458       if(current==fileName) break;
459     } else {
460       if(current.toLower()==lower) break;
461     }
462   }
463   return p->hasCurrentFile_f;
464 }
```

Here is the call graph for this function:

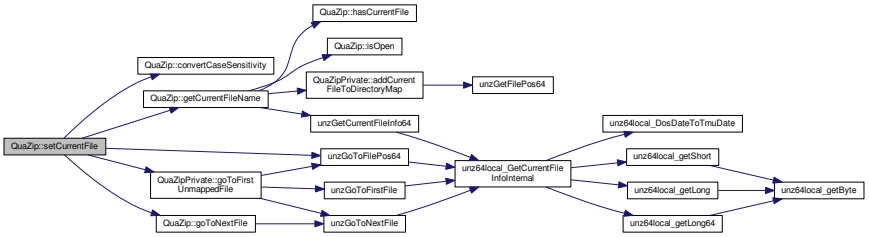

Here is the caller graph for this function:

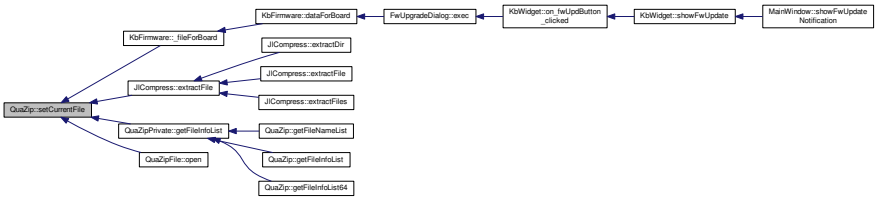

12.70.4.33 void QuaZip::setDataDescriptorWritingEnabled (bool *enabled*)

According to the ZIP format specification, a file inside archive may have a data descriptor immediately following the file data. This is reflected by a special flag in the local file header and in the central directory. By default, QuaZIP sets this flag and writes the data descriptor unless both method and level were set to 0, in which case it operates in 1.0-compatible mode and never writes data descriptors.

By setting this flag to false, it is possible to disable data descriptor writing, thus increasing compatibility with archive readers that don't understand this feature of the ZIP file format.

Setting this flag affects all the QuaZipFile instances that are opened after this flag is set.

The data descriptor writing mode is enabled by default.

Note that if the ZIP archive is written into a QIODevice for which QIODevice::isSequential() returns `true`, then the data descriptor is mandatory and will be written even if this flag is set to false.

Parameters

enabled	If `true`, enable local descriptor writing, disable it otherwise.

See Also

QuaZipFile::isDataDescriptorWritingEnabled()

Definition at line 649 of file quazip.cpp.

References QuaZipPrivate::dataDescriptorWritingEnabled, and p.

```
650 {
651     p->dataDescriptorWritingEnabled = enabled;
652 }
```

12.70.4.34 void QuaZip::setDefaultFileNameCodec (QTextCodec * *codec*) [static]

The default codec is used by the constructors, so calling this function won't affect the QuaZip instances already created at that moment.

The codec specified here can be overriden by calling setFileNameCodec(). If neither function is called, QTextCodec-::codecForLocale() will be used to decode or encode file names. Use this function with caution if the application uses other libraries that depend on QuaZIP. Those libraries can either call this function by themselves, thus overriding your setting or can rely on the default encoding, thus failing mysteriously if you change it. For these reasons, it isn't recommended to use this function if you are developing a library, not an application. Instead, ask your library users to call it in case they need specific encoding.

In most cases, using setFileNameCodec() instead is the right choice. However, if you depend on third-party code that uses QuaZIP, then the reasons stated above can actually become a reason to use this function in case the third-party code in question fails because it doesn't understand the encoding you need and doesn't provide a way to specify it. This applies to the JlCompress class as well, as it was contributed and doesn't support explicit encoding parameters.

In short: use setFileNameCodec() when you can, resort to setDefaultFileNameCodec() when you don't have access to the QuaZip instance.

Parameters

codec	The codec to use by default. If NULL, resets to default.

Definition at line 760 of file quazip.cpp.

References QuaZipPrivate::defaultFileNameCodec.

Referenced by setDefaultFileNameCodec().

```
761 {
762     QuaZipPrivate::defaultFileNameCodec = codec;
763 }
```

Here is the caller graph for this function:

12.70.4.35 void QuaZip::setDefaultFileNameCodec (const char * *codecName*) [static]

Definition at line 765 of file quazip.cpp.

References setDefaultFileNameCodec().

```
766 {
767     setDefaultFileNameCodec(QTextCodec::codecForName(codecName));
768 }
```

Here is the call graph for this function:

12.70.4.36 void QuaZip::setFileNameCodec (QTextCodec * *fileNameCodec*)

This is necessary to access files in the ZIP archive created under Windows with non-latin characters in file names. For example, file names with cyrillic letters will be in `IBM866` encoding.

Definition at line 572 of file quazip.cpp.

References QuaZipPrivate::fileNameCodec, and p.

```
573 {
574   p->fileNameCodec=fileNameCodec;
575 }
```

12.70.4.37 void QuaZip::setFileNameCodec (const char * *fileNameCodecName*)

This is an overloaded member function, provided for convenience. It differs from the above function only in what argument(s) it accepts. Equivalent to calling setFileNameCodec(QTextCodec::codecForName(codecName));

Definition at line 577 of file quazip.cpp.

References QuaZipPrivate::fileNameCodec, and p.

```
578 {
579   p->fileNameCodec=QTextCodec::codecForName(fileNameCodecName);
580 }
```

12.70.4.38 void QuaZip::setIoDevice (QIODevice * *ioDevice*)

Does nothing if the ZIP file is open.

Does not reset error code returned by getZipError().

See Also

getIoDevice(), getZipName(), setZipName()

Definition at line 365 of file quazip.cpp.

References QuaZipPrivate::ioDevice, isOpen(), p, and QuaZipPrivate::zipName.

```
366 {
367   if(isOpen()) {
368     qWarning("QuaZip::setIoDevice(): ZIP is already open!");
369     return;
370   }
371   p->ioDevice = ioDevice;
372   p->zipName = QString();
373 }
```

Here is the call graph for this function:



12.70.4.39 void QuaZip::setZip64Enabled (bool *zip64*)

Parameters

zip64	If `true`, the zip64 mode is enabled, disabled otherwise.

Once this is enabled, all new files (until the mode is disabled again) will be created in the zip64 mode, thus enabling the ability to write files larger than 4 GB. By default, the zip64 mode is off due to compatibility reasons.

Note that this does not affect the ability to read zip64 archives in any way.

See Also

isZip64Enabled()

Definition at line 770 of file quazip.cpp.

References p, and QuaZipPrivate::zip64.

```
771 {
772     p->zip64 = zip64;
773 }
```

12.70.4.40 void QuaZip::setZipName (const QString & *zipName*)

Does nothing if the ZIP file is open.

Does not reset error code returned by getZipError().

See Also

setIoDevice(), getIoDevice(), getZipName()

Definition at line 355 of file quazip.cpp.

References QuaZipPrivate::ioDevice, isOpen(), p, and QuaZipPrivate::zipName.

```
356 {
357   if(isOpen()) {
358     qWarning("QuaZip::setZipName(): ZIP is already open!");
359     return;
360   }
361   p->zipName=zipName;
362   p->ioDevice = NULL;
363 }
```

Here is the call graph for this function:



12.70.5 Friends And Related Function Documentation

12.70.5.1 friend class QuaZipPrivate [friend]

Definition at line 85 of file quazip.h.

12.70.6 Field Documentation

12.70.6.1 QuaZipPrivate* QuaZip::p [private]

Definition at line 129 of file quazip.h.

Referenced by close(), getComment(), getCommentCodec(), getCurrentFileInfo(), getCurrentFileName(), getEntriesCount(), getFileInfoList(), getFileInfoList64(), getFileNameCodec(), getFileNameList(), getIoDevice(), getMode(), getUnzFile(), getZipError(), getZipFile(), getZipName(), goToFirstFile(), goToNextFile(), hasCurrentFile(), isAutoClose(), isDataDescriptorWritingEnabled(), isOpen(), isZip64Enabled(), open(), setAutoClose(), setComment(), setCommentCodec(), setCurrentFile(), setDataDescriptorWritingEnabled(), setFileNameCodec(), setIoDevice(), setZip64Enabled(), setZipName(), and ~QuaZip().

The documentation for this class was generated from the following files:

- src/ckb/quazip/quazip.h
- src/ckb/quazip/quazip.cpp

12.71 QuaZipDir Class Reference

Provides ZIP archive navigation.

`#include <src/ckb/quazip/quazipdir.h>`

Collaboration diagram for QuaZipDir:

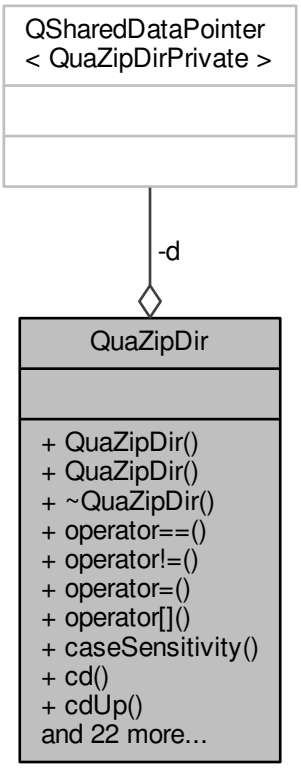

Public Member Functions

- QuaZipDir (const QuaZipDir &that)

  The copy constructor.
- QuaZipDir (QuaZip ∗zip, const QString &dir=QString())

  Constructs a QuaZipDir instance pointing to the specified directory.
- ∼QuaZipDir ()

  Destructor.
- bool operator== (const QuaZipDir &that)

  The assignment operator.
- bool operator!= (const QuaZipDir &that)

  operator!=
- QuaZipDir & operator= (const QuaZipDir &that)

  operator==
- QString operator[] (int pos) const

  Returns the name of the entry at the specified position.
- QuaZip::CaseSensitivity caseSensitivity () const

  Returns the current case sensitivity mode.
- bool cd (const QString &dirName)

  Changes the 'current' directory.

- bool cdUp ()

  Goes up.
- uint count () const

  Returns the number of entries in the directory.
- QString dirName () const

  Returns the current directory name.
- QList< QuaZipFileInfo > entryInfoList (const QStringList &nameFilters, QDir::Filters filters=QDir::NoFilter, QDir::SortFlags sort=QDir::NoSort) const

  Returns the list of the entries in the directory.
- QList< QuaZipFileInfo > entryInfoList (QDir::Filters filters=QDir::NoFilter, QDir::SortFlags sort=QDir::NoSort) const

  Returns the list of the entries in the directory.
- QList< QuaZipFileInfo64 > entryInfoList64 (const QStringList &nameFilters, QDir::Filters filters=QDir::NoFilter, QDir::SortFlags sort=QDir::NoSort) const

  Returns the list of the entries in the directory with zip64 support.
- QList< QuaZipFileInfo64 > entryInfoList64 (QDir::Filters filters=QDir::NoFilter, QDir::SortFlags sort=QDir::NoSort) const

  Returns the list of the entries in the directory with zip64 support.
- QStringList entryList (const QStringList &nameFilters, QDir::Filters filters=QDir::NoFilter, QDir::SortFlags sort=QDir::NoSort) const

  Returns the list of the entry names in the directory.
- QStringList entryList (QDir::Filters filters=QDir::NoFilter, QDir::SortFlags sort=QDir::NoSort) const

  Returns the list of the entry names in the directory.
- bool exists (const QString &fileName) const

  Returns `true` if the entry with the specified name exists.
- bool exists () const

  Return `true` if the directory pointed by this QuaZipDir exists.
- QString filePath (const QString &fileName) const

  Returns the full path to the specified file.
- QDir::Filters filter ()

  Returns the default filter.
- bool isRoot () const

  Returns if the QuaZipDir points to the root of the archive.
- QStringList nameFilters () const

  Return the default name filter.
- QString path () const

  Returns the path to the current dir.
- QString relativeFilePath (const QString &fileName) const

  Returns the path to the specified file relative to the current dir.
- void setCaseSensitivity (QuaZip::CaseSensitivity caseSensitivity)

  Sets the default case sensitivity mode.
- void setFilter (QDir::Filters filters)

  Sets the default filter.
- void setNameFilters (const QStringList &nameFilters)

  Sets the default name filter.
- void setPath (const QString &path)

  Goes to the specified path.
- void setSorting (QDir::SortFlags sort)

  Sets the default sorting mode.
- QDir::SortFlags sorting () const

  Returns the default sorting mode.

Private Attributes

- QSharedDataPointer
  < QuaZipDirPrivate > d

12.71.1 Detailed Description

This class is modelled after QDir, and is designed to provide similar features for ZIP archives.

The only significant difference from QDir is that the root path is not '/', but an empty string since that's how the file paths are stored in the archive. However, QuaZipDir understands the paths starting with '/'. It is important in a few places:

- In the cd() function.
- In the constructor.
- In the exists() function.
- In the relativePath() function.

Note that since ZIP uses '/' on all platforms, the '\' separator is not supported.

Definition at line 54 of file quazipdir.h.

12.71.2 Constructor & Destructor Documentation

12.71.2.1 QuaZipDir::QuaZipDir (const QuaZipDir & *that*)

Definition at line 50 of file quazipdir.cpp.

Referenced by exists().

```
50                                          :
51     d(that.d)
52 {
53 }
```

Here is the caller graph for this function:

12.71.2.2 QuaZipDir::QuaZipDir (QuaZip * *zip*, const QString & *dir* = QString())

If *dir* is not specified, points to the root of the archive. The same happens if the *dir* is "/".

Definition at line 55 of file quazipdir.cpp.

References d.

```
55                                                  :
56     d(new QuaZipDirPrivate(zip, dir))
57 {
58     if (d->dir.startsWith('/'))
59         d->dir = d->dir.mid(1);
60 }
```

12.71.2.3 QuaZipDir::~QuaZipDir ( )

Definition at line 62 of file quazipdir.cpp.

```
63 {
64 }
```

12.71.3 Member Function Documentation

12.71.3.1 QuaZip::CaseSensitivity QuaZipDir::caseSensitivity ( ) const

Definition at line 82 of file quazipdir.cpp.

References d.

Referenced by setCaseSensitivity().

```
83 {
84     return d->caseSensitivity;
85 }
```

Here is the caller graph for this function:



12.71.3.2 bool QuaZipDir::cd (const QString & *dirName*)

If the path starts with '/', it is interpreted as an absolute path from the root of the archive. Otherwise, it is interpreted as a path relative to the current directory as was set by the previous cd() or the constructor.

Note that the subsequent path() call will not return a path starting with '/' in all cases.

Definition at line 87 of file quazipdir.cpp.

References cd(), d, dirName(), exists(), isRoot(), and path().

Referenced by cd(), and cdUp().

```
88 {
89     if (directoryName == "/") {
90         d->dir = "";
91         return true;
92     }
93     QString dirName = directoryName;
94     if (dirName.endsWith('/'))
95         dirName.chop(1);
96     if (dirName.contains('/')) {
97         QuaZipDir dir(*this);
98         if (dirName.startsWith('/')) {
99 #ifdef QUAZIP_QUAZIPDIR_DEBUG
100             qDebug("QuaZipDir::cd(%s): going to /",
101                    dirName.toUtf8().constData());
102 #endif
103             if (!dir.cd("/"))
104                 return false;
105         }
106         QStringList path = dirName.split('/', QString::SkipEmptyParts);
107         for (QStringList::const_iterator i = path.constBegin();
108                 i != path.end();
```

```
109                 ++i) {
110             const QString &step = *i;
111 #ifdef QUAZIP_QUAZIPDIR_DEBUG
112             qDebug("QuaZipDir::cd(%s): going to %s",
113                    dirName.toUtf8().constData(),
114                    step.toUtf8().constData());
115 #endif
116             if (!dir.cd(step))
117                 return false;
118         }
119         d->dir = dir.path();
120         return true;
121     } else { // no '/'
122         if (dirName == ".") {
123             return true;
124         } else if (dirName == "..") {
125             if (isRoot()) {
126                 return false;
127             } else {
128                 int slashPos = d->dir.lastIndexOf('/');
129                 if (slashPos == -1) {
130                     d->dir = "";
131                 } else {
132                     d->dir = d->dir.left(slashPos);
133                 }
134                 return true;
135             }
136         } else { // a simple subdirectory
137             if (exists(dirName)) {
138                 if (isRoot())
139                     d->dir = dirName;
140                 else
141                     d->dir += "/" + dirName;
142                 return true;
143             } else {
144                 return false;
145             }
146         }
147     }
148 }
```

Here is the call graph for this function:

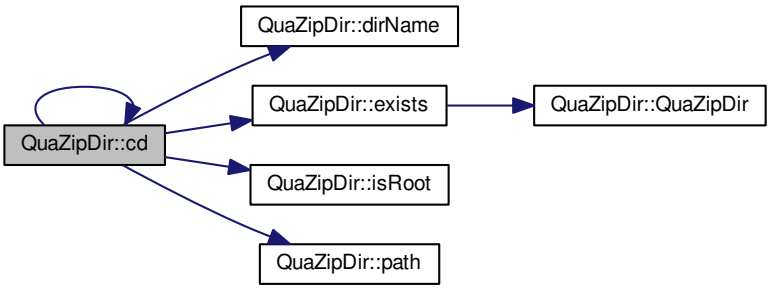

Here is the caller graph for this function:



12.71.3.3 bool QuaZipDir::cdUp ( )

Definition at line 150 of file quazipdir.cpp.

References cd().

```
151 {
152     return cd("..");
153 }
```

Here is the call graph for this function:

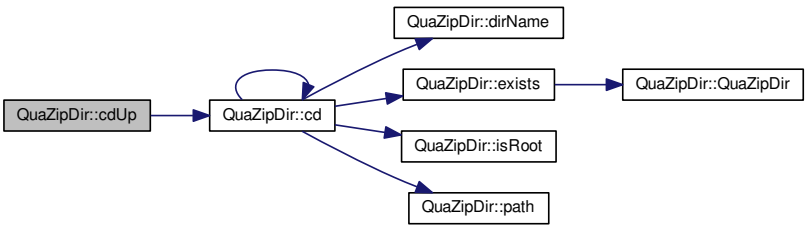

12.71.3.4 uint QuaZipDir::count ( ) const

Definition at line 155 of file quazipdir.cpp.

References entryList().

```
156 {
157     return entryList().count();
158 }
```

Here is the call graph for this function:



12.71.3.5 QString QuaZipDir::dirName ( ) const

The name doesn't include the path.

Definition at line 160 of file quazipdir.cpp.

References d.

Referenced by cd().

```
161 {
162     return QDir(d->dir).dirName();
163 }
```

Here is the caller graph for this function:



12.71.3.6 QList< QuaZipFileInfo > QuaZipDir::entryInfoList (const QStringList & *nameFilters*, QDir::Filters *filters* = QDir::NoFilter, QDir::SortFlags *sort* = QDir::NoSort) const

Parameters

nameFilters	The list of file patterns to list, uses the same syntax as QDir.
filters	The entry type filters, only Files and Dirs are accepted.
sort	Sorting mode.

Definition at line 401 of file quazipdir.cpp.

References d.

Referenced by entryInfoList().

```
403 {
404     QList<QuaZipFileInfo> result;
405     if (d->entryInfoList(nameFilters, filters, sort, result))
406         return result;
407     else
408         return QList<QuaZipFileInfo>();
409 }
```

Here is the caller graph for this function:

12.71.3.7 QList< QuaZipFileInfo > QuaZipDir::entryInfoList (QDir::Filters *filters* = QDir::NoFilter, QDir::SortFlags *sort* = QDir::NoSort) const

This is an overloaded member function, provided for convenience. It differs from the above function only in what argument(s) it accepts.

The same as entryInfoList(QStringList(), filters, sort).

Definition at line 411 of file quazipdir.cpp.

References entryInfoList().

```
413 {
414     return entryInfoList(QStringList(), filters, sort);
415 }
```

Here is the call graph for this function:

12.71.3.8 QList< QuaZipFileInfo64 > QuaZipDir::entryInfoList64 (const QStringList & *nameFilters*, QDir::Filters *filters* = QDir::NoFilter, QDir::SortFlags *sort* = QDir::NoSort) const

Parameters

nameFilters	The list of file patterns to list, uses the same syntax as QDir.
filters	The entry type filters, only Files and Dirs are accepted.
sort	Sorting mode.

Definition at line 417 of file quazipdir.cpp.

References d.

Referenced by entryInfoList64().

```
419 {
420     QList<QuaZipFileInfo64> result;
421     if (d->entryInfoList(nameFilters, filters, sort, result))
422         return result;
423     else
424         return QList<QuaZipFileInfo64>();
425 }
```

Here is the caller graph for this function:

12.71.3.9 QList< QuaZipFileInfo64 > QuaZipDir::entryInfoList64 (QDir::Filters *filters* = QDir::NoFilter, QDir::SortFlags *sort* = QDir::NoSort) const

This is an overloaded member function, provided for convenience. It differs from the above function only in what argument(s) it accepts.

The same as entryInfoList64(QStringList(), filters, sort).

Definition at line 427 of file quazipdir.cpp.

References entryInfoList64().

```
429 {
430     return entryInfoList64(QStringList(), filters, sort);
431 }
```

Here is the call graph for this function:

12.71.3.10 QStringList QuaZipDir::entryList (const QStringList & *nameFilters*, QDir::Filters *filters* = QDir::NoFilter, QDir::SortFlags *sort* = QDir::NoSort) const

The same as entryInfoList(nameFilters, filters, sort), but only returns entry names.

Definition at line 433 of file quazipdir.cpp.

References d.

Referenced by count(), entryList(), exists(), and operator[]().

```
435 {
436     QStringList result;
437     if (d->entryInfoList(nameFilters, filters, sort, result))
438         return result;
439     else
440         return QStringList();
441 }
```

Here is the caller graph for this function:

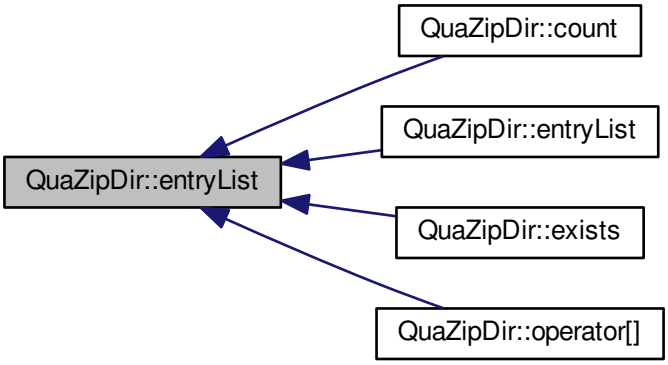

12.71.3.11 QStringList QuaZipDir::entryList (QDir::Filters *filters* = `QDir::NoFilter`, QDir::SortFlags *sort* = `QDir::NoSort`) const

This is an overloaded member function, provided for convenience. It differs from the above function only in what argument(s) it accepts.

The same as entryList(QStringList(), filters, sort).

Definition at line 443 of file quazipdir.cpp.

References entryList().

```
445 {
446     return entryList(QStringList(), filters, sort);
447 }
```

Here is the call graph for this function:

12.71.3.12 bool QuaZipDir::exists (const QString & *fileName*) const

The ".." is considered to exist if the current directory is not root. The "." and "/" are considered to always exist. Paths starting with "/" are relative to the archive root, other paths are relative to the current dir.

Definition at line 449 of file quazipdir.cpp.

References QuaZip::convertCaseSensitivity(), d, entryList(), filePath(), and isRoot().

```
450 {
451     if (filePath == "/" || filePath.isEmpty())
452         return true;
453     QString fileName = filePath;
454     if (fileName.endsWith('/'))
455         fileName.chop(1);
456     if (fileName.contains('/')) {
457         QFileInfo fileInfo(fileName);
458 #ifdef QUAZIP_QUAZIPDIR_DEBUG
459         qDebug("QuaZipDir::exists(): fileName=%s, fileInfo.fileName()=%s, "
460                 "fileInfo.path()=%s", fileName.toUtf8().constData(),
461                 fileInfo.fileName().toUtf8().constData(),
462                 fileInfo.path().toUtf8().constData());
463 #endif
464         QuaZipDir dir(*this);
465         return dir.cd(fileInfo.path()) && dir.exists(fileInfo.fileName());
466     } else {
467         if (fileName == "..") {
468             return !isRoot();
469         } else if (fileName == ".") {
470             return true;
471         } else {
472             QStringList entries = entryList(QDir::AllEntries, QDir::NoSort);
473 #ifdef QUAZIP_QUAZIPDIR_DEBUG
474             qDebug("QuaZipDir::exists(): looking for %s",
475                     fileName.toUtf8().constData());
476             for (QStringList::const_iterator i = entries.constBegin();
477                     i != entries.constEnd();
478                     ++i) {
479                 qDebug("QuaZipDir::exists(): entry: %s",
480                         i->toUtf8().constData());
481             }
482 #endif
483             Qt::CaseSensitivity cs = QuaZip::convertCaseSensitivity(
484                     d->caseSensitivity);
485             if (filePath.endsWith('/')) {
486                 return entries.contains(filePath, cs);
487             } else {
488                 return entries.contains(fileName, cs)
489                     || entries.contains(fileName + "/", cs);
490             }
491         }
492     }
493 }
```

Here is the call graph for this function:

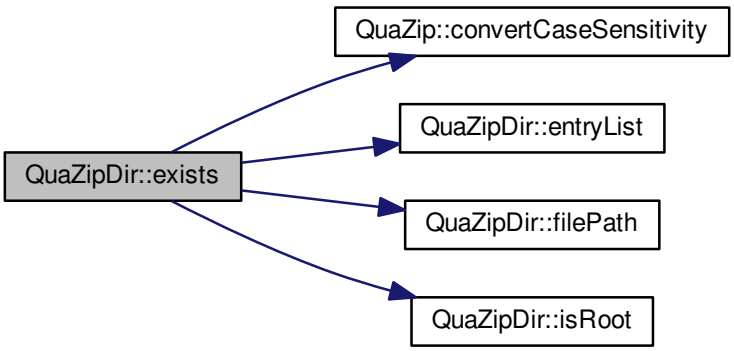

12.71.3.13 bool QuaZipDir::exists ( ) const

Definition at line 495 of file quazipdir.cpp.

References d, and QuaZipDir().

Referenced by cd().

```
496 {
497     return QuaZipDir(d->zip).exists(d->dir);
498 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

12.71.3.14 QString QuaZipDir::filePath (const QString & *fileName*) const

Doesn't check if the file actually exists.

Definition at line 500 of file quazipdir.cpp.

References d.

Referenced by exists().

```
501 {
502     return QDir(d->dir).filePath(fileName);
503 }
```

Here is the caller graph for this function:

12.71.3.15 QDir::Filters QuaZipDir::filter ( )

Definition at line 505 of file quazipdir.cpp.

References d.

```
506 {
507     return d->filter;
508 }
```

12.71.3.16 bool QuaZipDir::isRoot ( ) const

Not that the root path is the empty string, not '/'.

Definition at line 510 of file quazipdir.cpp.

References d.

Referenced by cd(), and exists().

```
511 {
512     return d->simplePath().isEmpty();
513 }
```

Here is the caller graph for this function:

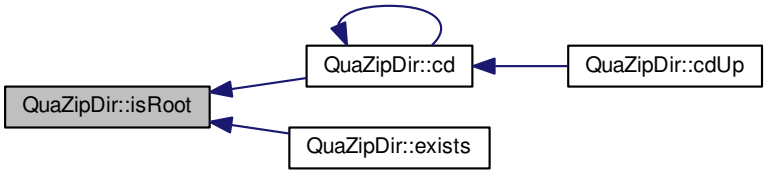

12.71.3.17 QStringList QuaZipDir::nameFilters ( ) const

Definition at line 515 of file quazipdir.cpp.

References d.

Referenced by setNameFilters().

```
516 {
517     return d->nameFilters;
518 }
```

Here is the caller graph for this function:



12.71.3.18 bool QuaZipDir::operator!= (const QuaZipDir & *that*) [inline]

Returns

`true` if either this and *that* use different QuaZip instances or if they point to different directories.

Definition at line 75 of file quazipdir.h.

```
75 {return !operator==(that);}
```

12.71.3.19 QuaZipDir & QuaZipDir::operator= (const QuaZipDir & *that*)

Returns

`true` if both this and *that* use the same QuaZip instance and point to the same directory.

Definition at line 71 of file quazipdir.cpp.

References d.

```
72 {
73     this->d = that.d;
74     return *this;
75 }
```

12.71.3.20 bool QuaZipDir::operator== (const QuaZipDir & *that*)

Definition at line 66 of file quazipdir.cpp.

References d.

```
67 {
68     return d->zip == that.d->zip && d->dir == that.d->dir;
69 }
```

12.71.3.21 QString QuaZipDir::operator[] (int *pos*) const

Definition at line 77 of file quazipdir.cpp.

References entryList().

```
78 {
79     return entryList().at(pos);
80 }
```

Here is the call graph for this function:

12.71.3.22 QString QuaZipDir::path ( ) const

The path never starts with '/', and the root path is an empty string.

Definition at line 520 of file quazipdir.cpp.

References d.

Referenced by cd(), and setPath().

```
521 {
522     return d->dir;
523 }
```

Here is the caller graph for this function:

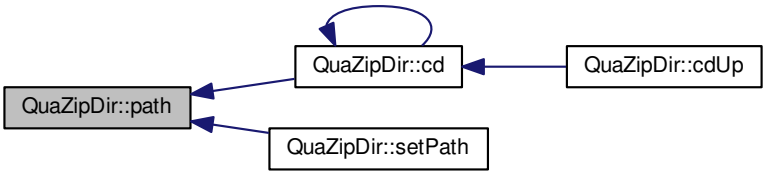

12.71.3.23 QString QuaZipDir::relativeFilePath (const QString & *fileName*) const

This function is mostly useless, provided only for the sake of completeness.

Parameters

fileName	The path to the file, should start with "/" if relative to the archive root.

Returns

Path relative to the current dir.

Definition at line 525 of file quazipdir.cpp.

References d.

```
526 {
527     return QDir("/" + d->dir).relativeFilePath(fileName);
528 }
```

12.71.3.24 void QuaZipDir::setCaseSensitivity (QuaZip::CaseSensitivity *caseSensitivity*)

Definition at line 530 of file quazipdir.cpp.

References caseSensitivity(), and d.

```
531 {
532     d->caseSensitivity = caseSensitivity;
533 }
```

Here is the call graph for this function:

12.71.3.25 void QuaZipDir::setFilter (QDir::Filters *filters*)

Definition at line 535 of file quazipdir.cpp.

References d.

```
536 {
537     d->filter = filters;
538 }
```

12.71.3.26 void QuaZipDir::setNameFilters (const QStringList & *nameFilters*)

Definition at line 540 of file quazipdir.cpp.

References d, and nameFilters().

```
541 {
542     d->nameFilters = nameFilters;
543 }
```

Here is the call graph for this function:



12.71.3.27 void QuaZipDir::setPath (const QString & *path*)

The difference from cd() is that this function never checks if the path actually exists and doesn't use relative paths, so it's possible to go to the root directory with setPath("").

Note that this function still chops the trailing and/or leading '/' and treats a single '/' as the root path (path() will still return an empty string).

Definition at line 545 of file quazipdir.cpp.

References d, and path().

```
546 {
547     QString newDir = path;
```

```
548     if (newDir == "/") {
549         d->dir = "";
550     } else {
551         if (newDir.endsWith('/'))
552             newDir.chop(1);
553         if (newDir.startsWith('/'))
554             newDir = newDir.mid(1);
555         d->dir = newDir;
556     }
557 }
```

Here is the call graph for this function:



12.71.3.28 void QuaZipDir::setSorting (QDir::SortFlags *sort*)

Definition at line 559 of file quazipdir.cpp.

References d.

```
560 {
561     d->sorting = sort;
562 }
```

12.71.3.29 QDir::SortFlags QuaZipDir::sorting ( ) const

Definition at line 564 of file quazipdir.cpp.

References d.

```
565 {
566     return d->sorting;
567 }
```

12.71.4 Field Documentation

12.71.4.1 QSharedDataPointer<QuaZipDirPrivate> QuaZipDir::d [private]

Definition at line 56 of file quazipdir.h.

Referenced by caseSensitivity(), cd(), dirName(), entryInfoList(), entryInfoList64(), entryList(), exists(), filePath(), filter(), isRoot(), nameFilters(), operator=(), operator==(), path(), QuaZipDir(), relativeFilePath(), setCaseSensitivity(), setFilter(), setNameFilters(), setPath(), setSorting(), and sorting().

The documentation for this class was generated from the following files:

- src/ckb/quazip/quazipdir.h
- src/ckb/quazip/quazipdir.cpp

12.72 QuaZipFile Class Reference

A file inside ZIP archive.

`#include <quazip/quazipfile.h>`

Inheritance diagram for QuaZipFile:

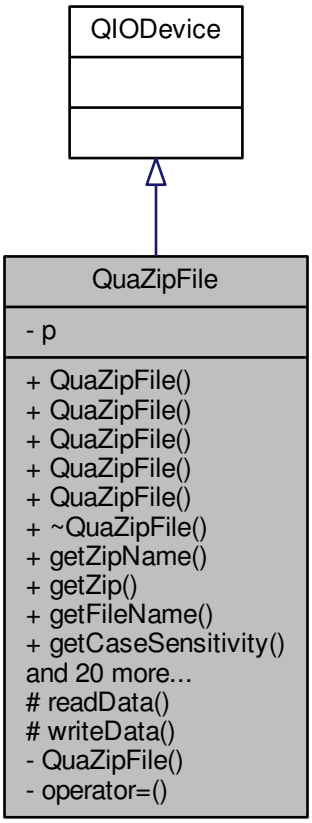

Collaboration diagram for QuaZipFile:

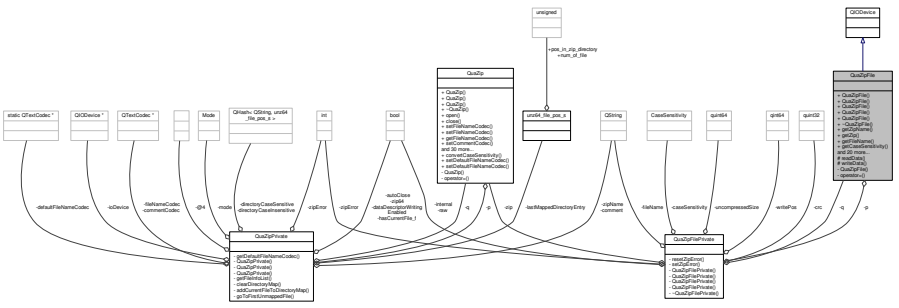

Public Member Functions

- QuaZipFile ()

  Constructs a QuaZipFile instance.
- QuaZipFile (QObject *parent)

  Constructs a QuaZipFile instance.
- QuaZipFile (const QString &zipName, QObject *parent=NULL)

  Constructs a QuaZipFile instance.
- QuaZipFile (const QString &zipName, const QString &fileName, QuaZip::CaseSensitivity cs=QuaZip::csDefault, QObject *parent=NULL)

  Constructs a QuaZipFile instance.
- QuaZipFile (QuaZip *zip, QObject *parent=NULL)

  Constructs a QuaZipFile instance.
- virtual ~QuaZipFile ()

  Destroys a QuaZipFile instance.
- QString getZipName () const

  Returns the ZIP archive file name.
- QuaZip * getZip () const

  Returns a pointer to the associated QuaZip object.
- QString getFileName () const

  Returns file name.
- QuaZip::CaseSensitivity getCaseSensitivity () const

  Returns case sensitivity of the file name.
- QString getActualFileName () const

  Returns the actual file name in the archive.
- void setZipName (const QString &zipName)

  Sets the ZIP archive file name.
- bool isRaw () const

  Returns `true` if the file was opened in raw mode.
- void setZip (QuaZip *zip)

  Binds to the existing QuaZip instance.
- void setFileName (const QString &fileName, QuaZip::CaseSensitivity cs=QuaZip::csDefault)

  Sets the file name.
- virtual bool open (OpenMode mode)

  Opens a file for reading.
- bool open (OpenMode mode, const char *password)

  Opens a file for reading.
- bool open (OpenMode mode, int *method, int *level, bool raw, const char *password=NULL)

  Opens a file for reading.
- bool open (OpenMode mode, const QuaZipNewInfo &info, const char *password=NULL, quint32 crc=0, int method=Z_DEFLATED, int level=Z_DEFAULT_COMPRESSION, bool raw=false, int windowBits=-MAX_WBITS, int memLevel=MAX_MEM_LEVEL, int strategy=Z_DEFAULT_STRATEGY)

  Opens a file for writing.
- virtual bool isSequential () const

  Returns `true`, but beware!
- virtual qint64 pos () const

  Returns current position in the file.
- virtual bool atEnd () const

  Returns `true` if the end of file was reached.
- virtual qint64 size () const

  Returns file size.

- qint64 csize () const

  Returns compressed file size.
- qint64 usize () const

  Returns uncompressed file size.
- bool getFileInfo (QuaZipFileInfo *info)

  Gets information about current file.
- bool getFileInfo (QuaZipFileInfo64 *info)

  Gets information about current file with zip64 support.
- virtual void close ()

  Closes the file.
- int getZipError () const

  Returns the error code returned by the last ZIP/UNZIP API call.
- virtual qint64 bytesAvailable () const

  Returns the number of bytes available for reading.

Protected Member Functions

- qint64 readData (char *data, qint64 maxSize)

  Implementation of the QIODevice::readData().
- qint64 writeData (const char *data, qint64 maxSize)

  Implementation of the QIODevice::writeData().

Private Member Functions

- QuaZipFile (const QuaZipFile &that)
- QuaZipFile & operator= (const QuaZipFile &that)

Private Attributes

- QuaZipFilePrivate * p

Friends

- class QuaZipFilePrivate

12.72.1 Detailed Description

This is the most interesting class. Not only it provides C++ interface to the ZIP/UNZIP package, but also integrates it with Qt by subclassing QIODevice. This makes possible to access files inside ZIP archive using QTextStream or QDataStream, for example. Actually, this is the main purpose of the whole QuaZIP library.

You can either use existing QuaZip instance to create instance of this class or pass ZIP archive file name to this class, in which case it will create internal QuaZip object. See constructors' descriptions for details. Writing is only possible with the existing instance.

Note that due to the underlying library's limitation it is not possible to use multiple QuaZipFile instances to open several files in the same archive at the same time. If you need to write to multiple files in parallel, then you should write to temporary files first, then pack them all at once when you have finished writing. If you need to read multiple files inside the same archive in parallel, you should extract them all into a temporary directory first.

12.72.2 Sequential or random-access?

At the first thought, QuaZipFile has fixed size, the start and the end and should be therefore considered random-access device. But there is one major obstacle to making it random-access: ZIP/UNZIP API does not support seek() operation and the only way to implement it is through reopening the file and re-reading to the required position, but this is prohibitively slow.

Therefore, QuaZipFile is considered to be a sequential device. This has advantage of availability of the ungetChar() operation (QIODevice does not implement it properly for non-sequential devices unless they support seek()). Disadvantage is a somewhat strange behaviour of the size() and pos() functions. This should be kept in mind while using this class.

Definition at line 74 of file quazipfile.h.

12.72.3 Constructor & Destructor Documentation

12.72.3.1 QuaZipFile::QuaZipFile (const QuaZipFile & *that*) [private]

12.72.3.2 QuaZipFile::QuaZipFile ( )

You should use setZipName() and setFileName() or setZip() before trying to call open() on the constructed object.

Definition at line 108 of file quazipfile.cpp.

```
108                       :
109   p(new QuaZipFilePrivate(this))
110 {
111 }
```

12.72.3.3 QuaZipFile::QuaZipFile (QObject * *parent*)

parent argument specifies this object's parent object.

You should use setZipName() and setFileName() or setZip() before trying to call open() on the constructed object.

Definition at line 113 of file quazipfile.cpp.

```
113                                       :
114   QIODevice(parent),
115   p(new QuaZipFilePrivate(this))
116 {
117 }
```

12.72.3.4 QuaZipFile::QuaZipFile (const QString & *zipName*, QObject * *parent* = NULL)

parent argument specifies this object's parent object and *zipName* specifies ZIP archive file name.

You should use setFileName() before trying to call open() on the constructed object.

QuaZipFile constructed by this constructor can be used for read only access. Use QuaZipFile(QuaZip*,QObject*) for writing.

Definition at line 119 of file quazipfile.cpp.

```
119                                                           :
120   QIODevice(parent),
121   p(new QuaZipFilePrivate(this, zipName))
122 {
123 }
```

12.72.3.5 QuaZipFile::QuaZipFile (const QString & *zipName*, const QString & *fileName*, QuaZip::CaseSensitivity *cs* = QuaZip::csDefault, QObject * *parent* = NULL)

parent argument specifies this object's parent object, *zipName* specifies ZIP archive file name and *fileName* and *cs* specify a name of the file to open inside archive.

QuaZipFile constructed by this constructor can be used for read only access. Use QuaZipFile(QuaZip*,QObject*) for writing.

See Also

QuaZip::setCurrentFile()

Definition at line 125 of file quazipfile.cpp.

```
126                                             :
127   QIODevice(parent),
128   p(new QuaZipFilePrivate(this, zipName, fileName, cs))
129 {
130 }
```

12.72.3.6 QuaZipFile::QuaZipFile (QuaZip * *zip*, QObject * *parent* = NULL)

parent argument specifies this object's parent object.

zip is the pointer to the existing QuaZip object. This QuaZipFile object then can be used to read current file in the *zip* or to write to the file inside it.

Warning

Using this constructor for reading current file can be tricky. Let's take the following example:

```
QuaZip zip("archive.zip");
zip.open(QuaZip::mdUnzip);
zip.setCurrentFile("file-in-archive");
QuaZipFile file(&zip);
file.open(QIODevice::ReadOnly);
// ok, now we can read from the file
file.read(somewhere, some);
zip.setCurrentFile("another-file-in-archive"); // oops...
QuaZipFile anotherFile(&zip);
anotherFile.open(QIODevice::ReadOnly);
anotherFile.read(somewhere, some); // this is still ok...
file.read(somewhere, some); // and this is NOT
```

So, what exactly happens here? When we change current file in the `zip` archive, `file` that references it becomes invalid (actually, as far as I understand ZIP/UNZIP sources, it becomes closed, but QuaZipFile has no means to detect it).

Summary: do not close `zip` object or change its current file as long as QuaZipFile is open. Even better - use another constructors which create internal QuaZip instances, one per object, and therefore do not cause unnecessary trouble. This constructor may be useful, though, if you already have a QuaZip instance and do not want to access several files at once. Good example:

```
QuaZip zip("archive.zip");
zip.open(QuaZip::mdUnzip);
// first, we need some information about archive itself
QByteArray comment=zip.getComment();
// and now we are going to access files inside it
QuaZipFile file(&zip);
for(bool more=zip.goToFirstFile(); more; more=zip.goToNextFile()) {
  file.open(QIODevice::ReadOnly);
  // do something cool with file here
  file.close(); // do not forget to close!
}
zip.close();
```

Definition at line 132 of file quazipfile.cpp.

```
132                                                 :
133   QIODevice(parent),
134   p(new QuaZipFilePrivate(this, zip))
135 {
136 }
```

12.72.3.7 QuaZipFile::~QuaZipFile ( ) [virtual]

Closes file if open, destructs internal QuaZip object (if it exists and *is* internal, of course).

Definition at line 138 of file quazipfile.cpp.

References close(), and p.

```
139 {
140   if (isOpen())
141     close();
142   delete p;
143 }
```

Here is the call graph for this function:

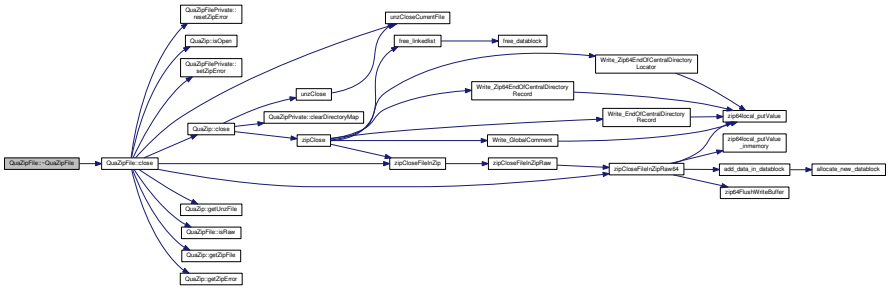

12.72.4 Member Function Documentation

12.72.4.1 bool QuaZipFile::atEnd ( ) const [virtual]

This function returns `false` in the case of error. This means that you called this function on either not open file, or a file in the not open archive or even on a QuaZipFile instance that does not even have QuaZip instance associated. Do not do that because there is no means to determine whether `false` is returned because of error or because end of file was reached. Well, on the other side you may interpret `false` return value as "there is no file open to check for end of file and there is no end of file therefore".

When writing, this function always returns `true` (because you are always writing to the end of file).

Error code returned by getZipError() is not affected by this function call.

Definition at line 361 of file quazipfile.cpp.

References QuaZip::getUnzFile(), p, unzeof(), and QuaZipFilePrivate::zip.

```
362 {
363   if(p->zip==NULL) {
364     qWarning("QuaZipFile::atEnd(): call setZipName() or setZip() first");
365     return false;
366   }
367   if(!isOpen()) {
368     qWarning("QuaZipFile::atEnd(): file is not open");
369     return false;
370   }
371   if(openMode()&ReadOnly)
372       // the same problem as with pos()
373     return QIODevice::bytesAvailable() == 0
374         && unzeof(p->zip->getUnzFile())==1;
```

```
375   else
376     return true;
377 }
```

Here is the call graph for this function:

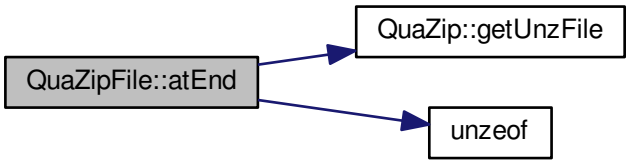

12.72.4.2 qint64 QuaZipFile::bytesAvailable ( ) const [virtual]

Definition at line 499 of file quazipfile.cpp.

References pos(), and size().

```
500 {
501     return size() - pos();
502 }
```

Here is the call graph for this function:

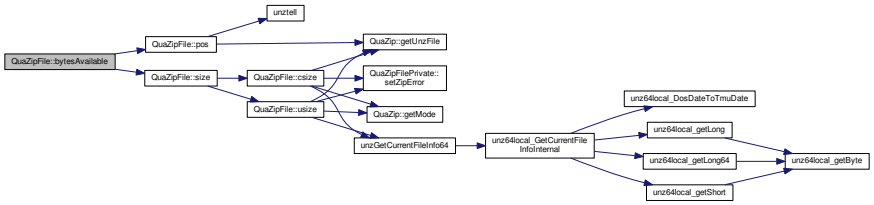

12.72.4.3 void QuaZipFile::close ( ) [virtual]

Call getZipError() to determine if the close was successful.

Definition at line 432 of file quazipfile.cpp.

References QuaZip::close(), QuaZipFilePrivate::crc, QuaZip::getUnzFile(), QuaZip::getZipError(), QuaZip::getZipFile(), QuaZipFilePrivate::internal, QuaZip::isOpen(), isRaw(), p, QuaZipFilePrivate::resetZipError(), QuaZipFilePrivate::setZipError(), QuaZipFilePrivate::uncompressedSize, UNZ_OK, unzCloseCurrentFile(), QuaZipFilePrivate::zip, zipCloseFileInZip(), zipCloseFileInZipRaw64(), and QuaZipFilePrivate::zipError.

Referenced by JlCompress::compressFile(), JlCompress::compressSubDir(), JlCompress::extractFile(), and ~QuaZipFile().

```
433 {
434   p->resetZipError();
435   if(p->zip==NULL||!p->zip->isOpen()) return;
```

```
436   if(!isOpen()) {
437     qWarning("QuaZipFile::close(): file isn't open");
438     return;
439   }
440   if(openMode()&ReadOnly)
441     p->setZipError(unzCloseCurrentFile(p->zip->
      getUnzFile()));
442   else if(openMode()&WriteOnly)
443     if(isRaw()) p->setZipError(zipCloseFileInZipRaw64(
      p->zip->getZipFile(), p->uncompressedSize, p->
      crc));
444     else p->setZipError(zipCloseFileInZip(p->zip->
      getZipFile()));
445   else {
446     qWarning("Wrong open mode: %d", (int)openMode());
447     return;
448   }
449   if(p->zipError==UNZ_OK) setOpenMode(QIODevice::NotOpen);
450   else return;
451   if(p->internal) {
452     p->zip->close();
453     p->setZipError(p->zip->getZipError());
454   }
455 }
```

Here is the call graph for this function:

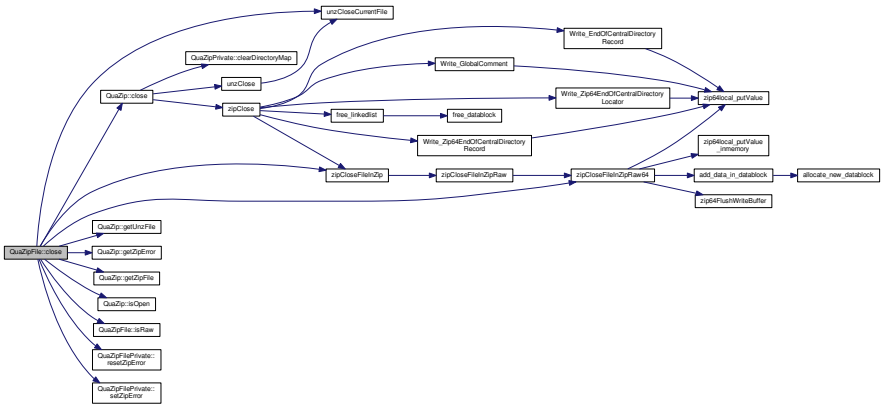

Here is the caller graph for this function:

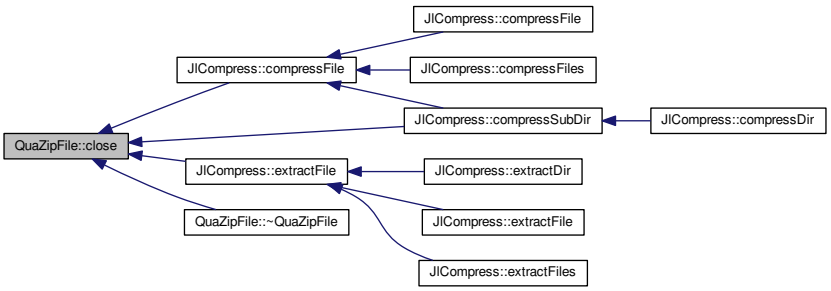

12.72.4.4 qint64 QuaZipFile::csize ( ) const

Equivalent to calling getFileInfo() and then getting compressedSize field, but more convenient and faster.

File must be open for reading before calling this function.

Returns -1 on error, call getZipError() to get error code.

Definition at line 391 of file quazipfile.cpp.

References unz_file_info64_s::compressed_size, QuaZip::getMode(), QuaZip::getUnzFile(), QuaZip::mdUnzip, p, QuaZipFilePrivate::setZipError(), UNZ_OK, unzGetCurrentFileInfo64(), QuaZipFilePrivate::zip, and QuaZipFilePrivate::zipError.

Referenced by size().

```
392 {
393   unz_file_info64 info_z;
394   p->setZipError(UNZ_OK);
395   if(p->zip==NULL||p->zip->getMode()!=QuaZip::mdUnzip) return -1;
396   p->setZipError(unzGetCurrentFileInfo64(p->
      zip->getUnzFile(), &info_z, NULL, 0, NULL, 0, NULL, 0));
397   if(p->zipError!=UNZ_OK)
398     return -1;
399   return info_z.compressed_size;
400 }
```

Here is the call graph for this function:

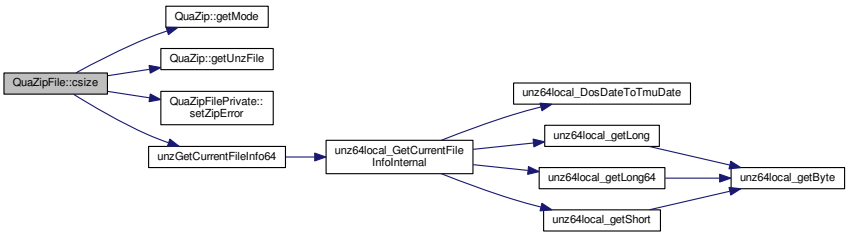

Here is the caller graph for this function:



12.72.4.5 QString QuaZipFile::getActualFileName ( ) const

This is *not* a ZIP archive file name, but a name of file inside archive. It is not necessary the same name that you have passed to the QuaZipFile(const QString&,const QString&,QuaZip::CaseSensitivity,QObject*), setFileName() or QuaZip::setCurrentFile() - this is the real file name inside archive, so it may differ in case if the file name search was case-insensitive.

Equivalent to calling getCurrentFileName() on the associated QuaZip object. Returns null string if there is no associated QuaZip object or if it does not have a current file yet. And this is the case if you called setFileName() but did not open the file yet. So this is perfectly fine:

```
QuaZipFile file("somezip.zip");
file.setFileName("somefile");
QString name=file.getName(); // name=="somefile"
QString actual=file.getActualFileName(); // actual is null string
file.open(QIODevice::ReadOnly);
QString actual=file.getActualFileName(); // actual can be "SoMeFiLe" on Windows
```

See Also

getZipName(), getFileName(), QuaZip::CaseSensitivity

Definition at line 155 of file quazipfile.cpp.

References QuaZip::getCurrentFileName(), QuaZip::getZipError(), p, QuaZipFilePrivate::setZipError(), UNZ_OK, and QuaZipFilePrivate::zip.

```
156 {
157   p->setZipError(UNZ_OK);
158   if (p->zip == NULL || (openMode() & WriteOnly))
159     return QString();
160   QString name=p->zip->getCurrentFileName();
161   if(name.isNull())
162     p->setZipError(p->zip->getZipError());
163   return name;
164 }
```

Here is the call graph for this function:

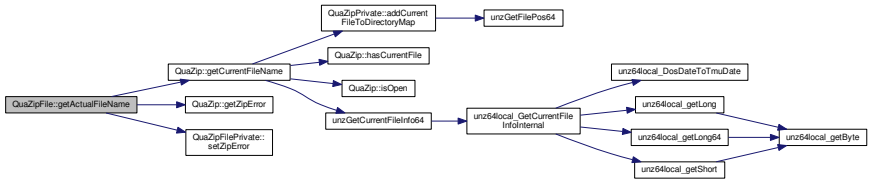

12.72.4.6 QuaZip::CaseSensitivity QuaZipFile::getCaseSensitivity ( ) const

This function returns case sensitivity argument you passed to this object either by using QuaZipFile(const QString&,const QString&,QuaZip::CaseSensitivity,QObject*) or by calling setFileName().

Returns unpredictable value if getFileName() returns null string (this is the case when you did not used setFileName() or constructor above).

See Also

getFileName

Definition at line 484 of file quazipfile.cpp.

References QuaZipFilePrivate::caseSensitivity, and p.

```
485 {
486   return p->caseSensitivity;
487 }
```

12.72.4.7 bool QuaZipFile::getFileInfo (QuaZipFileInfo * *info*)

This function does the same thing as calling QuaZip::getCurrentFileInfo() on the associated QuaZip object, but you can not call getCurrentFileInfo() if the associated QuaZip is internal (because you do not have access to it), while you still can call this function in that case.

File must be open for reading before calling this function.

Returns

`false` in the case of an error.

This function doesn't support zip64, but will still work fine on zip64 archives if file sizes are below 4 GB, otherwise the values will be set as if converted using QuaZipFileInfo64::toQuaZipFileInfo().

See Also

getFileInfo(QuaZipFileInfo64*)

Definition at line 413 of file quazipfile.cpp.

References QuaZipFileInfo64::toQuaZipFileInfo().

```
414 {
415     QuaZipFileInfo64 info64;
416     if (getFileInfo(&info64)) {
417         info64.toQuaZipFileInfo(*info);
418         return true;
419     } else {
420         return false;
421     }
422 }
```

Here is the call graph for this function:



12.72.4.8 bool QuaZipFile::getFileInfo (QuaZipFileInfo64 * *info*)

This is an overloaded member function, provided for convenience. It differs from the above function only in what argument(s) it accepts.

See Also

getFileInfo(QuaZipFileInfo*)

Definition at line 424 of file quazipfile.cpp.

References QuaZip::getCurrentFileInfo(), QuaZip::getMode(), QuaZip::getZipError(), QuaZip::mdUnzip, p, QuaZipFilePrivate::setZipError(), UNZ_OK, QuaZipFilePrivate::zip, and QuaZipFilePrivate::zipError.

```
425 {
426     if(p->zip==NULL||p->zip->getMode()!=QuaZip::mdUnzip) return false;
427     p->zip->getCurrentFileInfo(info);
428     p->setZipError(p->zip->getZipError());
429     return p->zipError==UNZ_OK;
430 }
```

Here is the call graph for this function:

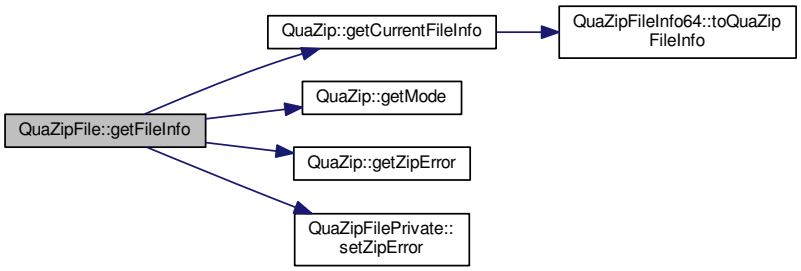

12.72.4.9 QString QuaZipFile::getFileName ( ) const

This function returns file name you passed to this object either by using QuaZipFile(const QString&,const QString&,-QuaZip::CaseSensitivity,QObject*) or by calling setFileName(). Real name of the file may differ in case if you used case-insensitivity.

Returns null string if there is no file name set yet. This is the case when this QuaZipFile operates on the existing QuaZip object (constructor QuaZipFile(QuaZip*,QObject*) or setZip() was used).

See Also

getActualFileName

Definition at line 479 of file quazipfile.cpp.

References QuaZipFilePrivate::fileName, and p.

```
480 {
481   return p->fileName;
482 }
```

12.72.4.10 QuaZip * QuaZipFile::getZip ( ) const

Returns NULL if there is no associated QuaZip or it is internal (so you will not mess with it).

Definition at line 150 of file quazipfile.cpp.

References QuaZipFilePrivate::internal, p, and QuaZipFilePrivate::zip.

```
151 {
152     return p->internal ? NULL : p->zip;
153 }
```

12.72.4.11 int QuaZipFile::getZipError ( ) const

Definition at line 494 of file quazipfile.cpp.

References p, and QuaZipFilePrivate::zipError.

Referenced by JlCompress::compressFile(), and JlCompress::extractFile().

```
495 {
496   return p->zipError;
497 }
```

Here is the caller graph for this function:

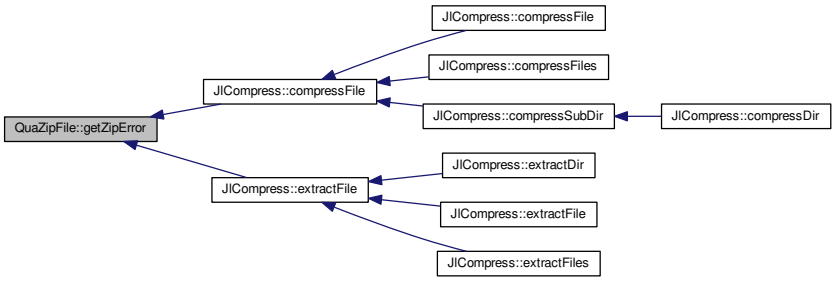

12.72.4.12 QString QuaZipFile::getZipName ( ) const

If this object was created by passing QuaZip pointer to the constructor, this function will return that QuaZip's file name (or null string if that object does not have file name yet).

Otherwise, returns associated ZIP archive file name or null string if there are no name set yet.

See Also

setZipName() getFileName()

Definition at line 145 of file quazipfile.cpp.

References QuaZip::getZipName(), p, and QuaZipFilePrivate::zip.

```
146 {
147   return p->zip==NULL ? QString() : p->zip->getZipName();
148 }
```

Here is the call graph for this function:



12.72.4.13 bool QuaZipFile::isRaw ( ) const

If the file is not open, the returned value is undefined.

See Also

open(OpenMode,int*,int*,bool,const char*)

Definition at line 489 of file quazipfile.cpp.

References p, and QuaZipFilePrivate::raw.

Referenced by close().

```
490 {
491   return p->raw;
492 }
```

Here is the caller graph for this function:

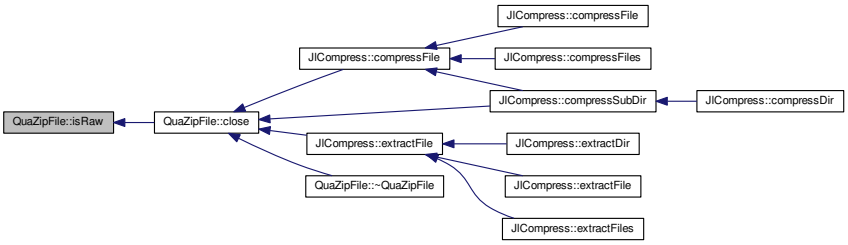

12.72.4.14 bool QuaZipFile::isSequential ( ) const [virtual]

Definition at line 337 of file quazipfile.cpp.

```
338 {
339   return true;
340 }
```

12.72.4.15 bool QuaZipFile::open (OpenMode *mode*) [virtual]

Returns `true` on success, `false` otherwise. Call getZipError() to get error code.

Note

Since ZIP/UNZIP API provides buffered reading only, QuaZipFile does not support unbuffered reading. So do not pass QIODevice::Unbuffered flag in *mode*, or open will fail.

Definition at line 221 of file quazipfile.cpp.

Referenced by KbFirmware::_fileForBoard(), JICompress::compressFile(), JICompress::compressSubDir(), JICompress::extractFile().

```
222 {
223   return open(mode, NULL);
224 }
```

Here is the caller graph for this function:

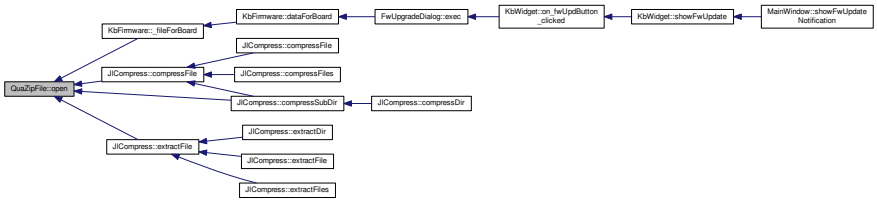

12.72.4.16 bool QuaZipFile::open (OpenMode *mode*, const char * *password*) [inline]

This is an overloaded member function, provided for convenience. It differs from the above function only in what argument(s) it accepts. Argument *password* specifies a password to decrypt the file. If it is NULL then this function behaves just like open(OpenMode).

Definition at line 298 of file quazipfile.h.

```
299     {return open(mode, NULL, NULL, false, password);}
```

12.72.4.17 bool QuaZipFile::open (OpenMode *mode*, int * *method*, int * *level*, bool *raw*, const char * *password* = NULL)

This is an overloaded member function, provided for convenience. It differs from the above function only in what argument(s) it accepts. Argument *password* specifies a password to decrypt the file.

An integers pointed by *method* and *level* will receive codes of the compression method and level used. See unzip.h.

If raw is `true` then no decompression is performed.

method should not be `NULL`. *level* can be `NULL` if you don't want to know the compression level.

Definition at line 226 of file quazipfile.cpp.

References QuaZipFilePrivate::caseSensitivity, QuaZip::close(), QuaZipFilePrivate::fileName, QuaZip::getMode(), QuaZip::getUnzFile(), QuaZip::getZipError(), QuaZip::hasCurrentFile(), QuaZipFilePrivate::internal, QuaZip::mdUnzip, QuaZip::open(), p, QuaZipFilePrivate::raw, QuaZipFilePrivate::resetZipError(), QuaZip::setCurrentFile(), QuaZipFilePrivate::setZipError(), UNZ_OK, unzOpenCurrentFile3(), QuaZipFilePrivate::zip, and QuaZipFilePrivate::zipError.

```
227 {
228   p->resetZipError();
229   if(isOpen()) {
230     qWarning("QuaZipFile::open(): already opened");
231     return false;
232   }
233   if(mode&Unbuffered) {
234     qWarning("QuaZipFile::open(): Unbuffered mode is not supported");
235     return false;
236   }
237   if((mode&ReadOnly)&&!(mode&WriteOnly)) {
238     if(p->internal) {
239       if(!p->zip->open(QuaZip::mdUnzip)) {
240         p->setZipError(p->zip->getZipError());
241         return false;
242       }
243       if(!p->zip->setCurrentFile(p->fileName, p->
      caseSensitivity)) {
244         p->setZipError(p->zip->getZipError());
245         p->zip->close();
246         return false;
247       }
248     } else {
249       if(p->zip==NULL) {
250         qWarning("QuaZipFile::open(): zip is NULL");
251         return false;
```

```
252       }
253       if(p->zip->getMode()!=QuaZip::mdUnzip) {
254         qWarning("QuaZipFile::open(): file open mode %d incompatible with ZIP open mode %d",
255             (int)mode, (int)p->zip->getMode());
256         return false;
257       }
258       if(!p->zip->hasCurrentFile()) {
259         qWarning("QuaZipFile::open(): zip does not have current file");
260         return false;
261       }
262     }
263     p->setZipError(unzOpenCurrentFile3(p->zip->
    getUnzFile(), method, level, (int)raw, password));
264     if(p->zipError==UNZ_OK) {
265       setOpenMode(mode);
266       p->raw=raw;
267       return true;
268     } else
269       return false;
270   }
271   qWarning("QuaZipFile::open(): open mode %d not supported by this function", (int)mode);
272   return false;
273 }
```

Here is the call graph for this function:

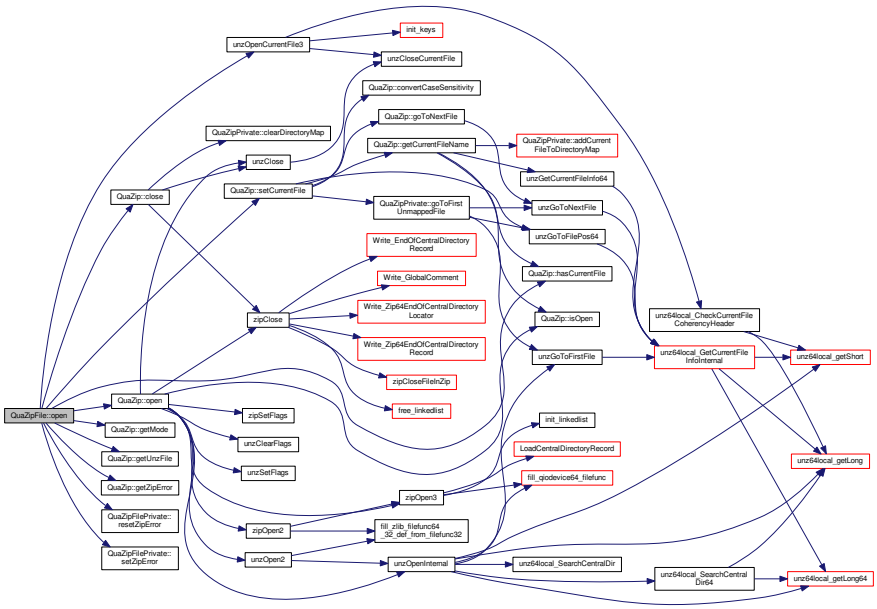

12.72.4.18 bool QuaZipFile::open (OpenMode *mode*, const QuaZipNewInfo & *info*, const char * *password* = NULL, quint32 *crc* = 0, int *method* = Z_DEFLATED, int *level* = Z_DEFAULT_COMPRESSION, bool *raw* = false, int *windowBits* = -MAX_WBITS, int *memLevel* = MAX_MEM_LEVEL, int *strategy* = Z_DEFAULT_STRATEGY)

info argument specifies information about file. It should at least specify a correct file name. Also, it is a good idea to specify correct timestamp (by default, current time will be used). See QuaZipNewInfo.

The *password* argument specifies the password for crypting. Pass NULL if you don't need any crypting. The *crc* argument was supposed to be used for crypting too, but then it turned out that it's false information, so you need to set it to 0 unless you want to use the raw mode (see below).

Arguments *method* and *level* specify compression method and level. The only method supported is Z_DEFLATED, but you may also specify 0 for no compression. If all of the files in the archive use both method 0 and either level 0 is explicitly specified or data descriptor writing is disabled with QuaZip::setDataDescriptorWritingEnabled(), then the resulting archive is supposed to be compatible with the 1.0 ZIP format version, should you need that. Except for this, *level* has no other effects with method 0.

If *raw* is `true`, no compression is performed. In this case, *crc* and uncompressedSize field of the *info* are required.

Arguments *windowBits*, *memLevel*, *strategy* provide zlib algorithms tuning. See deflateInit2() in zlib.

Definition at line 275 of file quazipfile.cpp.

References QuaZipNewInfo::comment, QuaZipFilePrivate::crc, QuaZipNewInfo::dateTime, zip_fileinfo::dosDate, zip_fileinfo::external_fa, QuaZipNewInfo::externalAttr, QuaZipNewInfo::extraGlobal, QuaZipNewInfo::extraLocal, QuaZip::getCommentCodec(), QuaZip::getFileNameCodec(), QuaZip::getMode(), QuaZip::getZipFile(), QuaZipFilePrivate::internal, zip_fileinfo::internal_fa, QuaZipNewInfo::internalAttr, QuaZip::isDataDescriptorWritingEnabled(), QuaZip::isZip64Enabled(), QuaZip::mdAdd, QuaZip::mdAppend, QuaZip::mdCreate, QuaZipNewInfo::name, p, QuaZipFilePrivate::raw, QuaZipFilePrivate::resetZipError(), QuaZipFilePrivate::setZipError(), tm_zip_s::tm_hour, tm_zip_s::tm_mday, tm_zip_s::tm_min, tm_zip_s::tm_mon, tm_zip_s::tm_sec, tm_zip_s::tm_year, zip_fileinfo::tmz_date, QuaZipFilePrivate::uncompressedSize, QuaZipNewInfo::uncompressedSize, UNZ_OK, QuaZipFilePrivate::writePos, QuaZipFilePrivate::zip, ZIP_WRITE_DATA_DESCRIPTOR, zipClearFlags(), QuaZipFilePrivate::zipError, zipOpenNewFileInZip3_64(), and zipSetFlags().

```
279 {
280   zip_fileinfo info_z;
281   p->resetZipError();
282   if(isOpen()) {
283     qWarning("QuaZipFile::open(): already opened");
284     return false;
285   }
286   if((mode&WriteOnly)&&!(mode&ReadOnly)) {
287     if(p->internal) {
288       qWarning("QuaZipFile::open(): write mode is incompatible with internal QuaZip approach");
289       return false;
290     }
291     if(p->zip==NULL) {
292       qWarning("QuaZipFile::open(): zip is NULL");
293       return false;
294     }
295     if(p->zip->getMode()!=QuaZip::mdCreate&&p->zip->
    getMode()!=QuaZip::mdAppend&&p->zip->getMode()!=
    QuaZip::mdAdd) {
296       qWarning("QuaZipFile::open(): file open mode %d incompatible with ZIP open mode %d",
297           (int)mode, (int)p->zip->getMode());
298       return false;
299     }
300     info_z.tmz_date.tm_year=info.dateTime.date().year();
301     info_z.tmz_date.tm_mon=info.dateTime.date().month() - 1;
302     info_z.tmz_date.tm_mday=info.dateTime.date().day();
303     info_z.tmz_date.tm_hour=info.dateTime.time().hour();
304     info_z.tmz_date.tm_min=info.dateTime.time().minute();
305     info_z.tmz_date.tm_sec=info.dateTime.time().second();
306     info_z.dosDate = 0;
307     info_z.internal_fa=(uLong)info.internalAttr;
308     info_z.external_fa=(uLong)info.externalAttr;
309     if (p->zip->isDataDescriptorWritingEnabled())
310         zipSetFlags(p->zip->getZipFile(),
    ZIP_WRITE_DATA_DESCRIPTOR);
311     else
312         zipClearFlags(p->zip->getZipFile(),
    ZIP_WRITE_DATA_DESCRIPTOR);
313     p->setZipError(zipOpenNewFileInZip3_64(p->
    zip->getZipFile(),
314           p->zip->getFileNameCodec()->fromUnicode(info.name).constData(), &info_z,
315           info.extraLocal.constData(), info.extraLocal.length(),
316           info.extraGlobal.constData(), info.extraGlobal.length(),
317           p->zip->getCommentCodec()->fromUnicode(info.comment).constData(),
318           method, level, (int)raw,
319           windowBits, memLevel, strategy,
320           password, (uLong)crc, p->zip->isZip64Enabled()));
321     if(p->zipError==UNZ_OK) {
322       p->writePos=0;
323       setOpenMode(mode);
324       p->raw=raw;
325       if(raw) {
326         p->crc=crc;
327         p->uncompressedSize=info.uncompressedSize;
328       }
329       return true;
330     } else
331       return false;
332   }
333   qWarning("QuaZipFile::open(): open mode %d not supported by this function", (int)mode);
334   return false;
335 }
```

Here is the call graph for this function:

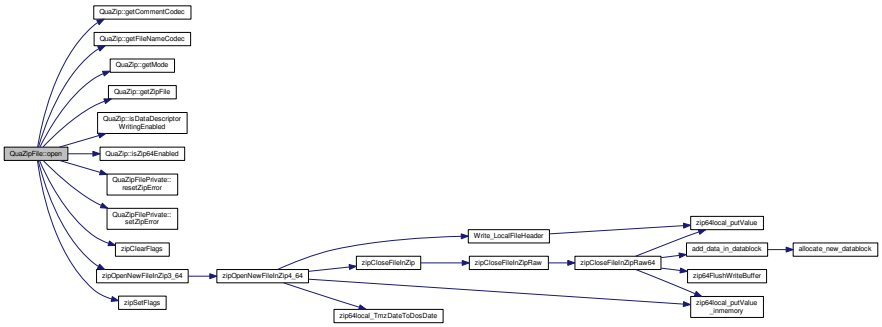

12.72.4.19 QuaZipFile& QuaZipFile::operator= (const QuaZipFile & *that*) [private]

12.72.4.20 qint64 QuaZipFile::pos ( ) const [virtual]

Implementation of the QIODevice::pos(). When reading, this function is a wrapper to the ZIP/UNZIP unztell(), therefore it is unable to keep track of the ungetChar() calls (which is non-virtual and therefore is dangerous to reimplement). So if you are using ungetChar() feature of the QIODevice, this function reports incorrect value until you get back characters which you ungot.

When writing, pos() returns number of bytes already written (uncompressed unless you use raw mode).

Note

Although QuaZipFile is a sequential device and therefore pos() should always return zero, it does not, because it would be misguiding. Keep this in mind.

This function returns -1 if the file or archive is not open.

Error code returned by getZipError() is not affected by this function call.

Definition at line 342 of file quazipfile.cpp.

References QuaZip::getUnzFile(), p, unztell(), QuaZipFilePrivate::writePos, and QuaZipFilePrivate::zip.

Referenced by bytesAvailable().

```
343 {
344   if(p->zip==NULL) {
345     qWarning("QuaZipFile::pos(): call setZipName() or setZip() first");
346     return -1;
347   }
348   if(!isOpen()) {
349     qWarning("QuaZipFile::pos(): file is not open");
350     return -1;
351   }
352   if(openMode()&ReadOnly)
353       // QIODevice::pos() is broken for sequential devices,
354       // but thankfully bytesAvailable() returns the number of
355       // bytes buffered, so we know how far ahead we are.
356     return unztell(p->zip->getUnzFile()) - QIODevice::bytesAvailable();
357   else
358     return p->writePos;
359 }
```

Here is the call graph for this function:

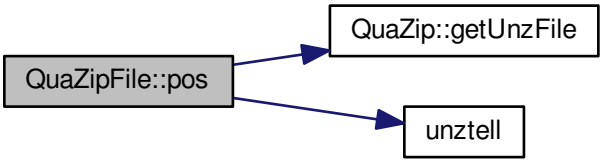

Here is the caller graph for this function:



12.72.4.21 qint64 QuaZipFile::readData (char * *data*, qint64 *maxSize*) [protected]

Definition at line 457 of file quazipfile.cpp.

References QuaZip::getUnzFile(), p, QuaZipFilePrivate::setZipError(), UNZ_OK, unzReadCurrentFile(), and QuaZipFilePrivate::zip.

```
458 {
459   p->setZipError(UNZ_OK);
460   qint64 bytesRead=unzReadCurrentFile(p->zip->getUnzFile(), data, (unsigned
      )maxSize);
461   if (bytesRead < 0) {
462     p->setZipError((int) bytesRead);
463     return -1;
464   }
465   return bytesRead;
466 }
```

Here is the call graph for this function:

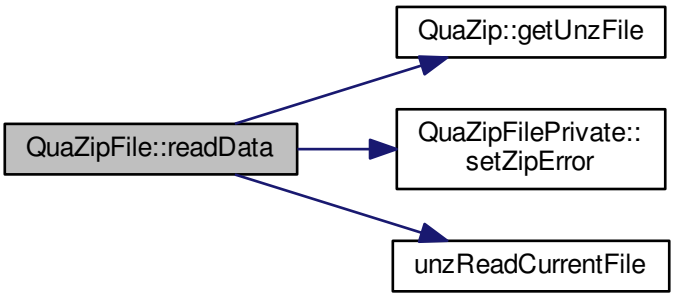

12.72.4.22 void QuaZipFile::setFileName (const QString & *fileName,* QuaZip::CaseSensitivity *cs* = QuaZip::csDefault)

Will do nothing if at least one of the following conditions is met:

- ZIP name has not been set yet (getZipName() returns null string).
- This QuaZipFile is associated with external QuaZip. In this case you should call that QuaZip's setCurrentFile() function instead!
- File is already open so setting the name is meaningless.

See Also

QuaZip::setCurrentFile

Definition at line 191 of file quazipfile.cpp.

References QuaZipFilePrivate::caseSensitivity, QuaZipFilePrivate::fileName, QuaZipFilePrivate::internal, p, and QuaZipFilePrivate::zip.

```
192 {
193   if(p->zip==NULL) {
194     qWarning("QuaZipFile::setFileName(): call setZipName() first");
195     return;
196   }
197   if(!p->internal) {
198     qWarning("QuaZipFile::setFileName(): should not be used when not using internal QuaZip");
199     return;
200   }
201   if(isOpen()) {
202     qWarning("QuaZipFile::setFileName(): can not set file name for already opened file");
203     return;
204   }
205   p->fileName=fileName;
206   if (p->fileName.startsWith('/'))
207       p->fileName = p->fileName.mid(1);
208   p->caseSensitivity=cs;
209 }
```

12.72.4.23 void QuaZipFile::setZip (QuaZip * *zip*)

This function destroys internal QuaZip object, if any, and makes this QuaZipFile to use current file in the *zip* object for any further operations. See QuaZipFile(QuaZip*,QObject*) for the possible pitfalls.

Will do nothing if the file is currently open. You must close() it first.

Definition at line 178 of file quazipfile.cpp.

References QuaZipFilePrivate::fileName, QuaZipFilePrivate::internal, p, and QuaZipFilePrivate::zip.

```
179 {
180   if(isOpen()) {
181     qWarning("QuaZipFile::setZip(): file is already open - can not set ZIP");
182     return;
183   }
184   if(p->zip!=NULL && p->internal)
185     delete p->zip;
186   p->zip=zip;
187   p->fileName=QString();
188   p->internal=false;
189 }
```

12.72.4.24 void QuaZipFile::setZipName (const QString & *zipName*)

Automatically creates internal QuaZip object and destroys previously created internal QuaZip object, if any.

Will do nothing if this file is already open. You must close() it first.

Definition at line 166 of file quazipfile.cpp.

References QuaZipFilePrivate::internal, p, and QuaZipFilePrivate::zip.

```
167 {
168   if(isOpen()) {
169     qWarning("QuaZipFile::setZipName(): file is already open - can not set ZIP name");
170     return;
171   }
172   if(p->zip!=NULL && p->internal)
173     delete p->zip;
174   p->zip=new QuaZip(zipName);
175   p->internal=true;
176 }
```

12.72.4.25 qint64 QuaZipFile::size ( ) const [virtual]

This function returns csize() if the file is open for reading in raw mode, usize() if it is open for reading in normal mode and pos() if it is open for writing.

Returns -1 on error, call getZipError() to get error code.

Note

This function returns file size despite that QuaZipFile is considered to be sequential device, for which size() should return bytesAvailable() instead. But its name would be very misguiding otherwise, so just keep in mind this inconsistence.

Definition at line 379 of file quazipfile.cpp.

References csize(), p, QuaZipFilePrivate::raw, usize(), and QuaZipFilePrivate::writePos.

Referenced by bytesAvailable().

```
380 {
381   if(!isOpen()) {
382     qWarning("QuaZipFile::atEnd(): file is not open");
383     return -1;
384   }
385   if(openMode()&ReadOnly)
386     return p->raw?csize():usize();
387   else
388     return p->writePos;
389 }
```

Here is the call graph for this function:

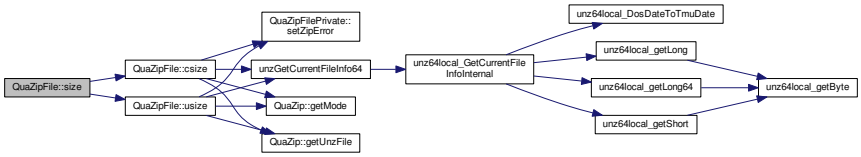

Here is the caller graph for this function:



12.72.4.26 qint64 QuaZipFile::usize ( ) const

Equivalent to calling getFileInfo() and then getting uncompressedSize field, but more convenient and faster. See getFileInfo() for a warning.

File must be open for reading before calling this function.

Returns -1 on error, call getZipError() to get error code.

Definition at line 402 of file quazipfile.cpp.

References QuaZip::getMode(), QuaZip::getUnzFile(), QuaZip::mdUnzip, p, QuaZipFilePrivate::setZipError(), unz_file_info64_s::uncompressed_size, UNZ_OK, unzGetCurrentFileInfo64(), QuaZipFilePrivate::zip, and QuaZipFilePrivate::zipError.

Referenced by size().

```
403 {
404   unz_file_info64 info_z;
405   p->setZipError(UNZ_OK);
406   if(p->zip==NULL||p->zip->getMode()!=QuaZip::mdUnzip) return -1;
407   p->setZipError(unzGetCurrentFileInfo64(p->
      zip->getUnzFile(), &info_z, NULL, 0, NULL, 0, NULL, 0));
408   if(p->zipError!=UNZ_OK)
409     return -1;
410   return info_z.uncompressed_size;
411 }
```

Here is the call graph for this function:

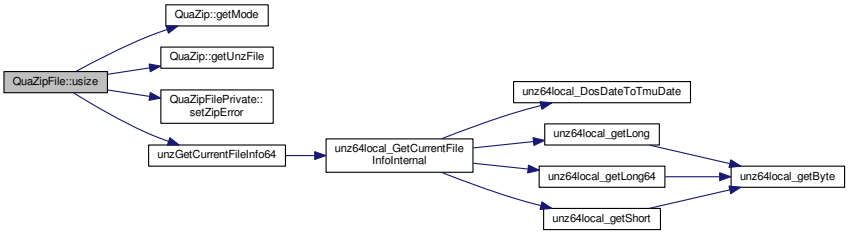

Here is the caller graph for this function:



12.72.4.27 qint64 QuaZipFile::writeData (const char * *data*, qint64 *maxSize*) [protected]

Definition at line 468 of file quazipfile.cpp.

References QuaZip::getZipFile(), p, QuaZipFilePrivate::setZipError(), QuaZipFilePrivate::writePos, QuaZipFilePrivate::zip, ZIP_OK, QuaZipFilePrivate::zipError, and zipWriteInFileInZip().

```
469 {
470   p->setZipError(ZIP_OK);
471   p->setZipError(zipWriteInFileInZip(p->zip->
      getZipFile(), data, (uint)maxSize));
472   if(p->zipError!=ZIP_OK) return -1;
473   else {
474     p->writePos+=maxSize;
475     return maxSize;
476   }
477 }
```

Here is the call graph for this function:

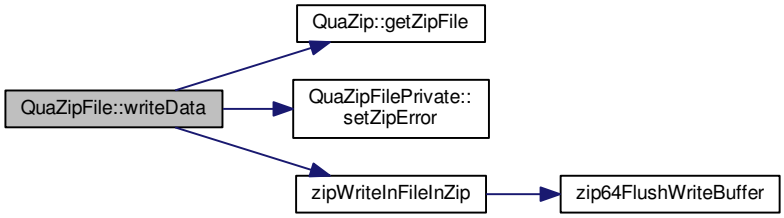

12.72.5 Friends And Related Function Documentation

12.72.5.1 friend class QuaZipFilePrivate [friend]

Definition at line 75 of file quazipfile.h.

12.72.6 Field Documentation

12.72.6.1 QuaZipFilePrivate* QuaZipFile::p [private]

Definition at line 78 of file quazipfile.h.

Referenced by atEnd(), close(), csize(), getActualFileName(), getCaseSensitivity(), getFileInfo(), getFileName(), getZip(), getZipError(), getZipName(), isRaw(), open(), pos(), readData(), setFileName(), setZip(), setZipName(), size(), usize(), writeData(), and ~QuaZipFile().

The documentation for this class was generated from the following files:

- src/ckb/quazip/quazipfile.h
- src/ckb/quazip/quazipfile.cpp

12.73 QuaZipFileInfo Struct Reference

Information about a file inside archive.

`#include <src/ckb/quazip/quazipfileinfo.h>`

Collaboration diagram for QuaZipFileInfo:

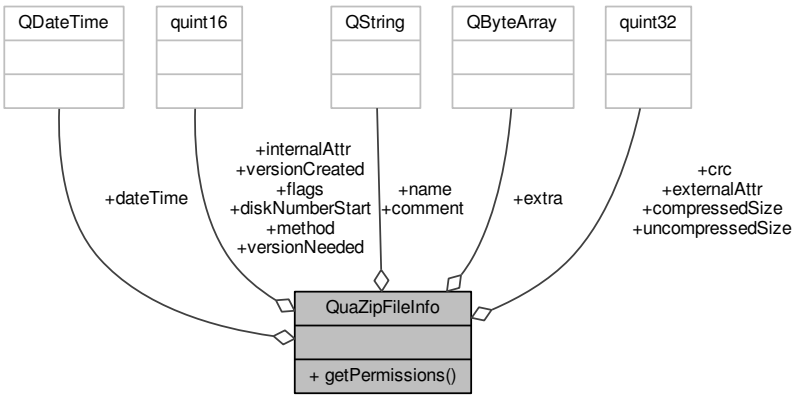

Public Member Functions

- QFile::Permissions getPermissions () const

  Get the file permissions.

Data Fields

- QString name

  File name.
- quint16 versionCreated

Version created by.

- quint16 versionNeeded

  Version needed to extract.

- quint16 flags

  General purpose flags.

- quint16 method

  Compression method.

- QDateTime dateTime

  Last modification date and time.

- quint32 crc

  CRC.

- quint32 compressedSize

  Compressed file size.

- quint32 uncompressedSize

  Uncompressed file size.

- quint16 diskNumberStart

  Disk number start.

- quint16 internalAttr

  Internal file attributes.

- quint32 externalAttr

  External file attributes.

- QString comment

  Comment.

- QByteArray extra

  Extra field.

12.73.1 Detailed Description

Deprecated Use QuaZipFileInfo64 instead. Not only it supports large files, but also more convenience methods as well.

Call QuaZip::getCurrentFileInfo() or QuaZipFile::getFileInfo() to fill this structure.

Definition at line 41 of file quazipfileinfo.h.

12.73.2 Member Function Documentation

12.73.2.1 QFile::Permissions QuaZipFileInfo::getPermissions ( ) const

Returns the high 16 bits of external attributes converted to QFile::Permissions.

Definition at line 52 of file quazipfileinfo.cpp.

References externalAttr, and permissionsFromExternalAttr().

```
53 {
54     return permissionsFromExternalAttr(externalAttr);
55 }
```

Here is the call graph for this function:

12.73.3 Field Documentation

12.73.3.1 QString QuaZipFileInfo::comment

Definition at line 67 of file quazipfileinfo.h.

Referenced by QuaZipFileInfo64::toQuaZipFileInfo().

12.73.3.2 quint32 QuaZipFileInfo::compressedSize

Definition at line 57 of file quazipfileinfo.h.

Referenced by QuaZipFileInfo64::toQuaZipFileInfo().

12.73.3.3 quint32 QuaZipFileInfo::crc

Definition at line 55 of file quazipfileinfo.h.

Referenced by QuaZipFileInfo64::toQuaZipFileInfo().

12.73.3.4 QDateTime QuaZipFileInfo::dateTime

Definition at line 53 of file quazipfileinfo.h.

Referenced by QuaZipFileInfo64::toQuaZipFileInfo().

12.73.3.5 quint16 QuaZipFileInfo::diskNumberStart

Definition at line 61 of file quazipfileinfo.h.

Referenced by QuaZipFileInfo64::toQuaZipFileInfo().

12.73.3.6 quint32 QuaZipFileInfo::externalAttr

Definition at line 65 of file quazipfileinfo.h.

Referenced by getPermissions(), and QuaZipFileInfo64::toQuaZipFileInfo().

12.73.3.7 QByteArray QuaZipFileInfo::extra

Definition at line 69 of file quazipfileinfo.h.

Referenced by QuaZipFileInfo64::toQuaZipFileInfo().

12.73.3.8 quint16 QuaZipFileInfo::flags

Definition at line 49 of file quazipfileinfo.h.

Referenced by QuaZipFileInfo64::toQuaZipFileInfo().

12.73.3.9 quint16 QuaZipFileInfo::internalAttr

Definition at line 63 of file quazipfileinfo.h.

Referenced by QuaZipFileInfo64::toQuaZipFileInfo().

12.73.3.10 quint16 QuaZipFileInfo::method

Definition at line 51 of file quazipfileinfo.h.

Referenced by QuaZipFileInfo64::toQuaZipFileInfo().

12.73.3.11 QString QuaZipFileInfo::name

Definition at line 43 of file quazipfileinfo.h.

Referenced by QuaZipFileInfo64::toQuaZipFileInfo().

12.73.3.12 quint32 QuaZipFileInfo::uncompressedSize

Definition at line 59 of file quazipfileinfo.h.

Referenced by QuaZipFileInfo64::toQuaZipFileInfo().

12.73.3.13 quint16 QuaZipFileInfo::versionCreated

Definition at line 45 of file quazipfileinfo.h.

Referenced by QuaZipFileInfo64::toQuaZipFileInfo().

12.73.3.14 quint16 QuaZipFileInfo::versionNeeded

Definition at line 47 of file quazipfileinfo.h.

Referenced by QuaZipFileInfo64::toQuaZipFileInfo().

The documentation for this struct was generated from the following files:

- src/ckb/quazip/quazipfileinfo.h
- src/ckb/quazip/quazipfileinfo.cpp

12.74 QuaZipFileInfo64 Struct Reference

Information about a file inside archive (with zip64 support).

`#include <src/ckb/quazip/quazipfileinfo.h>`

Collaboration diagram for QuaZipFileInfo64:

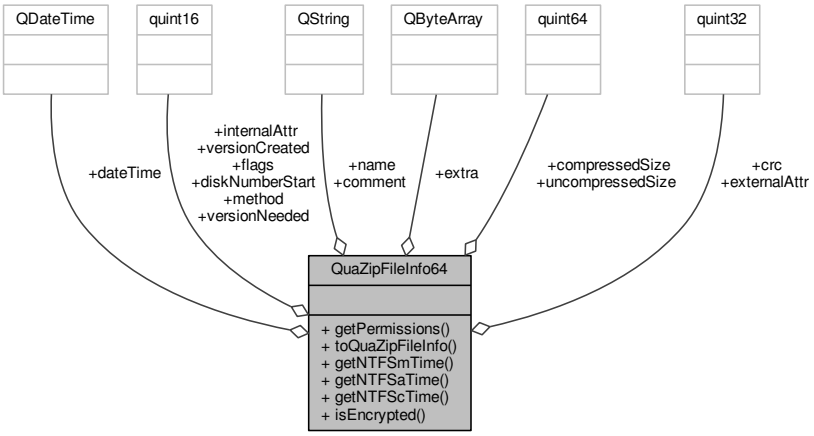

Public Member Functions

- QFile::Permissions getPermissions () const

  Get the file permissions.
- bool toQuaZipFileInfo (QuaZipFileInfo &info) const

  Converts to QuaZipFileInfo.
- QDateTime getNTFSmTime (int *fineTicks=NULL) const

  Returns the NTFS modification time.
- QDateTime getNTFSaTime (int *fineTicks=NULL) const

  Returns the NTFS access time.
- QDateTime getNTFScTime (int *fineTicks=NULL) const

  Returns the NTFS creation time.
- bool isEncrypted () const

  Checks whether the file is encrypted.

Data Fields

- QString name

  File name.
- quint16 versionCreated

  Version created by.
- quint16 versionNeeded

  Version needed to extract.
- quint16 flags

  General purpose flags.
- quint16 method

  Compression method.
- QDateTime dateTime

  Last modification date and time.
- quint32 crc

  CRC.

- quint64 compressedSize

  Compressed file size.
- quint64 uncompressedSize

  Uncompressed file size.
- quint16 diskNumberStart

  Disk number start.
- quint16 internalAttr

  Internal file attributes.
- quint32 externalAttr

  External file attributes.
- QString comment

  Comment.
- QByteArray extra

  Extra field.

12.74.1 Detailed Description

Call QuaZip::getCurrentFileInfo() or QuaZipFile::getFileInfo() to fill this structure.

Definition at line 81 of file quazipfileinfo.h.

12.74.2 Member Function Documentation

12.74.2.1 QDateTime QuaZipFileInfo64::getNTFSaTime (int * *fineTicks* = NULL) const

The getNTFS*Time() functions only work if there is an NTFS extra field present. Otherwise, they all return invalid null timestamps.

Parameters

fineTicks	If not NULL, the fractional part of milliseconds returned there, measured in 100-nanosecond ticks. Will be set to zero if there is no NTFS extra field.

See Also

dateTime
getNTFSmTime()
getNTFScTime()

Returns

The NTFS access time, UTC

Definition at line 168 of file quazipfileinfo.cpp.

References extra, and getNTFSTime().

```
169 {
170     return getNTFSTime(extra, 8, fineTicks);
171 }
```

Here is the call graph for this function:

12.74.2.2 QDateTime QuaZipFileInfo64::getNTFScTime (int * *fineTicks* = NULL) const

The getNTFS*Time() functions only work if there is an NTFS extra field present. Otherwise, they all return invalid null timestamps.

Parameters

fineTicks	If not NULL, the fractional part of milliseconds returned there, measured in 100-nanosecond ticks. Will be set to zero if there is no NTFS extra field.

See Also

dateTime
getNTFSmTime()
getNTFSaTime()

Returns

The NTFS creation time, UTC

Definition at line 173 of file quazipfileinfo.cpp.

References extra, and getNTFSTime().

```
174 {
175     return getNTFSTime(extra, 16, fineTicks);
176 }
```

Here is the call graph for this function:

12.74.2.3 QDateTime QuaZipFileInfo64::getNTFSmTime (int * *fineTicks* = NULL) const

The getNTFS*Time() functions only work if there is an NTFS extra field present. Otherwise, they all return invalid null timestamps.

Parameters

fineTicks	If not NULL, the fractional part of milliseconds returned there, measured in 100-nanosecond ticks. Will be set to zero if there is no NTFS extra field.

See Also

dateTime
getNTFSaTime()
getNTFScTime()

Returns

The NTFS modification time, UTC

Definition at line 163 of file quazipfileinfo.cpp.

References extra, and getNTFSTime().

```
164 {
165     return getNTFSTime(extra, 0, fineTicks);
166 }
```

Here is the call graph for this function:

12.74.2.4 QFile::Permissions QuaZipFileInfo64::getPermissions ( ) const

Returns the high 16 bits of external attributes converted to QFile::Permissions.

Definition at line 57 of file quazipfileinfo.cpp.

References externalAttr, and permissionsFromExternalAttr().

Referenced by JlCompress::extractFile().

```
58 {
59     return permissionsFromExternalAttr(externalAttr);
60 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

12.74.2.5 bool QuaZipFileInfo64::isEncrypted ( ) const [inline]

Definition at line 175 of file quazipfileinfo.h.

```
175 {return (flags & 1) != 0;}
```

12.74.2.6 bool QuaZipFileInfo64::toQuaZipFileInfo (QuaZipFileInfo & *info*) const

If any of the fields are greater than 0xFFFFFFFFu, they are set to 0xFFFFFFFFu exactly, not just truncated. This function should be mainly used for compatibility with the old code expecting QuaZipFileInfo, in the cases when it's impossible or otherwise unadvisable (due to ABI compatibility reasons, for example) to modify that old code to use QuaZipFileInfo64.

Returns

`true` if all fields converted correctly, `false` if an overflow occured.

Definition at line 62 of file quazipfileinfo.cpp.

References QuaZipFileInfo::comment, comment, QuaZipFileInfo::compressedSize, compressedSize, QuaZipFileInfo::crc, crc, QuaZipFileInfo::dateTime, dateTime, QuaZipFileInfo::diskNumberStart, diskNumberStart, QuaZipFileInfo::externalAttr, externalAttr, QuaZipFileInfo::extra, extra, QuaZipFileInfo::flags, flags, QuaZipFileInfo::internalAttr, internalAttr, QuaZipFileInfo::method, method, QuaZipFileInfo::name, name, QuaZipFileInfo::uncompressedSize, uncompressedSize, QuaZipFileInfo::versionCreated, versionCreated, QuaZipFileInfo::versionNeeded, and versionNeeded.

Referenced by QuaZip::getCurrentFileInfo(), and QuaZipFile::getFileInfo().

```
63 {
64     bool noOverflow = true;
65     info.name = name;
66     info.versionCreated = versionCreated;
67     info.versionNeeded = versionNeeded;
68     info.flags = flags;
69     info.method = method;
70     info.dateTime = dateTime;
71     info.crc = crc;
72     if (compressedSize > 0xFFFFFFFFu) {
73         info.compressedSize = 0xFFFFFFFFu;
74         noOverflow = false;
75     } else {
76         info.compressedSize = compressedSize;
77     }
78     if (uncompressedSize > 0xFFFFFFFFu) {
79         info.uncompressedSize = 0xFFFFFFFFu;
80         noOverflow = false;
81     } else {
82         info.uncompressedSize = uncompressedSize;
83     }
84     info.diskNumberStart = diskNumberStart;
85     info.internalAttr = internalAttr;
```

```
86      info.externalAttr = externalAttr;
87      info.comment = comment;
88      info.extra = extra;
89      return noOverflow;
90  }
```

Here is the caller graph for this function:

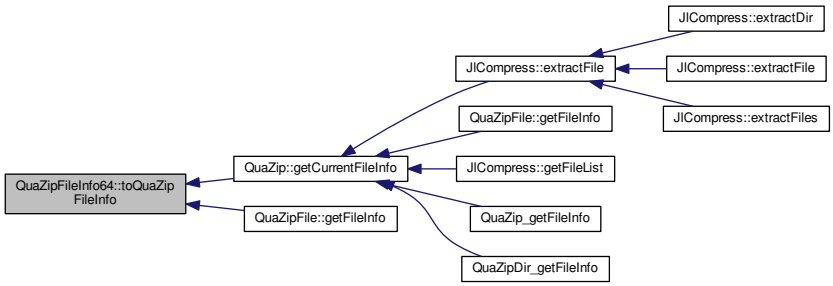

12.74.3 Field Documentation

12.74.3.1 QString QuaZipFileInfo64::comment

Definition at line 114 of file quazipfileinfo.h.

Referenced by QuaZip::getCurrentFileInfo(), and toQuaZipFileInfo().

12.74.3.2 quint64 QuaZipFileInfo64::compressedSize

Definition at line 104 of file quazipfileinfo.h.

Referenced by QuaZip::getCurrentFileInfo(), QuaZipDir_getFileInfo(), and toQuaZipFileInfo().

12.74.3.3 quint32 QuaZipFileInfo64::crc

Definition at line 102 of file quazipfileinfo.h.

Referenced by QuaZip::getCurrentFileInfo(), QuaZipDir_getFileInfo(), and toQuaZipFileInfo().

12.74.3.4 QDateTime QuaZipFileInfo64::dateTime

This is the time stored in the standard ZIP header. This format only allows to store time with 2-second precision, so the seconds will always be even and the milliseconds will always be zero. If you need more precise date and time, you can try to call the getNTFSmTime() function or its siblings, provided that the archive itself contains these NTFS times.

Definition at line 100 of file quazipfileinfo.h.

Referenced by QuaZip::getCurrentFileInfo(), and toQuaZipFileInfo().

12.74.3.5 quint16 QuaZipFileInfo64::diskNumberStart

Definition at line 108 of file quazipfileinfo.h.

Referenced by QuaZip::getCurrentFileInfo(), QuaZipDir_getFileInfo(), and toQuaZipFileInfo().

12.74.3.6 quint32 QuaZipFileInfo64::externalAttr

Definition at line 112 of file quazipfileinfo.h.

Referenced by QuaZip::getCurrentFileInfo(), getPermissions(), QuaZipDir_getFileInfo(), and toQuaZipFileInfo().

12.74.3.7 QByteArray QuaZipFileInfo64::extra

Definition at line 116 of file quazipfileinfo.h.

Referenced by QuaZip::getCurrentFileInfo(), getNTFSaTime(), getNTFScTime(), getNTFSmTime(), and toQuaZipFileInfo().

12.74.3.8 quint16 QuaZipFileInfo64::flags

Definition at line 89 of file quazipfileinfo.h.

Referenced by QuaZip::getCurrentFileInfo(), QuaZipDir_getFileInfo(), and toQuaZipFileInfo().

12.74.3.9 quint16 QuaZipFileInfo64::internalAttr

Definition at line 110 of file quazipfileinfo.h.

Referenced by QuaZip::getCurrentFileInfo(), QuaZipDir_getFileInfo(), and toQuaZipFileInfo().

12.74.3.10 quint16 QuaZipFileInfo64::method

Definition at line 91 of file quazipfileinfo.h.

Referenced by QuaZip::getCurrentFileInfo(), QuaZipDir_getFileInfo(), and toQuaZipFileInfo().

12.74.3.11 QString QuaZipFileInfo64::name

Definition at line 83 of file quazipfileinfo.h.

Referenced by QuaZip::getCurrentFileInfo(), JlCompress::getFileList(), QuaZipDir_getFileInfo(), and toQuaZipFileInfo().

12.74.3.12 quint64 QuaZipFileInfo64::uncompressedSize

Definition at line 106 of file quazipfileinfo.h.

Referenced by QuaZip::getCurrentFileInfo(), QuaZipDir_getFileInfo(), and toQuaZipFileInfo().

12.74.3.13 quint16 QuaZipFileInfo64::versionCreated

Definition at line 85 of file quazipfileinfo.h.

Referenced by QuaZip::getCurrentFileInfo(), QuaZipDir_getFileInfo(), and toQuaZipFileInfo().

12.74.3.14 quint16 QuaZipFileInfo64::versionNeeded

Definition at line 87 of file quazipfileinfo.h.

Referenced by QuaZip::getCurrentFileInfo(), QuaZipDir_getFileInfo(), and toQuaZipFileInfo().

The documentation for this struct was generated from the following files:

- src/ckb/quazip/quazipfileinfo.h
- src/ckb/quazip/quazipfileinfo.cpp

12.75 QuaZipFilePrivate Class Reference

The implementation class for QuaZip.

Collaboration diagram for QuaZipFilePrivate:

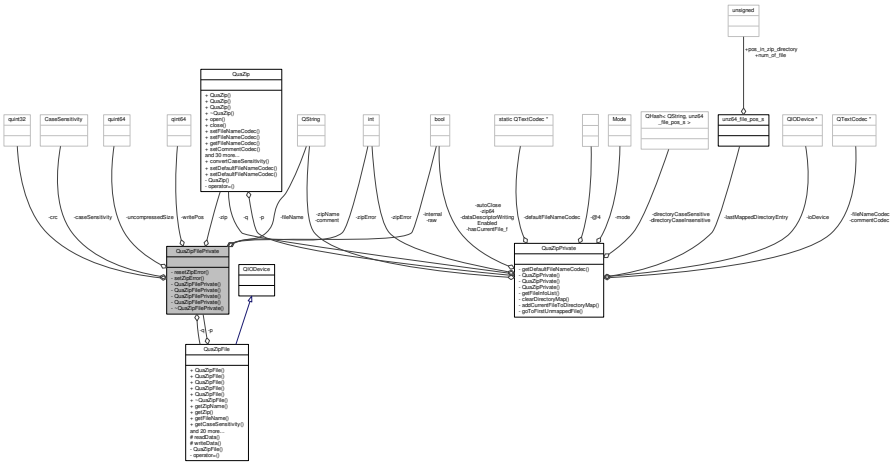

Private Member Functions

- void resetZipError () const

  Resets zipError.
- void setZipError (int zipError) const

  Sets the zip error.
- QuaZipFilePrivate (QuaZipFile *q)

  The constructor for the corresponding QuaZipFile constructor.
- QuaZipFilePrivate (QuaZipFile *q, const QString &zipName)

  The constructor for the corresponding QuaZipFile constructor.
- QuaZipFilePrivate (QuaZipFile *q, const QString &zipName, const QString &fileName, QuaZip::CaseSensitivity cs)

  The constructor for the corresponding QuaZipFile constructor.
- QuaZipFilePrivate (QuaZipFile *q, QuaZip *zip)

  The constructor for the QuaZipFile constructor accepting a file name.
- ~QuaZipFilePrivate ()

  The destructor.

Private Attributes

- QuaZipFile * q

  The pointer to the associated QuaZipFile instance.
- QuaZip * zip

  The QuaZip object to work with.
- QString fileName

  The file name.

- QuaZip::CaseSensitivity caseSensitivity

  Case sensitivity mode.
- bool raw

  Whether this file is opened in the raw mode.
- qint64 writePos

  Write position to keep track of.
- quint64 uncompressedSize

  Uncompressed size to write along with a raw file.
- quint32 crc

  CRC to write along with a raw file.
- bool internal

  Whether zip points to an internal QuaZip instance.
- int zipError

  The last error.

Friends

- class QuaZipFile

12.75.1 Detailed Description

This class contains all the private stuff for the QuaZipFile class, thus allowing to preserve binary compatibility between releases, the technique known as the Pimpl (private implementation) idiom.

Definition at line 37 of file quazipfile.cpp.

12.75.2 Constructor & Destructor Documentation

12.75.2.1 QuaZipFilePrivate::QuaZipFilePrivate (QuaZipFile * *q*) [inline], [private]

Definition at line 78 of file quazipfile.cpp.

```
78                                          :
79       q(q), zip(NULL), internal(true), zipError(UNZ_OK) {}
```

12.75.2.2 QuaZipFilePrivate::QuaZipFilePrivate (QuaZipFile * *q*, const QString & *zipName*) [inline], [private]

Definition at line 81 of file quazipfile.cpp.

```
81                                                                  :
82       q(q), internal(true), zipError(UNZ_OK)
83       {
84         zip=new QuaZip(zipName);
85       }
```

12.75.2.3 QuaZipFilePrivate::QuaZipFilePrivate (QuaZipFile * *q*, const QString & *zipName*, const QString & *fileName*, QuaZip::CaseSensitivity *cs*) [inline], [private]

Definition at line 87 of file quazipfile.cpp.

```
88                                  :
89       q(q), internal(true), zipError(UNZ_OK)
90       {
91         zip=new QuaZip(zipName);
92         this->fileName=fileName;
93         if (this->fileName.startsWith('/'))
94             this->fileName = this->fileName.mid(1);
95         this->caseSensitivity=cs;
96       }
```

12.75.2.4 QuaZipFilePrivate::QuaZipFilePrivate (QuaZipFile * *q*, QuaZip * *zip*) [inline], [private]

Definition at line 98 of file quazipfile.cpp.

```
98                                                          :
99       q(q), zip(zip), internal(false), zipError(UNZ_OK) {}
```

12.75.2.5 QuaZipFilePrivate::~QuaZipFilePrivate ( ) [inline], [private]

Definition at line 101 of file quazipfile.cpp.

```
102     {
103       if (internal)
104         delete zip;
105     }
```

12.75.3 Member Function Documentation

12.75.3.1 void QuaZipFilePrivate::resetZipError ( ) const [inline], [private]

Definition at line 69 of file quazipfile.cpp.

References UNZ_OK.

Referenced by QuaZipFile::close(), and QuaZipFile::open().

```
69 {setZipError(UNZ_OK);}
```

Here is the caller graph for this function:

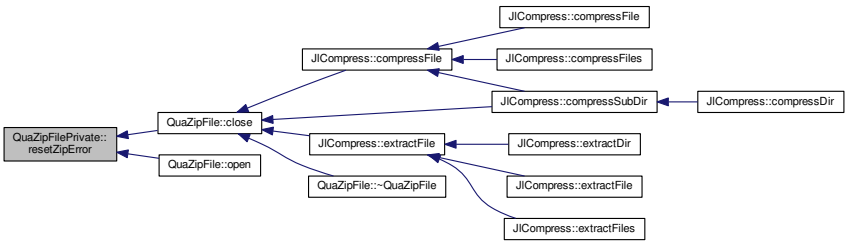

12.75.3.2 void QuaZipFilePrivate::setZipError (int *zipError*) const [private]

This function is marked as const although it changes one field. This allows to call it from const functions that don't change anything by themselves.

Definition at line 211 of file quazipfile.cpp.

References q, UNZ_OK, and zipError.

Referenced by QuaZipFile::close(), QuaZipFile::csize(), QuaZipFile::getActualFileName(), QuaZipFile::getFileInfo(), QuaZipFile::open(), QuaZipFile::readData(), QuaZipFile::usize(), and QuaZipFile::writeData().

```
212 {
213   QuaZipFilePrivate *fakeThis = const_cast<QuaZipFilePrivate*>(this); //
       non-const
214   fakeThis->zipError=zipError;
215   if(zipError==UNZ_OK)
216     q->setErrorString(QString());
217   else
218     q->setErrorString(QuaZipFile::tr("ZIP/UNZIP API error %1").arg(zipError));
219 }
```

Here is the caller graph for this function:

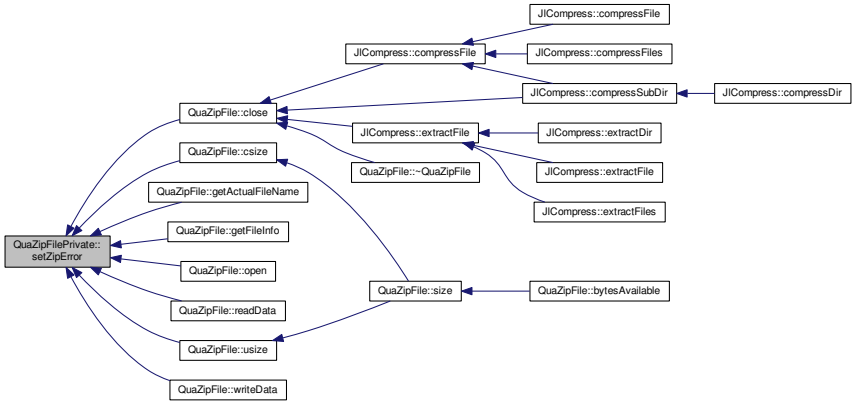

12.75.4 Friends And Related Function Documentation

12.75.4.1 friend class QuaZipFile [friend]

Definition at line 38 of file quazipfile.cpp.

12.75.5 Field Documentation

12.75.5.1 QuaZip::CaseSensitivity QuaZipFilePrivate::caseSensitivity [private]

Definition at line 47 of file quazipfile.cpp.

Referenced by QuaZipFile::getCaseSensitivity(), QuaZipFile::open(), and QuaZipFile::setFileName().

12.75.5.2 quint32 QuaZipFilePrivate::crc [private]

Definition at line 59 of file quazipfile.cpp.

Referenced by QuaZipFile::close(), and QuaZipFile::open().

12.75.5.3 QString QuaZipFilePrivate::fileName [private]

Definition at line 45 of file quazipfile.cpp.

Referenced by QuaZipFile::getFileName(), QuaZipFile::open(), QuaZipFile::setFileName(), and QuaZipFile::setZip().

12.75.5.4 bool QuaZipFilePrivate::internal [private]

This is true if the archive was opened by name, rather than by supplying an existing QuaZip instance.

Definition at line 65 of file quazipfile.cpp.

Referenced by QuaZipFile::close(), QuaZipFile::getZip(), QuaZipFile::open(), QuaZipFile::setFileName(), QuaZipFile::setZip(), and QuaZipFile::setZipName().

12.75.5.5 QuaZipFile* QuaZipFilePrivate::q [private]

Definition at line 41 of file quazipfile.cpp.

Referenced by setZipError().

12.75.5.6 bool QuaZipFilePrivate::raw [private]

Definition at line 49 of file quazipfile.cpp.

Referenced by QuaZipFile::isRaw(), QuaZipFile::open(), and QuaZipFile::size().

12.75.5.7 quint64 QuaZipFilePrivate::uncompressedSize [private]

Definition at line 57 of file quazipfile.cpp.

Referenced by QuaZipFile::close(), and QuaZipFile::open().

12.75.5.8 qint64 QuaZipFilePrivate::writePos [private]

QIODevice::pos() is broken for non-seekable devices, so we need our own position.

Definition at line 55 of file quazipfile.cpp.

Referenced by QuaZipFile::open(), QuaZipFile::pos(), QuaZipFile::size(), and QuaZipFile::writeData().

12.75.5.9 QuaZip* QuaZipFilePrivate::zip [private]

Definition at line 43 of file quazipfile.cpp.

Referenced by QuaZipFile::atEnd(), QuaZipFile::close(), QuaZipFile::csize(), QuaZipFile::getActualFileName(), QuaZipFile::getFileInfo(), QuaZipFile::getZip(), QuaZipFile::getZipName(), QuaZipFile::open(), QuaZipFile::pos(), QuaZipFile::readData(), QuaZipFile::setFileName(), QuaZipFile::setZip(), QuaZipFile::setZipName(), QuaZipFile::usize(), and QuaZipFile::writeData().

12.75.5.10 int QuaZipFilePrivate::zipError [private]

Definition at line 67 of file quazipfile.cpp.

Referenced by QuaZipFile::close(), QuaZipFile::csize(), QuaZipFile::getFileInfo(), QuaZipFile::getZipError(), QuaZipFile::open(), setZipError(), QuaZipFile::usize(), and QuaZipFile::writeData().

The documentation for this class was generated from the following file:

- src/ckb/quazip/quazipfile.cpp

12.76 QuaZipNewInfo Struct Reference

Information about a file to be created.

`#include <src/ckb/quazip/quazipnewinfo.h>`

Collaboration diagram for QuaZipNewInfo:

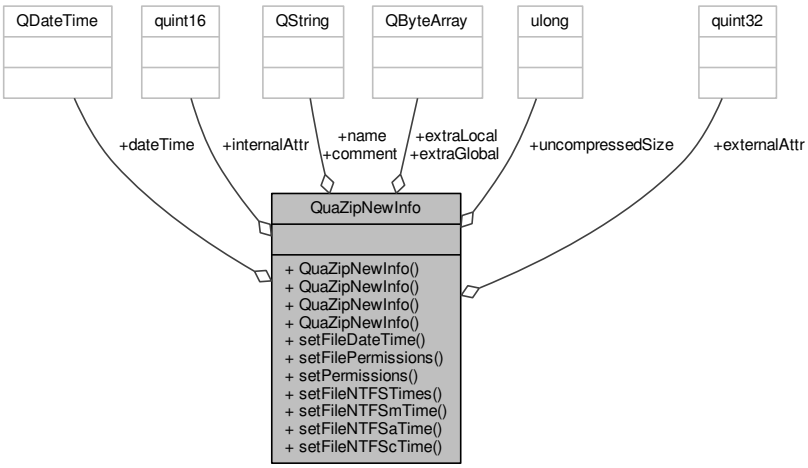

Public Member Functions

- QuaZipNewInfo (const QString &name)

  Constructs QuaZipNewInfo instance.
- QuaZipNewInfo (const QString &name, const QString &file)

  Constructs QuaZipNewInfo instance.
- QuaZipNewInfo (const QuaZipFileInfo &existing)

  Initializes the new instance from existing file info.
- QuaZipNewInfo (const QuaZipFileInfo64 &existing)

  Initializes the new instance from existing file info.
- void setFileDateTime (const QString &file)

  Sets the file timestamp from the existing file.
- void setFilePermissions (const QString &file)

  Sets the file permissions from the existing file.
- void setPermissions (QFile::Permissions permissions)

  Sets the file permissions.
- void setFileNTFSTimes (const QString &fileName)

  Sets the NTFS times from an existing file.
- void setFileNTFSmTime (const QDateTime &mTime, int fineTicks=0)

  Sets the NTFS modification time.
- void setFileNTFSaTime (const QDateTime &aTime, int fineTicks=0)

  Sets the NTFS access time.
- void setFileNTFScTime (const QDateTime &cTime, int fineTicks=0)

  Sets the NTFS creation time.

Data Fields

- QString name

  File name.
- QDateTime dateTime

  File timestamp.
- quint16 internalAttr

  File internal attributes.
- quint32 externalAttr

  File external attributes.
- QString comment

  File comment.
- QByteArray extraLocal

  File local extra field.
- QByteArray extraGlobal

  File global extra field.
- ulong uncompressedSize

  Uncompressed file size.

12.76.1 Detailed Description

This structure holds information about a file to be created inside ZIP archive. At least name should be set to something correct before passing this structure to QuaZipFile::open(OpenMode,const QuaZipNewInfo&,int,int,bool).

Zip64 support of this structure is slightly limited: in the raw mode (when a pre-compressed file is written into a ZIP file as-is), it is necessary to specify the uncompressed file size and the appropriate field is 32 bit. Since the raw mode is used extremely rare, there is no real need to have a separate QuaZipNewInfo64 structure like QuaZipFileInfo64. It may be added in the future though, if there is a demand for the raw mode with zip64 archives.

Definition at line 50 of file quazipnewinfo.h.

12.76.2 Constructor & Destructor Documentation

12.76.2.1 QuaZipNewInfo::QuaZipNewInfo (const QString & *name*)

Initializes name with *name*, dateTime with current date and time. Attributes are initialized with zeros, comment and extra field with null values.

Definition at line 79 of file quazipnewinfo.cpp.

```
79                                                  :
80   name(name), dateTime(QDateTime::currentDateTime()),
      internalAttr(0), externalAttr(0),
81   uncompressedSize(0)
82 {
83 }
```

12.76.2.2 QuaZipNewInfo::QuaZipNewInfo (const QString & *name*, const QString & *file*)

Initializes name with *name*. Timestamp and permissions are taken from the specified file. If the *file* does not exists or its timestamp is inaccessible (e. g. you do not have read permission for the directory file in), uses current time and zero permissions. Other attributes are initialized with zeros, comment and extra field with null values.

See Also

setFileDateTime()

Definition at line 85 of file quazipnewinfo.cpp.

References dateTime, and QuaZipNewInfo_setPermissions().

```
85                                                                    :
86   name(name), internalAttr(0), externalAttr(0),
      uncompressedSize(0)
87 {
88   QFileInfo info(file);
89   QDateTime lm = info.lastModified();
90   if (!info.exists()) {
91     dateTime = QDateTime::currentDateTime();
92   } else {
93     dateTime = lm;
94     QuaZipNewInfo_setPermissions(this, info.permissions(), info.isDir());
95   }
96 }
```

Here is the call graph for this function:

12.76.2.3 QuaZipNewInfo::QuaZipNewInfo (const QuaZipFileInfo & *existing*)

Mainly used when copying files between archives.

Both extra fields are initialized to existing.extra. QuaZipNewInfo

Parameters

existing	

Definition at line 69 of file quazipnewinfo.cpp.

References QuaZipNewInfo_init().

```
70 {
71     QuaZipNewInfo_init(*this, existing);
72 }
```

Here is the call graph for this function:



12.76.2.4 QuaZipNewInfo::QuaZipNewInfo (const QuaZipFileInfo64 & *existing*)

Mainly used when copying files between archives.

Both extra fields are initialized to existing.extra. QuaZipNewInfo

Parameters

existing	

Definition at line 74 of file quazipnewinfo.cpp.

References QuaZipNewInfo_init().

```
75 {
76     QuaZipNewInfo_init(*this, existing);
77 }
```

Here is the call graph for this function:



12.76.3 Member Function Documentation

12.76.3.1 void QuaZipNewInfo::setFileDateTime (const QString & *file*)

Use this function to set the file timestamp from the existing file. Use it like this:

```
QuaZipFile zipFile(&zip);
QFile file("file-to-add");
file.open(QIODevice::ReadOnly);
QuaZipNewInfo info("file-name-in-archive");
info.setFileDateTime("file-to-add"); // take the timestamp from file
zipFile.open(QIODevice::WriteOnly, info);
```

This function does not change dateTime if some error occured (e. g. file is inaccessible).

Definition at line 98 of file quazipnewinfo.cpp.

References dateTime.

```
99 {
100   QFileInfo info(file);
101   QDateTime lm = info.lastModified();
102   if (info.exists())
103     dateTime = lm;
104 }
```

12.76.3.2 void QuaZipNewInfo::setFileNTFSaTime (const QDateTime & *aTime,* int *fineTicks* = 0)

The time is written into the NTFS record in both the local and the global extra fields, updating the existing record if there is one, or creating a new one and appending it to the end of each extra field. When updating an existing record, all other fields are left intact.

Parameters

aTime	The new access time.
fineTicks	The fractional part of milliseconds, in 100-nanosecond ticks (i. e. 9999 ticks = 999.9 microsecond). Values greater than 9999 will add milliseconds or even seconds, but this can be confusing and therefore is discouraged.

Definition at line 267 of file quazipnewinfo.cpp.

References extraGlobal, extraLocal, and setNTFSTime().

Referenced by setFileNTFSTimes().

```
268 {
269     setNTFSTime(extraLocal, aTime, 8, fineTicks);
270     setNTFSTime(extraGlobal, aTime, 8, fineTicks);
271 }
```

Here is the call graph for this function:

Here is the caller graph for this function:

12.76.3.3 void QuaZipNewInfo::setFileNTFScTime (const QDateTime & *cTime*, int *fineTicks* = 0)

The time is written into the NTFS record in both the local and the global extra fields, updating the existing record if there is one, or creating a new one and appending it to the end of each extra field. When updating an existing record, all other fields are left intact.

Parameters

cTime	The new creation time.
fineTicks	The fractional part of milliseconds, in 100-nanosecond ticks (i. e. 9999 ticks = 999.9 microsecond). Values greater than 9999 will add milliseconds or even seconds, but this can be confusing and therefore is discouraged.

Definition at line 273 of file quazipnewinfo.cpp.

References extraGlobal, extraLocal, and setNTFSTime().

Referenced by setFileNTFSTimes().

```
274 {
275     setNTFSTime(extraLocal, cTime, 16, fineTicks);
276     setNTFSTime(extraGlobal, cTime, 16, fineTicks);
277 }
```

Here is the call graph for this function:

Here is the caller graph for this function:

12.76.3.4 void QuaZipNewInfo::setFileNTFSmTime (const QDateTime & *mTime*, int *fineTicks* = 0)

The time is written into the NTFS record in both the local and the global extra fields, updating the existing record if there is one, or creating a new one and appending it to the end of each extra field. When updating an existing record, all other fields are left intact.

Parameters

mTime	The new modification time.
fineTicks	The fractional part of milliseconds, in 100-nanosecond ticks (i. e. 9999 ticks = 999.9 microsecond). Values greater than 9999 will add milliseconds or even seconds, but this can be confusing and therefore is discouraged.

Definition at line 261 of file quazipnewinfo.cpp.

References extraGlobal, extraLocal, and setNTFSTime().

Referenced by setFileNTFSTimes().

```
262 {
263     setNTFSTime(extraLocal, mTime, 0, fineTicks);
264     setNTFSTime(extraGlobal, mTime, 0, fineTicks);
265 }
```

Here is the call graph for this function:

Here is the caller graph for this function:

12.76.3.5 void QuaZipNewInfo::setFileNTFSTimes (const QString & *fileName*)

If the file doesn't exist, a warning is printed to the stderr and nothing is done. Otherwise, all three times, as reported by QFileInfo::lastModified(), QFileInfo::lastRead() and QFileInfo::created(), are written to the NTFS extra field record.

The NTFS record is written to both the local and the global extra fields, updating the existing record if there is one, or creating a new one and appending it to the end of each extra field.

The microseconds will be zero, as they aren't reported by QFileInfo.

Parameters

fileName	

Definition at line 118 of file quazipnewinfo.cpp.

References setFileNTFSaTime(), setFileNTFScTime(), and setFileNTFSmTime().

```
119 {
120     QFileInfo fi(fileName);
121     if (!fi.exists()) {
122         qWarning("QuaZipNewInfo::setFileNTFSTimes(): '%s' doesn't exist",
123                  fileName.toUtf8().constData());
124         return;
125     }
126     setFileNTFSmTime(fi.lastModified());
127     setFileNTFSaTime(fi.lastRead());
128     setFileNTFScTime(fi.created());
129 }
```

Here is the call graph for this function:

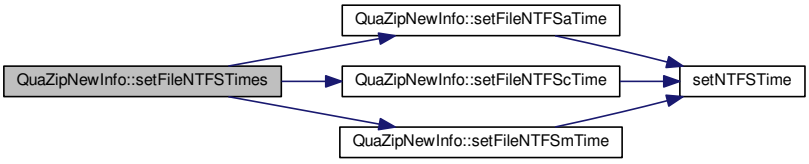

12.76.3.6 void QuaZipNewInfo::setFilePermissions (const QString & *file*)

Takes permissions from the file and sets the high 16 bits of external attributes. Uses QFileInfo to get permissions on all platforms.

Definition at line 106 of file quazipnewinfo.cpp.

References QuaZipNewInfo_setPermissions().

```
107 {
108     QFileInfo info = QFileInfo(file);
109     QFile::Permissions perm = info.permissions();
110     QuaZipNewInfo_setPermissions(this, perm, info.isDir());
111 }
```

Here is the call graph for this function:

12.76.3.7 void QuaZipNewInfo::setPermissions (QFile::Permissions *permissions*)

Modifies the highest 16 bits of external attributes. The type part is set to dir if the name ends with a slash, and to regular file otherwise.

Definition at line 113 of file quazipnewinfo.cpp.

References name, and QuaZipNewInfo_setPermissions().

```
114 {
115     QuaZipNewInfo_setPermissions(this, permissions,
    name.endsWith('/'));
116 }
```

Here is the call graph for this function:

12.76.4 Field Documentation

12.76.4.1 QString QuaZipNewInfo::comment

Will be encoded using QuaZip::getCommentCodec().

Definition at line 75 of file quazipnewinfo.h.

Referenced by QuaZipFile::open().

12.76.4.2 QDateTime QuaZipNewInfo::dateTime

This is the last file modification date and time. Will be stored in the archive central directory. It is a good practice to set it to the source file timestamp instead of archive creating time. Use setFileDateTime() or QuaZipNewInfo(const QString&, const QString&).

Definition at line 62 of file quazipnewinfo.h.

Referenced by QuaZipFile::open(), QuaZipNewInfo(), and setFileDateTime().

12.76.4.3 quint32 QuaZipNewInfo::externalAttr

The highest 16 bits contain Unix file permissions and type (dir or file). The constructor QuaZipNewInfo(const QString&, const QString&) takes permissions from the provided file.

Definition at line 71 of file quazipnewinfo.h.

Referenced by QuaZipFile::open(), and QuaZipNewInfo_setPermissions().

12.76.4.4 QByteArray QuaZipNewInfo::extraGlobal

Definition at line 79 of file quazipnewinfo.h.

Referenced by QuaZipFile::open(), setFileNTFSaTime(), setFileNTFScTime(), and setFileNTFSmTime().

12.76.4.5 QByteArray QuaZipNewInfo::extraLocal

Definition at line 77 of file quazipnewinfo.h.

Referenced by QuaZipFile::open(), setFileNTFSaTime(), setFileNTFScTime(), and setFileNTFSmTime().

12.76.4.6 quint16 QuaZipNewInfo::internalAttr

Definition at line 64 of file quazipnewinfo.h.

Referenced by QuaZipFile::open().

12.76.4.7 QString QuaZipNewInfo::name

This field holds file name inside archive, including path relative to archive root.

Definition at line 55 of file quazipnewinfo.h.

Referenced by QuaZipFile::open(), and setPermissions().

12.76.4.8 ulong QuaZipNewInfo::uncompressedSize

This is only needed if you are using raw file zipping mode, i. e. adding precompressed file in the zip archive.

Definition at line 84 of file quazipnewinfo.h.

Referenced by QuaZipFile::open().

The documentation for this struct was generated from the following files:

- src/ckb/quazip/quazipnewinfo.h
- src/ckb/quazip/quazipnewinfo.cpp

12.77 QuaZipPrivate Class Reference

All the internal stuff for the QuaZip class.

Collaboration diagram for QuaZipPrivate:

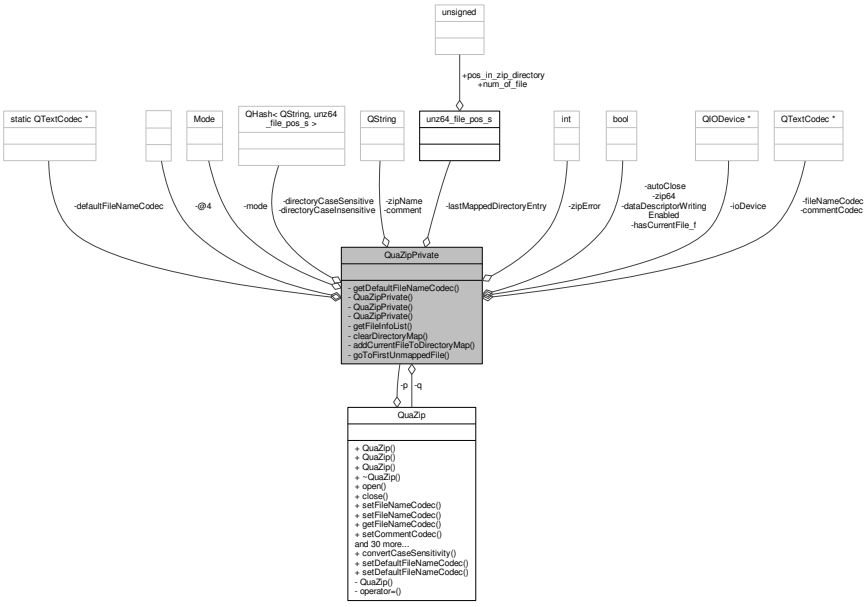

Private Member Functions

- QTextCodec * getDefaultFileNameCodec ()
- QuaZipPrivate (QuaZip *q)

  The constructor for the corresponding QuaZip constructor.
- QuaZipPrivate (QuaZip *q, const QString &zipName)

  The constructor for the corresponding QuaZip constructor.
- QuaZipPrivate (QuaZip *q, QIODevice *ioDevice)

  The constructor for the corresponding QuaZip constructor.
- template<typename TFileInfo >
  bool getFileInfoList (QList< TFileInfo > *result) const

  Returns either a list of file names or a list of QuaZipFileInfo.
- void clearDirectoryMap ()

  Stores map of filenames and file locations for unzipping.
- void addCurrentFileToDirectoryMap (const QString &fileName)
- bool goToFirstUnmappedFile ()

Private Attributes

- QuaZip * q

  The pointer to the corresponding QuaZip instance.
- QTextCodec * fileNameCodec

  The codec for file names.
- QTextCodec * commentCodec

  The codec for comments.
- QString zipName

  The archive file name.
- QIODevice * ioDevice

  The device to access the archive.

- QString comment

  The global comment.
- QuaZip::Mode mode

  The open mode.
- union {
  unzFile **unzFile_f**
  The internal handle for UNZIP modes.
  zipFile **zipFile_f**
  The internal handle for ZIP modes.
  };
- bool hasCurrentFile_f

  Whether a current file is set.
- int zipError

  The last error.
- bool dataDescriptorWritingEnabled

  Whether the data descriptor writing mode is enabled.
- bool zip64

  The zip64 mode.
- bool autoClose

  The auto-close flag.
- QHash< QString, unz64_file_pos > directoryCaseSensitive
- QHash< QString, unz64_file_pos > directoryCaseInsensitive
- unz64_file_pos lastMappedDirectoryEntry

Static Private Attributes

- static QTextCodec * defaultFileNameCodec = NULL

Friends

- class QuaZip

12.77.1 Detailed Description

This class keeps all the private stuff for the QuaZip class so it can be changed without breaking binary compatibility, according to the Pimpl idiom.

Definition at line 39 of file quazip.cpp.

12.77.2 Constructor & Destructor Documentation

12.77.2.1 QuaZipPrivate::QuaZipPrivate (QuaZip * *q*) [inline], [private]

Definition at line 81 of file quazip.cpp.

References lastMappedDirectoryEntry, unz64_file_pos_s::num_of_file, and unz64_file_pos_s::pos_in_zip_directory.

```
81                                  :
82       q(q),
83       fileNameCodec(getDefaultFileNameCodec()),
84       commentCodec(QTextCodec::codecForLocale()),
85       ioDevice(NULL),
86       mode(QuaZip::mdNotOpen),
```

```
87        hasCurrentFile_f(false),
88        zipError(UNZ_OK),
89        dataDescriptorWritingEnabled(true),
90        zip64(false),
91        autoClose(true)
92    {
93        lastMappedDirectoryEntry.num_of_file = 0;
94        lastMappedDirectoryEntry.pos_in_zip_directory = 0;
95    }
```

12.77.2.2 QuaZipPrivate::QuaZipPrivate (QuaZip * *q*, const QString & *zipName*) [inline], [private]

Definition at line 97 of file quazip.cpp.

References lastMappedDirectoryEntry, unz64_file_pos_s::num_of_file, and unz64_file_pos_s::pos_in_zip_directory.

```
97                                                    :
98        q(q),
99        fileNameCodec(getDefaultFileNameCodec()),
100       commentCodec(QTextCodec::codecForLocale()),
101       zipName(zipName),
102       ioDevice(NULL),
103       mode(QuaZip::mdNotOpen),
104       hasCurrentFile_f(false),
105       zipError(UNZ_OK),
106       dataDescriptorWritingEnabled(true),
107       zip64(false),
108       autoClose(true)
109   {
110       lastMappedDirectoryEntry.num_of_file = 0;
111       lastMappedDirectoryEntry.pos_in_zip_directory = 0;
112   }
```

12.77.2.3 QuaZipPrivate::QuaZipPrivate (QuaZip * *q*, QIODevice * *ioDevice*) [inline], [private]

Definition at line 114 of file quazip.cpp.

References lastMappedDirectoryEntry, unz64_file_pos_s::num_of_file, and unz64_file_pos_s::pos_in_zip_directory.

```
114                                                    :
115       q(q),
116       fileNameCodec(getDefaultFileNameCodec()),
117       commentCodec(QTextCodec::codecForLocale()),
118       ioDevice(ioDevice),
119       mode(QuaZip::mdNotOpen),
120       hasCurrentFile_f(false),
121       zipError(UNZ_OK),
122       dataDescriptorWritingEnabled(true),
123       zip64(false),
124       autoClose(true)
125   {
126       lastMappedDirectoryEntry.num_of_file = 0;
127       lastMappedDirectoryEntry.pos_in_zip_directory = 0;
128   }
```

12.77.3 Member Function Documentation

12.77.3.1 void QuaZipPrivate::addCurrentFileToDirectoryMap (const QString & *fileName*) [inline], [private]

Definition at line 153 of file quazip.cpp.

References directoryCaseInsensitive, directoryCaseSensitive, hasCurrentFile_f, lastMappedDirectoryEntry, unz64_file_pos_s::pos_in_zip_directory, and unzGetFilePos64().

Referenced by QuaZip::getCurrentFileInfo(), and QuaZip::getCurrentFileName().

```
154 {
155     if (!hasCurrentFile_f || fileName.isEmpty()) {
156         return;
157     }
158     // Adds current file to filename map as fileName
159     unz64_file_pos fileDirectoryPos;
160     unzGetFilePos64(unzFile_f, &fileDirectoryPos);
161     directoryCaseSensitive.insert(fileName, fileDirectoryPos);
162     // Only add lowercase to directory map if not already there
163     // ensures only map the first one seen
164     QString lower = fileName.toLower();
165     if (!directoryCaseInsensitive.contains(lower))
166         directoryCaseInsensitive.insert(lower, fileDirectoryPos);
167     // Mark last one
168     if (fileDirectoryPos.pos_in_zip_directory >
      lastMappedDirectoryEntry.pos_in_zip_directory)
169         lastMappedDirectoryEntry = fileDirectoryPos;
170 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

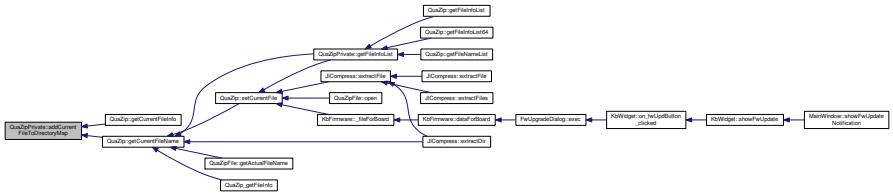

12.77.3.2 void QuaZipPrivate::clearDirectoryMap ( ) [inline],[private]

Definition at line 145 of file quazip.cpp.

References directoryCaseInsensitive, directoryCaseSensitive, lastMappedDirectoryEntry, unz64_file_pos_s::num_of_file, and unz64_file_pos_s::pos_in_zip_directory.

Referenced by QuaZip::close().

```
146 {
147     directoryCaseInsensitive.clear();
148     directoryCaseSensitive.clear();
149     lastMappedDirectoryEntry.num_of_file = 0;
150     lastMappedDirectoryEntry.pos_in_zip_directory = 0;
151 }
```

Here is the caller graph for this function:

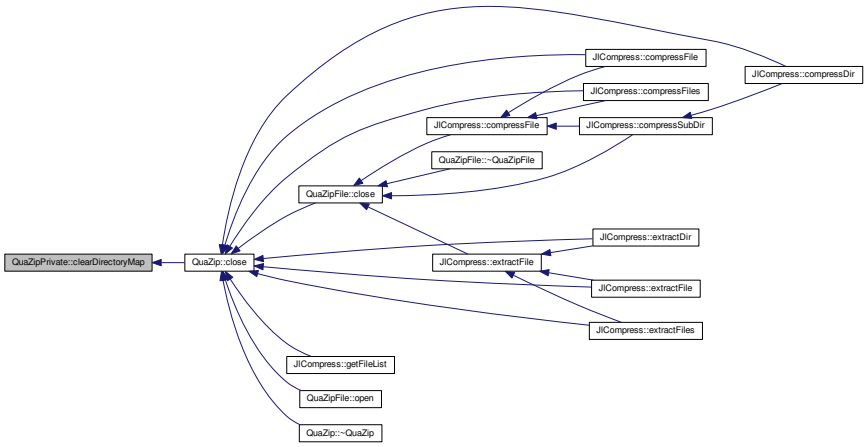

12.77.3.3 QTextCodec* QuaZipPrivate::getDefaultFileNameCodec ( ) [inline], [private]

Definition at line 72 of file quazip.cpp.

References defaultFileNameCodec.

```
73     {
74         if (defaultFileNameCodec == NULL) {
75             return QTextCodec::codecForLocale();
76         } else {
77             return defaultFileNameCodec;
78         }
79     }
```

12.77.3.4 template<typename TFileInfo > bool QuaZipPrivate::getFileInfoList (QList< TFileInfo > * *result*) const [private]

Definition at line 687 of file quazip.cpp.

References QuaZip::getCurrentFileName(), QuaZip::goToFirstFile(), QuaZip::goToNextFile(), QuaZip::hasCurrentFile(), QuaZip::mdUnzip, mode, q, QuaZip::setCurrentFile(), UNZ_OK, and zipError.

Referenced by QuaZip::getFileInfoList(), QuaZip::getFileInfoList64(), and QuaZip::getFileNameList().

```
688 {
689   QuaZipPrivate *fakeThis=const_cast<QuaZipPrivate*>(this);
690   fakeThis->zipError=UNZ_OK;
691   if (mode!=QuaZip::mdUnzip) {
692     qWarning("QuaZip::getFileNameList/getFileInfoList(): "
693              "ZIP is not open in mdUnzip mode");
694     return false;
695   }
696   QString currentFile;
697   if (q->hasCurrentFile()) {
698       currentFile = q->getCurrentFileName();
699   }
700   if (q->goToFirstFile()) {
701       do {
702           bool ok;
703           result->append(QuaZip_getFileInfo<TFileInfo>(q, &ok));
704           if (!ok)
705               return false;
706       } while (q->goToNextFile());
707   }
708   if (zipError != UNZ_OK)
709       return false;
```

```
710   if (currentFile.isEmpty()) {
711       if (!q->goToFirstFile())
712           return false;
713   } else {
714       if (!q->setCurrentFile(currentFile))
715           return false;
716   }
717   return true;
718 }
```

Here is the call graph for this function:

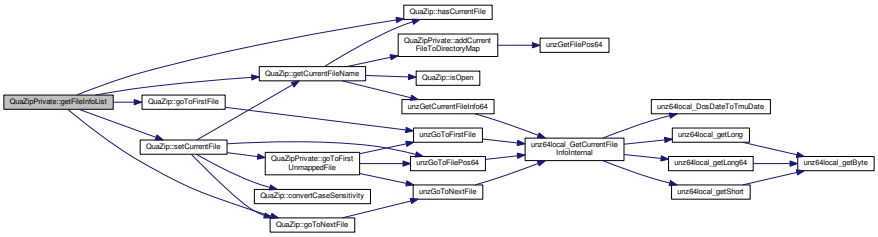

Here is the caller graph for this function:

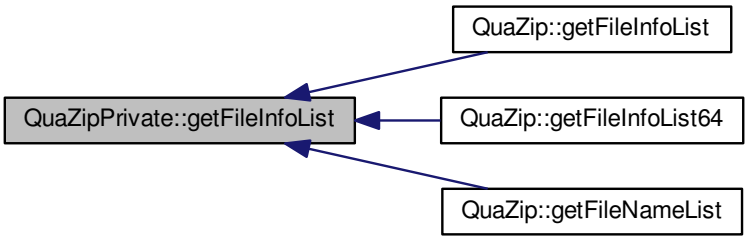

12.77.3.5 bool QuaZipPrivate::goToFirstUnmappedFile ( ) [private]

Definition at line 172 of file quazip.cpp.

References hasCurrentFile_f, lastMappedDirectoryEntry, QuaZip::mdUnzip, mode, unz64_file_pos_s::pos_in_zip_-directory, UNZ_END_OF_LIST_OF_FILE, UNZ_OK, unzGoToFilePos64(), unzGoToFirstFile(), unzGoToNextFile(), and zipError.

Referenced by QuaZip::setCurrentFile().

```
173 {
174     zipError = UNZ_OK;
175     if (mode != QuaZip::mdUnzip) {
176         qWarning("QuaZipPrivate::goToNextUnmappedFile(): ZIP is not open in mdUnzip mode");
177         return false;
178     }
179     // If not mapped anything, go to beginning
180     if (lastMappedDirectoryEntry.pos_in_zip_directory == 0) {
181         unzGoToFirstFile(unzFile_f);
182     } else {
183         // Goto the last one mapped, plus one
184         unzGoToFilePos64(unzFile_f, &lastMappedDirectoryEntry);
185         unzGoToNextFile(unzFile_f);
186     }
```

```
187     hasCurrentFile_f=zipError==UNZ_OK;
188     if(zipError==UNZ_END_OF_LIST_OF_FILE)
189       zipError=UNZ_OK;
190     return hasCurrentFile_f;
191 }
```

Here is the call graph for this function:

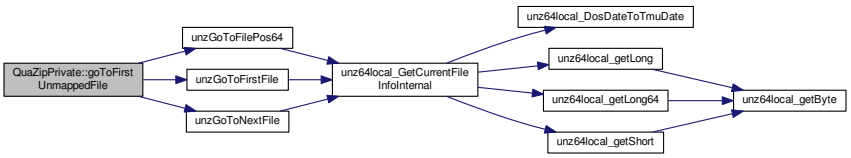

Here is the caller graph for this function:

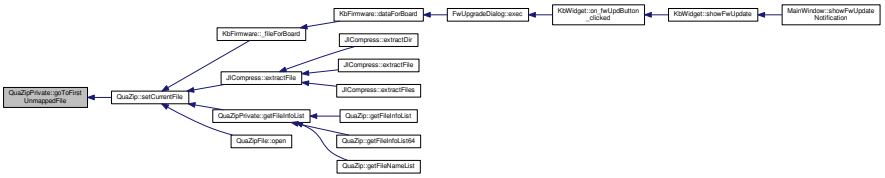

12.77.4 Friends And Related Function Documentation

12.77.4.1 friend class QuaZip [friend]

Definition at line 40 of file quazip.cpp.

12.77.5 Field Documentation

12.77.5.1 union { ... } [private]

12.77.5.2 bool QuaZipPrivate::autoClose [private]

Definition at line 71 of file quazip.cpp.

Referenced by QuaZip::isAutoClose(), QuaZip::open(), and QuaZip::setAutoClose().

12.77.5.3 QString QuaZipPrivate::comment [private]

Definition at line 53 of file quazip.cpp.

Referenced by QuaZip::close(), and QuaZip::setComment().

12.77.5.4 QTextCodec* QuaZipPrivate::commentCodec [private]

Definition at line 47 of file quazip.cpp.

Referenced by QuaZip::close(), QuaZip::getComment(), QuaZip::getCommentCodec(), QuaZip::getCurrentFileInfo(), and QuaZip::setCommentCodec().

12.77.5.5 bool QuaZipPrivate::dataDescriptorWritingEnabled [private]

Definition at line 67 of file quazip.cpp.

Referenced by QuaZip::isDataDescriptorWritingEnabled(), QuaZip::open(), and QuaZip::setDataDescriptorWritingEnabled().

12.77.5.6 QTextCodec * QuaZipPrivate::defaultFileNameCodec = NULL [static], [private]

Definition at line 140 of file quazip.cpp.

Referenced by getDefaultFileNameCodec(), and QuaZip::setDefaultFileNameCodec().

12.77.5.7 QHash<QString, unz64_file_pos> QuaZipPrivate::directoryCaseInsensitive [private]

Definition at line 138 of file quazip.cpp.

Referenced by addCurrentFileToDirectoryMap(), clearDirectoryMap(), and QuaZip::setCurrentFile().

12.77.5.8 QHash<QString, unz64_file_pos> QuaZipPrivate::directoryCaseSensitive [private]

Definition at line 137 of file quazip.cpp.

Referenced by addCurrentFileToDirectoryMap(), clearDirectoryMap(), and QuaZip::setCurrentFile().

12.77.5.9 QTextCodec* QuaZipPrivate::fileNameCodec [private]

Definition at line 45 of file quazip.cpp.

Referenced by QuaZip::getCurrentFileInfo(), QuaZip::getCurrentFileName(), QuaZip::getFileNameCodec(), and QuaZip::setFileNameCodec().

12.77.5.10 bool QuaZipPrivate::hasCurrentFile_f [private]

Definition at line 63 of file quazip.cpp.

Referenced by addCurrentFileToDirectoryMap(), QuaZip::goToFirstFile(), goToFirstUnmappedFile(), QuaZip::goToNextFile(), QuaZip::hasCurrentFile(), and QuaZip::setCurrentFile().

12.77.5.11 QIODevice* QuaZipPrivate::ioDevice [private]

Definition at line 51 of file quazip.cpp.

Referenced by QuaZip::close(), QuaZip::getIoDevice(), QuaZip::open(), QuaZip::setIoDevice(), and QuaZip::setZipName().

12.77.5.12 unz64_file_pos QuaZipPrivate::lastMappedDirectoryEntry [private]

Definition at line 139 of file quazip.cpp.

Referenced by addCurrentFileToDirectoryMap(), clearDirectoryMap(), goToFirstUnmappedFile(), and QuaZipPrivate().

12.77.5.13 QuaZip::Mode QuaZipPrivate::mode [private]

Definition at line 55 of file quazip.cpp.

Referenced by QuaZip::close(), QuaZip::getComment(), QuaZip::getCurrentFileInfo(), QuaZip::getCurrentFileName(), QuaZip::getEntriesCount(), getFileInfoList(), QuaZip::getMode(), QuaZip::goToFirstFile(), goToFirstUnmappedFile(), QuaZip::goToNextFile(), QuaZip::isOpen(), QuaZip::open(), and QuaZip::setCurrentFile().

12.77.5.14 QuaZip* QuaZipPrivate::q [private]

Definition at line 43 of file quazip.cpp.

Referenced by getFileInfoList().

12.77.5.15 bool QuaZipPrivate::zip64 [private]

Definition at line 69 of file quazip.cpp.

Referenced by QuaZip::isZip64Enabled(), and QuaZip::setZip64Enabled().

12.77.5.16 int QuaZipPrivate::zipError [private]

Definition at line 65 of file quazip.cpp.

Referenced by QuaZip::close(), QuaZip::getComment(), QuaZip::getCurrentFileInfo(), QuaZip::getCurrentFileName(), QuaZip::getEntriesCount(), getFileInfoList(), QuaZip::getZipError(), QuaZip::goToFirstFile(), goToFirstUnmappedFile(), QuaZip::goToNextFile(), QuaZip::open(), and QuaZip::setCurrentFile().

12.77.5.17 QString QuaZipPrivate::zipName [private]

Definition at line 49 of file quazip.cpp.

Referenced by QuaZip::close(), QuaZip::getIoDevice(), QuaZip::getZipName(), QuaZip::open(), QuaZip::setIoDevice(), and QuaZip::setZipName().

The documentation for this class was generated from the following file:

- src/ckb/quazip/quazip.cpp

12.78 QWidget Class Reference

Inheritance diagram for QWidget:

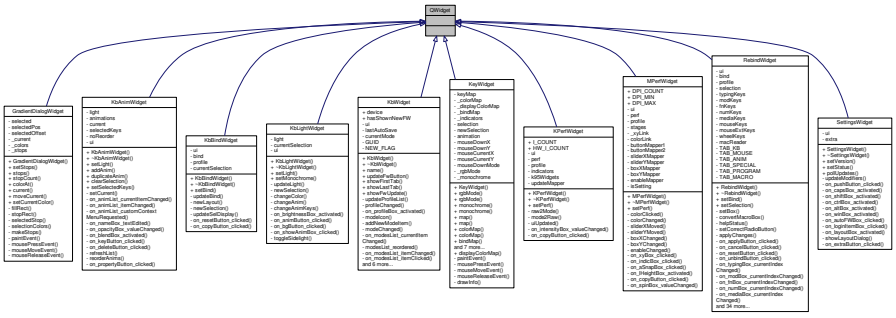

Collaboration diagram for QWidget:

The documentation for this class was generated from the following file:

- src/ckb/keywidget.h

12.79 Ui::RebindWidget Class Reference

`#include <src/ckb/ui_rebindwidget.h>`

Inheritance diagram for Ui::RebindWidget:

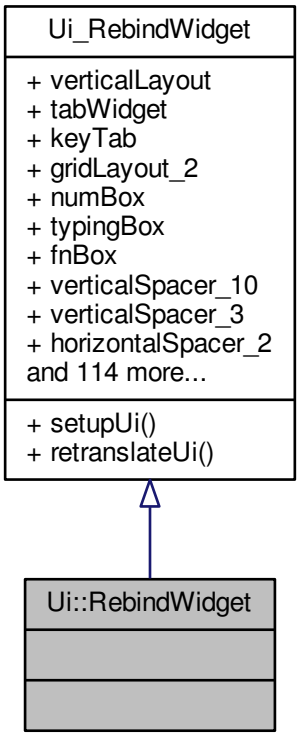

Collaboration diagram for Ui::RebindWidget:

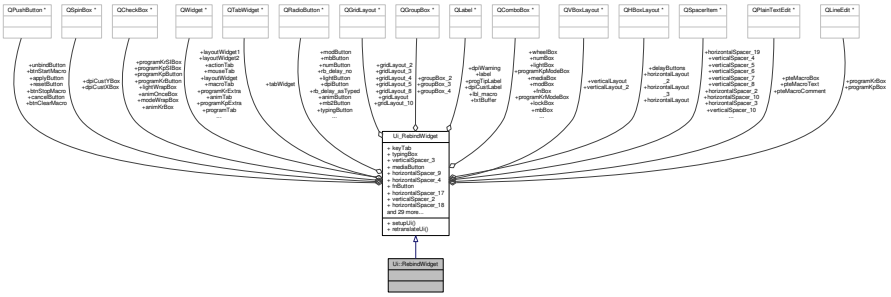

Public Member Functions

- void setupUi (QWidget *RebindWidget)
- void retranslateUi (QWidget *RebindWidget)

Data Fields

- QVBoxLayout * verticalLayout
- QTabWidget * tabWidget
- QWidget * keyTab
- QGridLayout * gridLayout_2
- QComboBox * numBox
- QComboBox * typingBox
- QComboBox * fnBox
- QSpacerItem * verticalSpacer_10
- QSpacerItem * verticalSpacer_3
- QSpacerItem * horizontalSpacer_2
- QRadioButton * typingButton
- QComboBox * modBox
- QSpacerItem * horizontalSpacer_3
- QRadioButton * mediaButton
- QSpacerItem * verticalSpacer_4
- QSpacerItem * horizontalSpacer_9
- QSpacerItem * horizontalSpacer_4
- QRadioButton * modButton
- QRadioButton * fnButton
- QComboBox * mediaBox
- QRadioButton * numButton
- QSpacerItem * horizontalSpacer_17
- QWidget * mouseTab
- QGridLayout * gridLayout
- QRadioButton * dpiButton
- QSpacerItem * verticalSpacer_2
- QSpacerItem * verticalSpacer_8
- QSpacerItem * horizontalSpacer_18
- QSpacerItem * horizontalSpacer_20
- QComboBox * mb2Box
- QComboBox * dpiBox
- QSpinBox * dpiCustYBox
- QComboBox * mbBox

- QComboBox * wheelBox
- QRadioButton * mbButton
- QSpinBox * dpiCustXBox
- QLabel * dpiWarning
- QRadioButton * wheelButton
- QSpacerItem * horizontalSpacer_22
- QRadioButton * mb2Button
- QLabel * dpiCustLabel
- QSpacerItem * horizontalSpacer_19
- QSpacerItem * horizontalSpacer_21
- QWidget * animTab
- QGridLayout * gridLayout_5
- QSpacerItem * verticalSpacer_11
- QComboBox * animBox
- QSpacerItem * horizontalSpacer_24
- QSpacerItem * horizontalSpacer_25
- QCheckBox * animKrBox
- QCheckBox * animOnceBox
- QSpacerItem * horizontalSpacer_26
- QRadioButton * animButton
- QSpacerItem * horizontalSpacer_23
- QWidget * actionTab
- QGridLayout * gridLayout_3
- QSpacerItem * horizontalSpacer_5
- QRadioButton * modeButton
- QCheckBox * modeWrapBox
- QCheckBox * lightWrapBox
- QSpacerItem * verticalSpacer_7
- QSpacerItem * verticalSpacer_6
- QRadioButton * lockButton
- QSpacerItem * verticalSpacer_5
- QComboBox * lightBox
- QComboBox * lockBox
- QRadioButton * lightButton
- QComboBox * modeBox
- QSpacerItem * horizontalSpacer_8
- QSpacerItem * horizontalSpacer_10
- QSpacerItem * horizontalSpacer_7
- QSpacerItem * horizontalSpacer_6
- QWidget * programTab
- QGridLayout * gridLayout_4
- QSpacerItem * verticalSpacer
- QSpacerItem * horizontalSpacer
- QCheckBox * programKpButton
- QLineEdit * programKpBox
- QSpacerItem * horizontalSpacer_11
- QSpacerItem * horizontalSpacer_13
- QLineEdit * programKrBox
- QCheckBox * programKrButton
- QSpacerItem * horizontalSpacer_12
- QWidget * programKpExtra
- QHBoxLayout * horizontalLayout_2
- QCheckBox * programKpSIBox
- QComboBox * programKpModeBox
- QSpacerItem * horizontalSpacer_15

- QWidget * programKrExtra
- QHBoxLayout * horizontalLayout_3
- QCheckBox * programKrSIBox
- QComboBox * programKrModeBox
- QSpacerItem * horizontalSpacer_16
- QLabel * progTipLabel
- QWidget * macroTab
- QWidget * layoutWidget1
- QGridLayout * gridLayout_8
- QGroupBox * groupBox_2
- QPlainTextEdit * pteMacroBox
- QPlainTextEdit * pteMacroComment
- QPlainTextEdit * pteMacroText
- QWidget * layoutWidget
- QVBoxLayout * verticalLayout_2
- QGroupBox * groupBox_3
- QGroupBox * groupBox_4
- QWidget * layoutWidget_2
- QGridLayout * gridLayout_10
- QPushButton * btnStopMacro
- QPushButton * btnClearMacro
- QPushButton * btnStartMacro
- QLabel * label
- QLabel * lbl_macro
- QWidget * layoutWidget2
- QHBoxLayout * delayButtons
- QRadioButton * rb_delay_no
- QRadioButton * rb_delay_default
- QRadioButton * rb_delay_asTyped
- QLabel * txtBuffer
- QHBoxLayout * horizontalLayout
- QSpacerItem * horizontalSpacer_14
- QPushButton * unbindButton
- QPushButton * resetButton
- QPushButton * cancelButton
- QPushButton * applyButton

12.79.1 Detailed Description

Definition at line 1056 of file ui_rebindwidget.h.

12.79.2 Member Function Documentation

12.79.2.1 void Ui_RebindWidget::retranslateUi (QWidget * *RebindWidget*) [inline], [inherited]

Definition at line 897 of file ui_rebindwidget.h.

References Ui_RebindWidget::actionTab, Ui_RebindWidget::animBox, Ui_RebindWidget::animButton, Ui_RebindWidget::animKrBox, Ui_RebindWidget::animOnceBox, Ui_RebindWidget::animTab, Ui_RebindWidget::applyButton, Ui_RebindWidget::btnClearMacro, Ui_RebindWidget::btnStartMacro, Ui_RebindWidget::btnStopMacro, Ui_RebindWidget::cancelButton, Ui_RebindWidget::dpiBox, Ui_RebindWidget::dpiButton, Ui_RebindWidget::dpiCustLabel, Ui_RebindWidget::dpiWarning, Ui_RebindWidget::fnBox, Ui_RebindWidget::fnButton, Ui_RebindWidget::groupBox_2, Ui_RebindWidget::groupBox_3, Ui_RebindWidget::groupBox_4, Ui_RebindWidget::keyTab, Ui_RebindWidget::label, Ui_RebindWidget::lbl_macro, Ui_RebindWidget::lightBox, Ui_RebindWidget::lightButton,

Ui_RebindWidget::lightWrapBox, Ui_RebindWidget::lockBox, Ui_RebindWidget::lockButton, Ui_RebindWidget::macroTab, Ui_RebindWidget::mb2Box, Ui_RebindWidget::mb2Button, Ui_RebindWidget::mbBox, Ui_RebindWidget::mbButton, Ui_RebindWidget::mediaBox, Ui_RebindWidget::mediaButton, Ui_RebindWidget::modBox, Ui_RebindWidget::modButton, Ui_RebindWidget::modeBox, Ui_RebindWidget::modeButton, Ui_RebindWidget::modeWrapBox, Ui_RebindWidget::mouseTab, Ui_RebindWidget::numBox, Ui_RebindWidget::numButton, Ui_RebindWidget::programKpButton, Ui_RebindWidget::programKpModeBox, Ui_RebindWidget::programKpSIBox, Ui_RebindWidget::programKrButton, Ui_RebindWidget::programKrModeBox, Ui_RebindWidget::programKrSIBox, Ui_RebindWidget::programTab, Ui_RebindWidget::progTipLabel, Ui_RebindWidget::pteMacroComment, Ui_RebindWidget::pteMacroText, Ui_RebindWidget::rb_delay_asTyped, Ui_RebindWidget::rb_delay_default, Ui_RebindWidget::rb_delay_no, Ui_RebindWidget::resetButton, Ui_RebindWidget::tabWidget, Ui_RebindWidget::txtBuffer, Ui_RebindWidget::typingBox, Ui_RebindWidget::typingButton, Ui_RebindWidget::unbindButton, Ui_RebindWidget::wheelBox, and Ui_RebindWidget::wheelButton.

Referenced by Ui_RebindWidget::setupUi().

```
898     {
899         numBox->clear();
900         numBox->insertItems(0, QStringList()
901          << QString()
902         );
903         typingBox->clear();
904         typingBox->insertItems(0, QStringList()
905          << QString()
906         );
907         fnBox->clear();
908         fnBox->insertItems(0, QStringList()
909          << QString()
910         );
911         typingButton->setText(QApplication::translate("RebindWidget", "Typing:", Q_NULLPTR));
912         modBox->clear();
913         modBox->insertItems(0, QStringList()
914          << QString()
915         );
916         mediaButton->setText(QApplication::translate("RebindWidget", "Media:", Q_NULLPTR));
917         modButton->setText(QApplication::translate("RebindWidget", "Modifier:", Q_NULLPTR));
918         fnButton->setText(QApplication::translate("RebindWidget", "Miscellaneous:", Q_NULLPTR));
919         mediaBox->clear();
920         mediaBox->insertItems(0, QStringList()
921          << QString()
922         );
923         numButton->setText(QApplication::translate("RebindWidget", "Number pad:", Q_NULLPTR));
924         tabWidget->setTabText(tabWidget->indexOf(keyTab), QApplication::translate("
    RebindWidget", "Keyboard", Q_NULLPTR));
925         dpiButton->setText(QApplication::translate("RebindWidget", "Change DPI:", Q_NULLPTR));
926         mb2Box->clear();
927         mb2Box->insertItems(0, QStringList()
928          << QString()
929          << QApplication::translate("RebindWidget", "4 (Back)", Q_NULLPTR)
930          << QApplication::translate("RebindWidget", "5 (Forward)", Q_NULLPTR)
931          << QApplication::translate("RebindWidget", "6", Q_NULLPTR)
932          << QApplication::translate("RebindWidget", "7", Q_NULLPTR)
933          << QApplication::translate("RebindWidget", "8", Q_NULLPTR)
934         );
935         dpiBox->clear();
936         dpiBox->insertItems(0, QStringList()
937          << QString()
938          << QApplication::translate("RebindWidget", "(Up)", Q_NULLPTR)
939          << QApplication::translate("RebindWidget", "(Down)", Q_NULLPTR)
940          << QApplication::translate("RebindWidget", "Sniper", Q_NULLPTR)
941          << QApplication::translate("RebindWidget", "1:", Q_NULLPTR)
942          << QApplication::translate("RebindWidget", "2:", Q_NULLPTR)
943          << QApplication::translate("RebindWidget", "3:", Q_NULLPTR)
944          << QApplication::translate("RebindWidget", "4:", Q_NULLPTR)
945          << QApplication::translate("RebindWidget", "5:", Q_NULLPTR)
946          << QApplication::translate("RebindWidget", "Custom:", Q_NULLPTR)
947         );
948         mbBox->clear();
949         mbBox->insertItems(0, QStringList()
950          << QString()
951          << QApplication::translate("RebindWidget", "Left", Q_NULLPTR)
952          << QApplication::translate("RebindWidget", "Right", Q_NULLPTR)
953          << QApplication::translate("RebindWidget", "Middle", Q_NULLPTR)
954         );
955         wheelBox->clear();
956         wheelBox->insertItems(0, QStringList()
957          << QString()
958          << QApplication::translate("RebindWidget", "Up", Q_NULLPTR)
959          << QApplication::translate("RebindWidget", "Down", Q_NULLPTR)
960         );
961         mbButton->setText(QApplication::translate("RebindWidget", "Standard button:", Q_NULLPTR));
962         dpiWarning->setText(QApplication::translate("RebindWidget", "DPI is only available for
```

```
 mice.", Q_NULLPTR));
963         wheelButton->setText(QApplication::translate("RebindWidget", "Wheel:", Q_NULLPTR));
964         mb2Button->setText(QApplication::translate("RebindWidget", "Special button:", Q_NULLPTR));
965         dpiCustLabel->setText(QApplication::translate("RebindWidget", "x", Q_NULLPTR));
966         tabWidget->setTabText(tabWidget->indexOf(mouseTab),
    QApplication::translate("RebindWidget", "Mouse", Q_NULLPTR));
967         animBox->clear();
968         animBox->insertItems(0, QStringList()
969          << QString()
970         );
971         animKrBox->setText(QApplication::translate("RebindWidget", "Stop on key release",
    Q_NULLPTR));
972         animOnceBox->setText(QApplication::translate("RebindWidget", "Restart every time",
    Q_NULLPTR));
973         animButton->setText(QApplication::translate("RebindWidget", "Start animation on keypress:
    ", Q_NULLPTR));
974         tabWidget->setTabText(tabWidget->indexOf(animTab), QApplication::translate
    ("RebindWidget", "Animation", Q_NULLPTR));
975         modeButton->setText(QApplication::translate("RebindWidget", "Switch to mode:", Q_NULLPTR)
    );
976         modeWrapBox->setText(QApplication::translate("RebindWidget", "Wrap-around", Q_NULLPTR));
977         lightWrapBox->setText(QApplication::translate("RebindWidget", "Wrap-around", Q_NULLPTR)
    );
978         lockButton->setText(QApplication::translate("RebindWidget", "Windows lock:", Q_NULLPTR));
979         lightBox->clear();
980         lightBox->insertItems(0, QStringList()
981          << QString()
982          << QApplication::translate("RebindWidget", "Up", Q_NULLPTR)
983          << QApplication::translate("RebindWidget", "Down", Q_NULLPTR)
984         );
985         lockBox->clear();
986         lockBox->insertItems(0, QStringList()
987          << QString()
988          << QApplication::translate("RebindWidget", "Toggle", Q_NULLPTR)
989          << QApplication::translate("RebindWidget", "On", Q_NULLPTR)
990          << QApplication::translate("RebindWidget", "Off", Q_NULLPTR)
991         );
992         lightButton->setText(QApplication::translate("RebindWidget", "Brightness:", Q_NULLPTR));
993         modeBox->clear();
994         modeBox->insertItems(0, QStringList()
995          << QString()
996          << QApplication::translate("RebindWidget", "(Previous)", Q_NULLPTR)
997          << QApplication::translate("RebindWidget", "(Next)", Q_NULLPTR)
998         );
999         tabWidget->setTabText(tabWidget->indexOf(actionTab),
    QApplication::translate("RebindWidget", "Special", Q_NULLPTR));
1000          programKpButton->setText(QApplication::translate("RebindWidget", "Launch program on
     key press:", Q_NULLPTR));
1001          programKrButton->setText(QApplication::translate("RebindWidget", "Launch program on
     key release:", Q_NULLPTR));
1002          programKpSIBox->setText(QApplication::translate("RebindWidget", "Single instance",
    Q_NULLPTR));
1003          programKpModeBox->clear();
1004          programKpModeBox->insertItems(0, QStringList()
1005           << QApplication::translate("RebindWidget", "Run indefinitely", Q_NULLPTR)
1006           << QApplication::translate("RebindWidget", "Stop on release", Q_NULLPTR)
1007           << QApplication::translate("RebindWidget", "Stop on re-press", Q_NULLPTR)
1008          );
1009          programKrSIBox->setText(QApplication::translate("RebindWidget", "Single instance",
    Q_NULLPTR));
1010          programKrModeBox->clear();
1011          programKrModeBox->insertItems(0, QStringList()
1012           << QApplication::translate("RebindWidget", "Run indefinitely", Q_NULLPTR)
1013           << QApplication::translate("RebindWidget", "Stop on re-press", Q_NULLPTR)
1014          );
1015          progTipLabel->setText(QApplication::translate("RebindWidget", "Tip", Q_NULLPTR));
1016          tabWidget->setTabText(tabWidget->indexOf(programTab),
    QApplication::translate("RebindWidget", "Program", Q_NULLPTR));
1017          groupBox_2->setTitle(QApplication::translate("RebindWidget", "Macro Key Actions",
    Q_NULLPTR));
1018 #ifndef QT_NO_TOOLTIP
1019          pteMacroComment->setToolTip(QApplication::translate("RebindWidget", "What is this
     macro for?", Q_NULLPTR));
1020 #endif // QT_NO_TOOLTIP
1021          pteMacroComment->setDocumentTitle(QString());
1022          pteMacroComment->setPlainText(QString());
1023          pteMacroText->setDocumentTitle(QString());
1024          pteMacroText->setPlainText(QString());
1025          groupBox_3->setTitle(QApplication::translate("RebindWidget", "Macro Comment", Q_NULLPTR))
    ;
1026          groupBox_4->setTitle(QApplication::translate("RebindWidget", "Macro Text", Q_NULLPTR));
1027          btnStopMacro->setText(QApplication::translate("RebindWidget", "Stop", Q_NULLPTR));
1028          btnClearMacro->setText(QApplication::translate("RebindWidget", "Clear", Q_NULLPTR));
1029          btnStartMacro->setText(QApplication::translate("RebindWidget", "Start", Q_NULLPTR));
1030          label->setText(QApplication::translate("RebindWidget", "Record macro ", Q_NULLPTR));
1031          lbl_macro->setText(QApplication::translate("RebindWidget", "Comment label for help",
    Q_NULLPTR));
```

```
1032 #ifndef QT_NO_WHATSTHIS
1033         rb_delay_no->setWhatsThis(QApplication::translate("RebindWidget", "configure delays
       between keystrokes: Disable delay", Q_NULLPTR));
1034 #endif // QT_NO_WHATSTHIS
1035         rb_delay_no->setText(QApplication::translate("RebindWidget", "No delay", Q_NULLPTR));
1036 #ifndef QT_NO_WHATSTHIS
1037         rb_delay_default->setWhatsThis(QApplication::translate("RebindWidget", "configure
       delays between keystrokes: Set delay to default values: 20us up to 15 chars, 200us above", Q_NULLPTR));
1038 #endif // QT_NO_WHATSTHIS
1039         rb_delay_default->setText(QApplication::translate("RebindWidget", "default",
      Q_NULLPTR));
1040 #ifndef QT_NO_WHATSTHIS
1041         rb_delay_asTyped->setWhatsThis(QApplication::translate("RebindWidget", "configure
       delays between keystrokes: Remember delays as they had been typed while the macro definition process",
      Q_NULLPTR));
1042 #endif // QT_NO_WHATSTHIS
1043         rb_delay_asTyped->setText(QApplication::translate("RebindWidget", "as typed",
      Q_NULLPTR));
1044         txtBuffer->setText(QString());
1045         tabWidget->setTabText(tabWidget->indexOf(macroTab),
      QApplication::translate("RebindWidget", "Macro", Q_NULLPTR));
1046         unbindButton->setText(QApplication::translate("RebindWidget", "Unbind", Q_NULLPTR));
1047         resetButton->setText(QApplication::translate("RebindWidget", "Reset to Default",
      Q_NULLPTR));
1048         cancelButton->setText(QApplication::translate("RebindWidget", "Cancel", Q_NULLPTR));
1049         applyButton->setText(QApplication::translate("RebindWidget", "Apply", Q_NULLPTR));
1050         Q_UNUSED(RebindWidget);
1051     } // retranslateUi
```

Here is the caller graph for this function:



12.79.2.2 void Ui_RebindWidget::setupUi (QWidget * *RebindWidget*) [inline],[inherited]

Definition at line 163 of file ui_rebindwidget.h.

References Ui_RebindWidget::actionTab, Ui_RebindWidget::animBox, Ui_RebindWidget::animButton, Ui_RebindWidget::animKrBox, Ui_RebindWidget::animOnceBox, Ui_RebindWidget::animTab, Ui_RebindWidget::applyButton, Ui_RebindWidget::btnClearMacro, Ui_RebindWidget::btnStartMacro, Ui_RebindWidget::btnStopMacro, Ui_RebindWidget::cancelButton, Ui_RebindWidget::delayButtons, Ui_RebindWidget::dpiBox, Ui_RebindWidget::dpiButton, Ui_RebindWidget::dpiCustLabel, Ui_RebindWidget::dpiCustXBox, Ui_RebindWidget::dpiCustYBox, Ui_RebindWidget::dpiWarning, Ui_RebindWidget::fnBox, Ui_RebindWidget::fnButton, Ui_RebindWidget::gridLayout, Ui_RebindWidget::gridLayout_10, Ui_RebindWidget::gridLayout_2, Ui_RebindWidget::gridLayout_3, Ui_RebindWidget::gridLayout_4, Ui_RebindWidget::gridLayout_5, Ui_RebindWidget::gridLayout_8, Ui_RebindWidget::groupBox_2, Ui_RebindWidget::groupBox_3, Ui_RebindWidget::groupBox_4, Ui_RebindWidget::horizontalLayout, Ui_RebindWidget::horizontalLayout_2, Ui_RebindWidget::horizontalLayout_3, Ui_RebindWidget::horizontalSpacer, Ui_RebindWidget::horizontalSpacer_10, Ui_RebindWidget::horizontalSpacer_11, Ui_RebindWidget::horizontalSpacer_12, Ui_RebindWidget::horizontalSpacer_13, Ui_RebindWidget::horizontalSpacer_14, Ui_RebindWidget::horizontalSpacer_15, Ui_RebindWidget::horizontalSpacer_16, Ui_RebindWidget::horizontalSpacer_17, Ui_RebindWidget::horizontalSpacer_18, Ui_RebindWidget::horizontalSpacer_19, Ui_RebindWidget::horizontalSpacer_2, Ui_RebindWidget::horizontalSpacer_20, Ui_RebindWidget::horizontalSpacer_21, Ui_RebindWidget::horizontalSpacer_22, Ui_RebindWidget::horizontalSpacer_23, Ui_RebindWidget::horizontalSpacer_24, Ui_RebindWidget::horizontalSpacer_25, Ui_RebindWidget::horizontalSpacer_26, Ui_RebindWidget::horizontalSpacer_3, Ui_RebindWidget::horizontalSpacer_4, Ui_RebindWidget::horizontalSpacer_5, Ui_RebindWidget::horizontalSpacer_6, Ui_RebindWidget::horizontalSpacer_7, Ui_RebindWidget::horizontalSpacer_8, Ui_RebindWidget::horizontalSpacer_9, Ui_RebindWidget::keyTab, Ui_RebindWidget::label, Ui_RebindWidget::layoutWidget, Ui_RebindWidget::layoutWidget1, Ui_RebindWidget::layoutWidget2, Ui_RebindWidget::layoutWidget_2, Ui_RebindWidget::lbl_macro, Ui_RebindWidget::lightBox, Ui_RebindWidget::lightButton, Ui_RebindWidget::lightWrapBox, Ui_RebindWidget::lockBox, Ui_RebindWidget::lockButton, Ui_RebindWidget::macroTab, Ui_RebindWidget::mb2Box, Ui_RebindWidget::mb2Button, Ui_RebindWidget::mbBox, Ui_RebindWidget::mbButton, Ui_Rebind-

Widget::mediaBox, Ui_RebindWidget::mediaButton, Ui_RebindWidget::modBox, Ui_RebindWidget::modButton, Ui_RebindWidget::modeBox, Ui_RebindWidget::modeButton, Ui_RebindWidget::modeWrapBox, Ui_RebindWidget::mouseTab, Ui_RebindWidget::numBox, Ui_RebindWidget::numButton, Ui_RebindWidget::programKpBox, Ui_RebindWidget::programKpButton, Ui_RebindWidget::programKpExtra, Ui_RebindWidget::programKpModeBox, Ui_RebindWidget::programKpSIBox, Ui_RebindWidget::programKrBox, Ui_RebindWidget::programKrButton, Ui_RebindWidget::programKrExtra, Ui_RebindWidget::programKrModeBox, Ui_RebindWidget::programKrSIBox, Ui_RebindWidget::programTab, Ui_RebindWidget::progTipLabel, Ui_RebindWidget::pteMacroBox, Ui_RebindWidget::pteMacroComment, Ui_RebindWidget::pteMacroText, Ui_RebindWidget::rb_delay_asTyped, Ui_RebindWidget::rb_delay_default, Ui_RebindWidget::rb_delay_no, Ui_RebindWidget::resetButton, Ui_RebindWidget::retranslateUi(), Ui_RebindWidget::tabWidget, Ui_RebindWidget::txtBuffer, Ui_RebindWidget::typingBox, Ui_RebindWidget::typingButton, Ui_RebindWidget::unbindButton, Ui_RebindWidget::verticalLayout, Ui_RebindWidget::verticalLayout_2, Ui_RebindWidget::verticalSpacer, Ui_RebindWidget::verticalSpacer_10, Ui_RebindWidget::verticalSpacer_11, Ui_RebindWidget::verticalSpacer_2, Ui_RebindWidget::verticalSpacer_3, Ui_RebindWidget::verticalSpacer_4, Ui_RebindWidget::verticalSpacer_5, Ui_RebindWidget::verticalSpacer_6, Ui_RebindWidget::verticalSpacer_7, Ui_RebindWidget::verticalSpacer_8, Ui_RebindWidget::wheelBox, and Ui_RebindWidget::wheelButton.

Referenced by RebindWidget::RebindWidget().

```
164     {
165         if (RebindWidget->objectName().isEmpty())
166             RebindWidget->setObjectName(QStringLiteral("RebindWidget"));
167         RebindWidget->resize(687, 342);
168         QSizePolicy sizePolicy(QSizePolicy::Expanding, QSizePolicy::Preferred);
169         sizePolicy.setHorizontalStretch(0);
170         sizePolicy.setVerticalStretch(0);
171         sizePolicy.setHeightForWidth(RebindWidget->sizePolicy().hasHeightForWidth());
172         RebindWidget->setSizePolicy(sizePolicy);
173         RebindWidget->setStyleSheet(QStringLiteral("font-size: 12px ;"));
174         verticalLayout = new QVBoxLayout(RebindWidget);
175         verticalLayout->setObjectName(QStringLiteral("verticalLayout"));
176         tabWidget = new QTabWidget(RebindWidget);
177         tabWidget->setObjectName(QStringLiteral("tabWidget"));
178         tabWidget->setStyleSheet(QStringLiteral(""));
179         tabWidget->setUsesScrollButtons(false);
180         tabWidget->setDocumentMode(false);
181         keyTab = new QWidget();
182         keyTab->setObjectName(QStringLiteral("keyTab"));
183         sizePolicy.setHeightForWidth(keyTab->sizePolicy().hasHeightForWidth());
184         keyTab->setSizePolicy(sizePolicy);
185         gridLayout_2 = new QGridLayout(keyTab);
186         gridLayout_2->setObjectName(QStringLiteral("gridLayout_2"));
187         gridLayout_2->setContentsMargins(-1, -1, -1, 0);
188         numBox = new QComboBox(keyTab);
189         numBox->setObjectName(QStringLiteral("numBox"));
190         QSizePolicy sizePolicy1(QSizePolicy::Expanding, QSizePolicy::Fixed);
191         sizePolicy1.setHorizontalStretch(0);
192         sizePolicy1.setVerticalStretch(0);
193         sizePolicy1.setHeightForWidth(numBox->sizePolicy().hasHeightForWidth());
194         numBox->setSizePolicy(sizePolicy1);
195 
196         gridLayout_2->addWidget(numBox, 6, 4, 1, 1);
197 
198         typingBox = new QComboBox(keyTab);
199         typingBox->setObjectName(QStringLiteral("typingBox"));
200         sizePolicy1.setHeightForWidth(typingBox->sizePolicy().hasHeightForWidth());
201         typingBox->setSizePolicy(sizePolicy1);
202 
203         gridLayout_2->addWidget(typingBox, 1, 1, 1, 1);
204 
205         fnBox = new QComboBox(keyTab);
206         fnBox->setObjectName(QStringLiteral("fnBox"));
207         sizePolicy1.setHeightForWidth(fnBox->sizePolicy().hasHeightForWidth());
208         fnBox->setSizePolicy(sizePolicy1);
209 
210         gridLayout_2->addWidget(fnBox, 6, 1, 1, 1);
211 
212         verticalSpacer_10 = new QSpacerItem(0, 5, QSizePolicy::Minimum, QSizePolicy::Fixed
    );
213 
214         gridLayout_2->addItem(verticalSpacer_10, 9, 1, 1, 1);
215 
216         verticalSpacer_3 = new QSpacerItem(20, 40, QSizePolicy::Minimum,
    QSizePolicy::Expanding);
217 
218         gridLayout_2->addItem(verticalSpacer_3, 15, 2, 1, 1);
219 
220         horizontalSpacer_2 = new QSpacerItem(5, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
221 
222         gridLayout_2->addItem(horizontalSpacer_2, 1, 3, 1, 1);
```

```
223
224         typingButton = new QRadioButton(keyTab);
225         typingButton->setObjectName(QStringLiteral("typingButton"));
226         typingButton->setAutoExclusive(false);
227
228         gridLayout_2->addWidget(typingButton, 0, 0, 1, 2);
229
230         modBox = new QComboBox(keyTab);
231         modBox->setObjectName(QStringLiteral("modBox"));
232         sizePolicy1.setHeightForWidth(modBox->sizePolicy().hasHeightForWidth());
233         modBox->setSizePolicy(sizePolicy1);
234
235         gridLayout_2->addWidget(modBox, 1, 4, 1, 1);
236
237         horizontalSpacer_3 = new QSpacerItem(5, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
238
239         gridLayout_2->addItem(horizontalSpacer_3, 1, 0, 1, 1);
240
241         mediaButton = new QRadioButton(keyTab);
242         mediaButton->setObjectName(QStringLiteral("mediaButton"));
243         mediaButton->setAutoExclusive(false);
244
245         gridLayout_2->addWidget(mediaButton, 10, 0, 1, 2);
246
247         verticalSpacer_4 = new QSpacerItem(20, 5, QSizePolicy::Minimum, QSizePolicy::Fixed)
    ;
248
249         gridLayout_2->addItem(verticalSpacer_4, 2, 1, 1, 1);
250
251         horizontalSpacer_9 = new QSpacerItem(0, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
252
253         gridLayout_2->addItem(horizontalSpacer_9, 1, 5, 1, 2);
254
255         horizontalSpacer_4 = new QSpacerItem(0, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
256
257         gridLayout_2->addItem(horizontalSpacer_4, 1, 2, 1, 1);
258
259         modButton = new QRadioButton(keyTab);
260         modButton->setObjectName(QStringLiteral("modButton"));
261
262         gridLayout_2->addWidget(modButton, 0, 3, 1, 2);
263
264         fnButton = new QRadioButton(keyTab);
265         fnButton->setObjectName(QStringLiteral("fnButton"));
266         fnButton->setAutoExclusive(false);
267
268         gridLayout_2->addWidget(fnButton, 5, 0, 1, 2);
269
270         mediaBox = new QComboBox(keyTab);
271         mediaBox->setObjectName(QStringLiteral("mediaBox"));
272         sizePolicy1.setHeightForWidth(mediaBox->sizePolicy().hasHeightForWidth());
273         mediaBox->setSizePolicy(sizePolicy1);
274
275         gridLayout_2->addWidget(mediaBox, 11, 1, 1, 1);
276
277         numButton = new QRadioButton(keyTab);
278         numButton->setObjectName(QStringLiteral("numButton"));
279         numButton->setAutoExclusive(false);
280
281         gridLayout_2->addWidget(numButton, 5, 3, 1, 2);
282
283         horizontalSpacer_17 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
284
285         gridLayout_2->addItem(horizontalSpacer_17, 1, 7, 1, 1);
286
287         tabWidget->addTab(keyTab, QString());
288         mouseTab = new QWidget();
289         mouseTab->setObjectName(QStringLiteral("mouseTab"));
290         gridLayout = new QGridLayout(mouseTab);
291         gridLayout->setObjectName(QStringLiteral("gridLayout"));
292         dpiButton = new QRadioButton(mouseTab);
293         dpiButton->setObjectName(QStringLiteral("dpiButton"));
294         dpiButton->setAutoExclusive(false);
295
296         gridLayout->addWidget(dpiButton, 3, 3, 1, 5);
297
298         verticalSpacer_2 = new QSpacerItem(20, 40, QSizePolicy::Minimum,
    QSizePolicy::Expanding);
299
300         gridLayout->addItem(verticalSpacer_2, 5, 1, 1, 1);
301
302         verticalSpacer_8 = new QSpacerItem(20, 5, QSizePolicy::Minimum, QSizePolicy::Fixed)
    ;
```

```
303
304         gridLayout->addItem(verticalSpacer_8, 2, 1, 1, 1);
305
306         horizontalSpacer_18 = new QSpacerItem(5, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
307
308         gridLayout->addItem(horizontalSpacer_18, 1, 0, 1, 1);
309
310         horizontalSpacer_20 = new QSpacerItem(5, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
311
312         gridLayout->addItem(horizontalSpacer_20, 1, 3, 1, 1);
313
314         mb2Box = new QComboBox(mouseTab);
315         mb2Box->setObjectName(QStringLiteral("mb2Box"));
316         sizePolicy1.setHeightForWidth(mb2Box->sizePolicy().hasHeightForWidth());
317         mb2Box->setSizePolicy(sizePolicy1);
318
319         gridLayout->addWidget(mb2Box, 1, 4, 1, 4);
320
321         dpiBox = new QComboBox(mouseTab);
322         dpiBox->setObjectName(QStringLiteral("dpiBox"));
323
324         gridLayout->addWidget(dpiBox, 4, 4, 1, 1);
325
326         dpiCustYBox = new QSpinBox(mouseTab);
327         dpiCustYBox->setObjectName(QStringLiteral("dpiCustYBox"));
328         dpiCustYBox->setMinimum(400);
329         dpiCustYBox->setMaximum(8500);
330         dpiCustYBox->setSingleStep(50);
331
332         gridLayout->addWidget(dpiCustYBox, 4, 7, 1, 1);
333
334         mbBox = new QComboBox(mouseTab);
335         mbBox->setObjectName(QStringLiteral("mbBox"));
336         sizePolicy1.setHeightForWidth(mbBox->sizePolicy().hasHeightForWidth());
337         mbBox->setSizePolicy(sizePolicy1);
338
339         gridLayout->addWidget(mbBox, 1, 1, 1, 1);
340
341         wheelBox = new QComboBox(mouseTab);
342         wheelBox->setObjectName(QStringLiteral("wheelBox"));
343
344         gridLayout->addWidget(wheelBox, 4, 1, 1, 1);
345
346         mbButton = new QRadioButton(mouseTab);
347         mbButton->setObjectName(QStringLiteral("mbButton"));
348         mbButton->setAutoExclusive(false);
349
350         gridLayout->addWidget(mbButton, 0, 0, 1, 2);
351
352         dpiCustXBox = new QSpinBox(mouseTab);
353         dpiCustXBox->setObjectName(QStringLiteral("dpiCustXBox"));
354         dpiCustXBox->setMinimum(400);
355         dpiCustXBox->setMaximum(8500);
356         dpiCustXBox->setSingleStep(50);
357
358         gridLayout->addWidget(dpiCustXBox, 4, 5, 1, 1);
359
360         dpiWarning = new QLabel(mouseTab);
361         dpiWarning->setObjectName(QStringLiteral("dpiWarning"));
362         QSizePolicy sizePolicy2(QSizePolicy::Preferred, QSizePolicy::Fixed);
363         sizePolicy2.setHorizontalStretch(0);
364         sizePolicy2.setVerticalStretch(0);
365         sizePolicy2.setHeightForWidth(dpiWarning->sizePolicy().hasHeightForWidth());
366         dpiWarning->setSizePolicy(sizePolicy2);
367
368         gridLayout->addWidget(dpiWarning, 6, 0, 1, 10);
369
370         wheelButton = new QRadioButton(mouseTab);
371         wheelButton->setObjectName(QStringLiteral("wheelButton"));
372
373         gridLayout->addWidget(wheelButton, 3, 0, 1, 2);
374
375         horizontalSpacer_22 = new QSpacerItem(5, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
376
377         gridLayout->addItem(horizontalSpacer_22, 1, 8, 1, 1);
378
379         mb2Button = new QRadioButton(mouseTab);
380         mb2Button->setObjectName(QStringLiteral("mb2Button"));
381         mb2Button->setAutoExclusive(false);
382
383         gridLayout->addWidget(mb2Button, 0, 3, 1, 5);
384
385         dpiCustLabel = new QLabel(mouseTab);
386         dpiCustLabel->setObjectName(QStringLiteral("dpiCustLabel"));
```

```
387
388         gridLayout->addWidget(dpiCustLabel, 4, 6, 1, 1);
389
390         horizontalSpacer_19 = new QSpacerItem(0, 0, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
391
392         gridLayout->addItem(horizontalSpacer_19, 1, 2, 1, 1);
393
394         horizontalSpacer_21 = new QSpacerItem(0, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
395
396         gridLayout->addItem(horizontalSpacer_21, 1, 9, 1, 1);
397
398         tabWidget->addTab(mouseTab, QString());
399         animTab = new QWidget();
400         animTab->setObjectName(QStringLiteral("animTab"));
401         gridLayout_5 = new QGridLayout(animTab);
402         gridLayout_5->setObjectName(QStringLiteral("gridLayout_5"));
403         verticalSpacer_11 = new QSpacerItem(20, 40, QSizePolicy::Minimum,
    QSizePolicy::Expanding);
404
405         gridLayout_5->addItem(verticalSpacer_11, 6, 2, 1, 1);
406
407         animBox = new QComboBox(animTab);
408         animBox->setObjectName(QStringLiteral("animBox"));
409         sizePolicy1.setHeightForWidth(animBox->sizePolicy().hasHeightForWidth());
410         animBox->setSizePolicy(sizePolicy1);
411
412         gridLayout_5->addWidget(animBox, 4, 2, 1, 1);
413
414         horizontalSpacer_24 = new QSpacerItem(20, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
415
416         gridLayout_5->addItem(horizontalSpacer_24, 4, 3, 1, 1);
417
418         horizontalSpacer_25 = new QSpacerItem(438, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
419
420         gridLayout_5->addItem(horizontalSpacer_25, 4, 7, 1, 1);
421
422         animKrBox = new QCheckBox(animTab);
423         animKrBox->setObjectName(QStringLiteral("animKrBox"));
424
425         gridLayout_5->addWidget(animKrBox, 4, 6, 1, 1);
426
427         animOnceBox = new QCheckBox(animTab);
428         animOnceBox->setObjectName(QStringLiteral("animOnceBox"));
429
430         gridLayout_5->addWidget(animOnceBox, 4, 4, 1, 1);
431
432         horizontalSpacer_26 = new QSpacerItem(20, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
433
434         gridLayout_5->addItem(horizontalSpacer_26, 4, 5, 1, 1);
435
436         animButton = new QRadioButton(animTab);
437         animButton->setObjectName(QStringLiteral("animButton"));
438         sizePolicy1.setHeightForWidth(animButton->sizePolicy().hasHeightForWidth());
439         animButton->setSizePolicy(sizePolicy1);
440
441         gridLayout_5->addWidget(animButton, 0, 1, 1, 2);
442
443         horizontalSpacer_23 = new QSpacerItem(5, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
444
445         gridLayout_5->addItem(horizontalSpacer_23, 4, 1, 1, 1);
446
447         tabWidget->addTab(animTab, QString());
448         actionTab = new QWidget();
449         actionTab->setObjectName(QStringLiteral("actionTab"));
450         sizePolicy.setHeightForWidth(actionTab->sizePolicy().hasHeightForWidth());
451         actionTab->setSizePolicy(sizePolicy);
452         gridLayout_3 = new QGridLayout(actionTab);
453         gridLayout_3->setObjectName(QStringLiteral("gridLayout_3"));
454         gridLayout_3->setContentsMargins(-1, -1, -1, 0);
455         horizontalSpacer_5 = new QSpacerItem(5, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
456
457         gridLayout_3->addItem(horizontalSpacer_5, 1, 0, 1, 1);
458
459         modeButton = new QRadioButton(actionTab);
460         modeButton->setObjectName(QStringLiteral("modeButton"));
461         modeButton->setAutoExclusive(false);
462
463         gridLayout_3->addWidget(modeButton, 0, 0, 1, 2);
464
465         modeWrapBox = new QCheckBox(actionTab);
```

```
466         modeWrapBox->setObjectName(QStringLiteral("modeWrapBox"));
467         modeWrapBox->setChecked(true);
468 
469         gridLayout_3->addWidget(modeWrapBox, 1, 3, 1, 1);
470 
471         lightWrapBox = new QCheckBox(actionTab);
472         lightWrapBox->setObjectName(QStringLiteral("lightWrapBox"));
473         lightWrapBox->setChecked(true);
474 
475         gridLayout_3->addWidget(lightWrapBox, 4, 3, 1, 1);
476 
477         verticalSpacer_7 = new QSpacerItem(20, 5, QSizePolicy::Minimum, QSizePolicy::Fixed)
    ;
478 
479         gridLayout_3->addItem(verticalSpacer_7, 2, 1, 1, 1);
480 
481         verticalSpacer_6 = new QSpacerItem(20, 5, QSizePolicy::Minimum, QSizePolicy::Fixed)
    ;
482 
483         gridLayout_3->addItem(verticalSpacer_6, 5, 1, 1, 1);
484 
485         lockButton = new QRadioButton(actionTab);
486         lockButton->setObjectName(QStringLiteral("lockButton"));
487         lockButton->setAutoExclusive(false);
488 
489         gridLayout_3->addWidget(lockButton, 6, 0, 1, 2);
490 
491         verticalSpacer_5 = new QSpacerItem(20, 40, QSizePolicy::Minimum,
    QSizePolicy::Expanding);
492 
493         gridLayout_3->addItem(verticalSpacer_5, 8, 1, 1, 1);
494 
495         lightBox = new QComboBox(actionTab);
496         lightBox->setObjectName(QStringLiteral("lightBox"));
497         sizePolicy1.setHeightForWidth(lightBox->sizePolicy().hasHeightForWidth());
498         lightBox->setSizePolicy(sizePolicy1);
499 
500         gridLayout_3->addWidget(lightBox, 4, 1, 1, 1);
501 
502         lockBox = new QComboBox(actionTab);
503         lockBox->setObjectName(QStringLiteral("lockBox"));
504         sizePolicy1.setHeightForWidth(lockBox->sizePolicy().hasHeightForWidth());
505         lockBox->setSizePolicy(sizePolicy1);
506 
507         gridLayout_3->addWidget(lockBox, 7, 1, 1, 1);
508 
509         lightButton = new QRadioButton(actionTab);
510         lightButton->setObjectName(QStringLiteral("lightButton"));
511         lightButton->setAutoExclusive(false);
512 
513         gridLayout_3->addWidget(lightButton, 3, 0, 1, 2);
514 
515         modeBox = new QComboBox(actionTab);
516         modeBox->setObjectName(QStringLiteral("modeBox"));
517         sizePolicy1.setHeightForWidth(modeBox->sizePolicy().hasHeightForWidth());
518         modeBox->setSizePolicy(sizePolicy1);
519 
520         gridLayout_3->addWidget(modeBox, 1, 1, 1, 1);
521 
522         horizontalSpacer_8 = new QSpacerItem(5, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
523 
524         gridLayout_3->addItem(horizontalSpacer_8, 1, 2, 1, 1);
525 
526         horizontalSpacer_10 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
527 
528         gridLayout_3->addItem(horizontalSpacer_10, 7, 3, 1, 1);
529 
530         horizontalSpacer_7 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
531 
532         gridLayout_3->addItem(horizontalSpacer_7, 1, 4, 1, 1);
533 
534         horizontalSpacer_6 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
535 
536         gridLayout_3->addItem(horizontalSpacer_6, 1, 5, 1, 1);
537 
538         tabWidget->addTab(actionTab, QString());
539         programTab = new QWidget();
540         programTab->setObjectName(QStringLiteral("programTab"));
541         gridLayout_4 = new QGridLayout(programTab);
542         gridLayout_4->setObjectName(QStringLiteral("gridLayout_4"));
543         verticalSpacer = new QSpacerItem(20, 5, QSizePolicy::Minimum, QSizePolicy::Fixed);
544 
545         gridLayout_4->addItem(verticalSpacer, 2, 1, 1, 1);
```

```
546
547         horizontalSpacer = new QSpacerItem(5, 20, QSizePolicy::Fixed, QSizePolicy::Minimum)
    ;
548
549         gridLayout_4->addItem(horizontalSpacer, 1, 0, 1, 1);
550
551         programKpButton = new QCheckBox(programTab);
552         programKpButton->setObjectName(QStringLiteral("programKpButton"));
553
554         gridLayout_4->addWidget(programKpButton, 0, 0, 1, 2);
555
556         programKpBox = new QLineEdit(programTab);
557         programKpBox->setObjectName(QStringLiteral("programKpBox"));
558
559         gridLayout_4->addWidget(programKpBox, 1, 1, 1, 1);
560
561         horizontalSpacer_11 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
562
563         gridLayout_4->addItem(horizontalSpacer_11, 0, 2, 1, 2);
564
565         horizontalSpacer_13 = new QSpacerItem(20, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
566
567         gridLayout_4->addItem(horizontalSpacer_13, 1, 2, 1, 1);
568
569         programKrBox = new QLineEdit(programTab);
570         programKrBox->setObjectName(QStringLiteral("programKrBox"));
571
572         gridLayout_4->addWidget(programKrBox, 4, 1, 1, 1);
573
574         programKrButton = new QCheckBox(programTab);
575         programKrButton->setObjectName(QStringLiteral("programKrButton"));
576
577         gridLayout_4->addWidget(programKrButton, 3, 0, 1, 2);
578
579         horizontalSpacer_12 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
580
581         gridLayout_4->addItem(horizontalSpacer_12, 0, 4, 1, 1);
582
583         programKpExtra = new QWidget(programTab);
584         programKpExtra->setObjectName(QStringLiteral("programKpExtra"));
585         horizontalLayout_2 = new QHBoxLayout(programKpExtra);
586         horizontalLayout_2->setSpacing(12);
587         horizontalLayout_2->setObjectName(QStringLiteral("horizontalLayout_2"));
588         horizontalLayout_2->setContentsMargins(0, 0, 0, 0);
589         programKpSIBox = new QCheckBox(programKpExtra);
590         programKpSIBox->setObjectName(QStringLiteral("programKpSIBox"));
591
592         horizontalLayout_2->addWidget(programKpSIBox);
593
594         programKpModeBox = new QComboBox(programKpExtra);
595         programKpModeBox->setObjectName(QStringLiteral("programKpModeBox"));
596
597         horizontalLayout_2->addWidget(programKpModeBox);
598
599         horizontalSpacer_15 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
600
601         horizontalLayout_2->addItem(horizontalSpacer_15);
602
603
604         gridLayout_4->addWidget(programKpExtra, 1, 3, 1, 2);
605
606         programKrExtra = new QWidget(programTab);
607         programKrExtra->setObjectName(QStringLiteral("programKrExtra"));
608         horizontalLayout_3 = new QHBoxLayout(programKrExtra);
609         horizontalLayout_3->setSpacing(12);
610         horizontalLayout_3->setObjectName(QStringLiteral("horizontalLayout_3"));
611         horizontalLayout_3->setContentsMargins(0, 0, 0, 0);
612         programKrSIBox = new QCheckBox(programKrExtra);
613         programKrSIBox->setObjectName(QStringLiteral("programKrSIBox"));
614
615         horizontalLayout_3->addWidget(programKrSIBox);
616
617         programKrModeBox = new QComboBox(programKrExtra);
618         programKrModeBox->setObjectName(QStringLiteral("programKrModeBox"));
619
620         horizontalLayout_3->addWidget(programKrModeBox);
621
622         horizontalSpacer_16 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
623
624         horizontalLayout_3->addItem(horizontalSpacer_16);
625
626
```

```
627         gridLayout_4->addWidget(programKrExtra, 4, 3, 1, 2);
628 
629         progTipLabel = new QLabel(programTab);
630         progTipLabel->setObjectName(QStringLiteral("progTipLabel"));
631         QSizePolicy sizePolicy3(QSizePolicy::Preferred, QSizePolicy::Expanding);
632         sizePolicy3.setHorizontalStretch(0);
633         sizePolicy3.setVerticalStretch(0);
634         sizePolicy3.setHeightForWidth(progTipLabel->sizePolicy().hasHeightForWidth());
635         progTipLabel->setSizePolicy(sizePolicy3);
636         progTipLabel->setTextInteractionFlags(Qt::LinksAccessibleByMouse|
    Qt::TextSelectableByMouse);
637 
638         gridLayout_4->addWidget(progTipLabel, 5, 1, 1, 4);
639 
640         tabWidget->addTab(programTab, QString());
641         macroTab = new QWidget();
642         macroTab->setObjectName(QStringLiteral("macroTab"));
643         layoutWidget1 = new QWidget(macroTab);
644         layoutWidget1->setObjectName(QStringLiteral("layoutWidget1"));
645         layoutWidget1->setGeometry(QRect(40, 12, 241, 161));
646         gridLayout_8 = new QGridLayout(layoutWidget1);
647         gridLayout_8->setObjectName(QStringLiteral("gridLayout_8"));
648         gridLayout_8->setSizeConstraint(QLayout::SetNoConstraint);
649         gridLayout_8->setContentsMargins(0, 0, 0, 0);
650         groupBox_2 = new QGroupBox(layoutWidget1);
651         groupBox_2->setObjectName(QStringLiteral("groupBox_2"));
652         pteMacroBox = new QPlainTextEdit(groupBox_2);
653         pteMacroBox->setObjectName(QStringLiteral("pteMacroBox"));
654         pteMacroBox->setGeometry(QRect(0, 20, 241, 131));
655         pteMacroBox->setFocusPolicy(Qt::WheelFocus);
656         pteMacroBox->setTabChangesFocus(true);
657 
658         gridLayout_8->addWidget(groupBox_2, 0, 0, 1, 1);
659 
660         pteMacroComment = new QPlainTextEdit(macroTab);
661         pteMacroComment->setObjectName(QStringLiteral("pteMacroComment"));
662         pteMacroComment->setEnabled(true);
663         pteMacroComment->setGeometry(QRect(410, 10, 311, 31));
664         pteMacroComment->setFocusPolicy(Qt::WheelFocus);
665         pteMacroComment->setContextMenuPolicy(Qt::NoContextMenu);
666         pteMacroComment->setAcceptDrops(true);
667         pteMacroComment->setToolTipDuration(1);
668         pteMacroComment->setInputMethodHints(Qt::ImhNone);
669         pteMacroComment->setVerticalScrollBarPolicy(Qt::ScrollBarAlwaysOff);
670         pteMacroComment->setTabChangesFocus(true);
671         pteMacroComment->setUndoRedoEnabled(true);
672         pteMacroComment->setReadOnly(false);
673         pteMacroComment->setTabStopWidth(1);
674         pteMacroText = new QPlainTextEdit(macroTab);
675         pteMacroText->setObjectName(QStringLiteral("pteMacroText"));
676         pteMacroText->setGeometry(QRect(410, 50, 311, 66));
677         pteMacroText->setFocusPolicy(Qt::StrongFocus);
678         pteMacroText->setContextMenuPolicy(Qt::NoContextMenu);
679         pteMacroText->setAcceptDrops(false);
680         pteMacroText->setInputMethodHints(Qt::ImhNoAutoUppercase);
681         pteMacroText->setUndoRedoEnabled(false);
682         pteMacroText->setReadOnly(false);
683         pteMacroText->setTabStopWidth(1);
684         layoutWidget = new QWidget(macroTab);
685         layoutWidget->setObjectName(QStringLiteral("layoutWidget"));
686         layoutWidget->setGeometry(QRect(300, 10, 111, 71));
687         verticalLayout_2 = new QVBoxLayout(layoutWidget);
688         verticalLayout_2->setObjectName(QStringLiteral("verticalLayout_2"));
689         verticalLayout_2->setSizeConstraint(QLayout::SetNoConstraint);
690         verticalLayout_2->setContentsMargins(0, 0, 0, 0);
691         groupBox_3 = new QGroupBox(layoutWidget);
692         groupBox_3->setObjectName(QStringLiteral("groupBox_3"));
693 
694         verticalLayout_2->addWidget(groupBox_3);
695 
696         groupBox_4 = new QGroupBox(layoutWidget);
697         groupBox_4->setObjectName(QStringLiteral("groupBox_4"));
698 
699         verticalLayout_2->addWidget(groupBox_4);
700 
701         layoutWidget_2 = new QWidget(macroTab);
702         layoutWidget_2->setObjectName(QStringLiteral("layoutWidget_2"));
703         layoutWidget_2->setGeometry(QRect(300, 160, 407, 36));
704         gridLayout_10 = new QGridLayout(layoutWidget_2);
705         gridLayout_10->setObjectName(QStringLiteral("gridLayout_10"));
706         gridLayout_10->setContentsMargins(0, 0, 0, 0);
707         btnStopMacro = new QPushButton(layoutWidget_2);
708         btnStopMacro->setObjectName(QStringLiteral("btnStopMacro"));
709         btnStopMacro->setEnabled(false);
710 
711         gridLayout_10->addWidget(btnStopMacro, 0, 2, 1, 1);
712 
```

```
713         btnClearMacro = new QPushButton(layoutWidget_2);
714         btnClearMacro->setObjectName(QStringLiteral("btnClearMacro"));
715 
716         gridLayout_10->addWidget(btnClearMacro, 0, 3, 1, 1);
717 
718         btnStartMacro = new QPushButton(layoutWidget_2);
719         btnStartMacro->setObjectName(QStringLiteral("btnStartMacro"));
720 
721         gridLayout_10->addWidget(btnStartMacro, 0, 1, 1, 1);
722 
723         label = new QLabel(layoutWidget_2);
724         label->setObjectName(QStringLiteral("label"));
725         label->setStyleSheet(QLatin1String("font: 75 10pt ; \n"
726 ""));
727 
728         gridLayout_10->addWidget(label, 0, 0, 1, 1);
729 
730         lbl_macro = new QLabel(macroTab);
731         lbl_macro->setObjectName(QStringLiteral("lbl_macro"));
732         lbl_macro->setGeometry(QRect(300, 130, 431, 27));
733         lbl_macro->setStyleSheet(QStringLiteral("font: 75 11pt ; color: darkblue;"));
734         layoutWidget2 = new QWidget(macroTab);
735         layoutWidget2->setObjectName(QStringLiteral("layoutWidget2"));
736         layoutWidget2->setGeometry(QRect(40, 170, 238, 28));
737         delayButtons = new QHBoxLayout(layoutWidget2);
738         delayButtons->setSpacing(0);
739         delayButtons->setObjectName(QStringLiteral("delayButtons"));
740         delayButtons->setSizeConstraint(QLayout::SetMinimumSize);
741         delayButtons->setContentsMargins(0, 0, 0, 0);
742         rb_delay_no = new QRadioButton(layoutWidget2);
743         rb_delay_no->setObjectName(QStringLiteral("rb_delay_no"));
744         rb_delay_no->setStyleSheet(QStringLiteral("font: 10pt ; color:  green;"));
745 
746         delayButtons->addWidget(rb_delay_no);
747 
748         rb_delay_default = new QRadioButton(layoutWidget2);
749         rb_delay_default->setObjectName(QStringLiteral("rb_delay_default"));
750         rb_delay_default->setStyleSheet(QStringLiteral("font: 10pt ; color:  green;"));
751         rb_delay_default->setChecked(false);
752         rb_delay_default->setAutoExclusive(true);
753 
754         delayButtons->addWidget(rb_delay_default);
755 
756         rb_delay_asTyped = new QRadioButton(layoutWidget2);
757         rb_delay_asTyped->setObjectName(QStringLiteral("rb_delay_asTyped"));
758         rb_delay_asTyped->setStyleSheet(QStringLiteral("font: 10pt ; color:  green;"));
759         rb_delay_asTyped->setChecked(true);
760 
761         delayButtons->addWidget(rb_delay_asTyped);
762 
763         txtBuffer = new QLabel(macroTab);
764         txtBuffer->setObjectName(QStringLiteral("txtBuffer"));
765         txtBuffer->setEnabled(false);
766         txtBuffer->setGeometry(QRect(300, 100, 0, 0));
767         QSizePolicy sizePolicy4(QSizePolicy::Fixed, QSizePolicy::Fixed);
768         sizePolicy4.setHorizontalStretch(0);
769         sizePolicy4.setVerticalStretch(0);
770         sizePolicy4.setHeightForWidth(txtBuffer->sizePolicy().hasHeightForWidth());
771         txtBuffer->setSizePolicy(sizePolicy4);
772         txtBuffer->setMaximumSize(QSize(0, 0));
773         txtBuffer->setContextMenuPolicy(Qt::NoContextMenu);
774 #ifndef QT_NO_TOOLTIP
775         txtBuffer->setToolTip(QStringLiteral(""));
776 #endif // QT_NO_TOOLTIP
777         txtBuffer->setToolTipDuration(0);
778 #ifndef QT_NO_STATUSTIP
779         txtBuffer->setStatusTip(QStringLiteral(""));
780 #endif // QT_NO_STATUSTIP
781 #ifndef QT_NO_WHATSTHIS
782         txtBuffer->setWhatsThis(QStringLiteral(""));
783 #endif // QT_NO_WHATSTHIS
784         txtBuffer->setFrameShadow(QFrame::Plain);
785         txtBuffer->setLineWidth(0);
786         txtBuffer->setTextFormat(Qt::PlainText);
787         txtBuffer->setIndent(0);
788         txtBuffer->setTextInteractionFlags(Qt::NoTextInteraction);
789         tabWidget->addTab(macroTab, QString());
790         layoutWidget->raise();
791         layoutWidget1->raise();
792         layoutWidget->raise();
793         pteMacroText->raise();
794         layoutWidget_2->raise();
795         lbl_macro->raise();
796         txtBuffer->raise();
797 
798         verticalLayout->addWidget(tabWidget);
799 
```

```
800         horizontalLayout = new QHBoxLayout();
801         horizontalLayout->setObjectName(QStringLiteral("horizontalLayout"));
802         horizontalSpacer_14 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
803 
804         horizontalLayout->addItem(horizontalSpacer_14);
805 
806         unbindButton = new QPushButton(RebindWidget);
807         unbindButton->setObjectName(QStringLiteral("unbindButton"));
808 
809         horizontalLayout->addWidget(unbindButton);
810 
811         resetButton = new QPushButton(RebindWidget);
812         resetButton->setObjectName(QStringLiteral("resetButton"));
813 
814         horizontalLayout->addWidget(resetButton);
815 
816         cancelButton = new QPushButton(RebindWidget);
817         cancelButton->setObjectName(QStringLiteral("cancelButton"));
818 
819         horizontalLayout->addWidget(cancelButton);
820 
821         applyButton = new QPushButton(RebindWidget);
822         applyButton->setObjectName(QStringLiteral("applyButton"));
823 
824         horizontalLayout->addWidget(applyButton);
825 
826 
827         verticalLayout->addLayout(horizontalLayout);
828 
829         QWidget::setTabOrder(tabWidget, pteMacroComment);
830         QWidget::setTabOrder(pteMacroComment, pteMacroBox);
831         QWidget::setTabOrder(pteMacroBox, dpiButton);
832         QWidget::setTabOrder(dpiButton, mb2Box);
833         QWidget::setTabOrder(mb2Box, btnStartMacro);
834         QWidget::setTabOrder(btnStartMacro, fnBox);
835         QWidget::setTabOrder(fnBox, dpiCustYBox);
836         QWidget::setTabOrder(dpiCustYBox, dpiBox);
837         QWidget::setTabOrder(dpiBox, applyButton);
838         QWidget::setTabOrder(applyButton, mbBox);
839         QWidget::setTabOrder(mbBox, cancelButton);
840         QWidget::setTabOrder(cancelButton, wheelBox);
841         QWidget::setTabOrder(wheelBox, btnStopMacro);
842         QWidget::setTabOrder(btnStopMacro, mbButton);
843         QWidget::setTabOrder(mbButton, dpiCustXBox);
844         QWidget::setTabOrder(dpiCustXBox, btnClearMacro);
845         QWidget::setTabOrder(btnClearMacro, wheelButton);
846         QWidget::setTabOrder(wheelButton, mb2Button);
847         QWidget::setTabOrder(mb2Button, animBox);
848         QWidget::setTabOrder(animBox, animKrBox);
849         QWidget::setTabOrder(animKrBox, animOnceBox);
850         QWidget::setTabOrder(animOnceBox, animButton);
851         QWidget::setTabOrder(animButton, modeButton);
852         QWidget::setTabOrder(modeButton, modeWrapBox);
853         QWidget::setTabOrder(modeWrapBox, lightWrapBox);
854         QWidget::setTabOrder(lightWrapBox, lockButton);
855         QWidget::setTabOrder(lockButton, lightBox);
856         QWidget::setTabOrder(lightBox, resetButton);
857         QWidget::setTabOrder(resetButton, lockBox);
858         QWidget::setTabOrder(lockBox, lightButton);
859         QWidget::setTabOrder(lightButton, modeBox);
860         QWidget::setTabOrder(modeBox, unbindButton);
861         QWidget::setTabOrder(unbindButton, programKpButton);
862         QWidget::setTabOrder(programKpButton, programKpBox);
863         QWidget::setTabOrder(programKpBox, programKrBox);
864         QWidget::setTabOrder(programKrBox, programKrButton);
865         QWidget::setTabOrder(programKrButton, programKpSIBox);
866         QWidget::setTabOrder(programKpSIBox, programKpModeBox);
867         QWidget::setTabOrder(programKpModeBox, programKrSIBox);
868         QWidget::setTabOrder(programKrSIBox, programKrModeBox);
869         QWidget::setTabOrder(programKrModeBox, typingBox);
870         QWidget::setTabOrder(typingBox, numBox);
871         QWidget::setTabOrder(numBox, pteMacroText);
872         QWidget::setTabOrder(pteMacroText, typingButton);
873         QWidget::setTabOrder(typingButton, mediaButton);
874         QWidget::setTabOrder(mediaButton, modBox);
875         QWidget::setTabOrder(modBox, modButton);
876         QWidget::setTabOrder(modButton, fnButton);
877         QWidget::setTabOrder(fnButton, mediaBox);
878         QWidget::setTabOrder(mediaBox, numButton);
879 
880         retranslateUi(RebindWidget);
881         QObject::connect(btnClearMacro, SIGNAL(clicked()),
    pteMacroText, SLOT(clear()));
882         QObject::connect(btnClearMacro, SIGNAL(clicked()),
    pteMacroComment, SLOT(clear()));
883         QObject::connect(btnClearMacro, SIGNAL(clicked()),
```

```
      btnStopMacro, SLOT(animateClick()));
884         QObject::connect(cancelButton, SIGNAL(clicked()), txtBuffer, SLOT(clear()));
885         QObject::connect(btnClearMacro, SIGNAL(clicked()),
      txtBuffer, SLOT(clear()));
886         QObject::connect(btnStartMacro, SIGNAL(clicked()),
      txtBuffer, SLOT(clear()));
887         QObject::connect(unbindButton, SIGNAL(clicked()), txtBuffer, SLOT(clear()));
888         QObject::connect(resetButton, SIGNAL(clicked()), txtBuffer, SLOT(clear()));
889
890         tabWidget->setCurrentIndex(0);
891         applyButton->setDefault(true);
892
893
894         QMetaObject::connectSlotsByName(RebindWidget);
895     } // setupUi
```

Here is the call graph for this function:



Here is the caller graph for this function:

12.79.3 Field Documentation

12.79.3.1 QWidget* Ui_RebindWidget::actionTab [inherited]

Definition at line 92 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::retranslateUi(), and Ui_RebindWidget::setupUi().

12.79.3.2 QComboBox* Ui_RebindWidget::animBox [inherited]

Definition at line 84 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::on_animBox_currentIndexChanged(), RebindWidget::on_animButton_clicked(), Ui_RebindWidget::retranslateUi(), RebindWidget::setBox(), RebindWidget::setSelection(), and Ui_RebindWidget::setupUi().

12.79.3.3 QRadioButton* Ui_RebindWidget::animButton [inherited]

Definition at line 90 of file ui_rebindwidget.h.

Referenced by RebindWidget::on_animBox_currentIndexChanged(), Ui_RebindWidget::retranslateUi(), and Ui_RebindWidget::setupUi().

12.79.3.4 QCheckBox* Ui_RebindWidget::animKrBox [inherited]

Definition at line 87 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), Ui_RebindWidget::retranslateUi(), RebindWidget::setSelection(), and Ui_RebindWidget::setupUi().

12.79.3.5 QCheckBox* Ui_RebindWidget::animOnceBox [inherited]

Definition at line 88 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), Ui_RebindWidget::retranslateUi(), RebindWidget::setSelection(), and Ui_RebindWidget::setupUi().

12.79.3.6 QWidget* Ui_RebindWidget::animTab [inherited]

Definition at line 81 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::retranslateUi(), and Ui_RebindWidget::setupUi().

12.79.3.7 QPushButton* Ui_RebindWidget::applyButton [inherited]

Definition at line 161 of file ui_rebindwidget.h.

Referenced by RebindWidget::on_btnStartMacro_clicked(), RebindWidget::on_btnStopMacro_clicked(), Ui_RebindWidget::retranslateUi(), and Ui_RebindWidget::setupUi().

12.79.3.8 QPushButton* Ui_RebindWidget::btnClearMacro [inherited]

Definition at line 146 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::retranslateUi(), and Ui_RebindWidget::setupUi().

12.79.3.9 QPushButton* Ui_RebindWidget::btnStartMacro [inherited]

Definition at line 147 of file ui_rebindwidget.h.

Referenced by RebindWidget::on_btnStartMacro_clicked(), RebindWidget::on_btnStopMacro_clicked(), Ui_RebindWidget::retranslateUi(), and Ui_RebindWidget::setupUi().

12.79.3.10 QPushButton* Ui_RebindWidget::btnStopMacro [inherited]

Definition at line 145 of file ui_rebindwidget.h.

Referenced by RebindWidget::on_btnStartMacro_clicked(), RebindWidget::on_btnStopMacro_clicked(), Ui_RebindWidget::retranslateUi(), and Ui_RebindWidget::setupUi().

12.79.3.11 QPushButton* Ui_RebindWidget::cancelButton [inherited]

Definition at line 160 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::retranslateUi(), and Ui_RebindWidget::setupUi().

12.79.3.12 QHBoxLayout* Ui_RebindWidget::delayButtons [inherited]

Definition at line 151 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.13 QComboBox* Ui_RebindWidget::dpiBox [inherited]

Definition at line 68 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::on_dpiBox_currentIndexChanged(), RebindWidget::on_dpiButton_clicked(), Ui_RebindWidget::retranslateUi(), RebindWidget::setBind(), RebindWidget::setBox(), RebindWidget::setSelection(), and Ui_RebindWidget::setupUi().

12.79.3.14 QRadioButton* Ui_RebindWidget::dpiButton [inherited]

Definition at line 62 of file ui_rebindwidget.h.

Referenced by RebindWidget::on_dpiBox_currentIndexChanged(), Ui_RebindWidget::retranslateUi(), RebindWidget::setBind(), and Ui_RebindWidget::setupUi().

12.79.3.15 QLabel* Ui_RebindWidget::dpiCustLabel [inherited]

Definition at line 78 of file ui_rebindwidget.h.

Referenced by RebindWidget::on_dpiBox_currentIndexChanged(), Ui_RebindWidget::retranslateUi(), RebindWidget::setBind(), and Ui_RebindWidget::setupUi().

12.79.3.16 QSpinBox* Ui_RebindWidget::dpiCustXBox [inherited]

Definition at line 73 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::on_dpiBox_currentIndexChanged(), RebindWidget::setBind(), RebindWidget::setSelection(), and Ui_RebindWidget::setupUi().

12.79.3.17 QSpinBox* Ui_RebindWidget::dpiCustYBox [inherited]

Definition at line 69 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::on_dpiBox_currentIndexChanged(), RebindWidget::setBind(), RebindWidget::setSelection(), and Ui_RebindWidget::setupUi().

12.79.3.18 QLabel* Ui_RebindWidget::dpiWarning [inherited]

Definition at line 74 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::retranslateUi(), RebindWidget::setBind(), and Ui_RebindWidget::setupUi().

12.79.3.19 QComboBox* Ui_RebindWidget::fnBox [inherited]

Definition at line 44 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::on_fnBox_currentIndexChanged(), RebindWidget::on_fnButton_clicked(), RebindWidget::RebindWidget(), Ui_RebindWidget::retranslateUi(), RebindWidget::setBox(), RebindWidget::setSelection(), and Ui_RebindWidget::setupUi().

12.79.3.20 QRadioButton* Ui_RebindWidget::fnButton [inherited]

Definition at line 56 of file ui_rebindwidget.h.

Referenced by RebindWidget::on_fnBox_currentIndexChanged(), Ui_RebindWidget::retranslateUi(), and Ui_-RebindWidget::setupUi().

12.79.3.21 QGridLayout* Ui_RebindWidget::gridLayout [inherited]

Definition at line 61 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.22 QGridLayout* Ui_RebindWidget::gridLayout_10 [inherited]

Definition at line 144 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.23 QGridLayout* Ui_RebindWidget::gridLayout_2 [inherited]

Definition at line 41 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.24 QGridLayout* Ui_RebindWidget::gridLayout_3 [inherited]

Definition at line 93 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.25 QGridLayout* Ui_RebindWidget::gridLayout_4 [inherited]

Definition at line 111 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.26 QGridLayout* Ui_RebindWidget::gridLayout_5 [inherited]

Definition at line 82 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.27 QGridLayout* Ui_RebindWidget::gridLayout_8 [inherited]

Definition at line 134 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.28 QGroupBox* Ui_RebindWidget::groupBox_2 [inherited]

Definition at line 135 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::retranslateUi(), and Ui_RebindWidget::setupUi().

12.79.3.29 QGroupBox* Ui_RebindWidget::groupBox_3 [inherited]

Definition at line 141 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::retranslateUi(), and Ui_RebindWidget::setupUi().

12.79.3.30 QGroupBox* Ui_RebindWidget::groupBox_4 [inherited]

Definition at line 142 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::retranslateUi(), and Ui_RebindWidget::setupUi().

12.79.3.31 QHBoxLayout* Ui_RebindWidget::horizontalLayout [inherited]

Definition at line 156 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.32 QHBoxLayout* Ui_RebindWidget::horizontalLayout_2 [inherited]

Definition at line 122 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.33 QHBoxLayout* Ui_RebindWidget::horizontalLayout_3 [inherited]

Definition at line 127 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.34 QSpacerItem* Ui_RebindWidget::horizontalSpacer [inherited]

Definition at line 113 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.35 QSpacerItem* Ui_RebindWidget::horizontalSpacer_10 [inherited]

Definition at line 107 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.36 QSpacerItem* Ui_RebindWidget::horizontalSpacer_11 [inherited]

Definition at line 116 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.37 QSpacerItem* Ui_RebindWidget::horizontalSpacer_12 [inherited]

Definition at line 120 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.38 QSpacerItem* Ui_RebindWidget::horizontalSpacer_13 [inherited]

Definition at line 117 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.39 QSpacerItem* Ui_RebindWidget::horizontalSpacer_14 [inherited]

Definition at line 157 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.40 QSpacerItem* Ui_RebindWidget::horizontalSpacer_15 [inherited]

Definition at line 125 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.41 QSpacerItem* Ui_RebindWidget::horizontalSpacer_16 [inherited]

Definition at line 130 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.42 QSpacerItem* Ui_RebindWidget::horizontalSpacer_17 [inherited]

Definition at line 59 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.43 QSpacerItem* Ui_RebindWidget::horizontalSpacer_18 [inherited]

Definition at line 65 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.44 QSpacerItem* Ui_RebindWidget::horizontalSpacer_19 [inherited]

Definition at line 79 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.45 QSpacerItem* Ui_RebindWidget::horizontalSpacer_2 [inherited]

Definition at line 47 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.46 QSpacerItem* Ui_RebindWidget::horizontalSpacer_20 [inherited]

Definition at line 66 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.47 QSpacerItem* Ui_RebindWidget::horizontalSpacer_21 [inherited]

Definition at line 80 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.48 QSpacerItem* Ui_RebindWidget::horizontalSpacer_22 [inherited]

Definition at line 76 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.49 QSpacerItem* Ui_RebindWidget::horizontalSpacer_23 [inherited]

Definition at line 91 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.50 QSpacerItem* Ui_RebindWidget::horizontalSpacer_24 [inherited]

Definition at line 85 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.51 QSpacerItem* Ui_RebindWidget::horizontalSpacer_25 [inherited]

Definition at line 86 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.52 QSpacerItem* Ui_RebindWidget::horizontalSpacer_26 [inherited]

Definition at line 89 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.53 QSpacerItem* Ui_RebindWidget::horizontalSpacer_3 [inherited]

Definition at line 50 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.54 QSpacerItem* Ui_RebindWidget::horizontalSpacer_4 [inherited]

Definition at line 54 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.55 QSpacerItem* Ui_RebindWidget::horizontalSpacer_5 [inherited]

Definition at line 94 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.56 QSpacerItem* Ui_RebindWidget::horizontalSpacer_6 [inherited]

Definition at line 109 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.57 QSpacerItem* Ui_RebindWidget::horizontalSpacer_7 [inherited]

Definition at line 108 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.58 QSpacerItem* Ui_RebindWidget::horizontalSpacer_8 [inherited]

Definition at line 106 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.59 QSpacerItem* Ui_RebindWidget::horizontalSpacer_9 [inherited]

Definition at line 53 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.60 QWidget* Ui_RebindWidget::keyTab [inherited]

Definition at line 40 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::retranslateUi(), and Ui_RebindWidget::setupUi().

12.79.3.61 QLabel* Ui_RebindWidget::label [inherited]

Definition at line 148 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::retranslateUi(), and Ui_RebindWidget::setupUi().

12.79.3.62 QWidget* Ui_RebindWidget::layoutWidget [inherited]

Definition at line 139 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.63 QWidget* Ui_RebindWidget::layoutWidget1 [inherited]

Definition at line 133 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.64 QWidget* Ui_RebindWidget::layoutWidget2 [inherited]

Definition at line 150 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.65 QWidget* Ui_RebindWidget::layoutWidget_2 [inherited]

Definition at line 143 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.66 QLabel* Ui_RebindWidget::lbl_macro [inherited]

Definition at line 149 of file ui_rebindwidget.h.

Referenced by RebindWidget::helpStatus(), Ui_RebindWidget::retranslateUi(), and Ui_RebindWidget::setupUi().

12.79.3.67 QComboBox* Ui_RebindWidget::lightBox [inherited]

Definition at line 102 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::on_lightBox_currentIndexChanged(), RebindWidget::on_lightButton_clicked(), Ui_RebindWidget::retranslateUi(), RebindWidget::setBox(), RebindWidget::setSelection(), and Ui_RebindWidget::setupUi().

12.79.3.68 QRadioButton* Ui_RebindWidget::lightButton [inherited]

Definition at line 104 of file ui_rebindwidget.h.

Referenced by RebindWidget::on_lightBox_currentIndexChanged(), Ui_RebindWidget::retranslateUi(), and Ui_RebindWidget::setupUi().

12.79.3.69 QCheckBox* Ui_RebindWidget::lightWrapBox [inherited]

Definition at line 97 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::on_lightBox_currentIndexChanged(), RebindWidget::RebindWidget(), Ui_RebindWidget::retranslateUi(), RebindWidget::setSelection(), and Ui_RebindWidget::setupUi().

12.79.3.70 QComboBox* Ui_RebindWidget::lockBox [inherited]

Definition at line 103 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::on_lockBox_currentIndexChanged(), RebindWidget::on_lockButton_clicked(), Ui_RebindWidget::retranslateUi(), RebindWidget::setBox(), RebindWidget::setSelection(), and Ui_RebindWidget::setupUi().

12.79.3.71 QRadioButton* Ui_RebindWidget::lockButton [inherited]

Definition at line 100 of file ui_rebindwidget.h.

Referenced by RebindWidget::on_lockBox_currentIndexChanged(), Ui_RebindWidget::retranslateUi(), and Ui_RebindWidget::setupUi().

12.79.3.72 QWidget* Ui_RebindWidget::macroTab [inherited]

Definition at line 132 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::retranslateUi(), and Ui_RebindWidget::setupUi().

12.79.3.73 QComboBox* Ui_RebindWidget::mb2Box [inherited]

Definition at line 67 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::on_mb2Box_currentIndexChanged(), RebindWidget::on_mb2Button_clicked(), Ui_RebindWidget::retranslateUi(), RebindWidget::setBox(), RebindWidget::setSelection(), and Ui_RebindWidget::setupUi().

12.79.3.74 QRadioButton* Ui_RebindWidget::mb2Button [inherited]

Definition at line 77 of file ui_rebindwidget.h.

Referenced by RebindWidget::on_mb2Box_currentIndexChanged(), Ui_RebindWidget::retranslateUi(), and Ui_RebindWidget::setupUi().

12.79.3.75 QComboBox* Ui_RebindWidget::mbBox [inherited]

Definition at line 70 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::on_mbBox_currentIndexChanged(), RebindWidget::on_mbButton_clicked(), Ui_RebindWidget::retranslateUi(), RebindWidget::setBox(), RebindWidget::setSelection(), and Ui_RebindWidget::setupUi().

12.79.3.76 QRadioButton* Ui_RebindWidget::mbButton [inherited]

Definition at line 72 of file ui_rebindwidget.h.

Referenced by RebindWidget::on_mbBox_currentIndexChanged(), Ui_RebindWidget::retranslateUi(), and Ui_RebindWidget::setupUi().

12.79.3.77 QComboBox* Ui_RebindWidget::mediaBox [inherited]

Definition at line 57 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::on_mediaBox_currentIndexChanged(), RebindWidget::on_mediaButton_clicked(), RebindWidget::RebindWidget(), Ui_RebindWidget::retranslateUi(), RebindWidget::setBox(), RebindWidget::setSelection(), and Ui_RebindWidget::setupUi().

12.79.3.78 QRadioButton* Ui_RebindWidget::mediaButton [inherited]

Definition at line 51 of file ui_rebindwidget.h.

Referenced by RebindWidget::on_mediaBox_currentIndexChanged(), Ui_RebindWidget::retranslateUi(), and Ui_RebindWidget::setupUi().

12.79.3.79 QComboBox* Ui_RebindWidget::modBox [inherited]

Definition at line 49 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::on_modBox_currentIndexChanged(), RebindWidget::on_modButton_clicked(), RebindWidget::RebindWidget(), Ui_RebindWidget::retranslateUi(), RebindWidget::setBox(), RebindWidget::setSelection(), and Ui_RebindWidget::setupUi().

12.79.3.80 QRadioButton* Ui_RebindWidget::modButton [inherited]

Definition at line 55 of file ui_rebindwidget.h.

Referenced by RebindWidget::on_modBox_currentIndexChanged(), Ui_RebindWidget::retranslateUi(), and Ui_RebindWidget::setupUi().

12.79.3.81 QComboBox* Ui_RebindWidget::modeBox [inherited]

Definition at line 105 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::on_modeBox_currentIndexChanged(), RebindWidget::on_modeButton_clicked(), Ui_RebindWidget::retranslateUi(), RebindWidget::setBind(), RebindWidget::setBox(), RebindWidget::setSelection(), and Ui_RebindWidget::setupUi().

12.79.3.82 QRadioButton* Ui_RebindWidget::modeButton [inherited]

Definition at line 95 of file ui_rebindwidget.h.

Referenced by RebindWidget::on_modeBox_currentIndexChanged(), Ui_RebindWidget::retranslateUi(), and Ui_RebindWidget::setupUi().

12.79.3.83 QCheckBox* Ui_RebindWidget::modeWrapBox [inherited]

Definition at line 96 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::on_modeBox_currentIndexChanged(), RebindWidget::RebindWidget(), Ui_RebindWidget::retranslateUi(), RebindWidget::setSelection(), and Ui_RebindWidget::setupUi().

12.79.3.84 QWidget* Ui_RebindWidget::mouseTab [inherited]

Definition at line 60 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::retranslateUi(), and Ui_RebindWidget::setupUi().

12.79.3.85 QComboBox* Ui_RebindWidget::numBox [inherited]

Definition at line 42 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::on_numBox_currentIndexChanged(), RebindWidget::on_numButton_clicked(), RebindWidget::RebindWidget(), Ui_RebindWidget::retranslateUi(), RebindWidget::setBox(), RebindWidget::setSelection(), and Ui_RebindWidget::setupUi().

12.79.3.86 QRadioButton* Ui_RebindWidget::numButton [inherited]

Definition at line 58 of file ui_rebindwidget.h.

Referenced by RebindWidget::on_numBox_currentIndexChanged(), Ui_RebindWidget::retranslateUi(), and Ui_RebindWidget::setupUi().

12.79.3.87 QLineEdit* Ui_RebindWidget::programKpBox [inherited]

Definition at line 115 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::on_programKpBox_textChanged(), RebindWidget::on_programKpButton_clicked(), RebindWidget::setBox(), RebindWidget::setSelection(), and Ui_RebindWidget::setupUi().

12.79.3.88 QCheckBox* Ui_RebindWidget::programKpButton [inherited]

Definition at line 114 of file ui_rebindwidget.h.

Referenced by RebindWidget::on_programKpBox_textChanged(), Ui_RebindWidget::retranslateUi(), RebindWidget::setBox(), and Ui_RebindWidget::setupUi().

12.79.3.89 QWidget* Ui_RebindWidget::programKpExtra [inherited]

Definition at line 121 of file ui_rebindwidget.h.

Referenced by RebindWidget::on_programKpBox_textChanged(), RebindWidget::RebindWidget(), and Ui_RebindWidget::setupUi().

12.79.3.90 QComboBox* Ui_RebindWidget::programKpModeBox [inherited]

Definition at line 124 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::on_programKpSIBox_clicked(), Ui_RebindWidget::retranslateUi(), RebindWidget::setSelection(), and Ui_RebindWidget::setupUi().

12.79.3.91 QCheckBox* Ui_RebindWidget::programKpSIBox [inherited]

Definition at line 123 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), Ui_RebindWidget::retranslateUi(), RebindWidget::setSelection(), and Ui_RebindWidget::setupUi().

12.79.3.92 QLineEdit* Ui_RebindWidget::programKrBox [inherited]

Definition at line 118 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::on_programKrBox_textChanged(), RebindWidget::on_programKrButton_clicked(), RebindWidget::setBox(), RebindWidget::setSelection(), and Ui_RebindWidget::setupUi().

12.79.3.93 QCheckBox* Ui_RebindWidget::programKrButton [inherited]

Definition at line 119 of file ui_rebindwidget.h.

Referenced by RebindWidget::on_programKrBox_textChanged(), Ui_RebindWidget::retranslateUi(), RebindWidget::setBox(), and Ui_RebindWidget::setupUi().

12.79.3.94 QWidget* Ui_RebindWidget::programKrExtra [inherited]

Definition at line 126 of file ui_rebindwidget.h.

Referenced by RebindWidget::on_programKrBox_textChanged(), RebindWidget::RebindWidget(), and Ui_RebindWidget::setupUi().

12.79.3.95 QComboBox* Ui_RebindWidget::programKrModeBox [inherited]

Definition at line 129 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::on_programKrSIBox_clicked(), Ui_RebindWidget::retranslateUi(), RebindWidget::setSelection(), and Ui_RebindWidget::setupUi().

12.79.3.96 QCheckBox* Ui_RebindWidget::programKrSIBox [inherited]

Definition at line 128 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), Ui_RebindWidget::retranslateUi(), RebindWidget::setSelection(), and Ui_RebindWidget::setupUi().

12.79.3.97 QWidget* Ui_RebindWidget::programTab [inherited]

Definition at line 110 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::retranslateUi(), and Ui_RebindWidget::setupUi().

12.79.3.98 QLabel* Ui_RebindWidget::progTipLabel [inherited]

Definition at line 131 of file ui_rebindwidget.h.

Referenced by RebindWidget::RebindWidget(), Ui_RebindWidget::retranslateUi(), and Ui_RebindWidget::setupUi().

12.79.3.99 QPlainTextEdit* Ui_RebindWidget::pteMacroBox [inherited]

Definition at line 136 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::convertMacroBox(), RebindWidget::on_btnStartMacro_clicked(), RebindWidget::on_pteMacroBox_textChanged(), RebindWidget::setBox(), RebindWidget::setSelection(), and Ui_RebindWidget::setupUi().

12.79.3.100 QPlainTextEdit* Ui_RebindWidget::pteMacroComment [inherited]

Definition at line 137 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), Ui_RebindWidget::retranslateUi(), RebindWidget::setSelection(), and Ui_RebindWidget::setupUi().

12.79.3.101 QPlainTextEdit* Ui_RebindWidget::pteMacroText [inherited]

Definition at line 138 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::on_btnStartMacro_clicked(), Ui_RebindWidget::retranslateUi(), RebindWidget::setSelection(), and Ui_RebindWidget::setupUi().

12.79.3.102 QRadioButton* Ui_RebindWidget::rb_delay_asTyped [inherited]

Definition at line 154 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::on_btnStartMacro_clicked(), RebindWidget::on_btnStopMacro_clicked(), Ui_RebindWidget::retranslateUi(), RebindWidget::setCorrectRadioButton(), and Ui_RebindWidget::setupUi().

12.79.3.103 QRadioButton* Ui_RebindWidget::rb_delay_default [inherited]

Definition at line 153 of file ui_rebindwidget.h.

Referenced by RebindWidget::convertMacroBox(), RebindWidget::on_btnStartMacro_clicked(), RebindWidget::on_btnStopMacro_clicked(), Ui_RebindWidget::retranslateUi(), RebindWidget::setCorrectRadioButton(), and Ui_RebindWidget::setupUi().

12.79.3.104 QRadioButton* Ui_RebindWidget::rb_delay_no [inherited]

Definition at line 152 of file ui_rebindwidget.h.

Referenced by RebindWidget::convertMacroBox(), RebindWidget::on_btnStartMacro_clicked(), RebindWidget::on_btnStopMacro_clicked(), Ui_RebindWidget::retranslateUi(), RebindWidget::setCorrectRadioButton(), and Ui_RebindWidget::setupUi().

12.79.3.105 QPushButton* Ui_RebindWidget::resetButton [inherited]

Definition at line 159 of file ui_rebindwidget.h.

Referenced by RebindWidget::on_btnStartMacro_clicked(), RebindWidget::on_btnStopMacro_clicked(), Ui_RebindWidget::retranslateUi(), and Ui_RebindWidget::setupUi().

12.79.3.106 QTabWidget* Ui_RebindWidget::tabWidget [inherited]

Definition at line 39 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::retranslateUi(), RebindWidget::setSelection(), and Ui_RebindWidget::setupUi().

12.79.3.107 QLabel* Ui_RebindWidget::txtBuffer [inherited]

Definition at line 155 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::convertMacroBox(), Ui_RebindWidget::retranslateUi(), RebindWidget::setBox(), RebindWidget::setSelection(), and Ui_RebindWidget::setupUi().

12.79.3.108 QComboBox* Ui_RebindWidget::typingBox [inherited]

Definition at line 43 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::on_typingBox_currentIndexChanged(), RebindWidget::on_typingButton_clicked(), Ui_RebindWidget::retranslateUi(), RebindWidget::setBind(), RebindWidget::setBox(), RebindWidget::setSelection(), and Ui_RebindWidget::setupUi().

12.79.3.109 QRadioButton* Ui_RebindWidget::typingButton [inherited]

Definition at line 48 of file ui_rebindwidget.h.

Referenced by RebindWidget::on_typingBox_currentIndexChanged(), Ui_RebindWidget::retranslateUi(), and Ui_RebindWidget::setupUi().

12.79.3.110 QPushButton* Ui_RebindWidget::unbindButton [inherited]

Definition at line 158 of file ui_rebindwidget.h.

Referenced by RebindWidget::on_btnStartMacro_clicked(), RebindWidget::on_btnStopMacro_clicked(), Ui_RebindWidget::retranslateUi(), and Ui_RebindWidget::setupUi().

12.79.3.111 QVBoxLayout* Ui_RebindWidget::verticalLayout [inherited]

Definition at line 38 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.112 QVBoxLayout* Ui_RebindWidget::verticalLayout_2 [inherited]

Definition at line 140 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.113 QSpacerItem* Ui_RebindWidget::verticalSpacer [inherited]

Definition at line 112 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.114 QSpacerItem* Ui_RebindWidget::verticalSpacer_10 [inherited]

Definition at line 45 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.115 QSpacerItem* Ui_RebindWidget::verticalSpacer_11 [inherited]

Definition at line 83 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.116 QSpacerItem* Ui_RebindWidget::verticalSpacer_2 [inherited]

Definition at line 63 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.117 QSpacerItem* Ui_RebindWidget::verticalSpacer_3 [inherited]

Definition at line 46 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.118 QSpacerItem* Ui_RebindWidget::verticalSpacer_4 [inherited]

Definition at line 52 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.119 QSpacerItem* Ui_RebindWidget::verticalSpacer_5 [inherited]

Definition at line 101 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.120 QSpacerItem* Ui_RebindWidget::verticalSpacer_6 [inherited]

Definition at line 99 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.121 QSpacerItem* Ui_RebindWidget::verticalSpacer_7 [inherited]

Definition at line 98 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.122 QSpacerItem* Ui_RebindWidget::verticalSpacer_8 [inherited]

Definition at line 64 of file ui_rebindwidget.h.

Referenced by Ui_RebindWidget::setupUi().

12.79.3.123 QComboBox* Ui_RebindWidget::wheelBox [inherited]

Definition at line 71 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::on_wheelBox_currentIndexChanged(), RebindWidget::on_wheelButton_clicked(), Ui_RebindWidget::retranslateUi(), RebindWidget::setBox(), RebindWidget::setSelection(), and Ui_RebindWidget::setupUi().

12.79.3.124 QRadioButton* Ui_RebindWidget::wheelButton [inherited]

Definition at line 75 of file ui_rebindwidget.h.

Referenced by RebindWidget::on_wheelBox_currentIndexChanged(), Ui_RebindWidget::retranslateUi(), and Ui_RebindWidget::setupUi().

The documentation for this class was generated from the following file:

- src/ckb/ui_rebindwidget.h

12.80 RebindWidget Class Reference

`#include <src/ckb/rebindwidget.h>`

Inheritance diagram for RebindWidget:

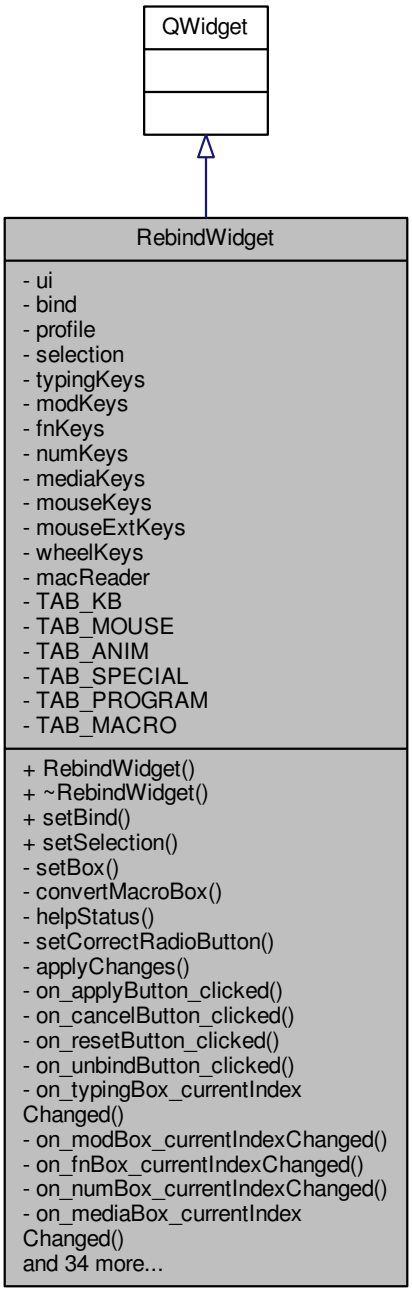

Collaboration diagram for RebindWidget:

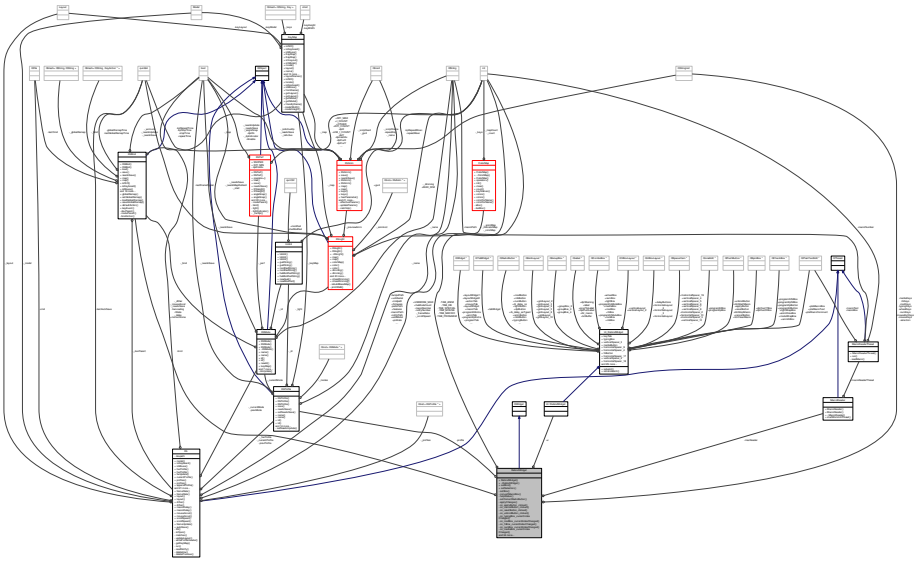

Public Member Functions

- RebindWidget (QWidget *parent)
- ~RebindWidget ()
- void setBind (KbBind *newBind, KbProfile *newProfile)
- void setSelection (const QStringList &newSelection, bool applyPrevious=false)

Private Slots

- void applyChanges (const QStringList &keys, bool doUnbind)
- void on_applyButton_clicked ()
- void on_cancelButton_clicked ()
- void on_resetButton_clicked ()
- void on_unbindButton_clicked ()
- void on_typingBox_currentIndexChanged (int index)
- void on_modBox_currentIndexChanged (int index)
- void on_fnBox_currentIndexChanged (int index)
- void on_numBox_currentIndexChanged (int index)
- void on_mediaBox_currentIndexChanged (int index)
- void on_mbBox_currentIndexChanged (int index)
- void on_mb2Box_currentIndexChanged (int index)
- void on_wheelBox_currentIndexChanged (int index)
- void on_dpiBox_currentIndexChanged (int index)
- void on_modeBox_currentIndexChanged (int index)
- void on_lightBox_currentIndexChanged (int index)
- void on_lockBox_currentIndexChanged (int index)
- void on_programKpBox_textChanged (const QString &arg1)
- void on_programKrBox_textChanged (const QString &arg1)
- void on_animBox_currentIndexChanged (int index)
- void on_typingButton_clicked (bool checked)
- void on_modButton_clicked (bool checked)
- void on_fnButton_clicked (bool checked)
- void on_numButton_clicked (bool checked)

- void on_mediaButton_clicked (bool checked)
- void on_mbButton_clicked (bool checked)
- void on_mb2Button_clicked (bool checked)
- void on_wheelButton_clicked (bool checked)
- void on_dpiButton_clicked (bool checked)
- void on_modeButton_clicked (bool checked)
- void on_lightButton_clicked (bool checked)
- void on_lockButton_clicked (bool checked)
- void on_programKpButton_clicked (bool checked)
- void on_programKrButton_clicked (bool checked)
- void on_programKpSIBox_clicked (bool checked)
- void on_programKrSIBox_clicked (bool checked)
- void on_animButton_clicked (bool checked)
- void on_pteMacroBox_textChanged ()
- void on_btnStartMacro_clicked ()

  RebindWidget::on_btnStartMacro_clicked starts macro recording. A new notification channel and MacroReader are created to do the job.
- void on_btnStopMacro_clicked ()

  RebindWidget::on_btnStopMacro_clicked ends the macro recording. Notify channel ist closed, the ReaderThread is deleted when the notification is really down.
- void on_btnClearMacro_clicked ()

  RebindWidget::on_btnClearMacro_clicked changes the help info an the panel. The job of clearing the input panels is triggerd with signal/slot via the RebindWidget.ui file.
- void on_rb_delay_no_toggled (bool checked)

  RebindWidget::on_rb_delay_no_toggled.
- void on_rb_delay_asTyped_toggled (bool checked)

  RebindWidget::on_rb_delay_asTyped_toggled.
- void on_rb_delay_default_toggled (bool checked)

  RebindWidget::on_rb_delay_default_toggled.

Private Member Functions

- void setBox (QWidget *box)
- void convertMacroBox ()

  RebindWidget::convertMacroBox converts the macroBox content. The KB sends each keypress as "key [+|-]<keyname><newline>" This is followed by timing information (delays between keystrokes).
- void helpStatus (int status)

  RebindWidget::helpStatus shows a help line in the ui.
- void setCorrectRadioButton (QString macdef)

  RebindWidget::setCorrectRadioButton.

Private Attributes

- Ui::RebindWidget * ui
- KbBind * bind
- KbProfile * profile
- QStringList selection
- QStringList typingKeys
- QStringList modKeys
- QStringList fnKeys
- QStringList numKeys
- QStringList mediaKeys
- QStringList mouseKeys

- QStringList mouseExtKeys
- QStringList wheelKeys
- MacroReader * macReader

  macReader holds the MacroReader when macro recording starts.

Static Private Attributes

- static const int TAB_KB = 0
- static const int TAB_MOUSE = 1
- static const int TAB_ANIM = 2
- static const int TAB_SPECIAL = 3
- static const int TAB_PROGRAM = 4
- static const int TAB_MACRO = 5

12.80.1 Detailed Description

Definition at line 15 of file rebindwidget.h.

12.80.2 Constructor & Destructor Documentation

12.80.2.1 RebindWidget::RebindWidget (QWidget * *parent*) [explicit]

Definition at line 9 of file rebindwidget.cpp.

References Ui_RebindWidget::fnBox, fnKeys, KeyMap::friendlyName(), Ui_RebindWidget::lightWrapBox, Ui_RebindWidget::mediaBox, mediaKeys, Ui_RebindWidget::modBox, Ui_RebindWidget::modeWrapBox, modKeys, mouseExtKeys, mouseKeys, Ui_RebindWidget::numBox, numKeys, Ui_RebindWidget::programKpExtra, Ui_RebindWidget::programKrExtra, Ui_RebindWidget::progTipLabel, Ui_RebindWidget::setupUi(), ui, and wheelKeys.

```
9                                           :
10      QWidget(parent),
11      ui(new Ui::RebindWidget),
12      bind(0), profile(0), macReader(0)
13  {
14      ui->setupUi(this);
15      ui->lightWrapBox->hide();
16      ui->modeWrapBox->hide();
17      ui->programKpExtra->hide();
18      ui->programKrExtra->hide();
19
20      // Populate key lists
21      modKeys << "caps" << "lshift" << "rshift" << "lctrl" << "rctrl" << "lwin" << "rwin" << "lalt" <<
        "ralt" << "rmenu" << "fn";
22      fnKeys << "esc" << "f1" << "f2" << "f3" << "f4" << "f5" << "f6" << "f7" << "f8" << "f9" << "f10"
       << "f11" << "f12" << "prtscn" << "scroll" << "pause" << "f13" << "f14" << "f15" << "f16" << "f17" << "f18" <
       < "f19" << "f20" << "ins" << "del" << "home" << "end" << "pgup" << "pgdn" << "power" << "lightup" << "
       lightdn" << "up" << "down" << "left" << "right";
23      numKeys << "numlock" << "num0" << "num1" << "num2" << "num3" << "num4" << "num5" << "num6" << "
       num7" << "num8" << "num9" << "numslash" << "numstar" << "numminus" << "numplus" << "numdot" << "numenter";
24      mediaKeys << "stop" << "prev" << "play" << "next" << "volup" << "voldn" << "mute" << "eject";
25      mouseKeys << "mouse1" << "mouse2" << "mouse3";
26      mouseExtKeys << "mouse4" << "mouse5" << "mouse6" << "mouse7" << "mouse8";
27      wheelKeys << "wheelup" << "wheeldn";
28      // Populate boxes
29      foreach(const QString& key, modKeys)
30          ui->modBox->addItem(KeyMap::friendlyName(key));
31      foreach(const QString& key, fnKeys)
32          ui->fnBox->addItem(KeyMap::friendlyName(key).replace("\n", " / "));
33      foreach(const QString& key, numKeys)
34          ui->numBox->addItem(KeyMap::friendlyName(key).remove("NumPad "));
35      foreach(const QString& key, mediaKeys)
36          ui->mediaBox->addItem(KeyMap::friendlyName(key));
37  #ifdef Q_OS_MACX
38      // Replace some OSX keys with their actual meanings
39      ui->modBox->setItemText(modKeys.indexOf("lwin") + 1, "Left Cmd");
40      ui->modBox->setItemText(modKeys.indexOf("rwin") + 1, "Right Cmd");
41      ui->modBox->setItemText(modKeys.indexOf("lalt") + 1, "Left Option");
42      ui->modBox->setItemText(modKeys.indexOf("ralt") + 1, "Right Option");
```

```
43     ui->fnBox->setItemText(fnKeys.indexOf("prtscn") + 1, "F13");
44     ui->fnBox->setItemText(fnKeys.indexOf("scroll") + 1, "F14");
45     ui->fnBox->setItemText(fnKeys.indexOf("pause") + 1, "F15");
46     ui->fnBox->setItemText(fnKeys.indexOf("f13") + 1, "F13 (Windows/Linux)");
47     ui->fnBox->setItemText(fnKeys.indexOf("f14") + 1, "F14 (Windows/Linux)");
48     ui->fnBox->setItemText(fnKeys.indexOf("f15") + 1, "F15 (Windows/Linux)");
49     ui->fnBox->setItemText(fnKeys.indexOf("ins") + 1, "Help");
50     ui->numBox->setItemText(numKeys.indexOf("numlock") + 1, "Clear");
51
52     // Add tip label
53     ui->progTipLabel->setText("<p style=\"line-height:150%\">Tip: use the <font face=\"
      monospace\">open</font> command to launch a file, directory, or app. For instance, to start Safari:<br /><font
       face=\"monospace\">  open /Applications/Safari.app</font></p>");
54 #else
55     ui->progTipLabel->setText("<p style=\"line-height:150%\">Tip: use <font face=\"monospace
      \">xdg-open</font> to launch a file or directory. For instance, to open your home folder:<br /><font face=\"
      monospace\">  xdg-open " + QStandardPaths::writableLocation(QStandardPaths::HomeLocation) + "
      </font></p>");
56 #endif
57 }
```

Here is the call graph for this function:

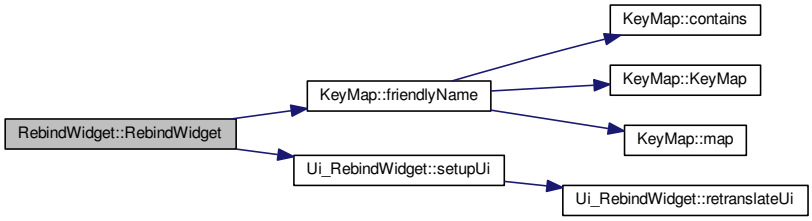

12.80.2.2 RebindWidget::~RebindWidget ( )

Definition at line 59 of file rebindwidget.cpp.

References ui.

```
59                              {
60     delete ui;
61 }
```

12.80.3 Member Function Documentation

12.80.3.1 void RebindWidget::applyChanges (const QStringList & *keys*, bool *doUnbind*) [private], [slot]

G-key macro handling: Set the macro definiton for all keys selected (indeed, it may be multiple keys). First, concat the Macro Key Definion and the Macro plain text after escaping possible colos in the parts for Macro Text and Macro Comment.

But first, there is a special condition to handle: You have recorded a macro with timing infos. Afterwards you changed manually the timing infos in the pteMacroBox and press Apply. In that case we must overwrite the txtBuffer to remember your changes.

Todo There is still a bug in the state machine: If you record a macro in asTyped-mode, switch to another mode and change the vontent of the pteMacroBox manually, then the changes are not saved in the timing buffer. But anyhow, let's do more relevant things...

Definition at line 334 of file rebindwidget.cpp.

References KeyAction::animAction(), Ui_RebindWidget::animBox, Ui_RebindWidget::animKrBox, KbLight::animList(), Ui_RebindWidget::animOnceBox, bind, DPI_OFFSET, KeyAction::dpiAction(), Ui_RebindWidget::dpiBox, Ui_RebindWidget::dpiCustXBox, Ui_RebindWidget::dpiCustYBox, Ui_RebindWidget::fnBox, fnKeys, KbAnim::guid(), KbBind::light(), KeyAction::lightAction(), Ui_RebindWidget::lightBox, Ui_RebindWidget::lightWrapBox, KeyAction::lockAction(), Ui_RebindWidget::lockBox, KeyAction::macroAction(), Ui_RebindWidget::mb2Box, Ui_RebindWidget::mbBox, Ui_RebindWidget::mediaBox, mediaKeys, Ui_RebindWidget::modBox, KeyAction::modeAction(), Ui_RebindWidget::modeBox, Ui_RebindWidget::modeWrapBox, modKeys, mouseExtKeys, mouseKeys, KbBind::noAction(), Ui_RebindWidget::numBox, numKeys, KeyAction::PROGRAM_PR_MULTI, KeyAction::PROGRAM_RE_INDEF, KeyAction::PROGRAM_RE_KPSTOP, KeyAction::PROGRAM_RE_MULTI, KeyAction::programAction(), Ui_RebindWidget::programKpBox, Ui_RebindWidget::programKpModeBox, Ui_RebindWidget::programKpSIBox, Ui_RebindWidget::programKrBox, Ui_RebindWidget::programKrModeBox, Ui_RebindWidget::programKrSIBox, Ui_RebindWidget::pteMacroBox, Ui_RebindWidget::pteMacroComment, Ui_RebindWidget::pteMacroText, Ui_RebindWidget::rb_delay_asTyped, KbBind::setAction(), Ui_RebindWidget::txtBuffer, Ui_RebindWidget::typingBox, typingKeys, ui, Ui_RebindWidget::wheelBox, and wheelKeys.

Referenced by on_applyButton_clicked(), and setSelection().

```
334                                                                         {
335     if(ui->typingBox->currentIndex() > 0)
336         bind->setAction(keys, typingKeys[ui->typingBox->currentIndex() -
    1]);
337     else if(ui->modBox->currentIndex() > 0)
338         bind->setAction(keys, modKeys[ui->modBox->currentIndex() - 1]);
339     else if(ui->fnBox->currentIndex() > 0)
340         bind->setAction(keys, fnKeys[ui->fnBox->currentIndex() - 1]);
341     else if(ui->numBox->currentIndex() > 0)
342         bind->setAction(keys, numKeys[ui->numBox->currentIndex() - 1]);
343     else if(ui->mediaBox->currentIndex() > 0)
344         bind->setAction(keys, mediaKeys[ui->mediaBox->currentIndex() - 1]);
345     else if(ui->mbBox->currentIndex() > 0)
346         bind->setAction(keys, mouseKeys[ui->mbBox->currentIndex() - 1]);
347     else if(ui->mb2Box->currentIndex() > 0)
348         bind->setAction(keys, mouseExtKeys[ui->mb2Box->currentIndex() - 1]
    );
349     else if(ui->wheelBox->currentIndex() > 0)
350         bind->setAction(keys, wheelKeys[ui->wheelBox->currentIndex() - 1]);
351     else if(ui->dpiBox->currentIndex() > 0)
352         bind->setAction(keys, KeyAction::dpiAction(
    ui->dpiBox->currentIndex() - DPI_OFFSET, ui->dpiCustXBox->value(),
    ui->dpiCustYBox->value()));
353     else if(ui->modeBox->currentIndex() > 0)
354         bind->setAction(keys, KeyAction::modeAction(
    ui->modeBox->currentIndex() - 3 - (ui->modeWrapBox->isChecked() &&
    ui->modeBox->currentIndex() < 3 ? 2 : 0)));
355     else if(ui->lightBox->currentIndex() > 0)
356         bind->setAction(keys, KeyAction::lightAction(
    ui->lightBox->currentIndex() - 1 + (ui->lightWrapBox->isChecked() ? 2 : 0)));
357     else if(ui->lockBox->currentIndex() > 0)
358         bind->setAction(keys, KeyAction::lockAction(
    ui->lockBox->currentIndex() - 1));
359     else if(ui->animBox->currentIndex() > 0){
360         KbAnim* anim = bind->light()->animList().at(ui->
    animBox->currentIndex() - 1);
361         bind->setAction(keys, KeyAction::animAction(anim->
    guid(), !ui->animOnceBox->isChecked(), ui->animKrBox->isChecked()));
362     } else if(!ui->programKpBox->text().isEmpty() || !ui->
    programKrBox->text().isEmpty()){
363         int kpStop = 0, krStop = 0;
364         if(!ui->programKpBox->text().isEmpty()){
365             if(!ui->programKpSIBox->isChecked())
366                 kpStop = KeyAction::PROGRAM_PR_MULTI;
367             else
368                 kpStop = ui->programKpModeBox->currentIndex();
369         }
370         if(!ui->programKrBox->text().isEmpty()){
371             if(!ui->programKrSIBox->isChecked())
372                 krStop = KeyAction::PROGRAM_RE_MULTI;
373             else if(ui->programKrModeBox->currentIndex() == 0)
374                 krStop = KeyAction::PROGRAM_RE_INDEF;
375             else
376                 krStop = KeyAction::PROGRAM_RE_KPSTOP;
377         }
378         bind->setAction(keys, KeyAction::programAction(
    ui->programKpBox->text(), ui->programKrBox->text(), kpStop | krStop));
379     } else if (ui->pteMacroBox->toPlainText().length() > 0) {
384
389         if (ui->rb_delay_asTyped->isChecked()) ui->txtBuffer->setText(
    ui->pteMacroBox->toPlainText());
390
396         QString mac;
```

```
397         mac = ui->txtBuffer->text();
398         mac = ui->pteMacroComment->toPlainText().replace(":", "&das_IST_31N_col0n;") + ":"
      + mac;
399         mac = ui->pteMacroText->toPlainText().replace(":", "&das_IST_31N_col0n;") + ":" + mac
    ;
400         mac = ui->pteMacroBox->toPlainText() + ":" + mac;
401         bind->setAction(keys, KeyAction::macroAction(mac));
402     } else if(doUnbind)
403         bind->noAction(keys);
404 }
```

Here is the call graph for this function:

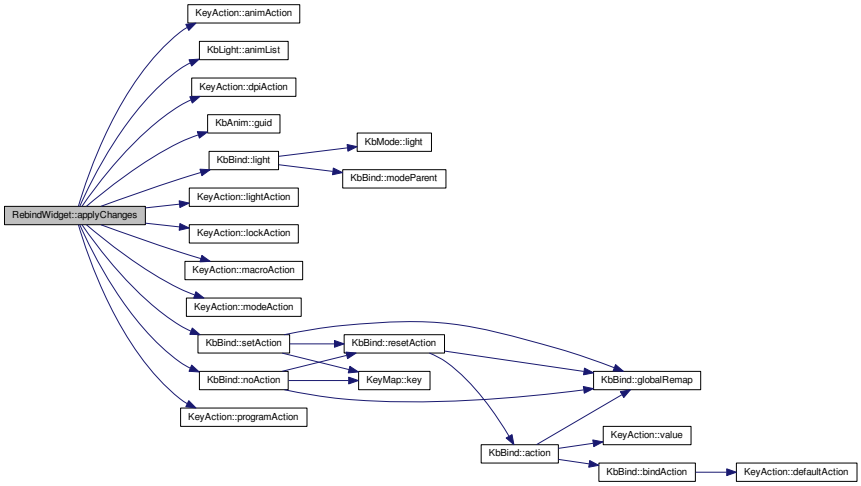

Here is the caller graph for this function:

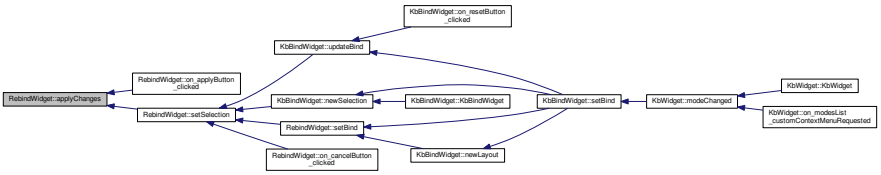

12.80.3.2 void RebindWidget::convertMacroBox ( ) [private]

The ckb-daemon needs a shorter format, only " [+|-]<keyname>=<delay>", multiple entries are separated by comma.

That function does the conversion.

Definition at line 808 of file rebindwidget.cpp.

References Ui_RebindWidget::pteMacroBox, Ui_RebindWidget::rb_delay_default, Ui_RebindWidget::rb_delay_no, Ui_RebindWidget::txtBuffer, and ui.

Referenced by on_btnStopMacro_clicked(), on_rb_delay_asTyped_toggled(), on_rb_delay_default_toggled(), and on_rb_delay_no_toggled().

```
808                                 {
809     QString in;
810
811     // Remember the original input stream before it is converted.
```

```
812     // In case of new choice of delay mode we have to restore it.
813     if (ui->txtBuffer->text() == "") {
814         ui->txtBuffer->setText(ui->pteMacroBox->toPlainText());
815         in = ui->pteMacroBox->toPlainText();
816     } else in = ui->txtBuffer->text();
817
818     in.replace (QRegExp("\n"), ",");     // first join all in one line
819     in.replace (QRegExp("key "), "");    // then delete keyword "key" followed by space
820     in.replace (QRegExp(",="), "=");     // at last join each keystroke with its delay parameter
821
822     // How to deal with the delay params?
823     // Because the three radio buttons are mututally exclusive,
824     // we can run through the if-chain w/o conflicts.
825     // If rb_delay_asTyped is checked, do nothing, because that's the standard.
826
827     if (ui->rb_delay_default->isChecked()) {
828         in.replace(QRegExp("=\\d+,"), ",");  // Delete the timing infos, use default value
829         in.replace(QRegExp("=\\d+$"), "");   // The last entry is without comma
830     }
831     if (ui->rb_delay_no->isChecked()) {
832         in.replace(QRegExp("=\\d+,"), "=0,");  // Set timing infos to zero for no delay
833         in.replace(QRegExp("=\\d+$"), "=0");   // Again the last entry w/o comma
834         in.replace(QRegExp("([\\+\\-]\\w+),"), "\\1=0,");  // If no delay is given, force it to zero
835         in.replace(QRegExp("([\\+\\-]\\w+)$"), "\\1=0");
836     }
837
838     // Show the new format by replacing the older one.
839     ui->pteMacroBox->setPlainText(in);
840 }
```

Here is the caller graph for this function:

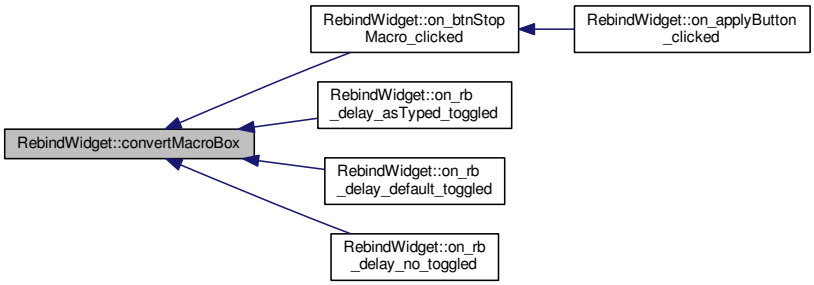

12.80.3.3 void RebindWidget::helpStatus (int *status*) [private]

Parameters

status	determines what to display.

Definition at line 782 of file rebindwidget.cpp.

References Ui_RebindWidget::lbl_macro, and ui.

Referenced by on_btnClearMacro_clicked(), on_btnStartMacro_clicked(), on_btnStopMacro_clicked(), and setBox().

```
782                                         {
783     switch (status) {
784     case 1:
785         ui->lbl_macro->setText("Type in a macro name in the comment box and click start.");
786         break;
787     case 2:
788         ui->lbl_macro->setText("Type your macro and click stop when finished.");
789         break;
790     case 3:
791         ui->lbl_macro->setText("Click Apply or change values in Macro Key Actions in advance.");
792         break;
793     default:
```

```
794         ui->lbl_macro->setText(QString("Oops: Some magic in RebindWidget::helpStatus (%1)").arg(
      status));
795     }
796 }
```

Here is the caller graph for this function:

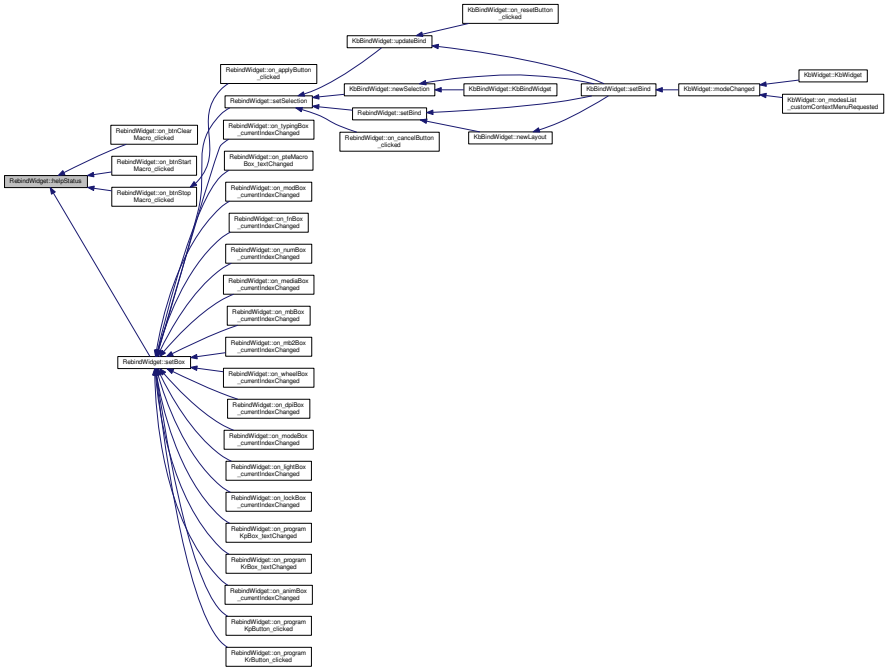

12.80.3.4 void RebindWidget::on_animBox_currentIndexChanged (int *index*) [private], [slot]

Definition at line 613 of file rebindwidget.cpp.

References Ui_RebindWidget::animBox, Ui_RebindWidget::animButton, setBox(), and ui.

```
613                                                     {
614     if(index == 0)
615         ui->animButton->setChecked(false);
616     else {
617         ui->animButton->setChecked(true);
618         setBox(ui->animBox);
619     }
620 }
```

Here is the call graph for this function:



12.80.3.5 void RebindWidget::on_animButton_clicked (bool *checked*) [private], [slot]

Definition at line 710 of file rebindwidget.cpp.

References Ui_RebindWidget::animBox, and ui.

```
710                                                 {
711     if(checked && ui->animBox->currentIndex() == 0)
712         ui->animBox->setCurrentIndex(1);
713 }
```

12.80.3.6 void RebindWidget::on_applyButton_clicked ( ) [private], [slot]

Definition at line 406 of file rebindwidget.cpp.

References applyChanges(), on_btnStopMacro_clicked(), and selection.

```
406                                         {
407     // Normally, this should be done via signalling.
408     // Because there is no serarate thread, we have to call it directly
409     // (otherwise we could do Key char conversion step by step,
410     // but so it is more easy to change the key definition):
411     on_btnStopMacro_clicked();
412     applyChanges(selection, true);
413 }
```

Here is the call graph for this function:

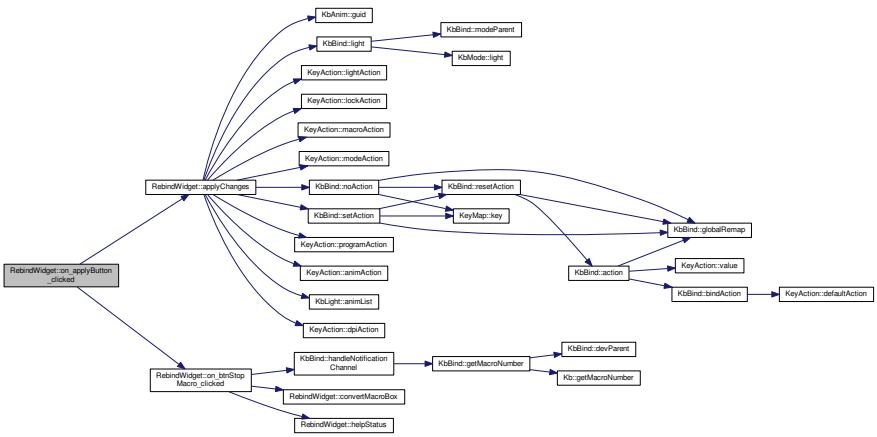

12.80.3.7 void RebindWidget::on_btnClearMacro_clicked ( ) [private], [slot]

Todo I do not know what is the better solution with the delay-buttons in case of clicking clear: Reset the button to the default value or do not touch it? Not clear is ignored.

Definition at line 774 of file rebindwidget.cpp.

References helpStatus().

```
774                                         {
775     helpStatus(1);
776 }
```

Here is the call graph for this function:



12.80.3.8 void RebindWidget::on_btnStartMacro_clicked ( ) [private],[slot]

The UI is protected against false clicking (e.g. if you type start and than Apply, the channel is closed in wrong order).

At this time, all neccessary params like macroNumber, macroPath, cmdFile etc. had been cached.

Definition at line 724 of file rebindwidget.cpp.

References Ui_RebindWidget::applyButton, bind, Ui_RebindWidget::btnStartMacro, Ui_RebindWidget::btnStopMacro, KbBind::getMacroNumber(), KbBind::getMacroPath(), KbBind::handleNotificationChannel(), helpStatus(), macReader, Ui_RebindWidget::pteMacroBox, Ui_RebindWidget::pteMacroText, Ui_RebindWidget::rb_delay_asTyped, Ui_RebindWidget::rb_delay_default, Ui_RebindWidget::rb_delay_no, Ui_RebindWidget::resetButton, ui, and Ui_RebindWidget::unbindButton.

```
724                                             {
725     if (!macReader) {
726         bind->handleNotificationChannel(true);
727         macReader = new MacroReader(bind->getMacroNumber(),
      bind->getMacroPath(), ui->pteMacroBox, ui->
      pteMacroText);
728         // because of the second thread we need to disable three of the four bottom buttons.
729         // Clicking "Stop" will enable them again.
730         ui->applyButton->setEnabled(false);
731         ui->resetButton->setEnabled(false);
732         ui->unbindButton->setEnabled(false);
733         ui->btnStartMacro->setEnabled(false);
734         ui->btnStopMacro->setEnabled(true);
735         ui->rb_delay_asTyped->setEnabled(false);
736         ui->rb_delay_no->setEnabled(false);
737         ui->rb_delay_default->setEnabled(false);
738         helpStatus(2);
739     }
740 }
```

Here is the call graph for this function:

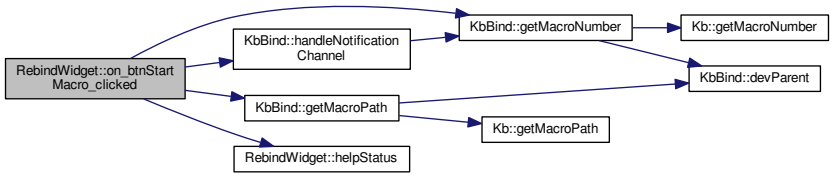

12.80.3.9 void RebindWidget::on_btnStopMacro_clicked ( ) [private],[slot]

Afterwards, the characters in the MacroBox are changed from KB-out format to cmd-in format. At last the UI changes to the new state.

Definition at line 749 of file rebindwidget.cpp.

References Ui_RebindWidget::applyButton, bind, Ui_RebindWidget::btnStartMacro, Ui_RebindWidget::btnStopMacro, convertMacroBox(), KbBind::handleNotificationChannel(), helpStatus(), macReader, Ui_RebindWidget::rb_delay_asTyped, Ui_RebindWidget::rb_delay_default, Ui_RebindWidget::rb_delay_no, Ui_RebindWidget::resetButton, ui, and Ui_RebindWidget::unbindButton.

Referenced by on_applyButton_clicked().

```
749                                         {
750     if (macReader) {
751         bind->handleNotificationChannel(false);
752         delete macReader;
753         macReader = 0;
754         convertMacroBox();
755         ui->applyButton->setEnabled(true);
756         ui->resetButton->setEnabled(true);
757         ui->unbindButton->setEnabled(true);
758         ui->btnStartMacro->setEnabled(true);
759         ui->btnStopMacro->setEnabled(false);
760         ui->rb_delay_asTyped->setEnabled(true);
761         ui->rb_delay_no->setEnabled(true);
762         ui->rb_delay_default->setEnabled(true);
763         helpStatus(3);
764     }
765 }
```

Here is the call graph for this function:

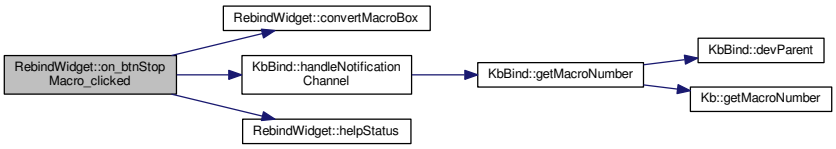

Here is the caller graph for this function:



12.80.3.10 void RebindWidget::on_cancelButton_clicked ( ) [private], [slot]

Definition at line 415 of file rebindwidget.cpp.

References selection, and setSelection().

```
415                                         {
416     // Re-load selection
417     setSelection(selection);
418 }
```

Here is the call graph for this function:

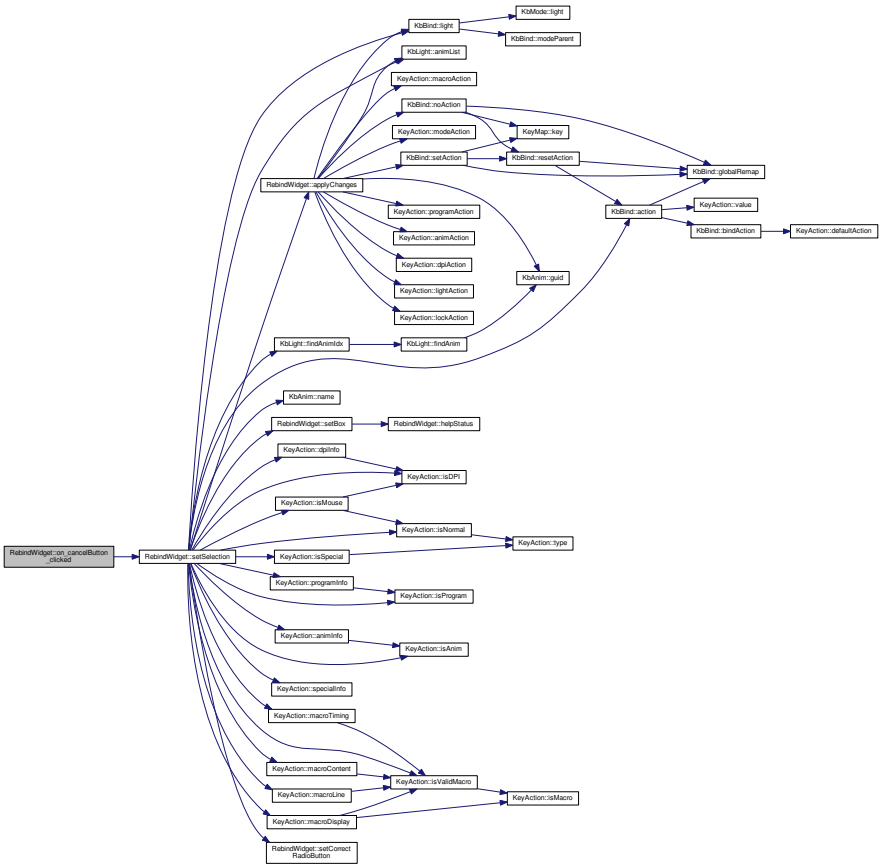

12.80.3.11 void RebindWidget::on_dpiBox_currentIndexChanged (int *index*) [private], [slot]

Definition at line 539 of file rebindwidget.cpp.

References DPI_CUST_IDX, Ui_RebindWidget::dpiBox, Ui_RebindWidget::dpiButton, Ui_RebindWidget::dpiCustLabel, Ui_RebindWidget::dpiCustXBox, Ui_RebindWidget::dpiCustYBox, setBox(), and ui.

```
539                                                     {
540     if(index != DPI_CUST_IDX){
541         // Clear custom DPI
542         ui->dpiCustXBox->setEnabled(false);
543         ui->dpiCustYBox->setEnabled(false);
544         ui->dpiCustLabel->setEnabled(false);
545     } else {
546         ui->dpiCustXBox->setEnabled(true);
547         ui->dpiCustYBox->setEnabled(true);
548         ui->dpiCustLabel->setEnabled(true);
549     }
550     if(index == 0)
551         ui->dpiButton->setChecked(false);
552     else {
553         ui->dpiButton->setChecked(true);
554         setBox(ui->dpiBox);
555     }
556 }
```

Here is the call graph for this function:



12.80.3.12 void RebindWidget::on_dpiButton_clicked (bool *checked*) [private], [slot]

Definition at line 695 of file rebindwidget.cpp.

References Ui_RebindWidget::dpiBox, and ui.

```
695                                                 {
696     if(checked && ui->dpiBox->currentIndex() == 0)
697         ui->dpiBox->setCurrentIndex(1);
698 }
```

12.80.3.13 void RebindWidget::on_fnBox_currentIndexChanged (int *index*) [private], [slot]

Definition at line 485 of file rebindwidget.cpp.

References Ui_RebindWidget::fnBox, Ui_RebindWidget::fnButton, setBox(), and ui.

```
485                                                     {
486     if(index == 0)
487         ui->fnButton->setChecked(false);
488     else {
489         ui->fnButton->setChecked(true);
490         setBox(ui->fnBox);
491     }
492 }
```

Here is the call graph for this function:



12.80.3.14 void RebindWidget::on_fnButton_clicked (bool *checked*) [private], [slot]

Definition at line 632 of file rebindwidget.cpp.

References Ui_RebindWidget::fnBox, and ui.

```
632                                                 {
633     if(checked && ui->fnBox->currentIndex() == 0)
634         ui->fnBox->setCurrentIndex(1);
635 }
```

12.80.3.15 void RebindWidget::on_lightBox_currentIndexChanged (int *index*) [private], [slot]

Definition at line 571 of file rebindwidget.cpp.

References Ui_RebindWidget::lightBox, Ui_RebindWidget::lightButton, Ui_RebindWidget::lightWrapBox, setBox(), and ui.

```
571                                                         {
572     if(index == 0){
573         ui->lightButton->setChecked(false);
574         ui->lightWrapBox->hide();
575     } else {
576         ui->lightWrapBox->show();
577         ui->lightButton->setChecked(true);
578         setBox(ui->lightBox);
579     }
580 }
```

Here is the call graph for this function:

12.80.3.16 void RebindWidget::on_lightButton_clicked (bool *checked*) [private], [slot]

Definition at line 652 of file rebindwidget.cpp.

References Ui_RebindWidget::lightBox, and ui.

```
652                                                 {
653     if(checked && ui->lightBox->currentIndex() == 0)
654         ui->lightBox->setCurrentIndex(1);
655 }
```

12.80.3.17 void RebindWidget::on_lockBox_currentIndexChanged (int *index*) [private], [slot]

Definition at line 582 of file rebindwidget.cpp.

References Ui_RebindWidget::lockBox, Ui_RebindWidget::lockButton, setBox(), and ui.

```
582                                                         {
583     if(index == 0)
584         ui->lockButton->setChecked(false);
585     else {
586         ui->lockButton->setChecked(true);
587         setBox(ui->lockBox);
588     }
589 }
```

Here is the call graph for this function:



12.80.3.18 void RebindWidget::on_lockButton_clicked (bool *checked*) [private], [slot]

Definition at line 657 of file rebindwidget.cpp.

References Ui_RebindWidget::lockBox, and ui.

```
657                                                 {
658     if(checked && ui->lockBox->currentIndex() == 0)
659         ui->lockBox->setCurrentIndex(1);
660 }
```

12.80.3.19 void RebindWidget::on_mb2Box_currentIndexChanged (int *index*) [private], [slot]

Definition at line 521 of file rebindwidget.cpp.

References Ui_RebindWidget::mb2Box, Ui_RebindWidget::mb2Button, setBox(), and ui.

```
521                                                     {
522     if(index == 0)
523         ui->mb2Button->setChecked(false);
524     else {
525         ui->mb2Button->setChecked(true);
526         setBox(ui->mb2Box);
527     }
528 }
```

Here is the call graph for this function:



12.80.3.20 void RebindWidget::on_mb2Button_clicked (bool *checked*) [private], [slot]

Definition at line 685 of file rebindwidget.cpp.

References Ui_RebindWidget::mb2Box, and ui.

```
685                                                 {
686     if(checked && ui->mb2Box->currentIndex() == 0)
687         ui->mb2Box->setCurrentIndex(1);
688 }
```

12.80.3.21 void RebindWidget::on_mbBox_currentIndexChanged (int *index*) [private], [slot]

Definition at line 512 of file rebindwidget.cpp.

References Ui_RebindWidget::mbBox, Ui_RebindWidget::mbButton, setBox(), and ui.

```
512                                                     {
513     if(index == 0)
514         ui->mbButton->setChecked(false);
515     else {
516         ui->mbButton->setChecked(true);
517         setBox(ui->mbBox);
518     }
519 }
```

Here is the call graph for this function:



12.80.3.22 void RebindWidget::on_mbButton_clicked (bool *checked*) [private], [slot]

Definition at line 680 of file rebindwidget.cpp.

References Ui_RebindWidget::mbBox, and ui.

```
680                                                 {
681     if(checked && ui->mbBox->currentIndex() == 0)
682         ui->mbBox->setCurrentIndex(1);
683 }
```

12.80.3.23 void RebindWidget::on_mediaBox_currentIndexChanged (int *index*) [private], [slot]

Definition at line 503 of file rebindwidget.cpp.

References Ui_RebindWidget::mediaBox, Ui_RebindWidget::mediaButton, setBox(), and ui.

```
503                                                     {
504     if(index == 0)
505         ui->mediaButton->setChecked(false);
506     else {
507         ui->mediaButton->setChecked(true);
508         setBox(ui->mediaBox);
509     }
510 }
```

Here is the call graph for this function:



12.80.3.24 void RebindWidget::on_mediaButton_clicked (bool *checked*) [private], [slot]

Definition at line 642 of file rebindwidget.cpp.

References Ui_RebindWidget::mediaBox, and ui.

```
642                                                 {
643     if(checked && ui->mediaBox->currentIndex() == 0)
644         ui->mediaBox->setCurrentIndex(1);
645 }
```

12.80.3.25 void RebindWidget::on_modBox_currentIndexChanged (int *index*) [private], [slot]

Definition at line 476 of file rebindwidget.cpp.

References Ui_RebindWidget::modBox, Ui_RebindWidget::modButton, setBox(), and ui.

```
476                                                     {
477     if(index == 0)
478         ui->modButton->setChecked(false);
479     else {
480         ui->modButton->setChecked(true);
481         setBox(ui->modBox);
482     }
483 }
```

Here is the call graph for this function:



12.80.3.26 void RebindWidget::on_modButton_clicked (bool *checked*) [private], [slot]

Definition at line 627 of file rebindwidget.cpp.

References Ui_RebindWidget::modBox, and ui.

```
627                                                 {
628     if(checked && ui->modBox->currentIndex() == 0)
629         ui->modBox->setCurrentIndex(1);
630 }
```

12.80.3.27 void RebindWidget::on_modeBox_currentIndexChanged (int *index*) [private], [slot]

Definition at line 558 of file rebindwidget.cpp.

References Ui_RebindWidget::modeBox, Ui_RebindWidget::modeButton, Ui_RebindWidget::modeWrapBox, setBox(), and ui.

```
558                                                     {
559     if(index == 1 || index == 2)
560         ui->modeWrapBox->show();
561     else
562         ui->modeWrapBox->hide();
563     if(index == 0)
564         ui->modeButton->setChecked(false);
565     else {
566         ui->modeButton->setChecked(true);
567         setBox(ui->modeBox);
568     }
569 }
```

Here is the call graph for this function:



12.80.3.28 void RebindWidget::on_modeButton_clicked (bool *checked*) [private], [slot]

Definition at line 647 of file rebindwidget.cpp.

References Ui_RebindWidget::modeBox, and ui.

```
647                                                 {
648     if(checked && ui->modeBox->currentIndex() == 0)
649         ui->modeBox->setCurrentIndex(1);
650 }
```

12.80.3.29 void RebindWidget::on_numBox_currentIndexChanged (int *index*) [private], [slot]

Definition at line 494 of file rebindwidget.cpp.

References Ui_RebindWidget::numBox, Ui_RebindWidget::numButton, setBox(), and ui.

```
494                                                     {
495     if(index == 0)
496         ui->numButton->setChecked(false);
497     else {
498         ui->numButton->setChecked(true);
499         setBox(ui->numBox);
500     }
501 }
```

Here is the call graph for this function:



12.80.3.30 void RebindWidget::on_numButton_clicked (bool *checked*) [private], [slot]

Definition at line 637 of file rebindwidget.cpp.

References Ui_RebindWidget::numBox, and ui.

```
637                                                 {
638     if(checked && ui->numBox->currentIndex() == 0)
639         ui->numBox->setCurrentIndex(1);
640 }
```

12.80.3.31 void RebindWidget::on_programKpBox_textChanged (const QString & *arg1*) [private], [slot]

Definition at line 591 of file rebindwidget.cpp.

References Ui_RebindWidget::programKpBox, Ui_RebindWidget::programKpButton, Ui_RebindWidget::programKpExtra, setBox(), and ui.

```
591                                                         {
592     if(arg1.isEmpty()){
593         ui->programKpButton->setChecked(false);
594         ui->programKpExtra->hide();
595     } else {
596         ui->programKpButton->setChecked(true);
597         setBox(ui->programKpBox);
598         ui->programKpExtra->show();
599     }
600 }
```

Here is the call graph for this function:

12.80.3.32 void RebindWidget::on_programKpButton_clicked (bool *checked*) [private], [slot]

Definition at line 662 of file rebindwidget.cpp.

References Ui_RebindWidget::programKpBox, setBox(), and ui.

```
662                                                     {
663     if(!checked){
664         ui->programKpBox->setText("");
665     } else if(ui->programKpBox->text().isEmpty()){
666         ui->programKpBox->setFocus();
667         setBox(ui->programKpBox);
668     }
669 }
```

Here is the call graph for this function:

12.80.3.33 void RebindWidget::on_programKpSlBox_clicked (bool *checked*) [private], [slot]

Definition at line 700 of file rebindwidget.cpp.

References Ui_RebindWidget::programKpModeBox, and ui.

```
700                                                     {
701     ui->programKpModeBox->setCurrentIndex(0);
702     ui->programKpModeBox->setEnabled(checked);
703 }
```

12.80.3.34 void RebindWidget::on_programKrBox_textChanged (const QString & *arg1*) [private], [slot]

Definition at line 602 of file rebindwidget.cpp.

References Ui_RebindWidget::programKrBox, Ui_RebindWidget::programKrButton, Ui_RebindWidget::programKrExtra, setBox(), and ui.

```
602                                                     {
603     if(arg1.isEmpty()){
604         ui->programKrButton->setChecked(false);
605         ui->programKrExtra->hide();
606     } else {
607         ui->programKrButton->setChecked(true);
608         setBox(ui->programKrBox);
609         ui->programKrExtra->show();
610     }
611 }
```

Here is the call graph for this function:

12.80.3.35 void RebindWidget::on_programKrButton_clicked (bool *checked*) [private], [slot]

Definition at line 671 of file rebindwidget.cpp.

References Ui_RebindWidget::programKrBox, setBox(), and ui.

```
671                                                     {
672     if(!checked){
673         ui->programKrBox->setText("");
674     } else if(ui->programKrBox->text().isEmpty()){
675         ui->programKrBox->setFocus();
676         setBox(ui->programKrBox);
677     }
678 }
```

Here is the call graph for this function:

12.80.3.36 void RebindWidget::on_programKrSlBox_clicked (bool *checked*) [private], [slot]

Definition at line 705 of file rebindwidget.cpp.

References Ui_RebindWidget::programKrModeBox, and ui.

```
705                                                     {
706     ui->programKrModeBox->setCurrentIndex(0);
707     ui->programKrModeBox->setEnabled(checked);
708 }
```

12.80.3.37 void RebindWidget::on_pteMacroBox_textChanged ( ) [private], [slot]

Definition at line 470 of file rebindwidget.cpp.

References Ui_RebindWidget::pteMacroBox, setBox(), and ui.

```
470                                             {
471     if (ui->pteMacroBox->toPlainText().length() > 0) {
472         setBox(ui->pteMacroBox);
473     }
474 }
```

Here is the call graph for this function:



12.80.3.38 void RebindWidget::on_rb_delay_asTyped_toggled (bool *checked*) [private], [slot]

Parameters

checked	This button ist clicked to use the delay times, as they are recorded. Returs a warning message, if we are not in the recording phase, because then we don't have the delay times any more.

Definition at line 862 of file rebindwidget.cpp.

References convertMacroBox().

```
863 {
864     convertMacroBox();
865 }
```

Here is the call graph for this function:



12.80.3.39 void RebindWidget::on_rb_delay_default_toggled (bool *checked*) [private], [slot]

Parameters

checked	This is as easy as the no-delay-button, because this means take the default values.

Definition at line 873 of file rebindwidget.cpp.

References convertMacroBox().

```
874 {
875     convertMacroBox();
876 }
```

Here is the call graph for this function:



12.80.3.40 void RebindWidget::on_rb_delay_no_toggled (bool *checked*) [private],[slot]

Parameters

checked	The following slots are triggerd by changing the mutual exclusive radio buttons when choosing the delay. They are called, if the button ist enabled. This first one should disable all delay.

Definition at line 850 of file rebindwidget.cpp.

References convertMacroBox().

```
851 {
852     convertMacroBox();
853 }
```

Here is the call graph for this function:



12.80.3.41 void RebindWidget::on_resetButton_clicked ( ) [private],[slot]

Definition at line 420 of file rebindwidget.cpp.

References bind, KbBind::resetAction(), and selection.

```
420                                         {
421     bind->resetAction(selection);
422 }
```

Here is the call graph for this function:



12.80.3.42 void RebindWidget::on_typingBox_currentIndexChanged (int *index*) [private], [slot]

Definition at line 461 of file rebindwidget.cpp.

References setBox(), Ui_RebindWidget::typingBox, Ui_RebindWidget::typingButton, and ui.

```
461                                                         {
462     if(index == 0)
463         ui->typingButton->setChecked(false);
464     else {
465         ui->typingButton->setChecked(true);
466         setBox(ui->typingBox);
467     }
468 }
```

Here is the call graph for this function:



12.80.3.43 void RebindWidget::on_typingButton_clicked (bool *checked*) [private], [slot]

Definition at line 622 of file rebindwidget.cpp.

References Ui_RebindWidget::typingBox, and ui.

```
622                                                     {
623     if(checked && ui->typingBox->currentIndex() == 0)
624         ui->typingBox->setCurrentIndex(1);
625 }
```

12.80.3.44 void RebindWidget::on_unbindButton_clicked ( ) [private], [slot]

Definition at line 424 of file rebindwidget.cpp.

References bind, KbBind::noAction(), and selection.

```
424                                                 {
425     bind->noAction(selection);
426 }
```

Here is the call graph for this function:



12.80.3.45 void RebindWidget::on_wheelBox_currentIndexChanged (int *index*) [private], [slot]

Definition at line 530 of file rebindwidget.cpp.

References setBox(), ui, Ui_RebindWidget::wheelBox, and Ui_RebindWidget::wheelButton.

```
530                                                          {
531     if(index == 0)
532         ui->wheelButton->setChecked(false);
533     else {
534         ui->wheelButton->setChecked(true);
535         setBox(ui->wheelBox);
536     }
537 }
```

Here is the call graph for this function:



12.80.3.46 void RebindWidget::on_wheelButton_clicked (bool *checked*) [private], [slot]

Definition at line 690 of file rebindwidget.cpp.

References ui, and Ui_RebindWidget::wheelBox.

```
690                                                      {
691     if(checked && ui->wheelBox->currentIndex() == 0)
692         ui->wheelBox->setCurrentIndex(1);
693 }
```

12.80.3.47 void RebindWidget::setBind (KbBind * *newBind*, KbProfile * *newProfile*)

Definition at line 63 of file rebindwidget.cpp.

References bind, KeyMap::byPosition(), KbBind::defaultAction(), KbPerf::dpi(), KbPerf::DPI_COUNT, Ui_RebindWidget::dpiBox, Ui_RebindWidget::dpiButton, Ui_RebindWidget::dpiCustLabel, Ui_RebindWidget::dpiCustXBox, Ui_RebindWidget::dpiCustYBox, Ui_RebindWidget::dpiWarning, fnKeys, Key::friendlyName(), KeyMap::isISO(), KbBind::isMouse(), KeyAction::isNormal(), KeyMap::K95, KeyMap::layout(), KbBind::map(), mediaKeys, Ui_RebindWidget::modeBox, KbProfile::modes(), modKeys, KbMode::name(), numKeys, KbBind::perf(), profile, setSelection(), Ui_RebindWidget::typingBox, typingKeys, and ui.

Referenced by KbBindWidget::newLayout(), and KbBindWidget::setBind().

```
63                                                                {
64     bind = newBind;
65     profile = newProfile;
66     setSelection(QStringList());
67
68     // Populate typing keys by position
69     ui->typingBox->clear();
70     ui->typingBox->addItem(" ");
71     typingKeys.clear();
72     // Use the K95 map as it has all keys
73     const KeyMap& map = KeyMap(KeyMap::K95, bind->map().
       layout());
74     foreach(const QString& name, map.byPosition()){
75         KeyAction action(KbBind::defaultAction(name));
76         if(action.isNormal() && !modKeys.contains(name) && !fnKeys.contains(name) && !
       numKeys.contains(name) && !mediaKeys.contains(name) && name != "enter" && name != "tab" &&
       name != "bspace"){
```

```
77              const Key& pos = map[name];
78              QString friendly = pos.friendlyName();
79              ui->typingBox->addItem(friendly);
80              typingKeys.append(name);
81          }
82      }
83      typingKeys << "enter" << "tab" << "bspace";
84      ui->typingBox->addItem("Enter");
85      ui->typingBox->addItem("Tab");
86      ui->typingBox->addItem("Backspace");
87      if(!map.isISO()){
88          // Add ISO backslash (aka KEY_102ND) to ANSI options
89          typingKeys << "bslash_iso";
90          ui->typingBox->addItem("Backslash (ISO layout)");
91      }
92
93      // Populate mode list
94      ui->modeBox->clear();
95      ui->modeBox->addItem(" ");
96      ui->modeBox->addItem("(Previous)");
97      ui->modeBox->addItem("(Next)");
98      int idx = 1;
99      foreach(KbMode* mode, newProfile->modes())
100         ui->modeBox->addItem(QString("%1: %2").arg(idx++).arg(mode->
    name()));
101
102     // Enable/disable DPI based on device
103     if(bind->isMouse()){
104         ui->dpiButton->setEnabled(true);
105         ui->dpiBox->setEnabled(true);
106         ui->dpiWarning->hide();
107         // Fill DPI slots
108         const KbPerf* perf = bind->perf();
109         for(int i = 0; i < KbPerf::DPI_COUNT; i++){
110             bool sniper = (i == 0);
111             int boxIdx = i + 3;
112             QPoint dpi = perf->dpi(i);
113             QString text = tr(sniper ? "Sniper:\t%1 x %2" : "%3:\t%1 x %2").arg(dpi.x()).arg(dpi.y());
114             if(!sniper) text = text.arg(i);
115             ui->dpiBox->setItemText(boxIdx, text);
116         }
117     } else {
118         ui->dpiButton->setEnabled(false);
119         ui->dpiBox->setEnabled(false);
120         ui->dpiWarning->show();
121     }
122     // Always disable custom DPI boxes until selected
123     ui->dpiCustXBox->setEnabled(false);
124     ui->dpiCustYBox->setEnabled(false);
125     ui->dpiCustLabel->setEnabled(false);
126 }
```

Here is the call graph for this function:

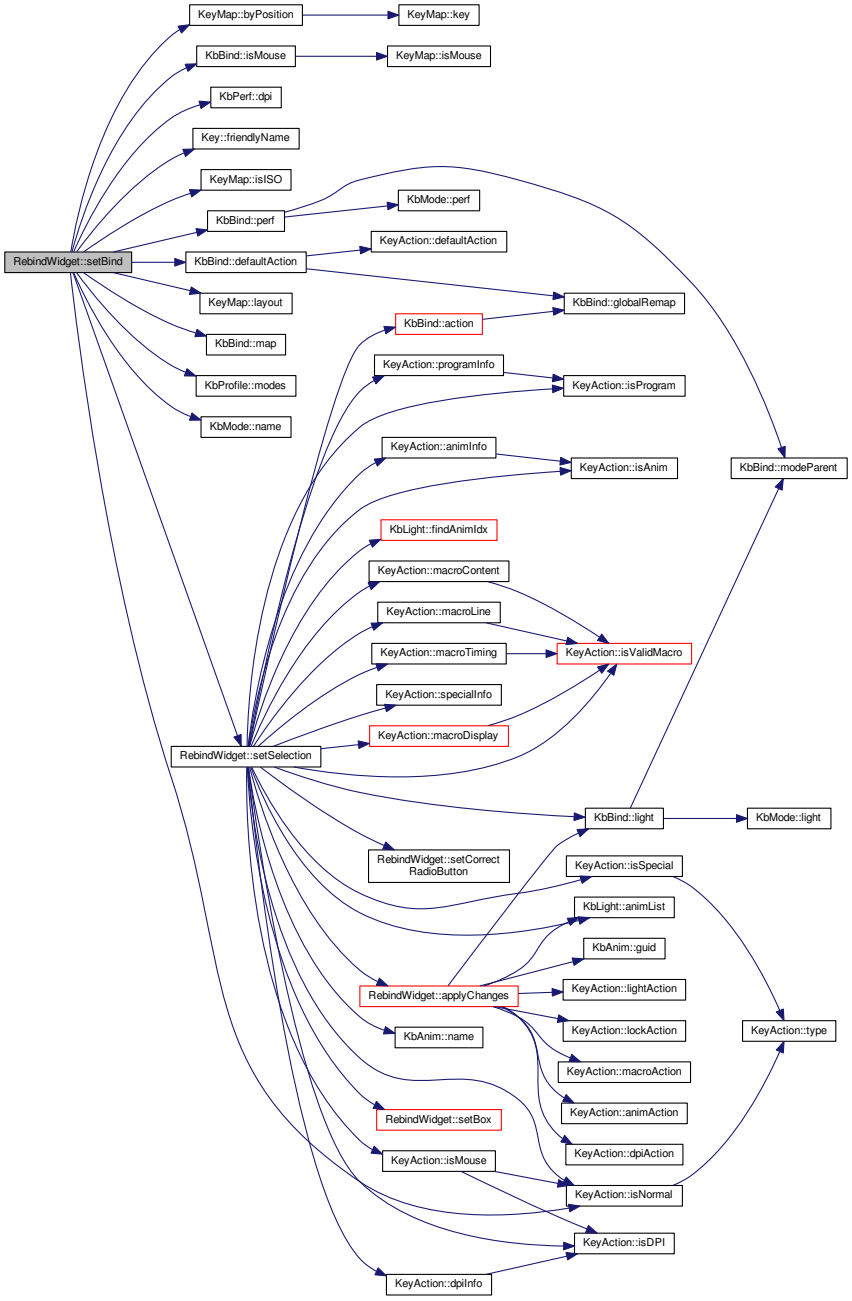

Here is the caller graph for this function:

12.80.3.48 void RebindWidget::setBox (QWidget * *box*) [private]

Definition at line 428 of file rebindwidget.cpp.

References Ui_RebindWidget::animBox, Ui_RebindWidget::dpiBox, Ui_RebindWidget::fnBox, helpStatus(), Ui_RebindWidget::lightBox, Ui_RebindWidget::lockBox, Ui_RebindWidget::mb2Box, Ui_RebindWidget::mbBox, Ui_RebindWidget::mediaBox, Ui_RebindWidget::modBox, Ui_RebindWidget::modeBox, Ui_RebindWidget::numBox, Ui_RebindWidget::programKpBox, Ui_RebindWidget::programKpButton, Ui_RebindWidget::programKrBox, Ui_RebindWidget::programKrButton, Ui_RebindWidget::pteMacroBox, Ui_RebindWidget::txtBuffer, Ui_RebindWidget::typingBox, ui, and Ui_RebindWidget::wheelBox.

Referenced by on_animBox_currentIndexChanged(), on_dpiBox_currentIndexChanged(), on_fnBox_currentIndexChanged(), on_lightBox_currentIndexChanged(), on_lockBox_currentIndexChanged(), on_mb2Box_currentIndexChanged(), on_mbBox_currentIndexChanged(), on_mediaBox_currentIndexChanged(), on_modBox_currentIndexChanged(), on_modeBox_currentIndexChanged(), on_numBox_currentIndexChanged(), on_programKpBox_textChanged(), on_programKpButton_clicked(), on_programKrBox_textChanged(), on_programKrButton_clicked(), on_pteMacroBox_textChanged(), on_typingBox_currentIndexChanged(), on_wheelBox_currentIndexChanged(), and setSelection().

```
428                                     {
429     // Un-select every item except for the current one.
430     // on_*_currentIndexChanged will take care of deselecting the checkbox.
431     // Key
432     if(box != ui->typingBox) ui->typingBox->setCurrentIndex(0);
433     if(box != ui->modBox) ui->modBox->setCurrentIndex(0);
434     if(box != ui->fnBox) ui->fnBox->setCurrentIndex(0);
435     if(box != ui->numBox) ui->numBox->setCurrentIndex(0);
436     if(box != ui->mediaBox) ui->mediaBox->setCurrentIndex(0);
437     // Mouse
438     if(box != ui->mbBox) ui->mbBox->setCurrentIndex(0);
439     if(box != ui->mb2Box) ui->mb2Box->setCurrentIndex(0);
440     if(box != ui->wheelBox) ui->wheelBox->setCurrentIndex(0);
441     if(box != ui->dpiBox) ui->dpiBox->setCurrentIndex(0);
442     // Anim
443     if(box != ui->animBox) ui->animBox->setCurrentIndex(0);
444     // Special
445     if(box != ui->modeBox) ui->modeBox->setCurrentIndex(0);
446     if(box != ui->lightBox) ui->lightBox->setCurrentIndex(0);
447     if(box != ui->lockBox) ui->lockBox->setCurrentIndex(0);
448     // Program
449     if(box != ui->programKpBox && box != ui->programKrBox){
450         ui->programKpButton->setChecked(false);
451         ui->programKrButton->setChecked(false);
452     }
453     // Clear macro panel
454     if (box != ui->pteMacroBox) {
455         ui->pteMacroBox->setPlainText("");
456         ui->txtBuffer->setText("");
457         helpStatus(1);
458     }
459 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

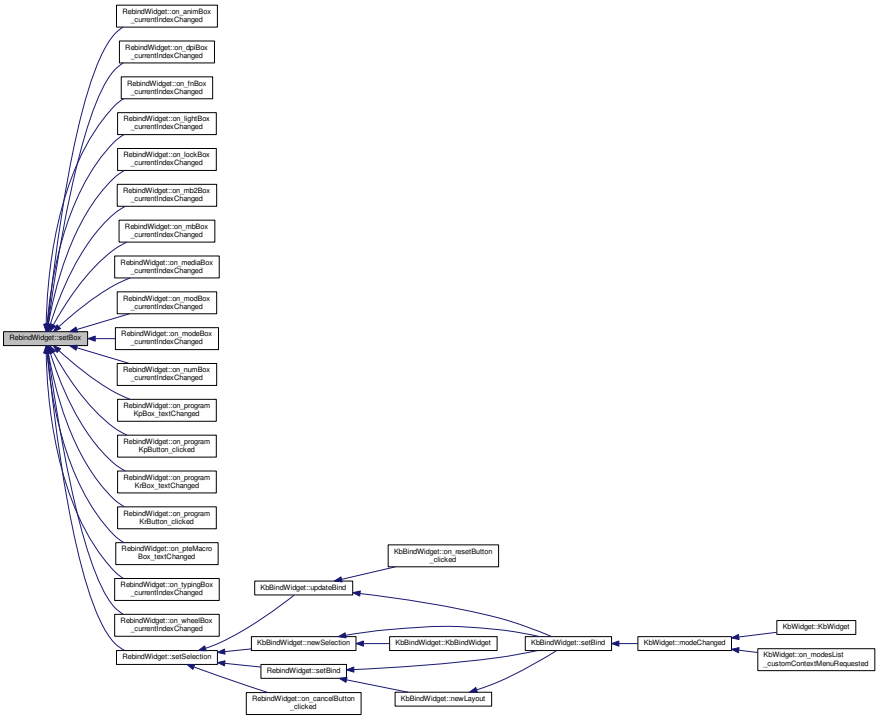

12.80.3.49 void RebindWidget::setCorrectRadioButton (QString *macdef*) [private]

Parameters

macdef	Set the radiobutton for timing paramters according to the context. If no "=" followed by a number and comma can be found, it is the default button. If "=" can be found and numbers with more than one digit (means: $>$ 9), it is the "asTyped" button Otherwise it is the "no" button.

Definition at line 887 of file rebindwidget.cpp.

References Ui_RebindWidget::rb_delay_asTyped, Ui_RebindWidget::rb_delay_default, Ui_RebindWidget::rb_delay_no, and ui.

Referenced by setSelection().

```
887                                                     {
888     if (!macdef.contains(QRegExp("=\\d+,"))) {
889         ui->rb_delay_default->setChecked(true);
890         return;
891     }
892     if (macdef.contains(QRegExp("=\\d\\d+,"))) {
893         ui->rb_delay_asTyped->setChecked(true);
894         return;
895     }
896     ui->rb_delay_no->setChecked(true);
897 }
```

Here is the caller graph for this function:

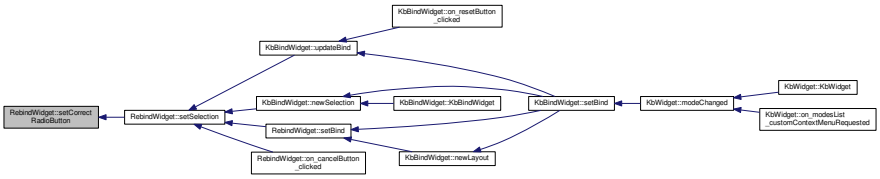

12.80.3.50 void RebindWidget::setSelection (const QStringList & *newSelection,* bool *applyPrevious* = `false`)

Definition at line 128 of file rebindwidget.cpp.

References KbBind::action(), Ui_RebindWidget::animBox, KeyAction::animInfo(), Ui_RebindWidget::animKrBox, KbLight::animList(), Ui_RebindWidget::animOnceBox, applyChanges(), bind, KeyAction::DPI_CUSTOM, DPI_OFFSET, Ui_RebindWidget::dpiBox, Ui_RebindWidget::dpiCustXBox, Ui_RebindWidget::dpiCustYBox, KeyAction::dpiInfo(), KbLight::findAnimIdx(), Ui_RebindWidget::fnBox, fnKeys, KeyAction::isAnim(), KeyAction::isDPI(), KeyAction::isMouse(), KeyAction::isNormal(), KeyAction::isProgram(), KeyAction::isSpecial(), KeyAction::isValidMacro(), KbBind::light(), KeyAction::LIGHT_DOWN, KeyAction::LIGHT_DOWN_WRAP, KeyAction::LIGHT_UP, KeyAction::LIGHT_UP_WRAP, Ui_RebindWidget::lightBox, Ui_RebindWidget::lightWrapBox, Ui_RebindWidget::lockBox, KeyAction::macroContent(), KeyAction::macroDisplay(), KeyAction::macroLine(), KeyAction::macroTiming(), Ui_RebindWidget::mb2Box, Ui_RebindWidget::mbBox, Ui_RebindWidget::mediaBox, mediaKeys, Ui_RebindWidget::modBox, KeyAction::MODE_NEXT, KeyAction::MODE_NEXT_WRAP, KeyAction::MODE_PREV, KeyAction::MODE_PREV_WRAP, Ui_RebindWidget::modeBox, Ui_RebindWidget::modeWrapBox, modKeys, mouseExtKeys, mouseKeys, KbAnim::name(), Ui_RebindWidget::numBox, numKeys, KeyAction::PROGRAM_PR_MULTI, KeyAction::PROGRAM_RE_INDEF, KeyAction::PROGRAM_RE_KPSTOP, KeyAction::PROGRAM_RE_MULTI, KeyAction::programInfo(), Ui_RebindWidget::programKpBox, Ui_RebindWidget::programKpModeBox, Ui_RebindWidget::programKpSIBox, Ui_RebindWidget::programKrBox, Ui_RebindWidget::programKrModeBox, Ui_RebindWidget::programKrSIBox, Ui_RebindWidget::pteMacroBox, Ui_RebindWidget::pteMacroComment, Ui_RebindWidget::pteMacroText, selection, setBox(), setCorrectRadioButton(), KeyAction::specialInfo(), TAB_ANIM, TAB_KB, TAB_MACRO, TAB_MOUSE, TAB_PROGRAM, TAB_SPECIAL, Ui_RebindWidget::tabWidget, Ui_RebindWidget::txtBuffer, Ui_RebindWidget::typingBox, typingKeys, ui, Ui_RebindWidget::wheelBox, and wheelKeys.

Referenced by KbBindWidget::newSelection(), on_cancelButton_clicked(), setBind(), and KbBindWidget::updateBind().

```
128                                                                                 {
129     if(bind){
130         // Populate animation list
131         // FIXME: There should be a trigger to update this whenever an animation is added/removed, even if
        the key selection hasn't changed
132         ui->animBox->clear();
133         ui->animBox->addItem(" ");
134         foreach(KbAnim* anim, bind->light()->animList())
135             ui->animBox->addItem(anim->name());
136     }
137
138     // Apply changes to previous selection (if any)
139     if(!selection.isEmpty() && applyPrevious){
140         QStringList previous = selection;
141         selection = QStringList();
142         applyChanges(previous, false);
143     }
144
145     selection = newSelection;
146     if(newSelection.isEmpty()){
147         hide();
148         return;
149     } else
150         show();
151
152     bool hasAction = false;
153     QString action;
154     if(selection.count() == 1){
```

```
155         // Select action from the UI
156         action = bind->action(selection.first());
157         if(!action.isEmpty())
158             hasAction = true;
159     } else {
160         // Select an action from the UI if all keys are the same.
161         // Select nothing if any are unbound or different
162         foreach(const QString& key, selection){
163             QString keyAction = bind->action(key);
164             if(keyAction.isEmpty() || (hasAction && keyAction != action)){
165                 hasAction = false;
166                 break;
167             } else if(action.isEmpty()){
168                 action = keyAction;
169                 hasAction = true;
170             }
171         }
172     }
173 
174     if(!hasAction)
175         action = "";
176     KeyAction act(action);
177     // Clear everything
178     setBox(0);
179     ui->dpiCustXBox->setValue(400);
180     ui->dpiCustYBox->setValue(400);
181     ui->animOnceBox->setChecked(false);
182     ui->animKrBox->setChecked(false);
183     ui->programKpBox->setText("");
184     ui->programKrBox->setText("");
185     ui->programKpSIBox->setChecked(false);
186     ui->programKrSIBox->setChecked(false);
187     ui->programKpModeBox->setCurrentIndex(0);
188     ui->programKrModeBox->setCurrentIndex(0);
189     ui->programKpModeBox->setEnabled(false);
190     ui->programKrModeBox->setEnabled(false);
191     // Clear neu UI elements in MacroTab
192     ui->pteMacroBox->setPlainText("");
193     ui->pteMacroText->setPlainText("");
194     ui->pteMacroComment->setPlainText("");
195     ui->txtBuffer->setText("");
196     // Fill in field and select tab according to action type
197     bool mouse = act.isMouse();
198     if(mouse){
199         // Mouse buttons
200         ui->tabWidget->setCurrentIndex(TAB_MOUSE);
201         // Set mouse buttons (indexOf returns -1 if not found, index zero is blank)
202         ui->mbBox->setCurrentIndex(mouseKeys.indexOf(action) + 1);
203         ui->mb2Box->setCurrentIndex(mouseExtKeys.indexOf(action) + 1);
204         ui->wheelBox->setCurrentIndex(wheelKeys.indexOf(action) + 1);
205         if(act.isDPI()){
206             QPoint custom;
207             int value = act.dpiInfo(custom);
208             if(value <= -DPI_OFFSET || value > KeyAction::DPI_CUSTOM)
209                 return;
210             ui->dpiBox->setCurrentIndex(value + DPI_OFFSET);
211             if(value == KeyAction::DPI_CUSTOM){
212                 ui->dpiCustXBox->setValue(custom.x());
213                 ui->dpiCustYBox->setValue(custom.y());
214             }
215         }
216     } else if(act.isNormal()){
217         // Standard key
218         ui->tabWidget->setCurrentIndex(TAB_KB);
219         ui->typingBox->setCurrentIndex(typingKeys.indexOf(action) + 1);
220         ui->modBox->setCurrentIndex(modKeys.indexOf(action) + 1);
221         ui->fnBox->setCurrentIndex(fnKeys.indexOf(action) + 1);
222         ui->numBox->setCurrentIndex(numKeys.indexOf(action) + 1);
223         ui->mediaBox->setCurrentIndex(mediaKeys.indexOf(action) + 1);
224     } else if(act.isProgram()){
225         // Program key
226         ui->tabWidget->setCurrentIndex(TAB_PROGRAM);
227         QString onPress, onRelease;
228         int stop = act.programInfo(onPress, onRelease);
229         ui->programKpBox->setText(onPress);
230         ui->programKrBox->setText(onRelease);
231         switch(stop & 0x0F){
232         case KeyAction::PROGRAM_PR_MULTI:
233             ui->programKpSIBox->setChecked(false);
234             ui->programKpModeBox->setCurrentIndex(0);
235             ui->programKpModeBox->setEnabled(false);
236             break;
237         default:
238             ui->programKpSIBox->setChecked(true);
239             ui->programKpModeBox->setCurrentIndex(stop & 0x0F);
240             ui->programKpModeBox->setEnabled(true);
241             break;
```

```
242         }
243         switch(stop & 0xF0){
244         case KeyAction::PROGRAM_RE_MULTI:
245             ui->programKrSIBox->setChecked(false);
246             ui->programKrModeBox->setCurrentIndex(0);
247             ui->programKrModeBox->setEnabled(false);
248             break;
249         case KeyAction::PROGRAM_RE_INDEF:
250             ui->programKrSIBox->setChecked(true);
251             ui->programKrModeBox->setCurrentIndex(0);
252             ui->programKrModeBox->setEnabled(true);
253             break;
254         case KeyAction::PROGRAM_RE_KPSTOP:
255             ui->programKrSIBox->setChecked(true);
256             ui->programKrModeBox->setCurrentIndex(1);
257             ui->programKrModeBox->setEnabled(true);
258             break;
259         }
260     } else if(act.isAnim()){
261         // Animation key
262         ui->tabWidget->setCurrentIndex(TAB_ANIM);
263         bool onlyOnce = false, stopOnRelease = false;
264         QUuid id = act.animInfo(onlyOnce, stopOnRelease);
265         // Find this animation in the list. If not found, -1 will be returned, resulting in the blank space
    being selected
266         int index = bind->light()->findAnimIdx(id);
267         ui->animBox->setCurrentIndex(index + 1);
268         ui->animOnceBox->setChecked(!onlyOnce);
269         ui->animKrBox->setChecked(stopOnRelease);
270     } else if(act.isSpecial()){
271         // Other special keys
272         ui->tabWidget->setCurrentIndex(TAB_SPECIAL);
273         int param;
274         QString sAction = act.specialInfo(param);
275         // Mode selection. Check wrap-around flag
276         ui->modeWrapBox->setChecked(true);
277         if(sAction == "mode"){
278             ui->modeWrapBox->setChecked(true);
279             if(param == KeyAction::MODE_PREV_WRAP)
280                 param = KeyAction::MODE_PREV;
281             else if(param == KeyAction::MODE_NEXT_WRAP)
282                 param = KeyAction::MODE_NEXT;
283             else if(param < 0)
284                 ui->modeWrapBox->setChecked(false);
285             // Set mode box to current selection, or to mode 1 if invalid
286             param += 3;
287             if(param >= 0 && param < ui->modeBox->count())
288                 ui->modeBox->setCurrentIndex(param);
289             else
290                 // 0 -> "", 1 -> Prev, 2 -> Next, 3 -> Mode 1
291                 ui->modeBox->setCurrentIndex(3);
292         } else if (sAction == "macro") {
293             ui->tabWidget->setCurrentIndex(TAB_MACRO);
294             if (act.isValidMacro()) {
295                 ui->pteMacroBox->setPlainText(act.macroContent());
296                 ui->pteMacroText->setPlainText(act.macroLine()[1].replace("
    &das_IST_31N_col0n;", ":"));
297                 ui->pteMacroComment->setPlainText(act.macroLine()[2].replace("
    &das_IST_31N_col0n;", ":"));
298                 // Set the invisible Buffer to the original timing information.
299                 // For convenience / Migration from older versions:
300                 // If the timing information is only "x", then ignore it by setting it to an empty QString.
301                 ui->txtBuffer->setText("");
302                 if (act.macroTiming() != "x") ui->txtBuffer->setText(act.macroTiming());
303                 setCorrectRadioButton(act.macroContent());
304             } else {
305                 qDebug("RebindWidget::setSelection found invalid macro definition.");
306                 act.macroDisplay();
307             }
308         } else
309             ui->modeBox->setCurrentIndex(0);
310         // Brightness control. Also check wrap
311         if(sAction == "light"){
312             ui->lightWrapBox->setChecked(true);
313             if(param == KeyAction::LIGHT_DOWN_WRAP)
314                 param = KeyAction::LIGHT_DOWN;
315             else if(param == KeyAction::LIGHT_UP_WRAP)
316                 param = KeyAction::LIGHT_UP;
317             else
318                 ui->lightWrapBox->setChecked(false);
319             if(param < 0 || param > 1)
320                 param = -1;
321             ui->lightBox->setCurrentIndex(param + 1);
322         } else
323             ui->lightBox->setCurrentIndex(0);
324         // Win lock
325         if(sAction == "lock"){
```

```
326             if(param < 0 || param > 2)
327                 param = -1;
328             ui->lockBox->setCurrentIndex(param + 1);
329         } else
330             ui->lockBox->setCurrentIndex(0);
331     }
332 }
```

Here is the call graph for this function:

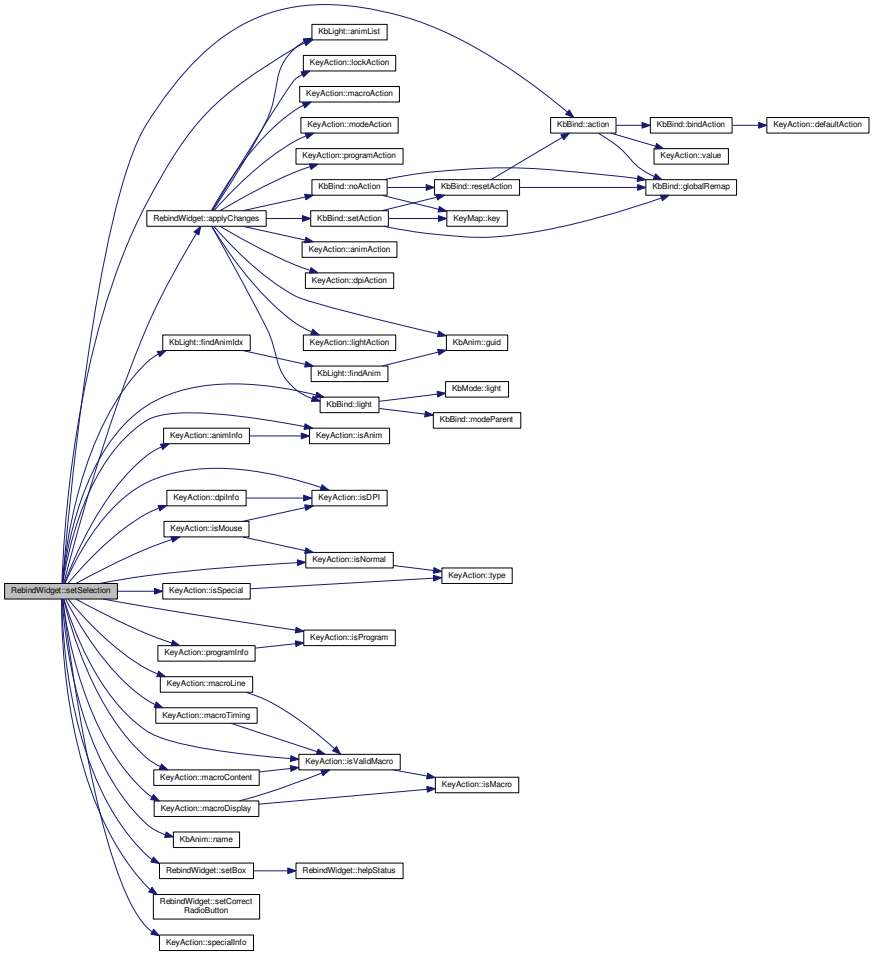

Here is the caller graph for this function:

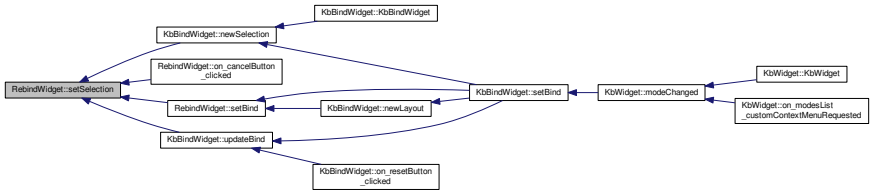

12.80.4 Field Documentation

12.80.4.1 KbBind* RebindWidget::bind [private]

Definition at line 94 of file rebindwidget.h.

Referenced by applyChanges(), on_btnStartMacro_clicked(), on_btnStopMacro_clicked(), on_resetButton_clicked(), on_unbindButton_clicked(), setBind(), and setSelection().

12.80.4.2 QStringList RebindWidget::fnKeys [private]

Definition at line 100 of file rebindwidget.h.

Referenced by applyChanges(), RebindWidget(), setBind(), and setSelection().

12.80.4.3 MacroReader* RebindWidget::macReader [private]

Definition at line 106 of file rebindwidget.h.

Referenced by on_btnStartMacro_clicked(), and on_btnStopMacro_clicked().

12.80.4.4 QStringList RebindWidget::mediaKeys [private]

Definition at line 102 of file rebindwidget.h.

Referenced by applyChanges(), RebindWidget(), setBind(), and setSelection().

12.80.4.5 QStringList RebindWidget::modKeys [private]

Definition at line 99 of file rebindwidget.h.

Referenced by applyChanges(), RebindWidget(), setBind(), and setSelection().

12.80.4.6 QStringList RebindWidget::mouseExtKeys [private]

Definition at line 104 of file rebindwidget.h.

Referenced by applyChanges(), RebindWidget(), and setSelection().

12.80.4.7 QStringList RebindWidget::mouseKeys [private]

Definition at line 103 of file rebindwidget.h.

Referenced by applyChanges(), RebindWidget(), and setSelection().

12.80.4.8 QStringList RebindWidget::numKeys [private]

Definition at line 101 of file rebindwidget.h.

Referenced by applyChanges(), RebindWidget(), setBind(), and setSelection().

12.80.4.9 KbProfile* RebindWidget::profile [private]

Definition at line 95 of file rebindwidget.h.

Referenced by setBind().

12.80.4.10 QStringList RebindWidget::selection [private]

Definition at line 96 of file rebindwidget.h.

Referenced by on_applyButton_clicked(), on_cancelButton_clicked(), on_resetButton_clicked(), on_unbindButton_clicked(), and setSelection().

12.80.4.11 const int RebindWidget::TAB_ANIM = 2 [static], [private]

Definition at line 83 of file rebindwidget.h.

Referenced by setSelection().

12.80.4.12 const int RebindWidget::TAB_KB = 0 [static], [private]

Definition at line 83 of file rebindwidget.h.

Referenced by setSelection().

12.80.4.13 const int RebindWidget::TAB_MACRO = 5 [static], [private]

Definition at line 83 of file rebindwidget.h.

Referenced by setSelection().

12.80.4.14 const int RebindWidget::TAB_MOUSE = 1 [static], [private]

Definition at line 83 of file rebindwidget.h.

Referenced by setSelection().

12.80.4.15 const int RebindWidget::TAB_PROGRAM = 4 [static], [private]

Definition at line 83 of file rebindwidget.h.

Referenced by setSelection().

12.80.4.16 const int RebindWidget::TAB_SPECIAL = 3 [static], [private]

Definition at line 83 of file rebindwidget.h.

Referenced by setSelection().

12.80.4.17 QStringList RebindWidget::typingKeys [private]

Definition at line 98 of file rebindwidget.h.

Referenced by applyChanges(), setBind(), and setSelection().

12.80.4.18 Ui::RebindWidget* RebindWidget::ui [private]

Definition at line 80 of file rebindwidget.h.

Referenced by applyChanges(), convertMacroBox(), helpStatus(), on_animBox_currentIndexChanged(), on_animButton_clicked(), on_btnStartMacro_clicked(), on_btnStopMacro_clicked(), on_dpiBox_currentIndexChanged(),

on_dpiButton_clicked(), on_fnBox_currentIndexChanged(), on_fnButton_clicked(), on_lightBox_currentIndexChanged(), on_lightButton_clicked(), on_lockBox_currentIndexChanged(), on_lockButton_clicked(), on_mb2Box_currentIndexChanged(), on_mb2Button_clicked(), on_mbBox_currentIndexChanged(), on_mbButton_clicked(), on_mediaBox_currentIndexChanged(), on_mediaButton_clicked(), on_modBox_currentIndexChanged(), on_modButton_clicked(), on_modeBox_currentIndexChanged(), on_modeButton_clicked(), on_numBox_currentIndexChanged(), on_numButton_clicked(), on_programKpBox_textChanged(), on_programKpButton_clicked(), on_programKpSIBox_clicked(), on_programKrBox_textChanged(), on_programKrButton_clicked(), on_programKrSIBox_clicked(), on_pteMacroBox_textChanged(), on_typingBox_currentIndexChanged(), on_typingButton_clicked(), on_wheelBox_currentIndexChanged(), on_wheelButton_clicked(), RebindWidget(), setBind(), setBox(), setCorrectRadioButton(), setSelection(), and ~RebindWidget().

12.80.4.19 QStringList RebindWidget::wheelKeys [private]

Definition at line 105 of file rebindwidget.h.

Referenced by applyChanges(), RebindWidget(), and setSelection().

The documentation for this class was generated from the following files:

- src/ckb/rebindwidget.h
- src/ckb/rebindwidget.cpp

12.81 RListWidget Class Reference

`#include <src/ckb/rlistwidget.h>`

Inheritance diagram for RListWidget:

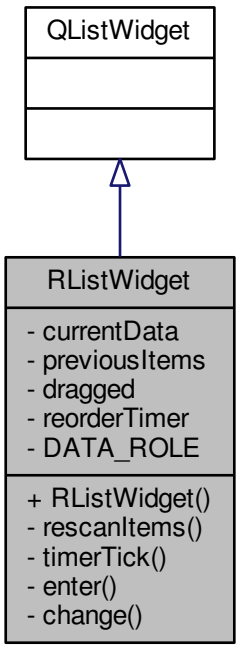

Collaboration diagram for RListWidget:

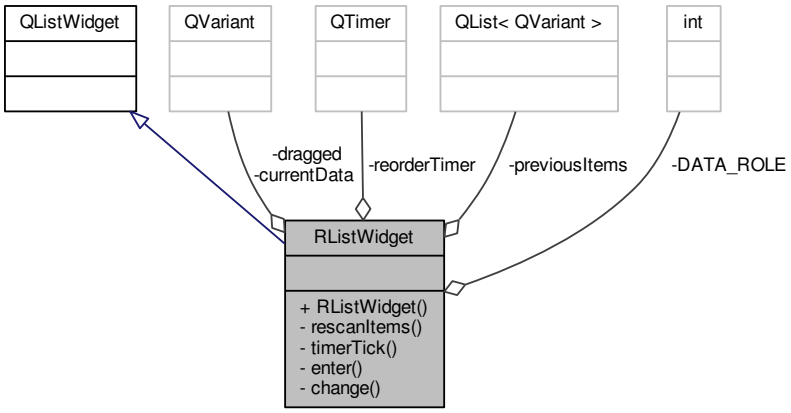

Signals

- void orderChanged ()

Public Member Functions

- RListWidget (QWidget ∗parent=0)

Private Slots

- void timerTick ()
- void enter (QListWidgetItem ∗item)
- void change (QListWidgetItem ∗item)

Private Member Functions

- void rescanItems ()

Private Attributes

- QVariant currentData
- QList< QVariant > previousItems
- QVariant dragged
- QTimer reorderTimer

Static Private Attributes

- static const int DATA_ROLE = Qt::UserRole + 100

12.81.1 Detailed Description

Definition at line 9 of file rlistwidget.h.

12.81.2 Constructor & Destructor Documentation

12.81.2.1 RListWidget::RListWidget (QWidget * *parent* = 0) [explicit]

Definition at line 4 of file rlistwidget.cpp.

References change(), enter(), reorderTimer, and timerTick().

```
4                                          :
5     QListWidget(parent)
6 {
7     setDragDropMode(QAbstractItemView::InternalMove);
8     setMovement(QListView::Snap);
9
10     reorderTimer.setSingleShot(true);
11     reorderTimer.setInterval(100);
12     connect(&reorderTimer, SIGNAL(timeout()), this, SLOT(timerTick()));
13
14     connect(this, SIGNAL(itemEntered(QListWidgetItem*)), this, SLOT(enter(QListWidgetItem*)));
15     connect(this, SIGNAL(itemChanged(QListWidgetItem*)), this, SLOT(change(QListWidgetItem*)));
16 }
```

Here is the call graph for this function:

12.81.3 Member Function Documentation

12.81.3.1 void RListWidget::change (QListWidgetItem * *item*) [private], [slot]

Definition at line 54 of file rlistwidget.cpp.

References reorderTimer.

Referenced by RListWidget().

```
54                                                {
55     reorderTimer.stop();
56     reorderTimer.start();
57 }
```

Here is the caller graph for this function:



12.81.3.2 void RListWidget::enter (QListWidgetItem * *item*) [private],[slot]

Definition at line 47 of file rlistwidget.cpp.

References DATA_ROLE, dragged, and rescanItems().

Referenced by RListWidget().

```
47                                              {
48     rescanItems();
49     // Check for drag+drop setup
50     if(item)
51         dragged = item->data(DATA_ROLE);
52 }
```

Here is the call graph for this function:



Here is the caller graph for this function:



12.81.3.3 void RListWidget::orderChanged ( ) [signal]

Definition at line 141 of file moc_rlistwidget.cpp.

Referenced by timerTick().

```
142 {
143     QMetaObject::activate(this, &staticMetaObject, 0, Q_NULLPTR);
144 }
```

Here is the caller graph for this function:



12.81.3.4 void RListWidget::rescanItems ( ) [private]

Definition at line 59 of file rlistwidget.cpp.

References DATA_ROLE, and previousItems.

Referenced by enter().

```
59                              {
60      QList<QVariant> newItems;
61      int c = count();
62      for(int i = 0; i < c; i++){
63          QVariant data = this->item(i)->data(DATA_ROLE);
64          if(data.isNull()){
65              // Generate the ID for this item if it doesn't already exist
66              data = QUuid::createUuid();
67              this->item(i)->setData(DATA_ROLE, data);
68          }
69          newItems.append(data);
70      }
71      previousItems = newItems;
72  }
```

Here is the caller graph for this function:

12.81.3.5 void RListWidget::timerTick ( ) [private], [slot]

Definition at line 18 of file rlistwidget.cpp.

References DATA_ROLE, dragged, orderChanged(), and previousItems.

Referenced by RListWidget().

```
18                            {
19      bool reordered = false;
20      QListWidgetItem* reselect = 0;
21      QList<QVariant> newItems;
22      // Scan the item list to see if they changed
23      int c = count();
24      for(int i = 0; i < c; i++){
25          QListWidgetItem* itm = item(i);
26          QVariant data = itm->data(DATA_ROLE);
27          newItems.append(data);
28          if(i >= previousItems.count() || data != previousItems[i])
29              reordered = true;
30          // Re-select the dragged item (if any)
31          if(data == dragged)
32              reselect = itm;
33      }
34      if(previousItems.length() != newItems.length())
35          return;
36      if(reordered){
37          previousItems = newItems;
38          emit orderChanged();
39          if(reselect){
40              reselect->setSelected(true);
41              setCurrentItem(reselect);
42              dragged = QVariant();
43          }
44      }
45  }
```

Here is the caller graph for this function:

12.81.4 Field Documentation

12.81.4.1 QVariant RListWidget::currentData [private]

Definition at line 24 of file rlistwidget.h.

12.81.4.2 const int RListWidget::DATA_ROLE = Qt::UserRole + 100 [static], [private]

Definition at line 29 of file rlistwidget.h.

Referenced by enter(), rescanItems(), and timerTick().

12.81.4.3 QVariant RListWidget::dragged [private]

Definition at line 26 of file rlistwidget.h.

Referenced by enter(), and timerTick().

12.81.4.4 QList<QVariant> RListWidget::previousItems [private]

Definition at line 25 of file rlistwidget.h.

Referenced by rescanItems(), and timerTick().

12.81.4.5 QTimer RListWidget::reorderTimer [private]

Definition at line 27 of file rlistwidget.h.

Referenced by change(), and RListWidget().

The documentation for this class was generated from the following files:

- src/ckb/rlistwidget.h
- src/ckb/release/moc_rlistwidget.cpp
- src/ckb/rlistwidget.cpp

12.82 SettingsWidget Class Reference

`#include <src/ckb/settingswidget.h>`

Inheritance diagram for SettingsWidget:

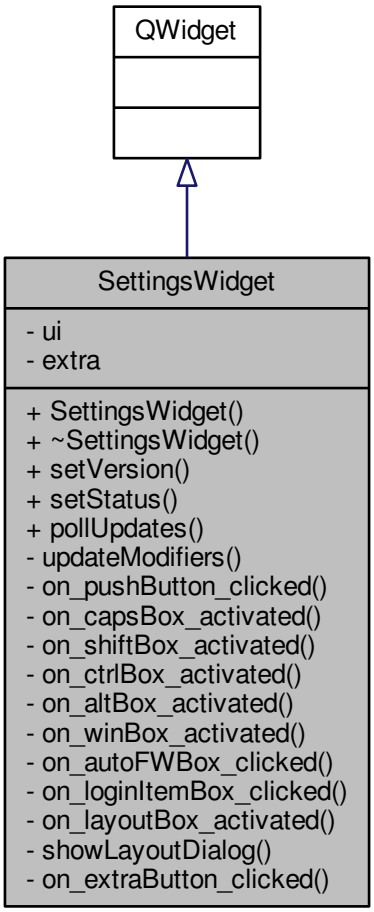

Collaboration diagram for SettingsWidget:

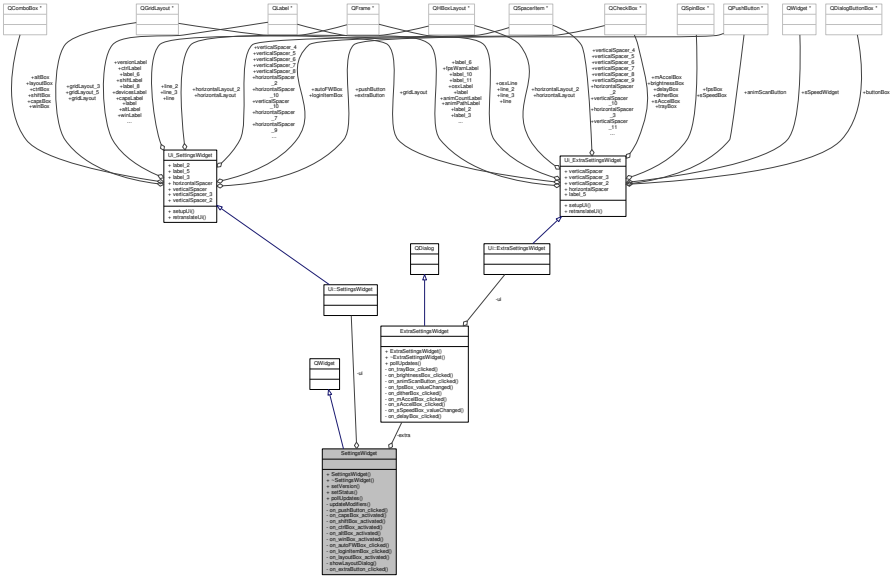

Public Member Functions

- SettingsWidget (QWidget ∗parent=0)
- ∼SettingsWidget ()
- void setVersion (const QString &version)
- void setStatus (const QString &text)
- void pollUpdates ()

Private Slots

- void on_pushButton_clicked ()
- void on_capsBox_activated (int index)
- void on_shiftBox_activated (int index)
- void on_ctrlBox_activated (int index)
- void on_altBox_activated (int index)
- void on_winBox_activated (int index)
- void on_autoFWBox_clicked (bool checked)
- void on_loginItemBox_clicked (bool checked)
- void on_layoutBox_activated (int index)
- void showLayoutDialog ()
- void on_extraButton_clicked ()

Private Member Functions

- void updateModifiers ()

Private Attributes

- Ui::SettingsWidget ∗ ui
- ExtraSettingsWidget ∗ extra

Friends

- class MainWindow

12.82.1 Detailed Description

Definition at line 11 of file settingswidget.h.

12.82.2 Constructor & Destructor Documentation

12.82.2.1 SettingsWidget::SettingsWidget (QWidget * *parent* = 0) [explicit]

Definition at line 15 of file settingswidget.cpp.

References Ui_SettingsWidget::altBox, Ui_SettingsWidget::autoFWBox, AutoRun::available(), Ui_SettingsWidget::capsBox, Ui_SettingsWidget::ctrlBox, AutoRun::enable(), extra, KeyMap::getLayout(), KbBind::globalRemap(), AutoRun::isEnabled(), Kb::layout(), Ui_SettingsWidget::layoutBox, KeyMap::layoutNames(), KbBind::loadGlobalRemap(), KeyMap::locale(), Ui_SettingsWidget::loginItemBox, modKeys, modNames, KeyMap::NO_LAYOUT, AutoRun::once(), CkbSettings::remove(), Ui_SettingsWidget::setupUi(), CkbSettings::setValue(), Ui_SettingsWidget::shiftBox, showLayoutDialog(), ui, updateModifiers(), CkbSettings::value(), and Ui_SettingsWidget::winBox.

```
15                                                  :
16     QWidget(parent),
17     ui(new Ui::SettingsWidget)
18 {
19     ui->setupUi(this);
20     CkbSettings settings("Program");
21
22     // Read keyboard layout
23     ui->layoutBox->addItems(KeyMap::layoutNames());
24     KeyMap::Layout layout = KeyMap::getLayout(settings.value("KbdLayout").
       toString());
25     if(layout == KeyMap::NO_LAYOUT){
26         // If the layout hasn't been set yet, show a dialog to let the user choose it
27         layout = KeyMap::locale();
28         QTimer::singleShot(1000, this, SLOT(showLayoutDialog()));   // Run the function
       after a delay as the dialog may not appear correctly otherwise
29         settings.setValue("KbdLayout", KeyMap::getLayout(layout));
30     }
31     Kb::layout(layout);
32     ui->layoutBox->setCurrentIndex((int)layout);
33
34     // Load modifier remap
35     KbBind::loadGlobalRemap();
36     if(modKeys.isEmpty()){
37         modKeys << "caps" << "lshift" << "lctrl" << "lalt" << "lwin";
38 #ifdef Q_OS_MACX
39         modNames << "Caps Lock" << "Shift" << "Control ()" << "Option ()" << "Command ()";
40 #else
41         modNames << "Caps Lock" << "Shift" << "Control" << "Alt" << "Super";
42 #endif
43     }
44     foreach(const QString& name, modNames){
45         ui->capsBox->addItem(name);
46         ui->shiftBox->addItem(name);
47         ui->ctrlBox->addItem(name);
48         ui->altBox->addItem(name);
49         ui->winBox->addItem(name);
50     }
51
52     int idx = modKeys.indexOf(KbBind::globalRemap("caps"));
53     if(idx >= 0)
54         ui->capsBox->setCurrentIndex(idx);
55     idx = modKeys.indexOf(KbBind::globalRemap("lshift"));
56     if(idx >= 0)
57         ui->shiftBox->setCurrentIndex(idx);
58     idx = modKeys.indexOf(KbBind::globalRemap("lctrl"));
59     if(idx >= 0)
60         ui->ctrlBox->setCurrentIndex(idx);
61     idx = modKeys.indexOf(KbBind::globalRemap("lwin"));
62     if(idx >= 0)
63         ui->winBox->setCurrentIndex(idx);
64     idx = modKeys.indexOf(KbBind::globalRemap("lalt"));
65     if(idx >= 0)
66         ui->altBox->setCurrentIndex(idx);
```

```
67 #ifdef Q_OS_MACX
68     if(settings.value("osxCmdSwap").toBool()){
69         // ckb <0.0.41
70         settings.remove("osxCmdSwap");
71         ui->ctrlBox->setCurrentIndex(modKeys.indexOf("lwin"));
72         ui->winBox->setCurrentIndex(modKeys.indexOf("lctrl"));
73         updateModifiers();
74     }
75 #endif
76
77     // Read auto update settings
78     ui->autoFWBox->setChecked(!settings.value("DisableAutoFWCheck").toBool());
79
80     // Read auto run settings
81     if(!AutoRun::available())
82         ui->loginItemBox->hide();
83     else {
84         if(!AutoRun::once())
85             // If this is the first time running the app, enable auto run by default
86             AutoRun::enable();
87         ui->loginItemBox->setChecked(AutoRun::isEnabled());
88     }
89
90     // Prepare extra settings
91     extra = new ExtraSettingsWidget(this);
92 }
```

Here is the call graph for this function:

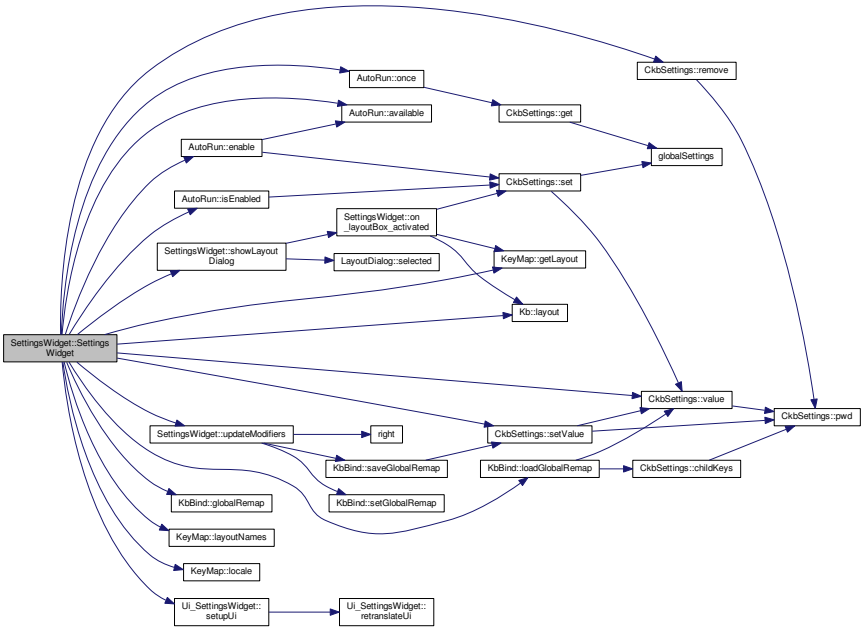

12.82.2.2 SettingsWidget::~SettingsWidget ( )

Definition at line 94 of file settingswidget.cpp.

References ui.

```
94                                {
95     delete ui;
96 }
```

12.82.3 Member Function Documentation

12.82.3.1 void SettingsWidget::on_altBox_activated (int *index*) [private], [slot]

Definition at line 155 of file settingswidget.cpp.

References updateModifiers().

```
155                                                 {
156     updateModifiers();
157 }
```

Here is the call graph for this function:



12.82.3.2 void SettingsWidget::on_autoFWBox_clicked (bool *checked*) [private], [slot]

Definition at line 163 of file settingswidget.cpp.

References CkbSettings::set().

```
163                                                    {
164     CkbSettings::set("Program/DisableAutoFWCheck", !checked);
165 }
```

Here is the call graph for this function:



12.82.3.3 void SettingsWidget::on_capsBox_activated (int *index*) [private], [slot]

Definition at line 143 of file settingswidget.cpp.

References updateModifiers().

```
143                                                 {
144     updateModifiers();
145 }
```

Here is the call graph for this function:



12.82.3.4 void SettingsWidget::on_ctrlBox_activated (int *index*) [private], [slot]

Definition at line 151 of file settingswidget.cpp.

References updateModifiers().

```
151                                                 {
152     updateModifiers();
153 }
```

Here is the call graph for this function:



12.82.3.5 void SettingsWidget::on_extraButton_clicked ( ) [private], [slot]

Definition at line 180 of file settingswidget.cpp.

References extra.

```
180                                             {
181     extra->exec();
182 }
```

12.82.3.6 void SettingsWidget::on_layoutBox_activated (int *index*) [private], [slot]

Definition at line 174 of file settingswidget.cpp.

References KeyMap::getLayout(), Kb::layout(), and CkbSettings::set().

Referenced by showLayoutDialog().

```
174                                                 {
175     KeyMap::Layout layout = (KeyMap::Layout)index;
176     CkbSettings::set("Program/KbdLayout", KeyMap::getLayout(layout));
177     Kb::layout(layout);
178 }
```

Here is the call graph for this function:

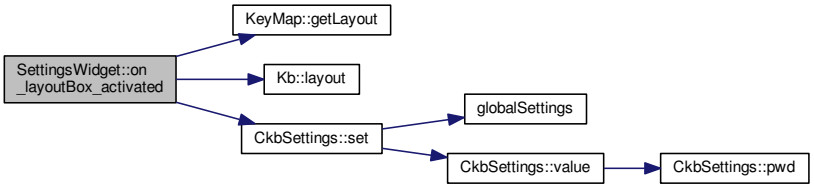

Here is the caller graph for this function:



12.82.3.7 void SettingsWidget::on_loginItemBox_clicked (bool *checked*) [private],[slot]

Definition at line 167 of file settingswidget.cpp.

References AutoRun::disable(), and AutoRun::enable().

```
167                                                     {
168     if(checked)
169         AutoRun::enable();
170     else
171         AutoRun::disable();
172 }
```

Here is the call graph for this function:

12.82.3.8 void SettingsWidget::on_pushButton_clicked ( ) [private],[slot]

Definition at line 139 of file settingswidget.cpp.

```
139                                         {
140     qApp->quit();
141 }
```

12.82.3.9 void SettingsWidget::on_shiftBox_activated (int *index*) [private],[slot]

Definition at line 147 of file settingswidget.cpp.

References updateModifiers().

```
147                                                 {
148     updateModifiers();
149 }
```

Here is the call graph for this function:



12.82.3.10 void SettingsWidget::on_winBox_activated (int *index*) [private], [slot]

Definition at line 159 of file settingswidget.cpp.

References updateModifiers().

```
159                                                {
160     updateModifiers();
161 }
```

Here is the call graph for this function:



12.82.3.11 void SettingsWidget::pollUpdates ( )

Definition at line 106 of file settingswidget.cpp.

References extra, and ExtraSettingsWidget::pollUpdates().

Referenced by MainWindow::timerTick().

```
106                                  {
107     extra->pollUpdates();
108 }
```

Here is the call graph for this function:



Here is the caller graph for this function:



12.82.3.12 void SettingsWidget::setStatus (const QString & *text*)

Definition at line 110 of file settingswidget.cpp.

References Ui_SettingsWidget::devicesLabel, and ui.

Referenced by MainWindow::updateVersion().

```
110                                                 {
111     ui->devicesLabel->setText(text);
112 }
```

Here is the caller graph for this function:



12.82.3.13 void SettingsWidget::setVersion (const QString & *version*)

Definition at line 114 of file settingswidget.cpp.

References ui, and Ui_SettingsWidget::versionLabel.

Referenced by MainWindow::MainWindow().

```
114                                                 {
115     ui->versionLabel->setText(version);
116 }
```

Here is the caller graph for this function:

12.82.3.14 void SettingsWidget::showLayoutDialog ( ) [private], [slot]

Definition at line 98 of file settingswidget.cpp.

References Ui_SettingsWidget::layoutBox, on_layoutBox_activated(), LayoutDialog::selected(), and ui.

Referenced by SettingsWidget().

```
98                                  {
99     LayoutDialog dialog(this);
100     dialog.exec();
101     // Set selected layout
102     ui->layoutBox->setCurrentIndex((int)dialog.selected());
103     on_layoutBox_activated((int)dialog.selected());         // Call activated()
        signal manually to trigger save
104 }
```

Here is the call graph for this function:



Here is the caller graph for this function:



12.82.3.15 void SettingsWidget::updateModifiers ( ) [private]

Definition at line 124 of file settingswidget.cpp.

References Ui_SettingsWidget::altBox, Ui_SettingsWidget::capsBox, Ui_SettingsWidget::ctrlBox, modKeys, right(), KbBind::saveGlobalRemap(), KbBind::setGlobalRemap(), Ui_SettingsWidget::shiftBox, ui, and Ui_SettingsWidget-::winBox.

Referenced by on_altBox_activated(), on_capsBox_activated(), on_ctrlBox_activated(), on_shiftBox_activated(), on_winBox_activated(), and SettingsWidget().

```
124                                 {
125     QHash<QString, QString> newMods;
126     newMods["caps"] = modKeys[ui->capsBox->currentIndex()];
127     newMods["lshift"] = modKeys[ui->shiftBox->currentIndex()];
128     newMods["rshift"] = right(modKeys[ui->shiftBox->currentIndex()]);
129     newMods["lctrl"] = modKeys[ui->ctrlBox->currentIndex()];
130     newMods["rctrl"] = right(modKeys[ui->ctrlBox->currentIndex()]);
131     newMods["lalt"] = modKeys[ui->altBox->currentIndex()];
132     newMods["ralt"] = right(modKeys[ui->altBox->currentIndex()]);
133     newMods["lwin"] = modKeys[ui->winBox->currentIndex()];
134     newMods["rwin"] = right(modKeys[ui->winBox->currentIndex()]);
135     KbBind::setGlobalRemap(newMods);
136     KbBind::saveGlobalRemap();
137 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

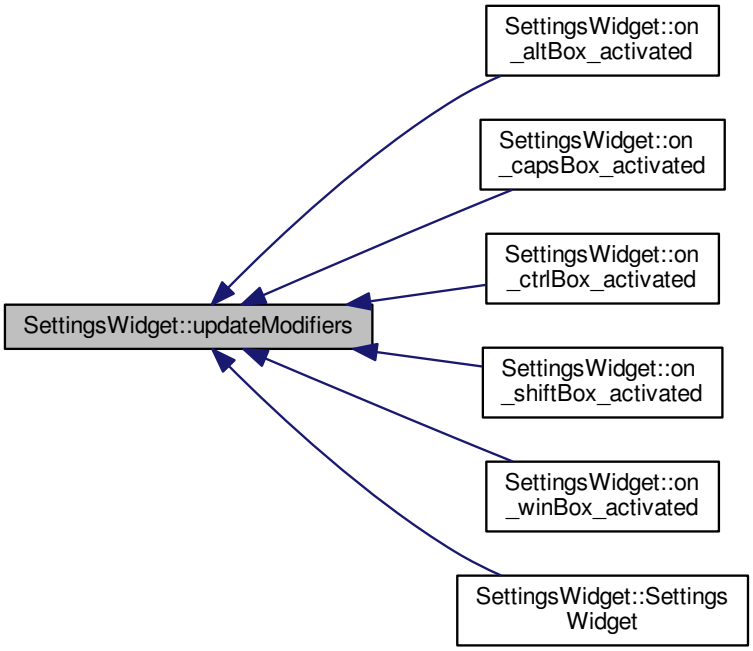

12.82.4 Friends And Related Function Documentation

12.82.4.1 friend class MainWindow [friend]

Definition at line 44 of file settingswidget.h.

12.82.5 Field Documentation

12.82.5.1 ExtraSettingsWidget* SettingsWidget::extra [private]

Definition at line 46 of file settingswidget.h.

Referenced by on_extraButton_clicked(), pollUpdates(), and SettingsWidget().

12.82.5.2 Ui::SettingsWidget* SettingsWidget::ui [private]

Definition at line 43 of file settingswidget.h.

Referenced by setStatus(), SettingsWidget(), setVersion(), showLayoutDialog(), updateModifiers(), and ~SettingsWidget().

The documentation for this class was generated from the following files:

- src/ckb/settingswidget.h
- src/ckb/settingswidget.cpp

12.83 Ui::SettingsWidget Class Reference

`#include <src/ckb/ui_settingswidget.h>`

Inheritance diagram for Ui::SettingsWidget:

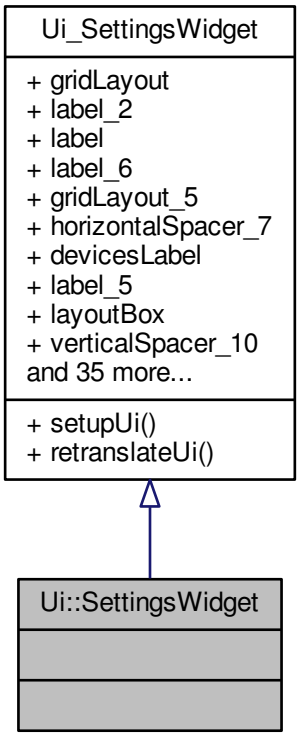

Collaboration diagram for Ui::SettingsWidget:

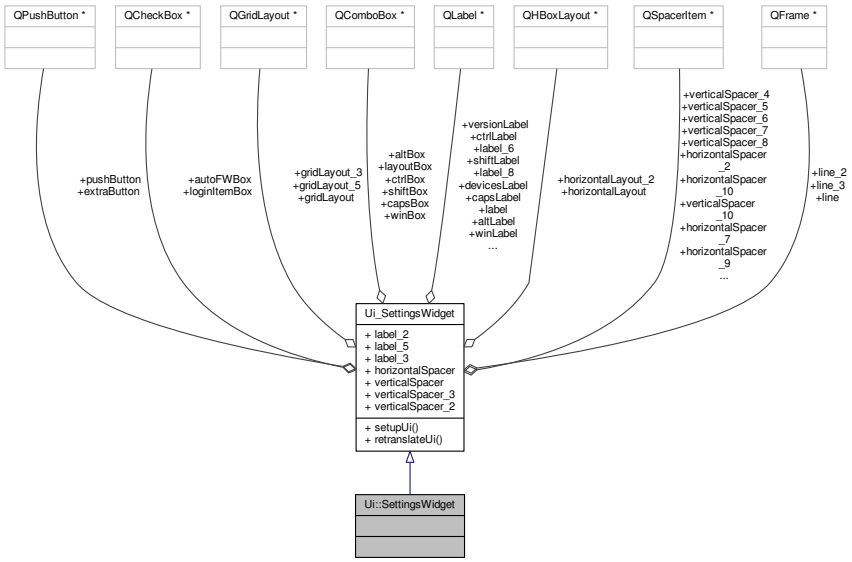

Public Member Functions

- void setupUi (QWidget *SettingsWidget)
- void retranslateUi (QWidget *SettingsWidget)

Data Fields

- QGridLayout * gridLayout
- QLabel * label_2
- QLabel * label
- QLabel * label_6
- QGridLayout * gridLayout_5
- QSpacerItem * horizontalSpacer_7
- QLabel * devicesLabel
- QLabel * label_5
- QComboBox * layoutBox
- QSpacerItem * verticalSpacer_10
- QHBoxLayout * horizontalLayout_2
- QLabel * label_3
- QSpacerItem * horizontalSpacer
- QPushButton * pushButton
- QSpacerItem * verticalSpacer
- QSpacerItem * verticalSpacer_8
- QCheckBox * loginItemBox
- QSpacerItem * verticalSpacer_6
- QCheckBox * autoFWBox
- QFrame * line_2
- QLabel * label_8
- QGridLayout * gridLayout_3
- QLabel * shiftLabel
- QLabel * capsLabel

- QSpacerItem * horizontalSpacer_10
- QComboBox * capsBox
- QLabel * ctrlLabel
- QSpacerItem * horizontalSpacer_9
- QComboBox * ctrlBox
- QComboBox * shiftBox
- QLabel * winLabel
- QComboBox * winBox
- QComboBox * altBox
- QLabel * altLabel
- QFrame * line
- QSpacerItem * verticalSpacer_3
- QSpacerItem * verticalSpacer_5
- QFrame * line_3
- QSpacerItem * verticalSpacer_4
- QSpacerItem * verticalSpacer_2
- QLabel * versionLabel
- QHBoxLayout * horizontalLayout
- QPushButton * extraButton
- QSpacerItem * horizontalSpacer_2
- QSpacerItem * verticalSpacer_7

12.83.1 Detailed Description

Definition at line 378 of file ui_settingswidget.h.

12.83.2 Member Function Documentation

12.83.2.1 void Ui_SettingsWidget::retranslateUi (QWidget * *SettingsWidget*) [inline], [inherited]

Definition at line 347 of file ui_settingswidget.h.

References Ui_SettingsWidget::altLabel, Ui_SettingsWidget::autoFWBox, Ui_SettingsWidget::capsLabel, Ui_SettingsWidget::ctrlLabel, Ui_SettingsWidget::devicesLabel, Ui_SettingsWidget::extraButton, Ui_SettingsWidget::label, Ui_SettingsWidget::label_2, Ui_SettingsWidget::label_3, Ui_SettingsWidget::label_5, Ui_SettingsWidget::label_6, Ui_SettingsWidget::label_8, Ui_SettingsWidget::loginItemBox, Ui_SettingsWidget::pushButton, Ui_SettingsWidget::shiftLabel, Ui_SettingsWidget::versionLabel, and Ui_SettingsWidget::winLabel.

Referenced by Ui_SettingsWidget::setupUi().

```
348     {
349         SettingsWidget->setWindowTitle(QApplication::translate("SettingsWidget", "Form", Q_NULLPTR));
350         label_2->setText(QApplication::translate("SettingsWidget", "\302\251 2014-2016 <a href=\"
      https://github.com/ccMSC/\" style=\"text-decoration:none;\">ccMSC</a>.<br/>\302\251 2017 <a href=\"
      https://github.com/mattanger/ckb-next/graphs/contributors\" style=\"text-decoration:none;\">The ckb-next development
       team</a>.", Q_NULLPTR));
351         label->setText(QApplication::translate("SettingsWidget", "Modifier keys", Q_NULLPTR));
352         label_6->setText(QApplication::translate("SettingsWidget", "Application", Q_NULLPTR));
353         devicesLabel->setText(QApplication::translate("SettingsWidget", "No devices connected",
      Q_NULLPTR));
354         label_5->setText(QApplication::translate("SettingsWidget", "Keyboard layout:", Q_NULLPTR));
355         label_3->setText(QApplication::translate("SettingsWidget", "<a href=\"
      https://github.com/mattanger/ckb-next\" style=\"text-decoration:none;\">https://github.com/mattanger/ckb-next</a>", Q_NU
356         pushButton->setText(QApplication::translate("SettingsWidget", "Quit", Q_NULLPTR));
357 #ifndef QT_NO_TOOLTIP
358         loginItemBox->setToolTip(QApplication::translate("SettingsWidget", "ckb-next will be
      started when you log in to your computer.", Q_NULLPTR));
359 #endif // QT_NO_TOOLTIP
360         loginItemBox->setText(QApplication::translate("SettingsWidget", "Start ckb-next at
      login", Q_NULLPTR));
361 #ifndef QT_NO_TOOLTIP
362         autoFWBox->setToolTip(QApplication::translate("SettingsWidget", "You will be notified when
      new firmware versions are available. You'll have the option to install them immediately or wait until
      later.", Q_NULLPTR));
```

```
363 #endif // QT_NO_TOOLTIP
364         autoFWBox->setText(QApplication::translate("SettingsWidget", "Check for new firmware
    automatically", Q_NULLPTR));
365         label_8->setText(QApplication::translate("SettingsWidget", "These will override the keyboard
    profile. See \"Binding\" tab for more settings.", Q_NULLPTR));
366         shiftLabel->setText(QApplication::translate("SettingsWidget", "Shift:", Q_NULLPTR));
367         capsLabel->setText(QApplication::translate("SettingsWidget", "Caps Lock:", Q_NULLPTR));
368         ctrlLabel->setText(QApplication::translate("SettingsWidget", "Ctrl:", Q_NULLPTR));
369         winLabel->setText(QApplication::translate("SettingsWidget", "Windows:", Q_NULLPTR));
370         altLabel->setText(QApplication::translate("SettingsWidget", "Alt:", Q_NULLPTR));
371         versionLabel->setText(QApplication::translate("SettingsWidget", "ckb-next", Q_NULLPTR))
    ;
372         extraButton->setText(QApplication::translate("SettingsWidget", "More settings",
    Q_NULLPTR));
373     } // retranslateUi
```

Here is the caller graph for this function:

12.83.2.2 void Ui_SettingsWidget::setupUi (QWidget * *SettingsWidget*) [inline],[inherited]

Definition at line 78 of file ui_settingswidget.h.

References Ui_SettingsWidget::altBox, Ui_SettingsWidget::altLabel, Ui_SettingsWidget::autoFWBox, Ui_SettingsWidget::capsBox, Ui_SettingsWidget::capsLabel, Ui_SettingsWidget::ctrlBox, Ui_SettingsWidget::ctrlLabel, Ui_SettingsWidget::devicesLabel, Ui_SettingsWidget::extraButton, Ui_SettingsWidget::gridLayout, Ui_SettingsWidget::gridLayout_3, Ui_SettingsWidget::gridLayout_5, Ui_SettingsWidget::horizontalLayout, Ui_SettingsWidget::horizontalLayout_2, Ui_SettingsWidget::horizontalSpacer, Ui_SettingsWidget::horizontalSpacer_10, Ui_SettingsWidget::horizontalSpacer_2, Ui_SettingsWidget::horizontalSpacer_7, Ui_SettingsWidget::horizontalSpacer_9, Ui_SettingsWidget::label, Ui_SettingsWidget::label_2, Ui_SettingsWidget::label_3, Ui_SettingsWidget::label_5, Ui_SettingsWidget::label_6, Ui_SettingsWidget::label_8, Ui_SettingsWidget::layoutBox, Ui_SettingsWidget::line, Ui_SettingsWidget::line_2, Ui_SettingsWidget::line_3, Ui_SettingsWidget::loginItemBox, Ui_SettingsWidget::pushButton, Ui_SettingsWidget::retranslateUi(), Ui_SettingsWidget::shiftBox, Ui_SettingsWidget::shiftLabel, Ui_SettingsWidget::versionLabel, Ui_SettingsWidget::verticalSpacer, Ui_SettingsWidget::verticalSpacer_10, Ui_SettingsWidget::verticalSpacer_2, Ui_SettingsWidget::verticalSpacer_3, Ui_SettingsWidget::verticalSpacer_4, Ui_SettingsWidget::verticalSpacer_5, Ui_SettingsWidget::verticalSpacer_6, Ui_SettingsWidget::verticalSpacer_7, Ui_SettingsWidget::verticalSpacer_8, Ui_SettingsWidget::winBox, and Ui_SettingsWidget::winLabel.

Referenced by SettingsWidget::SettingsWidget().

```
79     {
80         if (SettingsWidget->objectName().isEmpty())
81             SettingsWidget->setObjectName(QStringLiteral("SettingsWidget"));
82         SettingsWidget->resize(827, 654);
83         gridLayout = new QGridLayout(SettingsWidget);
84         gridLayout->setObjectName(QStringLiteral("gridLayout"));
85         label_2 = new QLabel(SettingsWidget);
86         label_2->setObjectName(QStringLiteral("label_2"));
87         label_2->setOpenExternalLinks(true);
88         label_2->setAlignment(Qt::AlignLeading|Qt::AlignLeft|Qt::AlignVCenter);
89
90         gridLayout->addWidget(label_2, 20, 0, 1, 2);
91
92         label = new QLabel(SettingsWidget);
93         label->setObjectName(QStringLiteral("label"));
94         QFont font;
95         font.setBold(true);
96         font.setWeight(75);
97         label->setFont(font);
98
99         gridLayout->addWidget(label, 6, 0, 1, 2);
100
```

```
101         label_6 = new QLabel(SettingsWidget);
102         label_6->setObjectName(QStringLiteral("label_6"));
103         label_6->setFont(font);
104 
105         gridLayout->addWidget(label_6, 12, 0, 1, 2);
106 
107         gridLayout_5 = new QGridLayout();
108         gridLayout_5->setObjectName(QStringLiteral("gridLayout_5"));
109         horizontalSpacer_7 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
110 
111         gridLayout_5->addItem(horizontalSpacer_7, 2, 2, 1, 1);
112 
113         devicesLabel = new QLabel(SettingsWidget);
114         devicesLabel->setObjectName(QStringLiteral("devicesLabel"));
115 
116         gridLayout_5->addWidget(devicesLabel, 0, 0, 1, 3);
117 
118         label_5 = new QLabel(SettingsWidget);
119         label_5->setObjectName(QStringLiteral("label_5"));
120 
121         gridLayout_5->addWidget(label_5, 2, 0, 1, 1);
122 
123         layoutBox = new QComboBox(SettingsWidget);
124         layoutBox->setObjectName(QStringLiteral("layoutBox"));
125 
126         gridLayout_5->addWidget(layoutBox, 2, 1, 1, 1);
127 
128         verticalSpacer_10 = new QSpacerItem(20, 6, QSizePolicy::Minimum,
    QSizePolicy::Fixed);
129 
130         gridLayout_5->addItem(verticalSpacer_10, 1, 0, 1, 1);
131 
132 
133         gridLayout->addLayout(gridLayout_5, 4, 1, 1, 1);
134 
135         horizontalLayout_2 = new QHBoxLayout();
136         horizontalLayout_2->setObjectName(QStringLiteral("horizontalLayout_2"));
137         label_3 = new QLabel(SettingsWidget);
138         label_3->setObjectName(QStringLiteral("label_3"));
139         label_3->setOpenExternalLinks(true);
140 
141         horizontalLayout_2->addWidget(label_3);
142 
143         horizontalSpacer = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
144 
145         horizontalLayout_2->addItem(horizontalSpacer);
146 
147         pushButton = new QPushButton(SettingsWidget);
148         pushButton->setObjectName(QStringLiteral("pushButton"));
149         pushButton->setFlat(false);
150 
151         horizontalLayout_2->addWidget(pushButton);
152 
153 
154         gridLayout->addLayout(horizontalLayout_2, 21, 0, 1, 2);
155 
156         verticalSpacer = new QSpacerItem(20, 40, QSizePolicy::Minimum, QSizePolicy::Expanding
    );
157 
158         gridLayout->addItem(verticalSpacer, 19, 0, 1, 2);
159 
160         verticalSpacer_8 = new QSpacerItem(0, 28, QSizePolicy::Minimum, QSizePolicy::Fixed)
    ;
161 
162         gridLayout->addItem(verticalSpacer_8, 16, 0, 1, 1);
163 
164         loginItemBox = new QCheckBox(SettingsWidget);
165         loginItemBox->setObjectName(QStringLiteral("loginItemBox"));
166 
167         gridLayout->addWidget(loginItemBox, 16, 1, 1, 1);
168 
169         verticalSpacer_6 = new QSpacerItem(0, 28, QSizePolicy::Minimum, QSizePolicy::Fixed)
    ;
170 
171         gridLayout->addItem(verticalSpacer_6, 15, 0, 1, 1);
172 
173         autoFWBox = new QCheckBox(SettingsWidget);
174         autoFWBox->setObjectName(QStringLiteral("autoFWBox"));
175         autoFWBox->setChecked(true);
176 
177         gridLayout->addWidget(autoFWBox, 15, 1, 1, 1);
178 
179         line_2 = new QFrame(SettingsWidget);
180         line_2->setObjectName(QStringLiteral("line_2"));
181         line_2->setFrameShape(QFrame::HLine);
```

```
182         line_2->setFrameShadow(QFrame::Sunken);
183 
184         gridLayout->addWidget(line_2, 13, 0, 1, 2);
185 
186         label_8 = new QLabel(SettingsWidget);
187         label_8->setObjectName(QStringLiteral("label_8"));
188         QFont font1;
189         font1.setItalic(true);
190         label_8->setFont(font1);
191 
192         gridLayout->addWidget(label_8, 8, 1, 1, 1);
193 
194         gridLayout_3 = new QGridLayout();
195         gridLayout_3->setObjectName(QStringLiteral("gridLayout_3"));
196         shiftLabel = new QLabel(SettingsWidget);
197         shiftLabel->setObjectName(QStringLiteral("shiftLabel"));
198         QSizePolicy sizePolicy(QSizePolicy::Expanding, QSizePolicy::Preferred);
199         sizePolicy.setHorizontalStretch(0);
200         sizePolicy.setVerticalStretch(0);
201         sizePolicy.setHeightForWidth(shiftLabel->sizePolicy().hasHeightForWidth());
202         shiftLabel->setSizePolicy(sizePolicy);
203         shiftLabel->setAlignment(Qt::AlignRight|Qt::AlignTrailing|Qt::AlignVCenter);
204 
205         gridLayout_3->addWidget(shiftLabel, 0, 3, 1, 1);
206 
207         capsLabel = new QLabel(SettingsWidget);
208         capsLabel->setObjectName(QStringLiteral("capsLabel"));
209         capsLabel->setAlignment(Qt::AlignRight|Qt::AlignTrailing|Qt::AlignVCenter);
210 
211         gridLayout_3->addWidget(capsLabel, 0, 1, 1, 1);
212 
213         horizontalSpacer_10 = new QSpacerItem(0, 0, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
214 
215         gridLayout_3->addItem(horizontalSpacer_10, 0, 0, 1, 1);
216 
217         capsBox = new QComboBox(SettingsWidget);
218         capsBox->setObjectName(QStringLiteral("capsBox"));
219         QSizePolicy sizePolicy1(QSizePolicy::Expanding, QSizePolicy::Fixed);
220         sizePolicy1.setHorizontalStretch(0);
221         sizePolicy1.setVerticalStretch(0);
222         sizePolicy1.setHeightForWidth(capsBox->sizePolicy().hasHeightForWidth());
223         capsBox->setSizePolicy(sizePolicy1);
224 
225         gridLayout_3->addWidget(capsBox, 0, 2, 1, 1);
226 
227         ctrlLabel = new QLabel(SettingsWidget);
228         ctrlLabel->setObjectName(QStringLiteral("ctrlLabel"));
229         ctrlLabel->setAlignment(Qt::AlignRight|Qt::AlignTrailing|Qt::AlignVCenter);
230 
231         gridLayout_3->addWidget(ctrlLabel, 1, 1, 1, 1);
232 
233         horizontalSpacer_9 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
234 
235         gridLayout_3->addItem(horizontalSpacer_9, 1, 7, 1, 1);
236 
237         ctrlBox = new QComboBox(SettingsWidget);
238         ctrlBox->setObjectName(QStringLiteral("ctrlBox"));
239 
240         gridLayout_3->addWidget(ctrlBox, 1, 2, 1, 1);
241 
242         shiftBox = new QComboBox(SettingsWidget);
243         shiftBox->setObjectName(QStringLiteral("shiftBox"));
244         sizePolicy1.setHeightForWidth(shiftBox->sizePolicy().hasHeightForWidth());
245         shiftBox->setSizePolicy(sizePolicy1);
246 
247         gridLayout_3->addWidget(shiftBox, 0, 4, 1, 1);
248 
249         winLabel = new QLabel(SettingsWidget);
250         winLabel->setObjectName(QStringLiteral("winLabel"));
251         sizePolicy.setHeightForWidth(winLabel->sizePolicy().hasHeightForWidth());
252         winLabel->setSizePolicy(sizePolicy);
253         winLabel->setAlignment(Qt::AlignRight|Qt::AlignTrailing|Qt::AlignVCenter);
254 
255         gridLayout_3->addWidget(winLabel, 1, 3, 1, 1);
256 
257         winBox = new QComboBox(SettingsWidget);
258         winBox->setObjectName(QStringLiteral("winBox"));
259         sizePolicy1.setHeightForWidth(winBox->sizePolicy().hasHeightForWidth());
260         winBox->setSizePolicy(sizePolicy1);
261 
262         gridLayout_3->addWidget(winBox, 1, 4, 1, 1);
263 
264         altBox = new QComboBox(SettingsWidget);
265         altBox->setObjectName(QStringLiteral("altBox"));
266         sizePolicy1.setHeightForWidth(altBox->sizePolicy().hasHeightForWidth());
```

```
267         altBox->setSizePolicy(sizePolicy1);
268
269         gridLayout_3->addWidget(altBox, 1, 6, 1, 1);
270
271         altLabel = new QLabel(SettingsWidget);
272         altLabel->setObjectName(QStringLiteral("altLabel"));
273         sizePolicy.setHeightForWidth(altLabel->sizePolicy().hasHeightForWidth());
274         altLabel->setSizePolicy(sizePolicy);
275         altLabel->setAlignment(Qt::AlignRight|Qt::AlignTrailing|Qt::AlignVCenter);
276
277         gridLayout_3->addWidget(altLabel, 1, 5, 1, 1);
278
279
280         gridLayout->addLayout(gridLayout_3, 10, 1, 1, 1);
281
282         line = new QFrame(SettingsWidget);
283         line->setObjectName(QStringLiteral("line"));
284         line->setFrameShape(QFrame::HLine);
285         line->setFrameShadow(QFrame::Sunken);
286
287         gridLayout->addWidget(line, 1, 0, 1, 2);
288
289         verticalSpacer_3 = new QSpacerItem(0, 5, QSizePolicy::Minimum, QSizePolicy::Fixed);
290
291         gridLayout->addItem(verticalSpacer_3, 2, 1, 1, 1);
292
293         verticalSpacer_5 = new QSpacerItem(20, 12, QSizePolicy::Minimum, QSizePolicy::Fixed
    );
294
295         gridLayout->addItem(verticalSpacer_5, 11, 1, 1, 1);
296
297         line_3 = new QFrame(SettingsWidget);
298         line_3->setObjectName(QStringLiteral("line_3"));
299         QSizePolicy sizePolicy2(QSizePolicy::Minimum, QSizePolicy::Fixed);
300         sizePolicy2.setHorizontalStretch(0);
301         sizePolicy2.setVerticalStretch(0);
302         sizePolicy2.setHeightForWidth(line_3->sizePolicy().hasHeightForWidth());
303         line_3->setSizePolicy(sizePolicy2);
304         line_3->setFrameShape(QFrame::HLine);
305         line_3->setFrameShadow(QFrame::Sunken);
306
307         gridLayout->addWidget(line_3, 7, 0, 1, 2);
308
309         verticalSpacer_4 = new QSpacerItem(20, 6, QSizePolicy::Minimum, QSizePolicy::Fixed)
    ;
310
311         gridLayout->addItem(verticalSpacer_4, 9, 1, 1, 1);
312
313         verticalSpacer_2 = new QSpacerItem(20, 12, QSizePolicy::Minimum, QSizePolicy::Fixed
    );
314
315         gridLayout->addItem(verticalSpacer_2, 5, 1, 1, 1);
316
317         versionLabel = new QLabel(SettingsWidget);
318         versionLabel->setObjectName(QStringLiteral("versionLabel"));
319         versionLabel->setFont(font);
320
321         gridLayout->addWidget(versionLabel, 0, 0, 1, 2);
322
323         horizontalLayout = new QHBoxLayout();
324         horizontalLayout->setObjectName(QStringLiteral("horizontalLayout"));
325         extraButton = new QPushButton(SettingsWidget);
326         extraButton->setObjectName(QStringLiteral("extraButton"));
327
328         horizontalLayout->addWidget(extraButton);
329
330         horizontalSpacer_2 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
331
332         horizontalLayout->addItem(horizontalSpacer_2);
333
334
335         gridLayout->addLayout(horizontalLayout, 17, 1, 1, 1);
336
337         verticalSpacer_7 = new QSpacerItem(0, 28, QSizePolicy::Minimum, QSizePolicy::Fixed)
    ;
338
339         gridLayout->addItem(verticalSpacer_7, 17, 0, 1, 1);
340
341
342         retranslateUi(SettingsWidget);
343
344         QMetaObject::connectSlotsByName(SettingsWidget);
345     } // setupUi
```

Here is the call graph for this function:



Here is the caller graph for this function:



12.83.3 Field Documentation

12.83.3.1 QComboBox* Ui_SettingsWidget::altBox [inherited]

Definition at line 64 of file ui_settingswidget.h.

Referenced by SettingsWidget::SettingsWidget(), Ui_SettingsWidget::setupUi(), and SettingsWidget::updateModifiers().

12.83.3.2 QLabel* Ui_SettingsWidget::altLabel [inherited]

Definition at line 65 of file ui_settingswidget.h.

Referenced by Ui_SettingsWidget::retranslateUi(), and Ui_SettingsWidget::setupUi().

12.83.3.3 QCheckBox* Ui_SettingsWidget::autoFWBox [inherited]

Definition at line 50 of file ui_settingswidget.h.

Referenced by Ui_SettingsWidget::retranslateUi(), SettingsWidget::SettingsWidget(), and Ui_SettingsWidget::setupUi().

12.83.3.4 QComboBox* Ui_SettingsWidget::capsBox [inherited]

Definition at line 57 of file ui_settingswidget.h.

Referenced by SettingsWidget::SettingsWidget(), Ui_SettingsWidget::setupUi(), and SettingsWidget::updateModifiers().

12.83.3.5 QLabel* Ui_SettingsWidget::capsLabel [inherited]

Definition at line 55 of file ui_settingswidget.h.

Referenced by Ui_SettingsWidget::retranslateUi(), and Ui_SettingsWidget::setupUi().

12.83.3.6 QComboBox* Ui_SettingsWidget::ctrlBox [inherited]

Definition at line 60 of file ui_settingswidget.h.

Referenced by SettingsWidget::SettingsWidget(), Ui_SettingsWidget::setupUi(), and SettingsWidget::updateModifiers().

12.83.3.7 QLabel* Ui_SettingsWidget::ctrlLabel [inherited]

Definition at line 58 of file ui_settingswidget.h.

Referenced by Ui_SettingsWidget::retranslateUi(), and Ui_SettingsWidget::setupUi().

12.83.3.8 QLabel* Ui_SettingsWidget::devicesLabel [inherited]

Definition at line 38 of file ui_settingswidget.h.

Referenced by Ui_SettingsWidget::retranslateUi(), SettingsWidget::setStatus(), and Ui_SettingsWidget::setupUi().

12.83.3.9 QPushButton* Ui_SettingsWidget::extraButton [inherited]

Definition at line 74 of file ui_settingswidget.h.

Referenced by Ui_SettingsWidget::retranslateUi(), and Ui_SettingsWidget::setupUi().

12.83.3.10 QGridLayout* Ui_SettingsWidget::gridLayout [inherited]

Definition at line 32 of file ui_settingswidget.h.

Referenced by Ui_SettingsWidget::setupUi().

12.83.3.11 QGridLayout* Ui_SettingsWidget::gridLayout_3 [inherited]

Definition at line 53 of file ui_settingswidget.h.

Referenced by Ui_SettingsWidget::setupUi().

12.83.3.12 QGridLayout* Ui_SettingsWidget::gridLayout_5 [inherited]

Definition at line 36 of file ui_settingswidget.h.

Referenced by Ui_SettingsWidget::setupUi().

12.83.3.13 QHBoxLayout* Ui_SettingsWidget::horizontalLayout [inherited]

Definition at line 73 of file ui_settingswidget.h.

Referenced by Ui_SettingsWidget::setupUi().

12.83.3.14 QHBoxLayout* Ui_SettingsWidget::horizontalLayout_2 [inherited]

Definition at line 42 of file ui_settingswidget.h.

Referenced by Ui_SettingsWidget::setupUi().

12.83.3.15 QSpacerItem* Ui_SettingsWidget::horizontalSpacer [inherited]

Definition at line 44 of file ui_settingswidget.h.

Referenced by Ui_SettingsWidget::setupUi().

12.83.3.16 QSpacerItem* Ui_SettingsWidget::horizontalSpacer_10 [inherited]

Definition at line 56 of file ui_settingswidget.h.

Referenced by Ui_SettingsWidget::setupUi().

12.83.3.17 QSpacerItem* Ui_SettingsWidget::horizontalSpacer_2 [inherited]

Definition at line 75 of file ui_settingswidget.h.

Referenced by Ui_SettingsWidget::setupUi().

12.83.3.18 QSpacerItem* Ui_SettingsWidget::horizontalSpacer_7 [inherited]

Definition at line 37 of file ui_settingswidget.h.

Referenced by Ui_SettingsWidget::setupUi().

12.83.3.19 QSpacerItem* Ui_SettingsWidget::horizontalSpacer_9 [inherited]

Definition at line 59 of file ui_settingswidget.h.

Referenced by Ui_SettingsWidget::setupUi().

12.83.3.20 QLabel* Ui_SettingsWidget::label [inherited]

Definition at line 34 of file ui_settingswidget.h.

Referenced by Ui_SettingsWidget::retranslateUi(), and Ui_SettingsWidget::setupUi().

12.83.3.21 QLabel* Ui_SettingsWidget::label_2 [inherited]

Definition at line 33 of file ui_settingswidget.h.

Referenced by Ui_SettingsWidget::retranslateUi(), and Ui_SettingsWidget::setupUi().

12.83.3.22 QLabel* Ui_SettingsWidget::label_3 [inherited]

Definition at line 43 of file ui_settingswidget.h.

Referenced by Ui_SettingsWidget::retranslateUi(), and Ui_SettingsWidget::setupUi().

12.83.3.23 QLabel* Ui_SettingsWidget::label_5 [inherited]

Definition at line 39 of file ui_settingswidget.h.

Referenced by Ui_SettingsWidget::retranslateUi(), and Ui_SettingsWidget::setupUi().

12.83.3.24 QLabel* Ui_SettingsWidget::label_6 [inherited]

Definition at line 35 of file ui_settingswidget.h.

Referenced by Ui_SettingsWidget::retranslateUi(), and Ui_SettingsWidget::setupUi().

12.83.3.25 QLabel* Ui_SettingsWidget::label_8 [inherited]

Definition at line 52 of file ui_settingswidget.h.

Referenced by Ui_SettingsWidget::retranslateUi(), and Ui_SettingsWidget::setupUi().

12.83.3.26 QComboBox* Ui_SettingsWidget::layoutBox [inherited]

Definition at line 40 of file ui_settingswidget.h.

Referenced by SettingsWidget::SettingsWidget(), Ui_SettingsWidget::setupUi(), and SettingsWidget::showLayout-Dialog().

12.83.3.27 QFrame* Ui_SettingsWidget::line [inherited]

Definition at line 66 of file ui_settingswidget.h.

Referenced by Ui_SettingsWidget::setupUi().

12.83.3.28 QFrame* Ui_SettingsWidget::line_2 [inherited]

Definition at line 51 of file ui_settingswidget.h.

Referenced by Ui_SettingsWidget::setupUi().

12.83.3.29 QFrame* Ui_SettingsWidget::line_3 [inherited]

Definition at line 69 of file ui_settingswidget.h.

Referenced by Ui_SettingsWidget::setupUi().

12.83.3.30 QCheckBox* Ui_SettingsWidget::loginItemBox [inherited]

Definition at line 48 of file ui_settingswidget.h.

Referenced by Ui_SettingsWidget::retranslateUi(), SettingsWidget::SettingsWidget(), and Ui_SettingsWidget-::setupUi().

12.83.3.31 QPushButton* Ui_SettingsWidget::pushButton [inherited]

Definition at line 45 of file ui_settingswidget.h.

Referenced by Ui_SettingsWidget::retranslateUi(), and Ui_SettingsWidget::setupUi().

12.83.3.32 QComboBox* Ui_SettingsWidget::shiftBox [inherited]

Definition at line 61 of file ui_settingswidget.h.

Referenced by SettingsWidget::SettingsWidget(), Ui_SettingsWidget::setupUi(), and SettingsWidget::updateModifiers().

12.83.3.33 QLabel* Ui_SettingsWidget::shiftLabel [inherited]

Definition at line 54 of file ui_settingswidget.h.

Referenced by Ui_SettingsWidget::retranslateUi(), and Ui_SettingsWidget::setupUi().

12.83.3.34 QLabel* Ui_SettingsWidget::versionLabel [inherited]

Definition at line 72 of file ui_settingswidget.h.

Referenced by Ui_SettingsWidget::retranslateUi(), Ui_SettingsWidget::setupUi(), and SettingsWidget::setVersion().

12.83.3.35 QSpacerItem* Ui_SettingsWidget::verticalSpacer [inherited]

Definition at line 46 of file ui_settingswidget.h.

Referenced by Ui_SettingsWidget::setupUi().

12.83.3.36 QSpacerItem* Ui_SettingsWidget::verticalSpacer_10 [inherited]

Definition at line 41 of file ui_settingswidget.h.

Referenced by Ui_SettingsWidget::setupUi().

12.83.3.37 QSpacerItem* Ui_SettingsWidget::verticalSpacer_2 [inherited]

Definition at line 71 of file ui_settingswidget.h.

Referenced by Ui_SettingsWidget::setupUi().

12.83.3.38 QSpacerItem* Ui_SettingsWidget::verticalSpacer_3 [inherited]

Definition at line 67 of file ui_settingswidget.h.

Referenced by Ui_SettingsWidget::setupUi().

12.83.3.39 QSpacerItem* Ui_SettingsWidget::verticalSpacer_4 [inherited]

Definition at line 70 of file ui_settingswidget.h.

Referenced by Ui_SettingsWidget::setupUi().

12.83.3.40 QSpacerItem* Ui_SettingsWidget::verticalSpacer_5 [inherited]

Definition at line 68 of file ui_settingswidget.h.

Referenced by Ui_SettingsWidget::setupUi().

12.83.3.41 QSpacerItem* Ui_SettingsWidget::verticalSpacer_6 [inherited]

Definition at line 49 of file ui_settingswidget.h.

Referenced by Ui_SettingsWidget::setupUi().

12.83.3.42 QSpacerItem* Ui_SettingsWidget::verticalSpacer_7 [inherited]

Definition at line 76 of file ui_settingswidget.h.

Referenced by Ui_SettingsWidget::setupUi().

12.83.3.43 QSpacerItem* Ui_SettingsWidget::verticalSpacer_8 [inherited]

Definition at line 47 of file ui_settingswidget.h.

Referenced by Ui_SettingsWidget::setupUi().

12.83.3.44 QComboBox* Ui_SettingsWidget::winBox [inherited]

Definition at line 63 of file ui_settingswidget.h.

Referenced by SettingsWidget::SettingsWidget(), Ui_SettingsWidget::setupUi(), and SettingsWidget::updateModifiers().

12.83.3.45 QLabel* Ui_SettingsWidget::winLabel [inherited]

Definition at line 62 of file ui_settingswidget.h.

Referenced by Ui_SettingsWidget::retranslateUi(), and Ui_SettingsWidget::setupUi().

The documentation for this class was generated from the following file:

- src/ckb/ui_settingswidget.h

12.84 SGroup Class Reference

`#include <src/ckb/ckbsettings.h>`

Collaboration diagram for SGroup:

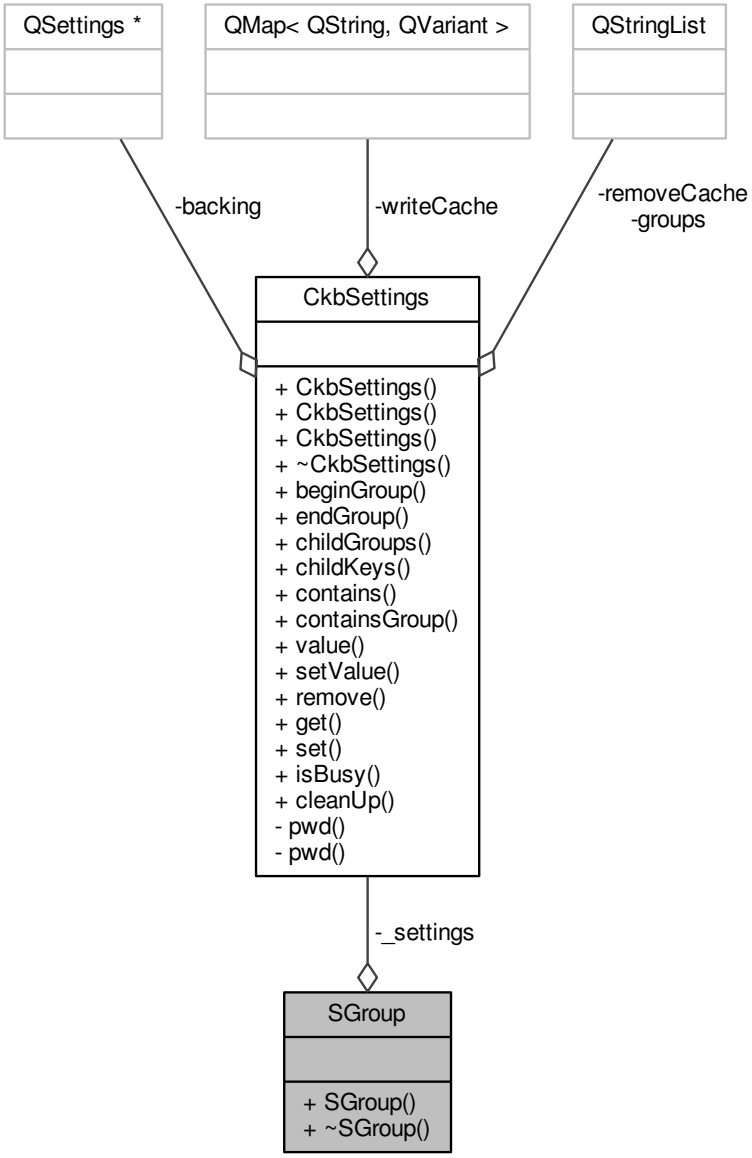

Public Member Functions

- SGroup (CkbSettings &settings, const QString &prefix)
- ~SGroup ()

Private Attributes

- CkbSettings & _settings

12.84.1 Detailed Description

Definition at line 57 of file ckbsettings.h.

12.84.2 Constructor & Destructor Documentation

12.84.2.1 SGroup::SGroup (CkbSettings & *settings*, const QString & *prefix*) [inline]

Definition at line 60 of file ckbsettings.h.

References CkbSettings::beginGroup().

```
60 : _settings(settings) { settings.beginGroup(prefix); }
```

Here is the call graph for this function:



12.84.2.2 SGroup::~SGroup ( ) [inline]

Definition at line 61 of file ckbsettings.h.

References _settings, and CkbSettings::endGroup().

```
61 { _settings.endGroup(); }
```

Here is the call graph for this function:



12.84.3 Field Documentation

12.84.3.1 CkbSettings& SGroup::_settings [private]

Definition at line 64 of file ckbsettings.h.

Referenced by ~SGroup().

The documentation for this class was generated from the following file:

- src/ckb/ckbsettings.h

12.85 Ui_AnimAddDialog Class Reference

`#include <src/ckb/ui_animadddialog.h>`

Inheritance diagram for Ui_AnimAddDialog:

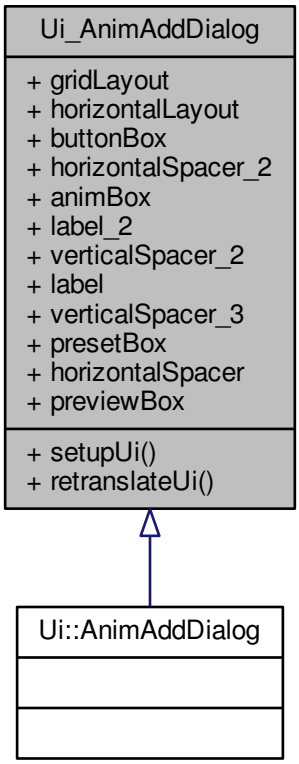

Collaboration diagram for Ui_AnimAddDialog:

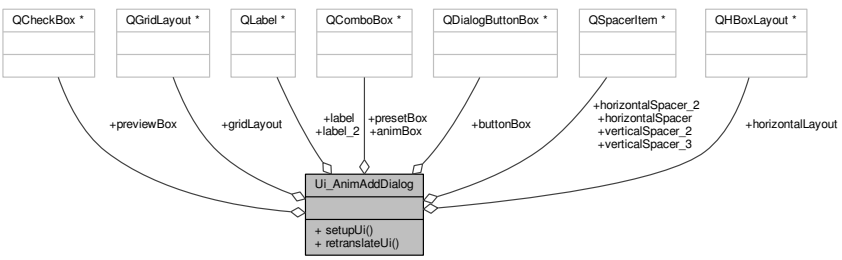

Public Member Functions

- void setupUi (QDialog *AnimAddDialog)
- void retranslateUi (QDialog *AnimAddDialog)

Data Fields

- QGridLayout * gridLayout
- QHBoxLayout * horizontalLayout
- QDialogButtonBox * buttonBox
- QSpacerItem * horizontalSpacer_2
- QComboBox * animBox
- QLabel * label_2
- QSpacerItem * verticalSpacer_2
- QLabel * label
- QSpacerItem * verticalSpacer_3
- QComboBox * presetBox
- QSpacerItem * horizontalSpacer
- QCheckBox * previewBox

12.85.1 Detailed Description

Definition at line 28 of file ui_animadddialog.h.

12.85.2 Member Function Documentation

12.85.2.1 void Ui_AnimAddDialog::retranslateUi (QDialog * *AnimAddDialog*) [inline]

Definition at line 135 of file ui_animadddialog.h.

References label, label_2, and previewBox.

Referenced by setupUi().

```
136     {
137         AnimAddDialog->setWindowTitle(QApplication::translate("AnimAddDialog", "Add Animation", Q_NULLPTR))
    ;
138         label_2->setText(QApplication::translate("AnimAddDialog", "Preset:", Q_NULLPTR));
139         label->setText(QApplication::translate("AnimAddDialog", "Animation:", Q_NULLPTR));
140         previewBox->setText(QApplication::translate("AnimAddDialog", "Show preview", Q_NULLPTR));
141     } // retranslateUi
```

Here is the caller graph for this function:



12.85.2.2 void Ui_AnimAddDialog::setupUi (QDialog * *AnimAddDialog*) [inline]

Definition at line 44 of file ui_animadddialog.h.

References animBox, buttonBox, gridLayout, horizontalLayout, horizontalSpacer, horizontalSpacer_2, label, label_2, presetBox, previewBox, retranslateUi(), verticalSpacer_2, and verticalSpacer_3.

Referenced by AnimAddDialog::AnimAddDialog().

```
45     {
46         if (AnimAddDialog->objectName().isEmpty())
47             AnimAddDialog->setObjectName(QStringLiteral("AnimAddDialog"));
48         AnimAddDialog->resize(350, 205);
```

```
49          QSizePolicy sizePolicy(QSizePolicy::Fixed, QSizePolicy::Fixed);
50          sizePolicy.setHorizontalStretch(0);
51          sizePolicy.setVerticalStretch(0);
52          sizePolicy.setHeightForWidth(AnimAddDialog->sizePolicy().hasHeightForWidth());
53          AnimAddDialog->setSizePolicy(sizePolicy);
54          gridLayout = new QGridLayout(AnimAddDialog);
55          gridLayout->setObjectName(QStringLiteral("gridLayout"));
56          horizontalLayout = new QHBoxLayout();
57          horizontalLayout->setObjectName(QStringLiteral("horizontalLayout"));
58          buttonBox = new QDialogButtonBox(AnimAddDialog);
59          buttonBox->setObjectName(QStringLiteral("buttonBox"));
60          buttonBox->setOrientation(Qt::Horizontal);
61          buttonBox->setStandardButtons(QDialogButtonBox::Cancel|QDialogButtonBox::Ok);
62          buttonBox->setCenterButtons(false);
63
64          horizontalLayout->addWidget(buttonBox);
65
66
67          gridLayout->addLayout(horizontalLayout, 5, 0, 1, 4);
68
69          horizontalSpacer_2 = new QSpacerItem(50, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
70
71          gridLayout->addItem(horizontalSpacer_2, 1, 3, 1, 1);
72
73          animBox = new QComboBox(AnimAddDialog);
74          animBox->setObjectName(QStringLiteral("animBox"));
75          QSizePolicy sizePolicy1(QSizePolicy::Expanding, QSizePolicy::Fixed);
76          sizePolicy1.setHorizontalStretch(0);
77          sizePolicy1.setVerticalStretch(0);
78          sizePolicy1.setHeightForWidth(animBox->sizePolicy().hasHeightForWidth());
79          animBox->setSizePolicy(sizePolicy1);
80
81          gridLayout->addWidget(animBox, 1, 2, 1, 1);
82
83          label_2 = new QLabel(AnimAddDialog);
84          label_2->setObjectName(QStringLiteral("label_2"));
85          QSizePolicy sizePolicy2(QSizePolicy::Preferred, QSizePolicy::Preferred);
86          sizePolicy2.setHorizontalStretch(0);
87          sizePolicy2.setVerticalStretch(0);
88          sizePolicy2.setHeightForWidth(label_2->sizePolicy().hasHeightForWidth());
89          label_2->setSizePolicy(sizePolicy2);
90          label_2->setAlignment(Qt::AlignRight|Qt::AlignTrailing|Qt::AlignVCenter);
91
92          gridLayout->addWidget(label_2, 2, 1, 1, 1);
93
94          verticalSpacer_2 = new QSpacerItem(20, 0, QSizePolicy::Minimum,
    QSizePolicy::Expanding);
95
96          gridLayout->addItem(verticalSpacer_2, 4, 2, 1, 1);
97
98          label = new QLabel(AnimAddDialog);
99          label->setObjectName(QStringLiteral("label"));
100          sizePolicy2.setHeightForWidth(label->sizePolicy().hasHeightForWidth());
101          label->setSizePolicy(sizePolicy2);
102          label->setAlignment(Qt::AlignRight|Qt::AlignTrailing|Qt::AlignVCenter);
103
104          gridLayout->addWidget(label, 1, 1, 1, 1);
105
106          verticalSpacer_3 = new QSpacerItem(20, 0, QSizePolicy::Minimum,
    QSizePolicy::Expanding);
107
108          gridLayout->addItem(verticalSpacer_3, 0, 2, 1, 1);
109
110          presetBox = new QComboBox(AnimAddDialog);
111          presetBox->setObjectName(QStringLiteral("presetBox"));
112          sizePolicy1.setHeightForWidth(presetBox->sizePolicy().hasHeightForWidth());
113          presetBox->setSizePolicy(sizePolicy1);
114
115          gridLayout->addWidget(presetBox, 2, 2, 1, 1);
116
117          horizontalSpacer = new QSpacerItem(50, 20, QSizePolicy::Fixed, QSizePolicy::Minimum
    );
118
119          gridLayout->addItem(horizontalSpacer, 1, 0, 1, 1);
120
121          previewBox = new QCheckBox(AnimAddDialog);
122          previewBox->setObjectName(QStringLiteral("previewBox"));
123          previewBox->setChecked(true);
124
125          gridLayout->addWidget(previewBox, 3, 2, 1, 1);
126
127
128          retranslateUi(AnimAddDialog);
129          QObject::connect(buttonBox, SIGNAL(accepted()), AnimAddDialog, SLOT(accept()));
130          QObject::connect(buttonBox, SIGNAL(rejected()), AnimAddDialog, SLOT(reject()));
131
```

```
132         QMetaObject::connectSlotsByName(AnimAddDialog);
133     } // setupUi
```

Here is the call graph for this function:



Here is the caller graph for this function:



12.85.3 Field Documentation

12.85.3.1 QComboBox* Ui_AnimAddDialog::animBox

Definition at line 35 of file ui_animadddialog.h.

Referenced by AnimAddDialog::AnimAddDialog(), AnimAddDialog::chosenScript(), and setupUi().

12.85.3.2 QDialogButtonBox* Ui_AnimAddDialog::buttonBox

Definition at line 33 of file ui_animadddialog.h.

Referenced by setupUi().

12.85.3.3 QGridLayout* Ui_AnimAddDialog::gridLayout

Definition at line 31 of file ui_animadddialog.h.

Referenced by setupUi().

12.85.3.4 QHBoxLayout* Ui_AnimAddDialog::horizontalLayout

Definition at line 32 of file ui_animadddialog.h.

Referenced by setupUi().

12.85.3.5 QSpacerItem* Ui_AnimAddDialog::horizontalSpacer

Definition at line 41 of file ui_animadddialog.h.

Referenced by setupUi().

12.85.3.6 QSpacerItem* Ui_AnimAddDialog::horizontalSpacer_2

Definition at line 34 of file ui_animadddialog.h.

Referenced by setupUi().

12.85.3.7 QLabel* Ui_AnimAddDialog::label

Definition at line 38 of file ui_animadddialog.h.

Referenced by retranslateUi(), and setupUi().

12.85.3.8 QLabel* Ui_AnimAddDialog::label_2

Definition at line 36 of file ui_animadddialog.h.

Referenced by retranslateUi(), and setupUi().

12.85.3.9 QComboBox* Ui_AnimAddDialog::presetBox

Definition at line 40 of file ui_animadddialog.h.

Referenced by AnimAddDialog::chosenPreset(), AnimAddDialog::on_animBox_activated(), AnimAddDialog::on_previewBox_clicked(), and setupUi().

12.85.3.10 QCheckBox* Ui_AnimAddDialog::previewBox

Definition at line 42 of file ui_animadddialog.h.

Referenced by retranslateUi(), and setupUi().

12.85.3.11 QSpacerItem* Ui_AnimAddDialog::verticalSpacer_2

Definition at line 37 of file ui_animadddialog.h.

Referenced by setupUi().

12.85.3.12 QSpacerItem* Ui_AnimAddDialog::verticalSpacer_3

Definition at line 39 of file ui_animadddialog.h.

Referenced by setupUi().

The documentation for this class was generated from the following file:

- src/ckb/ui_animadddialog.h

12.86 Ui_AnimSettingDialog Class Reference

`#include <src/ckb/ui_animsettingdialog.h>`

Inheritance diagram for Ui_AnimSettingDialog:

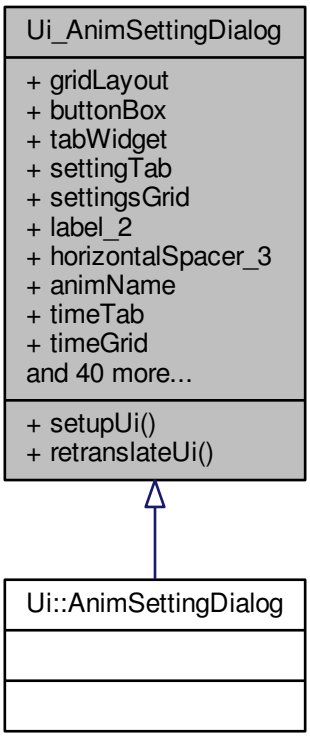

Collaboration diagram for Ui_AnimSettingDialog:

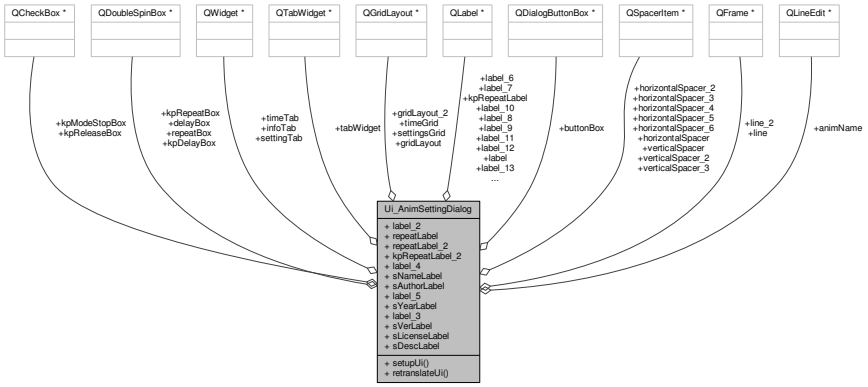

Public Member Functions

- void setupUi (QDialog *AnimSettingDialog)
- void retranslateUi (QDialog *AnimSettingDialog)

Data Fields

- QGridLayout * gridLayout
- QDialogButtonBox * buttonBox
- QTabWidget * tabWidget
- QWidget * settingTab
- QGridLayout * settingsGrid
- QLabel * label_2
- QSpacerItem * horizontalSpacer_3
- QLineEdit * animName
- QWidget * timeTab
- QGridLayout * timeGrid
- QSpacerItem * horizontalSpacer_5
- QLabel * kpRepeatLabel
- QLabel * repeatLabel
- QDoubleSpinBox * repeatBox
- QLabel * repeatLabel_2
- QFrame * line
- QLabel * kpRepeatLabel_2
- QLabel * label_4
- QLabel * label_8
- QDoubleSpinBox * kpDelayBox
- QLabel * label_13
- QLabel * label_12
- QDoubleSpinBox * delayBox
- QCheckBox * kpModeStopBox
- QLabel * label_10
- QSpacerItem * verticalSpacer_3
- QSpacerItem * horizontalSpacer_4
- QCheckBox * kpReleaseBox
- QLabel * label_6
- QDoubleSpinBox * kpRepeatBox
- QSpacerItem * verticalSpacer_2
- QFrame * line_2
- QSpacerItem * horizontalSpacer_6
- QWidget * infoTab
- QGridLayout * gridLayout_2
- QLabel * sNameLabel
- QLabel * label_7
- QLabel * label_11
- QLabel * sAuthorLabel
- QLabel * label_9
- QLabel * label_5
- QLabel * sYearLabel
- QLabel * label_3
- QSpacerItem * horizontalSpacer
- QSpacerItem * horizontalSpacer_2
- QLabel * sVerLabel
- QLabel * sLicenseLabel
- QLabel * label
- QSpacerItem * verticalSpacer
- QLabel * sDescLabel

12.86.1 Detailed Description

Definition at line 31 of file ui_animsettingdialog.h.

12.86.2 Member Function Documentation

12.86.2.1 void Ui_AnimSettingDialog::retranslateUi (QDialog * *AnimSettingDialog*) [inline]

Definition at line 349 of file ui_animsettingdialog.h.

References infoTab, kpModeStopBox, kpReleaseBox, kpRepeatLabel, kpRepeatLabel_2, label, label_10, label_11, label_12, label_13, label_2, label_3, label_4, label_5, label_6, label_7, label_8, label_9, repeatLabel, repeatLabel_2, sAuthorLabel, sDescLabel, settingTab, sLicenseLabel, sNameLabel, sVerLabel, sYearLabel, tabWidget, and timeTab.

Referenced by setupUi().

```
350     {
351         AnimSettingDialog->setWindowTitle(QApplication::translate("AnimSettingDialog", "Dialog", Q_NULLPTR)
    );
352         label_2->setText(QApplication::translate("AnimSettingDialog", "Name:", Q_NULLPTR));
353         tabWidget->setTabText(tabWidget->indexOf(settingTab),
    QApplication::translate("AnimSettingDialog", "Settings", Q_NULLPTR));
354         kpRepeatLabel->setText(QApplication::translate("AnimSettingDialog", "Repeat every:",
    Q_NULLPTR));
355         repeatLabel->setText(QApplication::translate("AnimSettingDialog", "Repeat every:",
    Q_NULLPTR));
356         repeatLabel_2->setText(QApplication::translate("AnimSettingDialog", "seconds",
    Q_NULLPTR));
357         kpRepeatLabel_2->setText(QApplication::translate("AnimSettingDialog", "seconds",
    Q_NULLPTR));
358         label_4->setText(QApplication::translate("AnimSettingDialog", "<b>On mode start</b>",
    Q_NULLPTR));
359         label_8->setText(QApplication::translate("AnimSettingDialog", "seconds", Q_NULLPTR));
360         label_13->setText(QApplication::translate("AnimSettingDialog", "seconds", Q_NULLPTR));
361         label_12->setText(QApplication::translate("AnimSettingDialog", "Start delay:", Q_NULLPTR));
362         kpModeStopBox->setText(QApplication::translate("AnimSettingDialog", "Stop on key press
    ", Q_NULLPTR));
363         label_10->setText(QApplication::translate("AnimSettingDialog", "Start delay:", Q_NULLPTR));
364         kpReleaseBox->setText(QApplication::translate("AnimSettingDialog", "Stop on key release
    ", Q_NULLPTR));
365         label_6->setText(QApplication::translate("AnimSettingDialog", "<b>On key press</b>",
    Q_NULLPTR));
366         tabWidget->setTabText(tabWidget->indexOf(timeTab), QApplication::translate
    ("AnimSettingDialog", "Timing", Q_NULLPTR));
367         sNameLabel->setText(QApplication::translate("AnimSettingDialog", "Name", Q_NULLPTR));
368         label_7->setText(QApplication::translate("AnimSettingDialog", "Year:", Q_NULLPTR));
369         label_11->setText(QApplication::translate("AnimSettingDialog", "Description:", Q_NULLPTR));
370         sAuthorLabel->setText(QApplication::translate("AnimSettingDialog", "Author", Q_NULLPTR)
    );
371         label_9->setText(QApplication::translate("AnimSettingDialog", "License:", Q_NULLPTR));
372         label_5->setText(QApplication::translate("AnimSettingDialog", "Version:", Q_NULLPTR));
373         sYearLabel->setText(QApplication::translate("AnimSettingDialog", "Year", Q_NULLPTR));
374         label_3->setText(QApplication::translate("AnimSettingDialog", "Author:", Q_NULLPTR));
375         sVerLabel->setText(QApplication::translate("AnimSettingDialog", "Version", Q_NULLPTR));
376         sLicenseLabel->setText(QApplication::translate("AnimSettingDialog", "License",
    Q_NULLPTR));
377         label->setText(QApplication::translate("AnimSettingDialog", "Script name:", Q_NULLPTR));
378         sDescLabel->setText(QApplication::translate("AnimSettingDialog", "Description", Q_NULLPTR
    ));
379         tabWidget->setTabText(tabWidget->indexOf(infoTab), QApplication::translate
    ("AnimSettingDialog", "About", Q_NULLPTR));
380     } // retranslateUi
```

Here is the caller graph for this function:



12.86.2.2 void Ui_AnimSettingDialog::setupUi (QDialog * *AnimSettingDialog*) [inline]

Definition at line 85 of file ui_animsettingdialog.h.

References animName, buttonBox, delayBox, gridLayout, gridLayout_2, horizontalSpacer, horizontalSpacer_2, horizontalSpacer_3, horizontalSpacer_4, horizontalSpacer_5, horizontalSpacer_6, infoTab, kpDelayBox, kpModeStopBox, kpReleaseBox, kpRepeatBox, kpRepeatLabel, kpRepeatLabel_2, label, label_10, label_11, label_12, label_13, label_2, label_3, label_4, label_5, label_6, label_7, label_8, label_9, line, line_2, repeatBox, repeatLabel, repeatLabel_2, retranslateUi(), sAuthorLabel, sDescLabel, settingsGrid, settingTab, sLicenseLabel, sNameLabel, sVerLabel, sYearLabel, tabWidget, timeGrid, timeTab, verticalSpacer, verticalSpacer_2, and verticalSpacer_3.

Referenced by AnimSettingDialog::AnimSettingDialog().

```
86     {
87         if (AnimSettingDialog->objectName().isEmpty())
88             AnimSettingDialog->setObjectName(QStringLiteral("AnimSettingDialog"));
89         AnimSettingDialog->resize(480, 457);
90         AnimSettingDialog->setMinimumSize(QSize(480, 0));
91         AnimSettingDialog->setFocusPolicy(Qt::ClickFocus);
92         gridLayout = new QGridLayout(AnimSettingDialog);
93         gridLayout->setObjectName(QStringLiteral("gridLayout"));
94         buttonBox = new QDialogButtonBox(AnimSettingDialog);
95         buttonBox->setObjectName(QStringLiteral("buttonBox"));
96         buttonBox->setOrientation(Qt::Horizontal);
97         buttonBox->setStandardButtons(QDialogButtonBox::Cancel|QDialogButtonBox::Ok);
98 
99         gridLayout->addWidget(buttonBox, 2, 0, 1, 1);
100 
101         tabWidget = new QTabWidget(AnimSettingDialog);
102         tabWidget->setObjectName(QStringLiteral("tabWidget"));
103         settingTab = new QWidget();
104         settingTab->setObjectName(QStringLiteral("settingTab"));
105         settingsGrid = new QGridLayout(settingTab);
106         settingsGrid->setSpacing(12);
107         settingsGrid->setObjectName(QStringLiteral("settingsGrid"));
108         settingsGrid->setContentsMargins(12, 12, 12, 12);
109         label_2 = new QLabel(settingTab);
110         label_2->setObjectName(QStringLiteral("label_2"));
111 
112         settingsGrid->addWidget(label_2, 0, 1, 1, 1);
113 
114         horizontalSpacer_3 = new QSpacerItem(5, 0, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
115 
116         settingsGrid->addItem(horizontalSpacer_3, 0, 2, 1, 1);
117 
118         animName = new QLineEdit(settingTab);
119         animName->setObjectName(QStringLiteral("animName"));
120 
121         settingsGrid->addWidget(animName, 0, 3, 1, 3);
122 
123         tabWidget->addTab(settingTab, QString());
124         timeTab = new QWidget();
125         timeTab->setObjectName(QStringLiteral("timeTab"));
126         timeGrid = new QGridLayout(timeTab);
127         timeGrid->setSpacing(12);
128         timeGrid->setObjectName(QStringLiteral("timeGrid"));
129         timeGrid->setContentsMargins(12, 12, 12, 12);
130         horizontalSpacer_5 = new QSpacerItem(15, 0, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
131 
132         timeGrid->addItem(horizontalSpacer_5, 3, 2, 1, 1);
133 
134         kpRepeatLabel = new QLabel(timeTab);
135         kpRepeatLabel->setObjectName(QStringLiteral("kpRepeatLabel"));
136 
137         timeGrid->addWidget(kpRepeatLabel, 11, 1, 1, 1);
138 
139         repeatLabel = new QLabel(timeTab);
140         repeatLabel->setObjectName(QStringLiteral("repeatLabel"));
141 
142         timeGrid->addWidget(repeatLabel, 3, 1, 1, 1);
143 
144         repeatBox = new QDoubleSpinBox(timeTab);
145         repeatBox->setObjectName(QStringLiteral("repeatBox"));
146         repeatBox->setDecimals(1);
147         repeatBox->setMinimum(0.1);
148         repeatBox->setMaximum(86400);
149 
150         timeGrid->addWidget(repeatBox, 3, 3, 1, 1);
151 
152         repeatLabel_2 = new QLabel(timeTab);
153         repeatLabel_2->setObjectName(QStringLiteral("repeatLabel_2"));
```

```
154
155         timeGrid->addWidget(repeatLabel_2, 3, 4, 1, 1);
156
157         line = new QFrame(timeTab);
158         line->setObjectName(QStringLiteral("line"));
159         line->setFrameShape(QFrame::HLine);
160         line->setFrameShadow(QFrame::Sunken);
161
162         timeGrid->addWidget(line, 1, 0, 1, 6);
163
164         kpRepeatLabel_2 = new QLabel(timeTab);
165         kpRepeatLabel_2->setObjectName(QStringLiteral("kpRepeatLabel_2"));
166
167         timeGrid->addWidget(kpRepeatLabel_2, 11, 4, 1, 1);
168
169         label_4 = new QLabel(timeTab);
170         label_4->setObjectName(QStringLiteral("label_4"));
171
172         timeGrid->addWidget(label_4, 0, 0, 1, 6);
173
174         label_8 = new QLabel(timeTab);
175         label_8->setObjectName(QStringLiteral("label_8"));
176
177         timeGrid->addWidget(label_8, 2, 4, 1, 1);
178
179         kpDelayBox = new QDoubleSpinBox(timeTab);
180         kpDelayBox->setObjectName(QStringLiteral("kpDelayBox"));
181         kpDelayBox->setDecimals(1);
182         kpDelayBox->setMaximum(86400);
183
184         timeGrid->addWidget(kpDelayBox, 10, 3, 1, 1);
185
186         label_13 = new QLabel(timeTab);
187         label_13->setObjectName(QStringLiteral("label_13"));
188
189         timeGrid->addWidget(label_13, 10, 4, 1, 1);
190
191         label_12 = new QLabel(timeTab);
192         label_12->setObjectName(QStringLiteral("label_12"));
193
194         timeGrid->addWidget(label_12, 10, 1, 1, 1);
195
196         delayBox = new QDoubleSpinBox(timeTab);
197         delayBox->setObjectName(QStringLiteral("delayBox"));
198         delayBox->setDecimals(1);
199         delayBox->setMaximum(86400);
200
201         timeGrid->addWidget(delayBox, 2, 3, 1, 1);
202
203         kpModeStopBox = new QCheckBox(timeTab);
204         kpModeStopBox->setObjectName(QStringLiteral("kpModeStopBox"));
205
206         timeGrid->addWidget(kpModeStopBox, 5, 1, 1, 3);
207
208         label_10 = new QLabel(timeTab);
209         label_10->setObjectName(QStringLiteral("label_10"));
210
211         timeGrid->addWidget(label_10, 2, 1, 1, 1);
212
213         verticalSpacer_3 = new QSpacerItem(0, 10, QSizePolicy::Minimum, QSizePolicy::Fixed)
    ;
214
215         timeGrid->addItem(verticalSpacer_3, 7, 1, 1, 1);
216
217         horizontalSpacer_4 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
218
219         timeGrid->addItem(horizontalSpacer_4, 2, 5, 1, 1);
220
221         kpReleaseBox = new QCheckBox(timeTab);
222         kpReleaseBox->setObjectName(QStringLiteral("kpReleaseBox"));
223
224         timeGrid->addWidget(kpReleaseBox, 14, 1, 1, 3);
225
226         label_6 = new QLabel(timeTab);
227         label_6->setObjectName(QStringLiteral("label_6"));
228
229         timeGrid->addWidget(label_6, 8, 0, 1, 6);
230
231         kpRepeatBox = new QDoubleSpinBox(timeTab);
232         kpRepeatBox->setObjectName(QStringLiteral("kpRepeatBox"));
233         kpRepeatBox->setDecimals(1);
234         kpRepeatBox->setMinimum(0.1);
235         kpRepeatBox->setMaximum(86400);
236
237         timeGrid->addWidget(kpRepeatBox, 11, 3, 1, 1);
238
```

```
239         verticalSpacer_2 = new QSpacerItem(20, 40, QSizePolicy::Minimum,
    QSizePolicy::Expanding);
240
241         timeGrid->addItem(verticalSpacer_2, 15, 1, 1, 1);
242
243         line_2 = new QFrame(timeTab);
244         line_2->setObjectName(QStringLiteral("line_2"));
245         line_2->setFrameShape(QFrame::HLine);
246         line_2->setFrameShadow(QFrame::Sunken);
247
248         timeGrid->addWidget(line_2, 9, 0, 1, 6);
249
250         horizontalSpacer_6 = new QSpacerItem(0, 0, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
251
252         timeGrid->addItem(horizontalSpacer_6, 12, 2, 1, 1);
253
254         tabWidget->addTab(timeTab, QString());
255         infoTab = new QWidget();
256         infoTab->setObjectName(QStringLiteral("infoTab"));
257         gridLayout_2 = new QGridLayout(infoTab);
258         gridLayout_2->setSpacing(12);
259         gridLayout_2->setObjectName(QStringLiteral("gridLayout_2"));
260         gridLayout_2->setContentsMargins(12, 12, 12, 12);
261         sNameLabel = new QLabel(infoTab);
262         sNameLabel->setObjectName(QStringLiteral("sNameLabel"));
263
264         gridLayout_2->addWidget(sNameLabel, 0, 2, 1, 1);
265
266         label_7 = new QLabel(infoTab);
267         label_7->setObjectName(QStringLiteral("label_7"));
268
269         gridLayout_2->addWidget(label_7, 3, 0, 1, 1);
270
271         label_11 = new QLabel(infoTab);
272         label_11->setObjectName(QStringLiteral("label_11"));
273
274         gridLayout_2->addWidget(label_11, 5, 0, 1, 1);
275
276         sAuthorLabel = new QLabel(infoTab);
277         sAuthorLabel->setObjectName(QStringLiteral("sAuthorLabel"));
278
279         gridLayout_2->addWidget(sAuthorLabel, 2, 2, 1, 1);
280
281         label_9 = new QLabel(infoTab);
282         label_9->setObjectName(QStringLiteral("label_9"));
283
284         gridLayout_2->addWidget(label_9, 4, 0, 1, 1);
285
286         label_5 = new QLabel(infoTab);
287         label_5->setObjectName(QStringLiteral("label_5"));
288
289         gridLayout_2->addWidget(label_5, 1, 0, 1, 1);
290
291         sYearLabel = new QLabel(infoTab);
292         sYearLabel->setObjectName(QStringLiteral("sYearLabel"));
293
294         gridLayout_2->addWidget(sYearLabel, 3, 2, 1, 1);
295
296         label_3 = new QLabel(infoTab);
297         label_3->setObjectName(QStringLiteral("label_3"));
298
299         gridLayout_2->addWidget(label_3, 2, 0, 1, 1);
300
301         horizontalSpacer = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
302
303         gridLayout_2->addItem(horizontalSpacer, 0, 3, 1, 1);
304
305         horizontalSpacer_2 = new QSpacerItem(20, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
306
307         gridLayout_2->addItem(horizontalSpacer_2, 0, 1, 1, 1);
308
309         sVerLabel = new QLabel(infoTab);
310         sVerLabel->setObjectName(QStringLiteral("sVerLabel"));
311
312         gridLayout_2->addWidget(sVerLabel, 1, 2, 1, 1);
313
314         sLicenseLabel = new QLabel(infoTab);
315         sLicenseLabel->setObjectName(QStringLiteral("sLicenseLabel"));
316
317         gridLayout_2->addWidget(sLicenseLabel, 4, 2, 1, 1);
318
319         label = new QLabel(infoTab);
320         label->setObjectName(QStringLiteral("label"));
321
```

```
322         gridLayout_2->addWidget(label, 0, 0, 1, 1);
323
324         verticalSpacer = new QSpacerItem(20, 40, QSizePolicy::Minimum, QSizePolicy::Expanding
    );
325
326         gridLayout_2->addItem(verticalSpacer, 6, 0, 1, 1);
327
328         sDescLabel = new QLabel(infoTab);
329         sDescLabel->setObjectName(QStringLiteral("sDescLabel"));
330         sDescLabel->setAlignment(Qt::AlignLeading|Qt::AlignLeft|Qt::AlignTop);
331
332         gridLayout_2->addWidget(sDescLabel, 5, 2, 2, 2);
333
334         tabWidget->addTab(infoTab, QString());
335
336         gridLayout->addWidget(tabWidget, 0, 0, 1, 1);
337
338
339         retranslateUi(AnimSettingDialog);
340         QObject::connect(buttonBox, SIGNAL(accepted()), AnimSettingDialog, SLOT(accept()));
341         QObject::connect(buttonBox, SIGNAL(rejected()), AnimSettingDialog, SLOT(reject()));
342
343         tabWidget->setCurrentIndex(0);
344
345
346         QMetaObject::connectSlotsByName(AnimSettingDialog);
347     } // setupUi
```

Here is the call graph for this function:



Here is the caller graph for this function:



12.86.3 Field Documentation

12.86.3.1 QLineEdit* Ui_AnimSettingDialog::animName

Definition at line 41 of file ui_animsettingdialog.h.

Referenced by AnimSettingDialog::AnimSettingDialog(), AnimSettingDialog::name(), and setupUi().

12.86.3.2 QDialogButtonBox* Ui_AnimSettingDialog::buttonBox

Definition at line 35 of file ui_animsettingdialog.h.

Referenced by setupUi().

12.86.3.3 QDoubleSpinBox* Ui_AnimSettingDialog::delayBox

Definition at line 56 of file ui_animsettingdialog.h.

Referenced by AnimSettingDialog::AnimSettingDialog(), and setupUi().

12.86.3.4 QGridLayout* Ui_AnimSettingDialog::gridLayout

Definition at line 34 of file ui_animsettingdialog.h.

Referenced by setupUi().

12.86.3.5 QGridLayout* Ui_AnimSettingDialog::gridLayout_2

Definition at line 68 of file ui_animsettingdialog.h.

Referenced by setupUi().

12.86.3.6 QSpacerItem* Ui_AnimSettingDialog::horizontalSpacer

Definition at line 77 of file ui_animsettingdialog.h.

Referenced by setupUi().

12.86.3.7 QSpacerItem* Ui_AnimSettingDialog::horizontalSpacer_2

Definition at line 78 of file ui_animsettingdialog.h.

Referenced by setupUi().

12.86.3.8 QSpacerItem* Ui_AnimSettingDialog::horizontalSpacer_3

Definition at line 40 of file ui_animsettingdialog.h.

Referenced by setupUi().

12.86.3.9 QSpacerItem* Ui_AnimSettingDialog::horizontalSpacer_4

Definition at line 60 of file ui_animsettingdialog.h.

Referenced by setupUi().

12.86.3.10 QSpacerItem* Ui_AnimSettingDialog::horizontalSpacer_5

Definition at line 44 of file ui_animsettingdialog.h.

Referenced by setupUi().

12.86.3.11 QSpacerItem* Ui_AnimSettingDialog::horizontalSpacer_6

Definition at line 66 of file ui_animsettingdialog.h.

Referenced by setupUi().

12.86.3.12 QWidget* Ui_AnimSettingDialog::infoTab

Definition at line 67 of file ui_animsettingdialog.h.

Referenced by retranslateUi(), and setupUi().

12.86.3.13 QDoubleSpinBox* Ui_AnimSettingDialog::kpDelayBox

Definition at line 53 of file ui_animsettingdialog.h.

Referenced by AnimSettingDialog::AnimSettingDialog(), and setupUi().

12.86.3.14 QCheckBox* Ui_AnimSettingDialog::kpModeStopBox

Definition at line 57 of file ui_animsettingdialog.h.

Referenced by AnimSettingDialog::AnimSettingDialog(), retranslateUi(), and setupUi().

12.86.3.15 QCheckBox* Ui_AnimSettingDialog::kpReleaseBox

Definition at line 61 of file ui_animsettingdialog.h.

Referenced by AnimSettingDialog::AnimSettingDialog(), retranslateUi(), and setupUi().

12.86.3.16 QDoubleSpinBox* Ui_AnimSettingDialog::kpRepeatBox

Definition at line 63 of file ui_animsettingdialog.h.

Referenced by AnimSettingDialog::AnimSettingDialog(), and setupUi().

12.86.3.17 QLabel* Ui_AnimSettingDialog::kpRepeatLabel

Definition at line 45 of file ui_animsettingdialog.h.

Referenced by AnimSettingDialog::AnimSettingDialog(), retranslateUi(), and setupUi().

12.86.3.18 QLabel* Ui_AnimSettingDialog::kpRepeatLabel_2

Definition at line 50 of file ui_animsettingdialog.h.

Referenced by AnimSettingDialog::AnimSettingDialog(), retranslateUi(), and setupUi().

12.86.3.19 QLabel* Ui_AnimSettingDialog::label

Definition at line 81 of file ui_animsettingdialog.h.

Referenced by retranslateUi(), and setupUi().

12.86.3.20 QLabel* Ui_AnimSettingDialog::label_10

Definition at line 58 of file ui_animsettingdialog.h.

Referenced by retranslateUi(), and setupUi().

12.86.3.21 QLabel* Ui_AnimSettingDialog::label_11

Definition at line 71 of file ui_animsettingdialog.h.

Referenced by retranslateUi(), and setupUi().

12.86.3.22 QLabel* Ui_AnimSettingDialog::label_12

Definition at line 55 of file ui_animsettingdialog.h.

Referenced by retranslateUi(), and setupUi().

12.86.3.23 QLabel* Ui_AnimSettingDialog::label_13

Definition at line 54 of file ui_animsettingdialog.h.

Referenced by retranslateUi(), and setupUi().

12.86.3.24 QLabel* Ui_AnimSettingDialog::label_2

Definition at line 39 of file ui_animsettingdialog.h.

Referenced by retranslateUi(), and setupUi().

12.86.3.25 QLabel* Ui_AnimSettingDialog::label_3

Definition at line 76 of file ui_animsettingdialog.h.

Referenced by retranslateUi(), and setupUi().

12.86.3.26 QLabel* Ui_AnimSettingDialog::label_4

Definition at line 51 of file ui_animsettingdialog.h.

Referenced by retranslateUi(), and setupUi().

12.86.3.27 QLabel* Ui_AnimSettingDialog::label_5

Definition at line 74 of file ui_animsettingdialog.h.

Referenced by retranslateUi(), and setupUi().

12.86.3.28 QLabel* Ui_AnimSettingDialog::label_6

Definition at line 62 of file ui_animsettingdialog.h.

Referenced by retranslateUi(), and setupUi().

12.86.3.29 QLabel* Ui_AnimSettingDialog::label_7

Definition at line 70 of file ui_animsettingdialog.h.

Referenced by retranslateUi(), and setupUi().

12.86.3.30 QLabel* Ui_AnimSettingDialog::label_8

Definition at line 52 of file ui_animsettingdialog.h.

Referenced by retranslateUi(), and setupUi().

12.86.3.31 QLabel* Ui_AnimSettingDialog::label_9

Definition at line 73 of file ui_animsettingdialog.h.

Referenced by retranslateUi(), and setupUi().

12.86.3.32 QFrame* Ui_AnimSettingDialog::line

Definition at line 49 of file ui_animsettingdialog.h.

Referenced by setupUi().

12.86.3.33 QFrame* Ui_AnimSettingDialog::line_2

Definition at line 65 of file ui_animsettingdialog.h.

Referenced by setupUi().

12.86.3.34 QDoubleSpinBox* Ui_AnimSettingDialog::repeatBox

Definition at line 47 of file ui_animsettingdialog.h.

Referenced by AnimSettingDialog::AnimSettingDialog(), and setupUi().

12.86.3.35 QLabel* Ui_AnimSettingDialog::repeatLabel

Definition at line 46 of file ui_animsettingdialog.h.

Referenced by AnimSettingDialog::AnimSettingDialog(), retranslateUi(), and setupUi().

12.86.3.36 QLabel* Ui_AnimSettingDialog::repeatLabel_2

Definition at line 48 of file ui_animsettingdialog.h.

Referenced by AnimSettingDialog::AnimSettingDialog(), retranslateUi(), and setupUi().

12.86.3.37 QLabel* Ui_AnimSettingDialog::sAuthorLabel

Definition at line 72 of file ui_animsettingdialog.h.

Referenced by AnimSettingDialog::AnimSettingDialog(), retranslateUi(), and setupUi().

12.86.3.38 QLabel* Ui_AnimSettingDialog::sDescLabel

Definition at line 83 of file ui_animsettingdialog.h.

Referenced by AnimSettingDialog::AnimSettingDialog(), retranslateUi(), and setupUi().

12.86.3.39 QGridLayout* Ui_AnimSettingDialog::settingsGrid

Definition at line 38 of file ui_animsettingdialog.h.

Referenced by AnimSettingDialog::AnimSettingDialog(), and setupUi().

12.86.3.40 QWidget* Ui_AnimSettingDialog::settingTab

Definition at line 37 of file ui_animsettingdialog.h.

Referenced by retranslateUi(), and setupUi().

12.86.3.41 QLabel* Ui_AnimSettingDialog::sLicenseLabel

Definition at line 80 of file ui_animsettingdialog.h.

Referenced by AnimSettingDialog::AnimSettingDialog(), retranslateUi(), and setupUi().

12.86.3.42 QLabel* Ui_AnimSettingDialog::sNameLabel

Definition at line 69 of file ui_animsettingdialog.h.

Referenced by AnimSettingDialog::AnimSettingDialog(), retranslateUi(), and setupUi().

12.86.3.43 QLabel* Ui_AnimSettingDialog::sVerLabel

Definition at line 79 of file ui_animsettingdialog.h.

Referenced by AnimSettingDialog::AnimSettingDialog(), retranslateUi(), and setupUi().

12.86.3.44 QLabel* Ui_AnimSettingDialog::sYearLabel

Definition at line 75 of file ui_animsettingdialog.h.

Referenced by AnimSettingDialog::AnimSettingDialog(), retranslateUi(), and setupUi().

12.86.3.45 QTabWidget* Ui_AnimSettingDialog::tabWidget

Definition at line 36 of file ui_animsettingdialog.h.

Referenced by retranslateUi(), and setupUi().

12.86.3.46 QGridLayout* Ui_AnimSettingDialog::timeGrid

Definition at line 43 of file ui_animsettingdialog.h.

Referenced by AnimSettingDialog::AnimSettingDialog(), and setupUi().

12.86.3.47 QWidget* Ui_AnimSettingDialog::timeTab

Definition at line 42 of file ui_animsettingdialog.h.

Referenced by retranslateUi(), and setupUi().

12.86.3.48 QSpacerItem* Ui_AnimSettingDialog::verticalSpacer

Definition at line 82 of file ui_animsettingdialog.h.

Referenced by setupUi().

12.86.3.49 QSpacerItem* Ui_AnimSettingDialog::verticalSpacer_2

Definition at line 64 of file ui_animsettingdialog.h.

Referenced by setupUi().

12.86.3.50 QSpacerItem* Ui_AnimSettingDialog::verticalSpacer_3

Definition at line 59 of file ui_animsettingdialog.h.

Referenced by setupUi().

The documentation for this class was generated from the following file:

- src/ckb/ui_animsettingdialog.h

12.87 Ui_ExtraSettingsWidget Class Reference

`#include <src/ckb/ui_extrasettingswidget.h>`

Inheritance diagram for Ui_ExtraSettingsWidget:

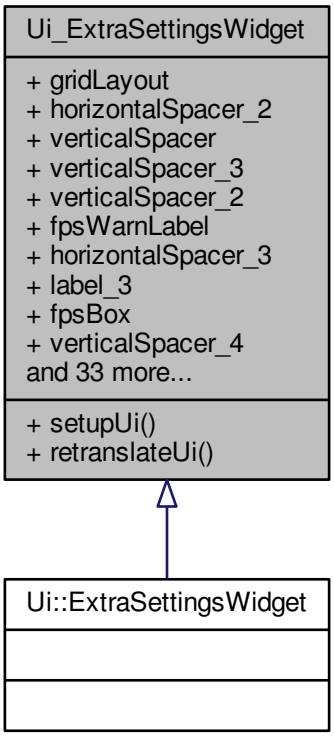

Collaboration diagram for Ui_ExtraSettingsWidget:

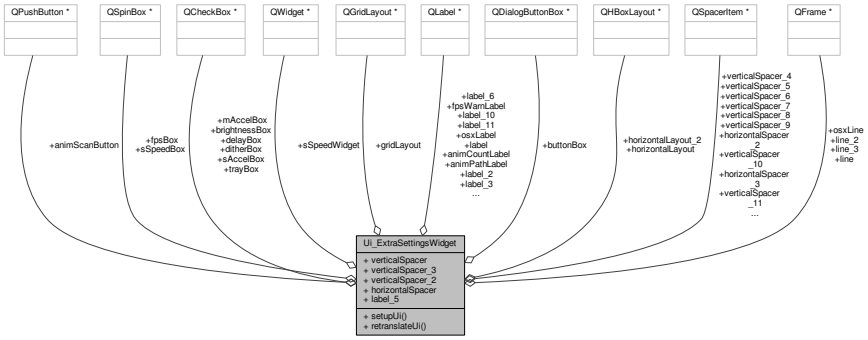

Public Member Functions

- void setupUi (QDialog *ExtraSettingsWidget)
- void retranslateUi (QDialog *ExtraSettingsWidget)

Data Fields

- QGridLayout * gridLayout
- QSpacerItem * horizontalSpacer_2
- QSpacerItem * verticalSpacer
- QSpacerItem * verticalSpacer_3
- QSpacerItem * verticalSpacer_2
- QLabel * fpsWarnLabel
- QSpacerItem * horizontalSpacer_3
- QLabel * label_3
- QSpinBox * fpsBox
- QSpacerItem * verticalSpacer_4
- QSpacerItem * verticalSpacer_9
- QLabel * label_6
- QSpacerItem * verticalSpacer_6
- QSpacerItem * verticalSpacer_5
- QCheckBox * sAccelBox
- QSpacerItem * verticalSpacer_7
- QSpacerItem * verticalSpacer_8
- QSpacerItem * verticalSpacer_10
- QSpacerItem * verticalSpacer_11
- QSpacerItem * horizontalSpacer
- QFrame * line_2
- QHBoxLayout * horizontalLayout
- QLabel * animPathLabel
- QLabel * animCountLabel
- QPushButton * animScanButton
- QCheckBox * brightnessBox
- QCheckBox * trayBox
- QLabel * label
- QFrame * line
- QLabel * label_5
- QFrame * line_3
- QLabel * label_2
- QCheckBox * ditherBox
- QCheckBox * delayBox
- QLabel * osxLabel
- QFrame * osxLine
- QCheckBox * mAccelBox
- QWidget * sSpeedWidget
- QHBoxLayout * horizontalLayout_2
- QLabel * label_10
- QSpinBox * sSpeedBox
- QLabel * label_11
- QDialogButtonBox * buttonBox

12.87.1 Detailed Description

Definition at line 31 of file ui_extrasettingswidget.h.

12.87.2 Member Function Documentation

12.87.2.1 void Ui_ExtraSettingsWidget::retranslateUi (QDialog * *ExtraSettingsWidget*) [inline]

Definition at line 322 of file ui_extrasettingswidget.h.

References animCountLabel, animPathLabel, animScanButton, brightnessBox, delayBox, ditherBox, fpsWarnLabel, label, label_10, label_11, label_2, label_3, label_5, label_6, mAccelBox, osxLabel, sAccelBox, and trayBox.

Referenced by setupUi().

```
323     {
324         ExtraSettingsWidget->setWindowTitle(QApplication::translate("ExtraSettingsWidget", "Application
      Settings", Q_NULLPTR));
325         fpsWarnLabel->setText(QApplication::translate("ExtraSettingsWidget", "Warning: high
      frame rates may cause stability issues", Q_NULLPTR));
326         label_3->setText(QApplication::translate("ExtraSettingsWidget", "Frame rate (FPS):",
     Q_NULLPTR));
327         label_6->setText(QApplication::translate("ExtraSettingsWidget", "Location:", Q_NULLPTR));
328 #ifndef QT_NO_TOOLTIP
329         sAccelBox->setToolTip(QApplication::translate("ExtraSettingsWidget", "Try this if you're
      having problems with the scroll wheel.", Q_NULLPTR));
330 #endif // QT_NO_TOOLTIP
331         sAccelBox->setText(QApplication::translate("ExtraSettingsWidget", "Disable scroll
     acceleration", Q_NULLPTR));
332         animPathLabel->setText(QApplication::translate("ExtraSettingsWidget", "
    /path/to/animations", Q_NULLPTR));
333         animCountLabel->setText(QApplication::translate("ExtraSettingsWidget", "0 animations
     found", Q_NULLPTR));
334         animScanButton->setText(QApplication::translate("ExtraSettingsWidget", "Re-scan",
     Q_NULLPTR));
335 #ifndef QT_NO_TOOLTIP
336         brightnessBox->setToolTip(QApplication::translate("ExtraSettingsWidget", "By default,
      the same brightness level will be applied to all profiles and all devices. Enable this to store it with the
      lighting mode instead.", Q_NULLPTR));
337 #endif // QT_NO_TOOLTIP
338         brightnessBox->setText(QApplication::translate("ExtraSettingsWidget", "Set brightness
     per-mode", Q_NULLPTR));
339 #ifndef QT_NO_TOOLTIP
340         trayBox->setToolTip(QApplication::translate("ExtraSettingsWidget", "The tray icon will not
     be displayed. The application will still run in the background; re-launch the app to see the GUI again.",
     Q_NULLPTR));
341 #endif // QT_NO_TOOLTIP
342         trayBox->setText(QApplication::translate("ExtraSettingsWidget", "Hide tray icon", Q_NULLPTR)
    );
343         label->setText(QApplication::translate("ExtraSettingsWidget", "Behavior", Q_NULLPTR));
344         label_5->setText(QApplication::translate("ExtraSettingsWidget", "Animation scripts",
     Q_NULLPTR));
345         label_2->setText(QApplication::translate("ExtraSettingsWidget", "Hardware", Q_NULLPTR));
346 #ifndef QT_NO_TOOLTIP
347         ditherBox->setToolTip(QApplication::translate("ExtraSettingsWidget", "May improve
    appearance on some keyboards.", Q_NULLPTR));
348 #endif // QT_NO_TOOLTIP
349         ditherBox->setText(QApplication::translate("ExtraSettingsWidget", "Use spatial dithering
     to simulate extra color resolution", Q_NULLPTR));
350 #ifndef QT_NO_TOOLTIP
351         delayBox->setToolTip(QApplication::translate("ExtraSettingsWidget", "When using macros with
      strings longer than 25 chars, some OS may lose characters (e.g. Mint 17.2). Select to prevent that bug.",
     Q_NULLPTR));
352 #endif // QT_NO_TOOLTIP
353         delayBox->setText(QApplication::translate("ExtraSettingsWidget", "Use delay for very long
     macros", Q_NULLPTR));
354         osxLabel->setText(QApplication::translate("ExtraSettingsWidget", "OS X tweaks", Q_NULLPTR))
    ;
355 #ifndef QT_NO_TOOLTIP
356         mAccelBox->setToolTip(QApplication::translate("ExtraSettingsWidget", "Try this if you're
     having problems with mouse movement.", Q_NULLPTR));
357 #endif // QT_NO_TOOLTIP
358         mAccelBox->setText(QApplication::translate("ExtraSettingsWidget", "Disable mouse
     acceleration", Q_NULLPTR));
359         label_10->setText(QApplication::translate("ExtraSettingsWidget", "Scroll", Q_NULLPTR));
360         label_11->setText(QApplication::translate("ExtraSettingsWidget", "line(s) at a time",
     Q_NULLPTR));
361     } // retranslateUi
```

Here is the caller graph for this function:



12.87.2.2 void Ui_ExtraSettingsWidget::setupUi (QDialog * *ExtraSettingsWidget*) [inline]

Definition at line 78 of file ui_extrasettingswidget.h.

References animCountLabel, animPathLabel, animScanButton, brightnessBox, buttonBox, delayBox, ditherBox, fpsBox, fpsWarnLabel, gridLayout, horizontalLayout, horizontalLayout_2, horizontalSpacer, horizontalSpacer_2, horizontalSpacer_3, label, label_10, label_11, label_2, label_3, label_5, label_6, line, line_2, line_3, mAccelBox, osxLabel, osxLine, retranslateUi(), sAccelBox, sSpeedBox, sSpeedWidget, trayBox, verticalSpacer, verticalSpacer_10, verticalSpacer_11, verticalSpacer_2, verticalSpacer_3, verticalSpacer_4, verticalSpacer_5, verticalSpacer_6, verticalSpacer_7, verticalSpacer_8, and verticalSpacer_9.

Referenced by ExtraSettingsWidget::ExtraSettingsWidget().

```
79     {
80         if (ExtraSettingsWidget->objectName().isEmpty())
81             ExtraSettingsWidget->setObjectName(QStringLiteral("ExtraSettingsWidget"));
82         ExtraSettingsWidget->resize(650, 515);
83         gridLayout = new QGridLayout(ExtraSettingsWidget);
84         gridLayout->setObjectName(QStringLiteral("gridLayout"));
85         horizontalSpacer_2 = new QSpacerItem(30, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
86
87         gridLayout->addItem(horizontalSpacer_2, 12, 2, 1, 1);
88
89         verticalSpacer = new QSpacerItem(0, 28, QSizePolicy::Minimum, QSizePolicy::Fixed);
90
91         gridLayout->addItem(verticalSpacer, 2, 0, 1, 1);
92
93         verticalSpacer_3 = new QSpacerItem(0, 28, QSizePolicy::Minimum, QSizePolicy::Fixed)
    ;
94
95         gridLayout->addItem(verticalSpacer_3, 3, 0, 1, 1);
96
97         verticalSpacer_2 = new QSpacerItem(20, 40, QSizePolicy::Minimum,
    QSizePolicy::Expanding);
98
99         gridLayout->addItem(verticalSpacer_2, 19, 5, 1, 1);
100
101         fpsWarnLabel = new QLabel(ExtraSettingsWidget);
102         fpsWarnLabel->setObjectName(QStringLiteral("fpsWarnLabel"));
103         QSizePolicy sizePolicy(QSizePolicy::Expanding, QSizePolicy::Preferred);
104         sizePolicy.setHorizontalStretch(0);
105         sizePolicy.setVerticalStretch(0);
106         sizePolicy.setHeightForWidth(fpsWarnLabel->sizePolicy().hasHeightForWidth());
107         fpsWarnLabel->setSizePolicy(sizePolicy);
108
109         gridLayout->addWidget(fpsWarnLabel, 12, 5, 1, 1);
110
111         horizontalSpacer_3 = new QSpacerItem(10, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
112
113         gridLayout->addItem(horizontalSpacer_3, 12, 4, 1, 1);
114
115         label_3 = new QLabel(ExtraSettingsWidget);
116         label_3->setObjectName(QStringLiteral("label_3"));
117
118         gridLayout->addWidget(label_3, 12, 1, 1, 1);
119
120         fpsBox = new QSpinBox(ExtraSettingsWidget);
121         fpsBox->setObjectName(QStringLiteral("fpsBox"));
122         fpsBox->setMinimum(5);
123         fpsBox->setMaximum(60);
124         fpsBox->setValue(30);
125
```

```
126         gridLayout->addWidget(fpsBox, 12, 3, 1, 1);
127 
128         verticalSpacer_4 = new QSpacerItem(0, 28, QSizePolicy::Minimum, QSizePolicy::Fixed)
    ;
129 
130         gridLayout->addItem(verticalSpacer_4, 7, 0, 1, 1);
131 
132         verticalSpacer_9 = new QSpacerItem(0, 28, QSizePolicy::Minimum, QSizePolicy::Fixed)
    ;
133 
134         gridLayout->addItem(verticalSpacer_9, 12, 0, 1, 1);
135 
136         label_6 = new QLabel(ExtraSettingsWidget);
137         label_6->setObjectName(QStringLiteral("label_6"));
138 
139         gridLayout->addWidget(label_6, 7, 1, 1, 1);
140 
141         verticalSpacer_6 = new QSpacerItem(20, 10, QSizePolicy::Minimum, QSizePolicy::Fixed
    );
142 
143         gridLayout->addItem(verticalSpacer_6, 8, 1, 1, 1);
144 
145         verticalSpacer_5 = new QSpacerItem(20, 10, QSizePolicy::Minimum, QSizePolicy::Fixed
    );
146 
147         gridLayout->addItem(verticalSpacer_5, 4, 1, 1, 1);
148 
149         sAccelBox = new QCheckBox(ExtraSettingsWidget);
150         sAccelBox->setObjectName(QStringLiteral("sAccelBox"));
151 
152         gridLayout->addWidget(sAccelBox, 18, 1, 1, 4);
153 
154         verticalSpacer_7 = new QSpacerItem(20, 10, QSizePolicy::Minimum, QSizePolicy::Fixed
    );
155 
156         gridLayout->addItem(verticalSpacer_7, 14, 1, 1, 1);
157 
158         verticalSpacer_8 = new QSpacerItem(0, 28, QSizePolicy::Minimum, QSizePolicy::Fixed)
    ;
159 
160         gridLayout->addItem(verticalSpacer_8, 13, 0, 1, 1);
161 
162         verticalSpacer_10 = new QSpacerItem(0, 28, QSizePolicy::Minimum,
    QSizePolicy::Fixed);
163 
164         gridLayout->addItem(verticalSpacer_10, 17, 0, 1, 1);
165 
166         verticalSpacer_11 = new QSpacerItem(0, 28, QSizePolicy::Minimum,
    QSizePolicy::Fixed);
167 
168         gridLayout->addItem(verticalSpacer_11, 18, 0, 1, 1);
169 
170         horizontalSpacer = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
171 
172         gridLayout->addItem(horizontalSpacer, 12, 6, 1, 1);
173 
174         line_2 = new QFrame(ExtraSettingsWidget);
175         line_2->setObjectName(QStringLiteral("line_2"));
176         line_2->setFrameShape(QFrame::HLine);
177         line_2->setFrameShadow(QFrame::Sunken);
178 
179         gridLayout->addWidget(line_2, 10, 0, 1, 7);
180 
181         horizontalLayout = new QHBoxLayout();
182         horizontalLayout->setObjectName(QStringLiteral("horizontalLayout"));
183         animPathLabel = new QLabel(ExtraSettingsWidget);
184         animPathLabel->setObjectName(QStringLiteral("animPathLabel"));
185 
186         horizontalLayout->addWidget(animPathLabel);
187 
188         animCountLabel = new QLabel(ExtraSettingsWidget);
189         animCountLabel->setObjectName(QStringLiteral("animCountLabel"));
190         sizePolicy.setHeightForWidth(animCountLabel->sizePolicy().hasHeightForWidth());
191         animCountLabel->setSizePolicy(sizePolicy);
192         animCountLabel->setAlignment(Qt::AlignRight|Qt::AlignTrailing|Qt::AlignVCenter);
193 
194         horizontalLayout->addWidget(animCountLabel);
195 
196         animScanButton = new QPushButton(ExtraSettingsWidget);
197         animScanButton->setObjectName(QStringLiteral("animScanButton"));
198 
199         horizontalLayout->addWidget(animScanButton);
200 
201 
202         gridLayout->addLayout(horizontalLayout, 7, 3, 1, 4);
203 
```

```
204         brightnessBox = new QCheckBox(ExtraSettingsWidget);
205         brightnessBox->setObjectName(QStringLiteral("brightnessBox"));
206
207         gridLayout->addWidget(brightnessBox, 3, 1, 1, 6);
208
209         trayBox = new QCheckBox(ExtraSettingsWidget);
210         trayBox->setObjectName(QStringLiteral("trayBox"));
211
212         gridLayout->addWidget(trayBox, 2, 1, 1, 6);
213
214         label = new QLabel(ExtraSettingsWidget);
215         label->setObjectName(QStringLiteral("label"));
216         QFont font;
217         font.setBold(true);
218         font.setWeight(75);
219         label->setFont(font);
220
221         gridLayout->addWidget(label, 0, 0, 1, 7);
222
223         line = new QFrame(ExtraSettingsWidget);
224         line->setObjectName(QStringLiteral("line"));
225         line->setFrameShape(QFrame::HLine);
226         line->setFrameShadow(QFrame::Sunken);
227
228         gridLayout->addWidget(line, 1, 0, 1, 7);
229
230         label_5 = new QLabel(ExtraSettingsWidget);
231         label_5->setObjectName(QStringLiteral("label_5"));
232         label_5->setFont(font);
233
234         gridLayout->addWidget(label_5, 5, 0, 1, 7);
235
236         line_3 = new QFrame(ExtraSettingsWidget);
237         line_3->setObjectName(QStringLiteral("line_3"));
238         line_3->setFrameShape(QFrame::HLine);
239         line_3->setFrameShadow(QFrame::Sunken);
240
241         gridLayout->addWidget(line_3, 6, 0, 1, 7);
242
243         label_2 = new QLabel(ExtraSettingsWidget);
244         label_2->setObjectName(QStringLiteral("label_2"));
245         label_2->setFont(font);
246
247         gridLayout->addWidget(label_2, 9, 0, 1, 7);
248
249         ditherBox = new QCheckBox(ExtraSettingsWidget);
250         ditherBox->setObjectName(QStringLiteral("ditherBox"));
251
252         gridLayout->addWidget(ditherBox, 13, 1, 1, 6);
253
254         delayBox = new QCheckBox(ExtraSettingsWidget);
255         delayBox->setObjectName(QStringLiteral("delayBox"));
256
257         gridLayout->addWidget(delayBox, 14, 1, 1, 6);
258
259         osxLabel = new QLabel(ExtraSettingsWidget);
260         osxLabel->setObjectName(QStringLiteral("osxLabel"));
261         osxLabel->setFont(font);
262
263         gridLayout->addWidget(osxLabel, 15, 0, 1, 7);
264
265         osxLine = new QFrame(ExtraSettingsWidget);
266         osxLine->setObjectName(QStringLiteral("osxLine"));
267         osxLine->setFrameShape(QFrame::HLine);
268         osxLine->setFrameShadow(QFrame::Sunken);
269
270         gridLayout->addWidget(osxLine, 16, 0, 1, 7);
271
272         mAccelBox = new QCheckBox(ExtraSettingsWidget);
273         mAccelBox->setObjectName(QStringLiteral("mAccelBox"));
274
275         gridLayout->addWidget(mAccelBox, 17, 1, 1, 6);
276
277         sSpeedWidget = new QWidget(ExtraSettingsWidget);
278         sSpeedWidget->setObjectName(QStringLiteral("sSpeedWidget"));
279         sizePolicy.setHeightForWidth(sSpeedWidget->sizePolicy().hasHeightForWidth());
280         sSpeedWidget->setSizePolicy(sizePolicy);
281         horizontalLayout_2 = new QHBoxLayout(sSpeedWidget);
282         horizontalLayout_2->setObjectName(QStringLiteral("horizontalLayout_2"));
283         horizontalLayout_2->setContentsMargins(0, 0, 0, 0);
284         label_10 = new QLabel(sSpeedWidget);
285         label_10->setObjectName(QStringLiteral("label_10"));
286
287         horizontalLayout_2->addWidget(label_10);
288
289         sSpeedBox = new QSpinBox(sSpeedWidget);
290         sSpeedBox->setObjectName(QStringLiteral("sSpeedBox"));
```

```
291         sSpeedBox->setMinimum(1);
292         sSpeedBox->setMaximum(10);
293         sSpeedBox->setValue(3);
294 
295         horizontalLayout_2->addWidget(sSpeedBox);
296 
297         label_11 = new QLabel(sSpeedWidget);
298         label_11->setObjectName(QStringLiteral("label_11"));
299         sizePolicy.setHeightForWidth(label_11->sizePolicy().hasHeightForWidth());
300         label_11->setSizePolicy(sizePolicy);
301 
302         horizontalLayout_2->addWidget(label_11);
303 
304 
305         gridLayout->addWidget(sSpeedWidget, 18, 5, 1, 2);
306 
307         buttonBox = new QDialogButtonBox(ExtraSettingsWidget);
308         buttonBox->setObjectName(QStringLiteral("buttonBox"));
309         buttonBox->setOrientation(Qt::Horizontal);
310         buttonBox->setStandardButtons(QDialogButtonBox::Ok);
311 
312         gridLayout->addWidget(buttonBox, 20, 0, 1, 7);
313 
314 
315         retranslateUi(ExtraSettingsWidget);
316         QObject::connect(buttonBox, SIGNAL(accepted()), ExtraSettingsWidget, SLOT(accept()));
317         QObject::connect(buttonBox, SIGNAL(rejected()), ExtraSettingsWidget, SLOT(reject()));
318 
319         QMetaObject::connectSlotsByName(ExtraSettingsWidget);
320     } // setupUi
```

Here is the call graph for this function:



Here is the caller graph for this function:



12.87.3 Field Documentation

12.87.3.1 QLabel* Ui_ExtraSettingsWidget::animCountLabel

Definition at line 57 of file ui_extrasettingswidget.h.

Referenced by ExtraSettingsWidget::on_animScanButton_clicked(), retranslateUi(), and setupUi().

12.87.3.2 QLabel* Ui_ExtraSettingsWidget::animPathLabel

Definition at line 56 of file ui_extrasettingswidget.h.

Referenced by ExtraSettingsWidget::ExtraSettingsWidget(), retranslateUi(), and setupUi().

12.87.3.3 QPushButton* Ui_ExtraSettingsWidget::animScanButton

Definition at line 58 of file ui_extrasettingswidget.h.

Referenced by retranslateUi(), and setupUi().

12.87.3.4 QCheckBox* Ui_ExtraSettingsWidget::brightnessBox

Definition at line 59 of file ui_extrasettingswidget.h.

Referenced by ExtraSettingsWidget::ExtraSettingsWidget(), retranslateUi(), and setupUi().

12.87.3.5 QDialogButtonBox* Ui_ExtraSettingsWidget::buttonBox

Definition at line 76 of file ui_extrasettingswidget.h.

Referenced by setupUi().

12.87.3.6 QCheckBox* Ui_ExtraSettingsWidget::delayBox

Definition at line 67 of file ui_extrasettingswidget.h.

Referenced by ExtraSettingsWidget::ExtraSettingsWidget(), retranslateUi(), and setupUi().

12.87.3.7 QCheckBox* Ui_ExtraSettingsWidget::ditherBox

Definition at line 66 of file ui_extrasettingswidget.h.

Referenced by ExtraSettingsWidget::ExtraSettingsWidget(), retranslateUi(), and setupUi().

12.87.3.8 QSpinBox* Ui_ExtraSettingsWidget::fpsBox

Definition at line 42 of file ui_extrasettingswidget.h.

Referenced by ExtraSettingsWidget::ExtraSettingsWidget(), and setupUi().

12.87.3.9 QLabel* Ui_ExtraSettingsWidget::fpsWarnLabel

Definition at line 39 of file ui_extrasettingswidget.h.

Referenced by ExtraSettingsWidget::ExtraSettingsWidget(), ExtraSettingsWidget::on_fpsBox_valueChanged(), retranslateUi(), and setupUi().

12.87.3.10 QGridLayout* Ui_ExtraSettingsWidget::gridLayout

Definition at line 34 of file ui_extrasettingswidget.h.

Referenced by setupUi().

12.87.3.11 QHBoxLayout* Ui_ExtraSettingsWidget::horizontalLayout

Definition at line 55 of file ui_extrasettingswidget.h.

Referenced by setupUi().

12.87.3.12 QHBoxLayout* Ui_ExtraSettingsWidget::horizontalLayout_2

Definition at line 72 of file ui_extrasettingswidget.h.

Referenced by setupUi().

12.87.3.13 QSpacerItem* Ui_ExtraSettingsWidget::horizontalSpacer

Definition at line 53 of file ui_extrasettingswidget.h.

Referenced by setupUi().

12.87.3.14 QSpacerItem* Ui_ExtraSettingsWidget::horizontalSpacer_2

Definition at line 35 of file ui_extrasettingswidget.h.

Referenced by setupUi().

12.87.3.15 QSpacerItem* Ui_ExtraSettingsWidget::horizontalSpacer_3

Definition at line 40 of file ui_extrasettingswidget.h.

Referenced by setupUi().

12.87.3.16 QLabel* Ui_ExtraSettingsWidget::label

Definition at line 61 of file ui_extrasettingswidget.h.

Referenced by retranslateUi(), and setupUi().

12.87.3.17 QLabel* Ui_ExtraSettingsWidget::label_10

Definition at line 73 of file ui_extrasettingswidget.h.

Referenced by retranslateUi(), and setupUi().

12.87.3.18 QLabel* Ui_ExtraSettingsWidget::label_11

Definition at line 75 of file ui_extrasettingswidget.h.

Referenced by retranslateUi(), and setupUi().

12.87.3.19 QLabel* Ui_ExtraSettingsWidget::label_2

Definition at line 65 of file ui_extrasettingswidget.h.

Referenced by retranslateUi(), and setupUi().

12.87.3.20 QLabel* Ui_ExtraSettingsWidget::label_3

Definition at line 41 of file ui_extrasettingswidget.h.

Referenced by retranslateUi(), and setupUi().

12.87.3.21 QLabel* Ui_ExtraSettingsWidget::label_5

Definition at line 63 of file ui_extrasettingswidget.h.

Referenced by retranslateUi(), and setupUi().

12.87.3.22 QLabel* Ui_ExtraSettingsWidget::label_6

Definition at line 45 of file ui_extrasettingswidget.h.

Referenced by retranslateUi(), and setupUi().

12.87.3.23 QFrame* Ui_ExtraSettingsWidget::line

Definition at line 62 of file ui_extrasettingswidget.h.

Referenced by setupUi().

12.87.3.24 QFrame* Ui_ExtraSettingsWidget::line_2

Definition at line 54 of file ui_extrasettingswidget.h.

Referenced by setupUi().

12.87.3.25 QFrame* Ui_ExtraSettingsWidget::line_3

Definition at line 64 of file ui_extrasettingswidget.h.

Referenced by setupUi().

12.87.3.26 QCheckBox* Ui_ExtraSettingsWidget::mAccelBox

Definition at line 70 of file ui_extrasettingswidget.h.

Referenced by ExtraSettingsWidget::ExtraSettingsWidget(), retranslateUi(), and setupUi().

12.87.3.27 QLabel* Ui_ExtraSettingsWidget::osxLabel

Definition at line 68 of file ui_extrasettingswidget.h.

Referenced by ExtraSettingsWidget::ExtraSettingsWidget(), retranslateUi(), and setupUi().

12.87.3.28 QFrame* Ui_ExtraSettingsWidget::osxLine

Definition at line 69 of file ui_extrasettingswidget.h.

Referenced by ExtraSettingsWidget::ExtraSettingsWidget(), and setupUi().

12.87.3.29 QCheckBox* Ui_ExtraSettingsWidget::sAccelBox

Definition at line 48 of file ui_extrasettingswidget.h.

Referenced by ExtraSettingsWidget::ExtraSettingsWidget(), ExtraSettingsWidget::on_sSpeedBox_valueChanged(), retranslateUi(), and setupUi().

12.87.3.30 QSpinBox* Ui_ExtraSettingsWidget::sSpeedBox

Definition at line 74 of file ui_extrasettingswidget.h.

Referenced by ExtraSettingsWidget::ExtraSettingsWidget(), ExtraSettingsWidget::on_sAccelBox_clicked(), and setupUi().

12.87.3.31 QWidget* Ui_ExtraSettingsWidget::sSpeedWidget

Definition at line 71 of file ui_extrasettingswidget.h.

Referenced by ExtraSettingsWidget::ExtraSettingsWidget(), ExtraSettingsWidget::on_sAccelBox_clicked(), and setupUi().

12.87.3.32 QCheckBox* Ui_ExtraSettingsWidget::trayBox

Definition at line 60 of file ui_extrasettingswidget.h.

Referenced by ExtraSettingsWidget::ExtraSettingsWidget(), retranslateUi(), and setupUi().

12.87.3.33 QSpacerItem* Ui_ExtraSettingsWidget::verticalSpacer

Definition at line 36 of file ui_extrasettingswidget.h.

Referenced by setupUi().

12.87.3.34 QSpacerItem* Ui_ExtraSettingsWidget::verticalSpacer_10

Definition at line 51 of file ui_extrasettingswidget.h.

Referenced by setupUi().

12.87.3.35 QSpacerItem* Ui_ExtraSettingsWidget::verticalSpacer_11

Definition at line 52 of file ui_extrasettingswidget.h.

Referenced by setupUi().

12.87.3.36 QSpacerItem* Ui_ExtraSettingsWidget::verticalSpacer_2

Definition at line 38 of file ui_extrasettingswidget.h.

Referenced by setupUi().

12.87.3.37 QSpacerItem* Ui_ExtraSettingsWidget::verticalSpacer_3

Definition at line 37 of file ui_extrasettingswidget.h.

Referenced by setupUi().

12.87.3.38 QSpacerItem* Ui_ExtraSettingsWidget::verticalSpacer_4

Definition at line 43 of file ui_extrasettingswidget.h.

Referenced by setupUi().

12.87.3.39 QSpacerItem* Ui_ExtraSettingsWidget::verticalSpacer_5

Definition at line 47 of file ui_extrasettingswidget.h.

Referenced by setupUi().

12.87.3.40 QSpacerItem* Ui_ExtraSettingsWidget::verticalSpacer_6

Definition at line 46 of file ui_extrasettingswidget.h.

Referenced by setupUi().

12.87.3.41 QSpacerItem* Ui_ExtraSettingsWidget::verticalSpacer_7

Definition at line 49 of file ui_extrasettingswidget.h.

Referenced by setupUi().

12.87.3.42 QSpacerItem* Ui_ExtraSettingsWidget::verticalSpacer_8

Definition at line 50 of file ui_extrasettingswidget.h.

Referenced by setupUi().

12.87.3.43 QSpacerItem* Ui_ExtraSettingsWidget::verticalSpacer_9

Definition at line 44 of file ui_extrasettingswidget.h.

Referenced by setupUi().

The documentation for this class was generated from the following file:

- src/ckb/ui_extrasettingswidget.h

12.88 Ui_FwUpgradeDialog Class Reference

`#include <src/ckb/ui_fwupgradedialog.h>`

Inheritance diagram for Ui_FwUpgradeDialog:

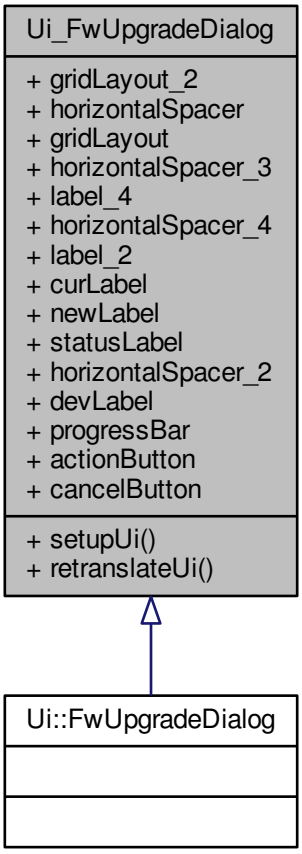

Collaboration diagram for Ui_FwUpgradeDialog:

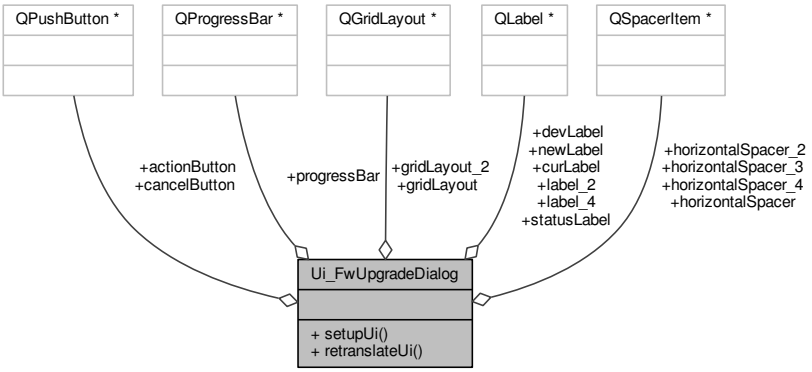

Public Member Functions

- void setupUi (QDialog *FwUpgradeDialog)
- void retranslateUi (QDialog *FwUpgradeDialog)

Data Fields

- QGridLayout * gridLayout_2
- QSpacerItem * horizontalSpacer
- QGridLayout * gridLayout
- QSpacerItem * horizontalSpacer_3
- QLabel * label_4
- QSpacerItem * horizontalSpacer_4
- QLabel * label_2
- QLabel * curLabel
- QLabel * newLabel
- QLabel * statusLabel
- QSpacerItem * horizontalSpacer_2
- QLabel * devLabel
- QProgressBar * progressBar
- QPushButton * actionButton
- QPushButton * cancelButton

12.88.1 Detailed Description

Definition at line 26 of file ui_fwupgradedialog.h.

12.88.2 Member Function Documentation

12.88.2.1 void Ui_FwUpgradeDialog::retranslateUi (QDialog * *FwUpgradeDialog*) [inline]

Definition at line 155 of file ui_fwupgradedialog.h.

References actionButton, cancelButton, curLabel, devLabel, label_2, label_4, newLabel, and statusLabel.

Referenced by setupUi().

```
156     {
157         FwUpgradeDialog->setWindowTitle(QApplication::translate("FwUpgradeDialog", "Firmware update",
      Q_NULLPTR));
158         label_4->setText(QApplication::translate("FwUpgradeDialog", "New:", Q_NULLPTR));
159         label_2->setText(QApplication::translate("FwUpgradeDialog", "Current:", Q_NULLPTR));
160         curLabel->setText(QApplication::translate("FwUpgradeDialog", "0.00", Q_NULLPTR));
161         newLabel->setText(QApplication::translate("FwUpgradeDialog", "0.00", Q_NULLPTR));
162         statusLabel->setText(QApplication::translate("FwUpgradeDialog", "Downloading new
       firmware, please wait...", Q_NULLPTR));
163         devLabel->setText(QApplication::translate("FwUpgradeDialog", "Device", Q_NULLPTR));
164         actionButton->setText(QApplication::translate("FwUpgradeDialog", "Start", Q_NULLPTR));
165         cancelButton->setText(QApplication::translate("FwUpgradeDialog", "Cancel", Q_NULLPTR));
166     } // retranslateUi
```

Here is the caller graph for this function:



12.88.2.2 void Ui_FwUpgradeDialog::setupUi (QDialog * *FwUpgradeDialog*) [inline]

Definition at line 45 of file ui_fwupgradedialog.h.

References actionButton, cancelButton, curLabel, devLabel, gridLayout, gridLayout_2, horizontalSpacer, horizontalSpacer_2, horizontalSpacer_3, horizontalSpacer_4, label_2, label_4, newLabel, progressBar, retranslateUi(), and statusLabel.

Referenced by FwUpgradeDialog::FwUpgradeDialog().

```
46     {
47         if (FwUpgradeDialog->objectName().isEmpty())
48             FwUpgradeDialog->setObjectName(QStringLiteral("FwUpgradeDialog"));
49         FwUpgradeDialog->resize(420, 240);
50         QSizePolicy sizePolicy(QSizePolicy::Fixed, QSizePolicy::Fixed);
51         sizePolicy.setHorizontalStretch(0);
52         sizePolicy.setVerticalStretch(0);
53         sizePolicy.setHeightForWidth(FwUpgradeDialog->sizePolicy().hasHeightForWidth());
54         FwUpgradeDialog->setSizePolicy(sizePolicy);
55         gridLayout_2 = new QGridLayout(FwUpgradeDialog);
56         gridLayout_2->setObjectName(QStringLiteral("gridLayout_2"));
57         horizontalSpacer = new QSpacerItem(127, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
58
59         gridLayout_2->addItem(horizontalSpacer, 1, 0, 1, 1);
60
61         gridLayout = new QGridLayout();
62         gridLayout->setObjectName(QStringLiteral("gridLayout"));
63         horizontalSpacer_3 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
64
65         gridLayout->addItem(horizontalSpacer_3, 1, 0, 1, 1);
66
67         label_4 = new QLabel(FwUpgradeDialog);
68         label_4->setObjectName(QStringLiteral("label_4"));
69         QFont font;
70         font.setBold(true);
71         font.setWeight(75);
72         label_4->setFont(font);
73
74         gridLayout->addWidget(label_4, 1, 4, 1, 1);
75
76         horizontalSpacer_4 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
77
78         gridLayout->addItem(horizontalSpacer_4, 1, 6, 1, 1);
79
80         label_2 = new QLabel(FwUpgradeDialog);
81         label_2->setObjectName(QStringLiteral("label_2"));
82         label_2->setFont(font);
83
84         gridLayout->addWidget(label_2, 1, 1, 1, 1);
85
86         curLabel = new QLabel(FwUpgradeDialog);
87         curLabel->setObjectName(QStringLiteral("curLabel"));
88
89         gridLayout->addWidget(curLabel, 1, 2, 1, 1);
90
91         newLabel = new QLabel(FwUpgradeDialog);
92         newLabel->setObjectName(QStringLiteral("newLabel"));
93
94         gridLayout->addWidget(newLabel, 1, 5, 1, 1);
95
96         statusLabel = new QLabel(FwUpgradeDialog);
97         statusLabel->setObjectName(QStringLiteral("statusLabel"));
98         QSizePolicy sizePolicy1(QSizePolicy::Preferred, QSizePolicy::Expanding);
99         sizePolicy1.setHorizontalStretch(0);
100         sizePolicy1.setVerticalStretch(0);
101         sizePolicy1.setHeightForWidth(statusLabel->sizePolicy().hasHeightForWidth());
102         statusLabel->setSizePolicy(sizePolicy1);
103         statusLabel->setAlignment(Qt::AlignCenter);
104         statusLabel->setWordWrap(true);
105
106         gridLayout->addWidget(statusLabel, 2, 0, 1, 7);
107
108         horizontalSpacer_2 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
109
110         gridLayout->addItem(horizontalSpacer_2, 1, 3, 1, 1);
111
112         devLabel = new QLabel(FwUpgradeDialog);
113         devLabel->setObjectName(QStringLiteral("devLabel"));
114         QSizePolicy sizePolicy2(QSizePolicy::Preferred, QSizePolicy::Minimum);
115         sizePolicy2.setHorizontalStretch(0);
```

```
116         sizePolicy2.setVerticalStretch(0);
117         sizePolicy2.setHeightForWidth(devLabel->sizePolicy().hasHeightForWidth());
118         devLabel->setSizePolicy(sizePolicy2);
119         devLabel->setFont(font);
120         devLabel->setAlignment(Qt::AlignCenter);
121
122         gridLayout->addWidget(devLabel, 0, 0, 1, 7);
123
124         progressBar = new QProgressBar(FwUpgradeDialog);
125         progressBar->setObjectName(QStringLiteral("progressBar"));
126         progressBar->setMaximum(0);
127         progressBar->setValue(0);
128
129         gridLayout->addWidget(progressBar, 3, 0, 1, 7);
130
131
132         gridLayout_2->addLayout(gridLayout, 0, 0, 1, 3);
133
134         actionButton = new QPushButton(FwUpgradeDialog);
135         actionButton->setObjectName(QStringLiteral("actionButton"));
136         actionButton->setEnabled(false);
137
138         gridLayout_2->addWidget(actionButton, 1, 2, 1, 1);
139
140         cancelButton = new QPushButton(FwUpgradeDialog);
141         cancelButton->setObjectName(QStringLiteral("cancelButton"));
142         cancelButton->setEnabled(false);
143
144         gridLayout_2->addWidget(cancelButton, 1, 1, 1, 1);
145
146
147         retranslateUi(FwUpgradeDialog);
148
149         actionButton->setDefault(true);
150
151
152         QMetaObject::connectSlotsByName(FwUpgradeDialog);
153     } // setupUi
```

Here is the call graph for this function:

Here is the caller graph for this function:



12.88.3 Field Documentation

12.88.3.1 QPushButton* Ui_FwUpgradeDialog::actionButton

Definition at line 42 of file ui_fwupgradedialog.h.

Referenced by FwUpgradeDialog::exec(), FwUpgradeDialog::fwUpdateFinished(), FwUpgradeDialog::on_actionButton_clicked(), retranslateUi(), and setupUi().

12.88.3.2 QPushButton* Ui_FwUpgradeDialog::cancelButton

Definition at line 43 of file ui_fwupgradedialog.h.

Referenced by FwUpgradeDialog::exec(), FwUpgradeDialog::on_actionButton_clicked(), retranslateUi(), and setupUi().

12.88.3.3 QLabel* Ui_FwUpgradeDialog::curLabel

Definition at line 36 of file ui_fwupgradedialog.h.

Referenced by FwUpgradeDialog::FwUpgradeDialog(), retranslateUi(), and setupUi().

12.88.3.4 QLabel* Ui_FwUpgradeDialog::devLabel

Definition at line 40 of file ui_fwupgradedialog.h.

Referenced by FwUpgradeDialog::FwUpgradeDialog(), retranslateUi(), and setupUi().

12.88.3.5 QGridLayout* Ui_FwUpgradeDialog::gridLayout

Definition at line 31 of file ui_fwupgradedialog.h.

Referenced by setupUi().

12.88.3.6 QGridLayout* Ui_FwUpgradeDialog::gridLayout_2

Definition at line 29 of file ui_fwupgradedialog.h.

Referenced by setupUi().

12.88.3.7 QSpacerItem* Ui_FwUpgradeDialog::horizontalSpacer

Definition at line 30 of file ui_fwupgradedialog.h.

Referenced by setupUi().

12.88.3.8 QSpacerItem* Ui_FwUpgradeDialog::horizontalSpacer_2

Definition at line 39 of file ui_fwupgradedialog.h.

Referenced by setupUi().

12.88.3.9 QSpacerItem* Ui_FwUpgradeDialog::horizontalSpacer_3

Definition at line 32 of file ui_fwupgradedialog.h.

Referenced by setupUi().

12.88.3.10 QSpacerItem* Ui_FwUpgradeDialog::horizontalSpacer_4

Definition at line 34 of file ui_fwupgradedialog.h.

Referenced by setupUi().

12.88.3.11 QLabel* Ui_FwUpgradeDialog::label_2

Definition at line 35 of file ui_fwupgradedialog.h.

Referenced by retranslateUi(), and setupUi().

12.88.3.12 QLabel* Ui_FwUpgradeDialog::label_4

Definition at line 33 of file ui_fwupgradedialog.h.

Referenced by retranslateUi(), and setupUi().

12.88.3.13 QLabel* Ui_FwUpgradeDialog::newLabel

Definition at line 37 of file ui_fwupgradedialog.h.

Referenced by FwUpgradeDialog::exec(), FwUpgradeDialog::FwUpgradeDialog(), retranslateUi(), and setupUi().

12.88.3.14 QProgressBar* Ui_FwUpgradeDialog::progressBar

Definition at line 41 of file ui_fwupgradedialog.h.

Referenced by FwUpgradeDialog::exec(), FwUpgradeDialog::fwUpdateFinished(), FwUpgradeDialog::fwUpdateProgress(), FwUpgradeDialog::on_actionButton_clicked(), and setupUi().

12.88.3.15 QLabel* Ui_FwUpgradeDialog::statusLabel

Definition at line 38 of file ui_fwupgradedialog.h.

Referenced by FwUpgradeDialog::exec(), FwUpgradeDialog::fwUpdateFinished(), FwUpgradeDialog::on_actionButton_clicked(), retranslateUi(), and setupUi().

The documentation for this class was generated from the following file:

- src/ckb/ui_fwupgradedialog.h

12.89 Ui_GradientDialog Class Reference

`#include <src/ckb/ui_gradientdialog.h>`

Inheritance diagram for Ui_GradientDialog:

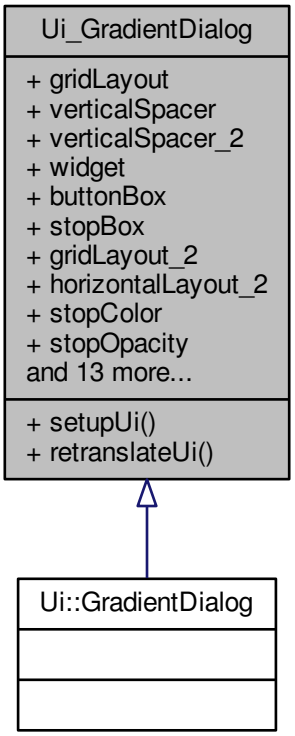

Collaboration diagram for Ui_GradientDialog:

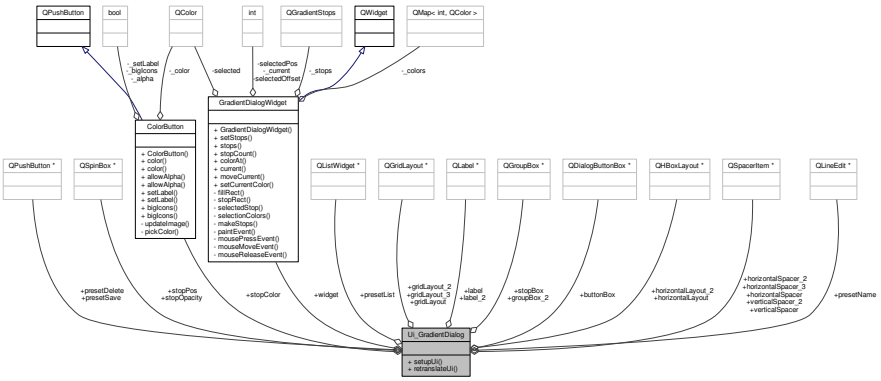

Public Member Functions

- void setupUi (QDialog *GradientDialog)
- void retranslateUi (QDialog *GradientDialog)

Data Fields

- QGridLayout * gridLayout
- QSpacerItem * verticalSpacer
- QSpacerItem * verticalSpacer_2
- GradientDialogWidget * widget
- QDialogButtonBox * buttonBox
- QGroupBox * stopBox
- QGridLayout * gridLayout_2
- QHBoxLayout * horizontalLayout_2
- ColorButton * stopColor
- QSpinBox * stopOpacity
- QSpacerItem * horizontalSpacer_2
- QLabel * label
- QHBoxLayout * horizontalLayout
- QSpinBox * stopPos
- QSpacerItem * horizontalSpacer
- QLabel * label_2
- QSpacerItem * horizontalSpacer_3
- QGroupBox * groupBox_2
- QGridLayout * gridLayout_3
- QListWidget * presetList
- QLineEdit * presetName
- QPushButton * presetSave
- QPushButton * presetDelete

12.89.1 Detailed Description

Definition at line 33 of file ui_gradientdialog.h.

12.89.2 Member Function Documentation

12.89.2.1 void Ui_GradientDialog::retranslateUi (QDialog * *GradientDialog*) [inline]

Definition at line 207 of file ui_gradientdialog.h.

References groupBox_2, label, label_2, presetDelete, presetName, presetSave, stopBox, stopColor, stopOpacity, and stopPos.

Referenced by setupUi().

```
208     {
209         GradientDialog->setWindowTitle(QApplication::translate("GradientDialog", "Pick Gradient", Q_NULLPTR
    ));
210         stopBox->setTitle(QApplication::translate("GradientDialog", "Point X of Y", Q_NULLPTR));
211         stopColor->setText(QApplication::translate("GradientDialog", "Pick Color...", Q_NULLPTR));
212         stopOpacity->setSuffix(QApplication::translate("GradientDialog", "%", Q_NULLPTR));
213         label->setText(QApplication::translate("GradientDialog", "Position:", Q_NULLPTR));
214         stopPos->setSuffix(QApplication::translate("GradientDialog", "%", Q_NULLPTR));
215         label_2->setText(QApplication::translate("GradientDialog", "Color:", Q_NULLPTR));
216         groupBox_2->setTitle(QApplication::translate("GradientDialog", "Presets", Q_NULLPTR));
217         presetName->setPlaceholderText(QApplication::translate("GradientDialog", "Name",
    Q_NULLPTR));
218         presetSave->setText(QApplication::translate("GradientDialog", "Save", Q_NULLPTR));
219         presetDelete->setText(QApplication::translate("GradientDialog", "Delete", Q_NULLPTR));
220     } // retranslateUi
```

Here is the caller graph for this function:



12.89.2.2 void Ui_GradientDialog::setupUi (QDialog * *GradientDialog*) [inline]

Definition at line 60 of file ui_gradientdialog.h.

References buttonBox, gridLayout, gridLayout_2, gridLayout_3, groupBox_2, horizontalLayout, horizontalLayout_2, horizontalSpacer, horizontalSpacer_2, horizontalSpacer_3, label, label_2, presetDelete, presetList, presetName, presetSave, retranslateUi(), stopBox, stopColor, stopOpacity, stopPos, verticalSpacer, verticalSpacer_2, and widget.

Referenced by GradientDialog::GradientDialog().

```
61     {
62         if (GradientDialog->objectName().isEmpty())
63             GradientDialog->setObjectName(QStringLiteral("GradientDialog"));
64         GradientDialog->resize(400, 440);
65         GradientDialog->setMinimumSize(QSize(400, 440));
66         GradientDialog->setMaximumSize(QSize(400, 440));
67         GradientDialog->setFocusPolicy(Qt::ClickFocus);
68         gridLayout = new QGridLayout(GradientDialog);
69         gridLayout->setObjectName(QStringLiteral("gridLayout"));
70         verticalSpacer = new QSpacerItem(0, 0, QSizePolicy::Minimum, QSizePolicy::Expanding);
71 
72         gridLayout->addItem(verticalSpacer, 1, 0, 1, 1);
73 
74         verticalSpacer_2 = new QSpacerItem(0, 15, QSizePolicy::Minimum, QSizePolicy::Fixed)
    ;
75 
76         gridLayout->addItem(verticalSpacer_2, 3, 0, 1, 1);
77 
78         widget = new GradientDialogWidget(GradientDialog);
79         widget->setObjectName(QStringLiteral("widget"));
80         QSizePolicy sizePolicy(QSizePolicy::Preferred, QSizePolicy::Fixed);
81         sizePolicy.setHorizontalStretch(0);
82         sizePolicy.setVerticalStretch(0);
83         sizePolicy.setHeightForWidth(widget->sizePolicy().hasHeightForWidth());
84         widget->setSizePolicy(sizePolicy);
85         widget->setMinimumSize(QSize(0, 74));
86         widget->setMaximumSize(QSize(16777215, 74));
87 
88         gridLayout->addWidget(widget, 2, 0, 1, 1);
89 
90         buttonBox = new QDialogButtonBox(GradientDialog);
91         buttonBox->setObjectName(QStringLiteral("buttonBox"));
92         buttonBox->setOrientation(Qt::Horizontal);
93         buttonBox->setStandardButtons(QDialogButtonBox::Cancel|QDialogButtonBox::Ok);
94 
95         gridLayout->addWidget(buttonBox, 5, 0, 1, 1);
96 
97         stopBox = new QGroupBox(GradientDialog);
98         stopBox->setObjectName(QStringLiteral("stopBox"));
99         sizePolicy.setHeightForWidth(stopBox->sizePolicy().hasHeightForWidth());
100         stopBox->setSizePolicy(sizePolicy);
101         gridLayout_2 = new QGridLayout(stopBox);
102         gridLayout_2->setObjectName(QStringLiteral("gridLayout_2"));
103         horizontalLayout_2 = new QHBoxLayout();
104         horizontalLayout_2->setObjectName(QStringLiteral("horizontalLayout_2"));
105         stopColor = new ColorButton(stopBox);
106         stopColor->setObjectName(QStringLiteral("stopColor"));
107 
108         horizontalLayout_2->addWidget(stopColor);
109 
110         stopOpacity = new QSpinBox(stopBox);
111         stopOpacity->setObjectName(QStringLiteral("stopOpacity"));
112         stopOpacity->setMaximum(100);
113 
```

```
114         horizontalLayout_2->addWidget(stopOpacity);
115 
116         horizontalSpacer_2 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
117 
118         horizontalLayout_2->addItem(horizontalSpacer_2);
119 
120 
121         gridLayout_2->addLayout(horizontalLayout_2, 1, 2, 1, 1);
122 
123         label = new QLabel(stopBox);
124         label->setObjectName(QStringLiteral("label"));
125 
126         gridLayout_2->addWidget(label, 0, 0, 1, 1);
127 
128         horizontalLayout = new QHBoxLayout();
129         horizontalLayout->setObjectName(QStringLiteral("horizontalLayout"));
130         stopPos = new QSpinBox(stopBox);
131         stopPos->setObjectName(QStringLiteral("stopPos"));
132         stopPos->setMaximum(100);
133 
134         horizontalLayout->addWidget(stopPos);
135 
136         horizontalSpacer = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
137 
138         horizontalLayout->addItem(horizontalSpacer);
139 
140 
141         gridLayout_2->addLayout(horizontalLayout, 0, 2, 1, 1);
142 
143         label_2 = new QLabel(stopBox);
144         label_2->setObjectName(QStringLiteral("label_2"));
145 
146         gridLayout_2->addWidget(label_2, 1, 0, 1, 1);
147 
148         horizontalSpacer_3 = new QSpacerItem(10, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
149 
150         gridLayout_2->addItem(horizontalSpacer_3, 0, 1, 1, 1);
151 
152 
153         gridLayout->addWidget(stopBox, 4, 0, 1, 1);
154 
155         groupBox_2 = new QGroupBox(GradientDialog);
156         groupBox_2->setObjectName(QStringLiteral("groupBox_2"));
157         sizePolicy.setHeightForWidth(groupBox_2->sizePolicy().hasHeightForWidth());
158         groupBox_2->setSizePolicy(sizePolicy);
159         gridLayout_3 = new QGridLayout(groupBox_2);
160         gridLayout_3->setObjectName(QStringLiteral("gridLayout_3"));
161         presetList = new QListWidget(groupBox_2);
162         presetList->setObjectName(QStringLiteral("presetList"));
163         QSizePolicy sizePolicy1(QSizePolicy::Expanding, QSizePolicy::Preferred);
164         sizePolicy1.setHorizontalStretch(0);
165         sizePolicy1.setVerticalStretch(0);
166         sizePolicy1.setHeightForWidth(presetList->sizePolicy().hasHeightForWidth());
167         presetList->setSizePolicy(sizePolicy1);
168         presetList->setFrameShadow(QFrame::Plain);
169         presetList->setHorizontalScrollBarPolicy(Qt::ScrollBarAlwaysOn);
170         presetList->setIconSize(QSize(64, 64));
171         presetList->setHorizontalScrollMode(QAbstractItemView::ScrollPerPixel);
172         presetList->setFlow(QListView::TopToBottom);
173         presetList->setViewMode(QListView::IconMode);
174         presetList->setUniformItemSizes(true);
175 
176         gridLayout_3->addWidget(presetList, 0, 0, 3, 1);
177 
178         presetName = new QLineEdit(groupBox_2);
179         presetName->setObjectName(QStringLiteral("presetName"));
180         presetName->setMaxLength(30);
181 
182         gridLayout_3->addWidget(presetName, 0, 1, 1, 1);
183 
184         presetSave = new QPushButton(groupBox_2);
185         presetSave->setObjectName(QStringLiteral("presetSave"));
186         presetSave->setAutoDefault(false);
187 
188         gridLayout_3->addWidget(presetSave, 1, 1, 1, 1);
189 
190         presetDelete = new QPushButton(groupBox_2);
191         presetDelete->setObjectName(QStringLiteral("presetDelete"));
192         presetDelete->setAutoDefault(false);
193 
194         gridLayout_3->addWidget(presetDelete, 2, 1, 1, 1);
195 
196 
197         gridLayout->addWidget(groupBox_2, 0, 0, 1, 1);
```

```
198
199
200         retranslateUi(GradientDialog);
201         QObject::connect(buttonBox, SIGNAL(accepted()), GradientDialog, SLOT(accept()));
202         QObject::connect(buttonBox, SIGNAL(rejected()), GradientDialog, SLOT(reject()));
203
204         QMetaObject::connectSlotsByName(GradientDialog);
205     } // setupUi
```

Here is the call graph for this function:

Here is the caller graph for this function:



12.89.3 Field Documentation

12.89.3.1 QDialogButtonBox* Ui_GradientDialog::buttonBox

Definition at line 40 of file ui_gradientdialog.h.

Referenced by setupUi().

12.89.3.2 QGridLayout* Ui_GradientDialog::gridLayout

Definition at line 36 of file ui_gradientdialog.h.

Referenced by setupUi().

12.89.3.3 QGridLayout* Ui_GradientDialog::gridLayout_2

Definition at line 42 of file ui_gradientdialog.h.

Referenced by setupUi().

12.89.3.4 QGridLayout* Ui_GradientDialog::gridLayout_3

Definition at line 54 of file ui_gradientdialog.h.

Referenced by setupUi().

12.89.3.5 QGroupBox* Ui_GradientDialog::groupBox_2

Definition at line 53 of file ui_gradientdialog.h.

Referenced by retranslateUi(), and setupUi().

12.89.3.6 QHBoxLayout* Ui_GradientDialog::horizontalLayout

Definition at line 48 of file ui_gradientdialog.h.

Referenced by setupUi().

12.89.3.7 QHBoxLayout* Ui_GradientDialog::horizontalLayout_2

Definition at line 43 of file ui_gradientdialog.h.

Referenced by setupUi().

12.89.3.8 QSpacerItem* Ui_GradientDialog::horizontalSpacer

Definition at line 50 of file ui_gradientdialog.h.

Referenced by setupUi().

12.89.3.9 QSpacerItem* Ui_GradientDialog::horizontalSpacer_2

Definition at line 46 of file ui_gradientdialog.h.

Referenced by setupUi().

12.89.3.10 QSpacerItem* Ui_GradientDialog::horizontalSpacer_3

Definition at line 52 of file ui_gradientdialog.h.

Referenced by setupUi().

12.89.3.11 QLabel* Ui_GradientDialog::label

Definition at line 47 of file ui_gradientdialog.h.

Referenced by retranslateUi(), and setupUi().

12.89.3.12 QLabel* Ui_GradientDialog::label_2

Definition at line 51 of file ui_gradientdialog.h.

Referenced by retranslateUi(), and setupUi().

12.89.3.13 QPushButton* Ui_GradientDialog::presetDelete

Definition at line 58 of file ui_gradientdialog.h.

Referenced by GradientDialog::getGradient(), GradientDialog::on_presetDelete_clicked(), GradientDialog::on_presetSave_clicked(), retranslateUi(), GradientDialog::setPreset(), and setupUi().

12.89.3.14 QListWidget* Ui_GradientDialog::presetList

Definition at line 55 of file ui_gradientdialog.h.

Referenced by GradientDialog::setPreset(), setupUi(), and GradientDialog::updatePresets().

12.89.3.15 QLineEdit* Ui_GradientDialog::presetName

Definition at line 56 of file ui_gradientdialog.h.

Referenced by GradientDialog::on_presetSave_clicked(), retranslateUi(), GradientDialog::setPreset(), and setupUi().

12.89.3.16 QPushButton* Ui_GradientDialog::presetSave

Definition at line 57 of file ui_gradientdialog.h.

Referenced by GradientDialog::getGradient(), GradientDialog::on_presetDelete_clicked(), GradientDialog::on_presetSave_clicked(), retranslateUi(), GradientDialog::setPreset(), and setupUi().

12.89.3.17 QGroupBox* Ui_GradientDialog::stopBox

Definition at line 41 of file ui_gradientdialog.h.

Referenced by GradientDialog::currentChanged(), retranslateUi(), and setupUi().

12.89.3.18 ColorButton* Ui_GradientDialog::stopColor

Definition at line 44 of file ui_gradientdialog.h.

Referenced by GradientDialog::currentChanged(), GradientDialog::GradientDialog(), GradientDialog::on_stopOpacity_valueChanged(), retranslateUi(), and setupUi().

12.89.3.19 QSpinBox* Ui_GradientDialog::stopOpacity

Definition at line 45 of file ui_gradientdialog.h.

Referenced by GradientDialog::colorChanged(), GradientDialog::currentChanged(), retranslateUi(), and setupUi().

12.89.3.20 QSpinBox* Ui_GradientDialog::stopPos

Definition at line 49 of file ui_gradientdialog.h.

Referenced by GradientDialog::currentChanged(), GradientDialog::on_stopPos_valueChanged(), retranslateUi(), and setupUi().

12.89.3.21 QSpacerItem* Ui_GradientDialog::verticalSpacer

Definition at line 37 of file ui_gradientdialog.h.

Referenced by setupUi().

12.89.3.22 QSpacerItem* Ui_GradientDialog::verticalSpacer_2

Definition at line 38 of file ui_gradientdialog.h.

Referenced by setupUi().

12.89.3.23 GradientDialogWidget* Ui_GradientDialog::widget

Definition at line 39 of file ui_gradientdialog.h.

Referenced by GradientDialog::colorChanged(), GradientDialog::currentChanged(), GradientDialog::getGradient(), GradientDialog::GradientDialog(), GradientDialog::on_presetSave_clicked(), GradientDialog::on_stopPos_valueChanged(), GradientDialog::setPreset(), and setupUi().

The documentation for this class was generated from the following file:

- src/ckb/ui_gradientdialog.h

12.90 Ui_KbAnimWidget Class Reference

`#include <src/ckb/ui_kbanimwidget.h>`

Inheritance diagram for Ui_KbAnimWidget:

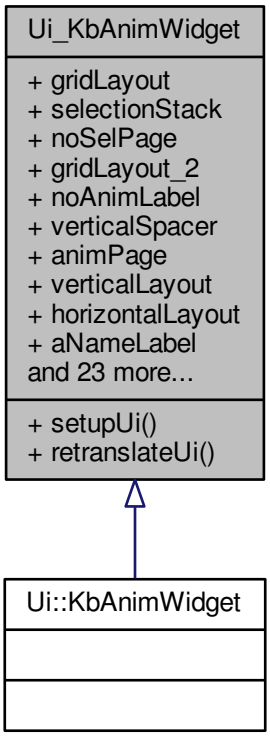

Collaboration diagram for Ui_KbAnimWidget:

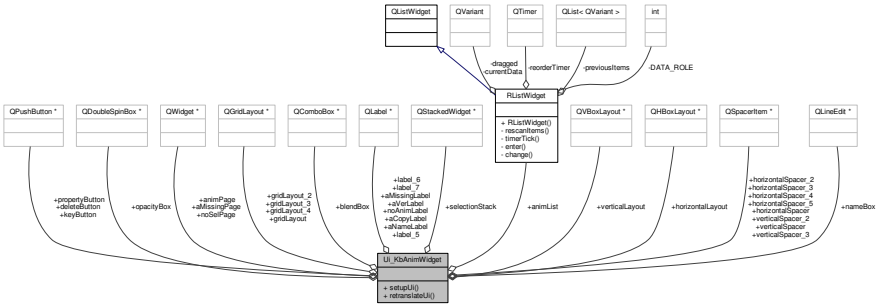

Public Member Functions

- void setupUi (QWidget *KbAnimWidget)
- void retranslateUi (QWidget *KbAnimWidget)

Data Fields

- QGridLayout * gridLayout
- QStackedWidget * selectionStack
- QWidget * noSelPage
- QGridLayout * gridLayout_2
- QLabel * noAnimLabel
- QSpacerItem * verticalSpacer
- QWidget * animPage
- QVBoxLayout * verticalLayout
- QHBoxLayout * horizontalLayout
- QLabel * aNameLabel
- QLabel * aVerLabel
- QSpacerItem * horizontalSpacer
- QLabel * aCopyLabel
- QSpacerItem * verticalSpacer_3
- QGridLayout * gridLayout_3
- QLineEdit * nameBox
- QDoubleSpinBox * opacityBox
- QComboBox * blendBox
- QLabel * label_6
- QSpacerItem * horizontalSpacer_4
- QSpacerItem * horizontalSpacer_2
- QLabel * label_5
- QSpacerItem * horizontalSpacer_3
- QLabel * label_7
- QPushButton * keyButton
- QPushButton * deleteButton
- QPushButton * propertyButton
- QSpacerItem * horizontalSpacer_5
- QSpacerItem * verticalSpacer_2
- QWidget * aMissingPage
- QGridLayout * gridLayout_4
- QLabel * aMissingLabel
- RListWidget * animList

12.90.1 Detailed Description

Definition at line 32 of file ui_kbanimwidget.h.

12.90.2 Member Function Documentation

12.90.2.1 void Ui_KbAnimWidget::retranslateUi (QWidget * *KbAnimWidget*) [inline]

Definition at line 241 of file ui_kbanimwidget.h.

References aCopyLabel, aMissingLabel, aNameLabel, aVerLabel, blendBox, deleteButton, keyButton, label_5, label_6, label_7, noAnimLabel, opacityBox, and propertyButton.

Referenced by setupUi().

```
242     {
243         KbAnimWidget->setWindowTitle(QApplication::translate("KbAnimWidget", "Form", Q_NULLPTR));
244         noAnimLabel->setText(QApplication::translate("KbAnimWidget", "No animations in this mode
    ", Q_NULLPTR));
245         aNameLabel->setText(QApplication::translate("KbAnimWidget", "Animation name", Q_NULLPTR))
    ;
246         aVerLabel->setText(QApplication::translate("KbAnimWidget", "v0.0", Q_NULLPTR));
247         aCopyLabel->setText(QApplication::translate("KbAnimWidget", "Copyright \302\251",
    Q_NULLPTR));
248         opacityBox->setSuffix(QApplication::translate("KbAnimWidget", "%", Q_NULLPTR));
249         blendBox->clear();
250         blendBox->insertItems(0, QStringList()
251          << QApplication::translate("KbAnimWidget", "Normal", Q_NULLPTR)
252          << QApplication::translate("KbAnimWidget", "Add", Q_NULLPTR)
253          << QApplication::translate("KbAnimWidget", "Subtract", Q_NULLPTR)
254          << QApplication::translate("KbAnimWidget", "Multiply", Q_NULLPTR)
255          << QApplication::translate("KbAnimWidget", "Divide", Q_NULLPTR)
256         );
257         label_6->setText(QApplication::translate("KbAnimWidget", "Blend mode:", Q_NULLPTR));
258         label_5->setText(QApplication::translate("KbAnimWidget", "Opacity:", Q_NULLPTR));
259         label_7->setText(QApplication::translate("KbAnimWidget", "Name:", Q_NULLPTR));
260         keyButton->setText(QApplication::translate("KbAnimWidget", "Set keys", Q_NULLPTR));
261         deleteButton->setText(QApplication::translate("KbAnimWidget", "Delete animation",
    Q_NULLPTR));
262         propertyButton->setText(QApplication::translate("KbAnimWidget", "Edit properties",
    Q_NULLPTR));
263         aMissingLabel->setText(QApplication::translate("KbAnimWidget", "Mising animation",
    Q_NULLPTR));
264     } // retranslateUi
```

Here is the caller graph for this function:



12.90.2.2 void Ui_KbAnimWidget::setupUi (QWidget * *KbAnimWidget*) [inline]

Definition at line 69 of file ui_kbanimwidget.h.

References aCopyLabel, aMissingLabel, aMissingPage, aNameLabel, animList, animPage, aVerLabel, blendBox, deleteButton, gridLayout, gridLayout_2, gridLayout_3, gridLayout_4, horizontalLayout, horizontalSpacer, horizontalSpacer_2, horizontalSpacer_3, horizontalSpacer_4, horizontalSpacer_5, keyButton, label_5, label_6, label_7, nameBox, noAnimLabel, noSelPage, opacityBox, propertyButton, retranslateUi(), selectionStack, verticalLayout, verticalSpacer, verticalSpacer_2, and verticalSpacer_3.

Referenced by KbAnimWidget::KbAnimWidget().

```
70     {
```

```
71          if (KbAnimWidget->objectName().isEmpty())
72              KbAnimWidget->setObjectName(QStringLiteral("KbAnimWidget"));
73          KbAnimWidget->resize(613, 300);
74          gridLayout = new QGridLayout(KbAnimWidget);
75          gridLayout->setObjectName(QStringLiteral("gridLayout"));
76          gridLayout->setContentsMargins(0, 0, 0, 0);
77          selectionStack = new QStackedWidget(KbAnimWidget);
78          selectionStack->setObjectName(QStringLiteral("selectionStack"));
79          noSelPage = new QWidget();
80          noSelPage->setObjectName(QStringLiteral("noSelPage"));
81          gridLayout_2 = new QGridLayout(noSelPage);
82          gridLayout_2->setObjectName(QStringLiteral("gridLayout_2"));
83          gridLayout_2->setContentsMargins(6, 6, 6, 6);
84          noAnimLabel = new QLabel(noSelPage);
85          noAnimLabel->setObjectName(QStringLiteral("noAnimLabel"));
86
87          gridLayout_2->addWidget(noAnimLabel, 0, 0, 1, 1);
88
89          verticalSpacer = new QSpacerItem(20, 40, QSizePolicy::Minimum, QSizePolicy::Expanding
    );
90
91          gridLayout_2->addItem(verticalSpacer, 1, 0, 1, 1);
92
93          selectionStack->addWidget(noSelPage);
94          animPage = new QWidget();
95          animPage->setObjectName(QStringLiteral("animPage"));
96          verticalLayout = new QVBoxLayout(animPage);
97          verticalLayout->setObjectName(QStringLiteral("verticalLayout"));
98          verticalLayout->setContentsMargins(6, 0, 0, 0);
99          horizontalLayout = new QHBoxLayout();
100         horizontalLayout->setObjectName(QStringLiteral("horizontalLayout"));
101         aNameLabel = new QLabel(animPage);
102         aNameLabel->setObjectName(QStringLiteral("aNameLabel"));
103         QFont font;
104         font.setBold(true);
105         font.setWeight(75);
106         aNameLabel->setFont(font);
107
108         horizontalLayout->addWidget(aNameLabel);
109
110         aVerLabel = new QLabel(animPage);
111         aVerLabel->setObjectName(QStringLiteral("aVerLabel"));
112
113         horizontalLayout->addWidget(aVerLabel);
114
115         horizontalSpacer = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
116
117         horizontalLayout->addItem(horizontalSpacer);
118
119         aCopyLabel = new QLabel(animPage);
120         aCopyLabel->setObjectName(QStringLiteral("aCopyLabel"));
121
122         horizontalLayout->addWidget(aCopyLabel);
123
124
125         verticalLayout->addLayout(horizontalLayout);
126
127         verticalSpacer_3 = new QSpacerItem(20, 40, QSizePolicy::Minimum,
    QSizePolicy::Expanding);
128
129         verticalLayout->addItem(verticalSpacer_3);
130
131         gridLayout_3 = new QGridLayout();
132         gridLayout_3->setObjectName(QStringLiteral("gridLayout_3"));
133         nameBox = new QLineEdit(animPage);
134         nameBox->setObjectName(QStringLiteral("nameBox"));
135         QSizePolicy sizePolicy(QSizePolicy::Fixed, QSizePolicy::Fixed);
136         sizePolicy.setHorizontalStretch(0);
137         sizePolicy.setVerticalStretch(0);
138         sizePolicy.setHeightForWidth(nameBox->sizePolicy().hasHeightForWidth());
139         nameBox->setSizePolicy(sizePolicy);
140         nameBox->setMinimumSize(QSize(150, 0));
141         nameBox->setMaximumSize(QSize(150, 16777215));
142
143         gridLayout_3->addWidget(nameBox, 0, 3, 1, 2);
144
145         opacityBox = new QDoubleSpinBox(animPage);
146         opacityBox->setObjectName(QStringLiteral("opacityBox"));
147         opacityBox->setDecimals(1);
148         opacityBox->setValue(100);
149
150         gridLayout_3->addWidget(opacityBox, 1, 3, 1, 1);
151
152         blendBox = new QComboBox(animPage);
153         blendBox->setObjectName(QStringLiteral("blendBox"));
154
```

```
155         gridLayout_3->addWidget(blendBox, 2, 3, 1, 2);
156 
157         label_6 = new QLabel(animPage);
158         label_6->setObjectName(QStringLiteral("label_6"));
159 
160         gridLayout_3->addWidget(label_6, 2, 1, 1, 1);
161 
162         horizontalSpacer_4 = new QSpacerItem(0, 0, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
163 
164         gridLayout_3->addItem(horizontalSpacer_4, 0, 0, 1, 1);
165 
166         horizontalSpacer_2 = new QSpacerItem(30, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
167 
168         gridLayout_3->addItem(horizontalSpacer_2, 0, 2, 1, 1);
169 
170         label_5 = new QLabel(animPage);
171         label_5->setObjectName(QStringLiteral("label_5"));
172 
173         gridLayout_3->addWidget(label_5, 1, 1, 1, 1);
174 
175         horizontalSpacer_3 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
176 
177         gridLayout_3->addItem(horizontalSpacer_3, 0, 5, 1, 1);
178 
179         label_7 = new QLabel(animPage);
180         label_7->setObjectName(QStringLiteral("label_7"));
181 
182         gridLayout_3->addWidget(label_7, 0, 1, 1, 1);
183 
184         keyButton = new QPushButton(animPage);
185         keyButton->setObjectName(QStringLiteral("keyButton"));
186 
187         gridLayout_3->addWidget(keyButton, 1, 6, 1, 1);
188 
189         deleteButton = new QPushButton(animPage);
190         deleteButton->setObjectName(QStringLiteral("deleteButton"));
191 
192         gridLayout_3->addWidget(deleteButton, 2, 6, 1, 1);
193 
194         propertyButton = new QPushButton(animPage);
195         propertyButton->setObjectName(QStringLiteral("propertyButton"));
196 
197         gridLayout_3->addWidget(propertyButton, 0, 6, 1, 1);
198 
199         horizontalSpacer_5 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
200 
201         gridLayout_3->addItem(horizontalSpacer_5, 1, 4, 1, 1);
202 
203 
204         verticalLayout->addLayout(gridLayout_3);
205 
206         verticalSpacer_2 = new QSpacerItem(20, 40, QSizePolicy::Minimum,
    QSizePolicy::Expanding);
207 
208         verticalLayout->addItem(verticalSpacer_2);
209 
210         selectionStack->addWidget(animPage);
211         aMissingPage = new QWidget();
212         aMissingPage->setObjectName(QStringLiteral("aMissingPage"));
213         gridLayout_4 = new QGridLayout(aMissingPage);
214         gridLayout_4->setObjectName(QStringLiteral("gridLayout_4"));
215         aMissingLabel = new QLabel(aMissingPage);
216         aMissingLabel->setObjectName(QStringLiteral("aMissingLabel"));
217         aMissingLabel->setFont(font);
218 
219         gridLayout_4->addWidget(aMissingLabel, 0, 0, 1, 1);
220 
221         selectionStack->addWidget(aMissingPage);
222 
223         gridLayout->addWidget(selectionStack, 0, 2, 2, 1);
224 
225         animList = new RListWidget(KbAnimWidget);
226         animList->setObjectName(QStringLiteral("animList"));
227         animList->setMaximumSize(QSize(130, 16777215));
228         animList->setContextMenuPolicy(Qt::CustomContextMenu);
229         animList->setFrameShadow(QFrame::Plain);
230         animList->setDragDropMode(QAbstractItemView::InternalMove);
231         animList->setMovement(QListView::Snap);
232 
233         gridLayout->addWidget(animList, 0, 0, 2, 1);
234 
235 
236         retranslateUi(KbAnimWidget);
```

```
237
238         QMetaObject::connectSlotsByName(KbAnimWidget);
239     } // setupUi
```

Here is the call graph for this function:



Here is the caller graph for this function:

12.90.3 Field Documentation

12.90.3.1 QLabel* Ui_KbAnimWidget::aCopyLabel

Definition at line 47 of file ui_kbanimwidget.h.

Referenced by retranslateUi(), KbAnimWidget::setCurrent(), and setupUi().

12.90.3.2 QLabel* Ui_KbAnimWidget::aMissingLabel

Definition at line 66 of file ui_kbanimwidget.h.

Referenced by retranslateUi(), KbAnimWidget::setCurrent(), and setupUi().

12.90.3.3 QWidget* Ui_KbAnimWidget::aMissingPage

Definition at line 64 of file ui_kbanimwidget.h.

Referenced by setupUi().

12.90.3.4 QLabel* Ui_KbAnimWidget::aNameLabel

Definition at line 44 of file ui_kbanimwidget.h.

Referenced by retranslateUi(), KbAnimWidget::setCurrent(), and setupUi().

12.90.3.5 RListWidget* Ui_KbAnimWidget::animList

Definition at line 67 of file ui_kbanimwidget.h.

Referenced by KbAnimWidget::addAnim(), KbAnimWidget::clearSelection(), KbAnimWidget::duplicateAnim(), KbAnimWidget::KbAnimWidget(), KbAnimWidget::on_animList_customContextMenuRequested(), KbAnimWidget::on_deleteButton_clicked(), KbAnimWidget::on_nameBox_textEdited(), KbAnimWidget::refreshList(), KbAnimWidget::reorderAnims(), and setupUi().

12.90.3.6 QWidget* Ui_KbAnimWidget::animPage

Definition at line 41 of file ui_kbanimwidget.h.

Referenced by setupUi().

12.90.3.7 QLabel* Ui_KbAnimWidget::aVerLabel

Definition at line 45 of file ui_kbanimwidget.h.

Referenced by retranslateUi(), KbAnimWidget::setCurrent(), and setupUi().

12.90.3.8 QComboBox* Ui_KbAnimWidget::blendBox

Definition at line 52 of file ui_kbanimwidget.h.

Referenced by retranslateUi(), KbAnimWidget::setCurrent(), and setupUi().

12.90.3.9 QPushButton* Ui_KbAnimWidget::deleteButton

Definition at line 60 of file ui_kbanimwidget.h.

Referenced by retranslateUi(), and setupUi().

12.90.3.10 QGridLayout* Ui_KbAnimWidget::gridLayout

Definition at line 35 of file ui_kbanimwidget.h.

Referenced by setupUi().

12.90.3.11 QGridLayout* Ui_KbAnimWidget::gridLayout_2

Definition at line 38 of file ui_kbanimwidget.h.

Referenced by setupUi().

12.90.3.12 QGridLayout* Ui_KbAnimWidget::gridLayout_3

Definition at line 49 of file ui_kbanimwidget.h.

Referenced by setupUi().

12.90.3.13 QGridLayout* Ui_KbAnimWidget::gridLayout_4

Definition at line 65 of file ui_kbanimwidget.h.

Referenced by setupUi().

12.90.3.14 QHBoxLayout* Ui_KbAnimWidget::horizontalLayout

Definition at line 43 of file ui_kbanimwidget.h.

Referenced by setupUi().

12.90.3.15 QSpacerItem* Ui_KbAnimWidget::horizontalSpacer

Definition at line 46 of file ui_kbanimwidget.h.

Referenced by setupUi().

12.90.3.16 QSpacerItem* Ui_KbAnimWidget::horizontalSpacer_2

Definition at line 55 of file ui_kbanimwidget.h.

Referenced by setupUi().

12.90.3.17 QSpacerItem* Ui_KbAnimWidget::horizontalSpacer_3

Definition at line 57 of file ui_kbanimwidget.h.

Referenced by setupUi().

12.90.3.18 QSpacerItem* Ui_KbAnimWidget::horizontalSpacer_4

Definition at line 54 of file ui_kbanimwidget.h.

Referenced by setupUi().

12.90.3.19 QSpacerItem* Ui_KbAnimWidget::horizontalSpacer_5

Definition at line 62 of file ui_kbanimwidget.h.

Referenced by setupUi().

12.90.3.20 QPushButton* Ui_KbAnimWidget::keyButton

Definition at line 59 of file ui_kbanimwidget.h.

Referenced by retranslateUi(), KbAnimWidget::setSelectedKeys(), and setupUi().

12.90.3.21 QLabel* Ui_KbAnimWidget::label_5

Definition at line 56 of file ui_kbanimwidget.h.

Referenced by retranslateUi(), and setupUi().

12.90.3.22 QLabel* Ui_KbAnimWidget::label_6

Definition at line 53 of file ui_kbanimwidget.h.

Referenced by retranslateUi(), and setupUi().

12.90.3.23 QLabel* Ui_KbAnimWidget::label_7

Definition at line 58 of file ui_kbanimwidget.h.

Referenced by retranslateUi(), and setupUi().

12.90.3.24 QLineEdit* Ui_KbAnimWidget::nameBox

Definition at line 50 of file ui_kbanimwidget.h.

Referenced by KbAnimWidget::on_animList_itemChanged(), KbAnimWidget::on_propertyButton_clicked(), KbAnimWidget::setCurrent(), and setupUi().

12.90.3.25 QLabel* Ui_KbAnimWidget::noAnimLabel

Definition at line 39 of file ui_kbanimwidget.h.

Referenced by KbAnimWidget::addAnim(), KbAnimWidget::duplicateAnim(), KbAnimWidget::on_deleteButton_clicked(), KbAnimWidget::refreshList(), retranslateUi(), and setupUi().

12.90.3.26 QWidget* Ui_KbAnimWidget::noSelPage

Definition at line 37 of file ui_kbanimwidget.h.

Referenced by setupUi().

12.90.3.27 QDoubleSpinBox* Ui_KbAnimWidget::opacityBox

Definition at line 51 of file ui_kbanimwidget.h.

Referenced by retranslateUi(), KbAnimWidget::setCurrent(), and setupUi().

12.90.3.28 QPushButton* Ui_KbAnimWidget::propertyButton

Definition at line 61 of file ui_kbanimwidget.h.

Referenced by retranslateUi(), and setupUi().

12.90.3.29 QStackedWidget* Ui_KbAnimWidget::selectionStack

Definition at line 36 of file ui_kbanimwidget.h.

Referenced by KbAnimWidget::setCurrent(), and setupUi().

12.90.3.30 QVBoxLayout* Ui_KbAnimWidget::verticalLayout

Definition at line 42 of file ui_kbanimwidget.h.

Referenced by setupUi().

12.90.3.31 QSpacerItem* Ui_KbAnimWidget::verticalSpacer

Definition at line 40 of file ui_kbanimwidget.h.

Referenced by setupUi().

12.90.3.32 QSpacerItem* Ui_KbAnimWidget::verticalSpacer_2

Definition at line 63 of file ui_kbanimwidget.h.

Referenced by setupUi().

12.90.3.33 QSpacerItem* Ui_KbAnimWidget::verticalSpacer_3

Definition at line 48 of file ui_kbanimwidget.h.

Referenced by setupUi().

The documentation for this class was generated from the following file:

- src/ckb/ui_kbanimwidget.h

12.91 Ui_KbBindWidget Class Reference

`#include <src/ckb/ui_kbbindwidget.h>`

Inheritance diagram for Ui_KbBindWidget:

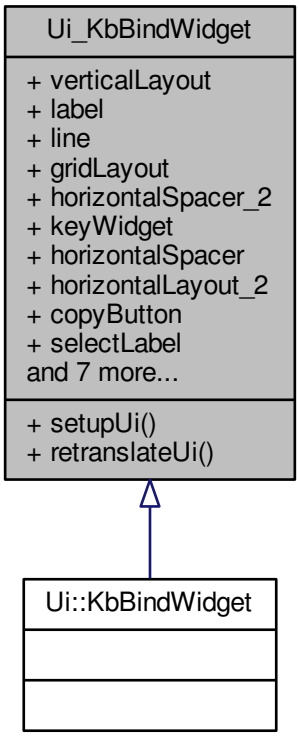

Collaboration diagram for Ui_KbBindWidget:

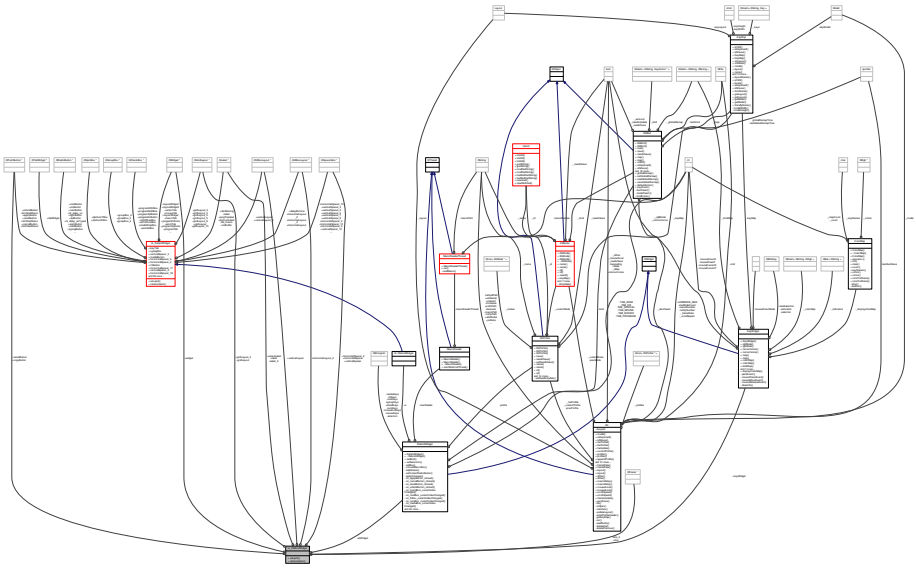

Public Member Functions

- void setupUi (QWidget *KbBindWidget)
- void retranslateUi (QWidget *KbBindWidget)

Data Fields

- QVBoxLayout * verticalLayout
- QLabel * label
- QFrame * line
- QGridLayout * gridLayout
- QSpacerItem * horizontalSpacer_2
- KeyWidget * keyWidget
- QSpacerItem * horizontalSpacer
- QHBoxLayout * horizontalLayout_2
- QPushButton * copyButton
- QLabel * selectLabel
- QPushButton * resetButton
- QSpacerItem * verticalSpacer
- QLabel * label_2
- QFrame * line_2
- QWidget * widget
- QGridLayout * gridLayout_2
- RebindWidget * rbWidget

12.91.1 Detailed Description

Definition at line 30 of file ui_kbbindwidget.h.

12.91.2 Member Function Documentation

12.91.2.1 void Ui_KbBindWidget::retranslateUi (QWidget * *KbBindWidget*) [inline]

Definition at line 193 of file ui_kbbindwidget.h.

References copyButton, label, label_2, resetButton, and selectLabel.

Referenced by setupUi().

```
194     {
195         KbBindWidget->setWindowTitle(QApplication::translate("KbBindWidget", "Form", Q_NULLPTR));
196         label->setText(QApplication::translate("KbBindWidget", "Keys", Q_NULLPTR));
197         copyButton->setText(QApplication::translate("KbBindWidget", "Copy to mode...", Q_NULLPTR)
    );
198         selectLabel->setText(QApplication::translate("KbBindWidget", "Click to select keys",
    Q_NULLPTR));
199         resetButton->setText(QApplication::translate("KbBindWidget", "Reset", Q_NULLPTR));
200         label_2->setText(QApplication::translate("KbBindWidget", "Binding", Q_NULLPTR));
201     } // retranslateUi
```

Here is the caller graph for this function:



12.91.2.2 void Ui_KbBindWidget::setupUi (QWidget * *KbBindWidget*) [inline]

Definition at line 51 of file ui_kbbindwidget.h.

References copyButton, gridLayout, gridLayout_2, horizontalLayout_2, horizontalSpacer, horizontalSpacer_2, keyWidget, label, label_2, line, line_2, rbWidget, resetButton, retranslateUi(), selectLabel, verticalLayout, verticalSpacer, and widget.

Referenced by KbBindWidget::KbBindWidget().

```
52     {
53         if (KbBindWidget->objectName().isEmpty())
54             KbBindWidget->setObjectName(QStringLiteral("KbBindWidget"));
55         KbBindWidget->resize(581, 473);
56         verticalLayout = new QVBoxLayout(KbBindWidget);
57         verticalLayout->setObjectName(QStringLiteral("verticalLayout"));
58         verticalLayout->setContentsMargins(0, 0, 0, -1);
59         label = new QLabel(KbBindWidget);
60         label->setObjectName(QStringLiteral("label"));
61         QFont font;
62         font.setBold(true);
63         font.setWeight(75);
64         label->setFont(font);
65
66         verticalLayout->addWidget(label);
67
68         line = new QFrame(KbBindWidget);
69         line->setObjectName(QStringLiteral("line"));
70         line->setFrameShape(QFrame::HLine);
71         line->setFrameShadow(QFrame::Sunken);
72
73         verticalLayout->addWidget(line);
74
75         gridLayout = new QGridLayout();
76         gridLayout->setObjectName(QStringLiteral("gridLayout"));
77         horizontalSpacer_2 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
78
79         gridLayout->addItem(horizontalSpacer_2, 0, 4, 1, 1);
80
81         keyWidget = new KeyWidget(KbBindWidget);
82         keyWidget->setObjectName(QStringLiteral("keyWidget"));
```

```
83          QSizePolicy sizePolicy(QSizePolicy::Preferred, QSizePolicy::Preferred);
84          sizePolicy.setHorizontalStretch(0);
85          sizePolicy.setVerticalStretch(0);
86          sizePolicy.setHeightForWidth(keyWidget->sizePolicy().hasHeightForWidth());
87          keyWidget->setSizePolicy(sizePolicy);
88
89          gridLayout->addWidget(keyWidget, 0, 1, 1, 3);
90
91          horizontalSpacer = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
92
93          gridLayout->addItem(horizontalSpacer, 0, 0, 1, 1);
94
95          horizontalLayout_2 = new QHBoxLayout();
96          horizontalLayout_2->setSpacing(0);
97          horizontalLayout_2->setObjectName(QStringLiteral("horizontalLayout_2"));
98          copyButton = new QPushButton(KbBindWidget);
99          copyButton->setObjectName(QStringLiteral("copyButton"));
100          QSizePolicy sizePolicy1(QSizePolicy::Fixed, QSizePolicy::Fixed);
101          sizePolicy1.setHorizontalStretch(0);
102          sizePolicy1.setVerticalStretch(0);
103          sizePolicy1.setHeightForWidth(copyButton->sizePolicy().hasHeightForWidth());
104          copyButton->setSizePolicy(sizePolicy1);
105          copyButton->setMinimumSize(QSize(140, 0));
106          copyButton->setMaximumSize(QSize(140, 16777215));
107
108          horizontalLayout_2->addWidget(copyButton);
109
110          selectLabel = new QLabel(KbBindWidget);
111          selectLabel->setObjectName(QStringLiteral("selectLabel"));
112          QSizePolicy sizePolicy2(QSizePolicy::Expanding, QSizePolicy::Preferred);
113          sizePolicy2.setHorizontalStretch(0);
114          sizePolicy2.setVerticalStretch(0);
115          sizePolicy2.setHeightForWidth(selectLabel->sizePolicy().hasHeightForWidth());
116          selectLabel->setSizePolicy(sizePolicy2);
117          selectLabel->setAlignment(Qt::AlignCenter);
118
119          horizontalLayout_2->addWidget(selectLabel);
120
121          resetButton = new QPushButton(KbBindWidget);
122          resetButton->setObjectName(QStringLiteral("resetButton"));
123          QSizePolicy sizePolicy3(QSizePolicy::Expanding, QSizePolicy::Fixed);
124          sizePolicy3.setHorizontalStretch(0);
125          sizePolicy3.setVerticalStretch(0);
126          sizePolicy3.setHeightForWidth(resetButton->sizePolicy().hasHeightForWidth());
127          resetButton->setSizePolicy(sizePolicy3);
128          resetButton->setMinimumSize(QSize(140, 0));
129          resetButton->setMaximumSize(QSize(140, 16777215));
130
131          horizontalLayout_2->addWidget(resetButton);
132
133
134          gridLayout->addLayout(horizontalLayout_2, 1, 1, 1, 3);
135
136
137          verticalLayout->addLayout(gridLayout);
138
139          verticalSpacer = new QSpacerItem(20, 40, QSizePolicy::Minimum, QSizePolicy::Expanding
    );
140
141          verticalLayout->addItem(verticalSpacer);
142
143          label_2 = new QLabel(KbBindWidget);
144          label_2->setObjectName(QStringLiteral("label_2"));
145          label_2->setFont(font);
146
147          verticalLayout->addWidget(label_2);
148
149          line_2 = new QFrame(KbBindWidget);
150          line_2->setObjectName(QStringLiteral("line_2"));
151          line_2->setFrameShape(QFrame::HLine);
152          line_2->setFrameShadow(QFrame::Sunken);
153
154          verticalLayout->addWidget(line_2);
155
156          widget = new QWidget(KbBindWidget);
157          widget->setObjectName(QStringLiteral("widget"));
158          QSizePolicy sizePolicy4(QSizePolicy::Preferred, QSizePolicy::Fixed);
159          sizePolicy4.setHorizontalStretch(0);
160          sizePolicy4.setVerticalStretch(0);
161          sizePolicy4.setHeightForWidth(widget->sizePolicy().hasHeightForWidth());
162          widget->setSizePolicy(sizePolicy4);
163          widget->setMinimumSize(QSize(0, 280));
164          widget->setMaximumSize(QSize(16777215, 280));
165          gridLayout_2 = new QGridLayout(widget);
166          gridLayout_2->setSpacing(0);
167          gridLayout_2->setObjectName(QStringLiteral("gridLayout_2"));
```

```
168         gridLayout_2->setContentsMargins(0, 0, 0, 0);
169         rbWidget = new RebindWidget(widget);
170         rbWidget->setObjectName(QStringLiteral("rbWidget"));
171         QSizePolicy sizePolicy5(QSizePolicy::Expanding, QSizePolicy::Expanding);
172         sizePolicy5.setHorizontalStretch(0);
173         sizePolicy5.setVerticalStretch(0);
174         sizePolicy5.setHeightForWidth(rbWidget->sizePolicy().hasHeightForWidth());
175         rbWidget->setSizePolicy(sizePolicy5);
176
177         gridLayout_2->addWidget(rbWidget, 0, 0, 1, 1);
178
179
180         verticalLayout->addWidget(widget);
181
182         label->raise();
183         line->raise();
184         label_2->raise();
185         line_2->raise();
186         widget->raise();
187
188         retranslateUi(KbBindWidget);
189
190         QMetaObject::connectSlotsByName(KbBindWidget);
191     } // setupUi
```

Here is the call graph for this function:



Here is the caller graph for this function:

12.91.3 Field Documentation

12.91.3.1 QPushButton* Ui_KbBindWidget::copyButton

Definition at line 41 of file ui_kbbindwidget.h.

Referenced by retranslateUi(), and setupUi().

12.91.3.2 QGridLayout* Ui_KbBindWidget::gridLayout

Definition at line 36 of file ui_kbbindwidget.h.

Referenced by setupUi().

12.91.3.3 QGridLayout* Ui_KbBindWidget::gridLayout_2

Definition at line 48 of file ui_kbbindwidget.h.

Referenced by setupUi().

12.91.3.4 QHBoxLayout* Ui_KbBindWidget::horizontalLayout_2

Definition at line 40 of file ui_kbbindwidget.h.

Referenced by setupUi().

12.91.3.5 QSpacerItem* Ui_KbBindWidget::horizontalSpacer

Definition at line 39 of file ui_kbbindwidget.h.

Referenced by setupUi().

12.91.3.6 QSpacerItem* Ui_KbBindWidget::horizontalSpacer_2

Definition at line 37 of file ui_kbbindwidget.h.

Referenced by setupUi().

12.91.3.7 KeyWidget* Ui_KbBindWidget::keyWidget

Definition at line 38 of file ui_kbbindwidget.h.

Referenced by KbBindWidget::KbBindWidget(), KbBindWidget::newLayout(), KbBindWidget::setBind(), setupUi(), and KbBindWidget::updateBind().

12.91.3.8 QLabel* Ui_KbBindWidget::label

Definition at line 34 of file ui_kbbindwidget.h.

Referenced by retranslateUi(), and setupUi().

12.91.3.9 QLabel* Ui_KbBindWidget::label_2

Definition at line 45 of file ui_kbbindwidget.h.

Referenced by retranslateUi(), and setupUi().

12.91.3.10 QFrame* Ui_KbBindWidget::line

Definition at line 35 of file ui_kbbindwidget.h.

Referenced by setupUi().

12.91.3.11 QFrame* Ui_KbBindWidget::line_2

Definition at line 46 of file ui_kbbindwidget.h.

Referenced by setupUi().

12.91.3.12 RebindWidget* Ui_KbBindWidget::rbWidget

Definition at line 49 of file ui_kbbindwidget.h.

Referenced by KbBindWidget::newLayout(), KbBindWidget::newSelection(), KbBindWidget::setBind(), setupUi(), and KbBindWidget::updateBind().

12.91.3.13 QPushButton* Ui_KbBindWidget::resetButton

Definition at line 43 of file ui_kbbindwidget.h.

Referenced by retranslateUi(), and setupUi().

12.91.3.14 QLabel* Ui_KbBindWidget::selectLabel

Definition at line 42 of file ui_kbbindwidget.h.

Referenced by retranslateUi(), setupUi(), and KbBindWidget::updateSelDisplay().

12.91.3.15 QVBoxLayout* Ui_KbBindWidget::verticalLayout

Definition at line 33 of file ui_kbbindwidget.h.

Referenced by setupUi().

12.91.3.16 QSpacerItem* Ui_KbBindWidget::verticalSpacer

Definition at line 44 of file ui_kbbindwidget.h.

Referenced by setupUi().

12.91.3.17 QWidget* Ui_KbBindWidget::widget

Definition at line 47 of file ui_kbbindwidget.h.

Referenced by setupUi().

The documentation for this class was generated from the following file:

- src/ckb/ui_kbbindwidget.h

12.92 Ui_KbLightWidget Class Reference

`#include <src/ckb/ui_kblightwidget.h>`

Inheritance diagram for Ui_KbLightWidget:

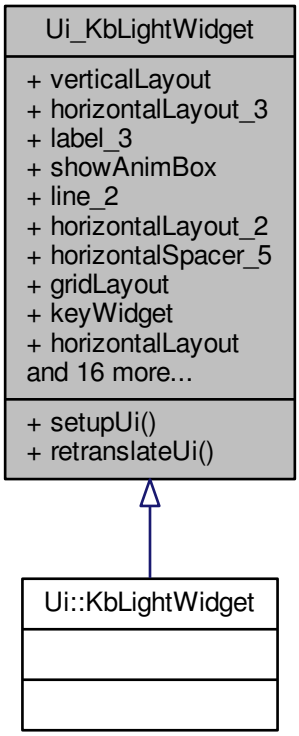

Collaboration diagram for Ui_KbLightWidget:

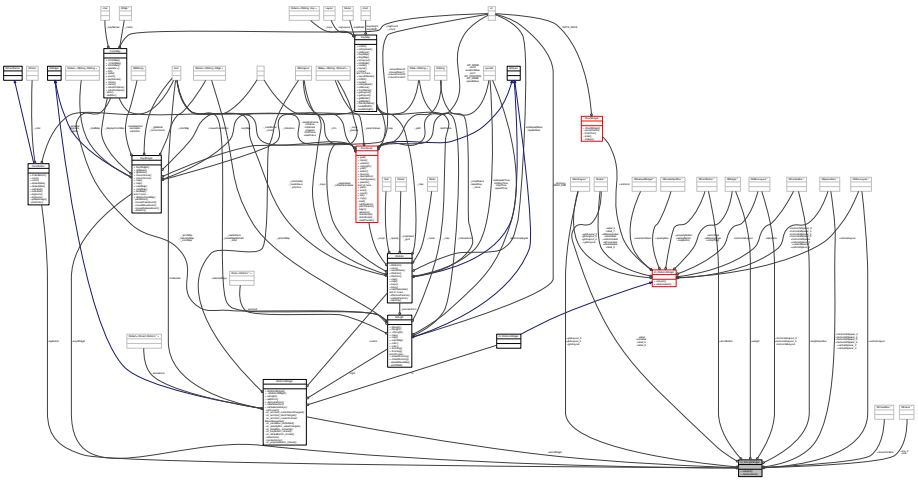

Public Member Functions

- void setupUi (QWidget *KbLightWidget)
- void retranslateUi (QWidget *KbLightWidget)

Data Fields

- QVBoxLayout * verticalLayout
- QHBoxLayout * horizontalLayout_3
- QLabel * label_3
- QCheckBox * showAnimBox
- QFrame * line_2
- QHBoxLayout * horizontalLayout_2
- QSpacerItem * horizontalSpacer_5
- QGridLayout * gridLayout
- KeyWidget * keyWidget
- QHBoxLayout * horizontalLayout
- ColorButton * bgButton
- QLabel * selLabel
- QPushButton * animButton
- QSpacerItem * horizontalSpacer_6
- QSpacerItem * verticalSpacer_2
- QGridLayout * gridLayout_2
- QComboBox * brightnessBox
- QLabel * label
- QSpacerItem * horizontalSpacer_3
- QSpacerItem * horizontalSpacer_4
- QSpacerItem * verticalSpacer_3
- QLabel * label_2
- QFrame * line
- QWidget * widget
- QGridLayout * gridLayout_4
- KbAnimWidget * animWidget

12.92.1 Detailed Description

Definition at line 33 of file ui_kblightwidget.h.

12.92.2 Member Function Documentation

12.92.2.1 void Ui_KbLightWidget::retranslateUi (QWidget * *KbLightWidget*) [inline]

Definition at line 238 of file ui_kblightwidget.h.

References animButton, bgButton, brightnessBox, label, label_2, label_3, selLabel, and showAnimBox.

Referenced by setupUi().

```
239     {
240         KbLightWidget->setWindowTitle(QApplication::translate("KbLightWidget", "Form", Q_NULLPTR));
241         label_3->setText(QApplication::translate("KbLightWidget", "Colors", Q_NULLPTR));
242 #ifndef QT_NO_TOOLTIP
243         showAnimBox->setToolTip(QApplication::translate("KbLightWidget", "If enabled, the same
      colors will be displayed here as on the keyboard. If disabled, the base colors will be shown.", Q_NULLPTR));
244 #endif // QT_NO_TOOLTIP
245         showAnimBox->setText(QApplication::translate("KbLightWidget", "Show animated", Q_NULLPTR
    ));
246         bgButton->setText(QApplication::translate("KbLightWidget", "Change color...", Q_NULLPTR));
247         selLabel->setText(QApplication::translate("KbLightWidget", "Click to select", Q_NULLPTR));
248         animButton->setText(QApplication::translate("KbLightWidget", "New animation...",
    Q_NULLPTR));
249         brightnessBox->clear();
250         brightnessBox->insertItems(0, QStringList()
251          << QApplication::translate("KbLightWidget", "100%", Q_NULLPTR)
252          << QApplication::translate("KbLightWidget", "67%", Q_NULLPTR)
253          << QApplication::translate("KbLightWidget", "33%", Q_NULLPTR)
254          << QApplication::translate("KbLightWidget", "Off", Q_NULLPTR)
```

```
255         );
256         label->setText(QApplication::translate("KbLightWidget", "\342\230\274", Q_NULLPTR));
257         label_2->setText(QApplication::translate("KbLightWidget", "Animations", Q_NULLPTR));
258     } // retranslateUi
```

Here is the caller graph for this function:



12.92.2.2 void Ui_KbLightWidget::setupUi (QWidget * *KbLightWidget*) [inline]

Definition at line 63 of file ui_kblightwidget.h.

References animButton, animWidget, bgButton, brightnessBox, gridLayout, gridLayout_2, gridLayout_4, horizontalLayout, horizontalLayout_2, horizontalLayout_3, horizontalSpacer_3, horizontalSpacer_4, horizontalSpacer_5, horizontalSpacer_6, keyWidget, label, label_2, label_3, line, line_2, retranslateUi(), selLabel, showAnimBox, verticalLayout, verticalSpacer_2, verticalSpacer_3, and widget.

Referenced by KbLightWidget::KbLightWidget().

```
64     {
65         if (KbLightWidget->objectName().isEmpty())
66             KbLightWidget->setObjectName(QStringLiteral("KbLightWidget"));
67         KbLightWidget->resize(632, 540);
68         KbLightWidget->setFocusPolicy(Qt::ClickFocus);
69         verticalLayout = new QVBoxLayout(KbLightWidget);
70         verticalLayout->setObjectName(QStringLiteral("verticalLayout"));
71         verticalLayout->setContentsMargins(0, 0, 0, -1);
72         horizontalLayout_3 = new QHBoxLayout();
73         horizontalLayout_3->setObjectName(QStringLiteral("horizontalLayout_3"));
74         label_3 = new QLabel(KbLightWidget);
75         label_3->setObjectName(QStringLiteral("label_3"));
76         QSizePolicy sizePolicy(QSizePolicy::Expanding, QSizePolicy::Preferred);
77         sizePolicy.setHorizontalStretch(0);
78         sizePolicy.setVerticalStretch(0);
79         sizePolicy.setHeightForWidth(label_3->sizePolicy().hasHeightForWidth());
80         label_3->setSizePolicy(sizePolicy);
81         QFont font;
82         font.setBold(true);
83         font.setWeight(75);
84         label_3->setFont(font);
85
86         horizontalLayout_3->addWidget(label_3);
87
88         showAnimBox = new QCheckBox(KbLightWidget);
89         showAnimBox->setObjectName(QStringLiteral("showAnimBox"));
90         showAnimBox->setChecked(true);
91
92         horizontalLayout_3->addWidget(showAnimBox);
93
94
95         verticalLayout->addLayout(horizontalLayout_3);
96
97         line_2 = new QFrame(KbLightWidget);
98         line_2->setObjectName(QStringLiteral("line_2"));
99         line_2->setFrameShape(QFrame::HLine);
100         line_2->setFrameShadow(QFrame::Sunken);
101
102         verticalLayout->addWidget(line_2);
103
104         horizontalLayout_2 = new QHBoxLayout();
105         horizontalLayout_2->setObjectName(QStringLiteral("horizontalLayout_2"));
106         horizontalSpacer_5 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
      QSizePolicy::Minimum);
107
108         horizontalLayout_2->addItem(horizontalSpacer_5);
109
110         gridLayout = new QGridLayout();
111         gridLayout->setObjectName(QStringLiteral("gridLayout"));
112         keyWidget = new KeyWidget(KbLightWidget);
```

```
113         keyWidget->setObjectName(QStringLiteral("keyWidget"));
114         QSizePolicy sizePolicy1(QSizePolicy::Expanding, QSizePolicy::Expanding);
115         sizePolicy1.setHorizontalStretch(0);
116         sizePolicy1.setVerticalStretch(0);
117         sizePolicy1.setHeightForWidth(keyWidget->sizePolicy().hasHeightForWidth());
118         keyWidget->setSizePolicy(sizePolicy1);
119         keyWidget->setMinimumSize(QSize(100, 100));
120         keyWidget->setFocusPolicy(Qt::ClickFocus);
121 
122         gridLayout->addWidget(keyWidget, 0, 0, 1, 3);
123 
124         horizontalLayout = new QHBoxLayout();
125         horizontalLayout->setObjectName(QStringLiteral("horizontalLayout"));
126         bgButton = new ColorButton(KbLightWidget);
127         bgButton->setObjectName(QStringLiteral("bgButton"));
128         QSizePolicy sizePolicy2(QSizePolicy::Fixed, QSizePolicy::Fixed);
129         sizePolicy2.setHorizontalStretch(0);
130         sizePolicy2.setVerticalStretch(0);
131         sizePolicy2.setHeightForWidth(bgButton->sizePolicy().hasHeightForWidth());
132         bgButton->setSizePolicy(sizePolicy2);
133         bgButton->setMinimumSize(QSize(140, 0));
134         bgButton->setMaximumSize(QSize(140, 16777215));
135 
136         horizontalLayout->addWidget(bgButton);
137 
138         selLabel = new QLabel(KbLightWidget);
139         selLabel->setObjectName(QStringLiteral("selLabel"));
140         sizePolicy.setHeightForWidth(selLabel->sizePolicy().hasHeightForWidth());
141         selLabel->setSizePolicy(sizePolicy);
142         selLabel->setAlignment(Qt::AlignCenter);
143 
144         horizontalLayout->addWidget(selLabel);
145 
146         animButton = new QPushButton(KbLightWidget);
147         animButton->setObjectName(QStringLiteral("animButton"));
148         sizePolicy2.setHeightForWidth(animButton->sizePolicy().hasHeightForWidth());
149         animButton->setSizePolicy(sizePolicy2);
150         animButton->setMinimumSize(QSize(140, 0));
151         animButton->setMaximumSize(QSize(140, 16777215));
152 
153         horizontalLayout->addWidget(animButton);
154 
155 
156         gridLayout->addLayout(horizontalLayout, 1, 0, 1, 3);
157 
158 
159         horizontalLayout_2->addLayout(gridLayout);
160 
161         horizontalSpacer_6 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
162 
163         horizontalLayout_2->addItem(horizontalSpacer_6);
164 
165 
166         verticalLayout->addLayout(horizontalLayout_2);
167 
168         verticalSpacer_2 = new QSpacerItem(20, 40, QSizePolicy::Minimum,
    QSizePolicy::Expanding);
169 
170         verticalLayout->addItem(verticalSpacer_2);
171 
172         gridLayout_2 = new QGridLayout();
173         gridLayout_2->setObjectName(QStringLiteral("gridLayout_2"));
174         brightnessBox = new QComboBox(KbLightWidget);
175         brightnessBox->setObjectName(QStringLiteral("brightnessBox"));
176         sizePolicy2.setHeightForWidth(brightnessBox->sizePolicy().hasHeightForWidth());
177         brightnessBox->setSizePolicy(sizePolicy2);
178 
179         gridLayout_2->addWidget(brightnessBox, 1, 3, 1, 1);
180 
181         label = new QLabel(KbLightWidget);
182         label->setObjectName(QStringLiteral("label"));
183         QFont font1;
184         font1.setPointSize(20);
185         label->setFont(font1);
186         label->setAlignment(Qt::AlignRight|Qt::AlignTrailing|Qt::AlignVCenter);
187 
188         gridLayout_2->addWidget(label, 1, 2, 1, 1);
189 
190         horizontalSpacer_3 = new QSpacerItem(0, 0, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
191 
192         gridLayout_2->addItem(horizontalSpacer_3, 0, 4, 1, 1);
193 
194         horizontalSpacer_4 = new QSpacerItem(0, 0, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
195 
```

```
196         gridLayout_2->addItem(horizontalSpacer_4, 0, 2, 1, 1);
197
198
199         verticalLayout->addLayout(gridLayout_2);
200
201         verticalSpacer_3 = new QSpacerItem(20, 40, QSizePolicy::Minimum,
    QSizePolicy::Expanding);
202
203         verticalLayout->addItem(verticalSpacer_3);
204
205         label_2 = new QLabel(KbLightWidget);
206         label_2->setObjectName(QStringLiteral("label_2"));
207         label_2->setFont(font);
208
209         verticalLayout->addWidget(label_2);
210
211         line = new QFrame(KbLightWidget);
212         line->setObjectName(QStringLiteral("line"));
213         line->setFrameShape(QFrame::HLine);
214         line->setFrameShadow(QFrame::Sunken);
215
216         verticalLayout->addWidget(line);
217
218         widget = new QWidget(KbLightWidget);
219         widget->setObjectName(QStringLiteral("widget"));
220         widget->setMinimumSize(QSize(0, 170));
221         gridLayout_4 = new QGridLayout(widget);
222         gridLayout_4->setObjectName(QStringLiteral("gridLayout_4"));
223         gridLayout_4->setContentsMargins(-1, 0, -1, 0);
224         animWidget = new KbAnimWidget(widget);
225         animWidget->setObjectName(QStringLiteral("animWidget"));
226
227         gridLayout_4->addWidget(animWidget, 0, 0, 1, 1);
228
229
230         verticalLayout->addWidget(widget);
231
232
233         retranslateUi(KbLightWidget);
234
235         QMetaObject::connectSlotsByName(KbLightWidget);
236     } // setupUi
```

Here is the call graph for this function:



Here is the caller graph for this function:

12.92.3 Field Documentation

12.92.3.1 QPushButton* Ui_KbLightWidget::animButton

Definition at line 48 of file ui_kblightwidget.h.

Referenced by KbLightWidget::KbLightWidget(), retranslateUi(), and setupUi().

12.92.3.2 KbAnimWidget* Ui_KbLightWidget::animWidget

Definition at line 61 of file ui_kblightwidget.h.

Referenced by KbLightWidget::KbLightWidget(), KbLightWidget::newSelection(), KbLightWidget::on_animButton_clicked(), KbLightWidget::setLight(), and setupUi().

12.92.3.3 ColorButton* Ui_KbLightWidget::bgButton

Definition at line 46 of file ui_kblightwidget.h.

Referenced by KbLightWidget::KbLightWidget(), KbLightWidget::newSelection(), retranslateUi(), and setupUi().

12.92.3.4 QComboBox* Ui_KbLightWidget::brightnessBox

Definition at line 52 of file ui_kblightwidget.h.

Referenced by retranslateUi(), setupUi(), and KbLightWidget::updateLight().

12.92.3.5 QGridLayout* Ui_KbLightWidget::gridLayout

Definition at line 43 of file ui_kblightwidget.h.

Referenced by setupUi().

12.92.3.6 QGridLayout* Ui_KbLightWidget::gridLayout_2

Definition at line 51 of file ui_kblightwidget.h.

Referenced by setupUi().

12.92.3.7 QGridLayout* Ui_KbLightWidget::gridLayout_4

Definition at line 60 of file ui_kblightwidget.h.

Referenced by setupUi().

12.92.3.8 QHBoxLayout* Ui_KbLightWidget::horizontalLayout

Definition at line 45 of file ui_kblightwidget.h.

Referenced by setupUi().

12.92.3.9 QHBoxLayout* Ui_KbLightWidget::horizontalLayout_2

Definition at line 41 of file ui_kblightwidget.h.

Referenced by setupUi().

12.92.3.10 QHBoxLayout* Ui_KbLightWidget::horizontalLayout_3

Definition at line 37 of file ui_kblightwidget.h.

Referenced by setupUi().

12.92.3.11 QSpacerItem* Ui_KbLightWidget::horizontalSpacer_3

Definition at line 54 of file ui_kblightwidget.h.

Referenced by setupUi().

12.92.3.12 QSpacerItem* Ui_KbLightWidget::horizontalSpacer_4

Definition at line 55 of file ui_kblightwidget.h.

Referenced by setupUi().

12.92.3.13 QSpacerItem* Ui_KbLightWidget::horizontalSpacer_5

Definition at line 42 of file ui_kblightwidget.h.

Referenced by setupUi().

12.92.3.14 QSpacerItem* Ui_KbLightWidget::horizontalSpacer_6

Definition at line 49 of file ui_kblightwidget.h.

Referenced by setupUi().

12.92.3.15 KeyWidget* Ui_KbLightWidget::keyWidget

Definition at line 44 of file ui_kblightwidget.h.

Referenced by KbLightWidget::changeAnim(), KbLightWidget::changeAnimKeys(), KbLightWidget::changeColor(), KbLightWidget::KbLightWidget(), KbLightWidget::on_animButton_clicked(), KbLightWidget::on_bgButton_clicked(), KbLightWidget::on_showAnimBox_clicked(), KbLightWidget::setLight(), KbLightWidget::setMonochrome(), setupUi(), KbLightWidget::toggleSidelight(), and KbLightWidget::updateLight().

12.92.3.16 QLabel* Ui_KbLightWidget::label

Definition at line 53 of file ui_kblightwidget.h.

Referenced by retranslateUi(), and setupUi().

12.92.3.17 QLabel* Ui_KbLightWidget::label_2

Definition at line 57 of file ui_kblightwidget.h.

Referenced by retranslateUi(), and setupUi().

12.92.3.18 QLabel* Ui_KbLightWidget::label_3

Definition at line 38 of file ui_kblightwidget.h.

Referenced by retranslateUi(), and setupUi().

12.92.3.19 QFrame* Ui_KbLightWidget::line

Definition at line 58 of file ui_kblightwidget.h.

Referenced by setupUi().

12.92.3.20 QFrame* Ui_KbLightWidget::line_2

Definition at line 40 of file ui_kblightwidget.h.

Referenced by setupUi().

12.92.3.21 QLabel* Ui_KbLightWidget::selLabel

Definition at line 47 of file ui_kblightwidget.h.

Referenced by KbLightWidget::newSelection(), retranslateUi(), and setupUi().

12.92.3.22 QCheckBox* Ui_KbLightWidget::showAnimBox

Definition at line 39 of file ui_kblightwidget.h.

Referenced by KbLightWidget::KbLightWidget(), retranslateUi(), KbLightWidget::setLight(), and setupUi().

12.92.3.23 QVBoxLayout* Ui_KbLightWidget::verticalLayout

Definition at line 36 of file ui_kblightwidget.h.

Referenced by setupUi().

12.92.3.24 QSpacerItem* Ui_KbLightWidget::verticalSpacer_2

Definition at line 50 of file ui_kblightwidget.h.

Referenced by setupUi().

12.92.3.25 QSpacerItem* Ui_KbLightWidget::verticalSpacer_3

Definition at line 56 of file ui_kblightwidget.h.

Referenced by setupUi().

12.92.3.26 QWidget* Ui_KbLightWidget::widget

Definition at line 59 of file ui_kblightwidget.h.

Referenced by setupUi().

The documentation for this class was generated from the following file:

- src/ckb/ui_kblightwidget.h

12.93 Ui_KbProfileDialog Class Reference

`#include <src/ckb/ui_kbprofiledialog.h>`

Inheritance diagram for Ui_KbProfileDialog:

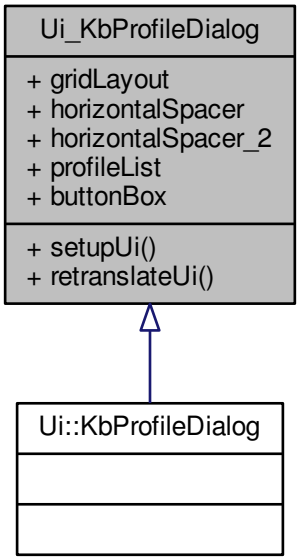

Collaboration diagram for Ui_KbProfileDialog:

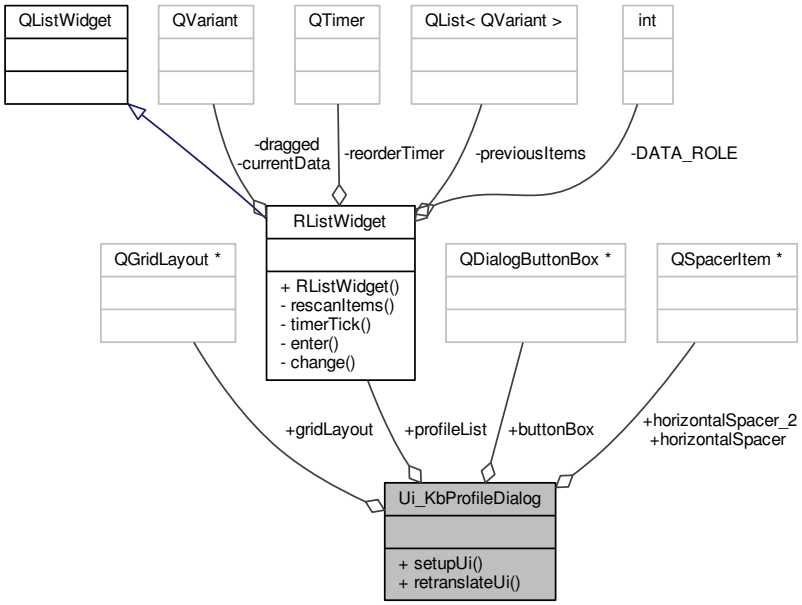

Public Member Functions

- void setupUi (QDialog *KbProfileDialog)
- void retranslateUi (QDialog *KbProfileDialog)

Data Fields

- QGridLayout * gridLayout
- QSpacerItem * horizontalSpacer
- QSpacerItem * horizontalSpacer_2
- RListWidget * profileList
- QDialogButtonBox * buttonBox

12.93.1 Detailed Description

Definition at line 25 of file ui_kbprofiledialog.h.

12.93.2 Member Function Documentation

12.93.2.1 void Ui_KbProfileDialog::retranslateUi (QDialog * *KbProfileDialog*) [inline]

Definition at line 73 of file ui_kbprofiledialog.h.

Referenced by setupUi().

```
74     {
75         KbProfileDialog->setWindowTitle(QApplication::translate("KbProfileDialog", "Keyboard Profiles",
       Q_NULLPTR));
76     } // retranslateUi
```

Here is the caller graph for this function:

12.93.2.2 void Ui_KbProfileDialog::setupUi (QDialog * *KbProfileDialog*) [inline]

Definition at line 34 of file ui_kbprofiledialog.h.

References buttonBox, gridLayout, horizontalSpacer, horizontalSpacer_2, profileList, and retranslateUi().

Referenced by KbProfileDialog::KbProfileDialog().

```
35     {
36         if (KbProfileDialog->objectName().isEmpty())
37             KbProfileDialog->setObjectName(QStringLiteral("KbProfileDialog"));
38         KbProfileDialog->resize(400, 300);
39         KbProfileDialog->setFocusPolicy(Qt::ClickFocus);
40         gridLayout = new QGridLayout(KbProfileDialog);
41         gridLayout->setObjectName(QStringLiteral("gridLayout"));
42         horizontalSpacer = new QSpacerItem(40, 20, QSizePolicy::Expanding,
       QSizePolicy::Minimum);
43
44         gridLayout->addItem(horizontalSpacer, 0, 0, 1, 1);
```

```
45
46          horizontalSpacer_2 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
47
48          gridLayout->addItem(horizontalSpacer_2, 0, 2, 1, 1);
49
50          profileList = new RListWidget(KbProfileDialog);
51          profileList->setObjectName(QStringLiteral("profileList"));
52          profileList->setContextMenuPolicy(Qt::CustomContextMenu);
53          profileList->setFrameShadow(QFrame::Plain);
54          profileList->setIconSize(QSize(24, 24));
55
56          gridLayout->addWidget(profileList, 0, 1, 1, 1);
57
58          buttonBox = new QDialogButtonBox(KbProfileDialog);
59          buttonBox->setObjectName(QStringLiteral("buttonBox"));
60          buttonBox->setOrientation(Qt::Horizontal);
61          buttonBox->setStandardButtons(QDialogButtonBox::Ok);
62
63          gridLayout->addWidget(buttonBox, 1, 0, 1, 3);
64
65
66          retranslateUi(KbProfileDialog);
67          QObject::connect(buttonBox, SIGNAL(accepted()), KbProfileDialog, SLOT(accept()));
68          QObject::connect(buttonBox, SIGNAL(rejected()), KbProfileDialog, SLOT(reject()));
69
70          QMetaObject::connectSlotsByName(KbProfileDialog);
71      } // setupUi
```

Here is the call graph for this function:

Here is the caller graph for this function:



12.93.3 Field Documentation

12.93.3.1 QDialogButtonBox* Ui_KbProfileDialog::buttonBox

Definition at line 32 of file ui_kbprofiledialog.h.

Referenced by setupUi().

12.93.3.2 QGridLayout* Ui_KbProfileDialog::gridLayout

Definition at line 28 of file ui_kbprofiledialog.h.

Referenced by setupUi().

12.93.3.3 QSpacerItem* Ui_KbProfileDialog::horizontalSpacer

Definition at line 29 of file ui_kbprofiledialog.h.

Referenced by setupUi().

12.93.3.4 QSpacerItem* Ui_KbProfileDialog::horizontalSpacer_2

Definition at line 30 of file ui_kbprofiledialog.h.

Referenced by setupUi().

12.93.3.5 RListWidget* Ui_KbProfileDialog::profileList

Definition at line 31 of file ui_kbprofiledialog.h.

Referenced by KbProfileDialog::addNewProfileItem(), KbProfileDialog::KbProfileDialog(), KbProfileDialog::on_profileList_customContextMenuRequested(), KbProfileDialog::on_profileList_itemClicked(), KbProfileDialog::profileList_reordered(), KbProfileDialog::repopulate(), and setupUi().

The documentation for this class was generated from the following file:

- src/ckb/ui_kbprofiledialog.h

12.94 Ui_KbWidget Class Reference

`#include <src/ckb/ui_kbwidget.h>`

Inheritance diagram for Ui_KbWidget:

Collaboration diagram for Ui_KbWidget:

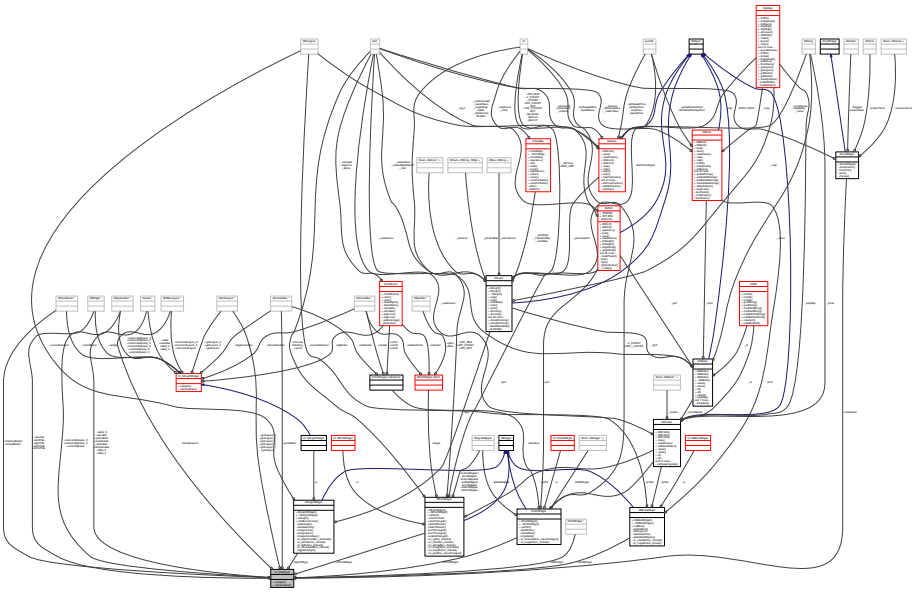

Public Member Functions

- void setupUi (QWidget *KbWidget)
- void retranslateUi (QWidget *KbWidget)

Data Fields

- QGridLayout * gridLayout
- QComboBox * profileBox
- QTabWidget * tabWidget
- QWidget * lightTab
- QGridLayout * gridLayout_2
- KbLightWidget * lightWidget
- QLabel * label_3
- QWidget * bindTab
- QGridLayout * gridLayout_5
- KbBindWidget * bindWidget
- QWidget * kPerfTab
- QGridLayout * gridLayout_4
- KPerfWidget * kPerfWidget
- QWidget * mPerfTab
- QGridLayout * gridLayout_7
- MPerfWidget * mPerfWidget
- QWidget * devTab
- QGridLayout * gridLayout_3
- QLabel * fwUpdLabel
- QSpacerItem * verticalSpacer
- QLabel * fwLabel
- QLabel * label_4
- QSpacerItem * horizontalSpacer_2
- QLabel * label_9
- QLabel * serialLabel
- QHBoxLayout * fwUpdLayout
- QPushButton * fwUpdButton
- QSpacerItem * horizontalSpacer_3
- QLabel * pollLabel2
- QLabel * pollLabel
- RListWidget * modesList
- QPushButton * hwSaveButton

12.94.1 Detailed Description

Definition at line 33 of file ui_kbwidget.h.

12.94.2 Member Function Documentation

12.94.2.1 void Ui_KbWidget::retranslateUi (QWidget * *KbWidget*) [inline]

Definition at line 268 of file ui_kbwidget.h.

References bindTab, devTab, fwLabel, fwUpdButton, fwUpdLabel, hwSaveButton, kPerfTab, label_3, label_4, label_9, lightTab, mPerfTab, pollLabel, pollLabel2, serialLabel, and tabWidget.

Referenced by setupUi().

```
269     {
270         KbWidget->setWindowTitle(QApplication::translate("KbWidget", "Form", Q_NULLPTR));
271         label_3->setText(QApplication::translate("KbWidget", "Tip: Drag+drop items to reorder.
     Right-click for menu.", Q_NULLPTR));
272         tabWidget->setTabText(tabWidget->indexOf(lightTab),
    QApplication::translate("KbWidget", "Lighting", Q_NULLPTR));
273         tabWidget->setTabText(tabWidget->indexOf(bindTab), QApplication::translate
    ("KbWidget", "Binding", Q_NULLPTR));
274         tabWidget->setTabText(tabWidget->indexOf(kPerfTab),
    QApplication::translate("KbWidget", "Performance", Q_NULLPTR));
275         tabWidget->setTabText(tabWidget->indexOf(mPerfTab),
    QApplication::translate("KbWidget", "Performance", Q_NULLPTR));
276         fwUpdLabel->setText(QApplication::translate("KbWidget", "Status:", Q_NULLPTR));
277         fwLabel->setText(QApplication::translate("KbWidget", "N/A", Q_NULLPTR));
278         label_4->setText(QApplication::translate("KbWidget", "USB device ID:", Q_NULLPTR));
279         label_9->setText(QApplication::translate("KbWidget", "Firmware version:", Q_NULLPTR));
280         serialLabel->setText(QApplication::translate("KbWidget", "N/A", Q_NULLPTR));
281         fwUpdButton->setText(QApplication::translate("KbWidget", "Check for updates", Q_NULLPTR)
    );
282         pollLabel2->setText(QApplication::translate("KbWidget", "Poll rate:", Q_NULLPTR));
283         pollLabel->setText(QApplication::translate("KbWidget", "N/A", Q_NULLPTR));
284         tabWidget->setTabText(tabWidget->indexOf(devTab), QApplication::translate("
    KbWidget", "Device", Q_NULLPTR));
285         hwSaveButton->setText(QApplication::translate("KbWidget", "Save to hardware", Q_NULLPTR
    ));
286     } // retranslateUi
```

Here is the caller graph for this function:



12.94.2.2 void Ui_KbWidget::setupUi (QWidget * *KbWidget*) [inline]

Definition at line 69 of file ui_kbwidget.h.

References bindTab, bindWidget, devTab, fwLabel, fwUpdButton, fwUpdLabel, fwUpdLayout, gridLayout, gridLayout_2, gridLayout_3, gridLayout_4, gridLayout_5, gridLayout_7, horizontalSpacer_2, horizontalSpacer_3, hwSaveButton, kPerfTab, kPerfWidget, label_3, label_4, label_9, lightTab, lightWidget, modesList, mPerfTab, mPerfWidget, pollLabel, pollLabel2, profileBox, retranslateUi(), serialLabel, tabWidget, and verticalSpacer.

Referenced by KbWidget::KbWidget().

```
70     {
71         if (KbWidget->objectName().isEmpty())
72             KbWidget->setObjectName(QStringLiteral("KbWidget"));
73         KbWidget->resize(773, 539);
74         gridLayout = new QGridLayout(KbWidget);
75         gridLayout->setSpacing(9);
76         gridLayout->setObjectName(QStringLiteral("gridLayout"));
77         gridLayout->setContentsMargins(9, -1, 9, 9);
78         profileBox = new QComboBox(KbWidget);
79         profileBox->setObjectName(QStringLiteral("profileBox"));
80         QSizePolicy sizePolicy(QSizePolicy::Preferred, QSizePolicy::Fixed);
81         sizePolicy.setHorizontalStretch(18);
82         sizePolicy.setVerticalStretch(0);
83         sizePolicy.setHeightForWidth(profileBox->sizePolicy().hasHeightForWidth());
84         profileBox->setSizePolicy(sizePolicy);
85         profileBox->setIconSize(QSize(24, 24));
86
87         gridLayout->addWidget(profileBox, 0, 0, 1, 1);
88
89         tabWidget = new QTabWidget(KbWidget);
90         tabWidget->setObjectName(QStringLiteral("tabWidget"));
91         QSizePolicy sizePolicy1(QSizePolicy::Expanding, QSizePolicy::Expanding);
92         sizePolicy1.setHorizontalStretch(82);
93         sizePolicy1.setVerticalStretch(0);
94         sizePolicy1.setHeightForWidth(tabWidget->sizePolicy().hasHeightForWidth());
95         tabWidget->setSizePolicy(sizePolicy1);
96         lightTab = new QWidget();
```

```
97          lightTab->setObjectName(QStringLiteral("lightTab"));
98          gridLayout_2 = new QGridLayout(lightTab);
99          gridLayout_2->setObjectName(QStringLiteral("gridLayout_2"));
100          gridLayout_2->setHorizontalSpacing(0);
101          gridLayout_2->setVerticalSpacing(6);
102          gridLayout_2->setContentsMargins(6, 6, 6, 6);
103          lightWidget = new KbLightWidget(lightTab);
104          lightWidget->setObjectName(QStringLiteral("lightWidget"));
105          QSizePolicy sizePolicy2(QSizePolicy::Preferred, QSizePolicy::Expanding);
106          sizePolicy2.setHorizontalStretch(0);
107          sizePolicy2.setVerticalStretch(0);
108          sizePolicy2.setHeightForWidth(lightWidget->sizePolicy().hasHeightForWidth());
109          lightWidget->setSizePolicy(sizePolicy2);
110
111          gridLayout_2->addWidget(lightWidget, 0, 0, 1, 1);
112
113          label_3 = new QLabel(lightTab);
114          label_3->setObjectName(QStringLiteral("label_3"));
115          QSizePolicy sizePolicy3(QSizePolicy::Preferred, QSizePolicy::Minimum);
116          sizePolicy3.setHorizontalStretch(0);
117          sizePolicy3.setVerticalStretch(0);
118          sizePolicy3.setHeightForWidth(label_3->sizePolicy().hasHeightForWidth());
119          label_3->setSizePolicy(sizePolicy3);
120
121          gridLayout_2->addWidget(label_3, 1, 0, 1, 1);
122
123          tabWidget->addTab(lightTab, QString());
124          bindTab = new QWidget();
125          bindTab->setObjectName(QStringLiteral("bindTab"));
126          gridLayout_5 = new QGridLayout(bindTab);
127          gridLayout_5->setSpacing(0);
128          gridLayout_5->setObjectName(QStringLiteral("gridLayout_5"));
129          gridLayout_5->setContentsMargins(6, 6, 6, 6);
130          bindWidget = new KbBindWidget(bindTab);
131          bindWidget->setObjectName(QStringLiteral("bindWidget"));
132          sizePolicy2.setHeightForWidth(bindWidget->sizePolicy().hasHeightForWidth());
133          bindWidget->setSizePolicy(sizePolicy2);
134
135          gridLayout_5->addWidget(bindWidget, 0, 0, 1, 1);
136
137          tabWidget->addTab(bindTab, QString());
138          kPerfTab = new QWidget();
139          kPerfTab->setObjectName(QStringLiteral("kPerfTab"));
140          gridLayout_4 = new QGridLayout(kPerfTab);
141          gridLayout_4->setObjectName(QStringLiteral("gridLayout_4"));
142          gridLayout_4->setContentsMargins(6, 6, 6, 6);
143          kPerfWidget = new KPerfWidget(kPerfTab);
144          kPerfWidget->setObjectName(QStringLiteral("kPerfWidget"));
145
146          gridLayout_4->addWidget(kPerfWidget, 0, 0, 1, 1);
147
148          tabWidget->addTab(kPerfTab, QString());
149          mPerfTab = new QWidget();
150          mPerfTab->setObjectName(QStringLiteral("mPerfTab"));
151          gridLayout_7 = new QGridLayout(mPerfTab);
152          gridLayout_7->setObjectName(QStringLiteral("gridLayout_7"));
153          gridLayout_7->setContentsMargins(6, 6, 6, 6);
154          mPerfWidget = new MPerfWidget(mPerfTab);
155          mPerfWidget->setObjectName(QStringLiteral("mPerfWidget"));
156
157          gridLayout_7->addWidget(mPerfWidget, 0, 0, 1, 1);
158
159          tabWidget->addTab(mPerfTab, QString());
160          devTab = new QWidget();
161          devTab->setObjectName(QStringLiteral("devTab"));
162          gridLayout_3 = new QGridLayout(devTab);
163          gridLayout_3->setObjectName(QStringLiteral("gridLayout_3"));
164          gridLayout_3->setContentsMargins(6, 6, 6, 6);
165          fwUpdLabel = new QLabel(devTab);
166          fwUpdLabel->setObjectName(QStringLiteral("fwUpdLabel"));
167          fwUpdLabel->setMinimumSize(QSize(0, 34));
168
169          gridLayout_3->addWidget(fwUpdLabel, 4, 0, 1, 1);
170
171          verticalSpacer = new QSpacerItem(20, 40, QSizePolicy::Minimum, QSizePolicy::Expanding
    );
172
173          gridLayout_3->addItem(verticalSpacer, 6, 2, 1, 1);
174
175          fwLabel = new QLabel(devTab);
176          fwLabel->setObjectName(QStringLiteral("fwLabel"));
177          fwLabel->setCursor(QCursor(Qt::IBeamCursor));
178          fwLabel->setTextInteractionFlags(Qt::LinksAccessibleByMouse|Qt::TextSelectableByMouse);
179
180          gridLayout_3->addWidget(fwLabel, 2, 2, 1, 1);
181
182          label_4 = new QLabel(devTab);
```

```
183         label_4->setObjectName(QStringLiteral("label_4"));
184         label_4->setMinimumSize(QSize(0, 34));
185 
186         gridLayout_3->addWidget(label_4, 0, 0, 1, 1);
187 
188         horizontalSpacer_2 = new QSpacerItem(40, 1, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
189 
190         gridLayout_3->addItem(horizontalSpacer_2, 2, 1, 1, 1);
191 
192         label_9 = new QLabel(devTab);
193         label_9->setObjectName(QStringLiteral("label_9"));
194         label_9->setMinimumSize(QSize(0, 34));
195 
196         gridLayout_3->addWidget(label_9, 2, 0, 1, 1);
197 
198         serialLabel = new QLabel(devTab);
199         serialLabel->setObjectName(QStringLiteral("serialLabel"));
200         serialLabel->setCursor(QCursor(Qt::IBeamCursor));
201         serialLabel->setTextInteractionFlags(Qt::LinksAccessibleByMouse|
    Qt::TextSelectableByMouse);
202 
203         gridLayout_3->addWidget(serialLabel, 0, 2, 1, 1);
204 
205         fwUpdLayout = new QHBoxLayout();
206         fwUpdLayout->setObjectName(QStringLiteral("fwUpdLayout"));
207         fwUpdButton = new QPushButton(devTab);
208         fwUpdButton->setObjectName(QStringLiteral("fwUpdButton"));
209 
210         fwUpdLayout->addWidget(fwUpdButton);
211 
212         horizontalSpacer_3 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
213 
214         fwUpdLayout->addItem(horizontalSpacer_3);
215 
216 
217         gridLayout_3->addLayout(fwUpdLayout, 4, 2, 1, 1);
218 
219         pollLabel2 = new QLabel(devTab);
220         pollLabel2->setObjectName(QStringLiteral("pollLabel2"));
221         pollLabel2->setMinimumSize(QSize(0, 34));
222 
223         gridLayout_3->addWidget(pollLabel2, 1, 0, 1, 1);
224 
225         pollLabel = new QLabel(devTab);
226         pollLabel->setObjectName(QStringLiteral("pollLabel"));
227 
228         gridLayout_3->addWidget(pollLabel, 1, 2, 1, 1);
229 
230         tabWidget->addTab(devTab, QString());
231 
232         gridLayout->addWidget(tabWidget, 0, 1, 3, 1);
233 
234         modesList = new RListWidget(KbWidget);
235         modesList->setObjectName(QStringLiteral("modesList"));
236         QSizePolicy sizePolicy4(QSizePolicy::Expanding, QSizePolicy::Expanding);
237         sizePolicy4.setHorizontalStretch(18);
238         sizePolicy4.setVerticalStretch(0);
239         sizePolicy4.setHeightForWidth(modesList->sizePolicy().hasHeightForWidth());
240         modesList->setSizePolicy(sizePolicy4);
241         modesList->setContextMenuPolicy(Qt::CustomContextMenu);
242         modesList->setFrameShadow(QFrame::Plain);
243         modesList->setDragDropMode(QAbstractItemView::InternalMove);
244         modesList->setIconSize(QSize(24, 24));
245         modesList->setMovement(QListView::Snap);
246 
247         gridLayout->addWidget(modesList, 1, 0, 1, 1);
248 
249         hwSaveButton = new QPushButton(KbWidget);
250         hwSaveButton->setObjectName(QStringLiteral("hwSaveButton"));
251         QSizePolicy sizePolicy5(QSizePolicy::Minimum, QSizePolicy::Fixed);
252         sizePolicy5.setHorizontalStretch(18);
253         sizePolicy5.setVerticalStretch(0);
254         sizePolicy5.setHeightForWidth(hwSaveButton->sizePolicy().hasHeightForWidth());
255         hwSaveButton->setSizePolicy(sizePolicy5);
256 
257         gridLayout->addWidget(hwSaveButton, 2, 0, 1, 1);
258 
259 
260         retranslateUi(KbWidget);
261 
262         tabWidget->setCurrentIndex(0);
263 
264 
265         QMetaObject::connectSlotsByName(KbWidget);
266     } // setupUi
```

Here is the call graph for this function:



Here is the caller graph for this function:

12.94.3 Field Documentation

12.94.3.1 QWidget* Ui_KbWidget::bindTab

Definition at line 43 of file ui_kbwidget.h.

Referenced by retranslateUi(), and setupUi().

12.94.3.2 KbBindWidget* Ui_KbWidget::bindWidget

Definition at line 45 of file ui_kbwidget.h.

Referenced by KbWidget::modeChanged(), and setupUi().

12.94.3.3 QWidget* Ui_KbWidget::devTab

Definition at line 52 of file ui_kbwidget.h.

Referenced by retranslateUi(), and setupUi().

12.94.3.4 QLabel* Ui_KbWidget::fwLabel

Definition at line 56 of file ui_kbwidget.h.

Referenced by KbWidget::devUpdate(), retranslateUi(), and setupUi().

12.94.3.5 QPushButton* Ui_KbWidget::fwUpdButton

Definition at line 62 of file ui_kbwidget.h.

Referenced by KbWidget::KbWidget(), KbWidget::on_fwUpdButton_clicked(), retranslateUi(), setupUi(), and KbWidget::updateFwButton().

12.94.3.6 QLabel* Ui_KbWidget::fwUpdLabel

Definition at line 54 of file ui_kbwidget.h.

Referenced by KbWidget::KbWidget(), retranslateUi(), and setupUi().

12.94.3.7 QHBoxLayout* Ui_KbWidget::fwUpdLayout

Definition at line 61 of file ui_kbwidget.h.

Referenced by KbWidget::KbWidget(), and setupUi().

12.94.3.8 QGridLayout* Ui_KbWidget::gridLayout

Definition at line 36 of file ui_kbwidget.h.

Referenced by setupUi().

12.94.3.9 QGridLayout* Ui_KbWidget::gridLayout_2

Definition at line 40 of file ui_kbwidget.h.

Referenced by setupUi().

12.94.3.10 QGridLayout* Ui_KbWidget::gridLayout_3

Definition at line 53 of file ui_kbwidget.h.

Referenced by setupUi().

12.94.3.11 QGridLayout* Ui_KbWidget::gridLayout_4

Definition at line 47 of file ui_kbwidget.h.

Referenced by setupUi().

12.94.3.12 QGridLayout* Ui_KbWidget::gridLayout_5

Definition at line 44 of file ui_kbwidget.h.

Referenced by setupUi().

12.94.3.13 QGridLayout* Ui_KbWidget::gridLayout_7

Definition at line 50 of file ui_kbwidget.h.

Referenced by setupUi().

12.94.3.14 QSpacerItem* Ui_KbWidget::horizontalSpacer_2

Definition at line 58 of file ui_kbwidget.h.

Referenced by setupUi().

12.94.3.15 QSpacerItem* Ui_KbWidget::horizontalSpacer_3

Definition at line 63 of file ui_kbwidget.h.

Referenced by setupUi().

12.94.3.16 QPushButton* Ui_KbWidget::hwSaveButton

Definition at line 67 of file ui_kbwidget.h.

Referenced by retranslateUi(), and setupUi().

12.94.3.17 QWidget* Ui_KbWidget::kPerfTab

Definition at line 46 of file ui_kbwidget.h.

Referenced by KbWidget::KbWidget(), retranslateUi(), and setupUi().

12.94.3.18 KPerfWidget* Ui_KbWidget::kPerfWidget

Definition at line 48 of file ui_kbwidget.h.

Referenced by KbWidget::modeChanged(), and setupUi().

12.94.3.19 QLabel* Ui_KbWidget::label_3

Definition at line 42 of file ui_kbwidget.h.

Referenced by retranslateUi(), and setupUi().

12.94.3.20 QLabel* Ui_KbWidget::label_4

Definition at line 57 of file ui_kbwidget.h.

Referenced by retranslateUi(), and setupUi().

12.94.3.21 QLabel* Ui_KbWidget::label_9

Definition at line 59 of file ui_kbwidget.h.

Referenced by retranslateUi(), and setupUi().

12.94.3.22 QWidget* Ui_KbWidget::lightTab

Definition at line 39 of file ui_kbwidget.h.

Referenced by KbWidget::KbWidget(), retranslateUi(), and setupUi().

12.94.3.23 KbLightWidget* Ui_KbWidget::lightWidget

Definition at line 41 of file ui_kbwidget.h.

Referenced by KbWidget::KbWidget(), KbWidget::modeChanged(), and setupUi().

12.94.3.24 RListWidget* Ui_KbWidget::modesList

Definition at line 66 of file ui_kbwidget.h.

Referenced by KbWidget::addNewModeItem(), KbWidget::KbWidget(), KbWidget::modeChanged(), KbWidget::modesList_reordered(), KbWidget::on_modesList_customContextMenuRequested(), KbWidget::on_modesList_itemClicked(), KbWidget::profileChanged(), and setupUi().

12.94.3.25 QWidget* Ui_KbWidget::mPerfTab

Definition at line 49 of file ui_kbwidget.h.

Referenced by KbWidget::KbWidget(), retranslateUi(), and setupUi().

12.94.3.26 MPerfWidget* Ui_KbWidget::mPerfWidget

Definition at line 51 of file ui_kbwidget.h.

Referenced by KbWidget::modeChanged(), and setupUi().

12.94.3.27 QLabel* Ui_KbWidget::pollLabel

Definition at line 65 of file ui_kbwidget.h.

Referenced by KbWidget::devUpdate(), KbWidget::KbWidget(), retranslateUi(), and setupUi().

12.94.3.28 QLabel* Ui_KbWidget::pollLabel2

Definition at line 64 of file ui_kbwidget.h.

Referenced by KbWidget::KbWidget(), retranslateUi(), and setupUi().

12.94.3.29 QComboBox* Ui_KbWidget::profileBox

Definition at line 37 of file ui_kbwidget.h.

Referenced by setupUi(), and KbWidget::updateProfileList().

12.94.3.30 QLabel* Ui_KbWidget::serialLabel

Definition at line 60 of file ui_kbwidget.h.

Referenced by KbWidget::devUpdate(), retranslateUi(), and setupUi().

12.94.3.31 QTabWidget* Ui_KbWidget::tabWidget

Definition at line 38 of file ui_kbwidget.h.

Referenced by KbWidget::KbWidget(), KbWidget::on_tabWidget_currentChanged(), retranslateUi(), setupUi(), KbWidget::showFirstTab(), and KbWidget::showLastTab().

12.94.3.32 QSpacerItem* Ui_KbWidget::verticalSpacer

Definition at line 55 of file ui_kbwidget.h.

Referenced by setupUi().

The documentation for this class was generated from the following file:

- src/ckb/ui_kbwidget.h

12.95 Ui_KPerfWidget Class Reference

`#include <src/ckb/ui_kperfwidget.h>`

Inheritance diagram for Ui_KPerfWidget:

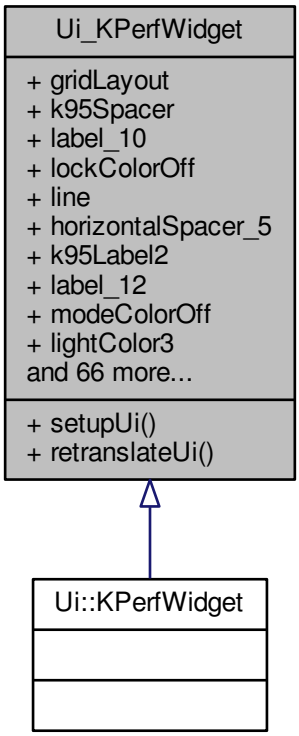

Collaboration diagram for Ui_KPerfWidget:

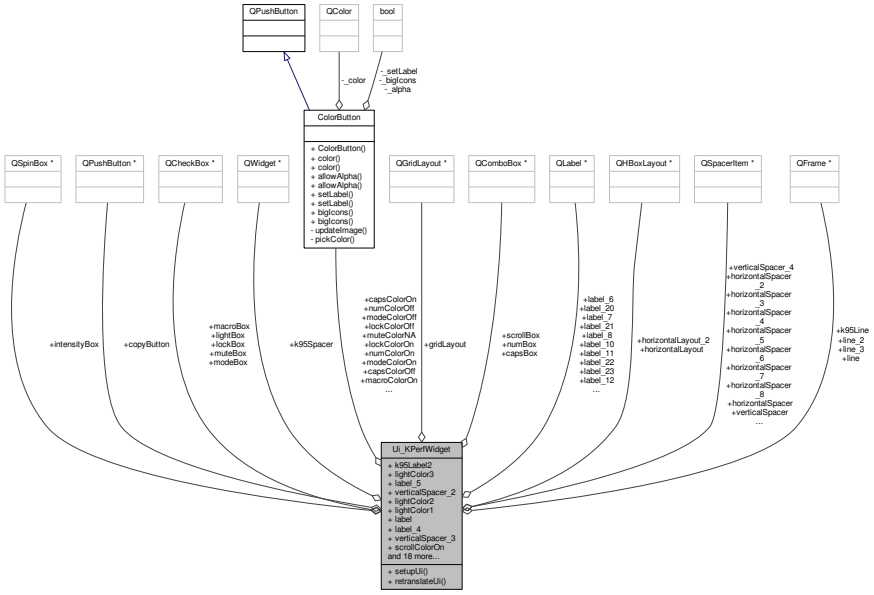

Public Member Functions

- void setupUi (QWidget *KPerfWidget)
- void retranslateUi (QWidget *KPerfWidget)

Data Fields

- QGridLayout * gridLayout
- QWidget * k95Spacer
- QLabel * label_10
- ColorButton * lockColorOff
- QFrame * line
- QSpacerItem * horizontalSpacer_5
- QLabel * k95Label2
- QLabel * label_12
- ColorButton * modeColorOff
- ColorButton * lightColor3
- QSpacerItem * horizontalSpacer
- QCheckBox * lockBox
- ColorButton * modeColorOn
- QCheckBox * macroBox
- ColorButton * numColorOn
- QComboBox * numBox
- QLabel * label_5
- QSpacerItem * verticalSpacer_2
- ColorButton * lightColor2
- QSpacerItem * horizontalSpacer_7
- QLabel * label_8
- QCheckBox * lightBox
- ColorButton * lightColor1

- QSpacerItem * verticalSpacer_4
- QLabel * label_6
- QLabel * label
- QSpacerItem * horizontalSpacer_6
- ColorButton * lockColorOn
- QLabel * label_4
- QSpacerItem * verticalSpacer
- QSpacerItem * verticalSpacer_3
- QCheckBox * modeBox
- ColorButton * capsColorOff
- ColorButton * numColorOff
- ColorButton * capsColorOn
- QFrame * line_3
- QLabel * label_22
- QComboBox * scrollBox
- QLabel * label_7
- ColorButton * scrollColorOn
- QComboBox * capsBox
- ColorButton * scrollColorOff
- QCheckBox * muteBox
- ColorButton * muteColorOn
- ColorButton * macroColorOff
- QLabel * label_3
- ColorButton * muteColorOff
- QLabel * k95Label3
- ColorButton * macroColorOn
- ColorButton * muteColorNA
- QLabel * label_19
- QFrame * k95Line
- QLabel * label_21
- QLabel * label_24
- QLabel * label_20
- QLabel * label_16
- QLabel * label_14
- QLabel * label_18
- QSpacerItem * horizontalSpacer_2
- QLabel * label_15
- QLabel * k95Label4
- QLabel * label_17
- QLabel * label_11
- QLabel * label_23
- QLabel * k95Label1
- QHBoxLayout * horizontalLayout_2
- QPushButton * copyButton
- QSpacerItem * horizontalSpacer_8
- QHBoxLayout * horizontalLayout
- QLabel * label_2
- QSpacerItem * horizontalSpacer_4
- QSpinBox * intensityBox
- QSpacerItem * horizontalSpacer_3
- QLabel * k95Label5
- QFrame * line_2
- QLabel * k95Label6

12.95.1 Detailed Description

Definition at line 31 of file ui_kperfwidget.h.

12.95.2 Member Function Documentation

12.95.2.1 void Ui_KPerfWidget::retranslateUi (QWidget * *KPerfWidget*) [inline]

Definition at line 589 of file ui_kperfwidget.h.

References capsBox, capsColorOff, capsColorOn, copyButton, intensityBox, k95Label1, k95Label2, k95Label3, k95Label4, k95Label5, k95Label6, label, label_10, label_11, label_12, label_14, label_15, label_16, label_17, label_18, label_19, label_2, label_20, label_21, label_22, label_23, label_24, label_3, label_4, label_5, label_6, label_7, label_8, lightBox, lightColor1, lightColor2, lightColor3, lockBox, lockColorOff, lockColorOn, macroBox, macroColorOff, macroColorOn, modeBox, modeColorOff, modeColorOn, muteBox, muteColorNA, muteColorOff, muteColorOn, numBox, numColorOff, numColorOn, scrollBox, scrollColorOff, and scrollColorOn.

Referenced by setupUi().

```
590     {
591         KPerfWidget->setWindowTitle(QApplication::translate("KPerfWidget", "Form", Q_NULLPTR));
592         label_10->setText(QApplication::translate("KPerfWidget", "100%", Q_NULLPTR));
593         lockColorOff->setText(QString());
594         k95Label2->setText(QApplication::translate("KPerfWidget", "On", Q_NULLPTR));
595         label_12->setText(QApplication::translate("KPerfWidget", "On", Q_NULLPTR));
596         modeColorOff->setText(QString());
597         lightColor3->setText(QString());
598         lockBox->setText(QApplication::translate("KPerfWidget", "Indicate Windows Lock:", Q_NULLPTR)
    );
599         modeColorOn->setText(QString());
600         macroBox->setText(QApplication::translate("KPerfWidget", "Indicate macro recording:",
    Q_NULLPTR));
601         numColorOn->setText(QString());
602         numBox->clear();
603         numBox->insertItems(0, QStringList()
604          << QApplication::translate("KPerfWidget", "Normal", Q_NULLPTR)
605          << QApplication::translate("KPerfWidget", "Always on", Q_NULLPTR)
606          << QApplication::translate("KPerfWidget", "Always off", Q_NULLPTR)
607          << QApplication::translate("KPerfWidget", "RGB indicator", Q_NULLPTR)
608          << QApplication::translate("KPerfWidget", "RGB + normal", Q_NULLPTR)
609         );
610         label_5->setText(QApplication::translate("KPerfWidget", "Num lock:", Q_NULLPTR));
611         lightColor2->setText(QString());
612         label_8->setText(QApplication::translate("KPerfWidget", "Note: many desktop environments do
     not use scroll lock. The indicator may not turn on even when enabled.", Q_NULLPTR));
613         lightBox->setText(QApplication::translate("KPerfWidget", "Indicate brightness:", Q_NULLPTR)
    );
614         lightColor1->setText(QString());
615         label_6->setText(QApplication::translate("KPerfWidget", "Caps lock:", Q_NULLPTR));
616         label->setText(QApplication::translate("KPerfWidget", "Miscellaneous", Q_NULLPTR));
617         lockColorOn->setText(QString());
618         label_4->setText(QApplication::translate("KPerfWidget", "Lock lights", Q_NULLPTR));
619         modeBox->setText(QApplication::translate("KPerfWidget", "Indicate current mode:", Q_NULLPTR)
    );
620         capsColorOff->setText(QString());
621         numColorOff->setText(QString());
622         capsColorOn->setText(QString());
623         label_22->setText(QApplication::translate("KPerfWidget", "Off", Q_NULLPTR));
624         scrollBox->clear();
625         scrollBox->insertItems(0, QStringList()
626          << QApplication::translate("KPerfWidget", "Normal", Q_NULLPTR)
627          << QApplication::translate("KPerfWidget", "Always on", Q_NULLPTR)
628          << QApplication::translate("KPerfWidget", "Always off", Q_NULLPTR)
629          << QApplication::translate("KPerfWidget", "RGB indicator", Q_NULLPTR)
630          << QApplication::translate("KPerfWidget", "RGB + normal", Q_NULLPTR)
631         );
632         label_7->setText(QApplication::translate("KPerfWidget", "Scroll lock:", Q_NULLPTR));
633         scrollColorOn->setText(QString());
634         capsBox->clear();
635         capsBox->insertItems(0, QStringList()
636          << QApplication::translate("KPerfWidget", "Normal", Q_NULLPTR)
637          << QApplication::translate("KPerfWidget", "Always on", Q_NULLPTR)
638          << QApplication::translate("KPerfWidget", "Always off", Q_NULLPTR)
639          << QApplication::translate("KPerfWidget", "RGB indicator", Q_NULLPTR)
640          << QApplication::translate("KPerfWidget", "RGB + normal", Q_NULLPTR)
641         );
642         scrollColorOff->setText(QString());
643         muteBox->setText(QApplication::translate("KPerfWidget", "Indicate mute:", Q_NULLPTR));
```

```
644         muteColorOn->setText(QString());
645         macroColorOff->setText(QString());
646         label_3->setText(QApplication::translate("KPerfWidget", "Top row", Q_NULLPTR));
647         muteColorOff->setText(QString());
648         k95Label3->setText(QApplication::translate("KPerfWidget", "Off", Q_NULLPTR));
649         macroColorOn->setText(QString());
650 #ifndef QT_NO_TOOLTIP
651         muteColorNA->setToolTip(QApplication::translate("KPerfWidget", "If the sound device does
      not support muting, or if mute status is unknown, this color will be displayed.", Q_NULLPTR));
652 #endif // QT_NO_TOOLTIP
653         muteColorNA->setText(QString());
654         label_19->setText(QApplication::translate("KPerfWidget", "On", Q_NULLPTR));
655         label_21->setText(QApplication::translate("KPerfWidget", "On", Q_NULLPTR));
656         label_24->setText(QApplication::translate("KPerfWidget", "Off", Q_NULLPTR));
657         label_20->setText(QApplication::translate("KPerfWidget", "On", Q_NULLPTR));
658         label_16->setText(QApplication::translate("KPerfWidget", "67%", Q_NULLPTR));
659         label_14->setText(QApplication::translate("KPerfWidget", "Off", Q_NULLPTR));
660         label_18->setText(QApplication::translate("KPerfWidget", "33%", Q_NULLPTR));
661         label_15->setText(QApplication::translate("KPerfWidget", "Off", Q_NULLPTR));
662         k95Label4->setText(QApplication::translate("KPerfWidget", "On", Q_NULLPTR));
663         label_17->setText(QApplication::translate("KPerfWidget", "Unknown", Q_NULLPTR));
664         label_11->setText(QApplication::translate("KPerfWidget", "On", Q_NULLPTR));
665         label_23->setText(QApplication::translate("KPerfWidget", "Off", Q_NULLPTR));
666         k95Label1->setText(QApplication::translate("KPerfWidget", "K95 buttons", Q_NULLPTR));
667         copyButton->setText(QApplication::translate("KPerfWidget", "Copy to mode...", Q_NULLPTR))
    ;
668         label_2->setText(QApplication::translate("KPerfWidget", "Indicator intensity:", Q_NULLPTR));
669         intensityBox->setSuffix(QApplication::translate("KPerfWidget", "%", Q_NULLPTR));
670         k95Label5->setText(QApplication::translate("KPerfWidget", "Off", Q_NULLPTR));
671         k95Label6->setText(QApplication::translate("KPerfWidget", "Note: macro recording not yet
     implemented. Indicator will always display \"off\".", Q_NULLPTR));
672     } // retranslateUi
```

Here is the caller graph for this function:



12.95.2.2 void Ui_KPerfWidget::setupUi (QWidget * *KPerfWidget*) [inline]

Definition at line 111 of file ui_kperfwidget.h.

References capsBox, capsColorOff, capsColorOn, copyButton, gridLayout, horizontalLayout, horizontalLayout_2, horizontalSpacer, horizontalSpacer_2, horizontalSpacer_3, horizontalSpacer_4, horizontalSpacer_5, horizontalSpacer_6, horizontalSpacer_7, horizontalSpacer_8, intensityBox, k95Label1, k95Label2, k95Label3, k95Label4, k95Label5, k95Label6, k95Line, k95Spacer, label, label_10, label_11, label_12, label_14, label_15, label_16, label_17, label_18, label_19, label_2, label_20, label_21, label_22, label_23, label_24, label_3, label_4, label_5, label_6, label_7, label_8, lightBox, lightColor1, lightColor2, lightColor3, line, line_2, line_3, lockBox, lockColorOff, lockColorOn, macroBox, macroColorOff, macroColorOn, modeBox, modeColorOff, modeColorOn, muteBox, muteColorNA, muteColorOff, muteColorOn, numBox, numColorOff, numColorOn, retranslateUi(), scrollBox, scrollColorOff, scrollColorOn, verticalSpacer, verticalSpacer_2, verticalSpacer_3, and verticalSpacer_4.

Referenced by KPerfWidget::KPerfWidget().

```
112     {
113         if (KPerfWidget->objectName().isEmpty())
114             KPerfWidget->setObjectName(QStringLiteral("KPerfWidget"));
115         KPerfWidget->resize(840, 679);
116         gridLayout = new QGridLayout(KPerfWidget);
117         gridLayout->setObjectName(QStringLiteral("gridLayout"));
118         k95Spacer = new QWidget(KPerfWidget);
119         k95Spacer->setObjectName(QStringLiteral("k95Spacer"));
120         QSizePolicy sizePolicy(QSizePolicy::Fixed, QSizePolicy::Fixed);
121         sizePolicy.setHorizontalStretch(0);
122         sizePolicy.setVerticalStretch(0);
123         sizePolicy.setHeightForWidth(k95Spacer->sizePolicy().hasHeightForWidth());
124         k95Spacer->setSizePolicy(sizePolicy);
125         k95Spacer->setMinimumSize(QSize(15, 10));
```

```
126         k95Spacer->setMaximumSize(QSize(15, 10));
127 
128         gridLayout->addWidget(k95Spacer, 12, 4, 1, 1);
129 
130         label_10 = new QLabel(KPerfWidget);
131         label_10->setObjectName(QStringLiteral("label_10"));
132 
133         gridLayout->addWidget(label_10, 15, 5, 1, 1);
134 
135         lockColorOff = new ColorButton(KPerfWidget);
136         lockColorOff->setObjectName(QStringLiteral("lockColorOff"));
137         sizePolicy.setHeightForWidth(lockColorOff->sizePolicy().hasHeightForWidth());
138         lockColorOff->setSizePolicy(sizePolicy);
139         lockColorOff->setMinimumSize(QSize(0, 40));
140         lockColorOff->setMaximumSize(QSize(16777215, 40));
141 
142         gridLayout->addWidget(lockColorOff, 16, 7, 1, 1);
143 
144         line = new QFrame(KPerfWidget);
145         line->setObjectName(QStringLiteral("line"));
146         line->setFrameShape(QFrame::HLine);
147         line->setFrameShadow(QFrame::Sunken);
148 
149         gridLayout->addWidget(line, 2, 0, 1, 13);
150 
151         horizontalSpacer_5 = new QSpacerItem(10, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
152 
153         gridLayout->addItem(horizontalSpacer_5, 17, 6, 1, 1);
154 
155         k95Label2 = new QLabel(KPerfWidget);
156         k95Label2->setObjectName(QStringLiteral("k95Label2"));
157 
158         gridLayout->addWidget(k95Label2, 9, 5, 1, 1);
159 
160         label_12 = new QLabel(KPerfWidget);
161         label_12->setObjectName(QStringLiteral("label_12"));
162 
163         gridLayout->addWidget(label_12, 17, 5, 1, 1);
164 
165         modeColorOff = new ColorButton(KPerfWidget);
166         modeColorOff->setObjectName(QStringLiteral("modeColorOff"));
167         sizePolicy.setHeightForWidth(modeColorOff->sizePolicy().hasHeightForWidth());
168         modeColorOff->setSizePolicy(sizePolicy);
169         modeColorOff->setMinimumSize(QSize(0, 40));
170         modeColorOff->setMaximumSize(QSize(16777215, 40));
171 
172         gridLayout->addWidget(modeColorOff, 9, 7, 1, 1);
173 
174         lightColor3 = new ColorButton(KPerfWidget);
175         lightColor3->setObjectName(QStringLiteral("lightColor3"));
176         sizePolicy.setHeightForWidth(lightColor3->sizePolicy().hasHeightForWidth());
177         lightColor3->setSizePolicy(sizePolicy);
178         lightColor3->setMinimumSize(QSize(0, 40));
179         lightColor3->setMaximumSize(QSize(16777215, 40));
180 
181         gridLayout->addWidget(lightColor3, 15, 4, 1, 1);
182 
183         horizontalSpacer = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
184 
185         gridLayout->addItem(horizontalSpacer, 15, 12, 1, 1);
186 
187         lockBox = new QCheckBox(KPerfWidget);
188         lockBox->setObjectName(QStringLiteral("lockBox"));
189 
190         gridLayout->addWidget(lockBox, 16, 1, 1, 2);
191 
192         modeColorOn = new ColorButton(KPerfWidget);
193         modeColorOn->setObjectName(QStringLiteral("modeColorOn"));
194         sizePolicy.setHeightForWidth(modeColorOn->sizePolicy().hasHeightForWidth());
195         modeColorOn->setSizePolicy(sizePolicy);
196         modeColorOn->setMinimumSize(QSize(0, 40));
197         modeColorOn->setMaximumSize(QSize(16777215, 40));
198 
199         gridLayout->addWidget(modeColorOn, 9, 4, 1, 1);
200 
201         macroBox = new QCheckBox(KPerfWidget);
202         macroBox->setObjectName(QStringLiteral("macroBox"));
203 
204         gridLayout->addWidget(macroBox, 10, 1, 1, 2);
205 
206         numColorOn = new ColorButton(KPerfWidget);
207         numColorOn->setObjectName(QStringLiteral("numColorOn"));
208         sizePolicy.setHeightForWidth(numColorOn->sizePolicy().hasHeightForWidth());
209         numColorOn->setSizePolicy(sizePolicy);
210         numColorOn->setMinimumSize(QSize(0, 40));
```

```
211         numColorOn->setMaximumSize(QSize(16777215, 40));
212
213         gridLayout->addWidget(numColorOn, 21, 4, 1, 1);
214
215         numBox = new QComboBox(KPerfWidget);
216         numBox->setObjectName(QStringLiteral("numBox"));
217
218         gridLayout->addWidget(numBox, 21, 2, 1, 1);
219
220         label_5 = new QLabel(KPerfWidget);
221         label_5->setObjectName(QStringLiteral("label_5"));
222
223         gridLayout->addWidget(label_5, 21, 1, 1, 1);
224
225         verticalSpacer_2 = new QSpacerItem(20, 20, QSizePolicy::Minimum, QSizePolicy::Fixed
    );
226
227         gridLayout->addItem(verticalSpacer_2, 4, 1, 1, 1);
228
229         lightColor2 = new ColorButton(KPerfWidget);
230         lightColor2->setObjectName(QStringLiteral("lightColor2"));
231         sizePolicy.setHeightForWidth(lightColor2->sizePolicy().hasHeightForWidth());
232         lightColor2->setSizePolicy(sizePolicy);
233         lightColor2->setMinimumSize(QSize(0, 40));
234         lightColor2->setMaximumSize(QSize(16777215, 40));
235
236         gridLayout->addWidget(lightColor2, 15, 7, 1, 1);
237
238         horizontalSpacer_7 = new QSpacerItem(10, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
239
240         gridLayout->addItem(horizontalSpacer_7, 17, 3, 1, 1);
241
242         label_8 = new QLabel(KPerfWidget);
243         label_8->setObjectName(QStringLiteral("label_8"));
244         QFont font;
245         font.setPointSize(8);
246         font.setItalic(true);
247         label_8->setFont(font);
248
249         gridLayout->addWidget(label_8, 25, 1, 1, 12);
250
251         lightBox = new QCheckBox(KPerfWidget);
252         lightBox->setObjectName(QStringLiteral("lightBox"));
253
254         gridLayout->addWidget(lightBox, 15, 1, 1, 2);
255
256         lightColor1 = new ColorButton(KPerfWidget);
257         lightColor1->setObjectName(QStringLiteral("lightColor1"));
258         sizePolicy.setHeightForWidth(lightColor1->sizePolicy().hasHeightForWidth());
259         lightColor1->setSizePolicy(sizePolicy);
260         lightColor1->setMinimumSize(QSize(0, 40));
261         lightColor1->setMaximumSize(QSize(16777215, 40));
262
263         gridLayout->addWidget(lightColor1, 15, 10, 1, 1);
264
265         verticalSpacer_4 = new QSpacerItem(0, 5, QSizePolicy::Minimum, QSizePolicy::Fixed);
266
267         gridLayout->addItem(verticalSpacer_4, 24, 4, 1, 1);
268
269         label_6 = new QLabel(KPerfWidget);
270         label_6->setObjectName(QStringLiteral("label_6"));
271
272         gridLayout->addWidget(label_6, 22, 1, 1, 1);
273
274         label = new QLabel(KPerfWidget);
275         label->setObjectName(QStringLiteral("label"));
276         QFont font1;
277         font1.setBold(true);
278         font1.setWeight(75);
279         label->setFont(font1);
280
281         gridLayout->addWidget(label, 1, 0, 1, 13);
282
283         horizontalSpacer_6 = new QSpacerItem(10, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
284
285         gridLayout->addItem(horizontalSpacer_6, 17, 9, 1, 1);
286
287         lockColorOn = new ColorButton(KPerfWidget);
288         lockColorOn->setObjectName(QStringLiteral("lockColorOn"));
289         sizePolicy.setHeightForWidth(lockColorOn->sizePolicy().hasHeightForWidth());
290         lockColorOn->setSizePolicy(sizePolicy);
291         lockColorOn->setMinimumSize(QSize(0, 40));
292         lockColorOn->setMaximumSize(QSize(16777215, 40));
293
294         gridLayout->addWidget(lockColorOn, 16, 4, 1, 1);
```

```
295
296         label_4 = new QLabel(KPerfWidget);
297         label_4->setObjectName(QStringLiteral("label_4"));
298         label_4->setFont(font1);
299
300         gridLayout->addWidget(label_4, 19, 0, 1, 13);
301
302         verticalSpacer = new QSpacerItem(20, 40, QSizePolicy::Minimum, QSizePolicy::Expanding
    );
303
304         gridLayout->addItem(verticalSpacer, 26, 2, 1, 1);
305
306         verticalSpacer_3 = new QSpacerItem(20, 20, QSizePolicy::Minimum, QSizePolicy::Fixed
    );
307
308         gridLayout->addItem(verticalSpacer_3, 18, 4, 1, 1);
309
310         modeBox = new QCheckBox(KPerfWidget);
311         modeBox->setObjectName(QStringLiteral("modeBox"));
312
313         gridLayout->addWidget(modeBox, 9, 1, 1, 2);
314
315         capsColorOff = new ColorButton(KPerfWidget);
316         capsColorOff->setObjectName(QStringLiteral("capsColorOff"));
317         sizePolicy.setHeightForWidth(capsColorOff->sizePolicy().hasHeightForWidth());
318         capsColorOff->setSizePolicy(sizePolicy);
319         capsColorOff->setMinimumSize(QSize(0, 40));
320         capsColorOff->setMaximumSize(QSize(16777215, 40));
321
322         gridLayout->addWidget(capsColorOff, 22, 7, 1, 1);
323
324         numColorOff = new ColorButton(KPerfWidget);
325         numColorOff->setObjectName(QStringLiteral("numColorOff"));
326         QSizePolicy sizePolicy1(QSizePolicy::Fixed, QSizePolicy::Fixed);
327         sizePolicy1.setHorizontalStretch(0);
328         sizePolicy1.setVerticalStretch(40);
329         sizePolicy1.setHeightForWidth(numColorOff->sizePolicy().hasHeightForWidth());
330         numColorOff->setSizePolicy(sizePolicy1);
331         numColorOff->setMaximumSize(QSize(16777215, 40));
332
333         gridLayout->addWidget(numColorOff, 21, 7, 1, 1);
334
335         capsColorOn = new ColorButton(KPerfWidget);
336         capsColorOn->setObjectName(QStringLiteral("capsColorOn"));
337         sizePolicy.setHeightForWidth(capsColorOn->sizePolicy().hasHeightForWidth());
338         capsColorOn->setSizePolicy(sizePolicy);
339         capsColorOn->setMinimumSize(QSize(0, 40));
340         capsColorOn->setMaximumSize(QSize(16777215, 40));
341
342         gridLayout->addWidget(capsColorOn, 22, 4, 1, 1);
343
344         line_3 = new QFrame(KPerfWidget);
345         line_3->setObjectName(QStringLiteral("line_3"));
346         line_3->setFrameShape(QFrame::HLine);
347         line_3->setFrameShadow(QFrame::Sunken);
348
349         gridLayout->addWidget(line_3, 20, 0, 1, 13);
350
351         label_22 = new QLabel(KPerfWidget);
352         label_22->setObjectName(QStringLiteral("label_22"));
353
354         gridLayout->addWidget(label_22, 21, 8, 1, 1);
355
356         scrollBox = new QComboBox(KPerfWidget);
357         scrollBox->setObjectName(QStringLiteral("scrollBox"));
358
359         gridLayout->addWidget(scrollBox, 23, 2, 1, 1);
360
361         label_7 = new QLabel(KPerfWidget);
362         label_7->setObjectName(QStringLiteral("label_7"));
363
364         gridLayout->addWidget(label_7, 23, 1, 1, 1);
365
366         scrollColorOn = new ColorButton(KPerfWidget);
367         scrollColorOn->setObjectName(QStringLiteral("scrollColorOn"));
368         sizePolicy.setHeightForWidth(scrollColorOn->sizePolicy().hasHeightForWidth());
369         scrollColorOn->setSizePolicy(sizePolicy);
370         scrollColorOn->setMinimumSize(QSize(0, 40));
371         scrollColorOn->setMaximumSize(QSize(16777215, 40));
372
373         gridLayout->addWidget(scrollColorOn, 23, 4, 1, 1);
374
375         capsBox = new QComboBox(KPerfWidget);
376         capsBox->setObjectName(QStringLiteral("capsBox"));
377
378         gridLayout->addWidget(capsBox, 22, 2, 1, 1);
379
```

```
380         scrollColorOff = new ColorButton(KPerfWidget);
381         scrollColorOff->setObjectName(QStringLiteral("scrollColorOff"));
382         sizePolicy.setHeightForWidth(scrollColorOff->sizePolicy().hasHeightForWidth());
383         scrollColorOff->setSizePolicy(sizePolicy);
384         scrollColorOff->setMinimumSize(QSize(0, 40));
385         scrollColorOff->setMaximumSize(QSize(16777215, 40));
386 
387         gridLayout->addWidget(scrollColorOff, 23, 7, 1, 1);
388 
389         muteBox = new QCheckBox(KPerfWidget);
390         muteBox->setObjectName(QStringLiteral("muteBox"));
391 
392         gridLayout->addWidget(muteBox, 17, 1, 1, 2);
393 
394         muteColorOn = new ColorButton(KPerfWidget);
395         muteColorOn->setObjectName(QStringLiteral("muteColorOn"));
396         sizePolicy.setHeightForWidth(muteColorOn->sizePolicy().hasHeightForWidth());
397         muteColorOn->setSizePolicy(sizePolicy);
398         muteColorOn->setMinimumSize(QSize(0, 40));
399         muteColorOn->setMaximumSize(QSize(16777215, 40));
400 
401         gridLayout->addWidget(muteColorOn, 17, 4, 1, 1);
402 
403         macroColorOff = new ColorButton(KPerfWidget);
404         macroColorOff->setObjectName(QStringLiteral("macroColorOff"));
405         QSizePolicy sizePolicy2(QSizePolicy::Minimum, QSizePolicy::Fixed);
406         sizePolicy2.setHorizontalStretch(0);
407         sizePolicy2.setVerticalStretch(40);
408         sizePolicy2.setHeightForWidth(macroColorOff->sizePolicy().hasHeightForWidth());
409         macroColorOff->setSizePolicy(sizePolicy2);
410         macroColorOff->setMinimumSize(QSize(0, 40));
411 
412         gridLayout->addWidget(macroColorOff, 10, 7, 1, 1);
413 
414         label_3 = new QLabel(KPerfWidget);
415         label_3->setObjectName(QStringLiteral("label_3"));
416         label_3->setFont(font1);
417 
418         gridLayout->addWidget(label_3, 13, 0, 1, 3);
419 
420         muteColorOff = new ColorButton(KPerfWidget);
421         muteColorOff->setObjectName(QStringLiteral("muteColorOff"));
422         sizePolicy.setHeightForWidth(muteColorOff->sizePolicy().hasHeightForWidth());
423         muteColorOff->setSizePolicy(sizePolicy);
424         muteColorOff->setMinimumSize(QSize(0, 40));
425         muteColorOff->setMaximumSize(QSize(16777215, 40));
426 
427         gridLayout->addWidget(muteColorOff, 17, 7, 1, 1);
428 
429         k95Label3 = new QLabel(KPerfWidget);
430         k95Label3->setObjectName(QStringLiteral("k95Label3"));
431 
432         gridLayout->addWidget(k95Label3, 9, 8, 1, 1);
433 
434         macroColorOn = new ColorButton(KPerfWidget);
435         macroColorOn->setObjectName(QStringLiteral("macroColorOn"));
436         sizePolicy2.setHeightForWidth(macroColorOn->sizePolicy().hasHeightForWidth());
437         macroColorOn->setSizePolicy(sizePolicy2);
438         macroColorOn->setMinimumSize(QSize(0, 40));
439 
440         gridLayout->addWidget(macroColorOn, 10, 4, 1, 1);
441 
442         muteColorNA = new ColorButton(KPerfWidget);
443         muteColorNA->setObjectName(QStringLiteral("muteColorNA"));
444         muteColorNA->setMinimumSize(QSize(0, 40));
445         muteColorNA->setMaximumSize(QSize(16777215, 40));
446 
447         gridLayout->addWidget(muteColorNA, 17, 10, 1, 1);
448 
449         label_19 = new QLabel(KPerfWidget);
450         label_19->setObjectName(QStringLiteral("label_19"));
451 
452         gridLayout->addWidget(label_19, 21, 5, 1, 1);
453 
454         k95Line = new QFrame(KPerfWidget);
455         k95Line->setObjectName(QStringLiteral("k95Line"));
456         k95Line->setFrameShape(QFrame::HLine);
457         k95Line->setFrameShadow(QFrame::Sunken);
458 
459         gridLayout->addWidget(k95Line, 8, 0, 1, 13);
460 
461         label_21 = new QLabel(KPerfWidget);
462         label_21->setObjectName(QStringLiteral("label_21"));
463 
464         gridLayout->addWidget(label_21, 23, 5, 1, 1);
465 
466         label_24 = new QLabel(KPerfWidget);
```

```
467         label_24->setObjectName(QStringLiteral("label_24"));
468
469         gridLayout->addWidget(label_24, 23, 8, 1, 1);
470
471         label_20 = new QLabel(KPerfWidget);
472         label_20->setObjectName(QStringLiteral("label_20"));
473
474         gridLayout->addWidget(label_20, 22, 5, 1, 1);
475
476         label_16 = new QLabel(KPerfWidget);
477         label_16->setObjectName(QStringLiteral("label_16"));
478
479         gridLayout->addWidget(label_16, 15, 8, 1, 1);
480
481         label_14 = new QLabel(KPerfWidget);
482         label_14->setObjectName(QStringLiteral("label_14"));
483
484         gridLayout->addWidget(label_14, 17, 8, 1, 1);
485
486         label_18 = new QLabel(KPerfWidget);
487         label_18->setObjectName(QStringLiteral("label_18"));
488
489         gridLayout->addWidget(label_18, 15, 11, 1, 1);
490
491         horizontalSpacer_2 = new QSpacerItem(5, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
492
493         gridLayout->addItem(horizontalSpacer_2, 15, 0, 1, 1);
494
495         label_15 = new QLabel(KPerfWidget);
496         label_15->setObjectName(QStringLiteral("label_15"));
497
498         gridLayout->addWidget(label_15, 16, 8, 1, 1);
499
500         k95Label4 = new QLabel(KPerfWidget);
501         k95Label4->setObjectName(QStringLiteral("k95Label4"));
502
503         gridLayout->addWidget(k95Label4, 10, 5, 1, 1);
504
505         label_17 = new QLabel(KPerfWidget);
506         label_17->setObjectName(QStringLiteral("label_17"));
507
508         gridLayout->addWidget(label_17, 17, 11, 1, 1);
509
510         label_11 = new QLabel(KPerfWidget);
511         label_11->setObjectName(QStringLiteral("label_11"));
512
513         gridLayout->addWidget(label_11, 16, 5, 1, 1);
514
515         label_23 = new QLabel(KPerfWidget);
516         label_23->setObjectName(QStringLiteral("label_23"));
517
518         gridLayout->addWidget(label_23, 22, 8, 1, 1);
519
520         k95Label1 = new QLabel(KPerfWidget);
521         k95Label1->setObjectName(QStringLiteral("k95Label1"));
522         k95Label1->setFont(font1);
523
524         gridLayout->addWidget(k95Label1, 7, 0, 1, 5);
525
526         horizontalLayout_2 = new QHBoxLayout();
527         horizontalLayout_2->setObjectName(QStringLiteral("horizontalLayout_2"));
528         copyButton = new QPushButton(KPerfWidget);
529         copyButton->setObjectName(QStringLiteral("copyButton"));
530
531         horizontalLayout_2->addWidget(copyButton);
532
533         horizontalSpacer_8 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
534
535         horizontalLayout_2->addItem(horizontalSpacer_8);
536
537
538         gridLayout->addLayout(horizontalLayout_2, 3, 10, 1, 3);
539
540         horizontalLayout = new QHBoxLayout();
541         horizontalLayout->setObjectName(QStringLiteral("horizontalLayout"));
542         label_2 = new QLabel(KPerfWidget);
543         label_2->setObjectName(QStringLiteral("label_2"));
544
545         horizontalLayout->addWidget(label_2);
546
547         horizontalSpacer_4 = new QSpacerItem(10, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
548
549         horizontalLayout->addItem(horizontalSpacer_4);
550
```

```
551         intensityBox = new QSpinBox(KPerfWidget);
552         intensityBox->setObjectName(QStringLiteral("intensityBox"));
553         intensityBox->setMaximum(100);
554         intensityBox->setValue(100);
555 
556         horizontalLayout->addWidget(intensityBox);
557 
558         horizontalSpacer_3 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
559 
560         horizontalLayout->addItem(horizontalSpacer_3);
561 
562 
563         gridLayout->addLayout(horizontalLayout, 3, 1, 1, 9);
564 
565         k95Label5 = new QLabel(KPerfWidget);
566         k95Label5->setObjectName(QStringLiteral("k95Label5"));
567 
568         gridLayout->addWidget(k95Label5, 10, 8, 1, 1);
569 
570         line_2 = new QFrame(KPerfWidget);
571         line_2->setObjectName(QStringLiteral("line_2"));
572         line_2->setFrameShape(QFrame::HLine);
573         line_2->setFrameShadow(QFrame::Sunken);
574 
575         gridLayout->addWidget(line_2, 14, 0, 1, 13);
576 
577         k95Label6 = new QLabel(KPerfWidget);
578         k95Label6->setObjectName(QStringLiteral("k95Label6"));
579         k95Label6->setFont(font);
580 
581         gridLayout->addWidget(k95Label6, 11, 1, 1, 10);
582 
583 
584         retranslateUi(KPerfWidget);
585 
586         QMetaObject::connectSlotsByName(KPerfWidget);
587     } // setupUi
```

Here is the call graph for this function:



Here is the caller graph for this function:

12.95.3 Field Documentation

12.95.3.1 QComboBox* Ui_KPerfWidget::capsBox

Definition at line 74 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), retranslateUi(), and setupUi().

12.95.3.2 ColorButton* Ui_KPerfWidget::capsColorOff

Definition at line 66 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), retranslateUi(), and setupUi().

12.95.3.3 ColorButton* Ui_KPerfWidget::capsColorOn

Definition at line 68 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), retranslateUi(), and setupUi().

12.95.3.4 QPushButton* Ui_KPerfWidget::copyButton

Definition at line 100 of file ui_kperfwidget.h.

Referenced by retranslateUi(), and setupUi().

12.95.3.5 QGridLayout* Ui_KPerfWidget::gridLayout

Definition at line 34 of file ui_kperfwidget.h.

Referenced by setupUi().

12.95.3.6 QHBoxLayout* Ui_KPerfWidget::horizontalLayout

Definition at line 102 of file ui_kperfwidget.h.

Referenced by setupUi().

12.95.3.7 QHBoxLayout* Ui_KPerfWidget::horizontalLayout_2

Definition at line 99 of file ui_kperfwidget.h.

Referenced by setupUi().

12.95.3.8 QSpacerItem* Ui_KPerfWidget::horizontalSpacer

Definition at line 44 of file ui_kperfwidget.h.

Referenced by setupUi().

12.95.3.9 QSpacerItem* Ui_KPerfWidget::horizontalSpacer_2

Definition at line 92 of file ui_kperfwidget.h.

Referenced by setupUi().

12.95.3.10 QSpacerItem* Ui_KPerfWidget::horizontalSpacer_3

Definition at line 106 of file ui_kperfwidget.h.

Referenced by setupUi().

12.95.3.11 QSpacerItem* Ui_KPerfWidget::horizontalSpacer_4

Definition at line 104 of file ui_kperfwidget.h.

Referenced by setupUi().

12.95.3.12 QSpacerItem* Ui_KPerfWidget::horizontalSpacer_5

Definition at line 39 of file ui_kperfwidget.h.

Referenced by setupUi().

12.95.3.13 QSpacerItem* Ui_KPerfWidget::horizontalSpacer_6

Definition at line 60 of file ui_kperfwidget.h.

Referenced by setupUi().

12.95.3.14 QSpacerItem* Ui_KPerfWidget::horizontalSpacer_7

Definition at line 53 of file ui_kperfwidget.h.

Referenced by setupUi().

12.95.3.15 QSpacerItem* Ui_KPerfWidget::horizontalSpacer_8

Definition at line 101 of file ui_kperfwidget.h.

Referenced by setupUi().

12.95.3.16 QSpinBox* Ui_KPerfWidget::intensityBox

Definition at line 105 of file ui_kperfwidget.h.

Referenced by retranslateUi(), KPerfWidget::setPerf(), and setupUi().

12.95.3.17 QLabel* Ui_KPerfWidget::k95Label1

Definition at line 98 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), retranslateUi(), and setupUi().

12.95.3.18 QLabel* Ui_KPerfWidget::k95Label2

Definition at line 40 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), retranslateUi(), and setupUi().

12.95.3.19 QLabel* Ui_KPerfWidget::k95Label3

Definition at line 81 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), retranslateUi(), and setupUi().

12.95.3.20 QLabel* Ui_KPerfWidget::k95Label4

Definition at line 94 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), retranslateUi(), and setupUi().

12.95.3.21 QLabel* Ui_KPerfWidget::k95Label5

Definition at line 107 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), retranslateUi(), and setupUi().

12.95.3.22 QLabel* Ui_KPerfWidget::k95Label6

Definition at line 109 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), retranslateUi(), and setupUi().

12.95.3.23 QFrame* Ui_KPerfWidget::k95Line

Definition at line 85 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), and setupUi().

12.95.3.24 QWidget* Ui_KPerfWidget::k95Spacer

Definition at line 35 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), and setupUi().

12.95.3.25 QLabel* Ui_KPerfWidget::label

Definition at line 59 of file ui_kperfwidget.h.

Referenced by retranslateUi(), and setupUi().

12.95.3.26 QLabel* Ui_KPerfWidget::label_10

Definition at line 36 of file ui_kperfwidget.h.

Referenced by retranslateUi(), and setupUi().

12.95.3.27 QLabel* Ui_KPerfWidget::label_11

Definition at line 96 of file ui_kperfwidget.h.

Referenced by retranslateUi(), and setupUi().

12.95.3.28 QLabel* Ui_KPerfWidget::label_12

Definition at line 41 of file ui_kperfwidget.h.

Referenced by retranslateUi(), KPerfWidget::setPerf(), and setupUi().

12.95.3.29 QLabel* Ui_KPerfWidget::label_14

Definition at line 90 of file ui_kperfwidget.h.

Referenced by retranslateUi(), KPerfWidget::setPerf(), and setupUi().

12.95.3.30 QLabel* Ui_KPerfWidget::label_15

Definition at line 93 of file ui_kperfwidget.h.

Referenced by retranslateUi(), and setupUi().

12.95.3.31 QLabel* Ui_KPerfWidget::label_16

Definition at line 89 of file ui_kperfwidget.h.

Referenced by retranslateUi(), and setupUi().

12.95.3.32 QLabel* Ui_KPerfWidget::label_17

Definition at line 95 of file ui_kperfwidget.h.

Referenced by retranslateUi(), KPerfWidget::setPerf(), and setupUi().

12.95.3.33 QLabel* Ui_KPerfWidget::label_18

Definition at line 91 of file ui_kperfwidget.h.

Referenced by retranslateUi(), and setupUi().

12.95.3.34 QLabel* Ui_KPerfWidget::label_19

Definition at line 84 of file ui_kperfwidget.h.

Referenced by retranslateUi(), and setupUi().

12.95.3.35 QLabel* Ui_KPerfWidget::label_2

Definition at line 103 of file ui_kperfwidget.h.

Referenced by retranslateUi(), and setupUi().

12.95.3.36 QLabel* Ui_KPerfWidget::label_20

Definition at line 88 of file ui_kperfwidget.h.

Referenced by retranslateUi(), and setupUi().

12.95.3.37 QLabel* Ui_KPerfWidget::label_21

Definition at line 86 of file ui_kperfwidget.h.

Referenced by retranslateUi(), and setupUi().

12.95.3.38 QLabel* Ui_KPerfWidget::label_22

Definition at line 70 of file ui_kperfwidget.h.

Referenced by retranslateUi(), and setupUi().

12.95.3.39 QLabel* Ui_KPerfWidget::label_23

Definition at line 97 of file ui_kperfwidget.h.

Referenced by retranslateUi(), and setupUi().

12.95.3.40 QLabel* Ui_KPerfWidget::label_24

Definition at line 87 of file ui_kperfwidget.h.

Referenced by retranslateUi(), and setupUi().

12.95.3.41 QLabel* Ui_KPerfWidget::label_3

Definition at line 79 of file ui_kperfwidget.h.

Referenced by retranslateUi(), and setupUi().

12.95.3.42 QLabel* Ui_KPerfWidget::label_4

Definition at line 62 of file ui_kperfwidget.h.

Referenced by retranslateUi(), and setupUi().

12.95.3.43 QLabel* Ui_KPerfWidget::label_5

Definition at line 50 of file ui_kperfwidget.h.

Referenced by retranslateUi(), and setupUi().

12.95.3.44 QLabel* Ui_KPerfWidget::label_6

Definition at line 58 of file ui_kperfwidget.h.

Referenced by retranslateUi(), and setupUi().

12.95.3.45 QLabel* Ui_KPerfWidget::label_7

Definition at line 72 of file ui_kperfwidget.h.

Referenced by retranslateUi(), and setupUi().

12.95.3.46 QLabel* Ui_KPerfWidget::label_8

Definition at line 54 of file ui_kperfwidget.h.

Referenced by retranslateUi(), and setupUi().

12.95.3.47 QCheckBox* Ui_KPerfWidget::lightBox

Definition at line 55 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), retranslateUi(), and setupUi().

12.95.3.48 ColorButton* Ui_KPerfWidget::lightColor1

Definition at line 56 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), retranslateUi(), and setupUi().

12.95.3.49 ColorButton* Ui_KPerfWidget::lightColor2

Definition at line 52 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), retranslateUi(), and setupUi().

12.95.3.50 ColorButton* Ui_KPerfWidget::lightColor3

Definition at line 43 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), retranslateUi(), and setupUi().

12.95.3.51 QFrame* Ui_KPerfWidget::line

Definition at line 38 of file ui_kperfwidget.h.

Referenced by setupUi().

12.95.3.52 QFrame* Ui_KPerfWidget::line_2

Definition at line 108 of file ui_kperfwidget.h.

Referenced by setupUi().

12.95.3.53 QFrame* Ui_KPerfWidget::line_3

Definition at line 69 of file ui_kperfwidget.h.

Referenced by setupUi().

12.95.3.54 QCheckBox* Ui_KPerfWidget::lockBox

Definition at line 45 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), retranslateUi(), and setupUi().

12.95.3.55 ColorButton* Ui_KPerfWidget::lockColorOff

Definition at line 37 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), retranslateUi(), and setupUi().

12.95.3.56 ColorButton* Ui_KPerfWidget::lockColorOn

Definition at line 61 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), retranslateUi(), and setupUi().

12.95.3.57 QCheckBox* Ui_KPerfWidget::macroBox

Definition at line 47 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), retranslateUi(), and setupUi().

12.95.3.58 ColorButton* Ui_KPerfWidget::macroColorOff

Definition at line 78 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), retranslateUi(), and setupUi().

12.95.3.59 ColorButton* Ui_KPerfWidget::macroColorOn

Definition at line 82 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), retranslateUi(), and setupUi().

12.95.3.60 QCheckBox* Ui_KPerfWidget::modeBox

Definition at line 65 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), retranslateUi(), and setupUi().

12.95.3.61 ColorButton* Ui_KPerfWidget::modeColorOff

Definition at line 42 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), retranslateUi(), and setupUi().

12.95.3.62 ColorButton* Ui_KPerfWidget::modeColorOn

Definition at line 46 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), retranslateUi(), and setupUi().

12.95.3.63 QCheckBox* Ui_KPerfWidget::muteBox

Definition at line 76 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), retranslateUi(), KPerfWidget::setPerf(), and setupUi().

12.95.3.64 ColorButton* Ui_KPerfWidget::muteColorNA

Definition at line 83 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), retranslateUi(), KPerfWidget::setPerf(), and setupUi().

12.95.3.65 ColorButton* Ui_KPerfWidget::muteColorOff

Definition at line 80 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), retranslateUi(), KPerfWidget::setPerf(), and setupUi().

12.95.3.66 ColorButton* Ui_KPerfWidget::muteColorOn

Definition at line 77 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), retranslateUi(), KPerfWidget::setPerf(), and setupUi().

12.95.3.67 QComboBox* Ui_KPerfWidget::numBox

Definition at line 49 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), retranslateUi(), and setupUi().

12.95.3.68 ColorButton* Ui_KPerfWidget::numColorOff

Definition at line 67 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), retranslateUi(), and setupUi().

12.95.3.69 ColorButton* Ui_KPerfWidget::numColorOn

Definition at line 48 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), retranslateUi(), and setupUi().

12.95.3.70 QComboBox* Ui_KPerfWidget::scrollBox

Definition at line 71 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), retranslateUi(), and setupUi().

12.95.3.71 ColorButton* Ui_KPerfWidget::scrollColorOff

Definition at line 75 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), retranslateUi(), and setupUi().

12.95.3.72 ColorButton* Ui_KPerfWidget::scrollColorOn

Definition at line 73 of file ui_kperfwidget.h.

Referenced by KPerfWidget::KPerfWidget(), retranslateUi(), and setupUi().

12.95.3.73 QSpacerItem* Ui_KPerfWidget::verticalSpacer

Definition at line 63 of file ui_kperfwidget.h.

Referenced by setupUi().

12.95.3.74 QSpacerItem* Ui_KPerfWidget::verticalSpacer_2

Definition at line 51 of file ui_kperfwidget.h.

Referenced by setupUi().

12.95.3.75 QSpacerItem* Ui_KPerfWidget::verticalSpacer_3

Definition at line 64 of file ui_kperfwidget.h.

Referenced by setupUi().

12.95.3.76 QSpacerItem* Ui_KPerfWidget::verticalSpacer_4

Definition at line 57 of file ui_kperfwidget.h.

Referenced by setupUi().

The documentation for this class was generated from the following file:

- src/ckb/ui_kperfwidget.h

12.96 Ui_LayoutDialog Class Reference

`#include <src/ckb/ui_layoutdialog.h>`

Inheritance diagram for Ui_LayoutDialog:

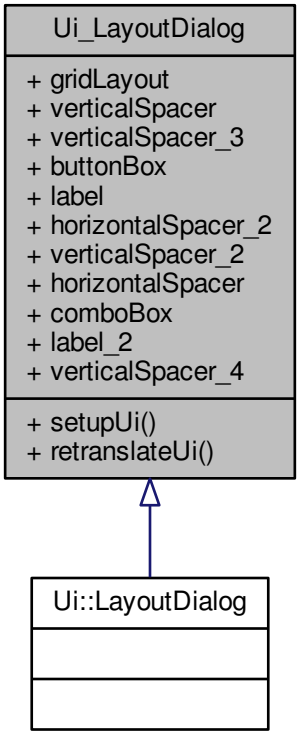

Collaboration diagram for Ui_LayoutDialog:

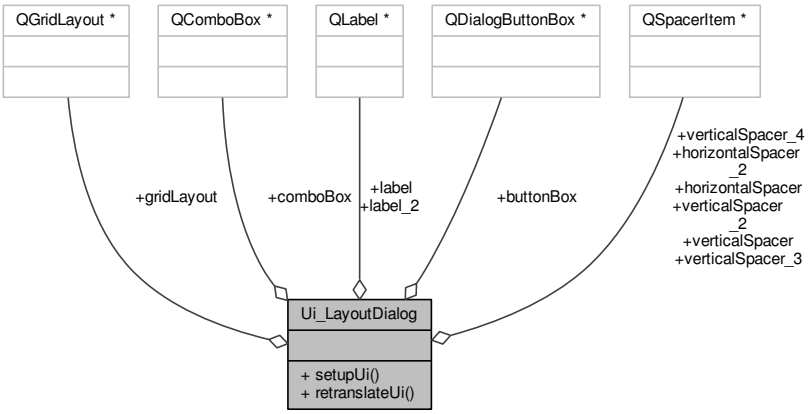

Public Member Functions

- void setupUi (QDialog *LayoutDialog)

- void retranslateUi (QDialog *LayoutDialog)

Data Fields

- QGridLayout * gridLayout
- QSpacerItem * verticalSpacer
- QSpacerItem * verticalSpacer_3
- QDialogButtonBox * buttonBox
- QLabel * label
- QSpacerItem * horizontalSpacer_2
- QSpacerItem * verticalSpacer_2
- QSpacerItem * horizontalSpacer
- QComboBox * comboBox
- QLabel * label_2
- QSpacerItem * verticalSpacer_4

12.96.1 Detailed Description

Definition at line 26 of file ui_layoutdialog.h.

12.96.2 Member Function Documentation

12.96.2.1 void Ui_LayoutDialog::retranslateUi (QDialog * *LayoutDialog*) [inline]

Definition at line 109 of file ui_layoutdialog.h.

References label, and label_2.

Referenced by setupUi().

```
110     {
111         LayoutDialog->setWindowTitle(QApplication::translate("LayoutDialog", "Keyboard Layout", Q_NULLPTR))
    ;
112         label->setText(QApplication::translate("LayoutDialog", "Please select your keyboard layout:",
    Q_NULLPTR));
113         label_2->setText(QApplication::translate("LayoutDialog", "Note: this only controls the
     layout within the ckb application. If your keys are typing the wrong characters, check your system preferences.",
     Q_NULLPTR));
114     } // retranslateUi
```

Here is the caller graph for this function:



12.96.2.2 void Ui_LayoutDialog::setupUi (QDialog * *LayoutDialog*) [inline]

Definition at line 41 of file ui_layoutdialog.h.

References buttonBox, comboBox, gridLayout, horizontalSpacer, horizontalSpacer_2, label, label_2, retranslateUi(), verticalSpacer, verticalSpacer_2, verticalSpacer_3, and verticalSpacer_4.

Referenced by LayoutDialog::LayoutDialog().

```
42      {
43          if (LayoutDialog->objectName().isEmpty())
44              LayoutDialog->setObjectName(QStringLiteral("LayoutDialog"));
45          LayoutDialog->resize(400, 240);
46          gridLayout = new QGridLayout(LayoutDialog);
47          gridLayout->setObjectName(QStringLiteral("gridLayout"));
48          verticalSpacer = new QSpacerItem(20, 40, QSizePolicy::Minimum, QSizePolicy::Expanding
    );
49
50          gridLayout->addItem(verticalSpacer, 6, 0, 1, 3);
51
52          verticalSpacer_3 = new QSpacerItem(20, 40, QSizePolicy::Minimum,
    QSizePolicy::Expanding);
53
54          gridLayout->addItem(verticalSpacer_3, 0, 1, 1, 1);
55
56          buttonBox = new QDialogButtonBox(LayoutDialog);
57          buttonBox->setObjectName(QStringLiteral("buttonBox"));
58          buttonBox->setOrientation(Qt::Horizontal);
59          buttonBox->setStandardButtons(QDialogButtonBox::Ok);
60
61          gridLayout->addWidget(buttonBox, 7, 0, 1, 3);
62
63          label = new QLabel(LayoutDialog);
64          label->setObjectName(QStringLiteral("label"));
65          label->setAlignment(Qt::AlignCenter);
66
67          gridLayout->addWidget(label, 1, 0, 1, 3);
68
69          horizontalSpacer_2 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
70
71          gridLayout->addItem(horizontalSpacer_2, 3, 2, 1, 1);
72
73          verticalSpacer_2 = new QSpacerItem(20, 15, QSizePolicy::Minimum, QSizePolicy::Fixed
    );
74
75          gridLayout->addItem(verticalSpacer_2, 4, 1, 1, 1);
76
77          horizontalSpacer = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
78
79          gridLayout->addItem(horizontalSpacer, 3, 0, 1, 1);
80
81          comboBox = new QComboBox(LayoutDialog);
82          comboBox->setObjectName(QStringLiteral("comboBox"));
83
84          gridLayout->addWidget(comboBox, 3, 1, 1, 1);
85
86          label_2 = new QLabel(LayoutDialog);
87          label_2->setObjectName(QStringLiteral("label_2"));
88          QFont font;
89          font.setPointSize(8);
90          font.setItalic(true);
91          label_2->setFont(font);
92          label_2->setAlignment(Qt::AlignCenter);
93          label_2->setWordWrap(true);
94
95          gridLayout->addWidget(label_2, 5, 0, 1, 3);
96
97          verticalSpacer_4 = new QSpacerItem(20, 5, QSizePolicy::Minimum, QSizePolicy::Fixed)
    ;
98
99          gridLayout->addItem(verticalSpacer_4, 2, 1, 1, 1);
100
101
102          retranslateUi(LayoutDialog);
103          QObject::connect(buttonBox, SIGNAL(accepted()), LayoutDialog, SLOT(accept()));
104          QObject::connect(buttonBox, SIGNAL(rejected()), LayoutDialog, SLOT(reject()));
105
106          QMetaObject::connectSlotsByName(LayoutDialog);
107      } // setupUi
```

Here is the call graph for this function:



Here is the caller graph for this function:

12.96.3 Field Documentation

12.96.3.1 QDialogButtonBox* Ui_LayoutDialog::buttonBox

Definition at line 32 of file ui_layoutdialog.h.

Referenced by setupUi().

12.96.3.2 QComboBox* Ui_LayoutDialog::comboBox

Definition at line 37 of file ui_layoutdialog.h.

Referenced by LayoutDialog::LayoutDialog(), LayoutDialog::selected(), and setupUi().

12.96.3.3 QGridLayout* Ui_LayoutDialog::gridLayout

Definition at line 29 of file ui_layoutdialog.h.

Referenced by setupUi().

12.96.3.4 QSpacerItem* Ui_LayoutDialog::horizontalSpacer

Definition at line 36 of file ui_layoutdialog.h.

Referenced by setupUi().

12.96.3.5 QSpacerItem* Ui_LayoutDialog::horizontalSpacer_2

Definition at line 34 of file ui_layoutdialog.h.

Referenced by setupUi().

12.96.3.6 QLabel* Ui_LayoutDialog::label

Definition at line 33 of file ui_layoutdialog.h.

Referenced by retranslateUi(), and setupUi().

12.96.3.7 QLabel* Ui_LayoutDialog::label_2

Definition at line 38 of file ui_layoutdialog.h.

Referenced by retranslateUi(), and setupUi().

12.96.3.8 QSpacerItem* Ui_LayoutDialog::verticalSpacer

Definition at line 30 of file ui_layoutdialog.h.

Referenced by setupUi().

12.96.3.9 QSpacerItem* Ui_LayoutDialog::verticalSpacer_2

Definition at line 35 of file ui_layoutdialog.h.

Referenced by setupUi().

12.96.3.10 QSpacerItem* Ui_LayoutDialog::verticalSpacer_3

Definition at line 31 of file ui_layoutdialog.h.

Referenced by setupUi().

12.96.3.11 QSpacerItem* Ui_LayoutDialog::verticalSpacer_4

Definition at line 39 of file ui_layoutdialog.h.

Referenced by setupUi().

The documentation for this class was generated from the following file:

- src/ckb/ui_layoutdialog.h

12.97 Ui_MainWindow Class Reference

```
#include <src/ckb/ui_mainwindow.h>
```

Inheritance diagram for Ui_MainWindow:

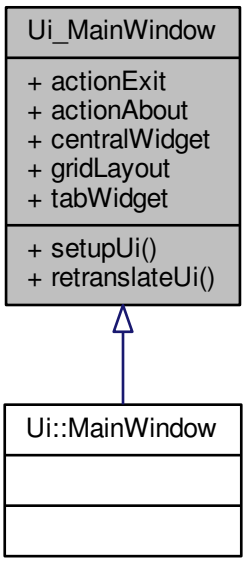

Collaboration diagram for Ui_MainWindow:

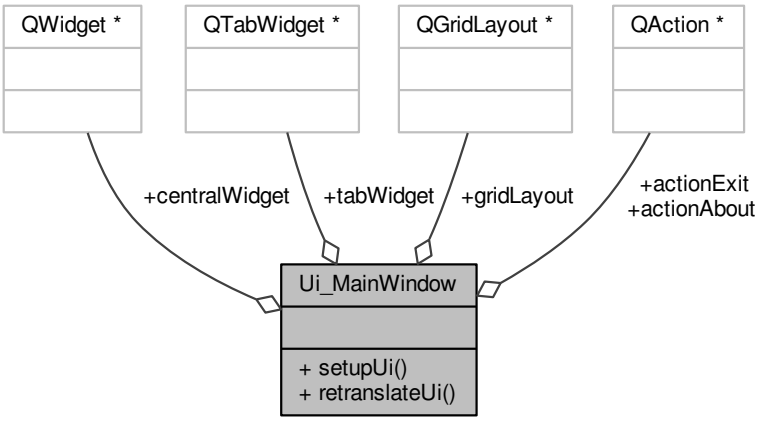

Public Member Functions

- void setupUi (QMainWindow *MainWindow)
- void retranslateUi (QMainWindow *MainWindow)

Data Fields

- QAction * actionExit
- QAction * actionAbout
- QWidget * centralWidget
- QGridLayout * gridLayout
- QTabWidget * tabWidget

12.97.1 Detailed Description

Definition at line 24 of file ui_mainwindow.h.

12.97.2 Member Function Documentation

12.97.2.1 void Ui_MainWindow::retranslateUi (QMainWindow * *MainWindow*) [inline]

Definition at line 68 of file ui_mainwindow.h.

References actionAbout, and actionExit.

Referenced by setupUi().

```
69     {
70         MainWindow->setWindowTitle(QApplication::translate("MainWindow", "ckb-next", Q_NULLPTR));
71         actionExit->setText(QApplication::translate("MainWindow", "Exit", Q_NULLPTR));
72         actionExit->setShortcut(QApplication::translate("MainWindow", "Ctrl+Q", Q_NULLPTR));
73         actionAbout->setText(QApplication::translate("MainWindow", "About", Q_NULLPTR));
74     } // retranslateUi
```

Here is the caller graph for this function:



12.97.2.2 void Ui_MainWindow::setupUi (QMainWindow * *MainWindow*) [inline]

Definition at line 33 of file ui_mainwindow.h.

References actionAbout, actionExit, centralWidget, gridLayout, retranslateUi(), and tabWidget.

Referenced by MainWindow::MainWindow().

```
34     {
35         if (MainWindow->objectName().isEmpty())
36             MainWindow->setObjectName(QStringLiteral("MainWindow"));
37         MainWindow->resize(1000, 750);
38         MainWindow->setMinimumSize(QSize(1000, 750));
39         QIcon icon;
40         icon.addFile(QStringLiteral(":/img/ckb-logo.png"), QSize(), QIcon::Normal, QIcon::Off);
41         MainWindow->setWindowIcon(icon);
42         MainWindow->setUnifiedTitleAndToolBarOnMac(true);
43         actionExit = new QAction(MainWindow);
44         actionExit->setObjectName(QStringLiteral("actionExit"));
45         actionAbout = new QAction(MainWindow);
46         actionAbout->setObjectName(QStringLiteral("actionAbout"));
47         centralWidget = new QWidget(MainWindow);
48         centralWidget->setObjectName(QStringLiteral("centralWidget"));
49         gridLayout = new QGridLayout(centralWidget);
50         gridLayout->setSpacing(6);
```

```
51          gridLayout->setContentsMargins(11, 11, 11, 11);
52          gridLayout->setObjectName(QStringLiteral("gridLayout"));
53          tabWidget = new QTabWidget(centralWidget);
54          tabWidget->setObjectName(QStringLiteral("tabWidget"));
55
56          gridLayout->addWidget(tabWidget, 0, 0, 1, 1);
57
58          MainWindow->setCentralWidget(centralWidget);
59
60          retranslateUi(MainWindow);
61
62          tabWidget->setCurrentIndex(-1);
63
64
65          QMetaObject::connectSlotsByName(MainWindow);
66      } // setupUi
```

Here is the call graph for this function:



Here is the caller graph for this function:

12.97.3 Field Documentation

12.97.3.1 QAction* Ui_MainWindow::actionAbout

Definition at line 28 of file ui_mainwindow.h.

Referenced by retranslateUi(), and setupUi().

12.97.3.2 QAction* Ui_MainWindow::actionExit

Definition at line 27 of file ui_mainwindow.h.

Referenced by MainWindow::MainWindow(), retranslateUi(), and setupUi().

12.97.3.3 QWidget* Ui_MainWindow::centralWidget

Definition at line 29 of file ui_mainwindow.h.

Referenced by setupUi().

12.97.3.4 QGridLayout* Ui_MainWindow::gridLayout

Definition at line 30 of file ui_mainwindow.h.

Referenced by setupUi().

12.97.3.5 QTabWidget* Ui_MainWindow::tabWidget

Definition at line 31 of file ui_mainwindow.h.

Referenced by MainWindow::addDevice(), MainWindow::MainWindow(), MainWindow::removeDevice(), setupUi(), and MainWindow::showFwUpdateNotification().

The documentation for this class was generated from the following file:

- src/ckb/ui_mainwindow.h

12.98 Ui_ModeSelectDialog Class Reference

`#include <src/ckb/ui_modeselectdialog.h>`

Inheritance diagram for Ui_ModeSelectDialog:

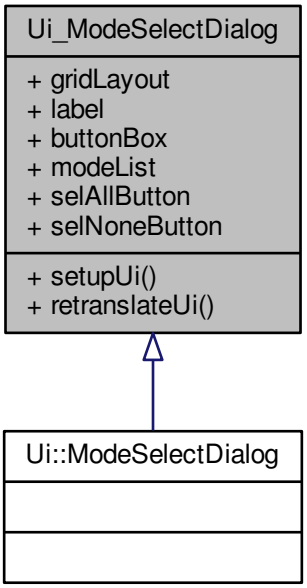

Collaboration diagram for Ui_ModeSelectDialog:

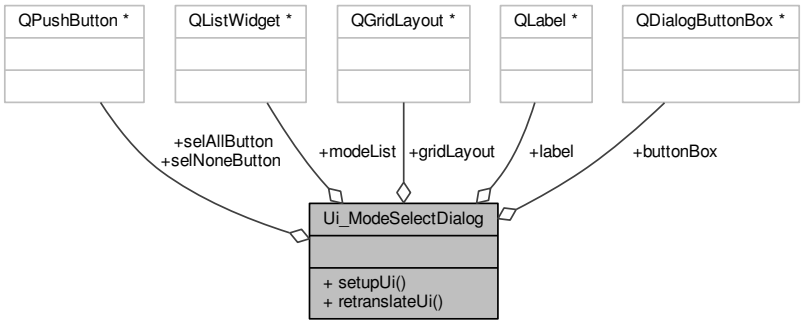

Public Member Functions

- void setupUi (QDialog *ModeSelectDialog)
- void retranslateUi (QDialog *ModeSelectDialog)

Data Fields

- QGridLayout * gridLayout
- QLabel * label
- QDialogButtonBox * buttonBox
- QListWidget * modeList
- QPushButton * selAllButton
- QPushButton * selNoneButton

12.98.1 Detailed Description

Definition at line 26 of file ui_modeselectdialog.h.

12.98.2 Member Function Documentation

12.98.2.1 void Ui_ModeSelectDialog::retranslateUi (QDialog * *ModeSelectDialog*) [inline]

Definition at line 82 of file ui_modeselectdialog.h.

References label, selAllButton, and selNoneButton.

Referenced by setupUi().

```
83     {
84         ModeSelectDialog->setWindowTitle(QApplication::translate("ModeSelectDialog", "Select Modes",
       Q_NULLPTR));
85         label->setText(QApplication::translate("ModeSelectDialog", "TextLabel", Q_NULLPTR));
86         selAllButton->setText(QApplication::translate("ModeSelectDialog", "Select All",
       Q_NULLPTR));
87         selNoneButton->setText(QApplication::translate("ModeSelectDialog", "Select None",
       Q_NULLPTR));
88     } // retranslateUi
```

Here is the caller graph for this function:



12.98.2.2 void Ui_ModeSelectDialog::setupUi (QDialog * *ModeSelectDialog*) [inline]

Definition at line 36 of file ui_modeselectdialog.h.

References buttonBox, gridLayout, label, modeList, retranslateUi(), selAllButton, and selNoneButton.

Referenced by ModeSelectDialog::ModeSelectDialog().

```
37     {
38         if (ModeSelectDialog->objectName().isEmpty())
39             ModeSelectDialog->setObjectName(QStringLiteral("ModeSelectDialog"));
40         ModeSelectDialog->resize(320, 320);
41         gridLayout = new QGridLayout(ModeSelectDialog);
42         gridLayout->setObjectName(QStringLiteral("gridLayout"));
43         label = new QLabel(ModeSelectDialog);
44         label->setObjectName(QStringLiteral("label"));
45         label->setAlignment(Qt::AlignLeading|Qt::AlignLeft|Qt::AlignTop);
46 
47         gridLayout->addWidget(label, 0, 0, 1, 2);
48 
49         buttonBox = new QDialogButtonBox(ModeSelectDialog);
50         buttonBox->setObjectName(QStringLiteral("buttonBox"));
51         buttonBox->setOrientation(Qt::Vertical);
52         buttonBox->setStandardButtons(QDialogButtonBox::Cancel|QDialogButtonBox::Ok);
53         buttonBox->setCenterButtons(false);
54 
55         gridLayout->addWidget(buttonBox, 0, 2, 3, 1);
56 
57         modeList = new QListWidget(ModeSelectDialog);
58         modeList->setObjectName(QStringLiteral("modeList"));
59         modeList->setFrameShadow(QFrame::Plain);
60         modeList->setSelectionMode(QAbstractItemView::ExtendedSelection);
61 
62         gridLayout->addWidget(modeList, 1, 0, 1, 2);
63 
64         selAllButton = new QPushButton(ModeSelectDialog);
65         selAllButton->setObjectName(QStringLiteral("selAllButton"));
66 
67         gridLayout->addWidget(selAllButton, 2, 0, 1, 1);
68 
69         selNoneButton = new QPushButton(ModeSelectDialog);
70         selNoneButton->setObjectName(QStringLiteral("selNoneButton"));
71 
72         gridLayout->addWidget(selNoneButton, 2, 1, 1, 1);
73 
74 
75         retranslateUi(ModeSelectDialog);
76         QObject::connect(buttonBox, SIGNAL(accepted()), ModeSelectDialog, SLOT(accept()));
77         QObject::connect(buttonBox, SIGNAL(rejected()), ModeSelectDialog, SLOT(reject()));
78 
79         QMetaObject::connectSlotsByName(ModeSelectDialog);
80     } // setupUi
```

Here is the call graph for this function:



Here is the caller graph for this function:



12.98.3 Field Documentation

12.98.3.1 QDialogButtonBox* Ui_ModeSelectDialog::buttonBox

Definition at line 31 of file ui_modeselectdialog.h.

Referenced by setupUi().

12.98.3.2 QGridLayout* Ui_ModeSelectDialog::gridLayout

Definition at line 29 of file ui_modeselectdialog.h.

Referenced by setupUi().

12.98.3.3 QLabel* Ui_ModeSelectDialog::label

Definition at line 30 of file ui_modeselectdialog.h.

Referenced by ModeSelectDialog::ModeSelectDialog(), retranslateUi(), and setupUi().

12.98.3.4 QListWidget* Ui_ModeSelectDialog::modeList

Definition at line 32 of file ui_modeselectdialog.h.

Referenced by ModeSelectDialog::ModeSelectDialog(), ModeSelectDialog::on_selAllButton_clicked(), ModeSelectDialog::on_selNoneButton_clicked(), ModeSelectDialog::selection(), and setupUi().

12.98.3.5 QPushButton* Ui_ModeSelectDialog::selAllButton

Definition at line 33 of file ui_modeselectdialog.h.

Referenced by retranslateUi(), and setupUi().

12.98.3.6 QPushButton* Ui_ModeSelectDialog::selNoneButton

Definition at line 34 of file ui_modeselectdialog.h.

Referenced by retranslateUi(), and setupUi().

The documentation for this class was generated from the following file:

- src/ckb/ui_modeselectdialog.h

12.99 Ui_MPerfWidget Class Reference

`#include <src/ckb/ui_mperfwidget.h>`

Inheritance diagram for Ui_MPerfWidget:

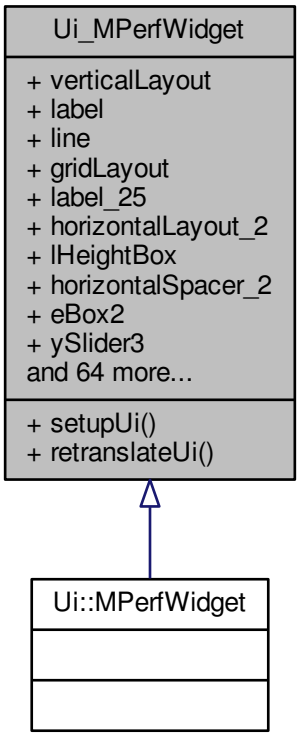

Collaboration diagram for Ui_MPerfWidget:

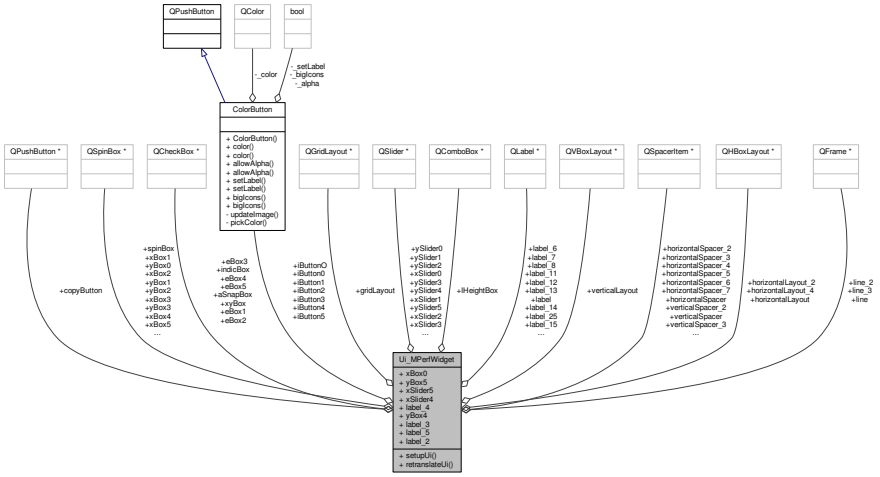

Public Member Functions

- void setupUi (QWidget *MPerfWidget)
- void retranslateUi (QWidget *MPerfWidget)

Data Fields

- QVBoxLayout * verticalLayout
- QLabel * label
- QFrame * line
- QGridLayout * gridLayout
- QLabel * label_25
- QHBoxLayout * horizontalLayout_2
- QComboBox * lHeightBox
- QSpacerItem * horizontalSpacer_2
- QCheckBox * eBox2
- QSlider * ySlider3
- QSlider * xSlider2
- QSpinBox * xBox3
- QSpinBox * yBox0
- QSlider * ySlider0
- ColorButton * iButton4
- ColorButton * iButton5
- QSpacerItem * horizontalSpacer_4
- QSpacerItem * verticalSpacer_3
- QSpacerItem * horizontalSpacer_5
- ColorButton * iButton3
- QLabel * label_12
- QSpinBox * xBox4
- QSpinBox * xBox0
- QSpinBox * yBox5
- QCheckBox * eBox5
- QSlider * xSlider5
- QSpinBox * xBox1

- QSpinBox * yBox2
- QSpinBox * yBox3
- QSlider * xSlider4
- QLabel * label_4
- QSlider * xSlider0
- ColorButton * iButton2
- QFrame * line_3
- ColorButton * iButtonO
- QSpinBox * yBox1
- QSlider * ySlider2
- QSpinBox * xBox2
- QSlider * xSlider1
- QSpacerItem * horizontalSpacer
- QSpinBox * yBox4
- ColorButton * iButton1
- QSlider * ySlider4
- QSlider * ySlider1
- ColorButton * iButton0
- QSlider * xSlider3
- QSpinBox * xBox5
- QLabel * label_3
- QLabel * label_6
- QSlider * ySlider5
- QLabel * label_7
- QLabel * label_8
- QLabel * label_5
- QLabel * label_15
- QLabel * label_13
- QLabel * label_14
- QCheckBox * eBox4
- QLabel * label_11
- QCheckBox * eBox3
- QCheckBox * eBox1
- QLabel * label_2
- QSpacerItem * verticalSpacer
- QCheckBox * aSnapBox
- QFrame * line_2
- QHBoxLayout * horizontalLayout_4
- QCheckBox * indicBox
- QSpacerItem * horizontalSpacer_3
- QSpinBox * spinBox
- QSpacerItem * horizontalSpacer_7
- QCheckBox * xyBox
- QSpacerItem * verticalSpacer_2
- QHBoxLayout * horizontalLayout
- QPushButton * copyButton
- QSpacerItem * horizontalSpacer_6

12.99.1 Detailed Description

Definition at line 33 of file ui_mperfwidget.h.

12.99.2 Member Function Documentation

12.99.2.1 void Ui_MPerfWidget::retranslateUi (QWidget * *MPerfWidget*) [inline]

Definition at line 641 of file ui_mperfwidget.h.

References aSnapBox, copyButton, eBox1, eBox2, eBox3, eBox4, eBox5, iButton0, iButton1, iButton2, iButton3, iButton4, iButton5, iButtonO, indicBox, label, label_11, label_12, label_13, label_14, label_15, label_2, label_25, label_3, label_4, label_5, label_6, label_7, label_8, lHeightBox, spinBox, and xyBox.

Referenced by setupUi().

```
642     {
643         MPerfWidget->setWindowTitle(QApplication::translate("MPerfWidget", "Form", Q_NULLPTR));
644         label->setText(QApplication::translate("MPerfWidget", "DPI", Q_NULLPTR));
645         label_25->setText(QApplication::translate("MPerfWidget", "Lift height:", Q_NULLPTR));
646         lHeightBox->clear();
647         lHeightBox->insertItems(0, QStringList()
648          << QApplication::translate("MPerfWidget", "Low", Q_NULLPTR)
649          << QApplication::translate("MPerfWidget", "Medium-low", Q_NULLPTR)
650          << QApplication::translate("MPerfWidget", "Medium", Q_NULLPTR)
651          << QApplication::translate("MPerfWidget", "Medium-high", Q_NULLPTR)
652          << QApplication::translate("MPerfWidget", "High", Q_NULLPTR)
653         );
654 #ifndef QT_NO_TOOLTIP
655         eBox2->setToolTip(QApplication::translate("MPerfWidget", "Uncheck this box to skip the stage
       while moving up or down.", Q_NULLPTR));
656 #endif // QT_NO_TOOLTIP
657         eBox2->setText(QString());
658 #ifndef QT_NO_TOOLTIP
659         iButton4->setToolTip(QApplication::translate("MPerfWidget", "Tip: alt+click to set all
       colors at once", Q_NULLPTR));
660 #endif // QT_NO_TOOLTIP
661         iButton4->setText(QString());
662 #ifndef QT_NO_TOOLTIP
663         iButton5->setToolTip(QApplication::translate("MPerfWidget", "Tip: alt+click to set all
       colors at once", Q_NULLPTR));
664 #endif // QT_NO_TOOLTIP
665         iButton5->setText(QString());
666 #ifndef QT_NO_TOOLTIP
667         iButton3->setToolTip(QApplication::translate("MPerfWidget", "Tip: alt+click to set all
       colors at once", Q_NULLPTR));
668 #endif // QT_NO_TOOLTIP
669         iButton3->setText(QString());
670         label_12->setText(QApplication::translate("MPerfWidget", "X Value:", Q_NULLPTR));
671 #ifndef QT_NO_TOOLTIP
672         eBox5->setToolTip(QApplication::translate("MPerfWidget", "Uncheck this box to skip the stage
       while moving up or down.", Q_NULLPTR));
673 #endif // QT_NO_TOOLTIP
674         eBox5->setText(QString());
675         label_4->setText(QApplication::translate("MPerfWidget", "Y Value:", Q_NULLPTR));
676 #ifndef QT_NO_TOOLTIP
677         iButton2->setToolTip(QApplication::translate("MPerfWidget", "Tip: alt+click to set all
       colors at once", Q_NULLPTR));
678 #endif // QT_NO_TOOLTIP
679         iButton2->setText(QString());
680 #ifndef QT_NO_TOOLTIP
681         iButtonO->setToolTip(QApplication::translate("MPerfWidget", "Tip: alt+click to set all
       colors at once", Q_NULLPTR));
682 #endif // QT_NO_TOOLTIP
683         iButtonO->setText(QString());
684 #ifndef QT_NO_TOOLTIP
685         iButton1->setToolTip(QApplication::translate("MPerfWidget", "Tip: alt+click to set all
       colors at once", Q_NULLPTR));
686 #endif // QT_NO_TOOLTIP
687         iButton1->setText(QString());
688 #ifndef QT_NO_TOOLTIP
689         iButton0->setToolTip(QApplication::translate("MPerfWidget", "Tip: alt+click to set all
       colors at once", Q_NULLPTR));
690 #endif // QT_NO_TOOLTIP
691         iButton0->setText(QString());
692         label_3->setText(QApplication::translate("MPerfWidget", "You can assign other DPIs in the
       Binding tab.", Q_NULLPTR));
693         label_6->setText(QApplication::translate("MPerfWidget", "2:", Q_NULLPTR));
694         label_7->setText(QApplication::translate("MPerfWidget", "3:", Q_NULLPTR));
695         label_8->setText(QApplication::translate("MPerfWidget", "4:", Q_NULLPTR));
696         label_5->setText(QApplication::translate("MPerfWidget", "1:", Q_NULLPTR));
697         label_15->setText(QApplication::translate("MPerfWidget", "Other:", Q_NULLPTR));
698         label_13->setText(QApplication::translate("MPerfWidget", "5:", Q_NULLPTR));
699         label_14->setText(QApplication::translate("MPerfWidget", "Sniper:", Q_NULLPTR));
700 #ifndef QT_NO_TOOLTIP
701         eBox4->setToolTip(QApplication::translate("MPerfWidget", "Uncheck this box to skip the stage
       while moving up or down.", Q_NULLPTR));
```

```
702 #endif // QT_NO_TOOLTIP
703         eBox4->setText(QString());
704         label_11->setText(QApplication::translate("MPerfWidget", "DPI Stage:", Q_NULLPTR));
705 #ifndef QT_NO_TOOLTIP
706         eBox3->setToolTip(QApplication::translate("MPerfWidget", "Uncheck this box to skip the stage
      while moving up or down.", Q_NULLPTR));
707 #endif // QT_NO_TOOLTIP
708         eBox3->setText(QString());
709 #ifndef QT_NO_TOOLTIP
710         eBox1->setToolTip(QApplication::translate("MPerfWidget", "Uncheck this box to skip the stage
      while moving up or down.", Q_NULLPTR));
711 #endif // QT_NO_TOOLTIP
712         eBox1->setText(QString());
713         label_2->setText(QApplication::translate("MPerfWidget", "Movement", Q_NULLPTR));
714         aSnapBox->setText(QApplication::translate("MPerfWidget", "Angle snap", Q_NULLPTR));
715         indicBox->setText(QApplication::translate("MPerfWidget", "Use DPI indicator:", Q_NULLPTR));
716 #ifndef QT_NO_TOOLTIP
717         spinBox->setToolTip(QApplication::translate("MPerfWidget", "Indicator intensity", Q_NULLPTR)
    );
718 #endif // QT_NO_TOOLTIP
719         spinBox->setSuffix(QApplication::translate("MPerfWidget", "%", Q_NULLPTR));
720         xyBox->setText(QApplication::translate("MPerfWidget", "Independent X/Y states", Q_NULLPTR));
721         copyButton->setText(QApplication::translate("MPerfWidget", "Copy to mode...", Q_NULLPTR))
    ;
722     } // retranslateUi
```

Here is the caller graph for this function:



12.99.2.2 void Ui_MPerfWidget::setupUi (QWidget * *MPerfWidget*) [inline]

Definition at line 111 of file ui_mperfwidget.h.

References aSnapBox, copyButton, eBox1, eBox2, eBox3, eBox4, eBox5, gridLayout, horizontalLayout, horizontalLayout_2, horizontalLayout_4, horizontalSpacer, horizontalSpacer_2, horizontalSpacer_3, horizontalSpacer_4, horizontalSpacer_5, horizontalSpacer_6, horizontalSpacer_7, iButton0, iButton1, iButton2, iButton3, iButton4, iButton5, iButtonO, indicBox, label, label_11, label_12, label_13, label_14, label_15, label_2, label_25, label_3, label_4, label_5, label_6, label_7, label_8, lHeightBox, line, line_2, line_3, retranslateUi(), spinBox, verticalLayout, verticalSpacer, verticalSpacer_2, verticalSpacer_3, xBox0, xBox1, xBox2, xBox3, xBox4, xBox5, xSlider0, xSlider1, xSlider2, xSlider3, xSlider4, xSlider5, xyBox, yBox0, yBox1, yBox2, yBox3, yBox4, yBox5, ySlider0, ySlider1, ySlider2, ySlider3, ySlider4, and ySlider5.

Referenced by MPerfWidget::MPerfWidget().

```
112     {
113         if (MPerfWidget->objectName().isEmpty())
114             MPerfWidget->setObjectName(QStringLiteral("MPerfWidget"));
115         MPerfWidget->resize(932, 637);
116         verticalLayout = new QVBoxLayout(MPerfWidget);
117         verticalLayout->setObjectName(QStringLiteral("verticalLayout"));
118         label = new QLabel(MPerfWidget);
119         label->setObjectName(QStringLiteral("label"));
120         QFont font;
121         font.setBold(true);
122         font.setWeight(75);
123         label->setFont(font);
124
125         verticalLayout->addWidget(label);
126
127         line = new QFrame(MPerfWidget);
128         line->setObjectName(QStringLiteral("line"));
129         line->setFrameShape(QFrame::HLine);
130         line->setFrameShadow(QFrame::Sunken);
131
132         verticalLayout->addWidget(line);
133
134         gridLayout = new QGridLayout();
```

```
135         gridLayout->setObjectName(QStringLiteral("gridLayout"));
136         label_25 = new QLabel(MPerfWidget);
137         label_25->setObjectName(QStringLiteral("label_25"));
138         label_25->setAlignment(Qt::AlignRight|Qt::AlignTrailing|Qt::AlignVCenter);
139 
140         gridLayout->addWidget(label_25, 16, 5, 1, 2);
141 
142         horizontalLayout_2 = new QHBoxLayout();
143         horizontalLayout_2->setObjectName(QStringLiteral("horizontalLayout_2"));
144         lHeightBox = new QComboBox(MPerfWidget);
145         lHeightBox->setObjectName(QStringLiteral("lHeightBox"));
146 
147         horizontalLayout_2->addWidget(lHeightBox);
148 
149         horizontalSpacer_2 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
150 
151         horizontalLayout_2->addItem(horizontalSpacer_2);
152 
153 
154         gridLayout->addLayout(horizontalLayout_2, 16, 8, 1, 3);
155 
156         eBox2 = new QCheckBox(MPerfWidget);
157         eBox2->setObjectName(QStringLiteral("eBox2"));
158 
159         gridLayout->addWidget(eBox2, 7, 1, 1, 1);
160 
161         ySlider3 = new QSlider(MPerfWidget);
162         ySlider3->setObjectName(QStringLiteral("ySlider3"));
163         ySlider3->setMinimum(0);
164         ySlider3->setMaximum(1000);
165         ySlider3->setSingleStep(10);
166         ySlider3->setPageStep(50);
167         ySlider3->setValue(0);
168         ySlider3->setOrientation(Qt::Horizontal);
169 
170         gridLayout->addWidget(ySlider3, 8, 8, 1, 1);
171 
172         xSlider2 = new QSlider(MPerfWidget);
173         xSlider2->setObjectName(QStringLiteral("xSlider2"));
174         xSlider2->setMinimum(0);
175         xSlider2->setMaximum(1000);
176         xSlider2->setSingleStep(10);
177         xSlider2->setPageStep(50);
178         xSlider2->setValue(0);
179         xSlider2->setOrientation(Qt::Horizontal);
180 
181         gridLayout->addWidget(xSlider2, 7, 5, 1, 1);
182 
183         xBox3 = new QSpinBox(MPerfWidget);
184         xBox3->setObjectName(QStringLiteral("xBox3"));
185         xBox3->setMinimum(100);
186         xBox3->setMaximum(12000);
187         xBox3->setSingleStep(50);
188 
189         gridLayout->addWidget(xBox3, 8, 6, 1, 1);
190 
191         yBox0 = new QSpinBox(MPerfWidget);
192         yBox0->setObjectName(QStringLiteral("yBox0"));
193         yBox0->setMinimum(100);
194         yBox0->setMaximum(12000);
195         yBox0->setSingleStep(50);
196 
197         gridLayout->addWidget(yBox0, 11, 9, 1, 1);
198 
199         ySlider0 = new QSlider(MPerfWidget);
200         ySlider0->setObjectName(QStringLiteral("ySlider0"));
201         ySlider0->setMinimum(0);
202         ySlider0->setMaximum(1000);
203         ySlider0->setSingleStep(10);
204         ySlider0->setPageStep(50);
205         ySlider0->setValue(0);
206         ySlider0->setOrientation(Qt::Horizontal);
207 
208         gridLayout->addWidget(ySlider0, 11, 8, 1, 1);
209 
210         iButton4 = new ColorButton(MPerfWidget);
211         iButton4->setObjectName(QStringLiteral("iButton4"));
212         QSizePolicy sizePolicy(QSizePolicy::Fixed, QSizePolicy::Fixed);
213         sizePolicy.setHorizontalStretch(0);
214         sizePolicy.setVerticalStretch(0);
215         sizePolicy.setHeightForWidth(iButton4->sizePolicy().hasHeightForWidth());
216         iButton4->setSizePolicy(sizePolicy);
217         iButton4->setMinimumSize(QSize(0, 40));
218 
219         gridLayout->addWidget(iButton4, 9, 2, 1, 1);
220 
```

```
221         iButton5 = new ColorButton(MPerfWidget);
222         iButton5->setObjectName(QStringLiteral("iButton5"));
223         sizePolicy.setHeightForWidth(iButton5->sizePolicy().hasHeightForWidth());
224         iButton5->setSizePolicy(sizePolicy);
225         iButton5->setMinimumSize(QSize(0, 40));
226 
227         gridLayout->addWidget(iButton5, 10, 2, 1, 1);
228 
229         horizontalSpacer_4 = new QSpacerItem(5, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
230 
231         gridLayout->addItem(horizontalSpacer_4, 4, 4, 1, 1);
232 
233         verticalSpacer_3 = new QSpacerItem(20, 15, QSizePolicy::Minimum, QSizePolicy::Fixed
    );
234 
235         gridLayout->addItem(verticalSpacer_3, 3, 2, 1, 1);
236 
237         horizontalSpacer_5 = new QSpacerItem(5, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
238 
239         gridLayout->addItem(horizontalSpacer_5, 4, 7, 1, 1);
240 
241         iButton3 = new ColorButton(MPerfWidget);
242         iButton3->setObjectName(QStringLiteral("iButton3"));
243         sizePolicy.setHeightForWidth(iButton3->sizePolicy().hasHeightForWidth());
244         iButton3->setSizePolicy(sizePolicy);
245         iButton3->setMinimumSize(QSize(0, 40));
246 
247         gridLayout->addWidget(iButton3, 8, 2, 1, 1);
248 
249         label_12 = new QLabel(MPerfWidget);
250         label_12->setObjectName(QStringLiteral("label_12"));
251         QSizePolicy sizePolicy1(QSizePolicy::Expanding, QSizePolicy::Preferred);
252         sizePolicy1.setHorizontalStretch(0);
253         sizePolicy1.setVerticalStretch(0);
254         sizePolicy1.setHeightForWidth(label_12->sizePolicy().hasHeightForWidth());
255         label_12->setSizePolicy(sizePolicy1);
256 
257         gridLayout->addWidget(label_12, 4, 5, 1, 1);
258 
259         xBox4 = new QSpinBox(MPerfWidget);
260         xBox4->setObjectName(QStringLiteral("xBox4"));
261         xBox4->setMinimum(100);
262         xBox4->setMaximum(12000);
263         xBox4->setSingleStep(50);
264 
265         gridLayout->addWidget(xBox4, 9, 6, 1, 1);
266 
267         xBox0 = new QSpinBox(MPerfWidget);
268         xBox0->setObjectName(QStringLiteral("xBox0"));
269         xBox0->setMinimum(100);
270         xBox0->setMaximum(12000);
271         xBox0->setSingleStep(50);
272 
273         gridLayout->addWidget(xBox0, 11, 6, 1, 1);
274 
275         yBox5 = new QSpinBox(MPerfWidget);
276         yBox5->setObjectName(QStringLiteral("yBox5"));
277         yBox5->setMinimum(100);
278         yBox5->setMaximum(12000);
279         yBox5->setSingleStep(50);
280 
281         gridLayout->addWidget(yBox5, 10, 9, 1, 1);
282 
283         eBox5 = new QCheckBox(MPerfWidget);
284         eBox5->setObjectName(QStringLiteral("eBox5"));
285 
286         gridLayout->addWidget(eBox5, 10, 1, 1, 1);
287 
288         xSlider5 = new QSlider(MPerfWidget);
289         xSlider5->setObjectName(QStringLiteral("xSlider5"));
290         xSlider5->setMinimum(0);
291         xSlider5->setMaximum(1000);
292         xSlider5->setSingleStep(10);
293         xSlider5->setPageStep(50);
294         xSlider5->setValue(0);
295         xSlider5->setOrientation(Qt::Horizontal);
296 
297         gridLayout->addWidget(xSlider5, 10, 5, 1, 1);
298 
299         xBox1 = new QSpinBox(MPerfWidget);
300         xBox1->setObjectName(QStringLiteral("xBox1"));
301         sizePolicy.setHeightForWidth(xBox1->sizePolicy().hasHeightForWidth());
302         xBox1->setSizePolicy(sizePolicy);
303         xBox1->setMinimum(100);
304         xBox1->setMaximum(12000);
```

```
305         xBox1->setSingleStep(50);
306
307         gridLayout->addWidget(xBox1, 6, 6, 1, 1);
308
309         yBox2 = new QSpinBox(MPerfWidget);
310         yBox2->setObjectName(QStringLiteral("yBox2"));
311         yBox2->setMinimum(100);
312         yBox2->setMaximum(12000);
313         yBox2->setSingleStep(50);
314
315         gridLayout->addWidget(yBox2, 7, 9, 1, 1);
316
317         yBox3 = new QSpinBox(MPerfWidget);
318         yBox3->setObjectName(QStringLiteral("yBox3"));
319         yBox3->setMinimum(100);
320         yBox3->setMaximum(12000);
321         yBox3->setSingleStep(50);
322
323         gridLayout->addWidget(yBox3, 8, 9, 1, 1);
324
325         xSlider4 = new QSlider(MPerfWidget);
326         xSlider4->setObjectName(QStringLiteral("xSlider4"));
327         xSlider4->setMinimum(0);
328         xSlider4->setMaximum(1000);
329         xSlider4->setSingleStep(10);
330         xSlider4->setPageStep(50);
331         xSlider4->setValue(0);
332         xSlider4->setOrientation(Qt::Horizontal);
333
334         gridLayout->addWidget(xSlider4, 9, 5, 1, 1);
335
336         label_4 = new QLabel(MPerfWidget);
337         label_4->setObjectName(QStringLiteral("label_4"));
338         sizePolicy1.setHeightForWidth(label_4->sizePolicy().hasHeightForWidth());
339         label_4->setSizePolicy(sizePolicy1);
340
341         gridLayout->addWidget(label_4, 4, 8, 1, 1);
342
343         xSlider0 = new QSlider(MPerfWidget);
344         xSlider0->setObjectName(QStringLiteral("xSlider0"));
345         xSlider0->setMinimum(0);
346         xSlider0->setMaximum(1000);
347         xSlider0->setSingleStep(10);
348         xSlider0->setPageStep(50);
349         xSlider0->setValue(0);
350         xSlider0->setOrientation(Qt::Horizontal);
351
352         gridLayout->addWidget(xSlider0, 11, 5, 1, 1);
353
354         iButton2 = new ColorButton(MPerfWidget);
355         iButton2->setObjectName(QStringLiteral("iButton2"));
356         sizePolicy.setHeightForWidth(iButton2->sizePolicy().hasHeightForWidth());
357         iButton2->setSizePolicy(sizePolicy);
358         iButton2->setMinimumSize(QSize(0, 40));
359
360         gridLayout->addWidget(iButton2, 7, 2, 1, 1);
361
362         line_3 = new QFrame(MPerfWidget);
363         line_3->setObjectName(QStringLiteral("line_3"));
364         line_3->setFrameShape(QFrame::HLine);
365         line_3->setFrameShadow(QFrame::Sunken);
366
367         gridLayout->addWidget(line_3, 5, 0, 1, 11);
368
369         iButtonO = new ColorButton(MPerfWidget);
370         iButtonO->setObjectName(QStringLiteral("iButtonO"));
371         sizePolicy.setHeightForWidth(iButtonO->sizePolicy().hasHeightForWidth());
372         iButtonO->setSizePolicy(sizePolicy);
373         iButtonO->setMinimumSize(QSize(0, 40));
374
375         gridLayout->addWidget(iButtonO, 12, 2, 1, 1);
376
377         yBox1 = new QSpinBox(MPerfWidget);
378         yBox1->setObjectName(QStringLiteral("yBox1"));
379         sizePolicy.setHeightForWidth(yBox1->sizePolicy().hasHeightForWidth());
380         yBox1->setSizePolicy(sizePolicy);
381         yBox1->setMinimum(100);
382         yBox1->setMaximum(12000);
383         yBox1->setSingleStep(50);
384
385         gridLayout->addWidget(yBox1, 6, 9, 1, 1);
386
387         ySlider2 = new QSlider(MPerfWidget);
388         ySlider2->setObjectName(QStringLiteral("ySlider2"));
389         ySlider2->setMinimum(0);
390         ySlider2->setMaximum(1000);
391         ySlider2->setSingleStep(10);
```

```
392         ySlider2->setPageStep(50);
393         ySlider2->setValue(0);
394         ySlider2->setOrientation(Qt::Horizontal);
395 
396         gridLayout->addWidget(ySlider2, 7, 8, 1, 1);
397 
398         xBox2 = new QSpinBox(MPerfWidget);
399         xBox2->setObjectName(QStringLiteral("xBox2"));
400         xBox2->setMinimum(100);
401         xBox2->setMaximum(12000);
402         xBox2->setSingleStep(50);
403 
404         gridLayout->addWidget(xBox2, 7, 6, 1, 1);
405 
406         xSlider1 = new QSlider(MPerfWidget);
407         xSlider1->setObjectName(QStringLiteral("xSlider1"));
408         QSizePolicy sizePolicy2(QSizePolicy::Expanding, QSizePolicy::Fixed);
409         sizePolicy2.setHorizontalStretch(0);
410         sizePolicy2.setVerticalStretch(0);
411         sizePolicy2.setHeightForWidth(xSlider1->sizePolicy().hasHeightForWidth());
412         xSlider1->setSizePolicy(sizePolicy2);
413         xSlider1->setMinimum(0);
414         xSlider1->setMaximum(1000);
415         xSlider1->setSingleStep(10);
416         xSlider1->setPageStep(50);
417         xSlider1->setValue(0);
418         xSlider1->setOrientation(Qt::Horizontal);
419 
420         gridLayout->addWidget(xSlider1, 6, 5, 1, 1);
421 
422         horizontalSpacer = new QSpacerItem(5, 20, QSizePolicy::Fixed, QSizePolicy::Minimum)
    ;
423 
424         gridLayout->addItem(horizontalSpacer, 0, 0, 1, 1);
425 
426         yBox4 = new QSpinBox(MPerfWidget);
427         yBox4->setObjectName(QStringLiteral("yBox4"));
428         yBox4->setMinimum(100);
429         yBox4->setMaximum(12000);
430         yBox4->setSingleStep(50);
431 
432         gridLayout->addWidget(yBox4, 9, 9, 1, 1);
433 
434         iButton1 = new ColorButton(MPerfWidget);
435         iButton1->setObjectName(QStringLiteral("iButton1"));
436         sizePolicy.setHeightForWidth(iButton1->sizePolicy().hasHeightForWidth());
437         iButton1->setSizePolicy(sizePolicy);
438         iButton1->setMinimumSize(QSize(0, 40));
439 
440         gridLayout->addWidget(iButton1, 6, 2, 1, 1);
441 
442         ySlider4 = new QSlider(MPerfWidget);
443         ySlider4->setObjectName(QStringLiteral("ySlider4"));
444         ySlider4->setMinimum(0);
445         ySlider4->setMaximum(1000);
446         ySlider4->setSingleStep(10);
447         ySlider4->setPageStep(50);
448         ySlider4->setValue(0);
449         ySlider4->setOrientation(Qt::Horizontal);
450 
451         gridLayout->addWidget(ySlider4, 9, 8, 1, 1);
452 
453         ySlider1 = new QSlider(MPerfWidget);
454         ySlider1->setObjectName(QStringLiteral("ySlider1"));
455         ySlider1->setMinimum(0);
456         ySlider1->setMaximum(1000);
457         ySlider1->setSingleStep(10);
458         ySlider1->setPageStep(50);
459         ySlider1->setValue(0);
460         ySlider1->setOrientation(Qt::Horizontal);
461 
462         gridLayout->addWidget(ySlider1, 6, 8, 1, 1);
463 
464         iButton0 = new ColorButton(MPerfWidget);
465         iButton0->setObjectName(QStringLiteral("iButton0"));
466         sizePolicy.setHeightForWidth(iButton0->sizePolicy().hasHeightForWidth());
467         iButton0->setSizePolicy(sizePolicy);
468         iButton0->setMinimumSize(QSize(0, 40));
469 
470         gridLayout->addWidget(iButton0, 11, 2, 1, 1);
471 
472         xSlider3 = new QSlider(MPerfWidget);
473         xSlider3->setObjectName(QStringLiteral("xSlider3"));
474         xSlider3->setMinimum(0);
475         xSlider3->setMaximum(1000);
476         xSlider3->setSingleStep(10);
477         xSlider3->setPageStep(50);
```

```
478         xSlider3->setValue(0);
479         xSlider3->setOrientation(Qt::Horizontal);
480 
481         gridLayout->addWidget(xSlider3, 8, 5, 1, 1);
482 
483         xBox5 = new QSpinBox(MPerfWidget);
484         xBox5->setObjectName(QStringLiteral("xBox5"));
485         xBox5->setMinimum(100);
486         xBox5->setMaximum(12000);
487         xBox5->setSingleStep(50);
488 
489         gridLayout->addWidget(xBox5, 10, 6, 1, 1);
490 
491         label_3 = new QLabel(MPerfWidget);
492         label_3->setObjectName(QStringLiteral("label_3"));
493 
494         gridLayout->addWidget(label_3, 12, 5, 1, 5);
495 
496         label_6 = new QLabel(MPerfWidget);
497         label_6->setObjectName(QStringLiteral("label_6"));
498 
499         gridLayout->addWidget(label_6, 7, 3, 1, 1);
500 
501         ySlider5 = new QSlider(MPerfWidget);
502         ySlider5->setObjectName(QStringLiteral("ySlider5"));
503         ySlider5->setMinimum(0);
504         ySlider5->setMaximum(1000);
505         ySlider5->setSingleStep(10);
506         ySlider5->setPageStep(50);
507         ySlider5->setValue(0);
508         ySlider5->setOrientation(Qt::Horizontal);
509 
510         gridLayout->addWidget(ySlider5, 10, 8, 1, 1);
511 
512         label_7 = new QLabel(MPerfWidget);
513         label_7->setObjectName(QStringLiteral("label_7"));
514 
515         gridLayout->addWidget(label_7, 8, 3, 1, 1);
516 
517         label_8 = new QLabel(MPerfWidget);
518         label_8->setObjectName(QStringLiteral("label_8"));
519 
520         gridLayout->addWidget(label_8, 9, 3, 1, 1);
521 
522         label_5 = new QLabel(MPerfWidget);
523         label_5->setObjectName(QStringLiteral("label_5"));
524 
525         gridLayout->addWidget(label_5, 6, 3, 1, 1);
526 
527         label_15 = new QLabel(MPerfWidget);
528         label_15->setObjectName(QStringLiteral("label_15"));
529 
530         gridLayout->addWidget(label_15, 12, 3, 1, 1);
531 
532         label_13 = new QLabel(MPerfWidget);
533         label_13->setObjectName(QStringLiteral("label_13"));
534 
535         gridLayout->addWidget(label_13, 10, 3, 1, 1);
536 
537         label_14 = new QLabel(MPerfWidget);
538         label_14->setObjectName(QStringLiteral("label_14"));
539 
540         gridLayout->addWidget(label_14, 11, 3, 1, 1);
541 
542         eBox4 = new QCheckBox(MPerfWidget);
543         eBox4->setObjectName(QStringLiteral("eBox4"));
544 
545         gridLayout->addWidget(eBox4, 9, 1, 1, 1);
546 
547         label_11 = new QLabel(MPerfWidget);
548         label_11->setObjectName(QStringLiteral("label_11"));
549 
550         gridLayout->addWidget(label_11, 4, 2, 1, 2);
551 
552         eBox3 = new QCheckBox(MPerfWidget);
553         eBox3->setObjectName(QStringLiteral("eBox3"));
554 
555         gridLayout->addWidget(eBox3, 8, 1, 1, 1);
556 
557         eBox1 = new QCheckBox(MPerfWidget);
558         eBox1->setObjectName(QStringLiteral("eBox1"));
559 
560         gridLayout->addWidget(eBox1, 6, 1, 1, 1);
561 
562         label_2 = new QLabel(MPerfWidget);
563         label_2->setObjectName(QStringLiteral("label_2"));
564         label_2->setFont(font);
```

```
565
566         gridLayout->addWidget(label_2, 14, 0, 1, 10);
567
568         verticalSpacer = new QSpacerItem(20, 30, QSizePolicy::Minimum, QSizePolicy::Fixed);
569
570         gridLayout->addItem(verticalSpacer, 13, 2, 1, 1);
571
572         aSnapBox = new QCheckBox(MPerfWidget);
573         aSnapBox->setObjectName(QStringLiteral("aSnapBox"));
574
575         gridLayout->addWidget(aSnapBox, 16, 1, 1, 4);
576
577         line_2 = new QFrame(MPerfWidget);
578         line_2->setObjectName(QStringLiteral("line_2"));
579         line_2->setFrameShape(QFrame::HLine);
580         line_2->setFrameShadow(QFrame::Sunken);
581
582         gridLayout->addWidget(line_2, 15, 0, 1, 10);
583
584         horizontalLayout_4 = new QHBoxLayout();
585         horizontalLayout_4->setObjectName(QStringLiteral("horizontalLayout_4"));
586         indicBox = new QCheckBox(MPerfWidget);
587         indicBox->setObjectName(QStringLiteral("indicBox"));
588
589         horizontalLayout_4->addWidget(indicBox);
590
591         horizontalSpacer_3 = new QSpacerItem(5, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
592
593         horizontalLayout_4->addItem(horizontalSpacer_3);
594
595         spinBox = new QSpinBox(MPerfWidget);
596         spinBox->setObjectName(QStringLiteral("spinBox"));
597         spinBox->setMaximum(100);
598         spinBox->setValue(100);
599
600         horizontalLayout_4->addWidget(spinBox);
601
602         horizontalSpacer_7 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
603
604         horizontalLayout_4->addItem(horizontalSpacer_7);
605
606
607         gridLayout->addLayout(horizontalLayout_4, 0, 1, 1, 9);
608
609         xyBox = new QCheckBox(MPerfWidget);
610         xyBox->setObjectName(QStringLiteral("xyBox"));
611
612         gridLayout->addWidget(xyBox, 2, 1, 1, 9);
613
614
615         verticalLayout->addLayout(gridLayout);
616
617         verticalSpacer_2 = new QSpacerItem(20, 40, QSizePolicy::Minimum,
    QSizePolicy::Expanding);
618
619         verticalLayout->addItem(verticalSpacer_2);
620
621         horizontalLayout = new QHBoxLayout();
622         horizontalLayout->setObjectName(QStringLiteral("horizontalLayout"));
623         copyButton = new QPushButton(MPerfWidget);
624         copyButton->setObjectName(QStringLiteral("copyButton"));
625
626         horizontalLayout->addWidget(copyButton);
627
628         horizontalSpacer_6 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
629
630         horizontalLayout->addItem(horizontalSpacer_6);
631
632
633         verticalLayout->addLayout(horizontalLayout);
634
635
636         retranslateUi(MPerfWidget);
637
638         QMetaObject::connectSlotsByName(MPerfWidget);
639     } // setupUi
```

Here is the call graph for this function:



Here is the caller graph for this function:

12.99.3 Field Documentation

12.99.3.1 QCheckBox* Ui_MPerfWidget::aSnapBox

Definition at line 98 of file ui_mperfwidget.h.

Referenced by retranslateUi(), MPerfWidget::setPerf(), and setupUi().

12.99.3.2 QPushButton* Ui_MPerfWidget::copyButton

Definition at line 108 of file ui_mperfwidget.h.

Referenced by retranslateUi(), and setupUi().

12.99.3.3 QCheckBox* Ui_MPerfWidget::eBox1

Definition at line 95 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), retranslateUi(), and setupUi().

12.99.3.4 QCheckBox* Ui_MPerfWidget::eBox2

Definition at line 44 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), retranslateUi(), and setupUi().

12.99.3.5 QCheckBox* Ui_MPerfWidget::eBox3

Definition at line 94 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), retranslateUi(), and setupUi().

12.99.3.6 QCheckBox* Ui_MPerfWidget::eBox4

Definition at line 92 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), retranslateUi(), and setupUi().

12.99.3.7 QCheckBox* Ui_MPerfWidget::eBox5

Definition at line 60 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), retranslateUi(), and setupUi().

12.99.3.8 QGridLayout* Ui_MPerfWidget::gridLayout

Definition at line 39 of file ui_mperfwidget.h.

Referenced by setupUi().

12.99.3.9 QHBoxLayout* Ui_MPerfWidget::horizontalLayout

Definition at line 107 of file ui_mperfwidget.h.

Referenced by setupUi().

12.99.3.10 QHBoxLayout* Ui_MPerfWidget::horizontalLayout_2

Definition at line 41 of file ui_mperfwidget.h.

Referenced by setupUi().

12.99.3.11 QHBoxLayout* Ui_MPerfWidget::horizontalLayout_4

Definition at line 100 of file ui_mperfwidget.h.

Referenced by setupUi().

12.99.3.12 QSpacerItem* Ui_MPerfWidget::horizontalSpacer

Definition at line 75 of file ui_mperfwidget.h.

Referenced by setupUi().

12.99.3.13 QSpacerItem* Ui_MPerfWidget::horizontalSpacer_2

Definition at line 43 of file ui_mperfwidget.h.

Referenced by setupUi().

12.99.3.14 QSpacerItem* Ui_MPerfWidget::horizontalSpacer_3

Definition at line 102 of file ui_mperfwidget.h.

Referenced by setupUi().

12.99.3.15 QSpacerItem* Ui_MPerfWidget::horizontalSpacer_4

Definition at line 52 of file ui_mperfwidget.h.

Referenced by setupUi().

12.99.3.16 QSpacerItem* Ui_MPerfWidget::horizontalSpacer_5

Definition at line 54 of file ui_mperfwidget.h.

Referenced by setupUi().

12.99.3.17 QSpacerItem* Ui_MPerfWidget::horizontalSpacer_6

Definition at line 109 of file ui_mperfwidget.h.

Referenced by setupUi().

12.99.3.18 QSpacerItem* Ui_MPerfWidget::horizontalSpacer_7

Definition at line 104 of file ui_mperfwidget.h.

Referenced by setupUi().

12.99.3.19 ColorButton* Ui_MPerfWidget::iButton0

Definition at line 80 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), retranslateUi(), and setupUi().

12.99.3.20 ColorButton* Ui_MPerfWidget::iButton1

Definition at line 77 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), retranslateUi(), and setupUi().

12.99.3.21 ColorButton* Ui_MPerfWidget::iButton2

Definition at line 68 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), retranslateUi(), and setupUi().

12.99.3.22 ColorButton* Ui_MPerfWidget::iButton3

Definition at line 55 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), retranslateUi(), and setupUi().

12.99.3.23 ColorButton* Ui_MPerfWidget::iButton4

Definition at line 50 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), retranslateUi(), and setupUi().

12.99.3.24 ColorButton* Ui_MPerfWidget::iButton5

Definition at line 51 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), retranslateUi(), and setupUi().

12.99.3.25 ColorButton* Ui_MPerfWidget::iButtonO

Definition at line 70 of file ui_mperfwidget.h.

Referenced by MPerfWidget::colorChanged(), MPerfWidget::MPerfWidget(), retranslateUi(), MPerfWidget::setPerf(), and setupUi().

12.99.3.26 QCheckBox* Ui_MPerfWidget::indicBox

Definition at line 101 of file ui_mperfwidget.h.

Referenced by retranslateUi(), MPerfWidget::setPerf(), and setupUi().

12.99.3.27 QLabel* Ui_MPerfWidget::label

Definition at line 37 of file ui_mperfwidget.h.

Referenced by retranslateUi(), and setupUi().

12.99.3.28 QLabel* Ui_MPerfWidget::label_11

Definition at line 93 of file ui_mperfwidget.h.

Referenced by retranslateUi(), and setupUi().

12.99.3.29 QLabel* Ui_MPerfWidget::label_12

Definition at line 56 of file ui_mperfwidget.h.

Referenced by retranslateUi(), and setupUi().

12.99.3.30 QLabel* Ui_MPerfWidget::label_13

Definition at line 90 of file ui_mperfwidget.h.

Referenced by retranslateUi(), and setupUi().

12.99.3.31 QLabel* Ui_MPerfWidget::label_14

Definition at line 91 of file ui_mperfwidget.h.

Referenced by retranslateUi(), and setupUi().

12.99.3.32 QLabel* Ui_MPerfWidget::label_15

Definition at line 89 of file ui_mperfwidget.h.

Referenced by retranslateUi(), and setupUi().

12.99.3.33 QLabel* Ui_MPerfWidget::label_2

Definition at line 96 of file ui_mperfwidget.h.

Referenced by retranslateUi(), and setupUi().

12.99.3.34 QLabel* Ui_MPerfWidget::label_25

Definition at line 40 of file ui_mperfwidget.h.

Referenced by retranslateUi(), and setupUi().

12.99.3.35 QLabel* Ui_MPerfWidget::label_3

Definition at line 83 of file ui_mperfwidget.h.

Referenced by retranslateUi(), and setupUi().

12.99.3.36 QLabel* Ui_MPerfWidget::label_4

Definition at line 66 of file ui_mperfwidget.h.

Referenced by retranslateUi(), and setupUi().

12.99.3.37 QLabel* Ui_MPerfWidget::label_5

Definition at line 88 of file ui_mperfwidget.h.

Referenced by retranslateUi(), and setupUi().

12.99.3.38 QLabel* Ui_MPerfWidget::label_6

Definition at line 84 of file ui_mperfwidget.h.

Referenced by retranslateUi(), and setupUi().

12.99.3.39 QLabel* Ui_MPerfWidget::label_7

Definition at line 86 of file ui_mperfwidget.h.

Referenced by retranslateUi(), and setupUi().

12.99.3.40 QLabel* Ui_MPerfWidget::label_8

Definition at line 87 of file ui_mperfwidget.h.

Referenced by retranslateUi(), and setupUi().

12.99.3.41 QComboBox* Ui_MPerfWidget::lHeightBox

Definition at line 42 of file ui_mperfwidget.h.

Referenced by retranslateUi(), MPerfWidget::setPerf(), and setupUi().

12.99.3.42 QFrame* Ui_MPerfWidget::line

Definition at line 38 of file ui_mperfwidget.h.

Referenced by setupUi().

12.99.3.43 QFrame* Ui_MPerfWidget::line_2

Definition at line 99 of file ui_mperfwidget.h.

Referenced by setupUi().

12.99.3.44 QFrame* Ui_MPerfWidget::line_3

Definition at line 69 of file ui_mperfwidget.h.

Referenced by setupUi().

12.99.3.45 QSpinBox* Ui_MPerfWidget::spinBox

Definition at line 103 of file ui_mperfwidget.h.

Referenced by retranslateUi(), MPerfWidget::setPerf(), and setupUi().

12.99.3.46 QVBoxLayout* Ui_MPerfWidget::verticalLayout

Definition at line 36 of file ui_mperfwidget.h.

Referenced by setupUi().

12.99.3.47 QSpacerItem* Ui_MPerfWidget::verticalSpacer

Definition at line 97 of file ui_mperfwidget.h.

Referenced by setupUi().

12.99.3.48 QSpacerItem* Ui_MPerfWidget::verticalSpacer_2

Definition at line 106 of file ui_mperfwidget.h.

Referenced by setupUi().

12.99.3.49 QSpacerItem* Ui_MPerfWidget::verticalSpacer_3

Definition at line 53 of file ui_mperfwidget.h.

Referenced by setupUi().

12.99.3.50 QSpinBox* Ui_MPerfWidget::xBox0

Definition at line 58 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and setupUi().

12.99.3.51 QSpinBox* Ui_MPerfWidget::xBox1

Definition at line 62 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and setupUi().

12.99.3.52 QSpinBox* Ui_MPerfWidget::xBox2

Definition at line 73 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and setupUi().

12.99.3.53 QSpinBox* Ui_MPerfWidget::xBox3

Definition at line 47 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and setupUi().

12.99.3.54 QSpinBox* Ui_MPerfWidget::xBox4

Definition at line 57 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and setupUi().

12.99.3.55 QSpinBox* Ui_MPerfWidget::xBox5

Definition at line 82 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and setupUi().

12.99.3.56 QSlider* Ui_MPerfWidget::xSlider0

Definition at line 67 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and setupUi().

12.99.3.57 QSlider* Ui_MPerfWidget::xSlider1

Definition at line 74 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and setupUi().

12.99.3.58 QSlider* Ui_MPerfWidget::xSlider2

Definition at line 46 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and setupUi().

12.99.3.59 QSlider* Ui_MPerfWidget::xSlider3

Definition at line 81 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and setupUi().

12.99.3.60 QSlider* Ui_MPerfWidget::xSlider4

Definition at line 65 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and setupUi().

12.99.3.61 QSlider* Ui_MPerfWidget::xSlider5

Definition at line 61 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and setupUi().

12.99.3.62 QCheckBox* Ui_MPerfWidget::xyBox

Definition at line 105 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), retranslateUi(), setupUi(), and MPerfWidget::sliderYMoved().

12.99.3.63 QSpinBox* Ui_MPerfWidget::yBox0

Definition at line 48 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and setupUi().

12.99.3.64 QSpinBox* Ui_MPerfWidget::yBox1

Definition at line 71 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and setupUi().

12.99.3.65 QSpinBox* Ui_MPerfWidget::yBox2

Definition at line 63 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and setupUi().

12.99.3.66 QSpinBox* Ui_MPerfWidget::yBox3

Definition at line 64 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and setupUi().

12.99.3.67 QSpinBox* Ui_MPerfWidget::yBox4

Definition at line 76 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and setupUi().

12.99.3.68 QSpinBox* Ui_MPerfWidget::yBox5

Definition at line 59 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and setupUi().

12.99.3.69 QSlider* Ui_MPerfWidget::ySlider0

Definition at line 49 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and setupUi().

12.99.3.70 QSlider* Ui_MPerfWidget::ySlider1

Definition at line 79 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and setupUi().

12.99.3.71 QSlider* Ui_MPerfWidget::ySlider2

Definition at line 72 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and setupUi().

12.99.3.72 QSlider* Ui_MPerfWidget::ySlider3

Definition at line 45 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and setupUi().

12.99.3.73 QSlider* Ui_MPerfWidget::ySlider4

Definition at line 78 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and setupUi().

12.99.3.74 QSlider* Ui_MPerfWidget::ySlider5

Definition at line 85 of file ui_mperfwidget.h.

Referenced by MPerfWidget::MPerfWidget(), and setupUi().

The documentation for this class was generated from the following file:

- src/ckb/ui_mperfwidget.h

12.100 Ui_RebindWidget Class Reference

`#include <src/ckb/ui_rebindwidget.h>`

Inheritance diagram for Ui_RebindWidget:

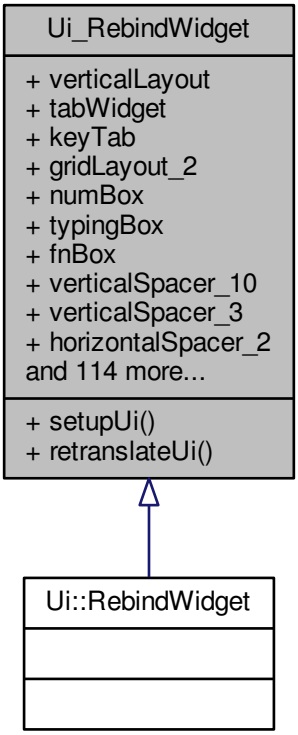

Collaboration diagram for Ui_RebindWidget:

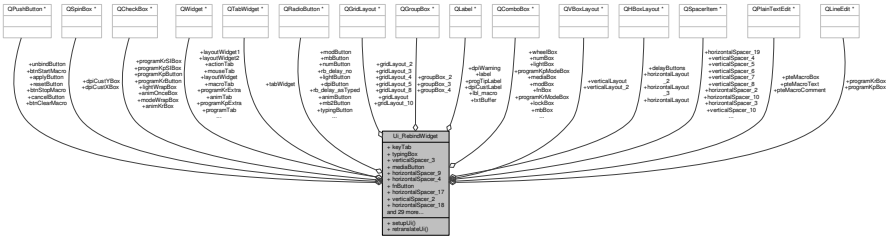

Public Member Functions

- void setupUi (QWidget ∗RebindWidget)
- void retranslateUi (QWidget ∗RebindWidget)

Data Fields

- QVBoxLayout ∗ verticalLayout
- QTabWidget ∗ tabWidget
- QWidget ∗ keyTab

- QGridLayout * gridLayout_2
- QComboBox * numBox
- QComboBox * typingBox
- QComboBox * fnBox
- QSpacerItem * verticalSpacer_10
- QSpacerItem * verticalSpacer_3
- QSpacerItem * horizontalSpacer_2
- QRadioButton * typingButton
- QComboBox * modBox
- QSpacerItem * horizontalSpacer_3
- QRadioButton * mediaButton
- QSpacerItem * verticalSpacer_4
- QSpacerItem * horizontalSpacer_9
- QSpacerItem * horizontalSpacer_4
- QRadioButton * modButton
- QRadioButton * fnButton
- QComboBox * mediaBox
- QRadioButton * numButton
- QSpacerItem * horizontalSpacer_17
- QWidget * mouseTab
- QGridLayout * gridLayout
- QRadioButton * dpiButton
- QSpacerItem * verticalSpacer_2
- QSpacerItem * verticalSpacer_8
- QSpacerItem * horizontalSpacer_18
- QSpacerItem * horizontalSpacer_20
- QComboBox * mb2Box
- QComboBox * dpiBox
- QSpinBox * dpiCustYBox
- QComboBox * mbBox
- QComboBox * wheelBox
- QRadioButton * mbButton
- QSpinBox * dpiCustXBox
- QLabel * dpiWarning
- QRadioButton * wheelButton
- QSpacerItem * horizontalSpacer_22
- QRadioButton * mb2Button
- QLabel * dpiCustLabel
- QSpacerItem * horizontalSpacer_19
- QSpacerItem * horizontalSpacer_21
- QWidget * animTab
- QGridLayout * gridLayout_5
- QSpacerItem * verticalSpacer_11
- QComboBox * animBox
- QSpacerItem * horizontalSpacer_24
- QSpacerItem * horizontalSpacer_25
- QCheckBox * animKrBox
- QCheckBox * animOnceBox
- QSpacerItem * horizontalSpacer_26
- QRadioButton * animButton
- QSpacerItem * horizontalSpacer_23
- QWidget * actionTab
- QGridLayout * gridLayout_3
- QSpacerItem * horizontalSpacer_5
- QRadioButton * modeButton

- QCheckBox * modeWrapBox
- QCheckBox * lightWrapBox
- QSpacerItem * verticalSpacer_7
- QSpacerItem * verticalSpacer_6
- QRadioButton * lockButton
- QSpacerItem * verticalSpacer_5
- QComboBox * lightBox
- QComboBox * lockBox
- QRadioButton * lightButton
- QComboBox * modeBox
- QSpacerItem * horizontalSpacer_8
- QSpacerItem * horizontalSpacer_10
- QSpacerItem * horizontalSpacer_7
- QSpacerItem * horizontalSpacer_6
- QWidget * programTab
- QGridLayout * gridLayout_4
- QSpacerItem * verticalSpacer
- QSpacerItem * horizontalSpacer
- QCheckBox * programKpButton
- QLineEdit * programKpBox
- QSpacerItem * horizontalSpacer_11
- QSpacerItem * horizontalSpacer_13
- QLineEdit * programKrBox
- QCheckBox * programKrButton
- QSpacerItem * horizontalSpacer_12
- QWidget * programKpExtra
- QHBoxLayout * horizontalLayout_2
- QCheckBox * programKpSIBox
- QComboBox * programKpModeBox
- QSpacerItem * horizontalSpacer_15
- QWidget * programKrExtra
- QHBoxLayout * horizontalLayout_3
- QCheckBox * programKrSIBox
- QComboBox * programKrModeBox
- QSpacerItem * horizontalSpacer_16
- QLabel * progTipLabel
- QWidget * macroTab
- QWidget * layoutWidget1
- QGridLayout * gridLayout_8
- QGroupBox * groupBox_2
- QPlainTextEdit * pteMacroBox
- QPlainTextEdit * pteMacroComment
- QPlainTextEdit * pteMacroText
- QWidget * layoutWidget
- QVBoxLayout * verticalLayout_2
- QGroupBox * groupBox_3
- QGroupBox * groupBox_4
- QWidget * layoutWidget_2
- QGridLayout * gridLayout_10
- QPushButton * btnStopMacro
- QPushButton * btnClearMacro
- QPushButton * btnStartMacro
- QLabel * label
- QLabel * lbl_macro
- QWidget * layoutWidget2

- QHBoxLayout * delayButtons
- QRadioButton * rb_delay_no
- QRadioButton * rb_delay_default
- QRadioButton * rb_delay_asTyped
- QLabel * txtBuffer
- QHBoxLayout * horizontalLayout
- QSpacerItem * horizontalSpacer_14
- QPushButton * unbindButton
- QPushButton * resetButton
- QPushButton * cancelButton
- QPushButton * applyButton

12.100.1 Detailed Description

Definition at line 35 of file ui_rebindwidget.h.

12.100.2 Member Function Documentation

12.100.2.1 void Ui_RebindWidget::retranslateUi (QWidget * *RebindWidget*) [inline]

Definition at line 897 of file ui_rebindwidget.h.

References actionTab, animBox, animButton, animKrBox, animOnceBox, animTab, applyButton, btnClearMacro, btnStartMacro, btnStopMacro, cancelButton, dpiBox, dpiButton, dpiCustLabel, dpiWarning, fnBox, fnButton, groupBox_2, groupBox_3, groupBox_4, keyTab, label, lbl_macro, lightBox, lightButton, lightWrapBox, lockBox, lockButton, macroTab, mb2Box, mb2Button, mbBox, mbButton, mediaBox, mediaButton, modBox, modButton, modeBox, modeButton, modeWrapBox, mouseTab, numBox, numButton, programKpButton, programKpModeBox, programKpSlBox, programKrButton, programKrModeBox, programKrSlBox, programTab, progTipLabel, pteMacroComment, pteMacroText, rb_delay_asTyped, rb_delay_default, rb_delay_no, resetButton, tabWidget, txtBuffer, typingBox, typingButton, unbindButton, wheelBox, and wheelButton.

Referenced by setupUi().

```
898     {
899         numBox->clear();
900         numBox->insertItems(0, QStringList()
901          << QString()
902         );
903         typingBox->clear();
904         typingBox->insertItems(0, QStringList()
905          << QString()
906         );
907         fnBox->clear();
908         fnBox->insertItems(0, QStringList()
909          << QString()
910         );
911         typingButton->setText(QApplication::translate("RebindWidget", "Typing:", Q_NULLPTR));
912         modBox->clear();
913         modBox->insertItems(0, QStringList()
914          << QString()
915         );
916         mediaButton->setText(QApplication::translate("RebindWidget", "Media:", Q_NULLPTR));
917         modButton->setText(QApplication::translate("RebindWidget", "Modifier:", Q_NULLPTR));
918         fnButton->setText(QApplication::translate("RebindWidget", "Miscellaneous:", Q_NULLPTR));
919         mediaBox->clear();
920         mediaBox->insertItems(0, QStringList()
921          << QString()
922         );
923         numButton->setText(QApplication::translate("RebindWidget", "Number pad:", Q_NULLPTR));
924         tabWidget->setTabText(tabWidget->indexOf(keyTab), QApplication::translate("
    RebindWidget", "Keyboard", Q_NULLPTR));
925         dpiButton->setText(QApplication::translate("RebindWidget", "Change DPI:", Q_NULLPTR));
926         mb2Box->clear();
927         mb2Box->insertItems(0, QStringList()
928          << QString()
929          << QApplication::translate("RebindWidget", "4 (Back)", Q_NULLPTR)
930          << QApplication::translate("RebindWidget", "5 (Forward)", Q_NULLPTR)
931          << QApplication::translate("RebindWidget", "6", Q_NULLPTR)
```

```
932          << QApplication::translate("RebindWidget", "7", Q_NULLPTR)
933          << QApplication::translate("RebindWidget", "8", Q_NULLPTR)
934         );
935         dpiBox->clear();
936         dpiBox->insertItems(0, QStringList()
937          << QString()
938          << QApplication::translate("RebindWidget", "(Up)", Q_NULLPTR)
939          << QApplication::translate("RebindWidget", "(Down)", Q_NULLPTR)
940          << QApplication::translate("RebindWidget", "Sniper", Q_NULLPTR)
941          << QApplication::translate("RebindWidget", "1:", Q_NULLPTR)
942          << QApplication::translate("RebindWidget", "2:", Q_NULLPTR)
943          << QApplication::translate("RebindWidget", "3:", Q_NULLPTR)
944          << QApplication::translate("RebindWidget", "4:", Q_NULLPTR)
945          << QApplication::translate("RebindWidget", "5:", Q_NULLPTR)
946          << QApplication::translate("RebindWidget", "Custom:", Q_NULLPTR)
947         );
948         mbBox->clear();
949         mbBox->insertItems(0, QStringList()
950          << QString()
951          << QApplication::translate("RebindWidget", "Left", Q_NULLPTR)
952          << QApplication::translate("RebindWidget", "Right", Q_NULLPTR)
953          << QApplication::translate("RebindWidget", "Middle", Q_NULLPTR)
954         );
955         wheelBox->clear();
956         wheelBox->insertItems(0, QStringList()
957          << QString()
958          << QApplication::translate("RebindWidget", "Up", Q_NULLPTR)
959          << QApplication::translate("RebindWidget", "Down", Q_NULLPTR)
960         );
961         mbButton->setText(QApplication::translate("RebindWidget", "Standard button:", Q_NULLPTR));
962         dpiWarning->setText(QApplication::translate("RebindWidget", "DPI is only available for
     mice.", Q_NULLPTR));
963         wheelButton->setText(QApplication::translate("RebindWidget", "Wheel:", Q_NULLPTR));
964         mb2Button->setText(QApplication::translate("RebindWidget", "Special button:", Q_NULLPTR));
965         dpiCustLabel->setText(QApplication::translate("RebindWidget", "x", Q_NULLPTR));
966         tabWidget->setTabText(tabWidget->indexOf(mouseTab),
    QApplication::translate("RebindWidget", "Mouse", Q_NULLPTR));
967         animBox->clear();
968         animBox->insertItems(0, QStringList()
969          << QString()
970         );
971         animKrBox->setText(QApplication::translate("RebindWidget", "Stop on key release",
    Q_NULLPTR));
972         animOnceBox->setText(QApplication::translate("RebindWidget", "Restart every time",
    Q_NULLPTR));
973         animButton->setText(QApplication::translate("RebindWidget", "Start animation on keypress:
    ", Q_NULLPTR));
974         tabWidget->setTabText(tabWidget->indexOf(animTab), QApplication::translate
    ("RebindWidget", "Animation", Q_NULLPTR));
975         modeButton->setText(QApplication::translate("RebindWidget", "Switch to mode:", Q_NULLPTR)
    );
976         modeWrapBox->setText(QApplication::translate("RebindWidget", "Wrap-around", Q_NULLPTR));
977         lightWrapBox->setText(QApplication::translate("RebindWidget", "Wrap-around", Q_NULLPTR)
    );
978         lockButton->setText(QApplication::translate("RebindWidget", "Windows lock:", Q_NULLPTR));
979         lightBox->clear();
980         lightBox->insertItems(0, QStringList()
981          << QString()
982          << QApplication::translate("RebindWidget", "Up", Q_NULLPTR)
983          << QApplication::translate("RebindWidget", "Down", Q_NULLPTR)
984         );
985         lockBox->clear();
986         lockBox->insertItems(0, QStringList()
987          << QString()
988          << QApplication::translate("RebindWidget", "Toggle", Q_NULLPTR)
989          << QApplication::translate("RebindWidget", "On", Q_NULLPTR)
990          << QApplication::translate("RebindWidget", "Off", Q_NULLPTR)
991         );
992         lightButton->setText(QApplication::translate("RebindWidget", "Brightness:", Q_NULLPTR));
993         modeBox->clear();
994         modeBox->insertItems(0, QStringList()
995          << QString()
996          << QApplication::translate("RebindWidget", "(Previous)", Q_NULLPTR)
997          << QApplication::translate("RebindWidget", "(Next)", Q_NULLPTR)
998         );
999         tabWidget->setTabText(tabWidget->indexOf(actionTab),
    QApplication::translate("RebindWidget", "Special", Q_NULLPTR));
1000         programKpButton->setText(QApplication::translate("RebindWidget", "Launch program on
     key press:", Q_NULLPTR));
1001         programKrButton->setText(QApplication::translate("RebindWidget", "Launch program on
     key release:", Q_NULLPTR));
1002         programKpSIBox->setText(QApplication::translate("RebindWidget", "Single instance",
    Q_NULLPTR));
1003         programKpModeBox->clear();
1004         programKpModeBox->insertItems(0, QStringList()
1005          << QApplication::translate("RebindWidget", "Run indefinitely", Q_NULLPTR)
1006          << QApplication::translate("RebindWidget", "Stop on release", Q_NULLPTR)
```

```
1007          << QApplication::translate("RebindWidget", "Stop on re-press", Q_NULLPTR)
1008         );
1009         programKrSIBox->setText(QApplication::translate("RebindWidget", "Single instance",
     Q_NULLPTR));
1010         programKrModeBox->clear();
1011         programKrModeBox->insertItems(0, QStringList()
1012          << QApplication::translate("RebindWidget", "Run indefinitely", Q_NULLPTR)
1013          << QApplication::translate("RebindWidget", "Stop on re-press", Q_NULLPTR)
1014         );
1015         progTipLabel->setText(QApplication::translate("RebindWidget", "Tip", Q_NULLPTR));
1016         tabWidget->setTabText(tabWidget->indexOf(programTab),
     QApplication::translate("RebindWidget", "Program", Q_NULLPTR));
1017         groupBox_2->setTitle(QApplication::translate("RebindWidget", "Macro Key Actions",
     Q_NULLPTR));
1018 #ifndef QT_NO_TOOLTIP
1019         pteMacroComment->setToolTip(QApplication::translate("RebindWidget", "What is this
      macro for?", Q_NULLPTR));
1020 #endif // QT_NO_TOOLTIP
1021         pteMacroComment->setDocumentTitle(QString());
1022         pteMacroComment->setPlainText(QString());
1023         pteMacroText->setDocumentTitle(QString());
1024         pteMacroText->setPlainText(QString());
1025         groupBox_3->setTitle(QApplication::translate("RebindWidget", "Macro Comment", Q_NULLPTR))
     ;
1026         groupBox_4->setTitle(QApplication::translate("RebindWidget", "Macro Text", Q_NULLPTR));
1027         btnStopMacro->setText(QApplication::translate("RebindWidget", "Stop", Q_NULLPTR));
1028         btnClearMacro->setText(QApplication::translate("RebindWidget", "Clear", Q_NULLPTR));
1029         btnStartMacro->setText(QApplication::translate("RebindWidget", "Start", Q_NULLPTR));
1030         label->setText(QApplication::translate("RebindWidget", "Record macro ", Q_NULLPTR));
1031         lbl_macro->setText(QApplication::translate("RebindWidget", "Comment label for help",
     Q_NULLPTR));
1032 #ifndef QT_NO_WHATSTHIS
1033         rb_delay_no->setWhatsThis(QApplication::translate("RebindWidget", "configure delays
      between keystrokes: Disable delay", Q_NULLPTR));
1034 #endif // QT_NO_WHATSTHIS
1035         rb_delay_no->setText(QApplication::translate("RebindWidget", "No delay", Q_NULLPTR));
1036 #ifndef QT_NO_WHATSTHIS
1037         rb_delay_default->setWhatsThis(QApplication::translate("RebindWidget", "configure
      delays between keystrokes: Set delay to default values: 20us up to 15 chars, 200us above", Q_NULLPTR));
1038 #endif // QT_NO_WHATSTHIS
1039         rb_delay_default->setText(QApplication::translate("RebindWidget", "default",
     Q_NULLPTR));
1040 #ifndef QT_NO_WHATSTHIS
1041         rb_delay_asTyped->setWhatsThis(QApplication::translate("RebindWidget", "configure
      delays between keystrokes: Remember delays as they had been typed while the macro definition process",
     Q_NULLPTR));
1042 #endif // QT_NO_WHATSTHIS
1043         rb_delay_asTyped->setText(QApplication::translate("RebindWidget", "as typed",
     Q_NULLPTR));
1044         txtBuffer->setText(QString());
1045         tabWidget->setTabText(tabWidget->indexOf(macroTab),
     QApplication::translate("RebindWidget", "Macro", Q_NULLPTR));
1046         unbindButton->setText(QApplication::translate("RebindWidget", "Unbind", Q_NULLPTR));
1047         resetButton->setText(QApplication::translate("RebindWidget", "Reset to Default",
     Q_NULLPTR));
1048         cancelButton->setText(QApplication::translate("RebindWidget", "Cancel", Q_NULLPTR));
1049         applyButton->setText(QApplication::translate("RebindWidget", "Apply", Q_NULLPTR));
1050         Q_UNUSED(RebindWidget);
1051     } // retranslateUi
```

Here is the caller graph for this function:



12.100.2.2 void Ui_RebindWidget::setupUi (QWidget * *RebindWidget*) [inline]

Definition at line 163 of file ui_rebindwidget.h.

References actionTab, animBox, animButton, animKrBox, animOnceBox, animTab, applyButton, btnClearMacro, btnStartMacro, btnStopMacro, cancelButton, delayButtons, dpiBox, dpiButton, dpiCustLabel, dpiCustXBox, dpiCustYBox, dpiWarning, fnBox, fnButton, gridLayout, gridLayout_10, gridLayout_2, gridLayout_3, gridLayout_4, grid-

Layout_5, gridLayout_8, groupBox_2, groupBox_3, groupBox_4, horizontalLayout, horizontalLayout_2, horizontalLayout_3, horizontalSpacer, horizontalSpacer_10, horizontalSpacer_11, horizontalSpacer_12, horizontalSpacer_13, horizontalSpacer_14, horizontalSpacer_15, horizontalSpacer_16, horizontalSpacer_17, horizontalSpacer_18, horizontalSpacer_19, horizontalSpacer_2, horizontalSpacer_20, horizontalSpacer_21, horizontalSpacer_22, horizontalSpacer_23, horizontalSpacer_24, horizontalSpacer_25, horizontalSpacer_26, horizontalSpacer_3, horizontalSpacer_4, horizontalSpacer_5, horizontalSpacer_6, horizontalSpacer_7, horizontalSpacer_8, horizontalSpacer_9, keyTab, label, layoutWidget, layoutWidget1, layoutWidget2, layoutWidget_2, lbl_macro, lightBox, lightButton, lightWrapBox, lockBox, lockButton, macroTab, mb2Box, mb2Button, mbBox, mbButton, mediaBox, mediaButton, modBox, modButton, modeBox, modeButton, modeWrapBox, mouseTab, numBox, numButton, programKpBox, programKpButton, programKpExtra, programKpModeBox, programKpSIBox, programKrBox, programKrButton, programKrExtra, programKrModeBox, programKrSIBox, programTab, progTipLabel, pteMacroBox, pteMacroComment, pteMacroText, rb_delay_asTyped, rb_delay_default, rb_delay_no, resetButton, retranslateUi(), tabWidget, txtBuffer, typingBox, typingButton, unbindButton, verticalLayout, verticalLayout_2, verticalSpacer, verticalSpacer_10, verticalSpacer_11, verticalSpacer_2, verticalSpacer_3, verticalSpacer_4, verticalSpacer_5, verticalSpacer_6, verticalSpacer_7, verticalSpacer_8, wheelBox, and wheelButton.

Referenced by RebindWidget::RebindWidget().

```
164     {
165         if (RebindWidget->objectName().isEmpty())
166             RebindWidget->setObjectName(QStringLiteral("RebindWidget"));
167         RebindWidget->resize(687, 342);
168         QSizePolicy sizePolicy(QSizePolicy::Expanding, QSizePolicy::Preferred);
169         sizePolicy.setHorizontalStretch(0);
170         sizePolicy.setVerticalStretch(0);
171         sizePolicy.setHeightForWidth(RebindWidget->sizePolicy().hasHeightForWidth());
172         RebindWidget->setSizePolicy(sizePolicy);
173         RebindWidget->setStyleSheet(QStringLiteral("font-size: 12px ;"));
174         verticalLayout = new QVBoxLayout(RebindWidget);
175         verticalLayout->setObjectName(QStringLiteral("verticalLayout"));
176         tabWidget = new QTabWidget(RebindWidget);
177         tabWidget->setObjectName(QStringLiteral("tabWidget"));
178         tabWidget->setStyleSheet(QStringLiteral(""));
179         tabWidget->setUsesScrollButtons(false);
180         tabWidget->setDocumentMode(false);
181         keyTab = new QWidget();
182         keyTab->setObjectName(QStringLiteral("keyTab"));
183         sizePolicy.setHeightForWidth(keyTab->sizePolicy().hasHeightForWidth());
184         keyTab->setSizePolicy(sizePolicy);
185         gridLayout_2 = new QGridLayout(keyTab);
186         gridLayout_2->setObjectName(QStringLiteral("gridLayout_2"));
187         gridLayout_2->setContentsMargins(-1, -1, -1, 0);
188         numBox = new QComboBox(keyTab);
189         numBox->setObjectName(QStringLiteral("numBox"));
190         QSizePolicy sizePolicy1(QSizePolicy::Expanding, QSizePolicy::Fixed);
191         sizePolicy1.setHorizontalStretch(0);
192         sizePolicy1.setVerticalStretch(0);
193         sizePolicy1.setHeightForWidth(numBox->sizePolicy().hasHeightForWidth());
194         numBox->setSizePolicy(sizePolicy1);
195 
196         gridLayout_2->addWidget(numBox, 6, 4, 1, 1);
197 
198         typingBox = new QComboBox(keyTab);
199         typingBox->setObjectName(QStringLiteral("typingBox"));
200         sizePolicy1.setHeightForWidth(typingBox->sizePolicy().hasHeightForWidth());
201         typingBox->setSizePolicy(sizePolicy1);
202 
203         gridLayout_2->addWidget(typingBox, 1, 1, 1, 1);
204 
205         fnBox = new QComboBox(keyTab);
206         fnBox->setObjectName(QStringLiteral("fnBox"));
207         sizePolicy1.setHeightForWidth(fnBox->sizePolicy().hasHeightForWidth());
208         fnBox->setSizePolicy(sizePolicy1);
209 
210         gridLayout_2->addWidget(fnBox, 6, 1, 1, 1);
211 
212         verticalSpacer_10 = new QSpacerItem(0, 5, QSizePolicy::Minimum, QSizePolicy::Fixed
    );
213 
214         gridLayout_2->addItem(verticalSpacer_10, 9, 1, 1, 1);
215 
216         verticalSpacer_3 = new QSpacerItem(20, 40, QSizePolicy::Minimum,
    QSizePolicy::Expanding);
217 
218         gridLayout_2->addItem(verticalSpacer_3, 15, 2, 1, 1);
219 
220         horizontalSpacer_2 = new QSpacerItem(5, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
221 
222         gridLayout_2->addItem(horizontalSpacer_2, 1, 3, 1, 1);
```

```
223
224         typingButton = new QRadioButton(keyTab);
225         typingButton->setObjectName(QStringLiteral("typingButton"));
226         typingButton->setAutoExclusive(false);
227
228         gridLayout_2->addWidget(typingButton, 0, 0, 1, 2);
229
230         modBox = new QComboBox(keyTab);
231         modBox->setObjectName(QStringLiteral("modBox"));
232         sizePolicy1.setHeightForWidth(modBox->sizePolicy().hasHeightForWidth());
233         modBox->setSizePolicy(sizePolicy1);
234
235         gridLayout_2->addWidget(modBox, 1, 4, 1, 1);
236
237         horizontalSpacer_3 = new QSpacerItem(5, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
238
239         gridLayout_2->addItem(horizontalSpacer_3, 1, 0, 1, 1);
240
241         mediaButton = new QRadioButton(keyTab);
242         mediaButton->setObjectName(QStringLiteral("mediaButton"));
243         mediaButton->setAutoExclusive(false);
244
245         gridLayout_2->addWidget(mediaButton, 10, 0, 1, 2);
246
247         verticalSpacer_4 = new QSpacerItem(20, 5, QSizePolicy::Minimum, QSizePolicy::Fixed)
    ;
248
249         gridLayout_2->addItem(verticalSpacer_4, 2, 1, 1, 1);
250
251         horizontalSpacer_9 = new QSpacerItem(0, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
252
253         gridLayout_2->addItem(horizontalSpacer_9, 1, 5, 1, 2);
254
255         horizontalSpacer_4 = new QSpacerItem(0, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
256
257         gridLayout_2->addItem(horizontalSpacer_4, 1, 2, 1, 1);
258
259         modButton = new QRadioButton(keyTab);
260         modButton->setObjectName(QStringLiteral("modButton"));
261
262         gridLayout_2->addWidget(modButton, 0, 3, 1, 2);
263
264         fnButton = new QRadioButton(keyTab);
265         fnButton->setObjectName(QStringLiteral("fnButton"));
266         fnButton->setAutoExclusive(false);
267
268         gridLayout_2->addWidget(fnButton, 5, 0, 1, 2);
269
270         mediaBox = new QComboBox(keyTab);
271         mediaBox->setObjectName(QStringLiteral("mediaBox"));
272         sizePolicy1.setHeightForWidth(mediaBox->sizePolicy().hasHeightForWidth());
273         mediaBox->setSizePolicy(sizePolicy1);
274
275         gridLayout_2->addWidget(mediaBox, 11, 1, 1, 1);
276
277         numButton = new QRadioButton(keyTab);
278         numButton->setObjectName(QStringLiteral("numButton"));
279         numButton->setAutoExclusive(false);
280
281         gridLayout_2->addWidget(numButton, 5, 3, 1, 2);
282
283         horizontalSpacer_17 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
284
285         gridLayout_2->addItem(horizontalSpacer_17, 1, 7, 1, 1);
286
287         tabWidget->addTab(keyTab, QString());
288         mouseTab = new QWidget();
289         mouseTab->setObjectName(QStringLiteral("mouseTab"));
290         gridLayout = new QGridLayout(mouseTab);
291         gridLayout->setObjectName(QStringLiteral("gridLayout"));
292         dpiButton = new QRadioButton(mouseTab);
293         dpiButton->setObjectName(QStringLiteral("dpiButton"));
294         dpiButton->setAutoExclusive(false);
295
296         gridLayout->addWidget(dpiButton, 3, 3, 1, 5);
297
298         verticalSpacer_2 = new QSpacerItem(20, 40, QSizePolicy::Minimum,
    QSizePolicy::Expanding);
299
300         gridLayout->addItem(verticalSpacer_2, 5, 1, 1, 1);
301
302         verticalSpacer_8 = new QSpacerItem(20, 5, QSizePolicy::Minimum, QSizePolicy::Fixed)
    ;
```

```
303
304         gridLayout->addItem(verticalSpacer_8, 2, 1, 1, 1);
305
306         horizontalSpacer_18 = new QSpacerItem(5, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
307
308         gridLayout->addItem(horizontalSpacer_18, 1, 0, 1, 1);
309
310         horizontalSpacer_20 = new QSpacerItem(5, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
311
312         gridLayout->addItem(horizontalSpacer_20, 1, 3, 1, 1);
313
314         mb2Box = new QComboBox(mouseTab);
315         mb2Box->setObjectName(QStringLiteral("mb2Box"));
316         sizePolicy1.setHeightForWidth(mb2Box->sizePolicy().hasHeightForWidth());
317         mb2Box->setSizePolicy(sizePolicy1);
318
319         gridLayout->addWidget(mb2Box, 1, 4, 1, 4);
320
321         dpiBox = new QComboBox(mouseTab);
322         dpiBox->setObjectName(QStringLiteral("dpiBox"));
323
324         gridLayout->addWidget(dpiBox, 4, 4, 1, 1);
325
326         dpiCustYBox = new QSpinBox(mouseTab);
327         dpiCustYBox->setObjectName(QStringLiteral("dpiCustYBox"));
328         dpiCustYBox->setMinimum(400);
329         dpiCustYBox->setMaximum(8500);
330         dpiCustYBox->setSingleStep(50);
331
332         gridLayout->addWidget(dpiCustYBox, 4, 7, 1, 1);
333
334         mbBox = new QComboBox(mouseTab);
335         mbBox->setObjectName(QStringLiteral("mbBox"));
336         sizePolicy1.setHeightForWidth(mbBox->sizePolicy().hasHeightForWidth());
337         mbBox->setSizePolicy(sizePolicy1);
338
339         gridLayout->addWidget(mbBox, 1, 1, 1, 1);
340
341         wheelBox = new QComboBox(mouseTab);
342         wheelBox->setObjectName(QStringLiteral("wheelBox"));
343
344         gridLayout->addWidget(wheelBox, 4, 1, 1, 1);
345
346         mbButton = new QRadioButton(mouseTab);
347         mbButton->setObjectName(QStringLiteral("mbButton"));
348         mbButton->setAutoExclusive(false);
349
350         gridLayout->addWidget(mbButton, 0, 0, 1, 2);
351
352         dpiCustXBox = new QSpinBox(mouseTab);
353         dpiCustXBox->setObjectName(QStringLiteral("dpiCustXBox"));
354         dpiCustXBox->setMinimum(400);
355         dpiCustXBox->setMaximum(8500);
356         dpiCustXBox->setSingleStep(50);
357
358         gridLayout->addWidget(dpiCustXBox, 4, 5, 1, 1);
359
360         dpiWarning = new QLabel(mouseTab);
361         dpiWarning->setObjectName(QStringLiteral("dpiWarning"));
362         QSizePolicy sizePolicy2(QSizePolicy::Preferred, QSizePolicy::Fixed);
363         sizePolicy2.setHorizontalStretch(0);
364         sizePolicy2.setVerticalStretch(0);
365         sizePolicy2.setHeightForWidth(dpiWarning->sizePolicy().hasHeightForWidth());
366         dpiWarning->setSizePolicy(sizePolicy2);
367
368         gridLayout->addWidget(dpiWarning, 6, 0, 1, 10);
369
370         wheelButton = new QRadioButton(mouseTab);
371         wheelButton->setObjectName(QStringLiteral("wheelButton"));
372
373         gridLayout->addWidget(wheelButton, 3, 0, 1, 2);
374
375         horizontalSpacer_22 = new QSpacerItem(5, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
376
377         gridLayout->addItem(horizontalSpacer_22, 1, 8, 1, 1);
378
379         mb2Button = new QRadioButton(mouseTab);
380         mb2Button->setObjectName(QStringLiteral("mb2Button"));
381         mb2Button->setAutoExclusive(false);
382
383         gridLayout->addWidget(mb2Button, 0, 3, 1, 5);
384
385         dpiCustLabel = new QLabel(mouseTab);
386         dpiCustLabel->setObjectName(QStringLiteral("dpiCustLabel"));
```

```
387
388         gridLayout->addWidget(dpiCustLabel, 4, 6, 1, 1);
389
390         horizontalSpacer_19 = new QSpacerItem(0, 0, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
391
392         gridLayout->addItem(horizontalSpacer_19, 1, 2, 1, 1);
393
394         horizontalSpacer_21 = new QSpacerItem(0, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
395
396         gridLayout->addItem(horizontalSpacer_21, 1, 9, 1, 1);
397
398         tabWidget->addTab(mouseTab, QString());
399         animTab = new QWidget();
400         animTab->setObjectName(QStringLiteral("animTab"));
401         gridLayout_5 = new QGridLayout(animTab);
402         gridLayout_5->setObjectName(QStringLiteral("gridLayout_5"));
403         verticalSpacer_11 = new QSpacerItem(20, 40, QSizePolicy::Minimum,
    QSizePolicy::Expanding);
404
405         gridLayout_5->addItem(verticalSpacer_11, 6, 2, 1, 1);
406
407         animBox = new QComboBox(animTab);
408         animBox->setObjectName(QStringLiteral("animBox"));
409         sizePolicy1.setHeightForWidth(animBox->sizePolicy().hasHeightForWidth());
410         animBox->setSizePolicy(sizePolicy1);
411
412         gridLayout_5->addWidget(animBox, 4, 2, 1, 1);
413
414         horizontalSpacer_24 = new QSpacerItem(20, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
415
416         gridLayout_5->addItem(horizontalSpacer_24, 4, 3, 1, 1);
417
418         horizontalSpacer_25 = new QSpacerItem(438, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
419
420         gridLayout_5->addItem(horizontalSpacer_25, 4, 7, 1, 1);
421
422         animKrBox = new QCheckBox(animTab);
423         animKrBox->setObjectName(QStringLiteral("animKrBox"));
424
425         gridLayout_5->addWidget(animKrBox, 4, 6, 1, 1);
426
427         animOnceBox = new QCheckBox(animTab);
428         animOnceBox->setObjectName(QStringLiteral("animOnceBox"));
429
430         gridLayout_5->addWidget(animOnceBox, 4, 4, 1, 1);
431
432         horizontalSpacer_26 = new QSpacerItem(20, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
433
434         gridLayout_5->addItem(horizontalSpacer_26, 4, 5, 1, 1);
435
436         animButton = new QRadioButton(animTab);
437         animButton->setObjectName(QStringLiteral("animButton"));
438         sizePolicy1.setHeightForWidth(animButton->sizePolicy().hasHeightForWidth());
439         animButton->setSizePolicy(sizePolicy1);
440
441         gridLayout_5->addWidget(animButton, 0, 1, 1, 2);
442
443         horizontalSpacer_23 = new QSpacerItem(5, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
444
445         gridLayout_5->addItem(horizontalSpacer_23, 4, 1, 1, 1);
446
447         tabWidget->addTab(animTab, QString());
448         actionTab = new QWidget();
449         actionTab->setObjectName(QStringLiteral("actionTab"));
450         sizePolicy.setHeightForWidth(actionTab->sizePolicy().hasHeightForWidth());
451         actionTab->setSizePolicy(sizePolicy);
452         gridLayout_3 = new QGridLayout(actionTab);
453         gridLayout_3->setObjectName(QStringLiteral("gridLayout_3"));
454         gridLayout_3->setContentsMargins(-1, -1, -1, 0);
455         horizontalSpacer_5 = new QSpacerItem(5, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
456
457         gridLayout_3->addItem(horizontalSpacer_5, 1, 0, 1, 1);
458
459         modeButton = new QRadioButton(actionTab);
460         modeButton->setObjectName(QStringLiteral("modeButton"));
461         modeButton->setAutoExclusive(false);
462
463         gridLayout_3->addWidget(modeButton, 0, 0, 1, 2);
464
465         modeWrapBox = new QCheckBox(actionTab);
```

```
466         modeWrapBox->setObjectName(QStringLiteral("modeWrapBox"));
467         modeWrapBox->setChecked(true);
468 
469         gridLayout_3->addWidget(modeWrapBox, 1, 3, 1, 1);
470 
471         lightWrapBox = new QCheckBox(actionTab);
472         lightWrapBox->setObjectName(QStringLiteral("lightWrapBox"));
473         lightWrapBox->setChecked(true);
474 
475         gridLayout_3->addWidget(lightWrapBox, 4, 3, 1, 1);
476 
477         verticalSpacer_7 = new QSpacerItem(20, 5, QSizePolicy::Minimum, QSizePolicy::Fixed)
    ;
478 
479         gridLayout_3->addItem(verticalSpacer_7, 2, 1, 1, 1);
480 
481         verticalSpacer_6 = new QSpacerItem(20, 5, QSizePolicy::Minimum, QSizePolicy::Fixed)
    ;
482 
483         gridLayout_3->addItem(verticalSpacer_6, 5, 1, 1, 1);
484 
485         lockButton = new QRadioButton(actionTab);
486         lockButton->setObjectName(QStringLiteral("lockButton"));
487         lockButton->setAutoExclusive(false);
488 
489         gridLayout_3->addWidget(lockButton, 6, 0, 1, 2);
490 
491         verticalSpacer_5 = new QSpacerItem(20, 40, QSizePolicy::Minimum,
    QSizePolicy::Expanding);
492 
493         gridLayout_3->addItem(verticalSpacer_5, 8, 1, 1, 1);
494 
495         lightBox = new QComboBox(actionTab);
496         lightBox->setObjectName(QStringLiteral("lightBox"));
497         sizePolicy1.setHeightForWidth(lightBox->sizePolicy().hasHeightForWidth());
498         lightBox->setSizePolicy(sizePolicy1);
499 
500         gridLayout_3->addWidget(lightBox, 4, 1, 1, 1);
501 
502         lockBox = new QComboBox(actionTab);
503         lockBox->setObjectName(QStringLiteral("lockBox"));
504         sizePolicy1.setHeightForWidth(lockBox->sizePolicy().hasHeightForWidth());
505         lockBox->setSizePolicy(sizePolicy1);
506 
507         gridLayout_3->addWidget(lockBox, 7, 1, 1, 1);
508 
509         lightButton = new QRadioButton(actionTab);
510         lightButton->setObjectName(QStringLiteral("lightButton"));
511         lightButton->setAutoExclusive(false);
512 
513         gridLayout_3->addWidget(lightButton, 3, 0, 1, 2);
514 
515         modeBox = new QComboBox(actionTab);
516         modeBox->setObjectName(QStringLiteral("modeBox"));
517         sizePolicy1.setHeightForWidth(modeBox->sizePolicy().hasHeightForWidth());
518         modeBox->setSizePolicy(sizePolicy1);
519 
520         gridLayout_3->addWidget(modeBox, 1, 1, 1, 1);
521 
522         horizontalSpacer_8 = new QSpacerItem(5, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
523 
524         gridLayout_3->addItem(horizontalSpacer_8, 1, 2, 1, 1);
525 
526         horizontalSpacer_10 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
527 
528         gridLayout_3->addItem(horizontalSpacer_10, 7, 3, 1, 1);
529 
530         horizontalSpacer_7 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
531 
532         gridLayout_3->addItem(horizontalSpacer_7, 1, 4, 1, 1);
533 
534         horizontalSpacer_6 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
535 
536         gridLayout_3->addItem(horizontalSpacer_6, 1, 5, 1, 1);
537 
538         tabWidget->addTab(actionTab, QString());
539         programTab = new QWidget();
540         programTab->setObjectName(QStringLiteral("programTab"));
541         gridLayout_4 = new QGridLayout(programTab);
542         gridLayout_4->setObjectName(QStringLiteral("gridLayout_4"));
543         verticalSpacer = new QSpacerItem(20, 5, QSizePolicy::Minimum, QSizePolicy::Fixed);
544 
545         gridLayout_4->addItem(verticalSpacer, 2, 1, 1, 1);
```

```
546
547         horizontalSpacer = new QSpacerItem(5, 20, QSizePolicy::Fixed, QSizePolicy::Minimum)
    ;
548
549         gridLayout_4->addItem(horizontalSpacer, 1, 0, 1, 1);
550
551         programKpButton = new QCheckBox(programTab);
552         programKpButton->setObjectName(QStringLiteral("programKpButton"));
553
554         gridLayout_4->addWidget(programKpButton, 0, 0, 1, 2);
555
556         programKpBox = new QLineEdit(programTab);
557         programKpBox->setObjectName(QStringLiteral("programKpBox"));
558
559         gridLayout_4->addWidget(programKpBox, 1, 1, 1, 1);
560
561         horizontalSpacer_11 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
562
563         gridLayout_4->addItem(horizontalSpacer_11, 0, 2, 1, 2);
564
565         horizontalSpacer_13 = new QSpacerItem(20, 20, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
566
567         gridLayout_4->addItem(horizontalSpacer_13, 1, 2, 1, 1);
568
569         programKrBox = new QLineEdit(programTab);
570         programKrBox->setObjectName(QStringLiteral("programKrBox"));
571
572         gridLayout_4->addWidget(programKrBox, 4, 1, 1, 1);
573
574         programKrButton = new QCheckBox(programTab);
575         programKrButton->setObjectName(QStringLiteral("programKrButton"));
576
577         gridLayout_4->addWidget(programKrButton, 3, 0, 1, 2);
578
579         horizontalSpacer_12 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
580
581         gridLayout_4->addItem(horizontalSpacer_12, 0, 4, 1, 1);
582
583         programKpExtra = new QWidget(programTab);
584         programKpExtra->setObjectName(QStringLiteral("programKpExtra"));
585         horizontalLayout_2 = new QHBoxLayout(programKpExtra);
586         horizontalLayout_2->setSpacing(12);
587         horizontalLayout_2->setObjectName(QStringLiteral("horizontalLayout_2"));
588         horizontalLayout_2->setContentsMargins(0, 0, 0, 0);
589         programKpSIBox = new QCheckBox(programKpExtra);
590         programKpSIBox->setObjectName(QStringLiteral("programKpSIBox"));
591
592         horizontalLayout_2->addWidget(programKpSIBox);
593
594         programKpModeBox = new QComboBox(programKpExtra);
595         programKpModeBox->setObjectName(QStringLiteral("programKpModeBox"));
596
597         horizontalLayout_2->addWidget(programKpModeBox);
598
599         horizontalSpacer_15 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
600
601         horizontalLayout_2->addItem(horizontalSpacer_15);
602
603
604         gridLayout_4->addWidget(programKpExtra, 1, 3, 1, 2);
605
606         programKrExtra = new QWidget(programTab);
607         programKrExtra->setObjectName(QStringLiteral("programKrExtra"));
608         horizontalLayout_3 = new QHBoxLayout(programKrExtra);
609         horizontalLayout_3->setSpacing(12);
610         horizontalLayout_3->setObjectName(QStringLiteral("horizontalLayout_3"));
611         horizontalLayout_3->setContentsMargins(0, 0, 0, 0);
612         programKrSIBox = new QCheckBox(programKrExtra);
613         programKrSIBox->setObjectName(QStringLiteral("programKrSIBox"));
614
615         horizontalLayout_3->addWidget(programKrSIBox);
616
617         programKrModeBox = new QComboBox(programKrExtra);
618         programKrModeBox->setObjectName(QStringLiteral("programKrModeBox"));
619
620         horizontalLayout_3->addWidget(programKrModeBox);
621
622         horizontalSpacer_16 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
623
624         horizontalLayout_3->addItem(horizontalSpacer_16);
625
626
```

```
627         gridLayout_4->addWidget(programKrExtra, 4, 3, 1, 2);
628
629         progTipLabel = new QLabel(programTab);
630         progTipLabel->setObjectName(QStringLiteral("progTipLabel"));
631         QSizePolicy sizePolicy3(QSizePolicy::Preferred, QSizePolicy::Expanding);
632         sizePolicy3.setHorizontalStretch(0);
633         sizePolicy3.setVerticalStretch(0);
634         sizePolicy3.setHeightForWidth(progTipLabel->sizePolicy().hasHeightForWidth());
635         progTipLabel->setSizePolicy(sizePolicy3);
636         progTipLabel->setTextInteractionFlags(Qt::LinksAccessibleByMouse|
    Qt::TextSelectableByMouse);
637
638         gridLayout_4->addWidget(progTipLabel, 5, 1, 1, 4);
639
640         tabWidget->addTab(programTab, QString());
641         macroTab = new QWidget();
642         macroTab->setObjectName(QStringLiteral("macroTab"));
643         layoutWidget1 = new QWidget(macroTab);
644         layoutWidget1->setObjectName(QStringLiteral("layoutWidget1"));
645         layoutWidget1->setGeometry(QRect(40, 12, 241, 161));
646         gridLayout_8 = new QGridLayout(layoutWidget1);
647         gridLayout_8->setObjectName(QStringLiteral("gridLayout_8"));
648         gridLayout_8->setSizeConstraint(QLayout::SetNoConstraint);
649         gridLayout_8->setContentsMargins(0, 0, 0, 0);
650         groupBox_2 = new QGroupBox(layoutWidget1);
651         groupBox_2->setObjectName(QStringLiteral("groupBox_2"));
652         pteMacroBox = new QPlainTextEdit(groupBox_2);
653         pteMacroBox->setObjectName(QStringLiteral("pteMacroBox"));
654         pteMacroBox->setGeometry(QRect(0, 20, 241, 131));
655         pteMacroBox->setFocusPolicy(Qt::WheelFocus);
656         pteMacroBox->setTabChangesFocus(true);
657
658         gridLayout_8->addWidget(groupBox_2, 0, 0, 1, 1);
659
660         pteMacroComment = new QPlainTextEdit(macroTab);
661         pteMacroComment->setObjectName(QStringLiteral("pteMacroComment"));
662         pteMacroComment->setEnabled(true);
663         pteMacroComment->setGeometry(QRect(410, 10, 311, 31));
664         pteMacroComment->setFocusPolicy(Qt::WheelFocus);
665         pteMacroComment->setContextMenuPolicy(Qt::NoContextMenu);
666         pteMacroComment->setAcceptDrops(true);
667         pteMacroComment->setToolTipDuration(1);
668         pteMacroComment->setInputMethodHints(Qt::ImhNone);
669         pteMacroComment->setVerticalScrollBarPolicy(Qt::ScrollBarAlwaysOff);
670         pteMacroComment->setTabChangesFocus(true);
671         pteMacroComment->setUndoRedoEnabled(true);
672         pteMacroComment->setReadOnly(false);
673         pteMacroComment->setTabStopWidth(1);
674         pteMacroText = new QPlainTextEdit(macroTab);
675         pteMacroText->setObjectName(QStringLiteral("pteMacroText"));
676         pteMacroText->setGeometry(QRect(410, 50, 311, 66));
677         pteMacroText->setFocusPolicy(Qt::StrongFocus);
678         pteMacroText->setContextMenuPolicy(Qt::NoContextMenu);
679         pteMacroText->setAcceptDrops(false);
680         pteMacroText->setInputMethodHints(Qt::ImhNoAutoUppercase);
681         pteMacroText->setUndoRedoEnabled(false);
682         pteMacroText->setReadOnly(false);
683         pteMacroText->setTabStopWidth(1);
684         layoutWidget = new QWidget(macroTab);
685         layoutWidget->setObjectName(QStringLiteral("layoutWidget"));
686         layoutWidget->setGeometry(QRect(300, 10, 111, 71));
687         verticalLayout_2 = new QVBoxLayout(layoutWidget);
688         verticalLayout_2->setObjectName(QStringLiteral("verticalLayout_2"));
689         verticalLayout_2->setSizeConstraint(QLayout::SetNoConstraint);
690         verticalLayout_2->setContentsMargins(0, 0, 0, 0);
691         groupBox_3 = new QGroupBox(layoutWidget);
692         groupBox_3->setObjectName(QStringLiteral("groupBox_3"));
693
694         verticalLayout_2->addWidget(groupBox_3);
695
696         groupBox_4 = new QGroupBox(layoutWidget);
697         groupBox_4->setObjectName(QStringLiteral("groupBox_4"));
698
699         verticalLayout_2->addWidget(groupBox_4);
700
701         layoutWidget_2 = new QWidget(macroTab);
702         layoutWidget_2->setObjectName(QStringLiteral("layoutWidget_2"));
703         layoutWidget_2->setGeometry(QRect(300, 160, 407, 36));
704         gridLayout_10 = new QGridLayout(layoutWidget_2);
705         gridLayout_10->setObjectName(QStringLiteral("gridLayout_10"));
706         gridLayout_10->setContentsMargins(0, 0, 0, 0);
707         btnStopMacro = new QPushButton(layoutWidget_2);
708         btnStopMacro->setObjectName(QStringLiteral("btnStopMacro"));
709         btnStopMacro->setEnabled(false);
710
711         gridLayout_10->addWidget(btnStopMacro, 0, 2, 1, 1);
712
```

```
713         btnClearMacro = new QPushButton(layoutWidget_2);
714         btnClearMacro->setObjectName(QStringLiteral("btnClearMacro"));
715 
716         gridLayout_10->addWidget(btnClearMacro, 0, 3, 1, 1);
717 
718         btnStartMacro = new QPushButton(layoutWidget_2);
719         btnStartMacro->setObjectName(QStringLiteral("btnStartMacro"));
720 
721         gridLayout_10->addWidget(btnStartMacro, 0, 1, 1, 1);
722 
723         label = new QLabel(layoutWidget_2);
724         label->setObjectName(QStringLiteral("label"));
725         label->setStyleSheet(QLatin1String("font: 75 10pt ; \n"
726 ""));
727 
728         gridLayout_10->addWidget(label, 0, 0, 1, 1);
729 
730         lbl_macro = new QLabel(macroTab);
731         lbl_macro->setObjectName(QStringLiteral("lbl_macro"));
732         lbl_macro->setGeometry(QRect(300, 130, 431, 27));
733         lbl_macro->setStyleSheet(QStringLiteral("font: 75 11pt ; color: darkblue;"));
734         layoutWidget2 = new QWidget(macroTab);
735         layoutWidget2->setObjectName(QStringLiteral("layoutWidget2"));
736         layoutWidget2->setGeometry(QRect(40, 170, 238, 28));
737         delayButtons = new QHBoxLayout(layoutWidget2);
738         delayButtons->setSpacing(0);
739         delayButtons->setObjectName(QStringLiteral("delayButtons"));
740         delayButtons->setSizeConstraint(QLayout::SetMinimumSize);
741         delayButtons->setContentsMargins(0, 0, 0, 0);
742         rb_delay_no = new QRadioButton(layoutWidget2);
743         rb_delay_no->setObjectName(QStringLiteral("rb_delay_no"));
744         rb_delay_no->setStyleSheet(QStringLiteral("font: 10pt ; color:  green;"));
745 
746         delayButtons->addWidget(rb_delay_no);
747 
748         rb_delay_default = new QRadioButton(layoutWidget2);
749         rb_delay_default->setObjectName(QStringLiteral("rb_delay_default"));
750         rb_delay_default->setStyleSheet(QStringLiteral("font: 10pt ; color:  green;"));
751         rb_delay_default->setChecked(false);
752         rb_delay_default->setAutoExclusive(true);
753 
754         delayButtons->addWidget(rb_delay_default);
755 
756         rb_delay_asTyped = new QRadioButton(layoutWidget2);
757         rb_delay_asTyped->setObjectName(QStringLiteral("rb_delay_asTyped"));
758         rb_delay_asTyped->setStyleSheet(QStringLiteral("font: 10pt ; color:  green;"));
759         rb_delay_asTyped->setChecked(true);
760 
761         delayButtons->addWidget(rb_delay_asTyped);
762 
763         txtBuffer = new QLabel(macroTab);
764         txtBuffer->setObjectName(QStringLiteral("txtBuffer"));
765         txtBuffer->setEnabled(false);
766         txtBuffer->setGeometry(QRect(300, 100, 0, 0));
767         QSizePolicy sizePolicy4(QSizePolicy::Fixed, QSizePolicy::Fixed);
768         sizePolicy4.setHorizontalStretch(0);
769         sizePolicy4.setVerticalStretch(0);
770         sizePolicy4.setHeightForWidth(txtBuffer->sizePolicy().hasHeightForWidth());
771         txtBuffer->setSizePolicy(sizePolicy4);
772         txtBuffer->setMaximumSize(QSize(0, 0));
773         txtBuffer->setContextMenuPolicy(Qt::NoContextMenu);
774 #ifndef QT_NO_TOOLTIP
775         txtBuffer->setToolTip(QStringLiteral(""));
776 #endif // QT_NO_TOOLTIP
777         txtBuffer->setToolTipDuration(0);
778 #ifndef QT_NO_STATUSTIP
779         txtBuffer->setStatusTip(QStringLiteral(""));
780 #endif // QT_NO_STATUSTIP
781 #ifndef QT_NO_WHATSTHIS
782         txtBuffer->setWhatsThis(QStringLiteral(""));
783 #endif // QT_NO_WHATSTHIS
784         txtBuffer->setFrameShadow(QFrame::Plain);
785         txtBuffer->setLineWidth(0);
786         txtBuffer->setTextFormat(Qt::PlainText);
787         txtBuffer->setIndent(0);
788         txtBuffer->setTextInteractionFlags(Qt::NoTextInteraction);
789         tabWidget->addTab(macroTab, QString());
790         layoutWidget->raise();
791         layoutWidget1->raise();
792         layoutWidget->raise();
793         pteMacroText->raise();
794         layoutWidget_2->raise();
795         lbl_macro->raise();
796         txtBuffer->raise();
797 
798         verticalLayout->addWidget(tabWidget);
799 
```

```
800         horizontalLayout = new QHBoxLayout();
801         horizontalLayout->setObjectName(QStringLiteral("horizontalLayout"));
802         horizontalSpacer_14 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
803 
804         horizontalLayout->addItem(horizontalSpacer_14);
805 
806         unbindButton = new QPushButton(RebindWidget);
807         unbindButton->setObjectName(QStringLiteral("unbindButton"));
808 
809         horizontalLayout->addWidget(unbindButton);
810 
811         resetButton = new QPushButton(RebindWidget);
812         resetButton->setObjectName(QStringLiteral("resetButton"));
813 
814         horizontalLayout->addWidget(resetButton);
815 
816         cancelButton = new QPushButton(RebindWidget);
817         cancelButton->setObjectName(QStringLiteral("cancelButton"));
818 
819         horizontalLayout->addWidget(cancelButton);
820 
821         applyButton = new QPushButton(RebindWidget);
822         applyButton->setObjectName(QStringLiteral("applyButton"));
823 
824         horizontalLayout->addWidget(applyButton);
825 
826 
827         verticalLayout->addLayout(horizontalLayout);
828 
829         QWidget::setTabOrder(tabWidget, pteMacroComment);
830         QWidget::setTabOrder(pteMacroComment, pteMacroBox);
831         QWidget::setTabOrder(pteMacroBox, dpiButton);
832         QWidget::setTabOrder(dpiButton, mb2Box);
833         QWidget::setTabOrder(mb2Box, btnStartMacro);
834         QWidget::setTabOrder(btnStartMacro, fnBox);
835         QWidget::setTabOrder(fnBox, dpiCustYBox);
836         QWidget::setTabOrder(dpiCustYBox, dpiBox);
837         QWidget::setTabOrder(dpiBox, applyButton);
838         QWidget::setTabOrder(applyButton, mbBox);
839         QWidget::setTabOrder(mbBox, cancelButton);
840         QWidget::setTabOrder(cancelButton, wheelBox);
841         QWidget::setTabOrder(wheelBox, btnStopMacro);
842         QWidget::setTabOrder(btnStopMacro, mbButton);
843         QWidget::setTabOrder(mbButton, dpiCustXBox);
844         QWidget::setTabOrder(dpiCustXBox, btnClearMacro);
845         QWidget::setTabOrder(btnClearMacro, wheelButton);
846         QWidget::setTabOrder(wheelButton, mb2Button);
847         QWidget::setTabOrder(mb2Button, animBox);
848         QWidget::setTabOrder(animBox, animKrBox);
849         QWidget::setTabOrder(animKrBox, animOnceBox);
850         QWidget::setTabOrder(animOnceBox, animButton);
851         QWidget::setTabOrder(animButton, modeButton);
852         QWidget::setTabOrder(modeButton, modeWrapBox);
853         QWidget::setTabOrder(modeWrapBox, lightWrapBox);
854         QWidget::setTabOrder(lightWrapBox, lockButton);
855         QWidget::setTabOrder(lockButton, lightBox);
856         QWidget::setTabOrder(lightBox, resetButton);
857         QWidget::setTabOrder(resetButton, lockBox);
858         QWidget::setTabOrder(lockBox, lightButton);
859         QWidget::setTabOrder(lightButton, modeBox);
860         QWidget::setTabOrder(modeBox, unbindButton);
861         QWidget::setTabOrder(unbindButton, programKpButton);
862         QWidget::setTabOrder(programKpButton, programKpBox);
863         QWidget::setTabOrder(programKpBox, programKrBox);
864         QWidget::setTabOrder(programKrBox, programKrButton);
865         QWidget::setTabOrder(programKrButton, programKpSIBox);
866         QWidget::setTabOrder(programKpSIBox, programKpModeBox);
867         QWidget::setTabOrder(programKpModeBox, programKrSIBox);
868         QWidget::setTabOrder(programKrSIBox, programKrModeBox);
869         QWidget::setTabOrder(programKrModeBox, typingBox);
870         QWidget::setTabOrder(typingBox, numBox);
871         QWidget::setTabOrder(numBox, pteMacroText);
872         QWidget::setTabOrder(pteMacroText, typingButton);
873         QWidget::setTabOrder(typingButton, mediaButton);
874         QWidget::setTabOrder(mediaButton, modBox);
875         QWidget::setTabOrder(modBox, modButton);
876         QWidget::setTabOrder(modButton, fnButton);
877         QWidget::setTabOrder(fnButton, mediaBox);
878         QWidget::setTabOrder(mediaBox, numButton);
879 
880         retranslateUi(RebindWidget);
881         QObject::connect(btnClearMacro, SIGNAL(clicked()),
    pteMacroText, SLOT(clear()));
882         QObject::connect(btnClearMacro, SIGNAL(clicked()),
    pteMacroComment, SLOT(clear()));
883         QObject::connect(btnClearMacro, SIGNAL(clicked()),
```

```
      btnStopMacro, SLOT(animateClick()));
884         QObject::connect(cancelButton, SIGNAL(clicked()), txtBuffer, SLOT(clear()));
885         QObject::connect(btnClearMacro, SIGNAL(clicked()),
      txtBuffer, SLOT(clear()));
886         QObject::connect(btnStartMacro, SIGNAL(clicked()),
      txtBuffer, SLOT(clear()));
887         QObject::connect(unbindButton, SIGNAL(clicked()), txtBuffer, SLOT(clear()));
888         QObject::connect(resetButton, SIGNAL(clicked()), txtBuffer, SLOT(clear()));
889
890         tabWidget->setCurrentIndex(0);
891         applyButton->setDefault(true);
892
893
894         QMetaObject::connectSlotsByName(RebindWidget);
895     } // setupUi
```

Here is the call graph for this function:



Here is the caller graph for this function:

12.100.3 Field Documentation

12.100.3.1 QWidget* Ui_RebindWidget::actionTab

Definition at line 92 of file ui_rebindwidget.h.

Referenced by retranslateUi(), and setupUi().

12.100.3.2 QComboBox* Ui_RebindWidget::animBox

Definition at line 84 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::on_animBox_currentIndexChanged(), RebindWidget::on_animButton_clicked(), retranslateUi(), RebindWidget::setBox(), RebindWidget::setSelection(), and setupUi().

12.100.3.3 QRadioButton* Ui_RebindWidget::animButton

Definition at line 90 of file ui_rebindwidget.h.

Referenced by RebindWidget::on_animBox_currentIndexChanged(), retranslateUi(), and setupUi().

12.100.3.4 QCheckBox* Ui_RebindWidget::animKrBox

Definition at line 87 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), retranslateUi(), RebindWidget::setSelection(), and setupUi().

12.100.3.5 QCheckBox* Ui_RebindWidget::animOnceBox

Definition at line 88 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), retranslateUi(), RebindWidget::setSelection(), and setupUi().

12.100.3.6 QWidget* Ui_RebindWidget::animTab

Definition at line 81 of file ui_rebindwidget.h.

Referenced by retranslateUi(), and setupUi().

12.100.3.7 QPushButton* Ui_RebindWidget::applyButton

Definition at line 161 of file ui_rebindwidget.h.

Referenced by RebindWidget::on_btnStartMacro_clicked(), RebindWidget::on_btnStopMacro_clicked(), retranslateUi(), and setupUi().

12.100.3.8 QPushButton* Ui_RebindWidget::btnClearMacro

Definition at line 146 of file ui_rebindwidget.h.

Referenced by retranslateUi(), and setupUi().

12.100.3.9 QPushButton* Ui_RebindWidget::btnStartMacro

Definition at line 147 of file ui_rebindwidget.h.

Referenced by RebindWidget::on_btnStartMacro_clicked(), RebindWidget::on_btnStopMacro_clicked(), retranslateUi(), and setupUi().

12.100.3.10 QPushButton* Ui_RebindWidget::btnStopMacro

Definition at line 145 of file ui_rebindwidget.h.

Referenced by RebindWidget::on_btnStartMacro_clicked(), RebindWidget::on_btnStopMacro_clicked(), retranslateUi(), and setupUi().

12.100.3.11 QPushButton* Ui_RebindWidget::cancelButton

Definition at line 160 of file ui_rebindwidget.h.

Referenced by retranslateUi(), and setupUi().

12.100.3.12 QHBoxLayout* Ui_RebindWidget::delayButtons

Definition at line 151 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.13 QComboBox* Ui_RebindWidget::dpiBox

Definition at line 68 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::on_dpiBox_currentIndexChanged(), RebindWidget::on_dpiButton_clicked(), retranslateUi(), RebindWidget::setBind(), RebindWidget::setBox(), RebindWidget::setSelection(), and setupUi().

12.100.3.14 QRadioButton* Ui_RebindWidget::dpiButton

Definition at line 62 of file ui_rebindwidget.h.

Referenced by RebindWidget::on_dpiBox_currentIndexChanged(), retranslateUi(), RebindWidget::setBind(), and setupUi().

12.100.3.15 QLabel* Ui_RebindWidget::dpiCustLabel

Definition at line 78 of file ui_rebindwidget.h.

Referenced by RebindWidget::on_dpiBox_currentIndexChanged(), retranslateUi(), RebindWidget::setBind(), and setupUi().

12.100.3.16 QSpinBox* Ui_RebindWidget::dpiCustXBox

Definition at line 73 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::on_dpiBox_currentIndexChanged(), RebindWidget::setBind(), RebindWidget::setSelection(), and setupUi().

12.100.3.17 QSpinBox* Ui_RebindWidget::dpiCustYBox

Definition at line 69 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::on_dpiBox_currentIndexChanged(), RebindWidget::setBind(), RebindWidget::setSelection(), and setupUi().

12.100.3.18 QLabel* Ui_RebindWidget::dpiWarning

Definition at line 74 of file ui_rebindwidget.h.

Referenced by retranslateUi(), RebindWidget::setBind(), and setupUi().

12.100.3.19 QComboBox* Ui_RebindWidget::fnBox

Definition at line 44 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::on_fnBox_currentIndexChanged(), RebindWidget::on_fnButton_clicked(), RebindWidget::RebindWidget(), retranslateUi(), RebindWidget::setBox(), RebindWidget::setSelection(), and setupUi().

12.100.3.20 QRadioButton* Ui_RebindWidget::fnButton

Definition at line 56 of file ui_rebindwidget.h.

Referenced by RebindWidget::on_fnBox_currentIndexChanged(), retranslateUi(), and setupUi().

12.100.3.21 QGridLayout* Ui_RebindWidget::gridLayout

Definition at line 61 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.22 QGridLayout* Ui_RebindWidget::gridLayout_10

Definition at line 144 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.23 QGridLayout* Ui_RebindWidget::gridLayout_2

Definition at line 41 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.24 QGridLayout* Ui_RebindWidget::gridLayout_3

Definition at line 93 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.25 QGridLayout* Ui_RebindWidget::gridLayout_4

Definition at line 111 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.26 QGridLayout* Ui_RebindWidget::gridLayout_5

Definition at line 82 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.27 QGridLayout* Ui_RebindWidget::gridLayout_8

Definition at line 134 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.28 QGroupBox* Ui_RebindWidget::groupBox_2

Definition at line 135 of file ui_rebindwidget.h.

Referenced by retranslateUi(), and setupUi().

12.100.3.29 QGroupBox* Ui_RebindWidget::groupBox_3

Definition at line 141 of file ui_rebindwidget.h.

Referenced by retranslateUi(), and setupUi().

12.100.3.30 QGroupBox* Ui_RebindWidget::groupBox_4

Definition at line 142 of file ui_rebindwidget.h.

Referenced by retranslateUi(), and setupUi().

12.100.3.31 QHBoxLayout* Ui_RebindWidget::horizontalLayout

Definition at line 156 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.32 QHBoxLayout* Ui_RebindWidget::horizontalLayout_2

Definition at line 122 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.33 QHBoxLayout* Ui_RebindWidget::horizontalLayout_3

Definition at line 127 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.34 QSpacerItem* Ui_RebindWidget::horizontalSpacer

Definition at line 113 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.35 QSpacerItem* Ui_RebindWidget::horizontalSpacer_10

Definition at line 107 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.36 QSpacerItem* Ui_RebindWidget::horizontalSpacer_11

Definition at line 116 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.37 QSpacerItem* Ui_RebindWidget::horizontalSpacer_12

Definition at line 120 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.38 QSpacerItem* Ui_RebindWidget::horizontalSpacer_13

Definition at line 117 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.39 QSpacerItem* Ui_RebindWidget::horizontalSpacer_14

Definition at line 157 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.40 QSpacerItem* Ui_RebindWidget::horizontalSpacer_15

Definition at line 125 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.41 QSpacerItem* Ui_RebindWidget::horizontalSpacer_16

Definition at line 130 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.42 QSpacerItem* Ui_RebindWidget::horizontalSpacer_17

Definition at line 59 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.43 QSpacerItem* Ui_RebindWidget::horizontalSpacer_18

Definition at line 65 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.44 QSpacerItem* Ui_RebindWidget::horizontalSpacer_19

Definition at line 79 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.45 QSpacerItem* Ui_RebindWidget::horizontalSpacer_2

Definition at line 47 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.46 QSpacerItem* Ui_RebindWidget::horizontalSpacer_20

Definition at line 66 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.47 QSpacerItem* Ui_RebindWidget::horizontalSpacer_21

Definition at line 80 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.48 QSpacerItem* Ui_RebindWidget::horizontalSpacer_22

Definition at line 76 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.49 QSpacerItem* Ui_RebindWidget::horizontalSpacer_23

Definition at line 91 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.50 QSpacerItem* Ui_RebindWidget::horizontalSpacer_24

Definition at line 85 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.51 QSpacerItem* Ui_RebindWidget::horizontalSpacer_25

Definition at line 86 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.52 QSpacerItem* Ui_RebindWidget::horizontalSpacer_26

Definition at line 89 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.53 QSpacerItem* Ui_RebindWidget::horizontalSpacer_3

Definition at line 50 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.54 QSpacerItem* Ui_RebindWidget::horizontalSpacer_4

Definition at line 54 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.55 QSpacerItem* Ui_RebindWidget::horizontalSpacer_5

Definition at line 94 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.56 QSpacerItem* Ui_RebindWidget::horizontalSpacer_6

Definition at line 109 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.57 QSpacerItem* Ui_RebindWidget::horizontalSpacer_7

Definition at line 108 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.58 QSpacerItem* Ui_RebindWidget::horizontalSpacer_8

Definition at line 106 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.59 QSpacerItem* Ui_RebindWidget::horizontalSpacer_9

Definition at line 53 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.60 QWidget* Ui_RebindWidget::keyTab

Definition at line 40 of file ui_rebindwidget.h.

Referenced by retranslateUi(), and setupUi().

12.100.3.61 QLabel* Ui_RebindWidget::label

Definition at line 148 of file ui_rebindwidget.h.

Referenced by retranslateUi(), and setupUi().

12.100.3.62 QWidget* Ui_RebindWidget::layoutWidget

Definition at line 139 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.63 QWidget* Ui_RebindWidget::layoutWidget1

Definition at line 133 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.64 QWidget* Ui_RebindWidget::layoutWidget2

Definition at line 150 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.65 QWidget* Ui_RebindWidget::layoutWidget_2

Definition at line 143 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.66 QLabel* Ui_RebindWidget::lbl_macro

Definition at line 149 of file ui_rebindwidget.h.

Referenced by RebindWidget::helpStatus(), retranslateUi(), and setupUi().

12.100.3.67 QComboBox* Ui_RebindWidget::lightBox

Definition at line 102 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::on_lightBox_currentIndexChanged(), RebindWidget::on_lightButton_clicked(), retranslateUi(), RebindWidget::setBox(), RebindWidget::setSelection(), and setupUi().

12.100.3.68 QRadioButton* Ui_RebindWidget::lightButton

Definition at line 104 of file ui_rebindwidget.h.

Referenced by RebindWidget::on_lightBox_currentIndexChanged(), retranslateUi(), and setupUi().

12.100.3.69 QCheckBox* Ui_RebindWidget::lightWrapBox

Definition at line 97 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::on_lightBox_currentIndexChanged(), RebindWidget::RebindWidget(), retranslateUi(), RebindWidget::setSelection(), and setupUi().

12.100.3.70 QComboBox* Ui_RebindWidget::lockBox

Definition at line 103 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::on_lockBox_currentIndexChanged(), RebindWidget::on_lockButton_clicked(), retranslateUi(), RebindWidget::setBox(), RebindWidget::setSelection(), and setupUi().

12.100.3.71 QRadioButton* Ui_RebindWidget::lockButton

Definition at line 100 of file ui_rebindwidget.h.

Referenced by RebindWidget::on_lockBox_currentIndexChanged(), retranslateUi(), and setupUi().

12.100.3.72 QWidget* Ui_RebindWidget::macroTab

Definition at line 132 of file ui_rebindwidget.h.

Referenced by retranslateUi(), and setupUi().

12.100.3.73 QComboBox* Ui_RebindWidget::mb2Box

Definition at line 67 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::on_mb2Box_currentIndexChanged(), RebindWidget::on_mb2Button_clicked(), retranslateUi(), RebindWidget::setBox(), RebindWidget::setSelection(), and setupUi().

12.100.3.74 QRadioButton* Ui_RebindWidget::mb2Button

Definition at line 77 of file ui_rebindwidget.h.

Referenced by RebindWidget::on_mb2Box_currentIndexChanged(), retranslateUi(), and setupUi().

12.100.3.75 QComboBox* Ui_RebindWidget::mbBox

Definition at line 70 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::on_mbBox_currentIndexChanged(), RebindWidget::on_mbButton_clicked(), retranslateUi(), RebindWidget::setBox(), RebindWidget::setSelection(), and setupUi().

12.100.3.76 QRadioButton* Ui_RebindWidget::mbButton

Definition at line 72 of file ui_rebindwidget.h.

Referenced by RebindWidget::on_mbBox_currentIndexChanged(), retranslateUi(), and setupUi().

12.100.3.77 QComboBox* Ui_RebindWidget::mediaBox

Definition at line 57 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::on_mediaBox_currentIndexChanged(), RebindWidget::on_mediaButton_clicked(), RebindWidget::RebindWidget(), retranslateUi(), RebindWidget::setBox(), RebindWidget::setSelection(), and setupUi().

12.100.3.78 QRadioButton* Ui_RebindWidget::mediaButton

Definition at line 51 of file ui_rebindwidget.h.

Referenced by RebindWidget::on_mediaBox_currentIndexChanged(), retranslateUi(), and setupUi().

12.100.3.79 QComboBox* Ui_RebindWidget::modBox

Definition at line 49 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::on_modBox_currentIndexChanged(), RebindWidget::on_modButton_clicked(), RebindWidget::RebindWidget(), retranslateUi(), RebindWidget::setBox(), RebindWidget::setSelection(), and setupUi().

12.100.3.80 QRadioButton* Ui_RebindWidget::modButton

Definition at line 55 of file ui_rebindwidget.h.

Referenced by RebindWidget::on_modBox_currentIndexChanged(), retranslateUi(), and setupUi().

12.100.3.81 QComboBox* Ui_RebindWidget::modeBox

Definition at line 105 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::on_modeBox_currentIndexChanged(), RebindWidget::on_modeButton_clicked(), retranslateUi(), RebindWidget::setBind(), RebindWidget::setBox(), RebindWidget::setSelection(), and setupUi().

12.100.3.82 QRadioButton* Ui_RebindWidget::modeButton

Definition at line 95 of file ui_rebindwidget.h.

Referenced by RebindWidget::on_modeBox_currentIndexChanged(), retranslateUi(), and setupUi().

12.100.3.83 QCheckBox* Ui_RebindWidget::modeWrapBox

Definition at line 96 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::on_modeBox_currentIndexChanged(), RebindWidget::RebindWidget(), retranslateUi(), RebindWidget::setSelection(), and setupUi().

12.100.3.84 QWidget* Ui_RebindWidget::mouseTab

Definition at line 60 of file ui_rebindwidget.h.

Referenced by retranslateUi(), and setupUi().

12.100.3.85 QComboBox* Ui_RebindWidget::numBox

Definition at line 42 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::on_numBox_currentIndexChanged(), RebindWidget::on_numButton_clicked(), RebindWidget::RebindWidget(), retranslateUi(), RebindWidget::setBox(), RebindWidget::setSelection(), and setupUi().

12.100.3.86 QRadioButton* Ui_RebindWidget::numButton

Definition at line 58 of file ui_rebindwidget.h.

Referenced by RebindWidget::on_numBox_currentIndexChanged(), retranslateUi(), and setupUi().

12.100.3.87 QLineEdit* Ui_RebindWidget::programKpBox

Definition at line 115 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::on_programKpBox_textChanged(), RebindWidget::on_programKpButton_clicked(), RebindWidget::setBox(), RebindWidget::setSelection(), and setupUi().

12.100.3.88 QCheckBox* Ui_RebindWidget::programKpButton

Definition at line 114 of file ui_rebindwidget.h.

Referenced by RebindWidget::on_programKpBox_textChanged(), retranslateUi(), RebindWidget::setBox(), and setupUi().

12.100.3.89 QWidget* Ui_RebindWidget::programKpExtra

Definition at line 121 of file ui_rebindwidget.h.

Referenced by RebindWidget::on_programKpBox_textChanged(), RebindWidget::RebindWidget(), and setupUi().

12.100.3.90 QComboBox* Ui_RebindWidget::programKpModeBox

Definition at line 124 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::on_programKpSIBox_clicked(), retranslateUi(), RebindWidget::setSelection(), and setupUi().

12.100.3.91 QCheckBox* Ui_RebindWidget::programKpSIBox

Definition at line 123 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), retranslateUi(), RebindWidget::setSelection(), and setupUi().

12.100.3.92 QLineEdit* Ui_RebindWidget::programKrBox

Definition at line 118 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::on_programKrBox_textChanged(), RebindWidget::on_programKrButton_clicked(), RebindWidget::setBox(), RebindWidget::setSelection(), and setupUi().

12.100.3.93 QCheckBox* Ui_RebindWidget::programKrButton

Definition at line 119 of file ui_rebindwidget.h.

Referenced by RebindWidget::on_programKrBox_textChanged(), retranslateUi(), RebindWidget::setBox(), and setupUi().

12.100.3.94 QWidget* Ui_RebindWidget::programKrExtra

Definition at line 126 of file ui_rebindwidget.h.

Referenced by RebindWidget::on_programKrBox_textChanged(), RebindWidget::RebindWidget(), and setupUi().

12.100.3.95 QComboBox* Ui_RebindWidget::programKrModeBox

Definition at line 129 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::on_programKrSIBox_clicked(), retranslateUi(), RebindWidget::setSelection(), and setupUi().

12.100.3.96 QCheckBox* Ui_RebindWidget::programKrSIBox

Definition at line 128 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), retranslateUi(), RebindWidget::setSelection(), and setupUi().

12.100.3.97 QWidget* Ui_RebindWidget::programTab

Definition at line 110 of file ui_rebindwidget.h.

Referenced by retranslateUi(), and setupUi().

12.100.3.98 QLabel* Ui_RebindWidget::progTipLabel

Definition at line 131 of file ui_rebindwidget.h.

Referenced by RebindWidget::RebindWidget(), retranslateUi(), and setupUi().

12.100.3.99 QPlainTextEdit* Ui_RebindWidget::pteMacroBox

Definition at line 136 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::convertMacroBox(), RebindWidget::on_btnStartMacro_clicked(), RebindWidget::on_pteMacroBox_textChanged(), RebindWidget::setBox(), RebindWidget::setSelection(), and setupUi().

12.100.3.100 QPlainTextEdit* Ui_RebindWidget::pteMacroComment

Definition at line 137 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), retranslateUi(), RebindWidget::setSelection(), and setupUi().

12.100.3.101 QPlainTextEdit* Ui_RebindWidget::pteMacroText

Definition at line 138 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::on_btnStartMacro_clicked(), retranslateUi(), RebindWidget::setSelection(), and setupUi().

12.100.3.102 QRadioButton* Ui_RebindWidget::rb_delay_asTyped

Definition at line 154 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::on_btnStartMacro_clicked(), RebindWidget::on_btnStopMacro_clicked(), retranslateUi(), RebindWidget::setCorrectRadioButton(), and setupUi().

12.100.3.103 QRadioButton* Ui_RebindWidget::rb_delay_default

Definition at line 153 of file ui_rebindwidget.h.

Referenced by RebindWidget::convertMacroBox(), RebindWidget::on_btnStartMacro_clicked(), RebindWidget::on_btnStopMacro_clicked(), retranslateUi(), RebindWidget::setCorrectRadioButton(), and setupUi().

12.100.3.104 QRadioButton* Ui_RebindWidget::rb_delay_no

Definition at line 152 of file ui_rebindwidget.h.

Referenced by RebindWidget::convertMacroBox(), RebindWidget::on_btnStartMacro_clicked(), RebindWidget::on_btnStopMacro_clicked(), retranslateUi(), RebindWidget::setCorrectRadioButton(), and setupUi().

12.100.3.105 QPushButton* Ui_RebindWidget::resetButton

Definition at line 159 of file ui_rebindwidget.h.

Referenced by RebindWidget::on_btnStartMacro_clicked(), RebindWidget::on_btnStopMacro_clicked(), retranslateUi(), and setupUi().

12.100.3.106 QTabWidget* Ui_RebindWidget::tabWidget

Definition at line 39 of file ui_rebindwidget.h.

Referenced by retranslateUi(), RebindWidget::setSelection(), and setupUi().

12.100.3.107 QLabel* Ui_RebindWidget::txtBuffer

Definition at line 155 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::convertMacroBox(), retranslateUi(), RebindWidget::setBox(), RebindWidget::setSelection(), and setupUi().

12.100.3.108 QComboBox* Ui_RebindWidget::typingBox

Definition at line 43 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::on_typingBox_currentIndexChanged(), RebindWidget::on_typingButton_clicked(), retranslateUi(), RebindWidget::setBind(), RebindWidget::setBox(), RebindWidget::setSelection(), and setupUi().

12.100.3.109 QRadioButton* Ui_RebindWidget::typingButton

Definition at line 48 of file ui_rebindwidget.h.

Referenced by RebindWidget::on_typingBox_currentIndexChanged(), retranslateUi(), and setupUi().

12.100.3.110 QPushButton* Ui_RebindWidget::unbindButton

Definition at line 158 of file ui_rebindwidget.h.

Referenced by RebindWidget::on_btnStartMacro_clicked(), RebindWidget::on_btnStopMacro_clicked(), retranslateUi(), and setupUi().

12.100.3.111 QVBoxLayout* Ui_RebindWidget::verticalLayout

Definition at line 38 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.112 QVBoxLayout* Ui_RebindWidget::verticalLayout_2

Definition at line 140 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.113 QSpacerItem* Ui_RebindWidget::verticalSpacer

Definition at line 112 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.114 QSpacerItem* Ui_RebindWidget::verticalSpacer_10

Definition at line 45 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.115 QSpacerItem* Ui_RebindWidget::verticalSpacer_11

Definition at line 83 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.116 QSpacerItem* Ui_RebindWidget::verticalSpacer_2

Definition at line 63 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.117 QSpacerItem* Ui_RebindWidget::verticalSpacer_3

Definition at line 46 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.118 QSpacerItem* Ui_RebindWidget::verticalSpacer_4

Definition at line 52 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.119 QSpacerItem* Ui_RebindWidget::verticalSpacer_5

Definition at line 101 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.120 QSpacerItem* Ui_RebindWidget::verticalSpacer_6

Definition at line 99 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.121 QSpacerItem* Ui_RebindWidget::verticalSpacer_7

Definition at line 98 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.122 QSpacerItem* Ui_RebindWidget::verticalSpacer_8

Definition at line 64 of file ui_rebindwidget.h.

Referenced by setupUi().

12.100.3.123 QComboBox* Ui_RebindWidget::wheelBox

Definition at line 71 of file ui_rebindwidget.h.

Referenced by RebindWidget::applyChanges(), RebindWidget::on_wheelBox_currentIndexChanged(), RebindWidget::on_wheelButton_clicked(), retranslateUi(), RebindWidget::setBox(), RebindWidget::setSelection(), and setupUi().

12.100.3.124 QRadioButton* Ui_RebindWidget::wheelButton

Definition at line 75 of file ui_rebindwidget.h.

Referenced by RebindWidget::on_wheelBox_currentIndexChanged(), retranslateUi(), and setupUi().

The documentation for this class was generated from the following file:

- src/ckb/ui_rebindwidget.h

12.101 Ui_SettingsWidget Class Reference

`#include <src/ckb/ui_settingswidget.h>`

Inheritance diagram for Ui_SettingsWidget:

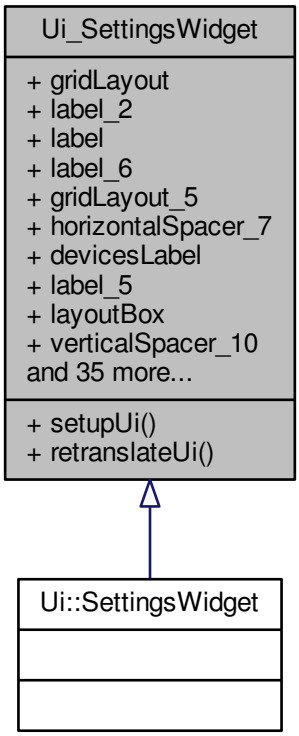

Collaboration diagram for Ui_SettingsWidget:

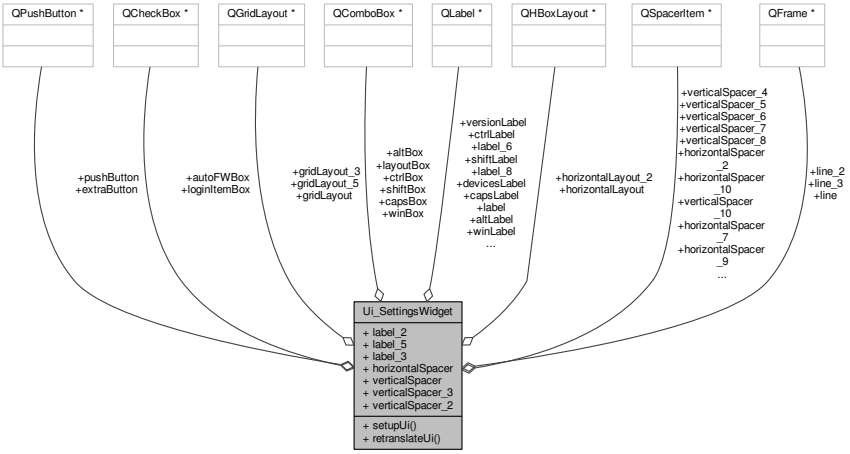

Public Member Functions

- void setupUi (QWidget *SettingsWidget)
- void retranslateUi (QWidget *SettingsWidget)

Data Fields

- QGridLayout * gridLayout
- QLabel * label_2
- QLabel * label
- QLabel * label_6
- QGridLayout * gridLayout_5
- QSpacerItem * horizontalSpacer_7
- QLabel * devicesLabel
- QLabel * label_5
- QComboBox * layoutBox
- QSpacerItem * verticalSpacer_10
- QHBoxLayout * horizontalLayout_2
- QLabel * label_3
- QSpacerItem * horizontalSpacer
- QPushButton * pushButton
- QSpacerItem * verticalSpacer
- QSpacerItem * verticalSpacer_8
- QCheckBox * loginItemBox
- QSpacerItem * verticalSpacer_6
- QCheckBox * autoFWBox
- QFrame * line_2
- QLabel * label_8
- QGridLayout * gridLayout_3
- QLabel * shiftLabel
- QLabel * capsLabel
- QSpacerItem * horizontalSpacer_10
- QComboBox * capsBox
- QLabel * ctrlLabel

- QSpacerItem * horizontalSpacer_9
- QComboBox * ctrlBox
- QComboBox * shiftBox
- QLabel * winLabel
- QComboBox * winBox
- QComboBox * altBox
- QLabel * altLabel
- QFrame * line
- QSpacerItem * verticalSpacer_3
- QSpacerItem * verticalSpacer_5
- QFrame * line_3
- QSpacerItem * verticalSpacer_4
- QSpacerItem * verticalSpacer_2
- QLabel * versionLabel
- QHBoxLayout * horizontalLayout
- QPushButton * extraButton
- QSpacerItem * horizontalSpacer_2
- QSpacerItem * verticalSpacer_7

12.101.1 Detailed Description

Definition at line 29 of file ui_settingswidget.h.

12.101.2 Member Function Documentation

12.101.2.1 void Ui_SettingsWidget::retranslateUi (QWidget * *SettingsWidget*) [inline]

Definition at line 347 of file ui_settingswidget.h.

References altLabel, autoFWBox, capsLabel, ctrlLabel, devicesLabel, extraButton, label, label_2, label_3, label_5, label_6, label_8, loginItemBox, pushButton, shiftLabel, versionLabel, and winLabel.

Referenced by setupUi().

```
348     {
349         SettingsWidget->setWindowTitle(QApplication::translate("SettingsWidget", "Form", Q_NULLPTR));
350         label_2->setText(QApplication::translate("SettingsWidget", "\302\251 2014-2016 <a href=\"
      https://github.com/ccMSC/\" style=\"text-decoration:none;\">ccMSC</a>.<br/>\302\251 2017 <a href=\"
      https://github.com/mattanger/ckb-next/graphs/contributors\" style=\"text-decoration:none;\">The ckb-next development
       team</a>.", Q_NULLPTR));
351         label->setText(QApplication::translate("SettingsWidget", "Modifier keys", Q_NULLPTR));
352         label_6->setText(QApplication::translate("SettingsWidget", "Application", Q_NULLPTR));
353         devicesLabel->setText(QApplication::translate("SettingsWidget", "No devices connected",
       Q_NULLPTR));
354         label_5->setText(QApplication::translate("SettingsWidget", "Keyboard layout:", Q_NULLPTR));
355         label_3->setText(QApplication::translate("SettingsWidget", "<a href=\"
      https://github.com/mattanger/ckb-next\" style=\"text-decoration:none;\">https://github.com/mattanger/ckb-next</a>", Q_NU
356         pushButton->setText(QApplication::translate("SettingsWidget", "Quit", Q_NULLPTR));
357 #ifndef QT_NO_TOOLTIP
358         loginItemBox->setToolTip(QApplication::translate("SettingsWidget", "ckb-next will be
      started when you log in to your computer.", Q_NULLPTR));
359 #endif // QT_NO_TOOLTIP
360         loginItemBox->setText(QApplication::translate("SettingsWidget", "Start ckb-next at
      login", Q_NULLPTR));
361 #ifndef QT_NO_TOOLTIP
362         autoFWBox->setToolTip(QApplication::translate("SettingsWidget", "You will be notified when
      new firmware versions are available. You'll have the option to install them immediately or wait until
      later.", Q_NULLPTR));
363 #endif // QT_NO_TOOLTIP
364         autoFWBox->setText(QApplication::translate("SettingsWidget", "Check for new firmware
      automatically", Q_NULLPTR));
365         label_8->setText(QApplication::translate("SettingsWidget", "These will override the keyboard
      profile. See \"Binding\" tab for more settings.", Q_NULLPTR));
366         shiftLabel->setText(QApplication::translate("SettingsWidget", "Shift:", Q_NULLPTR));
367         capsLabel->setText(QApplication::translate("SettingsWidget", "Caps Lock:", Q_NULLPTR));
368         ctrlLabel->setText(QApplication::translate("SettingsWidget", "Ctrl:", Q_NULLPTR));
369         winLabel->setText(QApplication::translate("SettingsWidget", "Windows:", Q_NULLPTR));
```

```
370         altLabel->setText(QApplication::translate("SettingsWidget", "Alt:", Q_NULLPTR));
371         versionLabel->setText(QApplication::translate("SettingsWidget", "ckb-next", Q_NULLPTR))
    ;
372         extraButton->setText(QApplication::translate("SettingsWidget", "More settings",
    Q_NULLPTR));
373     } // retranslateUi
```

Here is the caller graph for this function:

12.101.2.2 void Ui_SettingsWidget::setupUi (QWidget * *SettingsWidget*) [inline]

Definition at line 78 of file ui_settingswidget.h.

References altBox, altLabel, autoFWBox, capsBox, capsLabel, ctrlBox, ctrlLabel, devicesLabel, extraButton, gridLayout, gridLayout_3, gridLayout_5, horizontalLayout, horizontalLayout_2, horizontalSpacer, horizontalSpacer_10, horizontalSpacer_2, horizontalSpacer_7, horizontalSpacer_9, label, label_2, label_3, label_5, label_6, label_8, layoutBox, line, line_2, line_3, loginItemBox, pushButton, retranslateUi(), shiftBox, shiftLabel, versionLabel, verticalSpacer, verticalSpacer_10, verticalSpacer_2, verticalSpacer_3, verticalSpacer_4, verticalSpacer_5, verticalSpacer_6, verticalSpacer_7, verticalSpacer_8, winBox, and winLabel.

Referenced by SettingsWidget::SettingsWidget().

```
79     {
80         if (SettingsWidget->objectName().isEmpty())
81             SettingsWidget->setObjectName(QStringLiteral("SettingsWidget"));
82         SettingsWidget->resize(827, 654);
83         gridLayout = new QGridLayout(SettingsWidget);
84         gridLayout->setObjectName(QStringLiteral("gridLayout"));
85         label_2 = new QLabel(SettingsWidget);
86         label_2->setObjectName(QStringLiteral("label_2"));
87         label_2->setOpenExternalLinks(true);
88         label_2->setAlignment(Qt::AlignLeading|Qt::AlignLeft|Qt::AlignVCenter);
89
90         gridLayout->addWidget(label_2, 20, 0, 1, 2);
91
92         label = new QLabel(SettingsWidget);
93         label->setObjectName(QStringLiteral("label"));
94         QFont font;
95         font.setBold(true);
96         font.setWeight(75);
97         label->setFont(font);
98
99         gridLayout->addWidget(label, 6, 0, 1, 2);
100
101          label_6 = new QLabel(SettingsWidget);
102          label_6->setObjectName(QStringLiteral("label_6"));
103          label_6->setFont(font);
104
105          gridLayout->addWidget(label_6, 12, 0, 1, 2);
106
107          gridLayout_5 = new QGridLayout();
108          gridLayout_5->setObjectName(QStringLiteral("gridLayout_5"));
109          horizontalSpacer_7 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
110
111         gridLayout_5->addItem(horizontalSpacer_7, 2, 2, 1, 1);
112
113         devicesLabel = new QLabel(SettingsWidget);
114         devicesLabel->setObjectName(QStringLiteral("devicesLabel"));
115
116         gridLayout_5->addWidget(devicesLabel, 0, 0, 1, 3);
117
118         label_5 = new QLabel(SettingsWidget);
119         label_5->setObjectName(QStringLiteral("label_5"));
120
```

```
121         gridLayout_5->addWidget(label_5, 2, 0, 1, 1);
122
123         layoutBox = new QComboBox(SettingsWidget);
124         layoutBox->setObjectName(QStringLiteral("layoutBox"));
125
126         gridLayout_5->addWidget(layoutBox, 2, 1, 1, 1);
127
128         verticalSpacer_10 = new QSpacerItem(20, 6, QSizePolicy::Minimum,
    QSizePolicy::Fixed);
129
130         gridLayout_5->addItem(verticalSpacer_10, 1, 0, 1, 1);
131
132
133         gridLayout->addLayout(gridLayout_5, 4, 1, 1, 1);
134
135         horizontalLayout_2 = new QHBoxLayout();
136         horizontalLayout_2->setObjectName(QStringLiteral("horizontalLayout_2"));
137         label_3 = new QLabel(SettingsWidget);
138         label_3->setObjectName(QStringLiteral("label_3"));
139         label_3->setOpenExternalLinks(true);
140
141         horizontalLayout_2->addWidget(label_3);
142
143         horizontalSpacer = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
144
145         horizontalLayout_2->addItem(horizontalSpacer);
146
147         pushButton = new QPushButton(SettingsWidget);
148         pushButton->setObjectName(QStringLiteral("pushButton"));
149         pushButton->setFlat(false);
150
151         horizontalLayout_2->addWidget(pushButton);
152
153
154         gridLayout->addLayout(horizontalLayout_2, 21, 0, 1, 2);
155
156         verticalSpacer = new QSpacerItem(20, 40, QSizePolicy::Minimum, QSizePolicy::Expanding
    );
157
158         gridLayout->addItem(verticalSpacer, 19, 0, 1, 2);
159
160         verticalSpacer_8 = new QSpacerItem(0, 28, QSizePolicy::Minimum, QSizePolicy::Fixed)
    ;
161
162         gridLayout->addItem(verticalSpacer_8, 16, 0, 1, 1);
163
164         loginItemBox = new QCheckBox(SettingsWidget);
165         loginItemBox->setObjectName(QStringLiteral("loginItemBox"));
166
167         gridLayout->addWidget(loginItemBox, 16, 1, 1, 1);
168
169         verticalSpacer_6 = new QSpacerItem(0, 28, QSizePolicy::Minimum, QSizePolicy::Fixed)
    ;
170
171         gridLayout->addItem(verticalSpacer_6, 15, 0, 1, 1);
172
173         autoFWBox = new QCheckBox(SettingsWidget);
174         autoFWBox->setObjectName(QStringLiteral("autoFWBox"));
175         autoFWBox->setChecked(true);
176
177         gridLayout->addWidget(autoFWBox, 15, 1, 1, 1);
178
179         line_2 = new QFrame(SettingsWidget);
180         line_2->setObjectName(QStringLiteral("line_2"));
181         line_2->setFrameShape(QFrame::HLine);
182         line_2->setFrameShadow(QFrame::Sunken);
183
184         gridLayout->addWidget(line_2, 13, 0, 1, 2);
185
186         label_8 = new QLabel(SettingsWidget);
187         label_8->setObjectName(QStringLiteral("label_8"));
188         QFont font1;
189         font1.setItalic(true);
190         label_8->setFont(font1);
191
192         gridLayout->addWidget(label_8, 8, 1, 1, 1);
193
194         gridLayout_3 = new QGridLayout();
195         gridLayout_3->setObjectName(QStringLiteral("gridLayout_3"));
196         shiftLabel = new QLabel(SettingsWidget);
197         shiftLabel->setObjectName(QStringLiteral("shiftLabel"));
198         QSizePolicy sizePolicy(QSizePolicy::Expanding, QSizePolicy::Preferred);
199         sizePolicy.setHorizontalStretch(0);
200         sizePolicy.setVerticalStretch(0);
201         sizePolicy.setHeightForWidth(shiftLabel->sizePolicy().hasHeightForWidth());
202         shiftLabel->setSizePolicy(sizePolicy);
```

```
203         shiftLabel->setAlignment(Qt::AlignRight|Qt::AlignTrailing|Qt::AlignVCenter);
204 
205         gridLayout_3->addWidget(shiftLabel, 0, 3, 1, 1);
206 
207         capsLabel = new QLabel(SettingsWidget);
208         capsLabel->setObjectName(QStringLiteral("capsLabel"));
209         capsLabel->setAlignment(Qt::AlignRight|Qt::AlignTrailing|Qt::AlignVCenter);
210 
211         gridLayout_3->addWidget(capsLabel, 0, 1, 1, 1);
212 
213         horizontalSpacer_10 = new QSpacerItem(0, 0, QSizePolicy::Fixed,
    QSizePolicy::Minimum);
214 
215         gridLayout_3->addItem(horizontalSpacer_10, 0, 0, 1, 1);
216 
217         capsBox = new QComboBox(SettingsWidget);
218         capsBox->setObjectName(QStringLiteral("capsBox"));
219         QSizePolicy sizePolicy1(QSizePolicy::Expanding, QSizePolicy::Fixed);
220         sizePolicy1.setHorizontalStretch(0);
221         sizePolicy1.setVerticalStretch(0);
222         sizePolicy1.setHeightForWidth(capsBox->sizePolicy().hasHeightForWidth());
223         capsBox->setSizePolicy(sizePolicy1);
224 
225         gridLayout_3->addWidget(capsBox, 0, 2, 1, 1);
226 
227         ctrlLabel = new QLabel(SettingsWidget);
228         ctrlLabel->setObjectName(QStringLiteral("ctrlLabel"));
229         ctrlLabel->setAlignment(Qt::AlignRight|Qt::AlignTrailing|Qt::AlignVCenter);
230 
231         gridLayout_3->addWidget(ctrlLabel, 1, 1, 1, 1);
232 
233         horizontalSpacer_9 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
234 
235         gridLayout_3->addItem(horizontalSpacer_9, 1, 7, 1, 1);
236 
237         ctrlBox = new QComboBox(SettingsWidget);
238         ctrlBox->setObjectName(QStringLiteral("ctrlBox"));
239 
240         gridLayout_3->addWidget(ctrlBox, 1, 2, 1, 1);
241 
242         shiftBox = new QComboBox(SettingsWidget);
243         shiftBox->setObjectName(QStringLiteral("shiftBox"));
244         sizePolicy1.setHeightForWidth(shiftBox->sizePolicy().hasHeightForWidth());
245         shiftBox->setSizePolicy(sizePolicy1);
246 
247         gridLayout_3->addWidget(shiftBox, 0, 4, 1, 1);
248 
249         winLabel = new QLabel(SettingsWidget);
250         winLabel->setObjectName(QStringLiteral("winLabel"));
251         sizePolicy.setHeightForWidth(winLabel->sizePolicy().hasHeightForWidth());
252         winLabel->setSizePolicy(sizePolicy);
253         winLabel->setAlignment(Qt::AlignRight|Qt::AlignTrailing|Qt::AlignVCenter);
254 
255         gridLayout_3->addWidget(winLabel, 1, 3, 1, 1);
256 
257         winBox = new QComboBox(SettingsWidget);
258         winBox->setObjectName(QStringLiteral("winBox"));
259         sizePolicy1.setHeightForWidth(winBox->sizePolicy().hasHeightForWidth());
260         winBox->setSizePolicy(sizePolicy1);
261 
262         gridLayout_3->addWidget(winBox, 1, 4, 1, 1);
263 
264         altBox = new QComboBox(SettingsWidget);
265         altBox->setObjectName(QStringLiteral("altBox"));
266         sizePolicy1.setHeightForWidth(altBox->sizePolicy().hasHeightForWidth());
267         altBox->setSizePolicy(sizePolicy1);
268 
269         gridLayout_3->addWidget(altBox, 1, 6, 1, 1);
270 
271         altLabel = new QLabel(SettingsWidget);
272         altLabel->setObjectName(QStringLiteral("altLabel"));
273         sizePolicy.setHeightForWidth(altLabel->sizePolicy().hasHeightForWidth());
274         altLabel->setSizePolicy(sizePolicy);
275         altLabel->setAlignment(Qt::AlignRight|Qt::AlignTrailing|Qt::AlignVCenter);
276 
277         gridLayout_3->addWidget(altLabel, 1, 5, 1, 1);
278 
279 
280         gridLayout->addLayout(gridLayout_3, 10, 1, 1, 1);
281 
282         line = new QFrame(SettingsWidget);
283         line->setObjectName(QStringLiteral("line"));
284         line->setFrameShape(QFrame::HLine);
285         line->setFrameShadow(QFrame::Sunken);
286 
287         gridLayout->addWidget(line, 1, 0, 1, 2);
```

```
288
289         verticalSpacer_3 = new QSpacerItem(0, 5, QSizePolicy::Minimum, QSizePolicy::Fixed);
290
291         gridLayout->addItem(verticalSpacer_3, 2, 1, 1, 1);
292
293         verticalSpacer_5 = new QSpacerItem(20, 12, QSizePolicy::Minimum, QSizePolicy::Fixed
    );
294
295         gridLayout->addItem(verticalSpacer_5, 11, 1, 1, 1);
296
297         line_3 = new QFrame(SettingsWidget);
298         line_3->setObjectName(QStringLiteral("line_3"));
299         QSizePolicy sizePolicy2(QSizePolicy::Minimum, QSizePolicy::Fixed);
300         sizePolicy2.setHorizontalStretch(0);
301         sizePolicy2.setVerticalStretch(0);
302         sizePolicy2.setHeightForWidth(line_3->sizePolicy().hasHeightForWidth());
303         line_3->setSizePolicy(sizePolicy2);
304         line_3->setFrameShape(QFrame::HLine);
305         line_3->setFrameShadow(QFrame::Sunken);
306
307         gridLayout->addWidget(line_3, 7, 0, 1, 2);
308
309         verticalSpacer_4 = new QSpacerItem(20, 6, QSizePolicy::Minimum, QSizePolicy::Fixed)
    ;
310
311         gridLayout->addItem(verticalSpacer_4, 9, 1, 1, 1);
312
313         verticalSpacer_2 = new QSpacerItem(20, 12, QSizePolicy::Minimum, QSizePolicy::Fixed
    );
314
315         gridLayout->addItem(verticalSpacer_2, 5, 1, 1, 1);
316
317         versionLabel = new QLabel(SettingsWidget);
318         versionLabel->setObjectName(QStringLiteral("versionLabel"));
319         versionLabel->setFont(font);
320
321         gridLayout->addWidget(versionLabel, 0, 0, 1, 2);
322
323         horizontalLayout = new QHBoxLayout();
324         horizontalLayout->setObjectName(QStringLiteral("horizontalLayout"));
325         extraButton = new QPushButton(SettingsWidget);
326         extraButton->setObjectName(QStringLiteral("extraButton"));
327
328         horizontalLayout->addWidget(extraButton);
329
330         horizontalSpacer_2 = new QSpacerItem(40, 20, QSizePolicy::Expanding,
    QSizePolicy::Minimum);
331
332         horizontalLayout->addItem(horizontalSpacer_2);
333
334
335         gridLayout->addLayout(horizontalLayout, 17, 1, 1, 1);
336
337         verticalSpacer_7 = new QSpacerItem(0, 28, QSizePolicy::Minimum, QSizePolicy::Fixed)
    ;
338
339         gridLayout->addItem(verticalSpacer_7, 17, 0, 1, 1);
340
341
342         retranslateUi(SettingsWidget);
343
344         QMetaObject::connectSlotsByName(SettingsWidget);
345     } // setupUi
```

Here is the call graph for this function:



Here is the caller graph for this function:



12.101.3 Field Documentation

12.101.3.1 QComboBox* Ui_SettingsWidget::altBox

Definition at line 64 of file ui_settingswidget.h.

Referenced by SettingsWidget::SettingsWidget(), setupUi(), and SettingsWidget::updateModifiers().

12.101.3.2 QLabel* Ui_SettingsWidget::altLabel

Definition at line 65 of file ui_settingswidget.h.

Referenced by retranslateUi(), and setupUi().

12.101.3.3 QCheckBox* Ui_SettingsWidget::autoFWBox

Definition at line 50 of file ui_settingswidget.h.

Referenced by retranslateUi(), SettingsWidget::SettingsWidget(), and setupUi().

12.101.3.4 QComboBox* Ui_SettingsWidget::capsBox

Definition at line 57 of file ui_settingswidget.h.

Referenced by SettingsWidget::SettingsWidget(), setupUi(), and SettingsWidget::updateModifiers().

12.101.3.5 QLabel* Ui_SettingsWidget::capsLabel

Definition at line 55 of file ui_settingswidget.h.

Referenced by retranslateUi(), and setupUi().

12.101.3.6 QComboBox* Ui_SettingsWidget::ctrlBox

Definition at line 60 of file ui_settingswidget.h.

Referenced by SettingsWidget::SettingsWidget(), setupUi(), and SettingsWidget::updateModifiers().

12.101.3.7 QLabel* Ui_SettingsWidget::ctrlLabel

Definition at line 58 of file ui_settingswidget.h.

Referenced by retranslateUi(), and setupUi().

12.101.3.8 QLabel* Ui_SettingsWidget::devicesLabel

Definition at line 38 of file ui_settingswidget.h.

Referenced by retranslateUi(), SettingsWidget::setStatus(), and setupUi().

12.101.3.9 QPushButton* Ui_SettingsWidget::extraButton

Definition at line 74 of file ui_settingswidget.h.

Referenced by retranslateUi(), and setupUi().

12.101.3.10 QGridLayout* Ui_SettingsWidget::gridLayout

Definition at line 32 of file ui_settingswidget.h.

Referenced by setupUi().

12.101.3.11 QGridLayout* Ui_SettingsWidget::gridLayout_3

Definition at line 53 of file ui_settingswidget.h.

Referenced by setupUi().

12.101.3.12 QGridLayout* Ui_SettingsWidget::gridLayout_5

Definition at line 36 of file ui_settingswidget.h.

Referenced by setupUi().

12.101.3.13 QHBoxLayout* Ui_SettingsWidget::horizontalLayout

Definition at line 73 of file ui_settingswidget.h.

Referenced by setupUi().

12.101.3.14 QHBoxLayout* Ui_SettingsWidget::horizontalLayout_2

Definition at line 42 of file ui_settingswidget.h.

Referenced by setupUi().

12.101.3.15 QSpacerItem* Ui_SettingsWidget::horizontalSpacer

Definition at line 44 of file ui_settingswidget.h.

Referenced by setupUi().

12.101.3.16 QSpacerItem* Ui_SettingsWidget::horizontalSpacer_10

Definition at line 56 of file ui_settingswidget.h.

Referenced by setupUi().

12.101.3.17 QSpacerItem* Ui_SettingsWidget::horizontalSpacer_2

Definition at line 75 of file ui_settingswidget.h.

Referenced by setupUi().

12.101.3.18 QSpacerItem* Ui_SettingsWidget::horizontalSpacer_7

Definition at line 37 of file ui_settingswidget.h.

Referenced by setupUi().

12.101.3.19 QSpacerItem* Ui_SettingsWidget::horizontalSpacer_9

Definition at line 59 of file ui_settingswidget.h.

Referenced by setupUi().

12.101.3.20 QLabel* Ui_SettingsWidget::label

Definition at line 34 of file ui_settingswidget.h.

Referenced by retranslateUi(), and setupUi().

12.101.3.21 QLabel* Ui_SettingsWidget::label_2

Definition at line 33 of file ui_settingswidget.h.

Referenced by retranslateUi(), and setupUi().

12.101.3.22 QLabel* Ui_SettingsWidget::label_3

Definition at line 43 of file ui_settingswidget.h.

Referenced by retranslateUi(), and setupUi().

12.101.3.23 QLabel* Ui_SettingsWidget::label_5

Definition at line 39 of file ui_settingswidget.h.

Referenced by retranslateUi(), and setupUi().

12.101.3.24 QLabel* Ui_SettingsWidget::label_6

Definition at line 35 of file ui_settingswidget.h.

Referenced by retranslateUi(), and setupUi().

12.101.3.25 QLabel* Ui_SettingsWidget::label_8

Definition at line 52 of file ui_settingswidget.h.

Referenced by retranslateUi(), and setupUi().

12.101.3.26 QComboBox* Ui_SettingsWidget::layoutBox

Definition at line 40 of file ui_settingswidget.h.

Referenced by SettingsWidget::SettingsWidget(), setupUi(), and SettingsWidget::showLayoutDialog().

12.101.3.27 QFrame* Ui_SettingsWidget::line

Definition at line 66 of file ui_settingswidget.h.

Referenced by setupUi().

12.101.3.28 QFrame* Ui_SettingsWidget::line_2

Definition at line 51 of file ui_settingswidget.h.

Referenced by setupUi().

12.101.3.29 QFrame* Ui_SettingsWidget::line_3

Definition at line 69 of file ui_settingswidget.h.

Referenced by setupUi().

12.101.3.30 QCheckBox* Ui_SettingsWidget::loginItemBox

Definition at line 48 of file ui_settingswidget.h.

Referenced by retranslateUi(), SettingsWidget::SettingsWidget(), and setupUi().

12.101.3.31 QPushButton* Ui_SettingsWidget::pushButton

Definition at line 45 of file ui_settingswidget.h.

Referenced by retranslateUi(), and setupUi().

12.101.3.32 QComboBox* Ui_SettingsWidget::shiftBox

Definition at line 61 of file ui_settingswidget.h.

Referenced by SettingsWidget::SettingsWidget(), setupUi(), and SettingsWidget::updateModifiers().

12.101.3.33 QLabel* Ui_SettingsWidget::shiftLabel

Definition at line 54 of file ui_settingswidget.h.

Referenced by retranslateUi(), and setupUi().

12.101.3.34 QLabel* Ui_SettingsWidget::versionLabel

Definition at line 72 of file ui_settingswidget.h.

Referenced by retranslateUi(), setupUi(), and SettingsWidget::setVersion().

12.101.3.35 QSpacerItem* Ui_SettingsWidget::verticalSpacer

Definition at line 46 of file ui_settingswidget.h.

Referenced by setupUi().

12.101.3.36 QSpacerItem* Ui_SettingsWidget::verticalSpacer_10

Definition at line 41 of file ui_settingswidget.h.

Referenced by setupUi().

12.101.3.37 QSpacerItem* Ui_SettingsWidget::verticalSpacer_2

Definition at line 71 of file ui_settingswidget.h.

Referenced by setupUi().

12.101.3.38 QSpacerItem* Ui_SettingsWidget::verticalSpacer_3

Definition at line 67 of file ui_settingswidget.h.

Referenced by setupUi().

12.101.3.39 QSpacerItem* Ui_SettingsWidget::verticalSpacer_4

Definition at line 70 of file ui_settingswidget.h.

Referenced by setupUi().

12.101.3.40 QSpacerItem* Ui_SettingsWidget::verticalSpacer_5

Definition at line 68 of file ui_settingswidget.h.

Referenced by setupUi().

12.101.3.41 QSpacerItem* Ui_SettingsWidget::verticalSpacer_6

Definition at line 49 of file ui_settingswidget.h.

Referenced by setupUi().

12.101.3.42 QSpacerItem* Ui_SettingsWidget::verticalSpacer_7

Definition at line 76 of file ui_settingswidget.h.

Referenced by setupUi().

12.101.3.43 QSpacerItem* Ui_SettingsWidget::verticalSpacer_8

Definition at line 47 of file ui_settingswidget.h.

Referenced by setupUi().

12.101.3.44 QComboBox* Ui_SettingsWidget::winBox

Definition at line 63 of file ui_settingswidget.h.

Referenced by SettingsWidget::SettingsWidget(), setupUi(), and SettingsWidget::updateModifiers().

12.101.3.45 QLabel* Ui_SettingsWidget::winLabel

Definition at line 62 of file ui_settingswidget.h.

Referenced by retranslateUi(), and setupUi().

The documentation for this class was generated from the following file:

- src/ckb/ui_settingswidget.h

12.102 UsbId Struct Reference

`#include <src/ckb/kbmode.h>`

Collaboration diagram for UsbId:

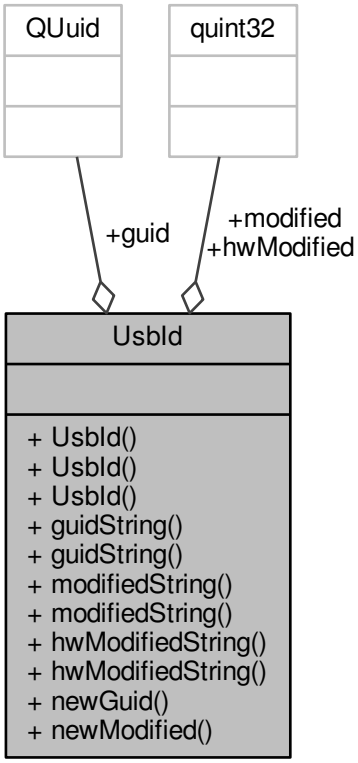

Public Member Functions

- UsbId (const QString &_guid, quint32 _modified)

- UsbId (const QString &_guid, const QString &_modified)
- UsbId ()
- QString guidString () const
- void guidString (const QString &newGuid)
- QString modifiedString () const
- void modifiedString (const QString &newModified)
- QString hwModifiedString () const
- void hwModifiedString (const QString &newModified)
- void newGuid ()
- void newModified ()

Data Fields

- QUuid guid
- quint32 modified
- quint32 hwModified

12.102.1 Detailed Description

Definition at line 11 of file kbmode.h.

12.102.2 Constructor & Destructor Documentation

12.102.2.1 UsbId::UsbId (const QString & *_guid*, quint32 *_modified*) [inline]

Definition at line 16 of file kbmode.h.

```
16 : guid(_guid), modified(_modified), hwModified(_modified) {}
```

12.102.2.2 UsbId::UsbId (const QString & *_guid*, const QString & *_modified*) [inline]

Definition at line 17 of file kbmode.h.

```
17 : guid(_guid), modified(_modified.toUInt(0, 16)), hwModified(
      modified) {}
```

12.102.2.3 UsbId::UsbId ( ) [inline]

Definition at line 18 of file kbmode.h.

```
18 : guid(QUuid::createUuid()),modified(0) {}
```

12.102.3 Member Function Documentation

12.102.3.1 QString UsbId::guidString ( ) const [inline]

Definition at line 20 of file kbmode.h.

References guid.

Referenced by Kb::hwSave(), KbProfile::save(), KbMode::save(), Kb::save(), and Kb::writeProfileHeader().

```
20 { return guid.toString().toUpper(); }
```

Here is the caller graph for this function:



12.102.3.2 void UsbId::guidString (const QString & *newGuid*) [inline]

Definition at line 21 of file kbmode.h.

References guid, and newGuid().

```
21 { guid = newGuid; }
```

Here is the call graph for this function:

12.102.3.3 QString UsbId::hwModifiedString ( ) const [inline]

Definition at line 24 of file kbmode.h.

References hwModified.

Referenced by KbMode::KbMode(), KbProfile::KbProfile(), Kb::readNotify(), KbProfile::save(), and KbMode::save().

```
24 { return QString::number(hwModified, 16); }
```

Here is the caller graph for this function:

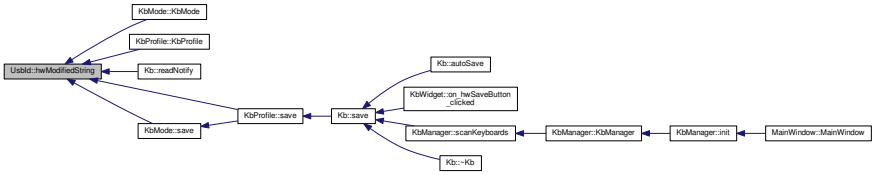

12.102.3.4 void UsbId::hwModifiedString (const QString & *newModified*) [inline]

Definition at line 25 of file kbmode.h.

References hwModified.

```
25 { hwModified = newModified.toUInt(0, 16); }
```

12.102.3.5 QString UsbId::modifiedString ( ) const [inline]

Definition at line 22 of file kbmode.h.

References modified.

Referenced by Kb::hwSave(), KbProfile::KbProfile(), Kb::readNotify(), KbProfile::save(), KbMode::save(), and Kb::writeProfileHeader().

```
22 { return QString::number(modified, 16); }
```

Here is the caller graph for this function:

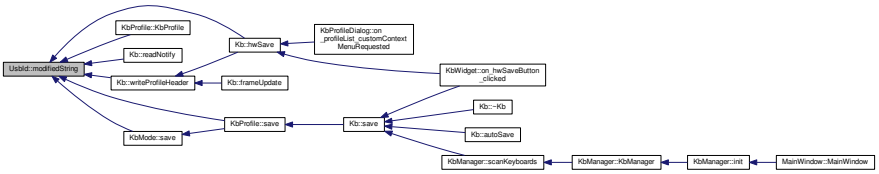

12.102.3.6 void UsbId::modifiedString (const QString & *newModified*) [inline]

Definition at line 23 of file kbmode.h.

References modified.

```
23 { modified = newModified.toUInt(0, 16); }
```

12.102.3.7 void UsbId::newGuid ( ) [inline]

Definition at line 28 of file kbmode.h.

References guid.

Referenced by guidString().

```
28 { guid = QUuid::createUuid(); }
```

Here is the caller graph for this function:

12.102.3.8 void UsbId::newModified ( ) [inline]

Definition at line 29 of file kbmode.h.

References modified.

Referenced by KbProfile::save(), and KbMode::save().

```
29 { quint32 newMod; do { newMod = qrand(); } while(newMod == modified);
      modified = newMod; }
```

Here is the caller graph for this function:



12.102.4 Field Documentation

12.102.4.1 QUuid UsbId::guid

Definition at line 12 of file kbmode.h.

Referenced by KbProfile::find(), Kb::find(), guidString(), KbMode::KbMode(), KbProfile::KbProfile(), newGuid(), KbWidget::on_modesList_customContextMenuRequested(), KbWidget::on_modesList_itemChanged(), KbWidget::on_modesList_itemClicked(), KbProfileDialog::on_profileList_customContextMenuRequested(), KbProfileDialog::on_profileList_itemChanged(), KbProfileDialog::on_profileList_itemClicked(), KbWidget::profileChanged(), Kb::readNotify(), and KbProfileDialog::repopulate().

12.102.4.2 quint32 UsbId::hwModified

Definition at line 14 of file kbmode.h.

Referenced by hwModifiedString(), Kb::hwSave(), KbMode::KbMode(), and KbProfile::KbProfile().

12.102.4.3 quint32 UsbId::modified

Definition at line 13 of file kbmode.h.

Referenced by Kb::hwSave(), KbMode::KbMode(), KbProfile::KbProfile(), modifiedString(), and newModified().

The documentation for this struct was generated from the following file:

- src/ckb/kbmode.h

Chapter 13

File Documentation

13.1 BUILD.md File Reference

13.2 DAEMON.md File Reference

13.3 README.md File Reference

13.4 ROADMAP.md File Reference

13.5 src/ckb/animadddialog.cpp File Reference

```
#include "animadddialog.h"
#include "ui_animadddialog.h"
```

Include dependency graph for animadddialog.cpp:

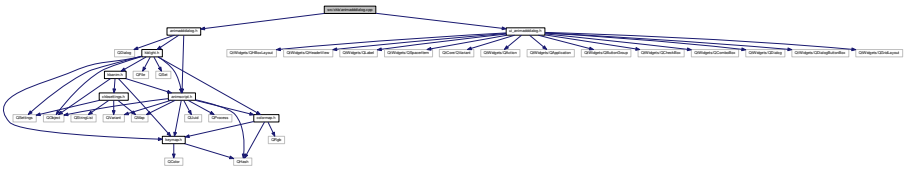

13.6 src/ckb/animadddialog.h File Reference

```
#include <QDialog>
#include "animscript.h"
#include "kblight.h"
```

Include dependency graph for animadddialog.h:

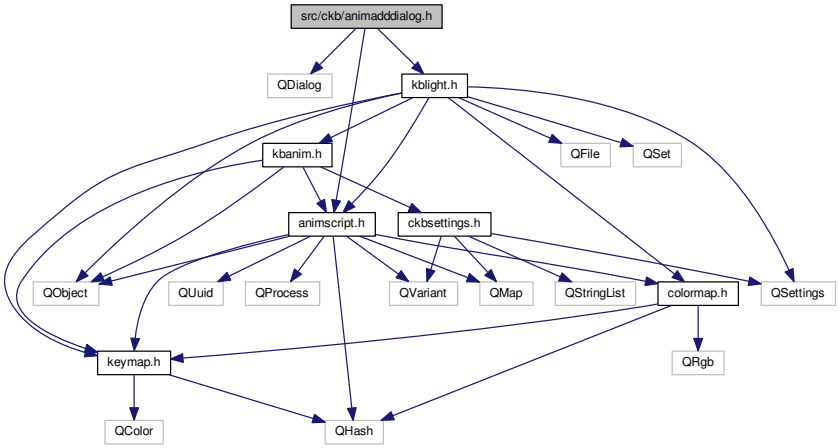

This graph shows which files directly or indirectly include this file:

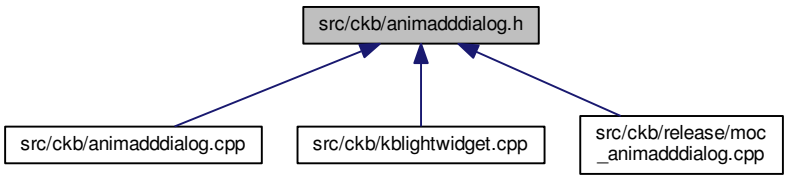

Data Structures

- class AnimAddDialog

Namespaces

- Ui

13.7 src/ckb/animscript.cpp File Reference

```
#include <cmath>
#include <QApplication>
#include <QDateTime>
#include <QDebug>
#include <QDir>
#include <QUrl>
#include "animscript.h"
```

Include dependency graph for animscript.cpp:

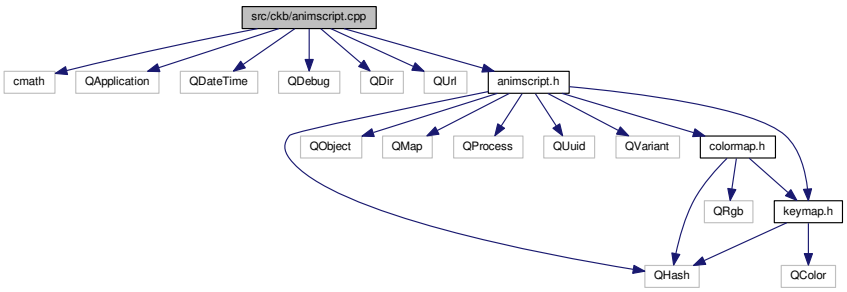

Functions

- QString urlParam (const QString &param)

Variables

- static const double ONE_DAY = 24. ∗ 60. ∗ 60.

13.7.1 Function Documentation

13.7.1.1 QString urlParam (const QString & *param*) [inline]

Definition at line 71 of file animscript.cpp.

Referenced by AnimScript::load().

```
71                                              {
72     return QUrl::fromPercentEncoding(param.trimmed().toLatin1()).trimmed();
73 }
```

Here is the caller graph for this function:

13.7.2 Variable Documentation

13.7.2.1 const double ONE_DAY = 24. ∗ 60. ∗ 60. [static]

Definition at line 75 of file animscript.cpp.

Referenced by AnimScript::load().

13.8 src/ckb/animscript.h File Reference

```
#include <QHash>
#include <QObject>
#include <QMap>
#include <QProcess>
#include <QUuid>
#include <QVariant>
#include "keymap.h"
#include "colormap.h"
```

Include dependency graph for animscript.h:

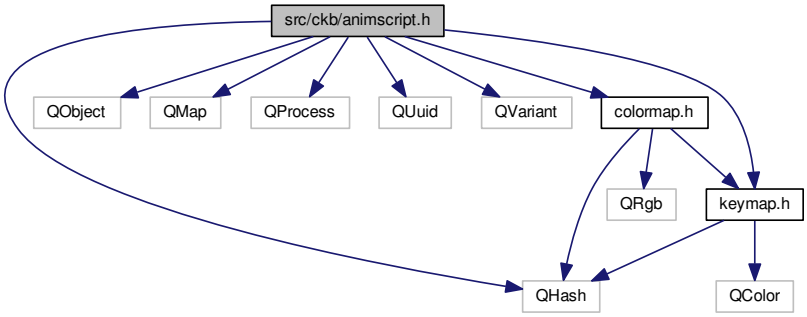

This graph shows which files directly or indirectly include this file:

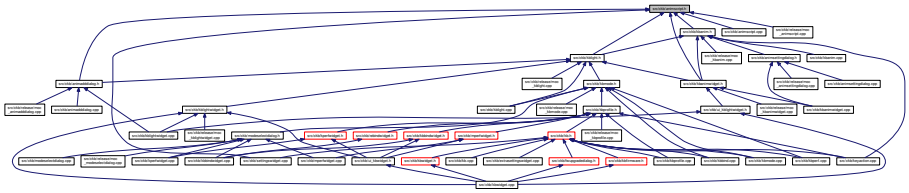

Data Structures

- class AnimScript
- struct AnimScript::Param

13.8.1 Data Structure Documentation

13.8.1.1 struct AnimScript::Param

Definition at line 21 of file animscript.h.

Collaboration diagram for AnimScript::Param:

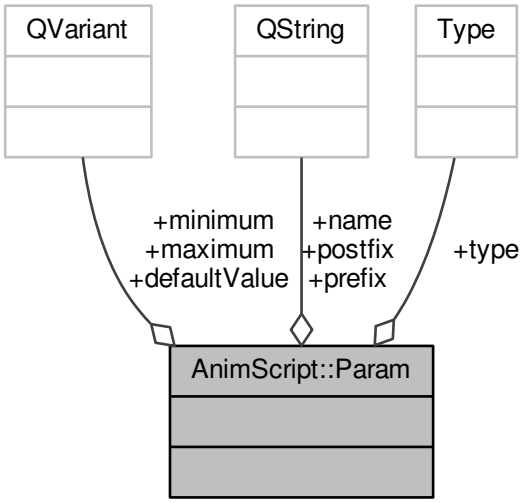

Data Fields

	Type	

Data Fields

QVariant	defaultValue	
QVariant	maximum	
QVariant	minimum	
QString	name	
QString	postfix	
QString	prefix	
Type	type	

13.9 src/ckb/animsettingdialog.cpp File Reference

```
#include <cstdio>
#include <QDial>
#include <QDoubleSpinBox>
#include <QLineEdit>
#include <QComboBox>
#include "animsettingdialog.h"
#include "ui_animsettingdialog.h"
#include "colorbutton.h"
#include "gradientbutton.h"
```

Include dependency graph for animsettingdialog.cpp:



Functions

- static int angleFlip (int angle)

13.9.1 Function Documentation

13.9.1.1 static int angleFlip (int *angle*) [inline], [static]

Definition at line 12 of file animsettingdialog.cpp.

Referenced by AnimSettingDialog::angleDialChanged(), AnimSettingDialog::angleSpinnerChanged(), AnimSettingDialog::AnimSettingDialog(), and AnimSettingDialog::updateParam().

```
12                                          {
13     if(angle <= 180)
14         return 180 - angle;
15     else
16         return 360 - (angle - 180);
17 }
```

Here is the caller graph for this function:

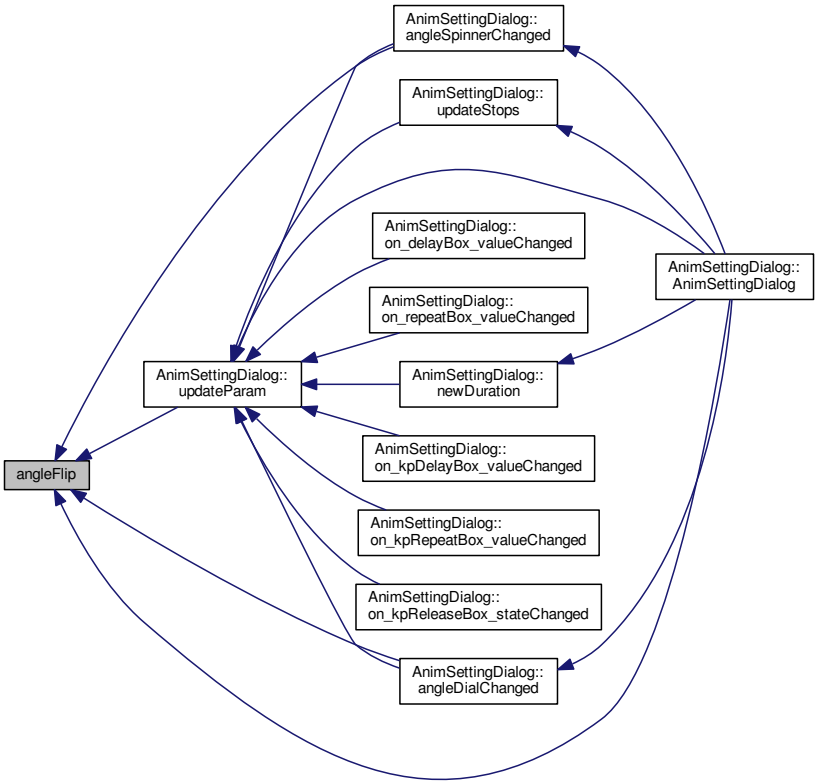

13.10 src/ckb/animsettingdialog.h File Reference

```
#include <QCheckBox>
#include <QDialog>
#include <QFrame>
#include <QSignalMapper>
#include <QSpinBox>
#include "kbanim.h"
```

Include dependency graph for animsettingdialog.h:

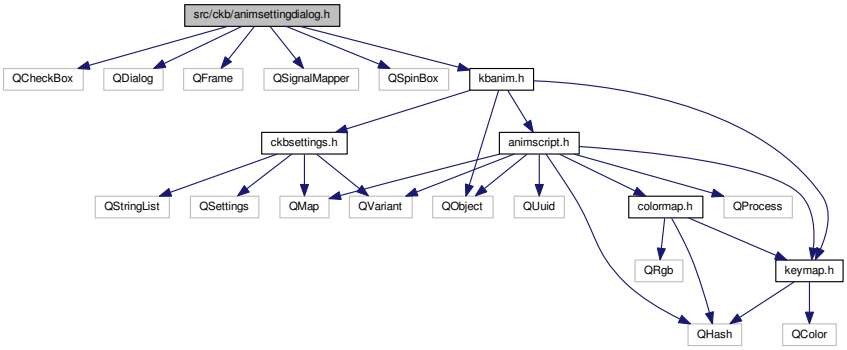

This graph shows which files directly or indirectly include this file:

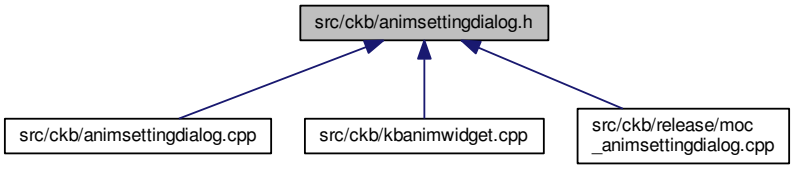

Data Structures

- class AnimSettingDialog

Namespaces

- Ui

13.11 src/ckb/autorun.cpp File Reference

```
#include <QApplication>
#include <QDir>
#include <QSettings>
#include <QStandardPaths>
#include "autorun.h"
#include "ckbsettings.h"
```

Include dependency graph for autorun.cpp:

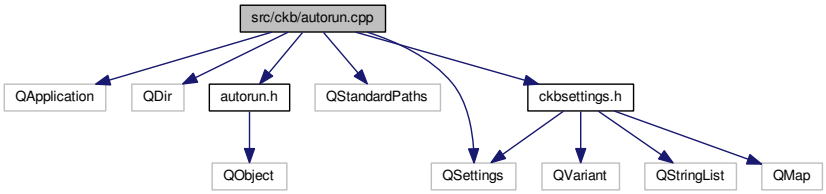

Variables

- static const QString settingPath = "Program/DidLoginItem"

13.11.1 Variable Documentation

13.11.1.1 const QString settingPath = "Program/DidLoginItem" [static]

Definition at line 18 of file autorun.cpp.

13.12 src/ckb/autorun.h File Reference

```
#include <QObject>
```

Include dependency graph for autorun.h:



This graph shows which files directly or indirectly include this file:

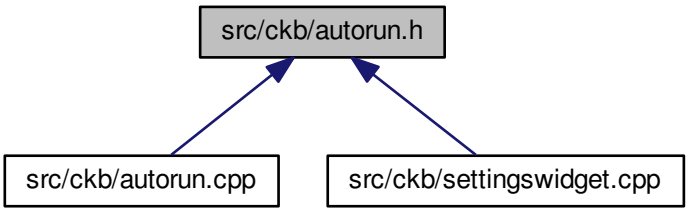

Data Structures

- class AutoRun

13.13 src/ckb/ckb-anim.h File Reference

```
#include <ctype.h>
#include <math.h>
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
```

Include dependency graph for ckb-anim.h:

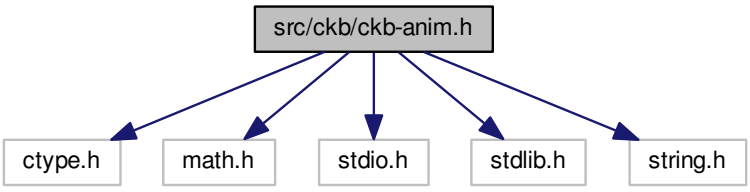

Data Structures

- struct ckb_key
- struct ckb_runctx
- struct ckb_gradient

Macros

- #define M_PI 3.14159265358979323846
- #define TRUE 1

- #define FALSE 0
- #define CKB_DOWN 1
- #define CKB_UP 0
- #define CKB_CONTAINER(macro) do { macro } while(0)
- #define CKB_GUID(guid) CKB_CONTAINER(printf("guid "); printurl(guid); printf("\n");)
- #define CKB_NAME(name) CKB_CONTAINER(printf("name "); printurl(name); printf("\n");)
- #define CKB_VERSION(version) CKB_CONTAINER(printf("version "); printurl(version); printf("\n");)
- #define CKB_COPYRIGHT(year, author) CKB_CONTAINER(printf("author "); printurl(author); printf("\nyear %s\n", year);)
- #define CKB_LICENSE(license) CKB_CONTAINER(printf("license "); printurl(license); printf("\n");)
- #define CKB_DESCRIPTION(description) CKB_CONTAINER(printf("description "); printurl(description); printf("\n");)
- #define CKB_PARAM(type, name, prefix, postfix, extra) CKB_CONTAINER(printf("param %s %s ", type, name); printurl(prefix); printf(" "); printurl(postfix); printf(" "); extra; printf("\n");)
- #define CKB_PARAM_LONG(name, prefix, postfix, default, min, max) CKB_PARAM("long", name, prefix, postfix, printf("%ld %ld %ld", (long)(default), (long)(min), (long)(max)))
- #define CKB_PARAM_DOUBLE(name, prefix, postfix, default, min, max) CKB_PARAM("double", name, prefix, postfix, printf("%lf %lf %lf", (double)(default), (double)(min), (double)(max)))
- #define CKB_PARAM_BOOL(name, text, default) CKB_PARAM("bool", name, text, "", printf((default) ? "1" : "0"))
- #define CKB_PARAM_RGB(name, prefix, postfix, r, g, b) CKB_PARAM("rgb", name, prefix, postfix, printf("%02x%02x%02x", (unsigned char)(r), (unsigned char)(g), (unsigned char)(b)))
- #define CKB_PARAM_ARGB(name, prefix, postfix, a, r, g, b) CKB_PARAM("argb", name, prefix, postfix, printf("%02x%02x%02x%02x", (unsigned char)(a), (unsigned char)(r), (unsigned char)(g), (unsigned char)(b)))
- #define CKB_PARAM_GRADIENT(name, prefix, postfix, default) CKB_PARAM("gradient", name, prefix, postfix, printurl(default))
- #define CKB_PARAM_AGRADIENT(name, prefix, postfix, default) CKB_PARAM("agradient", name, prefix, postfix, printurl(default))
- #define CKB_PARAM_ANGLE(name, prefix, postfix, default) CKB_PARAM("angle", name, prefix, postfix, printf("%ld", (long)(default)))
- #define CKB_PARAM_STRING(name, prefix, postfix, default) CKB_PARAM("string", name, prefix, postfix, printurl(default))
- #define CKB_PARAM_LABEL(name, text) CKB_PARAM("label", name, text, "",)
- #define CKB_PRESET_START(name) CKB_CONTAINER(printf("preset "); printurl(name);)
- #define CKB_PRESET_PARAM(name, value) CKB_CONTAINER(printf(" %s=", name); printurl(value);)
- #define CKB_PRESET_END CKB_CONTAINER(printf("\n");)
- #define CKB_KP_NONE "none"
- #define CKB_KP_NAME "name"
- #define CKB_KP_POSITION "position"
- #define CKB_KPMODE(mode) CKB_CONTAINER(printf("kpmode %s\n", mode);)
- #define CKB_TIME_DURATION "duration"
- #define CKB_TIME_ABSOLUTE "absolute"
- #define CKB_TIMEMODE(mode) CKB_CONTAINER(printf("time %s\n", mode);)
- #define CKB_REPEAT(enable) CKB_CONTAINER(printf("repeat %s\n", (enable) ? "on" : "off");)
- #define CKB_PREEMPT(enable) CKB_CONTAINER(printf("preempt %s\n", (enable) ? "on" : "off");)
- #define CKB_LIVEPARAMS(enable) CKB_CONTAINER(printf("parammode %s\n", (enable) ? "live" : "static");)
- #define CKB_PARSE_LONG(param_name, value_ptr) if(!strcmp(name, param_name) && sscanf(value, "%ld", value_ptr) == 1)
- #define CKB_PARSE_DOUBLE(param_name, value_ptr) if(!strcmp(name, param_name) && sscanf(value, "%lf", value_ptr) == 1)
- #define CKB_PARSE_BOOL(param_name, value_ptr) if(!strcmp(name, param_name) && sscanf(value, "%u", value_ptr) == 1)
- #define CKB_PARSE_RGB(param_name, r_ptr, g_ptr, b_ptr) if(!strcmp(name, param_name) && sscanf(value, "%2hhx%2hhx%2hhx", r_ptr, g_ptr, b_ptr) == 3)

- #define CKB_PARSE_ARGB(param_name, a_ptr, r_ptr, g_ptr, b_ptr) if(!strcmp(name, param_name) && sscanf(value, "%2hhx%2hhx%2hhx%2hhx", a_ptr, r_ptr, g_ptr, b_ptr) == 4)
- #define CKB_PARSE_GRADIENT(param_name, gradient_ptr) if(!strcmp(name, param_name) && ckb_scan_grad(value, gradient_ptr, 0))
- #define CKB_PARSE_AGRADIENT(param_name, gradient_ptr) if(!strcmp(name, param_name) && ckb_scan_grad(value, gradient_ptr, 1))
- #define CKB_PARSE_ANGLE(param_name, value_ptr) if(!strcmp(name, param_name) && sscanf(value, "%ld", value_ptr) == 1)
- #define CKB_PARSE_STRING(param_name) if(!strcmp(name, param_name))
- #define CKB_REAL_ANGLE(angle) fmod((-(angle) + 90.) * M_PI / 180. + M_PI * 2., M_PI * 2.)
- #define CKB_KEYNAME_MAX 12
- #define CKB_KEYCLEAR(context) CKB_CONTAINER(ckb_key* key = context->keys; unsigned count = context->keycount; unsigned i = 0; for(; i < count; i++) key[i].a = key[i].r = key[i].g = key[i].b = 0;)
- #define CKB_GRAD_MAX 100
- #define CKB_MAX_WORD (4 * 1024)

Functions

- int ckb_scan_grad (const char *string, ckb_gradient *gradient, int alpha)
- void ckb_grad_color (float *a, float *r, float *g, float *b, const ckb_gradient *grad, float pos)
- void ckb_alpha_blend (ckb_key *key, float a, float r, float g, float b)
- void printurl (const char *src)
- void urldecode (char *dst, const char *src)
- void ckb_getline (char word1[(4 *1024)], char word2[(4 *1024)], char word3[(4 *1024)])
- void ckb_info ()
- void ckb_init (ckb_runctx *context)
- void ckb_parameter (ckb_runctx *, const char *, const char *)
- void ckb_keypress (ckb_runctx *, ckb_key *, int, int, int)
- void ckb_start (ckb_runctx *, int)
- void ckb_time (ckb_runctx *, double)
- int ckb_frame (ckb_runctx *)
- void ckb_read_params (ckb_runctx *ctx)
- int main (int argc, char *argv[])

13.13.1 Data Structure Documentation

13.13.1.1 struct ckb_key

Definition at line 131 of file ckb-anim.h.

Collaboration diagram for ckb_key:

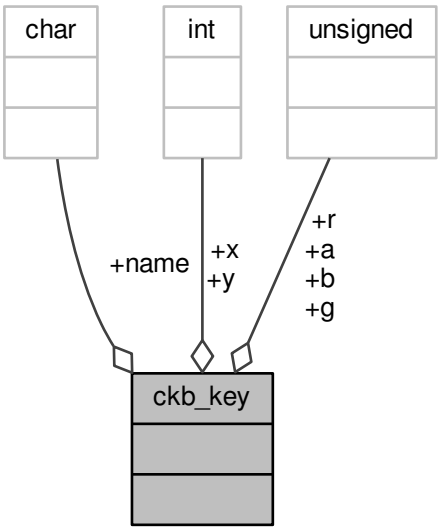

Data Fields

unsigned char	a	
unsigned char	b	
unsigned char	g	
char	name[12]	
unsigned char	r	
int	x	
int	y	

13.13.1.2 struct ckb_runctx

Definition at line 138 of file ckb-anim.h.

Collaboration diagram for ckb_runctx:

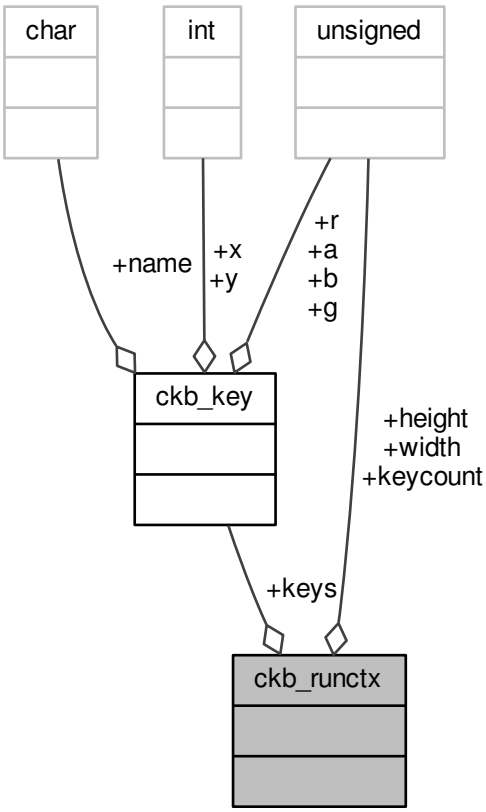

Data Fields

unsigned	height	
unsigned	keycount	
ckb_key *	keys	
unsigned	width	

13.13.1.3 struct ckb_gradient

Definition at line 152 of file ckb-anim.h.

Collaboration diagram for ckb_gradient:

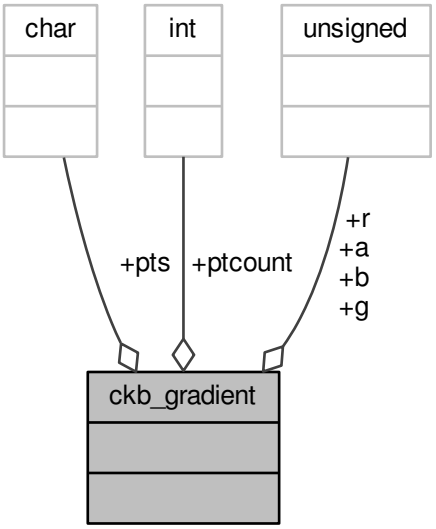

Data Fields

unsigned char	a[100]	
unsigned char	b[100]	
unsigned char	g[100]	
int	ptcount	
char	pts[100]	
unsigned char	r[100]	

13.13.2 Macro Definition Documentation

13.13.2.1 #define CKB_CONTAINER(*macro*) do { macro } while(0)

Definition at line 57 of file ckb-anim.h.

13.13.2.2 #define CKB_COPYRIGHT(*year, author*) CKB_CONTAINER(printf("author "); printurl(author); printf("\nyear %s\n", year);)

Definition at line 66 of file ckb-anim.h.

13.13.2.3 #define CKB_DESCRIPTION(*description*) CKB_CONTAINER(printf("description "); printurl(description); printf("\n");)

Definition at line 70 of file ckb-anim.h.

13.13.2.4 #define CKB_DOWN 1

Definition at line 52 of file ckb-anim.h.

13.13.2.5 #define CKB_GRAD_MAX 100

Definition at line 151 of file ckb-anim.h.

13.13.2.6 #define CKB_GUID(*guid*) CKB_CONTAINER(printf("guid "); printurl(guid); printf("\n");)

Definition at line 60 of file ckb-anim.h.

13.13.2.7 #define CKB_KEYCLEAR(*context*) CKB_CONTAINER(ckb_key* key = context->keys; unsigned count = context->keycount; unsigned i = 0; for(; i < count; i++) key[i].a = key[i].r = key[i].g = key[i].b = 0;)

Definition at line 148 of file ckb-anim.h.

13.13.2.8 #define CKB_KEYNAME_MAX 12

Definition at line 130 of file ckb-anim.h.

Referenced by main().

13.13.2.9 #define CKB_KP_NAME "name"

Definition at line 91 of file ckb-anim.h.

13.13.2.10 #define CKB_KP_NONE "none"

Definition at line 90 of file ckb-anim.h.

13.13.2.11 #define CKB_KP_POSITION "position"

Definition at line 92 of file ckb-anim.h.

13.13.2.12 #define CKB_KPMODE(*mode*) CKB_CONTAINER(printf("kpmode %s\n", mode);)

Definition at line 93 of file ckb-anim.h.

13.13.2.13 #define CKB_LICENSE(*license*) CKB_CONTAINER(printf("license "); printurl(license); printf("\n");)

Definition at line 68 of file ckb-anim.h.

13.13.2.14 #define CKB_LIVEPARAMS(*enable*) CKB_CONTAINER(printf("parammode %s\n", (enable) ? "live" : "static");)

Definition at line 104 of file ckb-anim.h.

13.13.2.15 #define CKB_MAX_WORD (4 * 1024)

Definition at line 238 of file ckb-anim.h.

Referenced by ckb_read_params(), and main().

13.13.2.16 #define CKB_NAME(*name*) CKB_CONTAINER(printf("name "); printurl(name); printf("\n");)

Definition at line 62 of file ckb-anim.h.

13.13.2.17 #define CKB_PARAM(*type, name, prefix, postfix, extra*) CKB_CONTAINER(printf("param %s %s ", type, name); printurl(prefix); printf(" "); printurl(postfix); printf(" "); extra; printf("\n");)

Definition at line 73 of file ckb-anim.h.

13.13.2.18 #define CKB_PARAM_AGRADIENT(*name, prefix, postfix, default*) CKB_PARAM("agradient", name, prefix, postfix, printurl(default))

Definition at line 80 of file ckb-anim.h.

13.13.2.19 #define CKB_PARAM_ANGLE(*name, prefix, postfix, default*) CKB_PARAM("angle", name, prefix, postfix, printf("%ld", (long)(default)))

Definition at line 81 of file ckb-anim.h.

13.13.2.20 #define CKB_PARAM_ARGB(*name, prefix, postfix, a, r, g, b*) CKB_PARAM("argb", name, prefix, postfix, printf("%02x%02x%02x%02x", (unsigned char)(a), (unsigned char)(r), (unsigned char)(g), (unsigned char)(b)))

Definition at line 78 of file ckb-anim.h.

13.13.2.21 #define CKB_PARAM_BOOL(*name, text, default*) CKB_PARAM("bool", name, text, "", printf((default) ? "1" : "0"))

Definition at line 76 of file ckb-anim.h.

13.13.2.22 #define CKB_PARAM_DOUBLE(*name, prefix, postfix, default, min, max*) CKB_PARAM("double", name, prefix, postfix, printf("%lf %lf %lf", (double)(default), (double)(min), (double)(max)))

Definition at line 75 of file ckb-anim.h.

13.13.2.23 #define CKB_PARAM_GRADIENT(*name, prefix, postfix, default*) CKB_PARAM("gradient", name, prefix, postfix, printurl(default))

Definition at line 79 of file ckb-anim.h.

13.13.2.24 #define CKB_PARAM_LABEL(*name, text*) CKB_PARAM("label", name, text, "",)

Definition at line 83 of file ckb-anim.h.

13.13.2.25 #define CKB_PARAM_LONG(*name, prefix, postfix, default, min, max*) CKB_PARAM("long", name, prefix, postfix, printf("%ld %ld %ld", (long)(default), (long)(min), (long)(max)))

Definition at line 74 of file ckb-anim.h.

13.13.2.26 #define CKB_PARAM_RGB(*name, prefix, postfix, r, g, b*) **CKB_PARAM**("rgb", name, prefix, postfix, printf("%02x%02x%02x", (unsigned char)(r), (unsigned char)(g), (unsigned char)(b)))

Definition at line 77 of file ckb-anim.h.

13.13.2.27 #define CKB_PARAM_STRING(*name, prefix, postfix, default*) **CKB_PARAM**("string", name, prefix, postfix, **printurl**(default))

Definition at line 82 of file ckb-anim.h.

13.13.2.28 #define CKB_PARSE_AGRADIENT(*param_name, gradient_ptr*) if(!strcmp(name, param_name) && **ckb_scan_grad**(value, gradient_ptr, 1))

Definition at line 121 of file ckb-anim.h.

13.13.2.29 #define CKB_PARSE_ANGLE(*param_name, value_ptr*) if(!strcmp(name, param_name) && sscanf(value, "%ld", value_ptr) == 1)

Definition at line 122 of file ckb-anim.h.

13.13.2.30 #define CKB_PARSE_ARGB(*param_name, a_ptr, r_ptr, g_ptr, b_ptr*) if(!strcmp(name, param_name) && sscanf(value, "%2hhx%2hhx%2hhx%2hhx", a_ptr, r_ptr, g_ptr, b_ptr) == 4)

Definition at line 119 of file ckb-anim.h.

13.13.2.31 #define CKB_PARSE_BOOL(*param_name, value_ptr*) if(!strcmp(name, param_name) && sscanf(value, "%u", value_ptr) == 1)

Definition at line 117 of file ckb-anim.h.

13.13.2.32 #define CKB_PARSE_DOUBLE(*param_name, value_ptr*) if(!strcmp(name, param_name) && sscanf(value, "%lf", value_ptr) == 1)

Definition at line 116 of file ckb-anim.h.

13.13.2.33 #define CKB_PARSE_GRADIENT(*param_name, gradient_ptr*) if(!strcmp(name, param_name) && **ckb_scan_grad**(value, gradient_ptr, 0))

Definition at line 120 of file ckb-anim.h.

13.13.2.34 #define CKB_PARSE_LONG(*param_name, value_ptr*) if(!strcmp(name, param_name) && sscanf(value, "%ld", value_ptr) == 1)

Definition at line 115 of file ckb-anim.h.

13.13.2.35 #define CKB_PARSE_RGB(*param_name, r_ptr, g_ptr, b_ptr*) if(!strcmp(name, param_name) && sscanf(value, "%2hhx%2hhx%2hhx", r_ptr, g_ptr, b_ptr) == 3)

Definition at line 118 of file ckb-anim.h.

13.13.2.36 #define CKB_PARSE_STRING(*param_name*) if(!strcmp(name, param_name))

Definition at line 123 of file ckb-anim.h.

13.13.2.37 #define CKB_PREEMPT(*enable*) CKB_CONTAINER(printf("preempt %s\n", (enable) ? "on" : "off");)

Definition at line 102 of file ckb-anim.h.

13.13.2.38 #define CKB_PRESET_END CKB_CONTAINER(printf("\n");)

Definition at line 87 of file ckb-anim.h.

13.13.2.39 #define CKB_PRESET_PARAM(*name, value*) CKB_CONTAINER(printf(" %s=", name); printurl(value);)

Definition at line 86 of file ckb-anim.h.

13.13.2.40 #define CKB_PRESET_START(*name*) CKB_CONTAINER(printf("preset "); printurl(name);)

Definition at line 85 of file ckb-anim.h.

13.13.2.41 #define CKB_REAL_ANGLE(*angle*) fmod((-(angle) + 90.) * M_PI / 180. + M_PI * 2., M_PI * 2.)

Definition at line 127 of file ckb-anim.h.

13.13.2.42 #define CKB_REPEAT(*enable*) CKB_CONTAINER(printf("repeat %s\n", (enable) ? "on" : "off");)

Definition at line 99 of file ckb-anim.h.

13.13.2.43 #define CKB_TIME_ABSOLUTE "absolute"

Definition at line 96 of file ckb-anim.h.

13.13.2.44 #define CKB_TIME_DURATION "duration"

Definition at line 95 of file ckb-anim.h.

13.13.2.45 #define CKB_TIMEMODE(*mode*) CKB_CONTAINER(printf("time %s\n", mode);)

Definition at line 97 of file ckb-anim.h.

13.13.2.46 #define CKB_UP 0

Definition at line 53 of file ckb-anim.h.

13.13.2.47 #define CKB_VERSION(*version*) CKB_CONTAINER(printf("version "); printurl(version); printf("\n");)

Definition at line 64 of file ckb-anim.h.

13.13.2.48 #define FALSE 0

Definition at line 49 of file ckb-anim.h.

13.13.2.49 #define M_PI 3.14159265358979323846

Definition at line 42 of file ckb-anim.h.

13.13.2.50 #define TRUE 1

Definition at line 46 of file ckb-anim.h.

13.13.3 Function Documentation

13.13.3.1 void ckb_alpha_blend (ckb_key * key, float a, float r, float g, float b)

Definition at line 283 of file ckb-anim.h.

References ckb_key::a, ckb_key::b, ckb_key::g, and ckb_key::r.

```
283                                                                    {
284     a /= 255.f;
285     float ka = key->a / 255.f;
286     float a2 = a + (1.f - a) * ka;
287     if(a2 == 0.f){
288         key->a = key->r = key->g = key->b = 0;
289         return;
290     }
291     key->a = round(a2 * 255.f);
292     key->r = round((r * a + key->r * ka * (1.f - a)) / a2);
293     key->g = round((g * a + key->g * ka * (1.f - a)) / a2);
294     key->b = round((b * a + key->b * ka * (1.f - a)) / a2);
295 }
```

13.13.3.2 int ckb_frame (ckb_runctx *)

Referenced by main().

Here is the caller graph for this function:



13.13.3.3 void ckb_getline (char word1[(4 * 1024)], char word2[(4 * 1024)], char word3[(4 * 1024)])

Definition at line 239 of file ckb-anim.h.

References urldecode().

Referenced by ckb_read_params(), and main().

```
239                                                                                                 {
240     char line[CKB_MAX_WORD * 3 + 3];
241     fgets(line, sizeof(line), stdin);
242     word1[0] = word1[1] = word1[2] = 0;
243     int res = sscanf(line, "%s %s %s", word1, word2, word3);
244     if(res >= 1)
245         urldecode(word1, word1);
246     if(res >= 2)
247         urldecode(word2, word2);
248     if(res >= 3)
249         urldecode(word3, word3);
250     line[strlen(line) - 1] = 0;
251 }
```

Here is the call graph for this function:

Here is the caller graph for this function:



13.13.3.4 void ckb_grad_color (float * *a*, float * *r*, float * *g*, float * *b*, const ckb_gradient * *grad*, float *pos*)

Definition at line 254 of file ckb-anim.h.

References ckb_gradient::a, ckb_gradient::b, ckb_gradient::g, ckb_gradient::ptcount, ckb_gradient::pts, and ckb_-gradient::r.

```
254                                                                                                 {
255     // Find the points surrounding this position
256     int count = grad->ptcount;
257     if(count == 0){
258         *a = *r = *g = *b = 0.f;
259         return;
260     }
261     int i = 1;
262     for(; i < count; i++){
263         if(grad->pts[i] >= pos)
264             break;
265     }
266     // Get color by linear interpolation. Premultiply the alpha value so that it returns the expected color
267     // (i.e. stops with zero opacity won't contribute to color)
268     float distance = grad->pts[i] - grad->pts[i - 1];
269     float dx = (pos - grad->pts[i - 1]) / distance;
270     float a1 = grad->a[i] / 255., a2 = grad->a[i - 1] / 255.;
271     float a3 = *a = a1 * dx + a2 * (1.f - dx);
272     if(a3 == 0.){
```

```
273         *a = *r = *g = *b = 0.f;
274         return;
275     }
276     *a *= 255.f;
277     *r = (grad->r[i] * a1 * dx + grad->r[i - 1] * a2 * (1.f - dx)) / a3;
278     *g = (grad->g[i] * a1 * dx + grad->g[i - 1] * a2 * (1.f - dx)) / a3;
279     *b = (grad->b[i] * a1 * dx + grad->b[i - 1] * a2 * (1.f - dx)) / a3;
280 }
```

13.13.3.5 void ckb_info ( )

Referenced by main().

Here is the caller graph for this function:



13.13.3.6 void ckb_init (ckb_runctx * *context*)

Referenced by main().

Here is the caller graph for this function:

13.13.3.7 void ckb_keypress (ckb_runctx *, ckb_key *, int , int , int)

Referenced by main().

Here is the caller graph for this function:



13.13.3.8 void ckb_parameter (ckb_runctx * , const char * , const char *)

Referenced by ckb_read_params().

Here is the caller graph for this function:



13.13.3.9 void ckb_read_params (ckb_runctx * *ctx*)

Definition at line 349 of file ckb-anim.h.

References ckb_getline(), CKB_MAX_WORD, and ckb_parameter().

Referenced by main().

```
349                                         {
350     char cmd[CKB_MAX_WORD], param[CKB_MAX_WORD], value[
      CKB_MAX_WORD];
351     do {
352         ckb_getline(cmd, param, value);
353         if(!*cmd){
354             printf("Error [ckb-main]: Reached EOF reading parameters");
355             return;
356         }
357         if(!strcmp(cmd, "end") && !strcmp(param, "params"))
358             break;
359         if(strcmp(cmd, "param"))
360             continue;
361         ckb_parameter(ctx, param, value);
362     } while(1);
363 }
```

Here is the call graph for this function:

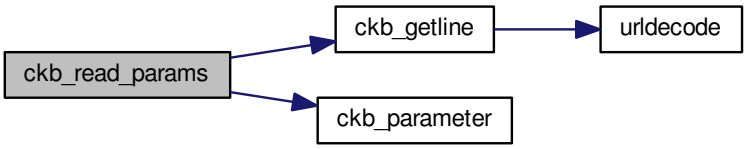

Here is the caller graph for this function:



13.13.3.10 int ckb_scan_grad (const char * *string*, ckb_gradient * *gradient*, int *alpha*)

Definition at line 298 of file ckb-anim.h.

References ckb_gradient::a, ckb_gradient::b, ckb_gradient::g, ckb_gradient::ptcount, ckb_gradient::pts, and ckb_-gradient::r.

```
298                                                                         {
299     char pos = -1;
300     unsigned char a = 255, r, g, b;
301     int count = 0;
302     while(1){
303         int scanned = 0;
304         char newpos;
305         if(sscanf(string, "%hhd:%2hhx%2hhx%2hhx%2hhx%n", &newpos, &a, &r, &g, &b, &scanned) != 5)
306             break;
307         string += scanned;
308         // Don't allow stops out-of-order or past 100
309         if(newpos <= pos || newpos > 100)
310             return 0;
311         pos = newpos;
312         if(!alpha)
313             a = 255;
314         gradient->pts[count] = pos;
315         gradient->a[count] = a;
316         gradient->r[count] = r;
317         gradient->g[count] = g;
318         gradient->b[count] = b;
319         count++;
320     }
321     if(count == 0){
322         // If nothing was read, try a single ARGB constant.
323         if(sscanf(string, "%2hhx%2hhx%2hhx%2hhx", &a, &r, &g, &b) != 4)
324             return 0;
325         count = 2;
326         gradient->pts[0] = 0;
327         gradient->pts[1] = 100;
328         gradient->a[0] = a;
329         gradient->a[1] = 0;
330         gradient->r[0] = gradient->r[1] = r;
331         gradient->g[0] = gradient->g[1] = g;
332         gradient->b[0] = gradient->b[1] = b;
333     }
334     if(count < 2)
335         return 0;
336     gradient->ptcount = count;
337     return 1;
338 }
```

13.13.3.11 void ckb_start (ckb_runctx * , int)

Referenced by main().

Here is the caller graph for this function:



13.13.3.12 void ckb_time (ckb_runctx *, double)

Referenced by main().

Here is the caller graph for this function:



13.13.3.13 int main (int *argc*, char * *argv[]*)

Definition at line 365 of file ckb-anim.h.

References ckb_key::a, ckb_key::b, ckb_frame(), ckb_getline(), ckb_info(), ckb_init(), CKB_KEYNAME_MAX, ckb_keypress(), CKB_MAX_WORD, ckb_read_params(), ckb_start(), ckb_time(), ckb_key::g, ckb_runctx::height, ckb_runctx::keycount, ckb_runctx::keys, ckb_key::name, ckb_key::r, ckb_runctx::width, ckb_key::x, and ckb_key::y.

```
365                                 {
366     if(argc == 2){
367         if(!strcmp(argv[1], "--ckb-info")){
368             ckb_info();
369             fflush(stdout);
370             return 0;
371         } else if(!strcmp(argv[1], "--ckb-run")){
372             ckb_runctx ctx;
373             // Read the keymap lines
374             char cmd[CKB_MAX_WORD], param[CKB_MAX_WORD], value[
    CKB_MAX_WORD];
375             // Skip anything up until "begin keymap"
376             do {
377                 ckb_getline(cmd, param, value);
378                 if(!*cmd){
379                     // If end-of-file is reached, abort
380                     printf("Error [ckb-main]: Reached EOF looking for \"begin keymap\"");
381                     return -2;
382                 }
383             } while(strcmp(cmd, "begin") || strcmp(param, "keymap"));
384             ckb_getline(cmd, param, value);
385             unsigned keycount;
386             if(strcmp(cmd, "keycount") || sscanf(param, "%u", &keycount) != 1 || keycount == 0){
387                 // If keycount isn't the next line, something is wrong
388                 printf("Error [ckb-main]: \"begin keymap\" not followed with \"keycount\"");
389                 return -3;
390             }
391             ctx.keys = (ckb_key*)calloc(keycount, sizeof(ckb_key));
```

```
392             ctx.keycount = keycount;
393             unsigned max_x = 0, max_y = 0;
394             unsigned i = 0;
395             for(; i < ctx.keycount; i++){
396                 ckb_getline(cmd, param, value);
397                 unsigned x, y;
398                 if(strcmp(cmd, "key") || !*param || !sscanf(value, "%u,%u", &x, &y)){
399                     i--;
400                     continue;
401                 }
402                 ckb_key* key = ctx.keys + i;
403                 strncpy(key->name, param, CKB_KEYNAME_MAX);
404                 key->x = x;
405                 key->y = y;
406                 if(x > max_x)
407                     max_x = x;
408                 if(y > max_y)
409                     max_y = y;
410             }
411             ctx.width = max_x + 1;
412             ctx.height = max_y + 1;
413             // Skip anything else until "end keymap"
414             do {
415                 ckb_getline(cmd, param, value);
416                 if(!*cmd){
417                     printf("Error [ckb-main]: Reached EOF looking for \"end keymap\"");
418                     return -2;
419                 }
420             } while(strcmp(cmd, "end") || strcmp(param, "keymap"));
421             // Run init function
422             ckb_init(&ctx);
423             // Skip anything else until "begin params"
424             do {
425                 ckb_getline(cmd, param, value);
426                 if(!*cmd){
427                     printf("Error [ckb-main]: Reached EOF looking for \"begin params\"");
428                     return -2;
429                 }
430             } while(strcmp(cmd, "begin") || strcmp(param, "params"));
431             // Parse parameters
432             ckb_read_params(&ctx);
433             // Skip anything else until "begin run"
434             do {
435                 ckb_getline(cmd, param, value);
436                 if(!*cmd){
437                     printf("Error [ckb-main]: Reached EOF looking for \"begin run\"");
438                     return -2;
439                 }
440             } while(strcmp(cmd, "begin") || strcmp(param, "run"));
441             // Run the main loop
442             printf("begin run\n");
443             fflush(stdout);
444             while(1){
445                 ckb_getline(cmd, param, value);
446                 if(!*cmd || (!strcmp(cmd, "end") && !strcmp(param, "run")))
447                     break;
448                 // Parse input
449                 if(!strcmp(cmd, "start"))
450                     ckb_start(&ctx, 1);
451                 else if(!strcmp(cmd, "stop"))
452                     ckb_start(&ctx, 0);
453                 else if(!strcmp(cmd, "begin") && !strcmp(param, "params"))
454                     ckb_read_params(&ctx);
455                 else if(!strcmp(cmd, "key")){
456                     int x, y;
457                     if(sscanf(param, "%d,%d", &x, &y) == 2){
458                         // Find a key with this position
459                         ckb_key* key = 0;
460                         for(i = 0; i < keycount; i++){
461                             if(ctx.keys[i].x == x && ctx.keys[i].y == y){
462                                 key = ctx.keys + i;
463                                 break;
464                             }
465                         }
466                         if(key)
467                             ckb_keypress(&ctx, key, key->x, key->y, !strcmp(value, "down"));
468                         else
469                             ckb_keypress(&ctx, 0, x, y, !strcmp(value, "down"));
470                     } else {
471                         // Find a key with this name
472                         ckb_key* key = 0;
473                         for(i = 0; i < keycount; i++){
474                             if(!strcmp(ctx.keys[i].name, param)){
475                                 key = ctx.keys + i;
476                                 break;
477                             }
478                         }
```

```
479                         if(key)
480                             ckb_keypress(&ctx, key, key->x, key->y, !strcmp(value, "down"));
481                     }
482                 } else if(!strcmp(cmd, "frame")){
483                     int end = ckb_frame(&ctx);
484                     // Output the frame
485                     printf("begin frame\n");
486                     for(i = 0; i < ctx.keycount; i++){
487                         ckb_key* key = ctx.keys + i;
488                         printf("argb %s %02hhx%02hhx%02hhx%02hhx\n", key->name, key->
    a, key->r, key->g, key->b);
489                     }
490                     printf("end frame\n");
491                     if(end)
492                         break;
493                     fflush(stdout);
494                 } else {
495                     double delta = 0.;
496                     if(!strcmp(cmd, "time") && sscanf(param, "%lf", &delta) == 1)
497                         ckb_time(&ctx, delta);
498                 }
499             }
500             printf("end run\n");
501             fflush(stdout);
502             free(ctx.keys);
503             return 0;
504         }
505     }
506     printf("This program must be run from within ckb\n");
507     return -1;
508 }
```

Here is the call graph for this function:

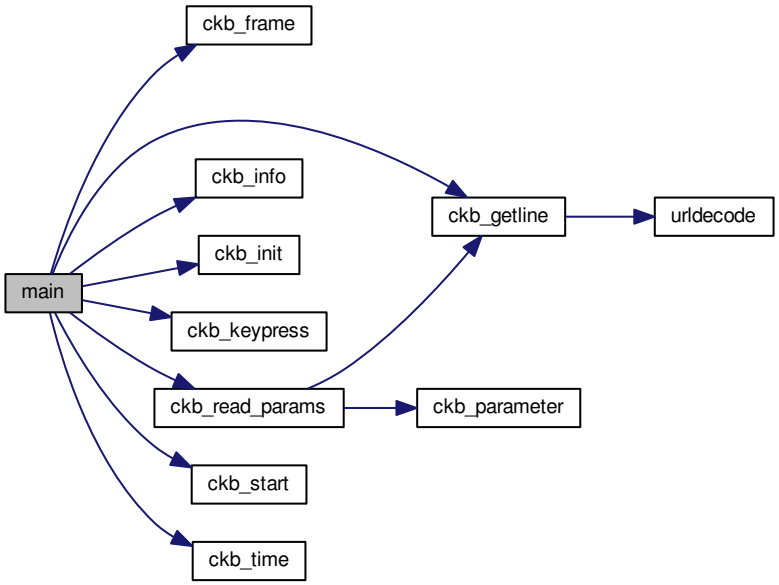

13.13.3.14 void printurl (const char * *src*)

Definition at line 178 of file ckb-anim.h.

```
178                                 {
179     char out[strlen(src) * 3 + 1];
180     char* dst = out;
181     char s;
182     while((s = *src++)){
```

```
183         if(s <= ',' || s == '/' ||
184                 (s >= ':' && s <= '@') ||
185                 s == '[' || s == ']' ||
186                 s >= 0x7F){
187             char a = s >> 4, b = s & 0xF;
188             if(a >= 10)
189                 a += 'A' - 10;
190             else
191                 a += '0';
192             if(b >= 10)
193                 b += 'A' - 10;
194             else
195                 b += '0';
196             dst[0] = '%';
197             dst[1] = a;
198             dst[2] = b;
199             dst += 3;
200         } else
201             *dst++ = s;
202     }
203     *dst = '\0';
204     printf("%s", out);
205 }
```

13.13.3.15 void urldecode (char * *dst*, const char * *src*)

Definition at line 208 of file ckb-anim.h.

Referenced by ckb_getline().

```
208                                             {
209     char a, b;
210     char s;
211     while((s = *src)){
212         if((s == '%') &&
213                 ((a = src[1]) && (b = src[2])) &&
214                 (isxdigit(a) && isxdigit(b))){
215             if(a >= 'a')
216                 a -= 'a'-'A';
217             if(a >= 'A')
218                 a -= 'A' - 10;
219             else
220                 a -= '0';
221             if(b >= 'a')
222                 b -= 'a'-'A';
223             if(b >= 'A')
224                 b -= 'A' - 10;
225             else
226                 b -= '0';
227             *dst++ = 16*a + b;
228             src += 3;
229         } else {
230             *dst++ = s;
231             src++;
232         }
233     }
234     *dst = '\0';
235 }
```

Here is the caller graph for this function:



13.14 src/ckb/ckbsettings.cpp File Reference

```
#include "ckbsettings.h"
#include "ckbsettingswriter.h"
#include <QThread>
#include <QMutex>
#include <QDebug>
```

Include dependency graph for ckbsettings.cpp:

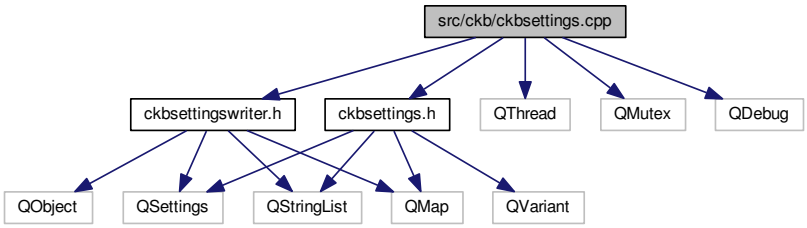

Macros

- #define lockMutex QMutexLocker locker(backing == _globalSettings ? &settingsMutex : 0)
- #define lockMutexStatic QMutexLocker locker(&settingsMutex)
- #define lockMutexStatic2 QMutexLocker locker2(&settingsMutex)
- #define lockMutexCache QMutexLocker locker(&settingsCacheMutex)

Functions

- QAtomicInt cacheWritesInProgress (0)
- QMutex settingsMutex (QMutex::Recursive)
- QMutex settingsCacheMutex (QMutex::Recursive)
- static QSettings * globalSettings ()

Variables

- static QSettings * _globalSettings = 0
- static QThread * globalThread = 0
- static QMap< QString, QVariant > globalCache

13.14.1 Macro Definition Documentation

13.14.1.1 #define lockMutex QMutexLocker locker(backing == _globalSettings ? &settingsMutex : 0)

Definition at line 15 of file ckbsettings.cpp.

Referenced by CkbSettings::childGroups(), CkbSettings::childKeys(), CkbSettings::contains(), and CkbSettings::value().

13.14.1.2 #define lockMutexCache QMutexLocker locker(&settingsCacheMutex)

Definition at line 18 of file ckbsettings.cpp.

Referenced by CkbSettings::get(), CkbSettings::set(), and CkbSettings::setValue().

13.14.1.3 #define lockMutexStatic QMutexLocker locker(&settingsMutex)

Definition at line 16 of file ckbsettings.cpp.

Referenced by globalSettings(), and CkbSettings::set().

13.14.1.4 #define lockMutexStatic2 QMutexLocker locker2(&settingsMutex)

Definition at line 17 of file ckbsettings.cpp.

Referenced by CkbSettings::get().

13.14.2 Function Documentation

13.14.2.1 QAtomicInt cacheWritesInProgress (0)

Referenced by CkbSettings::cleanUp(), and CkbSettings::isBusy().

Here is the caller graph for this function:



13.14.2.2 static QSettings* globalSettings ( ) [static]

Definition at line 27 of file ckbsettings.cpp.

References _globalSettings, and lockMutexStatic.

Referenced by CkbSettings::get(), and CkbSettings::set().

```
27                                {
28     if(!_globalSettings){
29         lockMutexStatic;
30         if(!(volatile QSettings*)_globalSettings){   // Check again after locking mutex in
       case another thread created the object
31             // Put the settings object in a separate thread so that it won't lock up the GUI when it syncs
32             globalThread = new QThread;
33             globalThread->start();
34             _globalSettings = new QSettings;
35             qInfo() << "Path  to settings is" << _globalSettings->fileName();
36             _globalSettings->moveToThread(globalThread);
37         }
38     }
39     return _globalSettings;
40 }
```

Here is the caller graph for this function:

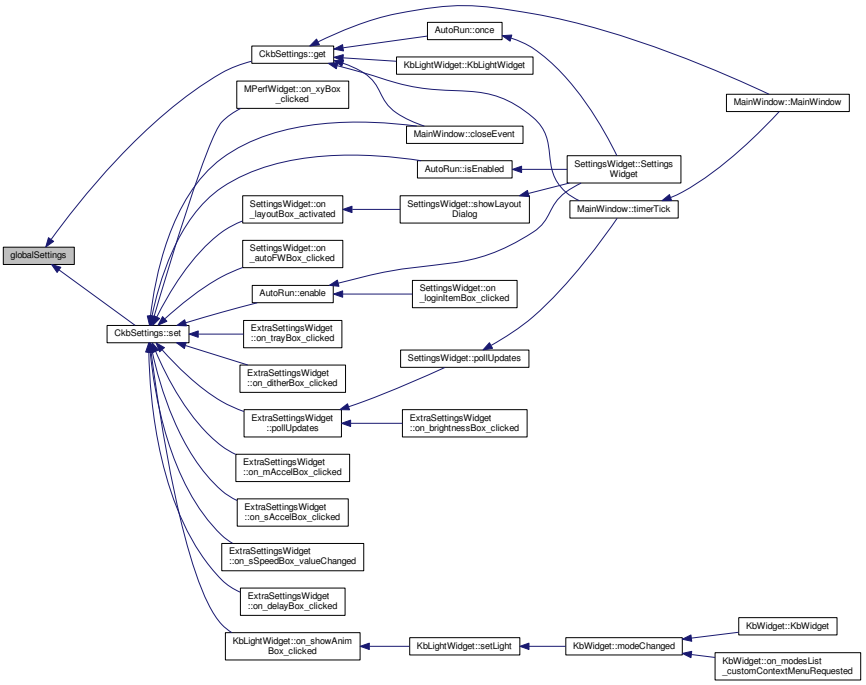

13.14.2.3 QMutex settingsCacheMutex (QMutex::Recursive)

13.14.2.4 QMutex settingsMutex (QMutex::Recursive)

13.14.3 Variable Documentation

13.14.3.1 QSettings* _globalSettings = 0 [static]

Definition at line 8 of file ckbsettings.cpp.

Referenced by CkbSettings::cleanUp(), and globalSettings().

13.14.3.2 QMap<QString, QVariant> globalCache [static]

Definition at line 12 of file ckbsettings.cpp.

Referenced by CkbSettings::get(), CkbSettings::set(), and CkbSettings::setValue().

13.14.3.3 QThread* globalThread = 0 [static]

Definition at line 9 of file ckbsettings.cpp.

Referenced by CkbSettings::cleanUp().

13.15 src/ckb/ckbsettings.h File Reference

```
#include <QSettings>
```

```
#include <QStringList>
#include <QMap>
#include <QVariant>
```

Include dependency graph for ckbsettings.h:

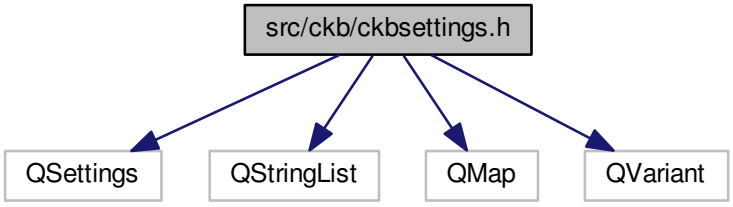

This graph shows which files directly or indirectly include this file:

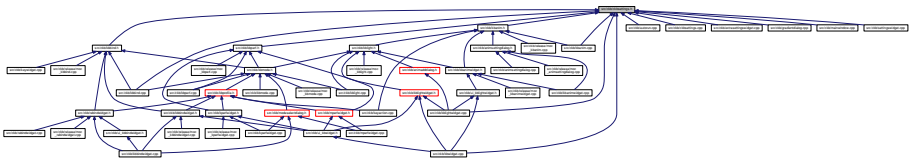

Data Structures

- class CkbSettings
- class SGroup

13.16 src/ckb/ckbsettingswriter.cpp File Reference

```
#include "ckbsettingswriter.h"
#include <QMutex>
```

Include dependency graph for ckbsettingswriter.cpp:

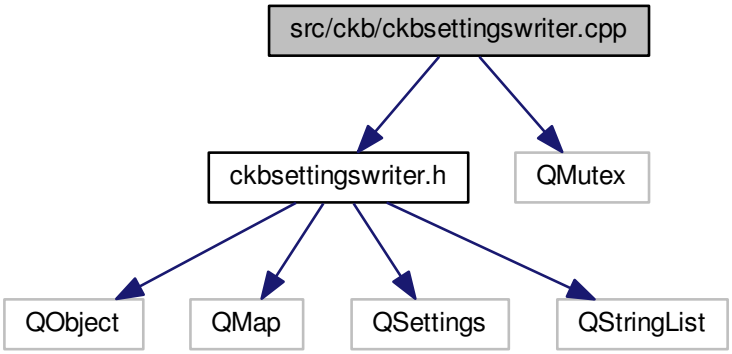

Macros

- #define lockMutex QMutexLocker locker(backing == _globalSettings ? &mutex : 0)
- #define lockMutexStatic QMutexLocker locker(&settingsMutex)
- #define lockMutexStatic2 QMutexLocker locker2(&settingsMutex)
- #define lockMutexCache QMutexLocker locker(&settingsCacheMutex)

Variables

- QAtomicInt cacheWritesInProgress
- QMutex settingsMutex
- QMutex settingsCacheMutex

13.16.1 Macro Definition Documentation

13.16.1.1 #define lockMutex QMutexLocker locker(backing == _globalSettings ? &mutex : 0)

Definition at line 7 of file ckbsettingswriter.cpp.

13.16.1.2 #define lockMutexCache QMutexLocker locker(&settingsCacheMutex)

Definition at line 10 of file ckbsettingswriter.cpp.

13.16.1.3 #define lockMutexStatic QMutexLocker locker(&settingsMutex)

Definition at line 8 of file ckbsettingswriter.cpp.

Referenced by CkbSettingsWriter::run().

13.16.1.4 #define lockMutexStatic2 QMutexLocker locker2(&settingsMutex)

Definition at line 9 of file ckbsettingswriter.cpp.

13.16.2 Variable Documentation

13.16.2.1 QAtomicInt cacheWritesInProgress

Referenced by CkbSettingsWriter::CkbSettingsWriter(), and CkbSettingsWriter::~CkbSettingsWriter().

13.16.2.2 QMutex settingsCacheMutex

13.16.2.3 QMutex settingsMutex

13.17 src/ckb/ckbsettingswriter.h File Reference

```
#include <QObject>
#include <QMap>
#include <QSettings>
#include <QStringList>
```

Include dependency graph for ckbsettingswriter.h:

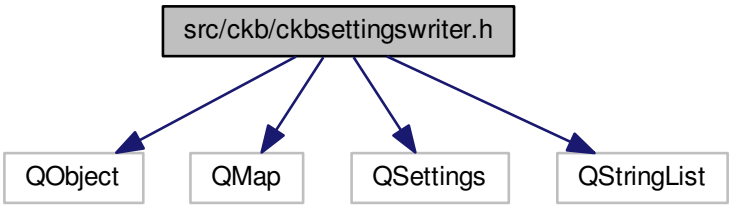

This graph shows which files directly or indirectly include this file:

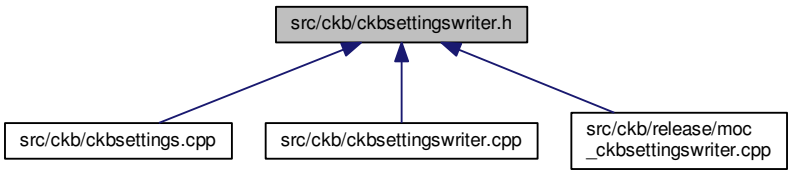

Data Structures

- class CkbSettingsWriter

13.18 src/ckb/colorbutton.cpp File Reference

```
#include "colorbutton.h"
```

```
#include <QColorDialog>
#include <QPainter>
```

Include dependency graph for colorbutton.cpp:

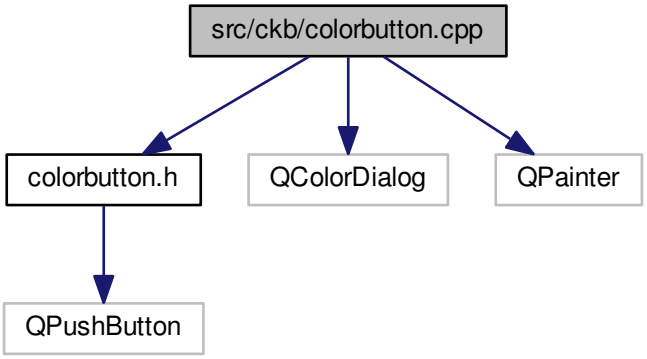

13.19 src/ckb/colorbutton.h File Reference

```
#include <QPushButton>
```

Include dependency graph for colorbutton.h:



This graph shows which files directly or indirectly include this file:

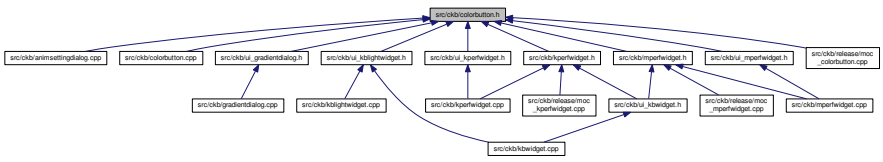

Data Structures

- class ColorButton

13.20 src/ckb/colormap.cpp File Reference

```
#include "colormap.h"
```

Include dependency graph for colormap.cpp:

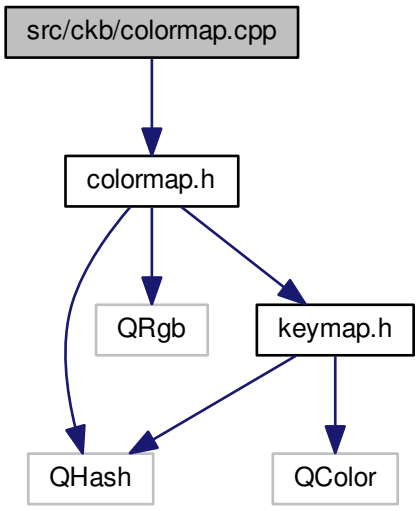

Functions

- static int qs_strcmp (const void *lhs, const void *rhs)

13.20.1 Function Documentation

13.20.1.1 static int qs_strcmp (const void * *lhs*, const void * *rhs*) [static]

Definition at line 49 of file colormap.cpp.

Referenced by ColorMap::colorForName(), and ColorMap::init().

```
49                                                  {
50     return strcmp(*(const char**)lhs, *(const char**)rhs);
51 }
```

Here is the caller graph for this function:

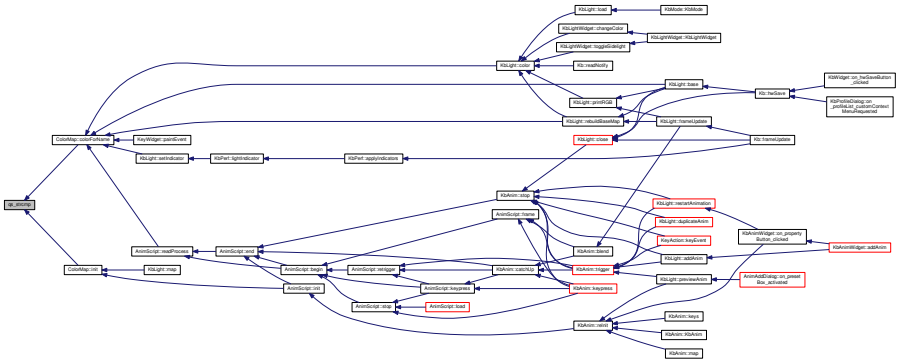

13.21 src/ckb/colormap.h File Reference

```
#include <QHash>
#include <QRgb>
#include "keymap.h"
```

Include dependency graph for colormap.h:

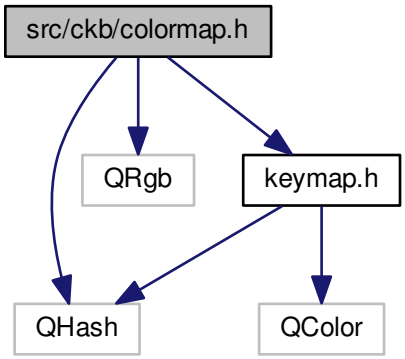

This graph shows which files directly or indirectly include this file:

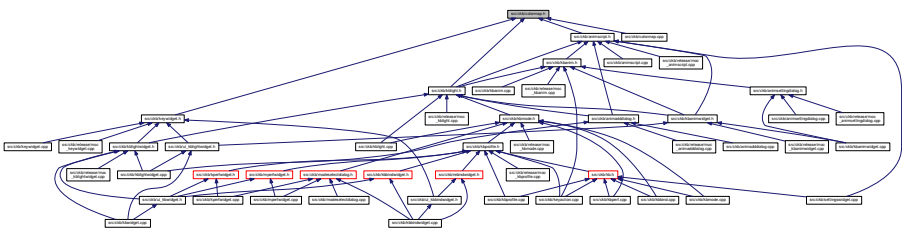

Data Structures

- class ColorMap

Typedefs

- typedef QHash< QString, QRgb > QColorMap
- typedef QHashIterator< QString, QRgb > QColorMapIterator
- typedef QMutableHashIterator < QString, QRgb > QMutableColorMapIterator

13.21.1 Typedef Documentation

13.21.1.1 typedef QHash<QString, QRgb> QColorMap

Definition at line 9 of file colormap.h.

13.21.1.2 typedef QHashIterator<QString, QRgb> QColorMapIterator

Definition at line 10 of file colormap.h.

13.21.1.3 typedef QMutableHashIterator<QString, QRgb> QMutableColorMapIterator

Definition at line 11 of file colormap.h.

13.22 src/ckb/extrasettingswidget.cpp File Reference

```
#include "extrasettingswidget.h"
#include "ui_extrasettingswidget.h"
#include "kb.h"
#include "mainwindow.h"
#include "ckbsettings.h"
```

Include dependency graph for extrasettingswidget.cpp:

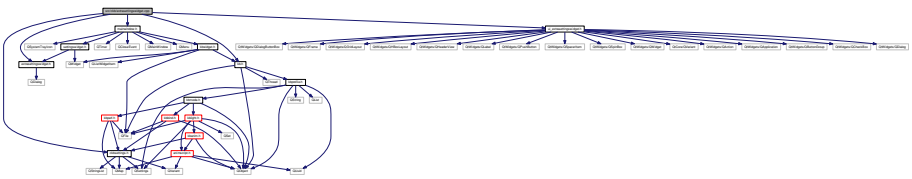

Variables

- static int lastSharedDimming = -2

13.22.1 Variable Documentation

13.22.1.1 int lastSharedDimming = -2 [static]

Definition at line 8 of file extrasettingswidget.cpp.

Referenced by ExtraSettingsWidget::ExtraSettingsWidget(), and ExtraSettingsWidget::pollUpdates().

13.23 src/ckb/extrasettingswidget.h File Reference

```
#include <QDialog>
```

Include dependency graph for extrasettingswidget.h:

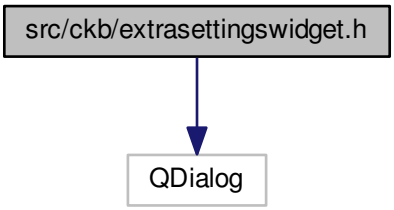

This graph shows which files directly or indirectly include this file:

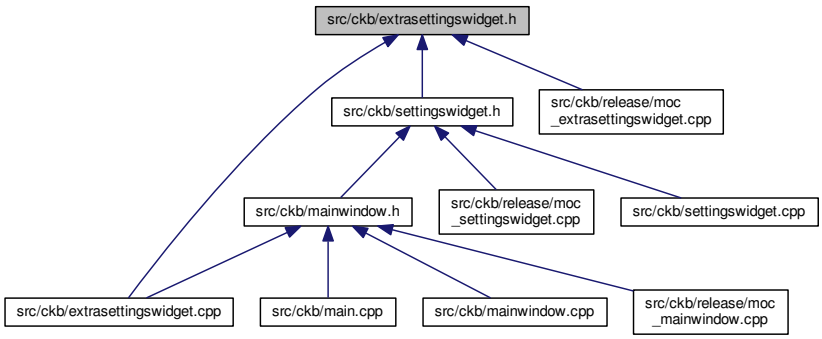

Data Structures

- class ExtraSettingsWidget

Namespaces

- Ui

13.24 src/ckb/fwupgradedialog.cpp File Reference

```
#include <QDir>
```

```
#include <QMessageBox>
#include "fwupgradedialog.h"
#include "kbfirmware.h"
#include "ui_fwupgradedialog.h"
```

Include dependency graph for fwupgradedialog.cpp:

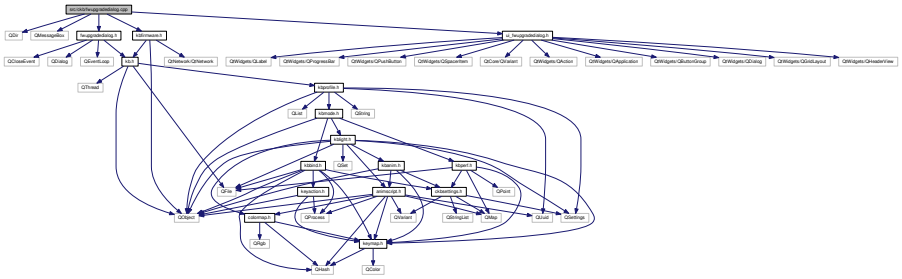

Data Structures

- struct Kbld

Functions

- static const int DIALOG_HEIGHT_MAX (240)
- static float verifyFw (const QByteArray &blob, const QString &features)

Variables

- static Kbld ids []
- static const int DIALOG_WIDTH = 420
- static const int DIALOG_HEIGHT_MIN = 200

13.24.1 Data Structure Documentation

13.24.1.1 struct Kbld

Definition at line 8 of file fwupgradedialog.cpp.

Collaboration diagram for KbId:

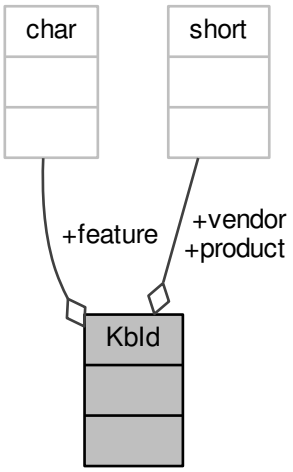

Data Fields

const char *	feature	
short	product	
short	vendor	

13.24.2 Function Documentation

13.24.2.1 static const int DIALOG_HEIGHT_MAX (240) [static]

Referenced by FwUpgradeDialog::exec().

Here is the caller graph for this function:

13.24.2.2 static float verifyFw (const QByteArray & *blob*, const QString & *features*) [static]

Definition at line 85 of file fwupgradedialog.cpp.

References ids.

Referenced by FwUpgradeDialog::exec().

```
85                                                                  {
86     if(blob.length() < 0x0108)
87         return 0.f;
88     const char* bData = blob.data();
89     // Make sure it matches this device based on the vendor and product IDs embedded in the blob
90     bool match = false;
```

```
91      for(uint i = 0; i < sizeof(ids)/sizeof(KbId); i++){
92          if(!memcmp(&ids[i].vendor, bData + 0x102, 2) && !memcmp(&ids[i].product, bData + 0x104, 2)
93                  && features.startsWith(ids[i].feature, Qt::CaseInsensitive)){
94              match = true;
95              break;
96          }
97      }
98      if(!match)
99          return 0.f;
100     // Copy the version from the blob
101     short version;
102     memcpy(&version, bData + 0x106, 2);
103     // Un-hexify it
104     return QString::number(version, 16).toFloat() / 100.f;
105 }
```

Here is the caller graph for this function:

13.24.3 Variable Documentation

13.24.3.1 const int DIALOG_HEIGHT_MIN = 200 [static]

Definition at line 29 of file fwupgradedialog.cpp.

Referenced by FwUpgradeDialog::FwUpgradeDialog(), and FwUpgradeDialog::on_actionButton_clicked().

13.24.3.2 const int DIALOG_WIDTH = 420 [static]

Definition at line 28 of file fwupgradedialog.cpp.

Referenced by FwUpgradeDialog::exec(), FwUpgradeDialog::FwUpgradeDialog(), and FwUpgradeDialog::on_actionButton_clicked().

13.24.3.3 KbId ids[] [static]

Initial value:

```
= {

    { 0x1b1c, 0x1b17, "corsair k65 rgb" },
    { 0x1b1c, 0x1b13, "corsair k70 rgb" },
    { 0x1b1c, 0x1b11, "corsair k95 rgb" },
    { 0x1b1c, 0x1b15, "corsair strafe monochrome" },
    { 0x1b1c, 0x1b20, "corsair strafe rgb" },

    { 0x1b1c, 0x1b12, "corsair m65 rgb" },
    { 0x1b1c, 0x1b1e, "corsair scimitar rgb" },

    { 0x1b1c, 0x1b32, "corsair sabre optical rgb" }
}
```

Definition at line 14 of file fwupgradedialog.cpp.

Referenced by verifyFw().

13.25 src/ckb/fwupgradedialog.h File Reference

```
#include <QCloseEvent>
```

```
#include <QDialog>
#include <QEventLoop>
#include "kb.h"
```

Include dependency graph for fwupgradedialog.h:

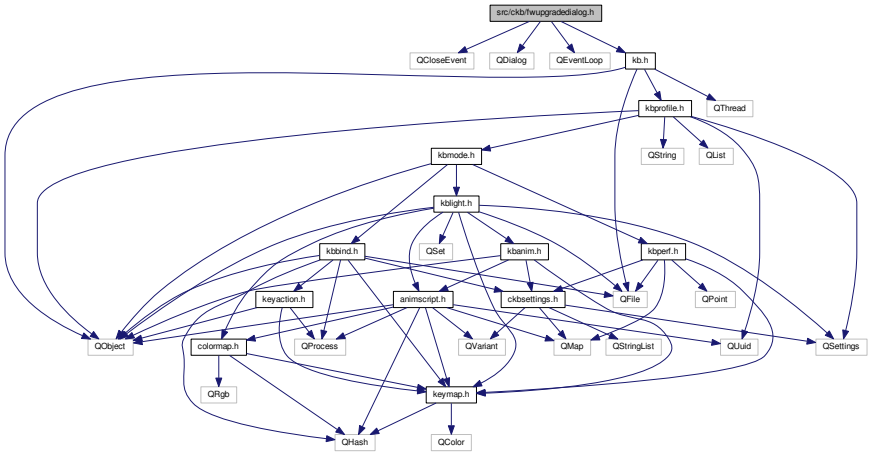

This graph shows which files directly or indirectly include this file:

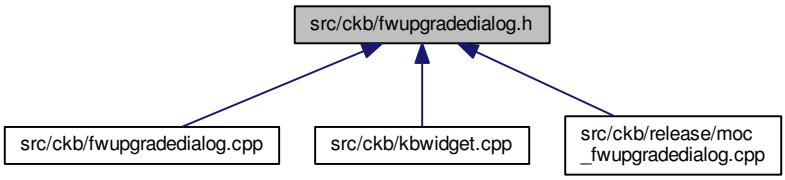

Data Structures

- class FwUpgradeDialog

Namespaces

- Ui

13.26 src/ckb/gradientbutton.cpp File Reference

```
#include <cmath>
#include <cstdio>
#include <QPainter>
#include "gradientbutton.h"
#include "gradientdialog.h"
```

Include dependency graph for gradientbutton.cpp:

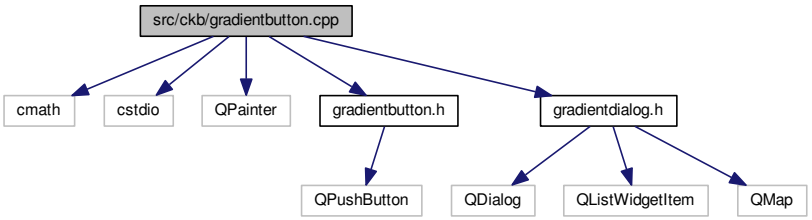

13.27 src/ckb/gradientbutton.h File Reference

```
#include <QPushButton>
```

Include dependency graph for gradientbutton.h:



This graph shows which files directly or indirectly include this file:

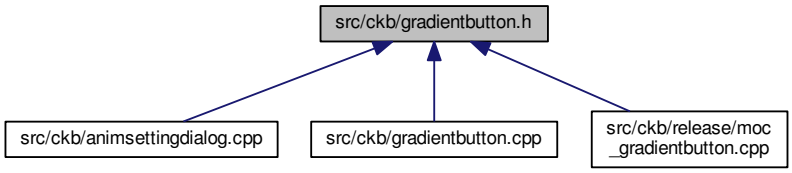

Data Structures

- class GradientButton

13.28 src/ckb/gradientdialog.cpp File Reference

```
#include <cmath>
#include <QMessageBox>
#include <QPainter>
#include <QSettings>
#include "ckbsettings.h"
#include "gradientdialog.h"
#include "ui_gradientdialog.h"
```

Include dependency graph for gradientdialog.cpp:

Variables

- static const QString prefsPath = "Stored Gradients"

13.28.1 Variable Documentation

13.28.1.1 const QString prefsPath = "Stored Gradients" [static]

Definition at line 9 of file gradientdialog.cpp.

Referenced by GradientDialog::GradientDialog(), and GradientDialog::~GradientDialog().

13.29 src/ckb/gradientdialog.h File Reference

```
#include <QDialog>
#include <QListWidgetItem>
#include <QMap>
```

Include dependency graph for gradientdialog.h:

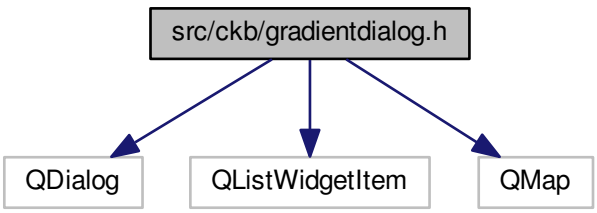

This graph shows which files directly or indirectly include this file:

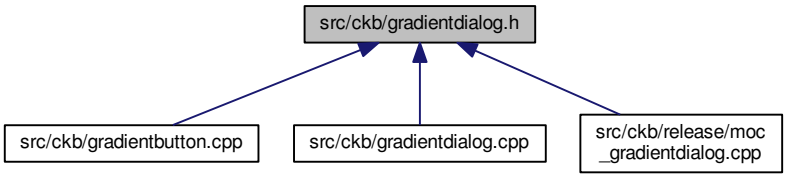

Data Structures

- class GradientDialog
- struct GradientDialog::Preset

Namespaces

- Ui

13.30 src/ckb/gradientdialogwidget.cpp File Reference

```
#include <cmath>
#include <QPainter>
#include <QPropertyAnimation>
#include "gradientdialogwidget.h"
```

Include dependency graph for gradientdialogwidget.cpp:

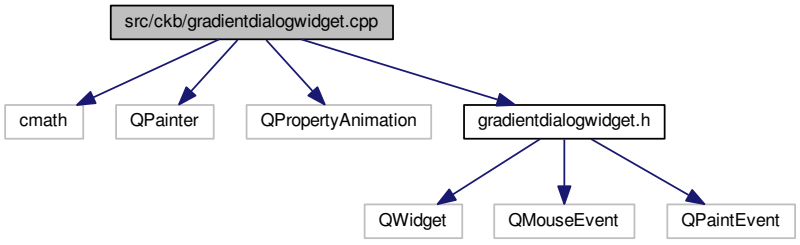

13.31 src/ckb/gradientdialogwidget.h File Reference

```
#include <QWidget>
#include <QMouseEvent>
#include <QPaintEvent>
```

Include dependency graph for gradientdialogwidget.h:

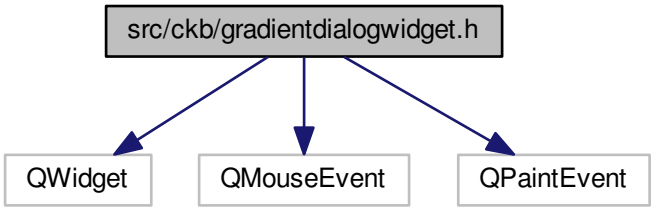

This graph shows which files directly or indirectly include this file:

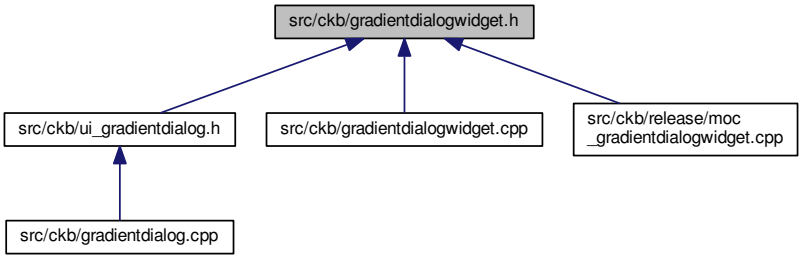

Data Structures

- class GradientDialogWidget

13.32 src/ckb/kb.cpp File Reference

```
#include <fcntl.h>
#include <QSet>
#include <QUrl>
#include <QMutex>
#include <QDateTime>
#include "kb.h"
#include "kbmanager.h"
```

Include dependency graph for kb.cpp:

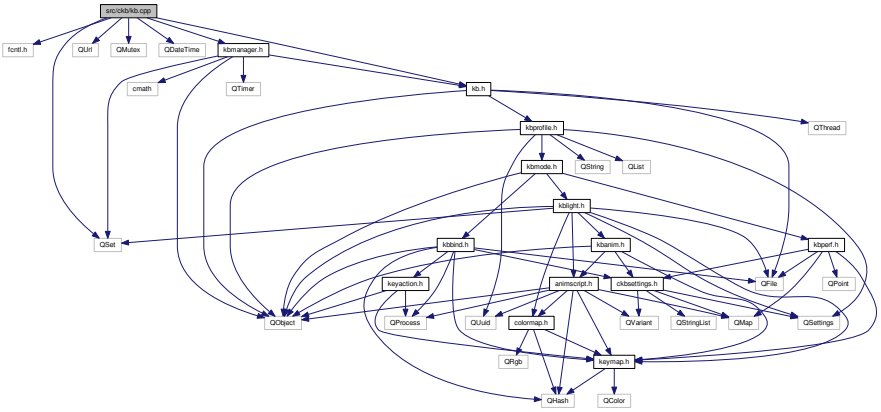

Variables

- static QSet< Kb * > activeDevices
- static QSet< QString > notifyPaths
- static QMutex notifyPathMutex

13.32.1 Variable Documentation

13.32.1.1 QSet<Kb*> activeDevices [static]

Definition at line 10 of file kb.cpp.

Referenced by Kb::dither(), Kb::frameRate(), Kb::Kb(), Kb::layout(), Kb::macroDelay(), Kb::mouseAccel(), Kb::scrollSpeed(), and Kb::~Kb().

13.32.1.2 QMutex notifyPathMutex [static]

Definition at line 13 of file kb.cpp.

Referenced by Kb::Kb(), and Kb::run().

13.32.1.3 QSet<QString> notifyPaths [static]

Definition at line 12 of file kb.cpp.

Referenced by Kb::Kb(), Kb::run(), and Kb::~Kb().

13.33 src/ckb/kb.h File Reference

```
#include <QObject>
#include <QFile>
#include <QThread>
#include "kbprofile.h"
```

Include dependency graph for kb.h:

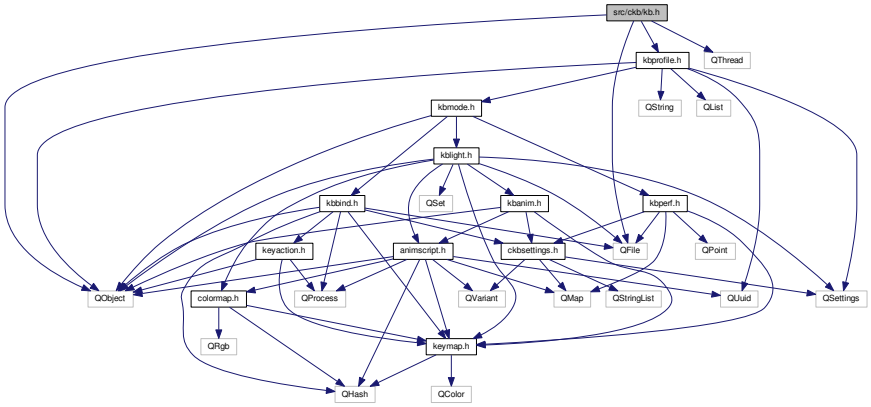

This graph shows which files directly or indirectly include this file:

Data Structures

- class Kb

13.34 src/ckb/kbanim.cpp File Reference

```
#include <cmath>
#include <QDateTime>
#include <QMetaEnum>
#include <QDebug>
#include "ckbsettings.h"
#include "kbanim.h"
```

Include dependency graph for kbanim.cpp:

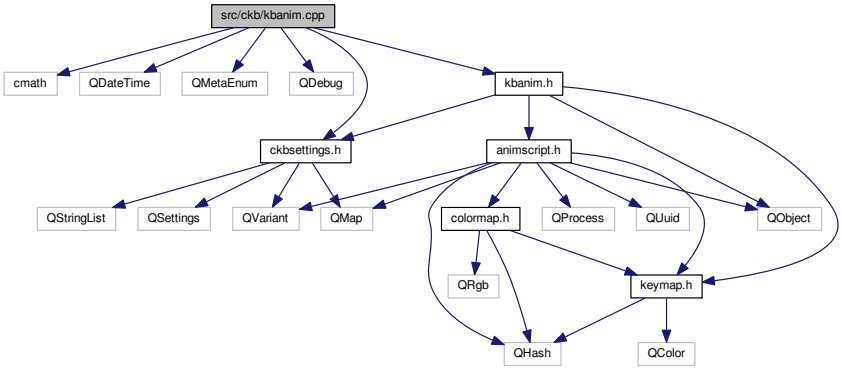

Typedefs

- typedef float(∗ blendFunc)(float, float)

Functions

- static float blendNormal (float bg, float fg)
- static float blendAdd (float bg, float fg)
- static float blendSubtract (float bg, float fg)
- static float blendMultiply (float bg, float fg)
- static float blendDivide (float bg, float fg)

Variables

- static blendFunc functions [5] = { blendNormal, blendAdd, blendSubtract, blendMultiply, blendDivide }

13.34.1 Typedef Documentation

13.34.1.1 typedef float(∗ blendFunc)(float, float)

Definition at line 362 of file kbanim.cpp.

13.34.2 Function Documentation

13.34.2.1 static float blendAdd (float *bg,* float *fg*) [static]

Definition at line 337 of file kbanim.cpp.

```
337                                             {
338     float res = bg + fg;
339     if(res > 1.f)
340         res = 1.f;
341     return res;
342 }
```

13.34.2.2 static float blendDivide (float *bg,* float *fg*) [static]

Definition at line 355 of file kbanim.cpp.

```
355                                               {
356     float res = bg / fg;
357     if(res > 1.f)
358         res = 1.f;
359     return res;
360 }
```

13.34.2.3 static float blendMultiply (float *bg,* float *fg*) [static]

Definition at line 351 of file kbanim.cpp.

```
351                                                 {
352     return bg * fg;
353 }
```

13.34.2.4 static float blendNormal (float *bg*, float *fg*) [static]

Definition at line 333 of file kbanim.cpp.

```
333                                          {
334     return fg;
335 }
```

13.34.2.5 static float blendSubtract (float *bg*, float *fg*) [static]

Definition at line 344 of file kbanim.cpp.

```
344                                             {
345     float res = bg - fg;
346     if(res < 0.f)
347         res = 0.f;
348     return res;
349 }
```

13.34.3 Variable Documentation

13.34.3.1 blendFunc functions[5] = { blendNormal, blendAdd, blendSubtract, blendMultiply, blendDivide } [static]

Definition at line 363 of file kbanim.cpp.

Referenced by KbAnim::blend().

13.35 src/ckb/kbanim.h File Reference

```
#include <QObject>
#include "ckbsettings.h"
#include "animscript.h"
#include "keymap.h"
```

Include dependency graph for kbanim.h:

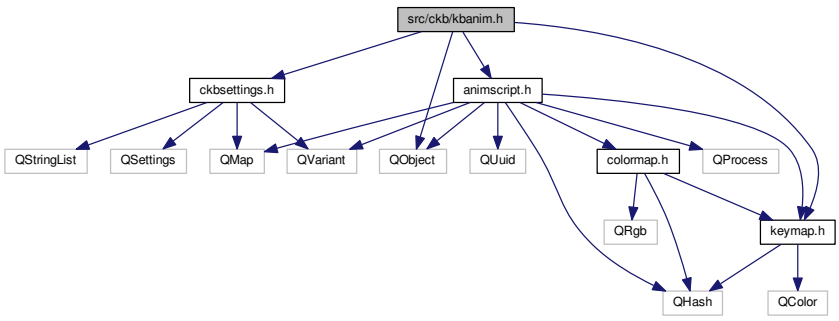

This graph shows which files directly or indirectly include this file:

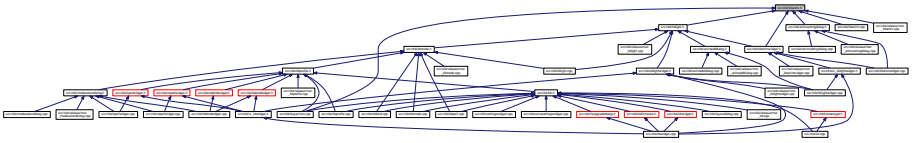

Data Structures

- class KbAnim

13.36 src/ckb/kbanimwidget.cpp File Reference

```
#include <QDateTime>
#include <QMenu>
#include "animsettingdialog.h"
#include "kbanimwidget.h"
#include "ui_kbanimwidget.h"
```

Include dependency graph for kbanimwidget.cpp:

13.37 src/ckb/kbanimwidget.h File Reference

```
#include <QListWidgetItem>
#include <QTimer>
#include <QWidget>
#include "animscript.h"
#include "kbanim.h"
#include "kblight.h"
```

Include dependency graph for kbanimwidget.h:

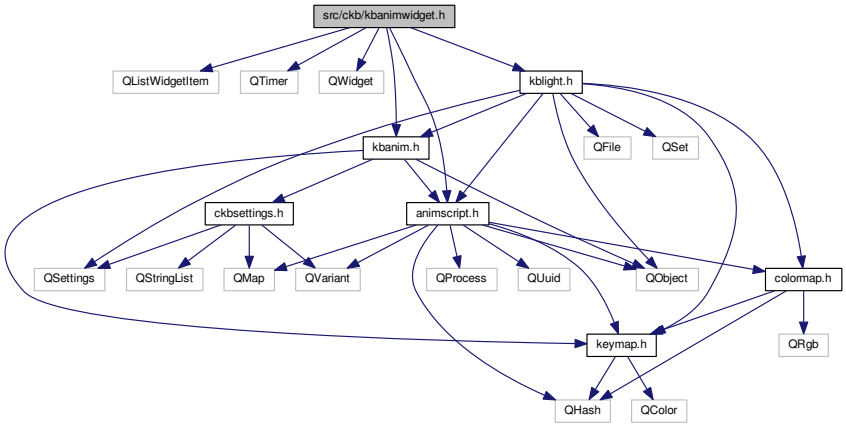

This graph shows which files directly or indirectly include this file:

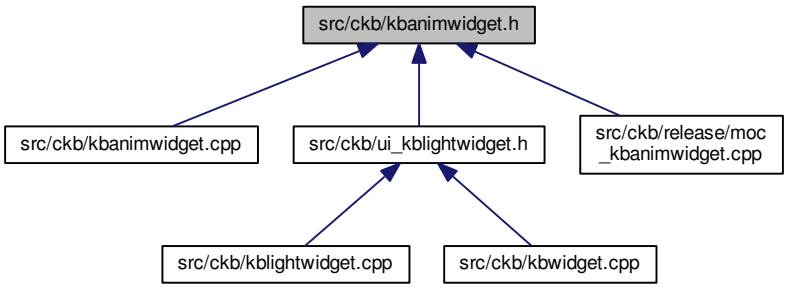

Data Structures

- class KbAnimWidget

Namespaces

- Ui

13.38 src/ckb/kbbind.cpp File Reference

```
#include <QDateTime>
#include <QUrl>
#include "ckbsettings.h"
#include "kbbind.h"
#include "kbmode.h"
#include "kb.h"
#include "qdebug.h"
```

Include dependency graph for kbbind.cpp:

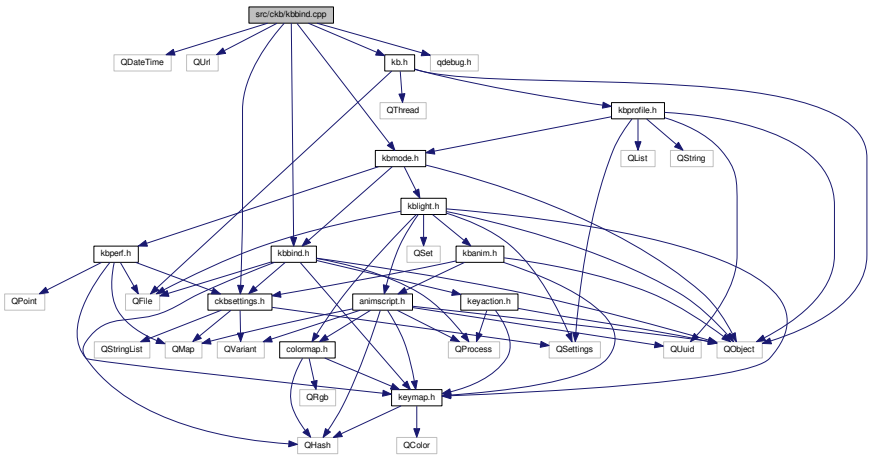

13.39 src/ckb/kbbind.h File Reference

```
#include <QFile>
#include <QHash>
#include <QObject>
#include <QProcess>
#include "ckbsettings.h"
#include "keymap.h"
#include "keyaction.h"
```

Include dependency graph for kbbind.h:

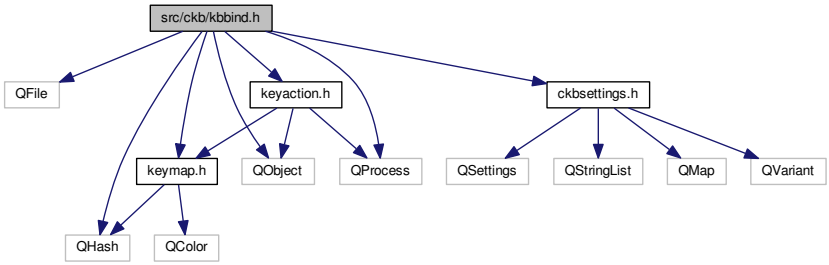

This graph shows which files directly or indirectly include this file:



Data Structures

- class KbBind

13.40 src/ckb/kbbindwidget.cpp File Reference

```
#include <QMessageBox>
#include "kbbindwidget.h"
#include "modeselectdialog.h"
#include "rebindwidget.h"
#include "ui_kbbindwidget.h"
```

Include dependency graph for kbbindwidget.cpp:

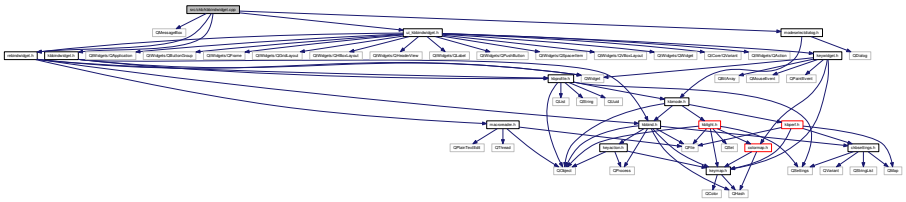

13.41 src/ckb/kbbindwidget.h File Reference

```
#include <QWidget>
#include "kbbind.h"
#include "kbprofile.h"
```

Include dependency graph for kbbindwidget.h:

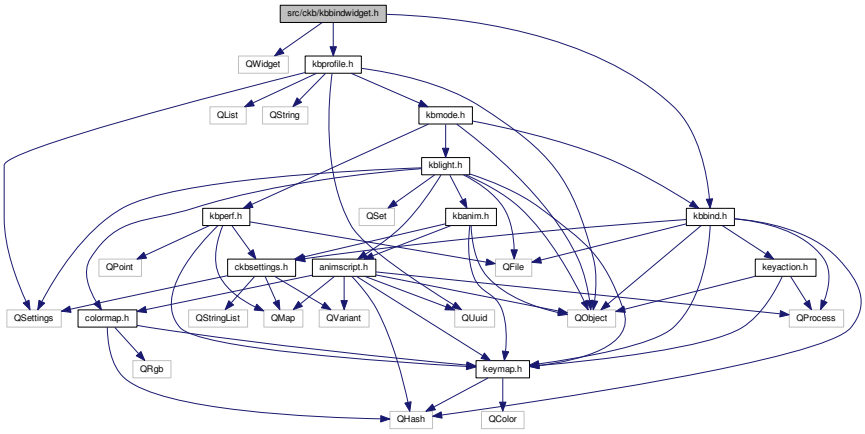

This graph shows which files directly or indirectly include this file:

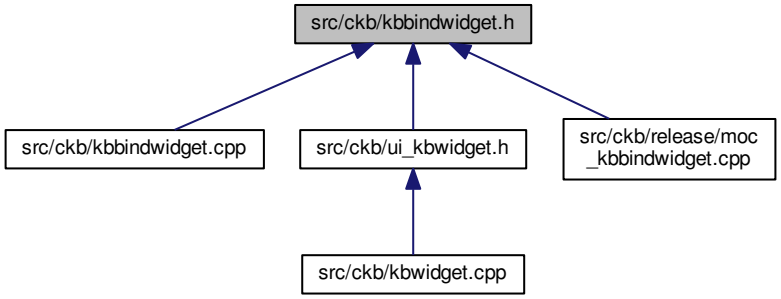

Data Structures

- class KbBindWidget

Namespaces

- Ui

13.42 src/ckb/kbfirmware.cpp File Reference

```
#include "kbfirmware.h"
#include "kbmanager.h"
#include "quazip/quazip.h"
#include "quazip/quazipfile.h"
#include <QDateTime>
#include <QDebug>
```

Include dependency graph for kbfirmware.cpp:

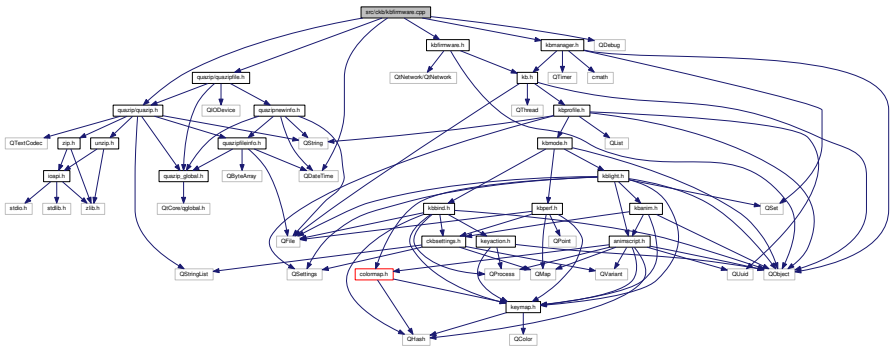

Functions

- static QString tableName (const QString &features)

Variables

- static const quint64 AUTO_CHECK_TIME = 60 ∗ 60 ∗ 1000

13.42.1 Function Documentation

13.42.1.1 static QString tableName (const QString & *features*) [static]

Definition at line 153 of file kbfirmware.cpp.

Referenced by KbFirmware::_fileForBoard(), and KbFirmware::_latestForBoard().

```
153                                                 {
154     QStringList components = features.split(" ");
155     if(components.length() < 2)
156         return "";
157     // First two components are vendor and model
158     QString vendorModel = components[0].toUpper() + "-" + components[1].toUpper();
159     // Add "RGB" on RGB boards
160     if(features.contains("rgb") && !features.contains("monochrome"))
161         vendorModel += "RGB";
162     return vendorModel;
163 }
```

Here is the caller graph for this function:



13.42.2 Variable Documentation

13.42.2.1 const quint64 AUTO_CHECK_TIME = 60 ∗ 60 ∗ 1000 [static]

Definition at line 9 of file kbfirmware.cpp.

Referenced by KbFirmware::_checkUpdates().

13.43 src/ckb/kbfirmware.h File Reference

```
#include "kb.h"
#include <QObject>
#include <QtNetwork/QtNetwork>
```

Include dependency graph for kbfirmware.h:

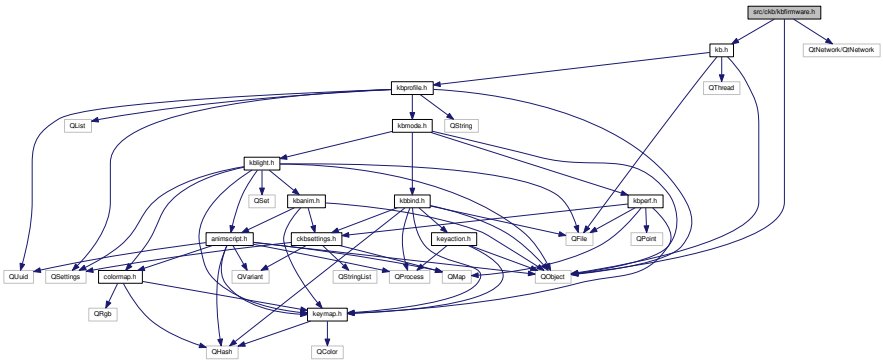

This graph shows which files directly or indirectly include this file:



Data Structures

- class KbFirmware
- struct KbFirmware::FW

13.44 src/ckb/kblight.cpp File Reference

```
#include <cmath>
#include <QDateTime>
#include <QSet>
#include "kblight.h"
#include "kbmode.h"
```

Include dependency graph for kblight.cpp:

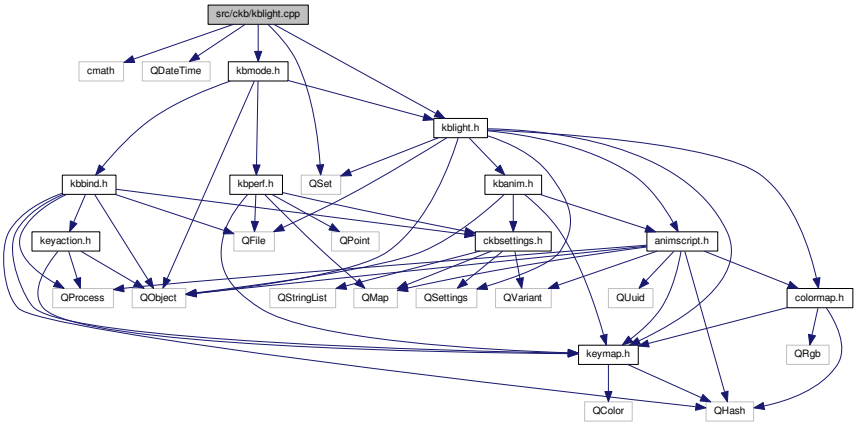

Functions

- static float sToL (float srgb)
- static float lToS (float linear)
- QRgb monoRgb (float r, float g, float b)

Variables

- static int _shareDimming = -1
- static QSet< KbLight * > activeLights

13.44.1 Function Documentation

13.44.1.1 static float lToS (float *linear*) [static]

Definition at line 277 of file kblight.cpp.

Referenced by KbLight::frameUpdate(), and monoRgb().

```
277                                {
278     if(linear <= 0.0031308f)
279         return 12.92f * linear * 255.f;
280     return (1.055f * pow(linear, 1.f / 2.4f) - 0.055f) * 255.f;
281 }
```

Here is the caller graph for this function:



13.44.1.2 QRgb monoRgb (float *r*, float *g*, float *b*)

Definition at line 284 of file kblight.cpp.

References lToS(), and sToL().

Referenced by KbLight::base(), KbLight::frameUpdate(), and KeyWidget::paintEvent().

```
284                                     {
285     // It's important to use a linear colorspace for this, otherwise the colors will appear inconsistent
286     // Note that although we could use linear space for alpha blending or the animation blending functions,
        we don't.
287     // The reason for this is that photo manipulation programs don't do it either, so even though the
        result would technically be more correct,
288     // it would look wrong to most people.
289     r = sToL(r);
290     g = sToL(g);
291     b = sToL(b);
292     int value = round(lToS((r + g + b) / 3.f));
293     return qRgb(value, value, value);
294 }
```

Here is the call graph for this function:

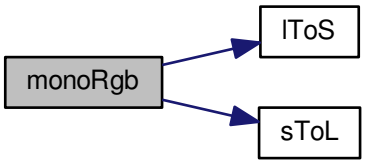

Here is the caller graph for this function:

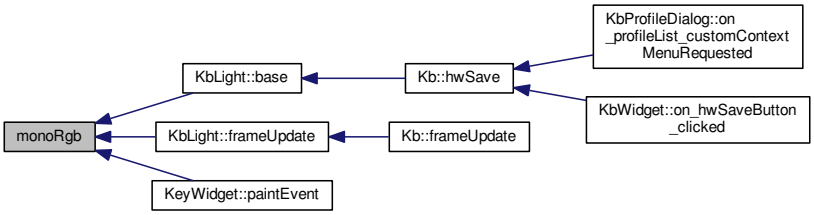

13.44.1.3 static float sToL (float *srgb*) [static]

Definition at line 270 of file kblight.cpp.

Referenced by KbLight::frameUpdate(), and monoRgb().

```
270                             {
271     srgb /= 255.f;
272     if(srgb <= 0.04045f)
273         return srgb / 12.92f;
274     return pow((srgb + 0.055f) / 1.055f, 2.4f);
275 }
```

Here is the caller graph for this function:



13.44.2 Variable Documentation

13.44.2.1 int _shareDimming = -1 [static]

Definition at line 7 of file kblight.cpp.

Referenced by KbLight::dimming(), KbLight::open(), and KbLight::shareDimming().

13.44.2.2 QSet<KbLight*> activeLights [static]

Definition at line 8 of file kblight.cpp.

Referenced by KbLight::close(), KbLight::open(), KbLight::shareDimming(), and KbLight::~KbLight().

13.45 src/ckb/kblight.h File Reference

```
#include <QFile>
#include <QObject>
#include <QSet>
#include <QSettings>
#include "animscript.h"
#include "kbanim.h"
#include "keymap.h"
#include "colormap.h"
```

Include dependency graph for kblight.h:

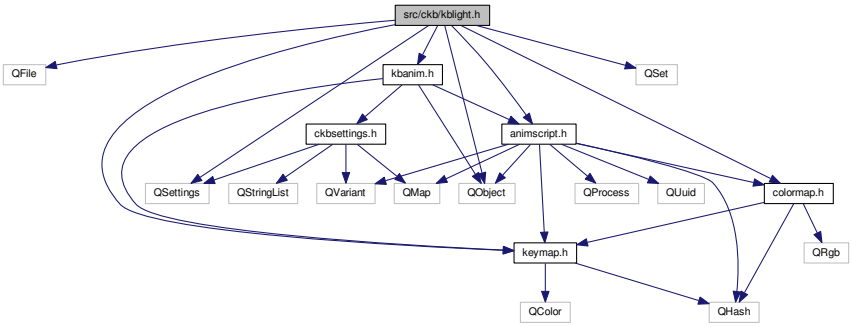

This graph shows which files directly or indirectly include this file:

Data Structures

- class KbLight

13.46 src/ckb/kblightwidget.cpp File Reference

```
#include "animadddialog.h"
#include "ckbsettings.h"
#include "kblightwidget.h"
#include "ui_kblightwidget.h"
```

Include dependency graph for kblightwidget.cpp:

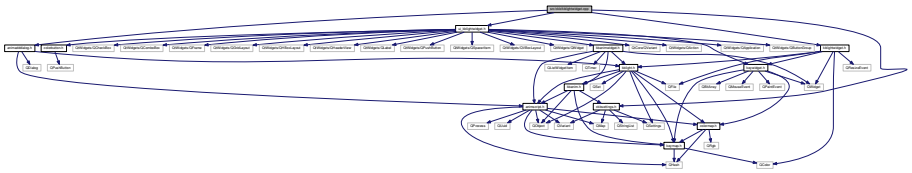

13.47 src/ckb/kblightwidget.h File Reference

```
#include <QWidget>
#include <QColor>
#include <QFile>
#include <QResizeEvent>
#include "kblight.h"
#include "keywidget.h"
```

Include dependency graph for kblightwidget.h:

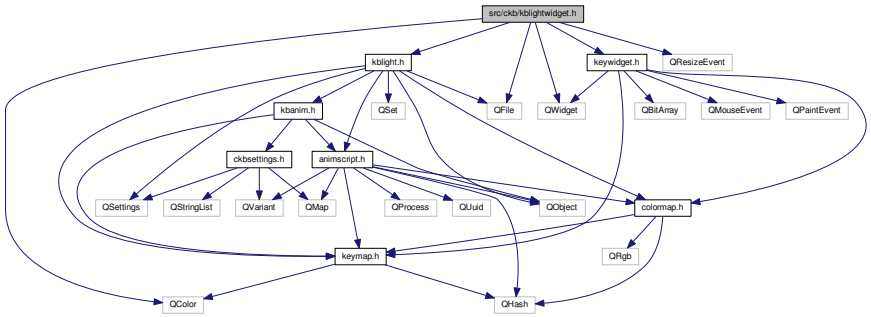

This graph shows which files directly or indirectly include this file:

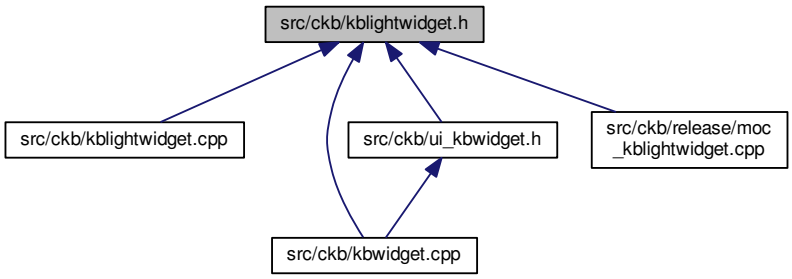

Data Structures

- class KbLightWidget

Namespaces

- Ui

13.48 src/ckb/kbmanager.cpp File Reference

```
#include "kbmanager.h"
```

Include dependency graph for kbmanager.cpp:

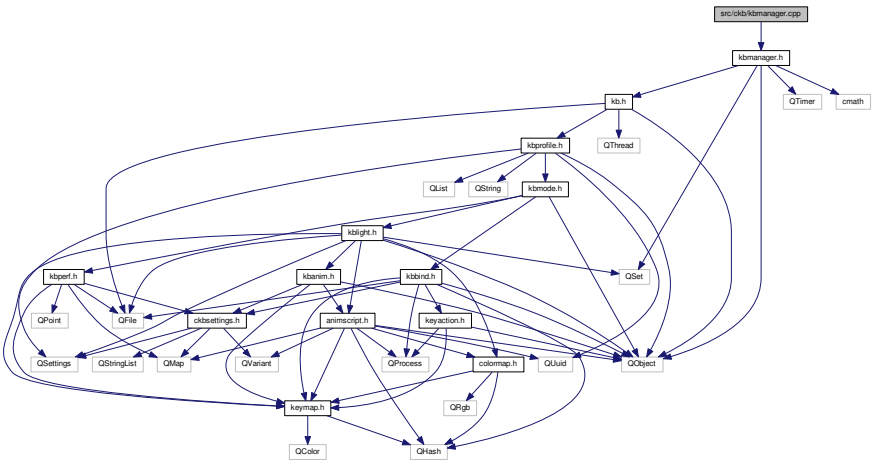

Variables

- QString devpath = "/dev/input/ckb%1"

13.48.1 Variable Documentation

13.48.1.1 QString devpath = "/dev/input/ckb%1"

Definition at line 4 of file kbmanager.cpp.

Referenced by KbManager::scanKeyboards().

13.49 src/ckb/kbmanager.h File Reference

```
#include <QObject>
#include <QTimer>
#include <cmath>
#include <QSet>
#include "kb.h"
```

Include dependency graph for kbmanager.h:

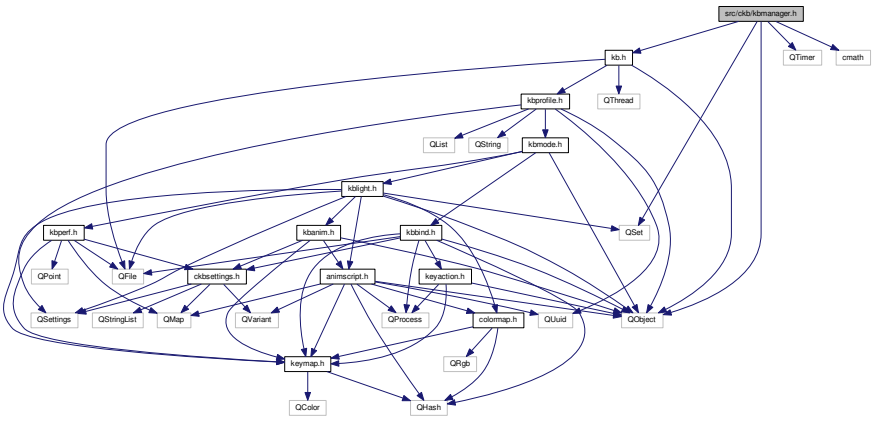

This graph shows which files directly or indirectly include this file:



Data Structures

- class KbManager

Macros

- #define DAEMON_UNAVAILABLE_STR "<unavailable>"

13.49.1 Macro Definition Documentation

13.49.1.1 #define DAEMON_UNAVAILABLE_STR "<unavailable>"

Definition at line 12 of file kbmanager.h.

Referenced by KbManager::ckbDaemonVersionF(), KbManager::scanKeyboards(), and MainWindow::updateVersion().

13.50 src/ckb/kbmode.cpp File Reference

```
#include "kbmode.h"
#include "kb.h"
```

Include dependency graph for kbmode.cpp:

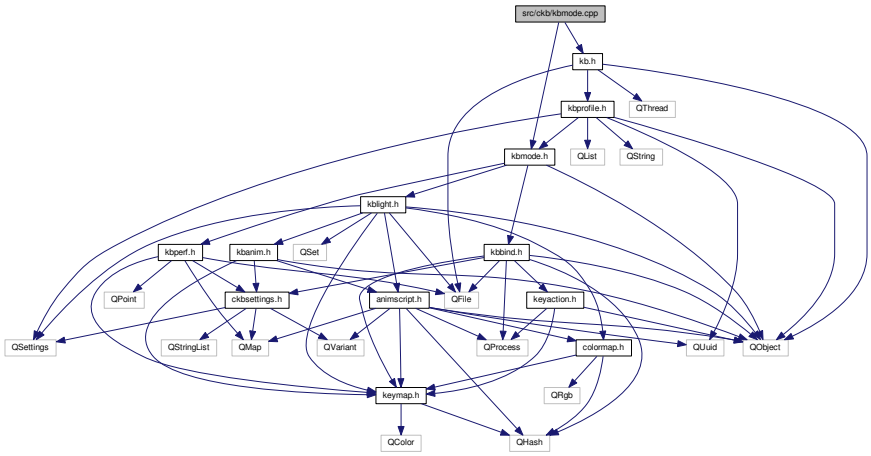

13.51 src/ckb/kbmode.h File Reference

```
#include <QObject>
#include "kblight.h"
#include "kbbind.h"
#include "kbperf.h"
```

Include dependency graph for kbmode.h:

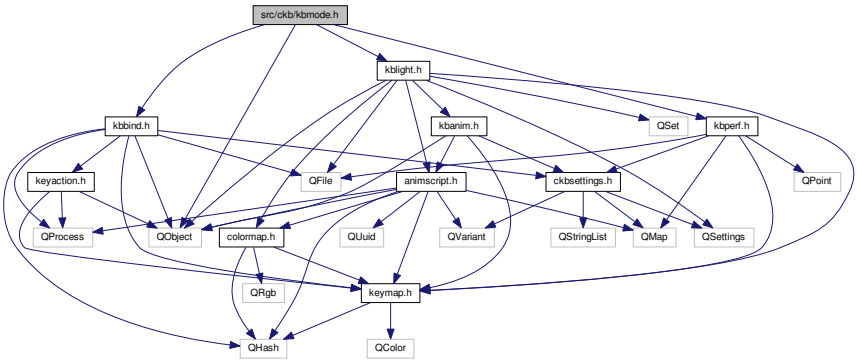

This graph shows which files directly or indirectly include this file:



Data Structures

- struct UsbId
- class KbMode

13.52 src/ckb/kbperf.cpp File Reference

```
#include "kbperf.h"
#include "kbmode.h"
#include "kb.h"
#include "media.h"
#include <cmath>
```

Include dependency graph for kbperf.cpp:

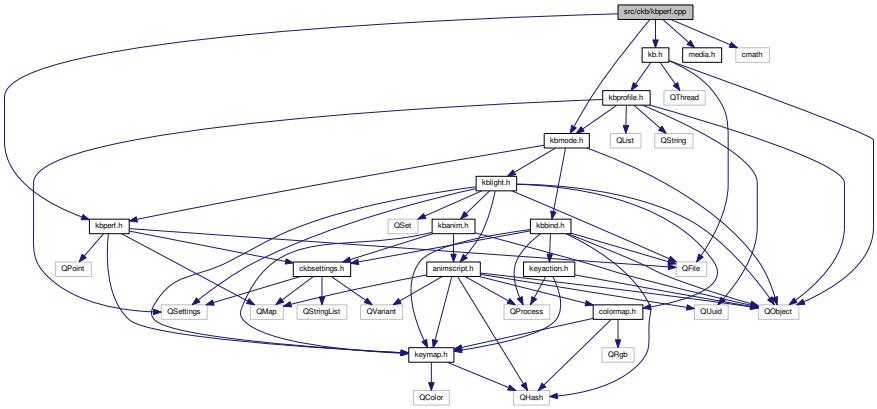

Macros

- #define map_last(map) ((map).last())

13.52.1 Macro Definition Documentation

13.52.1.1 #define map_last(*map*) ((map).last())

Definition at line 8 of file kbperf.cpp.

Referenced by KbPerf::popDpi().

13.53 src/ckb/kbperf.h File Reference

```
#include <QFile>
```

```
#include <QMap>
#include <QPoint>
#include "ckbsettings.h"
#include "keymap.h"
```

Include dependency graph for kbperf.h:

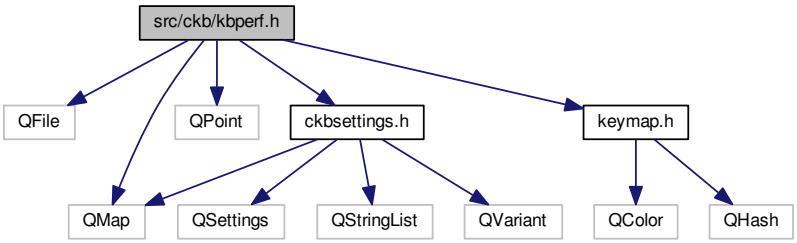

This graph shows which files directly or indirectly include this file:



Data Structures

- class KbPerf

13.54 src/ckb/kbprofile.cpp File Reference

```
#include "kbprofile.h"
#include "kb.h"
```

Include dependency graph for kbprofile.cpp:

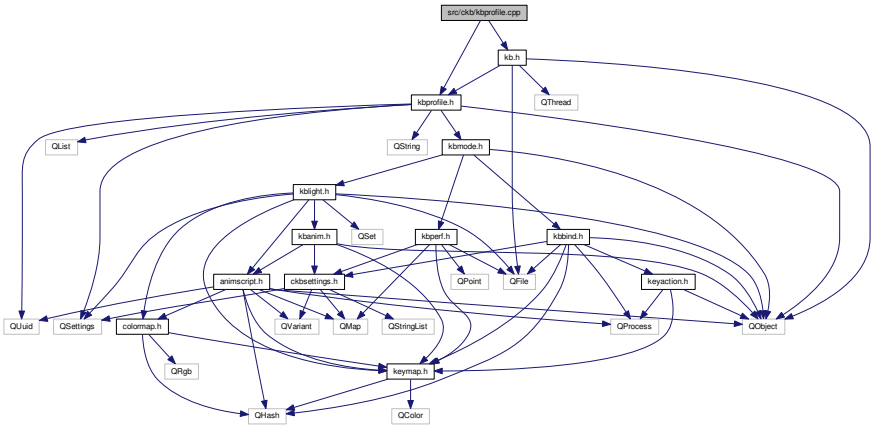

13.55 src/ckb/kbprofile.h File Reference

```
#include <QList>
#include <QObject>
#include <QSettings>
#include <QString>
#include <QUuid>
#include "kbmode.h"
```

Include dependency graph for kbprofile.h:

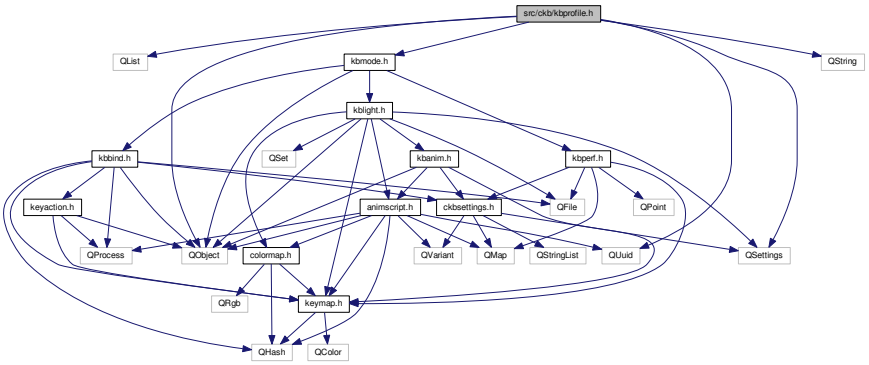

This graph shows which files directly or indirectly include this file:

Data Structures

- class KbProfile

13.56 src/ckb/kbprofiledialog.cpp File Reference

```
#include <QMenu>
#include "kbprofiledialog.h"
#include "ui_kbprofiledialog.h"
```

Include dependency graph for kbprofiledialog.cpp:

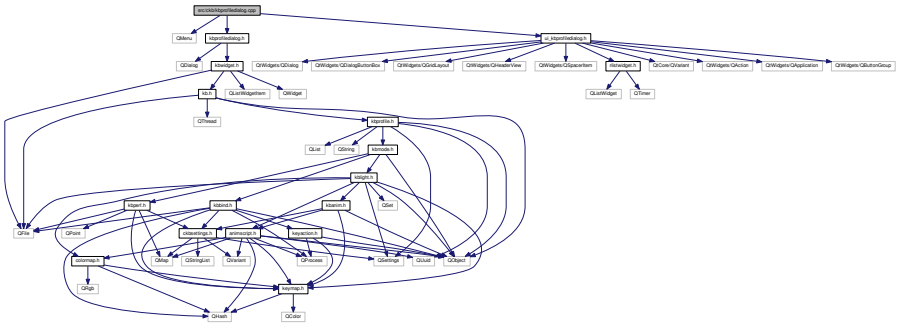

13.57 src/ckb/kbprofiledialog.h File Reference

```
#include <QDialog>
#include "kbwidget.h"
```

Include dependency graph for kbprofiledialog.h:

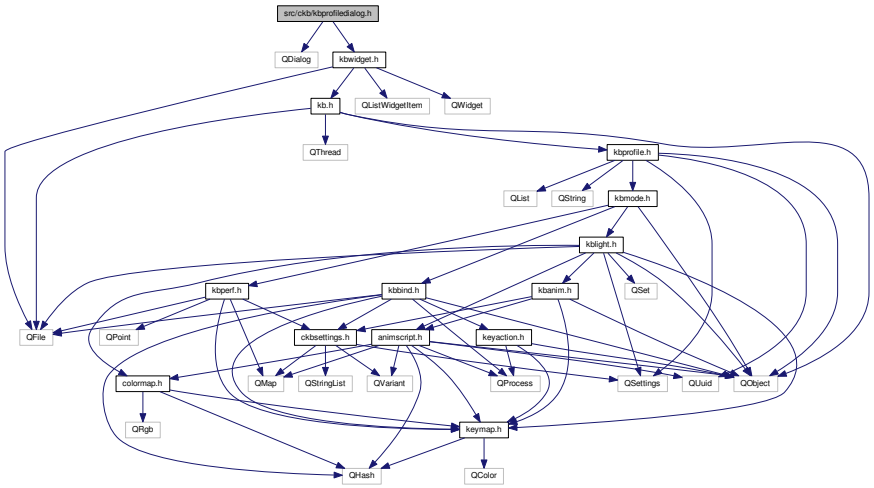

This graph shows which files directly or indirectly include this file:

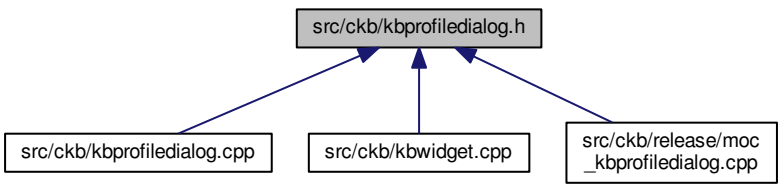

Data Structures

- class KbProfileDialog

Namespaces

- Ui

13.58 src/ckb/kbwidget.cpp File Reference

```
#include <cmath>
#include <QFileDialog>
#include <QMenu>
#include <QMessageBox>
#include <QUrl>
#include "ckbsettings.h"
#include "fwupgradedialog.h"
#include "kbfirmware.h"
#include "kbwidget.h"
#include "kblightwidget.h"
#include "kbprofiledialog.h"
#include "ui_kbwidget.h"
#include "ui_kblightwidget.h"
```

Include dependency graph for kbwidget.cpp:



13.59 src/ckb/kbwidget.h File Reference

```
#include <QFile>
#include <QListWidgetItem>
#include <QWidget>
#include "kb.h"
```

Include dependency graph for kbwidget.h:

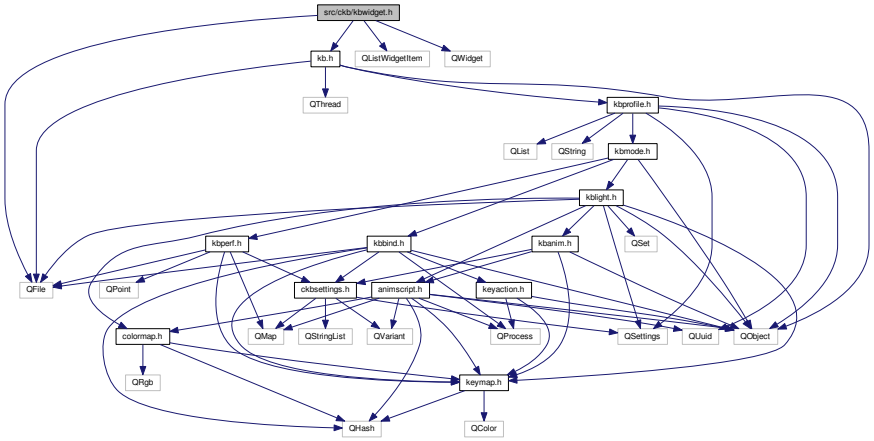

This graph shows which files directly or indirectly include this file:



Data Structures

- class KbWidget

Namespaces

- Ui

13.60 src/ckb/keyaction.cpp File Reference

```
#include <qdebug.h>
#include "keyaction.h"
#include "kb.h"
#include "kbanim.h"
#include "kbprofile.h"
#include <QDateTime>
#include <QUrl>
#include <cstring>
#include <cstdio>
```

Include dependency graph for keyaction.cpp:

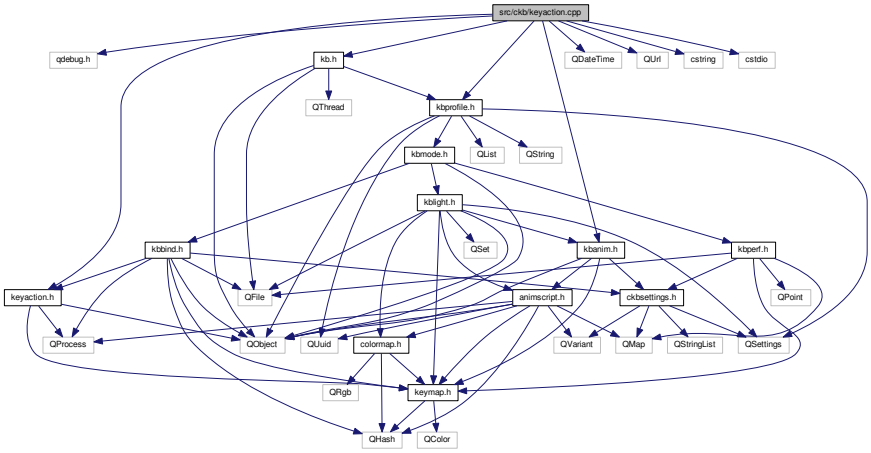

Variables

- static const int ANIM_ONCE = 0x1
- static const int ANIM_KRSTOP = 0x2

13.60.1 Variable Documentation

13.60.1.1 const int ANIM_KRSTOP = 0x2 [static]

Definition at line 173 of file keyaction.cpp.

Referenced by KeyAction::animAction(), and KeyAction::animInfo().

13.60.1.2 const int ANIM_ONCE = 0x1 [static]

Definition at line 173 of file keyaction.cpp.

Referenced by KeyAction::animAction(), and KeyAction::animInfo().

13.61 src/ckb/keyaction.h File Reference

```
#include <QObject>
#include <QProcess>
#include "keymap.h"
```

Include dependency graph for keyaction.h:

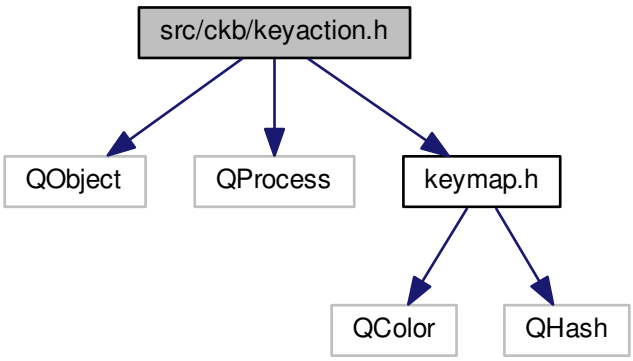

This graph shows which files directly or indirectly include this file:

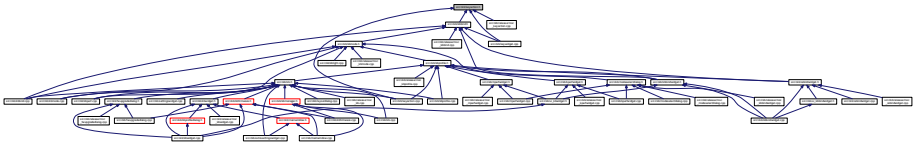

Data Structures

- class KeyAction

13.62 src/ckb/keymap.cpp File Reference

```
#include <clocale>
#include <QMap>
#include "keymap.h"
```

Include dependency graph for keymap.cpp:

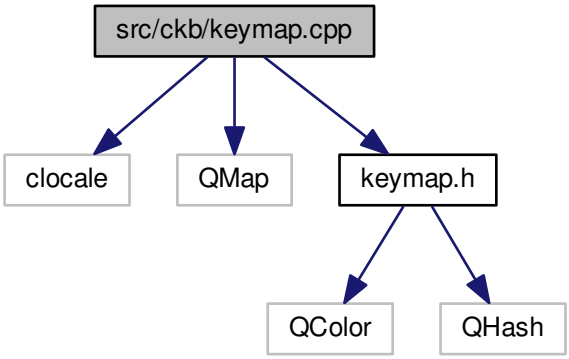

Data Structures

- struct KeyPatch

Macros

- #define NS 12, 12
- #define KEYCOUNT_K95 (sizeof(K95Keys) / sizeof(Key))
- #define ANSI_ENTER_X 199
- #define ANSI_ENTER_Y 51
- #define ANSI_ENTER_W 26
- #define ANSI_ENTER_H 12
- #define ANSI_LSHIFT_X 45
- #define ANSI_LSHIFT_W 26
- #define PATCH_COUNT(patch) (sizeof(patch) / sizeof(KeyPatch))
- #define patch(map, patches) _patch(map, patches, PATCH_COUNT(patches))
- #define K95_WIDTH 298
- #define K95_HEIGHT 76
- #define K70_X_START 38
- #define K70_WIDTH (K95_WIDTH - K70_X_START)
- #define K70_HEIGHT K95_HEIGHT
- #define K65_WIDTH 209
- #define K65_HEIGHT K70_HEIGHT
- #define K65_TOP_COUNT (sizeof(K65TopRow) / sizeof(Key))
- #define KSTRAFE_X_START 12
- #define KSTRAFE_WIDTH (K70_WIDTH + (KSTRAFE_X_START * 2))
- #define KSTRAFE_HEIGHT K95_HEIGHT
- #define KEYCOUNT_M65 (sizeof(M65Keys) / sizeof(Key))

- #define M65_WIDTH 52
- #define M65_HEIGHT 67
- #define KEYCOUNT_SABRE (sizeof(SabreKeys) / sizeof(Key))
- #define SABRE_WIDTH M65_WIDTH
- #define SABRE_HEIGHT M65_HEIGHT
- #define KEYCOUNT_SCIM (sizeof(ScimKeys) / sizeof(Key))
- #define SCIM_WIDTH M65_WIDTH
- #define SCIM_HEIGHT M65_HEIGHT
- #define N_MODELS KeyMap::_MODEL_MAX
- #define N_LAYOUTS KeyMap::_LAYOUT_MAX

Functions

- static void _patch (QHash< QString, Key > &map, const KeyPatch *patches, int patchCount)
- static void patchISO (QHash< QString, Key > &map)
- static void patchANSI (QHash< QString, Key > &map)
- static QHash< QString, Key > getMap (KeyMap::Model model, KeyMap::Layout layout)

Variables

- static const Key K95Keys []
- static const KeyPatch patchDK []
- static const KeyPatch patchEU []
- static const KeyPatch patchFR []
- static const KeyPatch patchDE []
- static const KeyPatch patchIT []
- static const KeyPatch patchNO []
- static const KeyPatch patchMX []
- static const KeyPatch patchES []
- static const KeyPatch patchSE []
- static const KeyPatch patchDvorak []
- static const Key K65TopRow []
- static const Key KStrafeKeys []
- static const Key M65Keys []
- static const Key SabreKeys []
- static const Key ScimKeys []
- static QHash< QString, Key > K95BaseMap
- static QHash< QString, Key > standardMaps [KeyMap::_MODEL_MAX][KeyMap::_LAYOUT_MAX]

13.62.1 Data Structure Documentation

13.62.1.1 struct KeyPatch

Definition at line 30 of file keymap.cpp.

Collaboration diagram for KeyPatch:

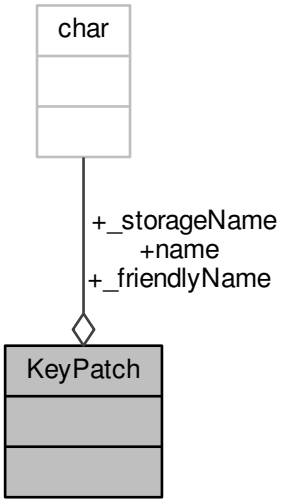

Data Fields

const char *	_friendlyName	
const char *	_storageName	
const char *	name	

13.62.2 Macro Definition Documentation

13.62.2.1 #define ANSI_ENTER_H 12

Definition at line 25 of file keymap.cpp.

Referenced by patchANSI().

13.62.2.2 #define ANSI_ENTER_W 26

Definition at line 24 of file keymap.cpp.

Referenced by patchANSI().

13.62.2.3 #define ANSI_ENTER_X 199

Definition at line 22 of file keymap.cpp.

Referenced by patchANSI().

13.62.2.4 #define ANSI_ENTER_Y 51

Definition at line 23 of file keymap.cpp.

Referenced by patchANSI().

13.62.2.5 #define ANSI_LSHIFT_W 26

Definition at line 27 of file keymap.cpp.

Referenced by patchANSI().

13.62.2.6 #define ANSI_LSHIFT_X 45

Definition at line 26 of file keymap.cpp.

Referenced by patchANSI().

13.62.2.7 #define K65_HEIGHT K70_HEIGHT

Definition at line 143 of file keymap.cpp.

13.62.2.8 #define K65_TOP_COUNT (sizeof(K65TopRow) / sizeof(Key))

Definition at line 148 of file keymap.cpp.

Referenced by getMap().

13.62.2.9 #define K65_WIDTH 209

Definition at line 142 of file keymap.cpp.

Referenced by getMap(), and KeyMap::modelWidth().

13.62.2.10 #define K70_HEIGHT K95_HEIGHT

Definition at line 139 of file keymap.cpp.

13.62.2.11 #define K70_WIDTH (K95_WIDTH - K70_X_START)

Definition at line 138 of file keymap.cpp.

Referenced by KeyMap::modelWidth().

13.62.2.12 #define K70_X_START 38

Definition at line 137 of file keymap.cpp.

Referenced by getMap().

13.62.2.13 #define K95_HEIGHT 76

Definition at line 134 of file keymap.cpp.

Referenced by KeyMap::modelHeight().

13.62.2.14 #define K95_WIDTH 298

Definition at line 133 of file keymap.cpp.

Referenced by KeyMap::modelWidth().

13.62.2.15 #define KEYCOUNT_K95 (sizeof(K95Keys) / sizeof(Key))

Definition at line 19 of file keymap.cpp.

Referenced by getMap().

13.62.2.16 #define KEYCOUNT_M65 (sizeof(M65Keys) / sizeof(Key))

Definition at line 170 of file keymap.cpp.

Referenced by getMap().

13.62.2.17 #define KEYCOUNT_SABRE (sizeof(SabreKeys) / sizeof(Key))

Definition at line 183 of file keymap.cpp.

Referenced by getMap().

13.62.2.18 #define KEYCOUNT_SCIM (sizeof(ScimKeys) / sizeof(Key))

Definition at line 200 of file keymap.cpp.

Referenced by getMap().

13.62.2.19 #define KSTRAFE_HEIGHT K95_HEIGHT

Definition at line 153 of file keymap.cpp.

13.62.2.20 #define KSTRAFE_WIDTH (K70_WIDTH + (KSTRAFE_X_START * 2))

Definition at line 152 of file keymap.cpp.

Referenced by KeyMap::modelWidth().

13.62.2.21 #define KSTRAFE_X_START 12

Definition at line 151 of file keymap.cpp.

Referenced by getMap().

13.62.2.22 #define M65_HEIGHT 67

Definition at line 173 of file keymap.cpp.

Referenced by KeyMap::modelHeight().

13.62.2.23 #define M65_WIDTH 52

Definition at line 172 of file keymap.cpp.

Referenced by KeyMap::modelWidth().

13.62.2.24 #define N_LAYOUTS KeyMap::_LAYOUT_MAX

Definition at line 207 of file keymap.cpp.

Referenced by getMap().

13.62.2.25 #define N_MODELS KeyMap::_MODEL_MAX

Definition at line 206 of file keymap.cpp.

Referenced by getMap().

13.62.2.26 #define NS 12, 12

Definition at line 6 of file keymap.cpp.

13.62.2.27 #define patch(*map, patches*) _patch(map, patches, PATCH_COUNT(patches))

Definition at line 106 of file keymap.cpp.

Referenced by getMap().

13.62.2.28 #define PATCH_COUNT(patch) (sizeof(patch) / sizeof(KeyPatch))

Definition at line 105 of file keymap.cpp.

13.62.2.29 #define SABRE_HEIGHT M65_HEIGHT

Definition at line 186 of file keymap.cpp.

13.62.2.30 #define SABRE_WIDTH M65_WIDTH

Definition at line 185 of file keymap.cpp.

13.62.2.31 #define SCIM_HEIGHT M65_HEIGHT

Definition at line 203 of file keymap.cpp.

13.62.2.32 #define SCIM_WIDTH M65_WIDTH

Definition at line 202 of file keymap.cpp.

13.62.3 Function Documentation

13.62.3.1 static void _patch (QHash< QString, Key > & *map,* const KeyPatch * *patches,* int *patchCount*) [static]

Definition at line 107 of file keymap.cpp.

References Key::_friendlyName, and Key::_storageName.

```
107                                                                                                 {
108     for(const KeyPatch* p = patches; p < patches + patchCount; p++){
109         Key& key = map[p->name];
110         key._storageName = p->_storageName;
```

```
111         key._friendlyName = p->_friendlyName;
112     }
113 }
```

13.62.3.2 static QHash<QString, Key> getMap (KeyMap::Model *model,* KeyMap::Layout *layout*) [static]

Definition at line 210 of file keymap.cpp.

References KeyMap::DE, KeyMap::DK, KeyMap::ES, KeyMap::EU, KeyMap::EU_DVORAK, KeyMap::FR, KeyMap::GB_DVORAK, Key::height, KeyMap::isISO(), KeyMap::IT, KeyMap::K65, K65_TOP_COUNT, K65_WIDTH, KeyMap::K70, K70_X_START, KeyMap::K95, K95BaseMap, KEYCOUNT_K95, KEYCOUNT_M65, KEYCOUNT_SABRE, KEYCOUNT_SCIM, KSTRAFE_X_START, KeyMap::M65, KeyMap::MX, N_LAYOUTS, N_MODELS, KeyMap::NO, patch, patchANSI(), patchISO(), KeyMap::SABRE, KeyMap::SCIMITAR, KeyMap::SE, standardMaps, KeyMap::STRAFE, KeyMap::US_DVORAK, Key::width, Key::x, and Key::y.

```
210                                                                     {
211     if(model < 0 || layout < 0 || model >= N_MODELS || layout >=
    N_LAYOUTS)
212         return QHash<QString, Key>();
213     // Return the map if it's already filled out
214     QHash<QString, Key>& map = standardMaps[model][layout];
215     if(!map.empty())
216         return map;
217     // Otherwise, create it
218     switch(model){
219     case KeyMap::K95:{
220         // The K95 maps serve as bases for all the other keyboards
221         // Fetch the master map, or create it if not yet done
222         if(K95BaseMap.empty()){
223             for(const Key* key = K95Keys; key < K95Keys +
    KEYCOUNT_K95; key++)
224                 K95BaseMap[key->name] = *key;
225         }
226         map = K95BaseMap;
227         // Patch the map for the layout
228         switch(layout){
229         case KeyMap::DK:
230             patch(map, patchDK);
231             break;
232         case KeyMap::EU_DVORAK:
233             patch(map, patchDvorak);    // fall through
234         case KeyMap::EU:
235             patch(map, patchEU);
236             break;
237         case KeyMap::GB_DVORAK:
238         case KeyMap::US_DVORAK:
239             patch(map, patchDvorak);
240             break;
241         case KeyMap::FR:
242             patch(map, patchFR);
243             break;
244         case KeyMap::DE:
245             patch(map, patchDE);
246             break;
247         case KeyMap::IT:
248             patch(map, patchIT);
249             break;
250         case KeyMap::NO:
251             patch(map, patchNO);
252             break;
253         case KeyMap::MX:
254             patch(map, patchMX);
255             break;
256         case KeyMap::ES:
257             patch(map, patchES);
258             break;
259         case KeyMap::SE:
260             patch(map, patchSE);
261             break;
262         default:;
263             // English QWERTY - no patch needed
264         }
265         if(KeyMap::isISO(layout))
266             patchISO(map);
267         else
268             patchANSI(map);
269         // Done! return the map
270         break;
271     }
```

```
272     case KeyMap::K70:{
273         // The K70 maps are based on the K95 maps. However all the keys are shifted left and the G keys are
     removed
274         map = getMap(KeyMap::K95, layout);
275         QMutableHashIterator<QString, Key> i(map);
276         while(i.hasNext()){
277             i.next();
278             // Move key to left. Remove it if it fell off the edge
279             if((i.value().x -= K70_X_START) < 0)
280                 i.remove();
281         }
282         // Remove the M buttons as well
283         map.remove("mr");
284         map.remove("m1");
285         map.remove("m2");
286         map.remove("m3");
287         // Done!
288         break;
289     }
290     case KeyMap::K65:{
291         // The K65 maps additionally remove the numpad and have a modified top row
292         map = getMap(KeyMap::K70, layout);
293         QMutableHashIterator<QString, Key> i(map);
294         while(i.hasNext()){
295             i.next();
296             if(i.value().x >= K65_WIDTH)
297                 i.remove();
298         }
299         for(const Key* key = K65TopRow; key < K65TopRow +
    K65_TOP_COUNT; key++)
300             map[key->name] = *key;
301         // Done!
302         break;
303     }
304     case KeyMap::STRAFE:{
305         // The Strafe RGB maps are based on the K70 map minus the media keys
306         map = getMap(KeyMap::K70, layout);
307         //move light and lock right
308         map["light"].x=285 - K70_X_START;
309         //map["light"].hasLed=false;
310         map["lock"].x=297 - K70_X_START;
311         //map["lock"].hasLed=false;
312         // move everything right to make the space for the left sidelight
313         QMutableHashIterator<QString, Key> i(map);
314         while(i.hasNext()){
315             i.next();
316             i.value().x += KSTRAFE_X_START;
317         }
318         // Add Strafe lights and keys
319         map["lsidel"] = KStrafeKeys[0];
320         map["rsidel"] = KStrafeKeys[1];
321         map["logo"] = KStrafeKeys[2];
322         map["fn"] = KStrafeKeys[3];
323         map.remove("rwin");
324         // remove media controls
325         map.remove("mute");
326         map.remove("volup");
327         map.remove("voldn");
328         map.remove("stop");
329         map.remove("prev");
330         map.remove("play");
331         map.remove("next");
332         // Done!
333         break;
334     }
335     case KeyMap::M65:{
336         // M65 isn't a keyboard; all mouse maps are unique.
337         for(const Key* key = M65Keys; key < M65Keys +
    KEYCOUNT_M65; key++){
338             // Keyboard keys are written from the center because that's where the LEDs are, but the mouse
     buttons are odd shapes so they're
339             // written from the upper left
340             Key translatedKey = *key;
341             translatedKey.x += translatedKey.width / 2;
342             translatedKey.y += translatedKey.height / 2;
343             map[key->name] = translatedKey;
344         }
345         // Mice also have no layout patches - no other changes necessary
346         break;
347     }
348     case KeyMap::SABRE:{
349         // Scimitar mouse
350         for(const Key* key = SabreKeys; key < SabreKeys +
    KEYCOUNT_SABRE; key++){
351             // Like the M65, the keys are upper-left justified
352             Key translatedKey = *key;
353             translatedKey.x += translatedKey.width / 2;
```

```
354             translatedKey.y += translatedKey.height / 2;
355             map[key->name] = translatedKey;
356         }
357         break;
358     }
359     case KeyMap::SCIMITAR:{
360         // Scimitar mouse
361         for(const Key* key = ScimKeys; key < ScimKeys +
    KEYCOUNT_SCIM; key++){
362             Key translatedKey = *key;
363             translatedKey.x += translatedKey.width / 2;
364             translatedKey.y += translatedKey.height / 2;
365             map[key->name] = translatedKey;
366         }
367         break;
368     }
369     default:;    // <- stop GCC from complaining
370     }
371     // Map is finished, return result
372     return map;
373 }
```

Here is the call graph for this function:

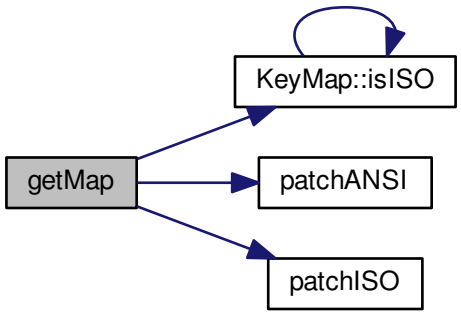

13.62.3.3 static void patchANSI (QHash< QString, Key > & *map*) [static]

Definition at line 119 of file keymap.cpp.

References ANSI_ENTER_H, ANSI_ENTER_W, ANSI_ENTER_X, ANSI_ENTER_Y, ANSI_LSHIFT_W, ANSI_LSHIFT_X, Key::height, Key::width, Key::x, and Key::y.

Referenced by getMap().

```
119                                                 {
120     map.remove("bslash_iso");
121     map.remove("hash");
122     Key& enter = map["enter"];
123     enter.x = ANSI_ENTER_X;
124     enter.y = ANSI_ENTER_Y;
125     enter.width = ANSI_ENTER_W;
126     enter.height = ANSI_ENTER_H;
127     Key& lshift = map["lshift"];
128     lshift.x = ANSI_LSHIFT_X;
129     lshift.width = ANSI_LSHIFT_W;
130 }
```

Here is the caller graph for this function:



13.62.3.4 static void patchISO (QHash< QString, Key > & *map*) [static]

Definition at line 116 of file keymap.cpp.

Referenced by getMap().

```
116                                             {
117     map.remove("bslash");
118 }
```

Here is the caller graph for this function:

13.62.4 Variable Documentation

13.62.4.1 const Key K65TopRow[] [static]

Initial value:

```
= {
    {0, "Brightness", "light", 164 -  38 , 0, 12, 12, true, true}, {0, "Mute", "mute", 176 -  38 , 0, 12,
      12, true, true}, {0, "Volume Down", "voldn", 192 -  38 , 0, 14, 8, true, true}, {0, "Volume Up", "volup", 205
       -  38 , 0, 14, 8, true, true}, {0, "Windows Lock", "lock", 222 -  38 , 0, 12, 12, true, true}
}
```

Definition at line 145 of file keymap.cpp.

13.62.4.2 QHash<QString, Key> K95BaseMap [static]

Definition at line 208 of file keymap.cpp.

Referenced by getMap().

13.62.4.3 const Key K95Keys[] [static]

Initial value:

```
= {
    {0, 0, "mr", 38, 0,  12, 12 , true, true}, {0, 0, "m1", 50, 0,  12, 12 , true, true}, {0, 0, "m2", 62,
      0,  12, 12 , true, true}, {0, 0, "m3", 74, 0,  12, 12 , true, true}, {0, "Brightness", "light", 222, 0,  12,
       12 , true, true}, {0, "Windows Lock", "lock", 234, 0,  12, 12 , true, true}, {0, "Mute", "mute", 273, 0, 13
      , 8, true, true}, {0, "Volume Up", "volup", 290, -2, 18, 6, false, true}, {0, "Volume down", "voldn", 290, 2
      , 18, 6, false, true},
    {0, 0, "g1", 0, 14,  12, 12 , true, true}, {0, 0, "g2", 11, 14,  12, 12 , true, true}, {0, 0, "g3", 22,
       14,  12, 12 , true, true}, {0, "Esc", "esc", 38, 14,  12, 12 , true, true}, {0, 0, "f1", 58, 14,  12, 12 ,
      true, true}, {0, 0, "f2", 70, 14,  12, 12 , true, true}, {0, 0, "f3", 82, 14,  12, 12 , true, true}, {0, 0,
      "f4", 94, 14,  12, 12 , true, true}, {0, 0, "f5", 114, 14,  12, 12 , true, true}, {0, 0, "f6", 126, 14,  12,
       12 , true, true}, {0, 0, "f7", 138, 14,  12, 12 , true, true}, {0, 0, "f8", 150, 14,  12, 12 , true, true},
       {0, 0, "f9", 170, 14,  12, 12 , true, true}, {0, 0, "f10", 182, 14,  12, 12 , true, true}, {0, 0, "f11",
      194, 14,  12, 12 , true, true}, {0, 0, "f12", 206, 14,  12, 12 , true, true}, {0, "Print Screen\nSysRq", "
      prtscn", 222, 14,  12, 12 , true, true}, {0, "Scroll Lock", "scroll", 234, 14,  12, 12 , true, true}, {0, "Pause
      \nBreak", "pause", 246, 14,  12, 12 , true, true}, {0, "Stop", "stop", 262, 14, 12, 8, true, true}, {0, "
      Previous", "prev", 273, 14, 13, 8, true, true}, {0, "Play/Pause", "play", 285, 14, 13, 8, true, true}, {0, "
      Next", "next", 296, 14, 12, 8, true, true},
    {0, 0, "g4", 0, 25,  12, 12 , true, true}, {0, 0, "g5", 11, 25,  12, 12 , true, true}, {0, 0, "g6", 22,
       25,  12, 12 , true, true}, {0, "`", "grave", 38, 27,  12, 12 , true, true}, {0, 0, "1", 50, 27,  12, 12 ,
      true, true}, {0, 0, "2", 62, 27,  12, 12 , true, true}, {0, 0, "3", 74, 27,  12, 12 , true, true}, {0, 0, "4"
      , 86, 27,  12, 12 , true, true}, {0, 0, "5", 98, 27,  12, 12 , true, true}, {0, 0, "6", 110, 27,  12, 12 ,
      true, true}, {0, 0, "7", 122, 27,  12, 12 , true, true}, {0, 0, "8", 134, 27,  12, 12 , true, true}, {0, 0, "
      9", 146, 27,  12, 12 , true, true}, {0, 0, "0", 158, 27,  12, 12 , true, true}, {0, "-", "minus", 170, 27,
      12, 12 , true, true}, {0, "=", "equal", 182, 27,  12, 12 , true, true}, {0, "Backspace", "bspace", 200, 27,
      24, 12, true, true}, {0, "Insert", "ins", 222, 27,  12, 12 , true, true}, {0, "Home", "home", 234, 27,  12,
      12 , true, true}, {0, "Page Up", "pgup", 246, 27,  12, 12 , true, true}, {0, "Num Lock", "numlock", 261, 27,
        12, 12 , true, true}, {0, "NumPad /", "numslash", 273, 27,  12, 12 , true, true}, {0, "NumPad *", "numstar
      ", 285, 27,  12, 12 , true, true}, {0, "NumPad -", "numminus", 297, 27,  12, 12 , true, true},
    {0, 0, "g7", 0, 39,  12, 12 , true, true}, {0, 0, "g8", 11, 39,  12, 12 , true, true}, {0, 0, "g9", 22,
       39,  12, 12 , true, true}, {0, "Tab", "tab", 41, 39, 18, 12, true, true}, {0, 0, "q", 56, 39,  12, 12 ,
      true, true}, {0, 0, "w", 68, 39,  12, 12 , true, true}, {0, 0, "e", 80, 39,  12, 12 , true, true}, {0, 0, "r",
      92, 39,  12, 12 , true, true}, {0, 0, "t", 104, 39,  12, 12 , true, true}, {0, 0, "y", 116, 39,  12, 12 ,
      true, true}, {0, 0, "u", 128, 39,  12, 12 , true, true}, {0, 0, "i", 140, 39,  12, 12 , true, true}, {0, 0, "o
      ", 152, 39,  12, 12 , true, true}, {0, 0, "p", 164, 39,  12, 12 , true, true}, {0, "[", "lbrace", 176, 39,
      12, 12 , true, true}, {0, "]", "rbrace", 188, 39,  12, 12 , true, true}, {0, "\\", "bslash", 203, 39, 18, 12
      , true, true}, {0, "Enter", "enter", 203, 39, 18, 24, true, true}, {0, "Delete", "del", 222, 39,  12, 12 ,
      true, true}, {0, "End", "end", 234, 39,  12, 12 , true, true}, {0, "Page Down", "pgdn", 246, 39,  12, 12 ,
      true, true}, {0, "NumPad 7", "num7", 261, 39,  12, 12 , true, true}, {0, "NumPad 8", "num8", 273, 39,  12, 12
      , true, true}, {0, "NumPad 9", "num9", 285, 39,  12, 12 , true, true}, {0, "NumPad +", "numplus", 297, 45,
      12, 24, true, true},
    {0, 0, "g10", 0, 50,  12, 12 , true, true}, {0, 0, "g11", 11, 50,  12, 12 , true, true}, {0, 0, "g12",
      22, 50,  12, 12 , true, true}, {0, "Caps Lock", "caps", 42, 51, 20, 12, true, true}, {0, 0, "a", 59, 51,  12
      , 12 , true, true}, {0, 0, "s", 71, 51,  12, 12 , true, true}, {0, 0, "d", 83, 51,  12, 12 , true, true}, {0
      , 0, "f", 95, 51,  12, 12 , true, true}, {0, 0, "g", 107, 51,  12, 12 , true, true}, {0, 0, "h", 119, 51,
      12, 12 , true, true}, {0, 0, "j", 131, 51,  12, 12 , true, true}, {0, 0, "k", 143, 51,  12, 12 , true, true},
       {0, 0, "l", 155, 51,  12, 12 , true, true}, {0, ";", "colon", 167, 51,  12, 12 , true, true}, {0, "'", "
      quote", 179, 51,  12, 12 , true, true}, {0, "#", "hash", 191, 51,  12, 12 , true, true}, {0, "NumPad 4", "num4"
      , 261, 51,  12, 12 , true, true}, {0, "NumPad 5", "num5", 273, 51,  12, 12 , true, true}, {0, "NumPad 6", "
      num6", 285, 51,  12, 12 , true, true},
    {0, 0, "g13", 0, 64,  12, 12 , true, true}, {0, 0, "g14", 11, 64,  12, 12 , true, true}, {0, 0, "g15",
      22, 64,  12, 12 , true, true}, {0, "Left Shift", "lshift", 39, 63, 14, 12, true, true}, {"bslash", "\\", "
      bslash_iso", 53, 63,  12, 12 , true, true}, {0, 0, "z", 65, 63,  12, 12 , true, true}, {0, 0, "x", 77, 63,  12
      , 12 , true, true}, {0, 0, "c", 89, 63,  12, 12 , true, true}, {0, 0, "v", 101, 63,  12, 12 , true, true}, {
      0, 0, "b", 113, 63,  12, 12 , true, true}, {0, 0, "n", 125, 63,  12, 12 , true, true}, {0, 0, "m", 137, 63,
       12, 12 , true, true}, {0, ",", "comma", 149, 63,  12, 12 , true, true}, {0, ".", "dot", 161, 63,  12, 12 ,
      true, true}, {0, "/", "slash", 173, 63,  12, 12 , true, true}, {0, "Right Shift", "rshift", 196, 63, 32, 12,
       true, true}, {0, "Up", "up", 234, 63,  12, 12 , true, true}, {0, "NumPad 1", "num1", 261, 63,  12, 12 ,
      true, true}, {0, "NumPad 2", "num2", 273, 63,  12, 12 , true, true}, {0, "NumPad 3", "num3", 285, 63,  12, 12 ,
       true, true}, {0, "NumPad Enter", "numenter", 297, 69, 12, 24, true, true},
    {0, 0, "g16", 0, 75,  12, 12 , true, true}, {0, 0, "g17", 11, 75,  12, 12 , true, true}, {0, 0, "g18",
      22, 75,  12, 12 , true, true}, {0, "Left Ctrl", "lctrl", 40, 75, 16, 12, true, true}, {0, "Left Windows", "
      lwin", 54, 75,  12, 12 , true, true}, {0, "Left Alt", "lalt", 67, 75, 14, 12, true, true}, {0, "Space", "
      space", 116, 75, 84, 12, true, true}, {0, "Right Alt", "ralt", 165, 75, 14, 12, true, true}, {0, "Right Windows"
      , "rwin", 178, 75,  12, 12 , true, true}, {0, "Menu", "rmenu", 190, 75,  12, 12 , true, true}, {0, "Right
       Ctrl", "rctrl", 204, 75, 16, 12, true, true}, {0, "Left", "left", 222, 75,  12, 12 , true, true}, {0, "Down",
      "down", 234, 75,  12, 12 , true, true}, {0, "Right", "right", 246, 75,  12, 12 , true, true}, {0, "NumPad 0"
      , "num0", 267, 75, 24, 12, true, true}, {0, "NumPad .", "numdot", 285, 75,  12, 12 , true, true}
}
```

Definition at line 10 of file keymap.cpp.

13.62.4.4 const Key KStrafeKeys[] [static]

Initial value:

```
= {
```

```
    {0, "Sidelight", "lsidel", 0,   76  /2,  12 ,   76  , true, false},
    {0, "Sidelight", "rsidel",  ( ( 298  -  38 )  + ( 12  * 2)) ,   76  /2,  12 ,   76  , true, false},
    {0, "Logo", "logo",  12 , 0,  12, 12 , true, false},
    {0, "Function", "fn", 152, 75,  12, 12 , true, true}
}
```

Definition at line 155 of file keymap.cpp.

13.62.4.5 const Key M65Keys[] [static]

Initial value:

```
= {
    {0, "Left Mouse", "mouse1", 8, 0, 14, 32, false, true}, {0, "Right Mouse", "mouse2", 30, 0, 14, 32,
      false, true}, {0, "Middle Mouse", "mouse3", 22, 8, 8, 7, false, true},
    {0, "Wheel Up", "wheelup", 22, 4, 8, 5, false, true}, {0, "Wheel Down", "wheeldn", 22, 14, 8, 5, false,
       true}, {0, "Wheel Light", "front", 22, 15, 8, 8, true, false},
    {0, "DPI Up", "dpiup", 22, 19, 8, 6, false, true}, {0, "DPI Light", "dpi", 22, 24, 8, 8, true, false},
      {0, "DPI Down", "dpidn", 22, 31, 8, 6, false, true},
    {0, "Forward", "mouse5", 5, 24, 5, 9, false, true}, {0, "Back", "mouse4", 5, 33, 5, 10, false, true}, {
      0, "Sniper", "sniper", 0, 25, 5, 15, false, true},
    {0, "Logo", "back", 14, 55, 24, 12, true, false}
}
```

Definition at line 163 of file keymap.cpp.

13.62.4.6 const KeyPatch patchDE[] [static]

Initial value:

```
= {
    {"caret", "^", "grave"}, {"ss", "ß", "minus"}, {"grave", "´", "equal"},
    {"z", "Z", "y"}, {"ue", "Ü", "lbrace"}, {"plus", "+", "rbrace"},
    {"oe", "Ö", "colon"}, {"ae", "Ä", "quote"},
    {"angle", "<", "bslash_iso"}, {"y", "Y", "z"}, {"minus", "-", "slash"}
}
```

Definition at line 55 of file keymap.cpp.

13.62.4.7 const KeyPatch patchDK[] [static]

Initial value:

```
= {
    {0, "§", "grave"}, {0, "+", "minus"}, {0, "´", "equal"},
    {0, "Å", "lbrace"}, {0, "¨", "rbrace"},
    {0, "Æ", "colon"}, {0, "Ø", "quote"}, {0, "’", "hash"},
    {0, "<", "bslash_iso"}, {0, "-", "slash"},
}
```

Definition at line 36 of file keymap.cpp.

13.62.4.8 const KeyPatch patchDvorak[] [static]

Initial value:

```
= {
    {0, "[", "minus"}, {0, "]", "equal"},
    {0, "'", "q"}, {0, ",", "w"}, {0, ".", "e"}, {0, "P", "r"}, {0, "Y", "t"}, {0, "F", "y"}, {0, "G", "u"}
      , {0, "C", "i"}, {0, "R", "o"}, {0, "L", "p"}, {0, "/", "lbrace"}, {0, "=", "rbrace"},
    {0, "O", "s"}, {0, "E", "d"}, {0, "U", "f"}, {0, "I", "g"}, {0, "D", "h"}, {0, "H", "j"}, {0, "T", "k"}
      , {0, "N", "l"}, {0, "S", "colon"}, {0, "-", "quote"},
    {0, ";", "z"}, {0, "Q", "x"}, {0, "J", "c"}, {0, "K", "v"}, {0, "X", "b"}, {0, "B", "n"}, {0, "W", "
      comma"}, {0, "V", "dot"}, {0, "Z", "slash"},
}
```

Definition at line 97 of file keymap.cpp.

13.62.4.9 const KeyPatch patchES[] [static]

Initial value:

```
= {
    {"oa", "°", "grave"}, {"quote", "´", "minus"}, {"lexclam", "¡", "equal"},
    {"grave", "`", "lbrace"}, {"plus", "+", "rbrace"},
    {"nn", "Ñ", "colon"}, {"accent", "¨", "quote"}, {"cc", "Ç", "hash"},
    {"angle", "<", "bslash_iso"}, {"minus", "-", "slash"},
}
```

Definition at line 83 of file keymap.cpp.

13.62.4.10 const KeyPatch patchEU[] [static]

Initial value:

```
= {
    {0, "\\ (R)", "hash"},
    {0, "\\ (L)", "bslash_iso"}
}
```

Definition at line 43 of file keymap.cpp.

13.62.4.11 const KeyPatch patchFR[] [static]

Initial value:

```
= {
    {"sup2", "²", "grave"}, {0, "&", "1"}, {0, "É", "2"}, {0, "\"", "3"}, {0, "´", "4"}, {0, "(", "5"}, {0,
      "-", "6"}, {0, "È", "7"}, {0, "_", "8"}, {0, "Ç", "9"}, {0, "À", "0"}, {"rparen", ")", "minus"},
    {"a", "A", "q"}, {"z", "Z", "w"}, {"caret", "^", "lbrace"}, {"dollar", "$", "rbrace"},
    {"q", "Q", "a"}, {"m", "M", "colon"}, {"percent", "Ù", "quote"}, {"star", "*", "hash"},
    {"angle", "<", "bslash_iso"}, {"w", "W", "z"}, {"comma", ",", "m"}, {"semicolon", ";", "comma"}, {"
      colon", ":", "dot"}, {"exclam", "!", "slash"},
}
```

Definition at line 48 of file keymap.cpp.

13.62.4.12 const KeyPatch patchIT[] [static]

Initial value:

```
= {
    {0, "\\", "grave"}, {0, "´", "minus"}, {0, "ì", "equal"},
    {0, "è", "lbrace"}, {0, "+", "rbrace"},
    {0, "ò", "colon"}, {0, "à", "quote"}, {0, "ù", "hash"},
    {0, "<", "bslash_iso"}, {0, "-", "slash"},
}
```

Definition at line 62 of file keymap.cpp.

13.62.4.13 const KeyPatch patchMX[] [static]

Initial value:

```
= {
    {0, "|", "grave"}, {0, "´", "minus"}, {0, "¿", "equal"},
    {0, "¨", "lbrace"}, {0, "+", "rbrace"},
    {0, "Ñ", "colon"}, {0, "{", "quote"}, {0, "}", "hash"},
    {0, "<", "bslash_iso"}, {0, "-", "slash"},
}
```

Definition at line 76 of file keymap.cpp.

13.62.4.14 const KeyPatch patchNO[] [static]

Initial value:

```
= {
    {0, "§", "grave"}, {0, "+", "minus"}, {0, "´", "equal"},
    {0, "Å", "lbrace"}, {0, "¨", "rbrace"},
    {0, "Ø", "colon"}, {0, "Æ", "quote"}, {0, "’", "hash"},
    {0, "<", "bslash_iso"}, {0, "-", "slash"},
}
```

Definition at line 69 of file keymap.cpp.

13.62.4.15 const KeyPatch patchSE[] [static]

Initial value:

```
= {
    {"section", "§", "grave"}, {"plus", "+", "minus"}, {"grave", "´", "equal"},
    {"aa", "Å", "lbrace"}, {"umlaut", "¨", "rbrace"},
    {"oe", "Ö", "colon"}, {"ae", "Ä", "quote"}, {"quote", "’", "hash"},
    {"angle", "<", "bslash_iso"}, {"minus", "-", "slash"},
}
```

Definition at line 90 of file keymap.cpp.

13.62.4.16 const Key SabreKeys[] [static]

Initial value:

```
= {
    {0, "Left Mouse", "mouse1", 8, 0, 14, 32, false, true}, {0, "Right Mouse", "mouse2", 30, 0, 14, 32,
      false, true}, {0, "Middle Mouse", "mouse3", 22, 9, 8, 7, false, true}, {0, "Front light", "front", 8, -2, 14, 8
      , true, false },
    {0, "Wheel Up", "wheelup", 22, 5, 8, 5, false, true}, {0, "Wheel Down", "wheeldn", 22, 15, 8, 5, false,
       true}, {0, "Wheel Light", "wheel", 22, 5, 8, 15, true, false}, {0, "Extra button", "thumb1", 22, 20, 8, 18,
       false, true},
    {0, "DPI Up", "dpiup", 5, 3, 5, 7, false, true}, {0, "DPI Down", "dpidn", 5, 10, 5, 7, false, true}, {0
      , "DPI Light", "dpi", 5, 4, 5, 12, true, false},
    {0, "Forward", "mouse5", 5, 24, 5, 9, false, true}, {0, "Back", "mouse4", 5, 33, 5, 10, false, true},
    {0, "Logo", "back", 14, 50, 24, 12, true, false}
}
```

Definition at line 176 of file keymap.cpp.

13.62.4.17 const Key ScimKeys[] [static]

Initial value:

```
= {
    {0, "Left Mouse", "mouse1", 8, 0, 14, 32, false, true}, {0, "Right Mouse", "mouse2", 30, 0, 12, 32,
      false, true}, {0, "Middle Mouse", "mouse3", 22, 9, 8, 6, false, true}, {0, "Front light", "front", 30, 0, 12, 8
      , true, false },
    {0, "Wheel Up", "wheelup", 22, 3, 8, 6, false, true}, {0, "Wheel Down", "wheeldn", 22, 14, 8, 6, false,
       true}, {0, "Wheel Light", "wheel", 22, 3, 8, 17, true, false},
    {0, "DPI Up", "dpiup", 22, 19, 8, 9, false, true}, {0, "DPI Light", "dpi", 1, 12, 8, 4, true, false}, {
      0, "DPI Down", "dpidn", 22, 28, 8, 9, false, true},
    {0, "Thumb light", "thumb", 0, 21, 10, 24, true, false},
    {0, "1", "thumb1", -13, 18, 7, 7, false, true}, {0, "2", "thumb2", -6, 18, 7, 7, false, true}, {0, "3",
       "thumb3", 1, 18, 7, 7, false, true},
    {0, "4", "thumb4", -13, 25, 7, 7, false, true}, {0, "5", "thumb5", -6, 25, 7, 7, false, true}, {0, "6",
       "thumb6", 1, 25, 7, 7, false, true},
    {0, "7", "thumb7", -13, 32, 7, 7, false, true}, {0, "8", "thumb8", -6, 32, 7, 7, false, true}, {0, "9",
       "thumb9", 1, 32, 7, 7, false, true},
    {0, "10", "thumb10", -13, 39, 7, 7, false, true}, {0, "11", "thumb11", -6, 39, 7, 7, false, true}, {0,
      "12", "thumb12", 1, 39, 7, 7, false, true},
    {0, "Logo", "back", 14, 50, 24, 16, true, false}
}
```

Definition at line 189 of file keymap.cpp.

13.62.4.18 QHash<QString, Key> standardMaps[KeyMap::_MODEL_MAX][KeyMap::_LAYOUT_MAX] [static]

Definition at line 209 of file keymap.cpp.

Referenced by getMap().

13.63 src/ckb/keymap.h File Reference

```
#include <QColor>
#include <QHash>
```

Include dependency graph for keymap.h:



This graph shows which files directly or indirectly include this file:

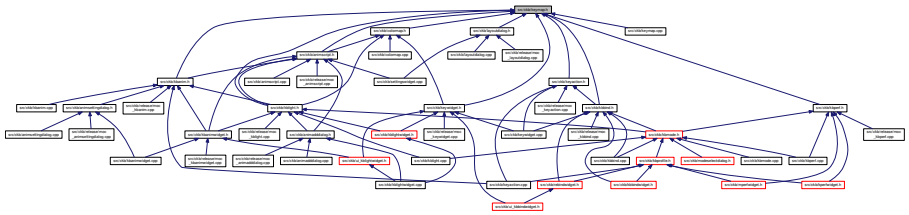

Data Structures

- struct Key
- class KeyMap

13.64 src/ckb/keywidget.cpp File Reference

```
#include <cmath>
#include <QGraphicsDropShadowEffect>
#include <QGraphicsPixmapItem>
#include <QGraphicsScene>
#include <QPainter>
#include "keywidget.h"
#include "keyaction.h"
#include "kbbind.h"
```

Include dependency graph for keywidget.cpp:

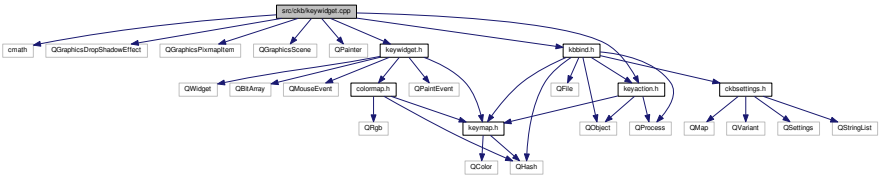

Functions

- QRgb monoRgb (float r, float g, float b)

Variables

- static const int KEY_SIZE = 12
- static QImage * m65Overlay = 0
- static QImage * sabOverlay = 0
- static QImage * scimOverlay = 0

13.64.1 Function Documentation

13.64.1.1 QRgb monoRgb (float *r*, float *g*, float *b*)

Definition at line 284 of file kblight.cpp.

References lToS(), and sToL().

Referenced by KbLight::base(), KbLight::frameUpdate(), and KeyWidget::paintEvent().

```
284                                         {
285     // It's important to use a linear colorspace for this, otherwise the colors will appear inconsistent
286     // Note that although we could use linear space for alpha blending or the animation blending functions,
        we don't.
287     // The reason for this is that photo manipulation programs don't do it either, so even though the
        result would technically be more correct,
288     // it would look wrong to most people.
289     r = sToL(r);
290     g = sToL(g);
291     b = sToL(b);
292     int value = round(lToS((r + g + b) / 3.f));
293     return qRgb(value, value, value);
294 }
```

Here is the call graph for this function:

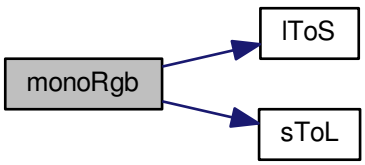

Here is the caller graph for this function:

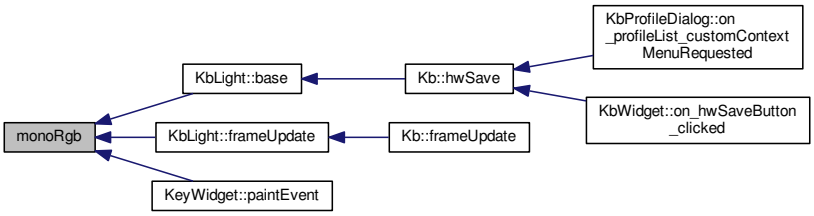

13.64.2 Variable Documentation

13.64.2.1 const int KEY_SIZE = 12 [static]

Definition at line 10 of file keywidget.cpp.

Referenced by KeyWidget::drawInfo(), and KeyWidget::map().

13.64.2.2 QImage* m65Overlay = 0 [static]

Definition at line 12 of file keywidget.cpp.

Referenced by KeyWidget::paintEvent().

13.64.2.3 QImage * sabOverlay = 0 [static]

Definition at line 12 of file keywidget.cpp.

Referenced by KeyWidget::paintEvent().

13.64.2.4 QImage * scimOverlay = 0 [static]

Definition at line 12 of file keywidget.cpp.

Referenced by KeyWidget::paintEvent().

13.65 src/ckb/keywidget.h File Reference

```
#include <QBitArray>
#include <QMouseEvent>
#include <QPaintEvent>
#include <QWidget>
#include "keymap.h"
#include "colormap.h"
```

Include dependency graph for keywidget.h:

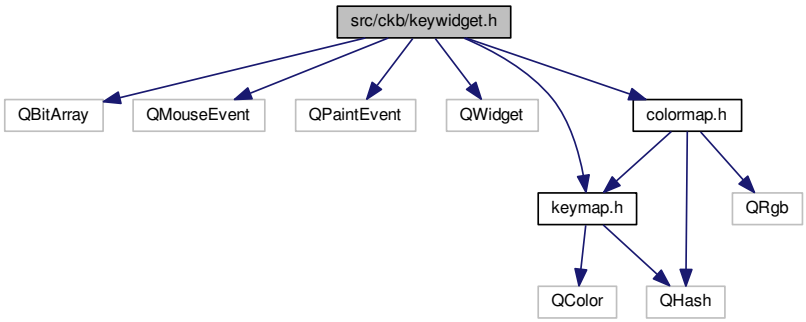

This graph shows which files directly or indirectly include this file:

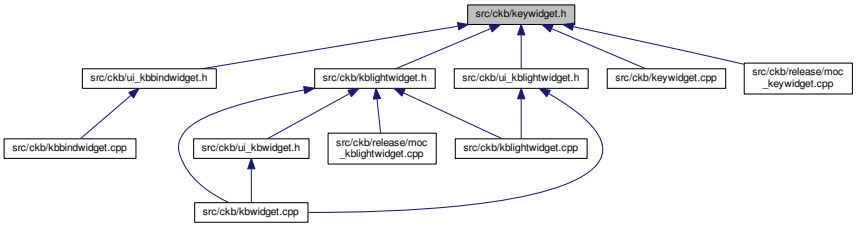

Data Structures

- class KeyWidget

13.66 src/ckb/kperfwidget.cpp File Reference

```
#include "kperfwidget.h"
#include "ui_kperfwidget.h"
#include "modeselectdialog.h"
#include <cmath>
```

Include dependency graph for kperfwidget.cpp:

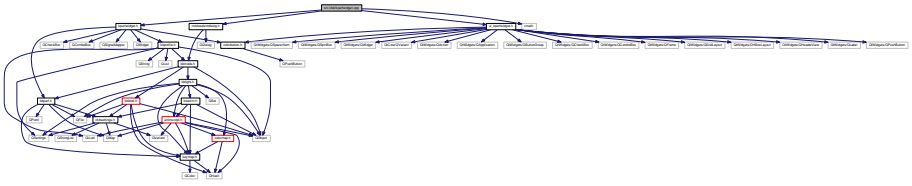

13.67 src/ckb/kperfwidget.h File Reference

```
#include <QWidget>
#include <QCheckBox>
#include <QComboBox>
#include <QSignalMapper>
#include "kbperf.h"
#include "kbprofile.h"
#include "colorbutton.h"
```

Include dependency graph for kperfwidget.h:

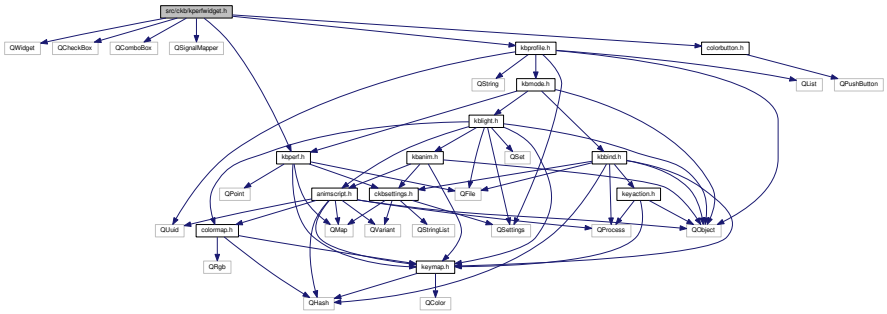

This graph shows which files directly or indirectly include this file:

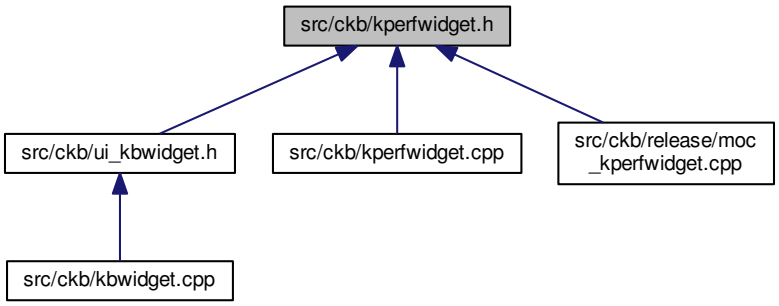

Data Structures

- class KPerfWidget
- struct KPerfWidget::IndicatorUi

Namespaces

- Ui

13.67.1 Data Structure Documentation

13.67.1.1 struct KPerfWidget::IndicatorUi

Definition at line 54 of file kperfwidget.h.

Collaboration diagram for KPerfWidget::IndicatorUi:

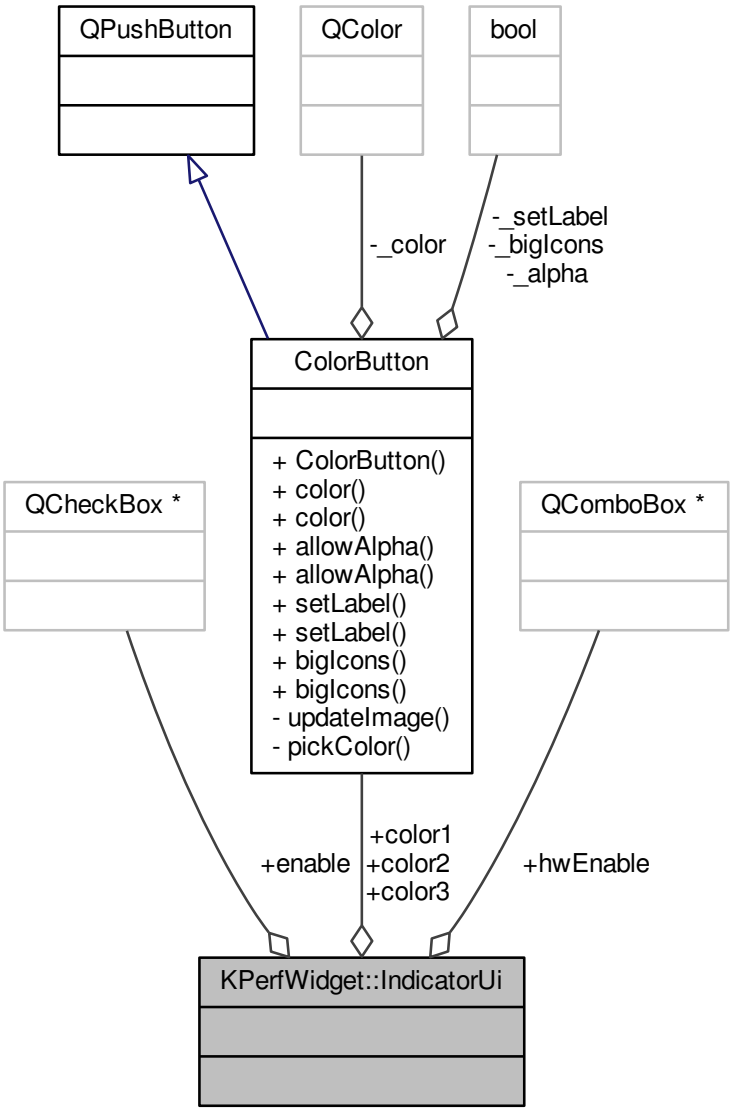

Data Fields

ColorButton *	color1	
ColorButton *	color2	
ColorButton *	color3	

QCheckBox *	enable	
QComboBox *	hwEnable	

13.68 src/ckb/layoutdialog.cpp File Reference

```
#include "layoutdialog.h"
#include "kb.h"
#include "ui_layoutdialog.h"
```

Include dependency graph for layoutdialog.cpp:

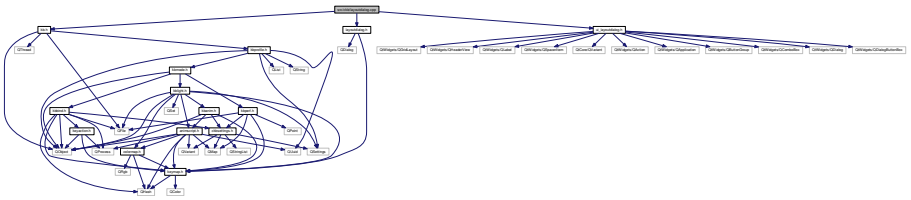

13.69 src/ckb/layoutdialog.h File Reference

```
#include <QDialog>
#include "keymap.h"
```

Include dependency graph for layoutdialog.h:

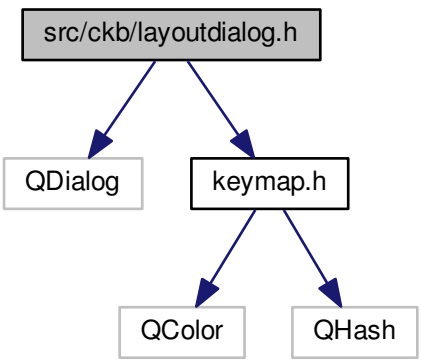

This graph shows which files directly or indirectly include this file:

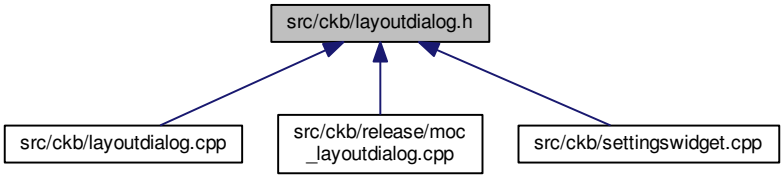

Data Structures

- class LayoutDialog

Namespaces

- Ui

13.70 src/ckb/macroreader.cpp File Reference

```
#include <qdebug.h>
#include "macroreader.h"
#include <sys/time.h>
```

Include dependency graph for macroreader.cpp:

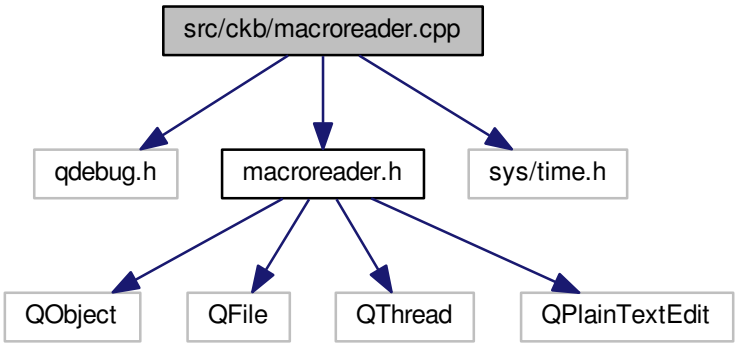

13.71 src/ckb/macroreader.h File Reference

```
#include <QObject>
```

```
#include <QFile>
#include <QThread>
#include <QPlainTextEdit>
```

Include dependency graph for macroreader.h:

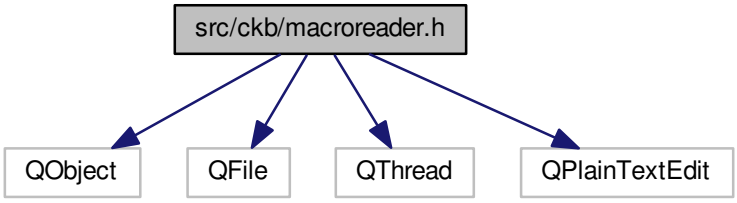

This graph shows which files directly or indirectly include this file:

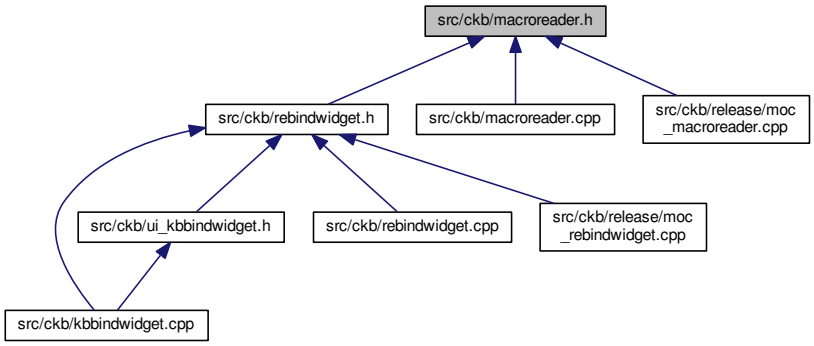

Data Structures

- class MacroReaderThread

  The MacroReaderThread class is responsible for reading Macro Key Values. It is created as a separate thread (worker thread) for reading macro commands from an fresh opened notify channel. Standard notify channel for macro definitions is number 2.

- class MacroReader

  The MacroReader class creates a worker thread object. It does a connect do delayed deletion of thread local variables in the case the worker thread terminates.

13.72 src/ckb/main.cpp File Reference

```
#include "mainwindow.h"
```

```
#include <QApplication>
#include <QDateTime>
#include <QSharedMemory>
#include <QCommandLineParser>
#include <cstring>
#include <unistd.h>
#include <signal.h>
#include <errno.h>
```

Include dependency graph for main.cpp:

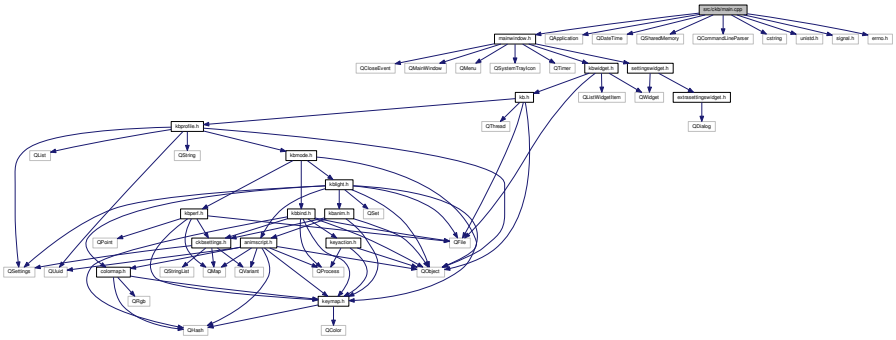

Macros

- #define SHMEM_SIZE 128 ∗ 1024
- #define SHMEM_SIZE_V015 16

Enumerations

- enum CommandLineParseResults { CommandLineOK, CommandLineError, CommandLineVersionRequested, CommandLineHelpRequested, CommandLineClose, CommandLineBackground }

Functions

- QSharedMemory appShare ("ckb")
- CommandLineParseResults parseCommandLine (QCommandLineParser &parser, QString ∗errorMessage)

  parseCommandLine - Setup options and parse command line arguments.
- static bool pidActive (const QStringList &lines)
- static bool isRunning (const char ∗command)
- int main (int argc, char ∗argv[])

13.72.1 Macro Definition Documentation

13.72.1.1 #define SHMEM_SIZE 128 ∗ 1024

Definition at line 20 of file main.cpp.

Referenced by isRunning().

13.72.1.2 #define SHMEM_SIZE_V015 16

Definition at line 21 of file main.cpp.

Referenced by isRunning().

13.72.2 Enumeration Type Documentation

13.72.2.1 enum CommandLineParseResults

Enumerator

CommandLineOK

CommandLineError

CommandLineVersionRequested

CommandLineHelpRequested

CommandLineClose

CommandLineBackground

Definition at line 24 of file main.cpp.

```
24                              {
25     CommandLineOK,
26     CommandLineError,
27     CommandLineVersionRequested,
28     CommandLineHelpRequested,
29     CommandLineClose,
30     CommandLineBackground
31 };
```

13.72.3 Function Documentation

13.72.3.1 QSharedMemory appShare ("ckb")

Referenced by isRunning().

Here is the caller graph for this function:



13.72.3.2 static bool isRunning (const char * *command*) [static]

Definition at line 109 of file main.cpp.

References appShare(), pidActive(), SHMEM_SIZE, and SHMEM_SIZE_V015.

Referenced by main().

```
109                                     {
110     // Try to create shared memory (if successful, application was not already running)
```

```
111     if(!appShare.create(SHMEM_SIZE) || !appShare.lock()){
112         // Lock existing shared memory
113         if(!appShare.attach() || !appShare.lock())
114             return true;
115         bool running = false;
116         if(appShare.size() == SHMEM_SIZE_V015){
117             // Old shmem - no PID listed so assume the process is running, and print the command directly
        to the buffer
118             if(command){
119                 void* data = appShare.data();
120                 snprintf((char*)data, SHMEM_SIZE_V015, "%s", command);
121             }
122             running = true;
123         } else {
124             // New shmem. Scan the contents of the shared memory for a PID
125             QStringList lines = QString((const char*)appShare.constData()).split("\n");
126             if(pidActive(lines)){
127                 running = true;
128                 // Append the command
129                 if(command){
130                     lines.append(QString("Option ") + command);
131                     QByteArray newMem = lines.join("\n").left(SHMEM_SIZE).toLatin1();
132                     // Copy the NUL byte as well as the string
133                     memcpy(appShare.data(), newMem.constData(), newMem.length() + 1);
134                 }
135             }
136         }
137         if(running){
138             appShare.unlock();
139             return true;
140         }
141     }
142     // Not already running. Initialize the shared memory with our PID
143     snprintf((char*)appShare.data(), appShare.size(), "PID %ld", (long)getpid());
144     appShare.unlock();
145     return false;
146 }
```

Here is the call graph for this function:

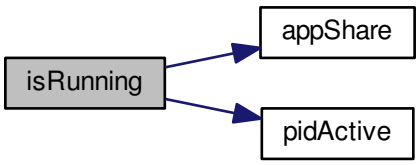

Here is the caller graph for this function:



13.72.3.3 int main (int *argc*, char * *argv[]*)

Definition at line 148 of file main.cpp.

References CommandLineBackground, CommandLineClose, CommandLineError, CommandLineHelpRequested, CommandLineOK, CommandLineVersionRequested, disableAppNap(), isRunning(), and parseCommandLine().

```
148                                {
149     // Setup main application
150     QApplication a(argc, argv);
151 
152     // Setup names and versions
153     QCoreApplication::setOrganizationName("ckb");
154     QCoreApplication::setApplicationVersion(CKB_VERSION_STR);
155     QCoreApplication::setApplicationName("ckb");
156 
157     // Setup argument parser
158     QCommandLineParser parser;
159     QString errorMessage;
160     parser.setApplicationDescription("Open Source Corsair Input Device Driver for Linux and OSX.");
161     bool background = 0;
162 
163     // Although the daemon runs as root, the GUI needn't and shouldn't be, as it has the potential to
      corrupt settings data.
164     if(getuid() == 0){
165         printf("The ckb GUI should not be run as root.\n");
166         return 0;
167     }
168 
169     // Seed the RNG for UsbIds
170     qsrand(QDateTime::currentMSecsSinceEpoch());
171 #ifdef Q_OS_MACX
172     disableAppNap();
173 #endif
174 #if QT_VERSION >= QT_VERSION_CHECK(5, 3, 0)
175     // Enable HiDPI support
176     qApp->setAttribute(Qt::AA_UseHighDpiPixmaps);
177 #endif
178 
179     // Parse arguments
180     switch (parseCommandLine(parser, &errorMessage)) {
181     case CommandLineOK:
182         // If launched with no argument
183         break;
184     case CommandLineError:
185         fputs(qPrintable(errorMessage), stderr);
186         fputs("\n\n", stderr);
187         fputs(qPrintable(parser.helpText()), stderr);
188         return 1;
189     case CommandLineVersionRequested:
190         // If launched with --version, print version info and then quit
191         printf("%s %s\n", qPrintable(QCoreApplication::applicationName()),
192                qPrintable(QCoreApplication::applicationVersion()));
193         return 0;
194     case CommandLineHelpRequested:
195         // If launched with --help, print help and then quit
196         parser.showHelp();
197         return 0;
198     case CommandLineClose:
199         // If launched with --close, kill existing app
200         if (isRunning("Close"))
201             printf("Asking existing instance to close.\n");
202         else
203             printf("ckb is not running.\n");
204         return 0;
205     case CommandLineBackground:
206         // If launched with --background, launch in background
207         background = 1;
208         break;
209     }
210 
211     // Launch in background if requested, or if re-launching a previous session
212     if(qApp->isSessionRestored())
213             background = 1;
214     if(isRunning(background ? 0 : "Open")){
215         printf("ckb is already running. Exiting.\n");
216         return 0;
217     }
218     MainWindow w;
219     if(!background)
220         w.show();
221 
222     return a.exec();
223 }
```

Here is the call graph for this function:

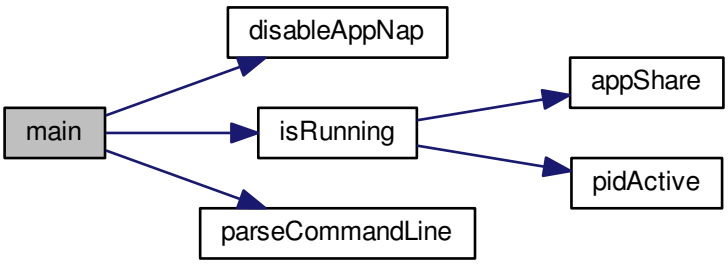

13.72.3.4 CommandLineParseResults parseCommandLine (QCommandLineParser & *parser,* QString * *errorMessage*)

Parameters

parser	parser instance to use for parse the arguments
errorMessage	argument parse error message

Returns

integer, representing the requested argument

Definition at line 41 of file main.cpp.

References CommandLineBackground, CommandLineClose, CommandLineError, CommandLineHelpRequested, CommandLineOK, and CommandLineVersionRequested.

Referenced by main().

```
41                                                                                                  {
42     // setup parser to interpret -abc as -a -b -c
43     parser.setSingleDashWordOptionMode(QCommandLineParser::ParseAsCompactedShortOptions);
44
45     /* add command line options */
46     // add -v, --version
47     const QCommandLineOption versionOption = parser.addVersionOption();
48     // add -h, --help (/? on windows)
49     const QCommandLineOption helpOption = parser.addHelpOption();
50     // add -b, --background
51     const QCommandLineOption backgroundOption(QStringList() << "b" << "background",
52                                               "Starts in background, without displaying the main window.");
53     parser.addOption(backgroundOption);
54     // add -c, --close
55     const QCommandLineOption closeOption(QStringList() << "c" << "close",
56                                          "Causes already running instance (if any) to exit.");
57     parser.addOption(closeOption);
58
59     /* parse arguments */
60     if (!parser.parse(QCoreApplication::arguments())) {
61         // set error, if there already are some
62         *errorMessage = parser.errorText();
63         return CommandLineError;
64     }
65
66     /* return requested operation/setup */
67     if (parser.isSet(versionOption)) {
68         // print version and exit
69         return CommandLineVersionRequested;
70     }
71
72     if (parser.isSet(helpOption)) {
```

```
73          // print help and exit
74          return CommandLineHelpRequested;
75      }
76
77      if (parser.isSet(backgroundOption)) {
78          // open application in background
79          return CommandLineBackground;
80      }
81
82      if (parser.isSet(closeOption)) {
83          // close already running application instances, if any
84          return CommandLineClose;
85      }
86
87      /* no explicit argument was passed */
88      return CommandLineOK;
89  };
```

Here is the caller graph for this function:

13.72.3.5 static bool pidActive (const QStringList & *lines*) [static]

Definition at line 92 of file main.cpp.

Referenced by isRunning().

```
92                                                  {
93      foreach(const QString& line, lines){
94          if(line.startsWith("PID ")){
95              bool ok;
96              pid_t pid;
97              // Valid PID found?
98              if((pid = line.split(" ")[1].toLong(&ok)) > 0 && ok){
99                  // kill -0 does nothing to the application, but checks if it's running
100                 return (kill(pid, 0) == 0 || errno != ESRCH);
101             }
102         }
103     }
104     // If the PID wasn't listed in the shmem, assume it is running
105     return true;
106 }
```

Here is the caller graph for this function:



13.73 src/ckb/mainwindow.cpp File Reference

```
#include "ckbsettings.h"
#include "kbmanager.h"
#include "kbfirmware.h"
#include "mainwindow.h"
#include "ui_mainwindow.h"
#include <cstdlib>
#include <QSharedMemory>
#include <QShortcut>
#include <QMessageBox>
#include <QMenuBar>
#include <unistd.h>
```

Include dependency graph for mainwindow.cpp:

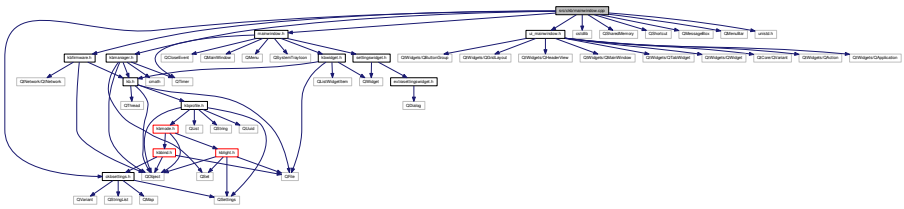

Variables

- QSharedMemory appShare
- static const QString configLabel = "Settings"

13.73.1 Variable Documentation

13.73.1.1 QSharedMemory appShare

Referenced by MainWindow::timerTick().

13.73.1.2 const QString configLabel = "Settings" [static]

Definition at line 15 of file mainwindow.cpp.

Referenced by MainWindow::MainWindow().

13.74 src/ckb/mainwindow.h File Reference

```
#include <QCloseEvent>
#include <QMainWindow>
#include <QMenu>
#include <QSystemTrayIcon>
#include <QTimer>
#include "kbwidget.h"
#include "settingswidget.h"
```

Include dependency graph for mainwindow.h:

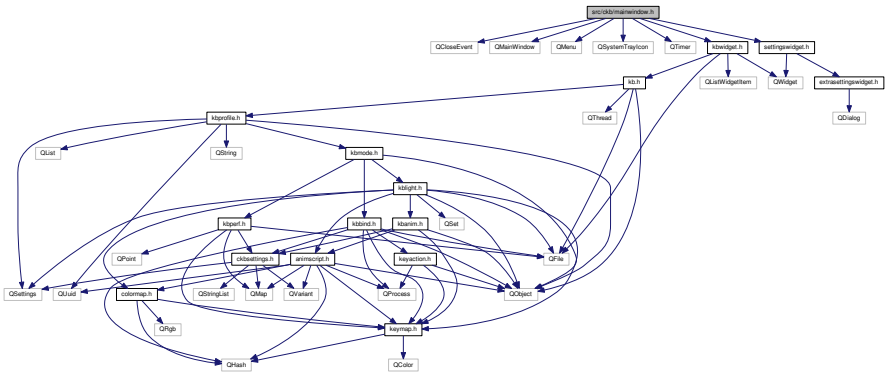

This graph shows which files directly or indirectly include this file:



Data Structures

- class MainWindow

Namespaces

- Ui

13.75 src/ckb/media.h File Reference

This graph shows which files directly or indirectly include this file:

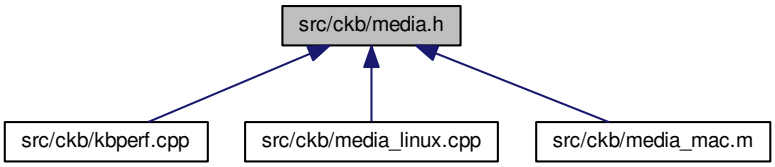

Macros

- #define EXTERN_C extern
- #define ENUM_C(name) typedef enum
- #define ENUM_END_C(name) name

Enumerations

- enum muteState { UNKNOWN = -1, UNMUTED, MUTED }

Functions

- muteState getMuteState ()

13.75.1 Macro Definition Documentation

13.75.1.1 #define ENUM_C(*name*) typedef enum

Definition at line 13 of file media.h.

13.75.1.2 #define ENUM_END_C(*name*) name

Definition at line 14 of file media.h.

13.75.1.3 #define EXTERN_C extern

Definition at line 12 of file media.h.

13.75.2 Enumeration Type Documentation

13.75.2.1 enum muteState

Enumerator

UNKNOWN

UNMUTED

MUTED

Definition at line 19 of file media.h.

```
19                  {
20      UNKNOWN = -1,
21      UNMUTED,
22      MUTED
23  } ENUM_END_C(muteState);
```

13.75.3 Function Documentation

13.75.3.1 muteState getMuteState ( )

Definition at line 9 of file media_linux.cpp.

References MUTED, muteProcess, UNKNOWN, and UNMUTED.

Referenced by KbPerf::applyIndicators().

```
9                       {
10      // Get default sink mute state from pulseaudio
11      static muteState lastKnown = UNKNOWN;
12      static quint64 lastTime = 0;
13      // Instead of running a command to check the state and waiting for it to finish, run the command now
        but wait to check it until the next frame
14      // (locking up the GUI thread is bad)
15      if(lastTime > 0 && muteProcess.state() == QProcess::NotRunning){
16          if(muteProcess.exitCode() != 0)
17              lastKnown = UNKNOWN;
18          QString output = muteProcess.readLine().trimmed();
19          if(output == "yes")
20              lastKnown = MUTED;
21          else if(output == "no")
22              lastKnown = UNMUTED;
23      }
24      quint64 time = QDateTime::currentMSecsSinceEpoch();
25      if(time - lastTime < 33)
26          // Don't run it than 30 times per second
27          return lastKnown;
28      lastTime = time;
29      if(muteProcess.state() == QProcess::NotRunning)
30          // Shamelessly taken from pulseaudio-ctl
31          muteProcess.start("sh", QStringList() << "-c" << "pacmd list-sinks|grep -A 15 '*
        index'|awk '/muted:/{ print $2 }'");
32      return lastKnown;
33  }
```

Here is the caller graph for this function:



13.76 src/ckb/media_linux.cpp File Reference

```
#include <QDateTime>
#include <QProcess>
#include "media.h"
```

Include dependency graph for media_linux.cpp:

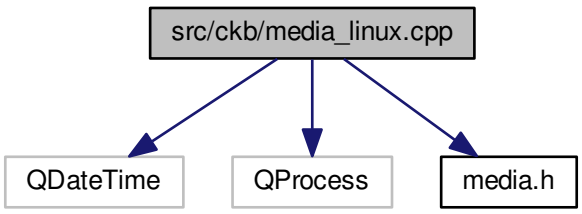

Functions

- muteState getMuteState ()

Variables

- static QProcess muteProcess

13.76.1 Function Documentation

13.76.1.1 muteState getMuteState ( )

Definition at line 9 of file media_linux.cpp.

References MUTED, muteProcess, UNKNOWN, and UNMUTED.

```
9                       {
10      // Get default sink mute state from pulseaudio
11      static muteState lastKnown = UNKNOWN;
12      static quint64 lastTime = 0;
13      // Instead of running a command to check the state and waiting for it to finish, run the command now
        but wait to check it until the next frame
14      // (locking up the GUI thread is bad)
15      if(lastTime > 0 && muteProcess.state() == QProcess::NotRunning){
16          if(muteProcess.exitCode() != 0)
17              lastKnown = UNKNOWN;
18          QString output = muteProcess.readLine().trimmed();
19          if(output == "yes")
20              lastKnown = MUTED;
21          else if(output == "no")
22              lastKnown = UNMUTED;
23      }
24      quint64 time = QDateTime::currentMSecsSinceEpoch();
25      if(time - lastTime < 33)
26          // Don't run it than 30 times per second
27          return lastKnown;
28      lastTime = time;
29      if(muteProcess.state() == QProcess::NotRunning)
30          // Shamelessly taken from pulseaudio-ctl
31          muteProcess.start("sh", QStringList() << "-c" << "pacmd list-sinks|grep -A 15 '*
        index'|awk '/muted:/{ print $2 }'");
32      return lastKnown;
33  }
```

13.76.2 Variable Documentation

13.76.2.1 QProcess muteProcess [static]

Definition at line 7 of file media_linux.cpp.

Referenced by getMuteState().

13.77 src/ckb/media_mac.m File Reference

```
#import <AudioToolbox/AudioServices.h>
#import <Foundation/Foundation.h>
#include "media.h"
```

Include dependency graph for media_mac.m:

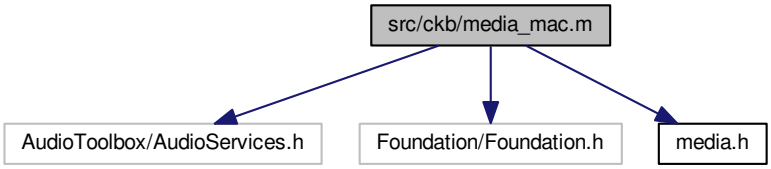

Functions

- muteState getMuteState ()
- void disableAppNap ()

13.77.1 Function Documentation

13.77.1.1 void disableAppNap ( )

Definition at line 34 of file media_mac.m.

Referenced by main().

```
34                      {
35      [[NSProcessInfo processInfo] beginActivityWithOptions:NSActivityUserInitiatedAllowingIdleSystemSleep
        reason:@"Keyboard animation"];
36  }
```

Here is the caller graph for this function:



13.77.1.2 muteState getMuteState ( )

Definition at line 5 of file media_mac.m.

References MUTED, UNKNOWN, and UNMUTED.

Referenced by KbPerf::applyIndicators().

```
5                       {
6       // Get the system's default audio device
7       AudioObjectPropertyAddress propertyAddress = {
8           kAudioHardwarePropertyDefaultOutputDevice,
9           kAudioObjectPropertyScopeGlobal,
10           kAudioObjectPropertyElementMaster
```

```
11      };
12      AudioDeviceID deviceID = 0;
13      UInt32 dataSize = sizeof(deviceID);
14      if(AudioHardwareServiceGetPropertyData(kAudioObjectSystemObject, &propertyAddress, 0, NULL, &dataSize,
        &deviceID)
15              != kAudioHardwareNoError){
16          return UNKNOWN;
17      }
18      // Grab the mute property
19      AudioObjectPropertyAddress propertyAddress2 = {
20          kAudioDevicePropertyMute,
21          kAudioDevicePropertyScopeOutput,
22          kAudioObjectPropertyElementMaster
23      };
24      if(!AudioHardwareServiceHasProperty(deviceID, &propertyAddress2))
25          return UNKNOWN;
26      bool state = 0;
27      dataSize = sizeof(state);
28      if(AudioHardwareServiceGetPropertyData(deviceID, &propertyAddress2, 0, NULL, &dataSize, &state)
29              != kAudioHardwareNoError)
30          return UNKNOWN;
31      return state ? MUTED : UNMUTED;
32  }
```

Here is the caller graph for this function:



13.78 src/ckb/modeselectdialog.cpp File Reference

```
#include "modeselectdialog.h"
#include "ui_modeselectdialog.h"
```

Include dependency graph for modeselectdialog.cpp:

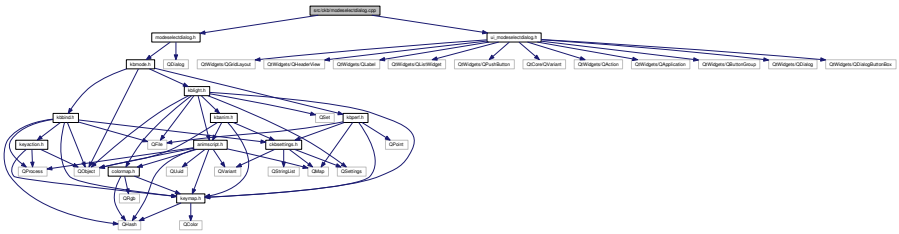

13.79 src/ckb/modeselectdialog.h File Reference

```
#include <QDialog>
#include "kbmode.h"
```

Include dependency graph for modeselectdialog.h:

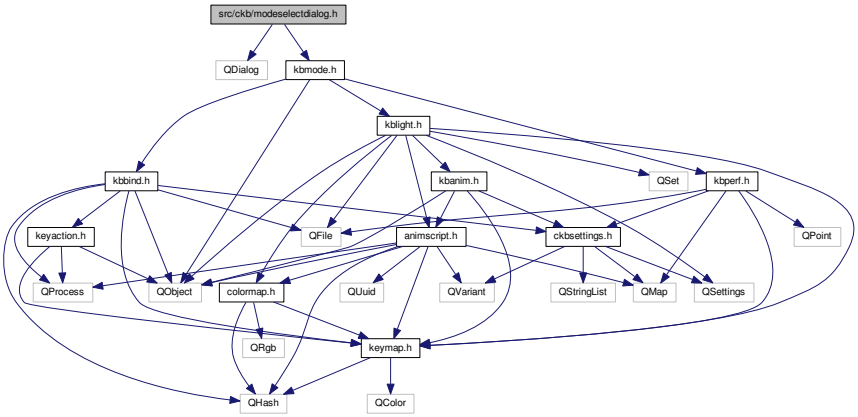

This graph shows which files directly or indirectly include this file:



Data Structures

- class ModeSelectDialog

Namespaces

- Ui

13.80 src/ckb/mperfwidget.cpp File Reference

```
#include "mperfwidget.h"
#include "ui_mperfwidget.h"
#include "modeselectdialog.h"
#include <cmath>
```

Include dependency graph for mperfwidget.cpp:

Macros

- #define SET_START if(isSetting) return; isSetting = true

- #define SET_END isSetting = false

Functions

- int dpiExp (int value, int min, int max)
- int dpiLog (int value, int min, int max)
- int dpiRound (int value)

Variables

- static const QString xyLinkPath = "UI/DPI/UnlinkXY"
- static const double DPI_BASE = (double)KbPerf::DPI_MAX / (double)KbPerf::DPI_MIN

13.80.1 Macro Definition Documentation

13.80.1.1 #define SET_END isSetting = false

Definition at line 126 of file mperfwidget.cpp.

Referenced by MPerfWidget::boxXChanged(), MPerfWidget::boxYChanged(), MPerfWidget::sliderXMoved(), and MPerfWidget::sliderYMoved().

13.80.1.2 #define SET_START if(isSetting) return; isSetting = true

Definition at line 125 of file mperfwidget.cpp.

Referenced by MPerfWidget::boxXChanged(), MPerfWidget::boxYChanged(), MPerfWidget::sliderXMoved(), and MPerfWidget::sliderYMoved().

13.80.2 Function Documentation

13.80.2.1 int dpiExp (int *value*, int *min*, int *max*) [inline]

Definition at line 105 of file mperfwidget.cpp.

References DPI_BASE, and KbPerf::DPI_MIN.

Referenced by MPerfWidget::sliderXMoved(), and MPerfWidget::sliderYMoved().

```
105                                                {
106     double val = (value - min) / (double)(max - min);
107     val = pow(DPI_BASE, val);
108     return round(KbPerf::DPI_MIN * val);
109 }
```

Here is the caller graph for this function:



13.80.2.2 int dpiLog (int *value*, int *min*, int *max*) [inline]

Definition at line 111 of file mperfwidget.cpp.

References DPI_BASE, and KbPerf::DPI_MIN.

Referenced by MPerfWidget::boxXChanged(), and MPerfWidget::boxYChanged().

```
111                                                 {
112     double val = value / (double)KbPerf::DPI_MIN;
113     val = log(val) / log(DPI_BASE);
114     return round(val * (max - min) + min);
115 }
```

Here is the caller graph for this function:

13.80.2.3 int dpiRound (int *value*) [inline]

Definition at line 117 of file mperfwidget.cpp.

Referenced by MPerfWidget::sliderXMoved(), and MPerfWidget::sliderYMoved().

```
117                                 {
118     if(value > 1000)
119         return round(value / 100.) * 100;
120     else
121         return round(value / 50.) * 50;
122 }
```

Here is the caller graph for this function:



13.80.3 Variable Documentation

13.80.3.1 const double DPI_BASE = (double)KbPerf::DPI_MAX / (double)KbPerf::DPI_MIN [static]

Definition at line 103 of file mperfwidget.cpp.

Referenced by dpiExp(), and dpiLog().

13.80.3.2 const QString xyLinkPath = "UI/DPI/UnlinkXY" [static]

Definition at line 6 of file mperfwidget.cpp.

Referenced by MPerfWidget::on_xyBox_clicked().

13.81 src/ckb/mperfwidget.h File Reference

```
#include <QWidget>
#include <QSlider>
#include <QSpinBox>
#include <QCheckBox>
#include <QRadioButton>
#include <QSignalMapper>
#include "kbperf.h"
#include "kbprofile.h"
#include "colorbutton.h"
```

Include dependency graph for mperfwidget.h:

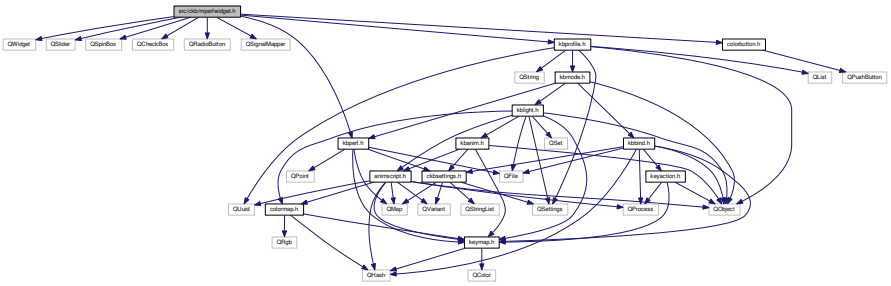

This graph shows which files directly or indirectly include this file:

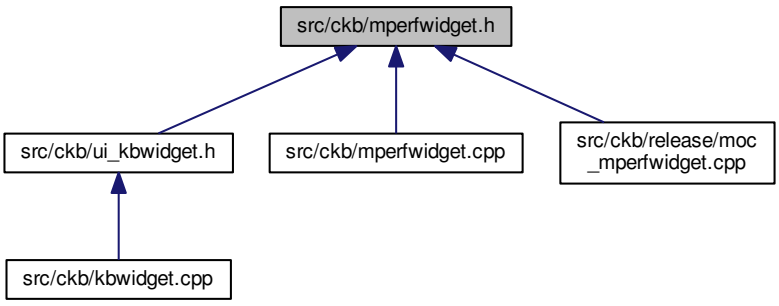

Data Structures

- class MPerfWidget
- struct MPerfWidget::DpiUi

Namespaces

- Ui

13.81.1 Data Structure Documentation

13.81.1.1 struct MPerfWidget::DpiUi

Definition at line 37 of file mperfwidget.h.

Collaboration diagram for MPerfWidget::DpiUi:

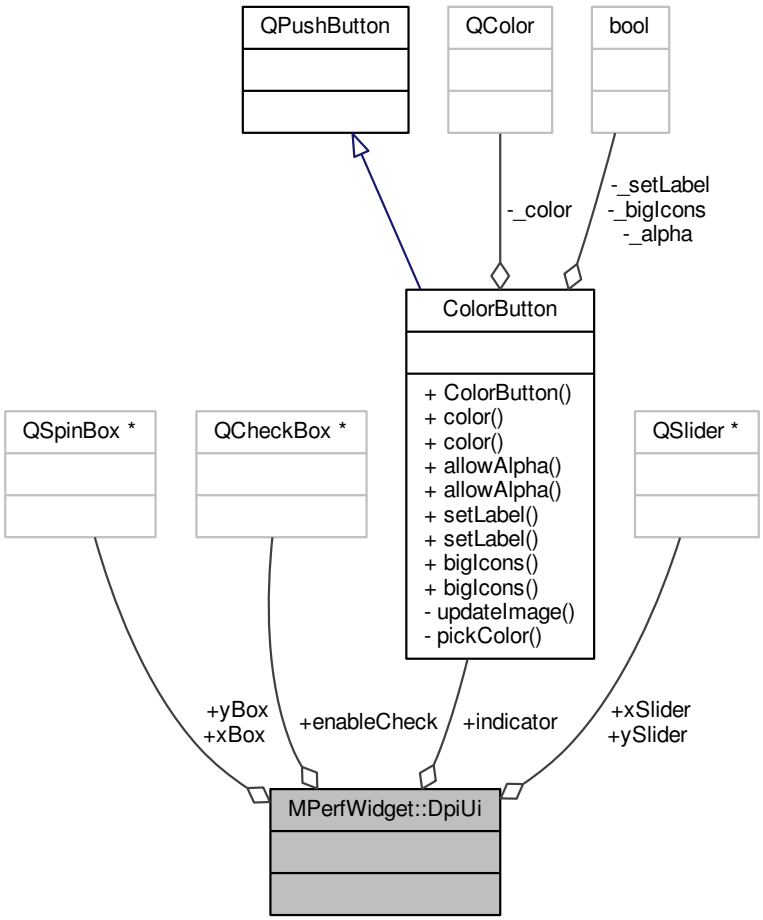

Data Fields

QCheckBox *	enableCheck	
ColorButton *	indicator	
QSpinBox *	xBox	

QSlider *	xSlider	
QSpinBox *	yBox	
QSlider *	ySlider	

13.82 src/ckb/quazip/crypt.h File Reference

`#include "quazip_global.h"`
Include dependency graph for crypt.h:

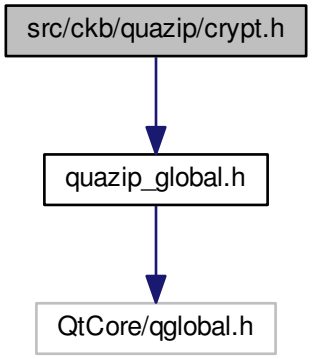

This graph shows which files directly or indirectly include this file:

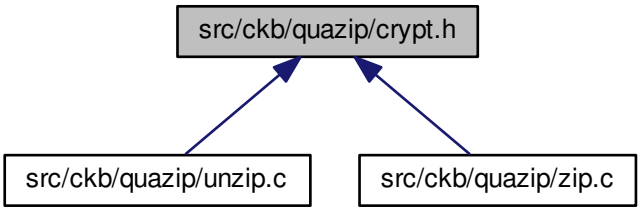

Macros

- #define CRC32(c, b) ((*(pcrc_32_tab+(((int)(c) ^ (b)) & 0xff))) ^ ((c) >> 8))
- #define zdecode(pkeys, pcrc_32_tab, c) (update_keys(pkeys,pcrc_32_tab,c ^= decrypt_byte(pkeys,pcrc_32_tab)))
- #define zencode(pkeys, pcrc_32_tab, c, t) (t=decrypt_byte(pkeys,pcrc_32_tab), update_keys(pkeys,pcrc_32_tab,c), t^(c))

Functions

- static int decrypt_byte (unsigned long *pkeys, const z_crc_t FAR *pcrc_32_tab)
- static int update_keys (unsigned long *pkeys, const z_crc_t FAR *pcrc_32_tab, int c)
- static void init_keys (const char *passwd, unsigned long *pkeys, const z_crc_t FAR *pcrc_32_tab)

13.82.1 Macro Definition Documentation

13.82.1.1 #define CRC32(*c, b*) ((*(pcrc_32_tab+(((int)(c) ^ (b)) & 0xff))) ^ ((c) >> 8))

Definition at line 32 of file crypt.h.

Referenced by update_keys().

13.82.1.2 #define zdecode(*pkeys, pcrc_32_tab, c*) (**update_keys**(pkeys,pcrc_32_tab,c ^= **decrypt_byte**(pkeys,pcrc_32_tab)))

Definition at line 79 of file crypt.h.

Referenced by unzOpenCurrentFile3(), and unzReadCurrentFile().

13.82.1.3 #define zencode(*pkeys, pcrc_32_tab, c, t*) (t=**decrypt_byte**(pkeys,pcrc_32_tab), **update_keys**(pkeys,pcrc_32_tab,c), t^(c))

Definition at line 82 of file crypt.h.

Referenced by zip64FlushWriteBuffer().

13.82.2 Function Documentation

13.82.2.1 static int decrypt_byte (unsigned long * *pkeys*, const z_crc_t FAR * *pcrc_32_tab*) [static]

Definition at line 37 of file crypt.h.

```
38 {
39     //(void) pcrc_32_tab; /* avoid "unused parameter" warning */
40     unsigned temp;  /* POTENTIAL BUG:  temp*(temp^1) may overflow in an
41                      * unpredictable manner on 16-bit systems; not a problem
42                      * with any known compiler so far, though */
43
44     temp = ((unsigned)(*(pkeys+2)) & 0xffff) | 2;
45     return (int)(((temp * (temp ^ 1)) >> 8) & 0xff);
46 }
```

13.82.2.2 static void init_keys (const char * *passwd*, unsigned long * *pkeys*, const z_crc_t FAR * *pcrc_32_tab*) [static]

Definition at line 68 of file crypt.h.

References update_keys().

Referenced by unzOpenCurrentFile3().

```
69 {
70     *(pkeys+0) = 305419896L;
71     *(pkeys+1) = 591751049L;
72     *(pkeys+2) = 878082192L;
73     while (*passwd != '\0') {
74         update_keys(pkeys,pcrc_32_tab,(int)*passwd);
75         passwd++;
76     }
77 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

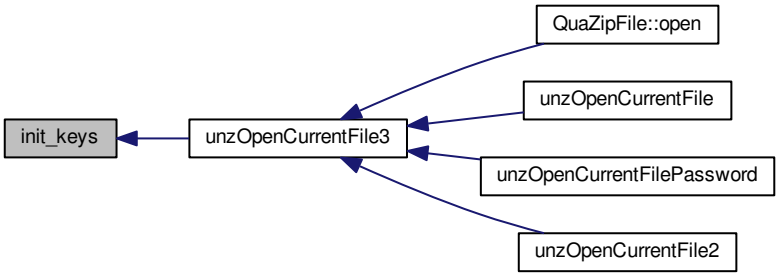

13.82.2.3 static int update_keys (unsigned long * *pkeys*, const z_crc_t FAR * *pcrc_32_tab*, int *c*) [static]

Definition at line 51 of file crypt.h.

References CRC32.

Referenced by init_keys().

```
52 {
53     (*(pkeys+0)) = CRC32((*(pkeys+0)), c);
54     (*(pkeys+1)) += (*(pkeys+0)) & 0xff;
55     (*(pkeys+1)) = (*(pkeys+1)) * 134775813L + 1;
56     {
57       register int keyshift = (int)((*(pkeys+1)) >> 24);
58       (*(pkeys+2)) = CRC32((*(pkeys+2)), keyshift);
59     }
60     return c;
61 }
```

Here is the caller graph for this function:

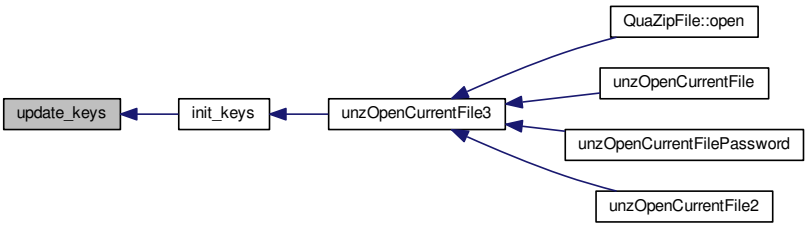

13.83 src/ckb/quazip/ioapi.h File Reference

```
#include <stdio.h>
#include <stdlib.h>
#include "zlib.h"
```

Include dependency graph for ioapi.h:

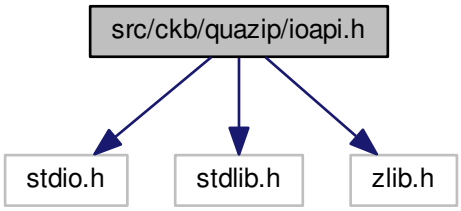

This graph shows which files directly or indirectly include this file:

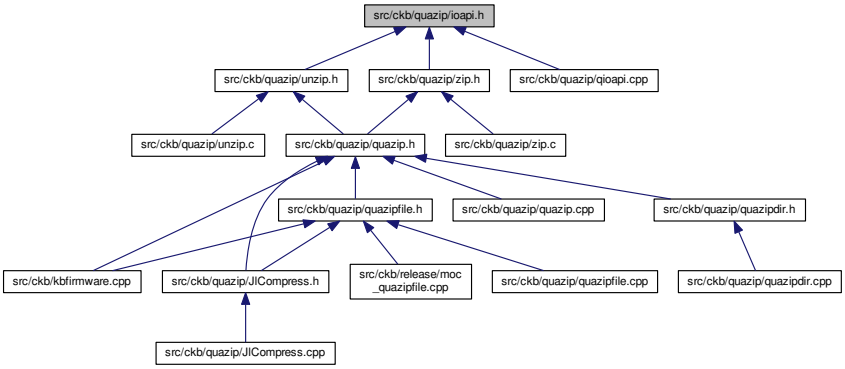

Data Structures

- struct zlib_filefunc_def_s
- struct zlib_filefunc64_def_s
- struct zlib_filefunc64_32_def_s

Macros

- #define __USE_FILE_OFFSET64
- #define __USE_LARGEFILE64
- #define _LARGEFILE64_SOURCE
- #define _FILE_OFFSET_BIT 64
- #define OF _Z_OF
- #define ZLIB_FILEFUNC_SEEK_CUR (1)
- #define ZLIB_FILEFUNC_SEEK_END (2)
- #define ZLIB_FILEFUNC_SEEK_SET (0)
- #define ZLIB_FILEFUNC_MODE_READ (1)
- #define ZLIB_FILEFUNC_MODE_WRITE (2)
- #define ZLIB_FILEFUNC_MODE_READWRITEFILTER (3)
- #define ZLIB_FILEFUNC_MODE_EXISTING (4)
- #define ZLIB_FILEFUNC_MODE_CREATE (8)
- #define ZCALLBACK
- #define ZREAD64(filefunc, filestream, buf, size) ((*((filefunc).zfile_func64.zread_file)) ((filefunc).zfile_-func64.opaque,filestream,buf,size))
- #define ZWRITE64(filefunc, filestream, buf, size) ((*((filefunc).zfile_func64.zwrite_file)) ((filefunc).zfile_-func64.opaque,filestream,buf,size))
- #define ZCLOSE64(filefunc, filestream) ((*((filefunc).zfile_func64.zclose_file)) ((filefunc).zfile_func64.-opaque,filestream))
- #define ZFAKECLOSE64(filefunc, filestream) ((*((filefunc).zfile_func64.zfakeclose_file)) ((filefunc).zfile_-func64.opaque,filestream))
- #define ZERROR64(filefunc, filestream) ((*((filefunc).zfile_func64.zerror_file)) ((filefunc).zfile_func64.-opaque,filestream))
- #define ZOPEN64(filefunc, filename, mode) (call_zopen64((&(filefunc)),(filename),(mode)))
- #define ZTELL64(filefunc, filestream) (call_ztell64((&(filefunc)),(filestream)))
- #define ZSEEK64(filefunc, filestream, pos, mode) (call_zseek64((&(filefunc)),(filestream),(pos),(mode)))

Typedefs

- typedef unsigned long long int ZPOS64_T
- typedef voidpf open_file_func _Z_OF ((voidpf opaque, voidpf file, int mode))

  Addition for GDAL : START.
- typedef struct zlib_filefunc_def_s zlib_filefunc_def
- typedef struct zlib_filefunc64_def_s zlib_filefunc64_def
- typedef struct zlib_filefunc64_32_def_s zlib_filefunc64_32_def

Functions

- void fill_qiodevice64_filefunc _Z_OF ((zlib_filefunc64_def *pzlib_filefunc_def))
- void fill_qiodevice_filefunc _Z_OF ((zlib_filefunc_def *pzlib_filefunc_def))
- voidpf call_zopen64 _Z_OF ((const zlib_filefunc64_32_def *pfilefunc, voidpf file, int mode))
- int call_zseek64 _Z_OF ((const zlib_filefunc64_32_def *pfilefunc, voidpf filestream, ZPOS64_T offset, int origin))

- ZPOS64_T call_ztell64 _Z_OF ((const zlib_filefunc64_32_def ∗pfilefunc, voidpf filestream))
- void fill_zlib_filefunc64_32_def_from_filefunc32 (zlib_filefunc64_32_def ∗p_filefunc64_32, const zlib_filefunc_def ∗p_filefunc32)

13.83.1 Data Structure Documentation

13.83.1.1 struct zlib_filefunc_def_s

Definition at line 143 of file ioapi.h.

Collaboration diagram for zlib_filefunc_def_s:

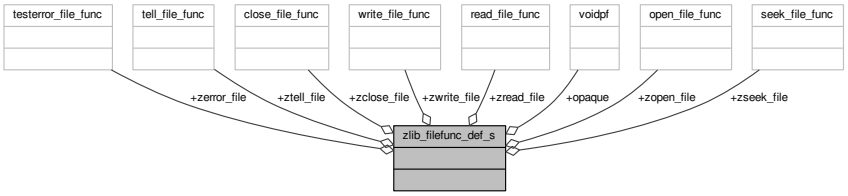

Data Fields

voidpf	opaque	
close_file_func	zclose_file	
testerror_file_func	zerror_file	
open_file_func	zopen_file	
read_file_func	zread_file	
seek_file_func	zseek_file	
tell_file_func	ztell_file	
write_file_func	zwrite_file	

13.83.1.2 struct zlib_filefunc64_def_s

Definition at line 159 of file ioapi.h.

Collaboration diagram for zlib_filefunc64_def_s:

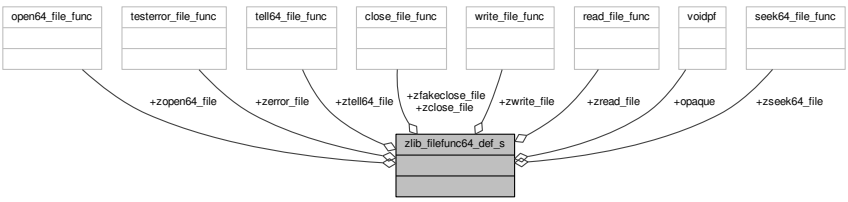

Data Fields

voidpf	opaque	
close_file_func	zclose_file	
testerror_file_-func	zerror_file	
close_file_func	zfakeclose_file	
open64_file_-func	zopen64_file	
read_file_func	zread_file	
seek64_file_func	zseek64_file	
tell64_file_func	ztell64_file	
write_file_func	zwrite_file	

13.83.1.3 struct zlib_filefunc64_32_def_s

Definition at line 176 of file ioapi.h.

Collaboration diagram for zlib_filefunc64_32_def_s:

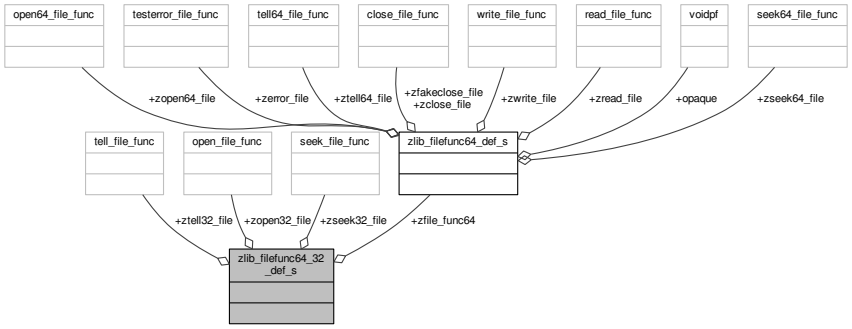

Data Fields

zlib_filefunc64_-def	zfile_func64	
open_file_func	zopen32_file	
seek_file_func	zseek32_file	
tell_file_func	ztell32_file	

13.83.2 Macro Definition Documentation

13.83.2.1 #define __USE_FILE_OFFSET64

Definition at line 32 of file ioapi.h.

13.83.2.2 #define __USE_LARGEFILE64

Definition at line 35 of file ioapi.h.

13.83.2.3 #define _FILE_OFFSET_BIT 64

Definition at line 41 of file ioapi.h.

13.83.2.4 #define _LARGEFILE64_SOURCE

Definition at line 38 of file ioapi.h.

13.83.2.5 #define OF _Z_OF

Definition at line 106 of file ioapi.h.

13.83.2.6 #define ZCALLBACK

Definition at line 125 of file ioapi.h.

13.83.2.7 #define ZCLOSE64(*filefunc, filestream*) ((∗((filefunc).zfile_func64.zclose_file)) ((filefunc).zfile_func64.opaque,filestream))

Definition at line 189 of file ioapi.h.

Referenced by LoadCentralDirectoryRecord(), unzClose(), unzOpenInternal(), zipClose(), and zipOpen3().

13.83.2.8 #define ZERROR64(*filefunc, filestream*) ((∗((filefunc).zfile_func64.zerror_file)) ((filefunc).zfile_func64.opaque,filestream))

Definition at line 191 of file ioapi.h.

Referenced by unz64local_getByte(), and zip64local_getByte().

13.83.2.9 #define ZFAKECLOSE64(*filefunc, filestream*) ((∗((filefunc).zfile_func64.zfakeclose_file)) ((filefunc).zfile_func64.opaque,filestream))

Definition at line 190 of file ioapi.h.

Referenced by LoadCentralDirectoryRecord(), unzClose(), unzOpenInternal(), zipClose(), and zipOpen3().

13.83.2.10 #define ZLIB_FILEFUNC_MODE_CREATE (8)

Definition at line 118 of file ioapi.h.

Referenced by qiodevice_open_file_func(), and zipOpen3().

13.83.2.11 #define ZLIB_FILEFUNC_MODE_EXISTING (4)

Definition at line 117 of file ioapi.h.

Referenced by qiodevice_open_file_func(), unzOpenInternal(), and zipOpen3().

13.83.2.12 #define ZLIB_FILEFUNC_MODE_READ (1)

Definition at line 113 of file ioapi.h.

Referenced by qiodevice_open_file_func(), unzOpenInternal(), and zipOpen3().

13.83.2.13 #define ZLIB_FILEFUNC_MODE_READWRITEFILTER (3)

Definition at line 115 of file ioapi.h.

Referenced by qiodevice_open_file_func().

13.83.2.14 #define ZLIB_FILEFUNC_MODE_WRITE (2)

Definition at line 114 of file ioapi.h.

Referenced by zipOpen3().

13.83.2.15 #define ZLIB_FILEFUNC_SEEK_CUR (1)

Definition at line 109 of file ioapi.h.

Referenced by qiodevice64_seek_file_func(), qiodevice_seek_file_func(), and unz64local_GetCurrentFileInfoInternal().

13.83.2.16 #define ZLIB_FILEFUNC_SEEK_END (2)

Definition at line 110 of file ioapi.h.

Referenced by qiodevice64_seek_file_func(), qiodevice_seek_file_func(), unz64local_SearchCentralDir(), unz64local_SearchCentralDir64(), zip64local_SearchCentralDir(), and zip64local_SearchCentralDir64().

13.83.2.17 #define ZLIB_FILEFUNC_SEEK_SET (0)

Definition at line 111 of file ioapi.h.

Referenced by LoadCentralDirectoryRecord(), qiodevice64_seek_file_func(), qiodevice_seek_file_func(), unz64local_CheckCurrentFileCoherencyHeader(), unz64local_GetCurrentFileInfoInternal(), unz64local_SearchCentralDir(), unz64local_SearchCentralDir64(), unzGetGlobalComment(), unzGetLocalExtrafield(), unzOpenInternal(), unzReadCurrentFile(), zip64local_SearchCentralDir(), zip64local_SearchCentralDir64(), and zipCloseFileInZipRaw64().

13.83.2.18 #define ZOPEN64(*filefunc, filename, mode*) (call_zopen64((&(filefunc)),(filename),(mode)))

Definition at line 199 of file ioapi.h.

Referenced by unzOpenInternal(), and zipOpen3().

13.83.2.19 #define ZREAD64(*filefunc, filestream, buf, size*) ((∗((filefunc).zfile_func64.zread_file)) ((filefunc).zfile_func64.opaque,filestream,buf,size))

Definition at line 185 of file ioapi.h.

Referenced by LoadCentralDirectoryRecord(), unz64local_getByte(), unz64local_GetCurrentFileInfoInternal(), unz64local_SearchCentralDir(), unz64local_SearchCentralDir64(), unzGetGlobalComment(), unzGetLocalExtrafield(), unzOpenCurrentFile3(), unzReadCurrentFile(), zip64local_getByte(), zip64local_SearchCentralDir(), and zip64local_SearchCentralDir64().

13.83.2.20 #define ZSEEK64(*filefunc, filestream, pos, mode*) (call_zseek64((&(filefunc)),(filestream),(pos),(mode)))

Definition at line 201 of file ioapi.h.

Referenced by LoadCentralDirectoryRecord(), unz64local_CheckCurrentFileCoherencyHeader(), unz64local_GetCurrentFileInfoInternal(), unz64local_SearchCentralDir(), unz64local_SearchCentralDir64(), unzGetGlobalComment(), unzGetLocalExtrafield(), unzOpenCurrentFile3(), unzOpenInternal(), unzReadCurrentFile(), zip64local_SearchCentralDir(), zip64local_SearchCentralDir64(), zipCloseFileInZipRaw64(), and zipOpen3().

13.83.2.21 #define ZTELL64(*filefunc, filestream*) (call_ztell64((&(filefunc)),(filestream)))

Definition at line 200 of file ioapi.h.

Referenced by unz64local_SearchCentralDir(), unz64local_SearchCentralDir64(), Write_LocalFileHeader(), zip64local_SearchCentralDir(), zip64local_SearchCentralDir64(), zipClose(), zipCloseFileInZipRaw64(), zipOpen3(), and zipOpenNewFileInZip4_64().

13.83.2.22 #define ZWRITE64(*filefunc, filestream, buf, size*) ((∗((filefunc).zfile_func64.zwrite_file)) ((filefunc).zfile_func64.opaque,filestream,buf,size))

Definition at line 186 of file ioapi.h.

Referenced by Write_GlobalComment(), Write_LocalFileHeader(), zip64FlushWriteBuffer(), zip64local_putValue(), zipClose(), and zipOpenNewFileInZip4_64().

13.83.3 Typedef Documentation

13.83.3.1 zipFile ZEXPORT zipOpen64 _Z_OF ((voidpf opaque, voidpf file, int mode))

Addition for GDAL : END.

Definition at line 132 of file ioapi.h.

13.83.3.2 typedef struct zlib_filefunc64_32_def_s zlib_filefunc64_32_def

13.83.3.3 typedef struct zlib_filefunc64_def_s zlib_filefunc64_def

13.83.3.4 typedef struct zlib_filefunc_def_s zlib_filefunc_def

13.83.3.5 typedef unsigned long long int ZPOS64_T

Definition at line 94 of file ioapi.h.

13.83.4 Function Documentation

13.83.4.1 void fill_qiodevice64_filefunc _Z_OF ((zlib_filefunc64_def ∗pzlib_filefunc_def))

13.83.4.2 void fill_qiodevice_filefunc _Z_OF ((zlib_filefunc_def ∗pzlib_filefunc_def))

13.83.4.3 voidpf call_zopen64 _Z_OF ((const zlib_filefunc64_32_def ∗pfilefunc, voidpf file, int mode))

13.83.4.4 int call_zseek64 _Z_OF ((const zlib_filefunc64_32_def ∗pfilefunc, voidpf filestream, ZPOS64_T offset, int origin))

13.83.4.5 ZPOS64_T call_ztell64 _Z_OF ((const zlib_filefunc64_32_def ∗pfilefunc, voidpf filestream))

13.83.4.6 void fill_zlib_filefunc64_32_def_from_filefunc32 (zlib_filefunc64_32_def * *p_filefunc64_32,* const zlib_filefunc_def * *p_filefunc32*)

Definition at line 346 of file qioapi.cpp.

References zlib_filefunc_def_s::opaque, zlib_filefunc64_def_s::opaque, zlib_filefunc_def_s::zclose_file, zlib_filefunc64_def_s::zclose_file, zlib_filefunc_def_s::zerror_file, zlib_filefunc64_def_s::zerror_file, zlib_filefunc64_def_s::zfakeclose_file, zlib_filefunc64_32_def_s::zfile_func64, zlib_filefunc64_32_def_s::zopen32_file, zlib_filefunc64_def_s::zopen64_file, zlib_filefunc_def_s::zopen_file, zlib_filefunc_def_s::zread_file, zlib_filefunc64_def_s::zread_file, zlib_filefunc64_32_def_s::zseek32_file, zlib_filefunc64_def_s::zseek64_file, zlib_filefunc_def_s::zseek_file, zlib_filefunc64_32_def_s::ztell32_file, zlib_filefunc64_def_s::ztell64_file, zlib_filefunc_def_s::ztell_file, zlib_filefunc_def_s::zwrite_file, and zlib_filefunc64_def_s::zwrite_file.

Referenced by unzOpen2(), and zipOpen2().

```
347 {
348     p_filefunc64_32->zfile_func64.zopen64_file = NULL;
349     p_filefunc64_32->zopen32_file = p_filefunc32->zopen_file;
350     p_filefunc64_32->zfile_func64.zerror_file = p_filefunc32->
    zerror_file;
351     p_filefunc64_32->zfile_func64.zread_file = p_filefunc32->
    zread_file;
352     p_filefunc64_32->zfile_func64.zwrite_file = p_filefunc32->
    zwrite_file;
353     p_filefunc64_32->zfile_func64.ztell64_file = NULL;
354     p_filefunc64_32->zfile_func64.zseek64_file = NULL;
355     p_filefunc64_32->zfile_func64.zclose_file = p_filefunc32->
    zclose_file;
356     p_filefunc64_32->zfile_func64.zerror_file = p_filefunc32->
    zerror_file;
357     p_filefunc64_32->zfile_func64.opaque = p_filefunc32->
    opaque;
358     p_filefunc64_32->zfile_func64.zfakeclose_file = NULL;
359     p_filefunc64_32->zseek32_file = p_filefunc32->zseek_file;
360     p_filefunc64_32->ztell32_file = p_filefunc32->ztell_file;
361 }
```

Here is the caller graph for this function:

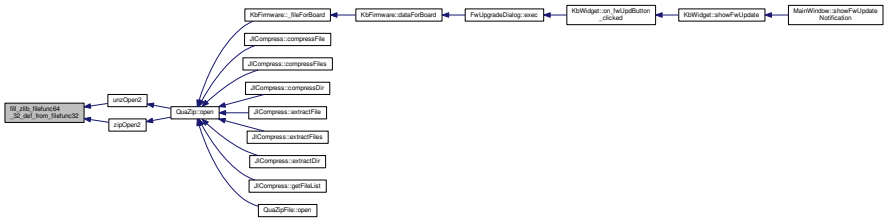

13.84 src/ckb/quazip/JlCompress.cpp File Reference

```
#include "JlCompress.h"
#include <QDebug>
```

Include dependency graph for JlCompress.cpp:

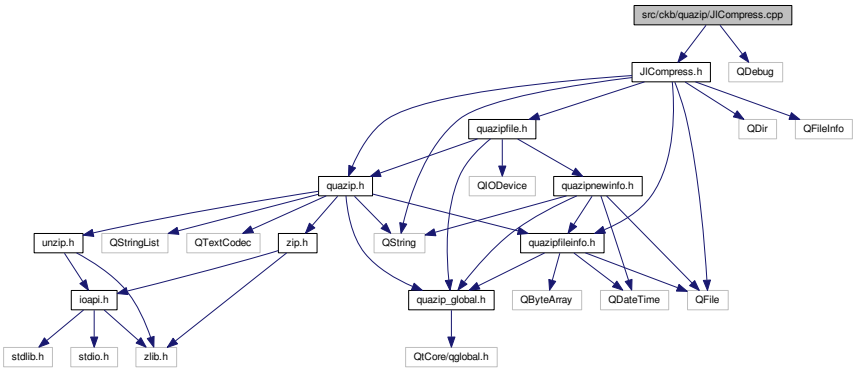

Functions

- static bool copyData (QIODevice &inFile, QIODevice &outFile)

13.84.1 Function Documentation

13.84.1.1 static bool copyData (QIODevice & *inFile,* QIODevice & *outFile*) [static]

Definition at line 29 of file JlCompress.cpp.

Referenced by JlCompress::compressFile(), and JlCompress::extractFile().

```
30 {
31     while (!inFile.atEnd()) {
32         char buf[4096];
33         qint64 readLen = inFile.read(buf, 4096);
34         if (readLen <= 0)
35             return false;
36         if (outFile.write(buf, readLen) != readLen)
37             return false;
38     }
39     return true;
40 }
```

Here is the caller graph for this function:

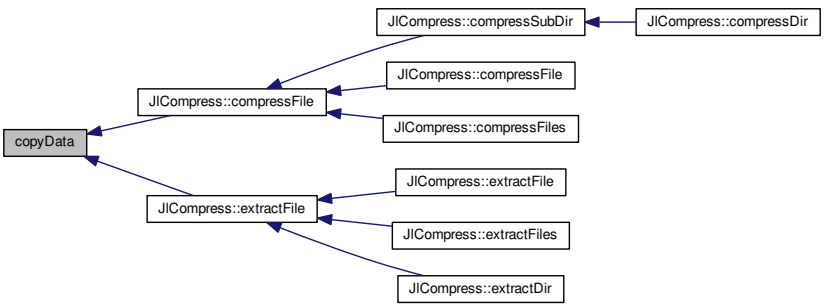

13.85 src/ckb/quazip/JlCompress.h File Reference

```
#include "quazip.h"
#include "quazipfile.h"
#include "quazipfileinfo.h"
#include <QString>
#include <QDir>
#include <QFileInfo>
#include <QFile>
```

Include dependency graph for JlCompress.h:

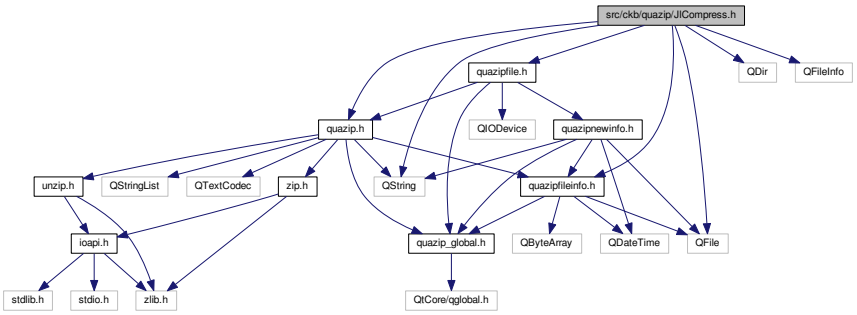

This graph shows which files directly or indirectly include this file:

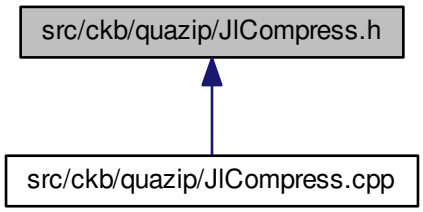

Data Structures

- class JlCompress

  Utility class for typical operations.

13.86 src/ckb/quazip/qioapi.cpp File Reference

```
#include <stdio.h>
```

```
#include <stdlib.h>
#include <string.h>
#include "zlib.h"
#include "ioapi.h"
#include "quazip_global.h"
#include <QIODevice>
```

Include dependency graph for qioapi.cpp:

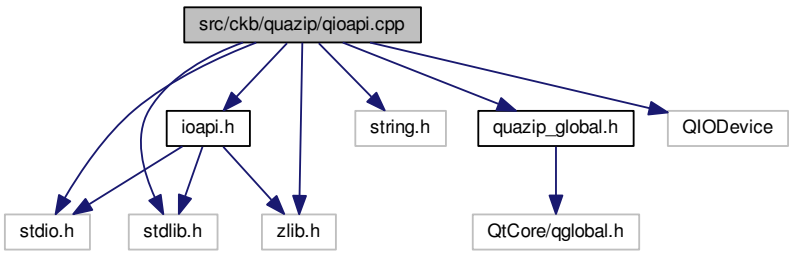

Data Structures

- struct QIODevice_descriptor

Macros

- #define SEEK_CUR 1
- #define SEEK_END 2
- #define SEEK_SET 0

Functions

- voidpf call_zopen64 (const zlib_filefunc64_32_def *pfilefunc, voidpf file, int mode)
- int call_zseek64 (const zlib_filefunc64_32_def *pfilefunc, voidpf filestream, ZPOS64_T offset, int origin)
- ZPOS64_T call_ztell64 (const zlib_filefunc64_32_def *pfilefunc, voidpf filestream)
- voidpf qiodevice_open_file_func (voidpf opaque, voidpf file, int mode)
- uLong qiodevice_read_file_func (voidpf opaque, voidpf stream, void *buf, uLong size)
- uLong qiodevice_write_file_func (voidpf opaque, voidpf stream, const void *buf, uLong size)
- uLong qiodevice_tell_file_func (voidpf opaque, voidpf stream)
- ZPOS64_T qiodevice64_tell_file_func (voidpf opaque, voidpf stream)
- int qiodevice_seek_file_func (voidpf, voidpf stream, uLong offset, int origin)
- int qiodevice64_seek_file_func (voidpf, voidpf stream, ZPOS64_T offset, int origin)
- int qiodevice_close_file_func (voidpf opaque, voidpf stream)
- int qiodevice_fakeclose_file_func (voidpf opaque, voidpf)
- int qiodevice_error_file_func (voidpf, voidpf)
- void fill_qiodevice_filefunc (zlib_filefunc_def *pzlib_filefunc_def)
- void fill_qiodevice64_filefunc (zlib_filefunc64_def *pzlib_filefunc_def)
- void fill_zlib_filefunc64_32_def_from_filefunc32 (zlib_filefunc64_32_def *p_filefunc64_32, const zlib_filefunc_def *p_filefunc32)

13.86.1 Macro Definition Documentation

13.86.1.1 #define SEEK_CUR 1

Definition at line 29 of file qioapi.cpp.

13.86.1.2 #define SEEK_END 2

Definition at line 33 of file qioapi.cpp.

13.86.1.3 #define SEEK_SET 0

Definition at line 37 of file qioapi.cpp.

Referenced by unzOpenCurrentFile3().

13.86.2 Function Documentation

13.86.2.1 voidpf call_zopen64 (const zlib_filefunc64_32_def * *pfilefunc,* voidpf *file,* int *mode*)

Definition at line 40 of file qioapi.cpp.

References zlib_filefunc64_def_s::opaque, zlib_filefunc64_32_def_s::zfile_func64, zlib_filefunc64_32_def_s::zopen32_file, and zlib_filefunc64_def_s::zopen64_file.

```
41 {
42     if (pfilefunc->zfile_func64.zopen64_file != NULL)
43         return (*(pfilefunc->zfile_func64.zopen64_file)) (pfilefunc->
      zfile_func64.opaque,file,mode);
44     else
45     {
46         return (*(pfilefunc->zopen32_file))(pfilefunc->zfile_func64.
      opaque,file,mode);
47     }
48 }
```

13.86.2.2 int call_zseek64 (const zlib_filefunc64_32_def * *pfilefunc,* voidpf *filestream,* ZPOS64_T *offset,* int *origin*)

Definition at line 50 of file qioapi.cpp.

References zlib_filefunc64_def_s::opaque, zlib_filefunc64_32_def_s::zfile_func64, zlib_filefunc64_32_def_s::zseek32_file, and zlib_filefunc64_def_s::zseek64_file.

```
51 {
52     if (pfilefunc->zfile_func64.zseek64_file != NULL)
53         return (*(pfilefunc->zfile_func64.zseek64_file)) (pfilefunc->
      zfile_func64.opaque,filestream,offset,origin);
54     else
55     {
56         uLong offsetTruncated = (uLong)offset;
57         if (offsetTruncated != offset)
58             return -1;
59         else
60             return (*(pfilefunc->zseek32_file))(pfilefunc->
      zfile_func64.opaque,filestream,offsetTruncated,origin);
61     }
62 }
```

13.86.2.3 ZPOS64_T call_ztell64 (const zlib_filefunc64_32_def * *pfilefunc,* voidpf *filestream*)

Definition at line 64 of file qioapi.cpp.

References zlib_filefunc64_def_s::opaque, zlib_filefunc64_32_def_s::zfile_func64, zlib_filefunc64_def_s::zseek64_file, zlib_filefunc64_32_def_s::ztell32_file, and zlib_filefunc64_def_s::ztell64_file.

```
65 {
66     if (pfilefunc->zfile_func64.zseek64_file != NULL)
67         return (*(pfilefunc->zfile_func64.ztell64_file)) (pfilefunc->
      zfile_func64.opaque,filestream);
68     else
69     {
70         uLong tell_uLong = (*(pfilefunc->ztell32_file))(pfilefunc->
      zfile_func64.opaque,filestream);
71         if ((tell_uLong) == ((uLong)-1))
72             return (ZPOS64_T)-1;
73         else
74             return tell_uLong;
75     }
76 }
```

13.86.2.4 void fill_qiodevice64_filefunc (zlib_filefunc64_def * *pzlib_filefunc_def*)

Definition at line 331 of file qioapi.cpp.

References zlib_filefunc64_def_s::opaque, qiodevice64_seek_file_func(), qiodevice64_tell_file_func(), qiodevice_close_file_func(), qiodevice_error_file_func(), qiodevice_fakeclose_file_func(), qiodevice_open_file_func(), qiodevice_read_file_func(), qiodevice_write_file_func(), zlib_filefunc64_def_s::zclose_file, zlib_filefunc64_def_s::zerror_file, zlib_filefunc64_def_s::zfakeclose_file, zlib_filefunc64_def_s::zopen64_file, zlib_filefunc64_def_s::zread_file, zlib_filefunc64_def_s::zseek64_file, zlib_filefunc64_def_s::ztell64_file, and zlib_filefunc64_def_s::zwrite_file.

Referenced by unzOpenInternal(), and zipOpen3().

```
333 {
334     // Open functions are the same for Qt.
335     pzlib_filefunc_def->zopen64_file = qiodevice_open_file_func;
336     pzlib_filefunc_def->zread_file = qiodevice_read_file_func;
337     pzlib_filefunc_def->zwrite_file = qiodevice_write_file_func;
338     pzlib_filefunc_def->ztell64_file = qiodevice64_tell_file_func;
339     pzlib_filefunc_def->zseek64_file = qiodevice64_seek_file_func;
340     pzlib_filefunc_def->zclose_file = qiodevice_close_file_func;
341     pzlib_filefunc_def->zerror_file = qiodevice_error_file_func;
342     pzlib_filefunc_def->opaque = new QIODevice_descriptor;
343     pzlib_filefunc_def->zfakeclose_file =
      qiodevice_fakeclose_file_func;
344 }
```

Here is the call graph for this function:

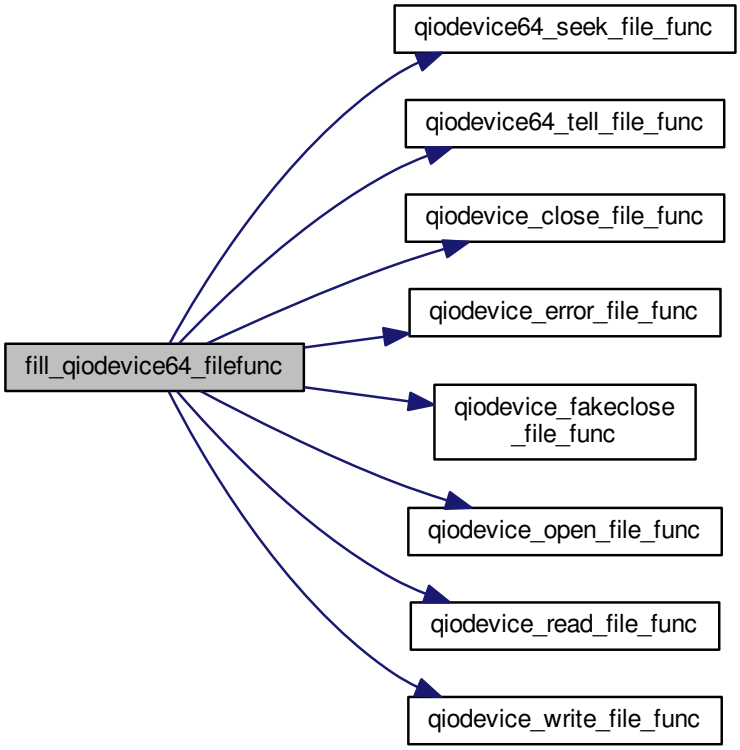

Here is the caller graph for this function:

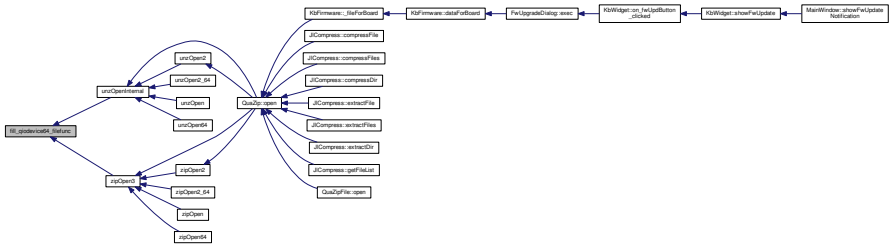

13.86.2.5 void fill_qiodevice_filefunc (zlib_filefunc_def * *pzlib_filefunc_def*)

Definition at line 318 of file qioapi.cpp.

References zlib_filefunc_def_s::opaque, qiodevice_close_file_func(), qiodevice_error_file_func(), qiodevice_open_file_func(), qiodevice_read_file_func(), qiodevice_seek_file_func(), qiodevice_tell_file_func(), qiodevice_write_file_func(), zlib_filefunc_def_s::zclose_file, zlib_filefunc_def_s::zerror_file, zlib_filefunc_def_s::zopen_file, zlib_filefunc_def_s::zread_file, zlib_filefunc_def_s::zseek_file, zlib_filefunc_def_s::ztell_file, and zlib_filefunc_def_s::zwrite_file.

```
320 {
```

```
321     pzlib_filefunc_def->zopen_file = qiodevice_open_file_func;
322     pzlib_filefunc_def->zread_file = qiodevice_read_file_func;
323     pzlib_filefunc_def->zwrite_file = qiodevice_write_file_func;
324     pzlib_filefunc_def->ztell_file = qiodevice_tell_file_func;
325     pzlib_filefunc_def->zseek_file = qiodevice_seek_file_func;
326     pzlib_filefunc_def->zclose_file = qiodevice_close_file_func;
327     pzlib_filefunc_def->zerror_file = qiodevice_error_file_func;
328     pzlib_filefunc_def->opaque = new QIODevice_descriptor;
329 }
```

Here is the call graph for this function:

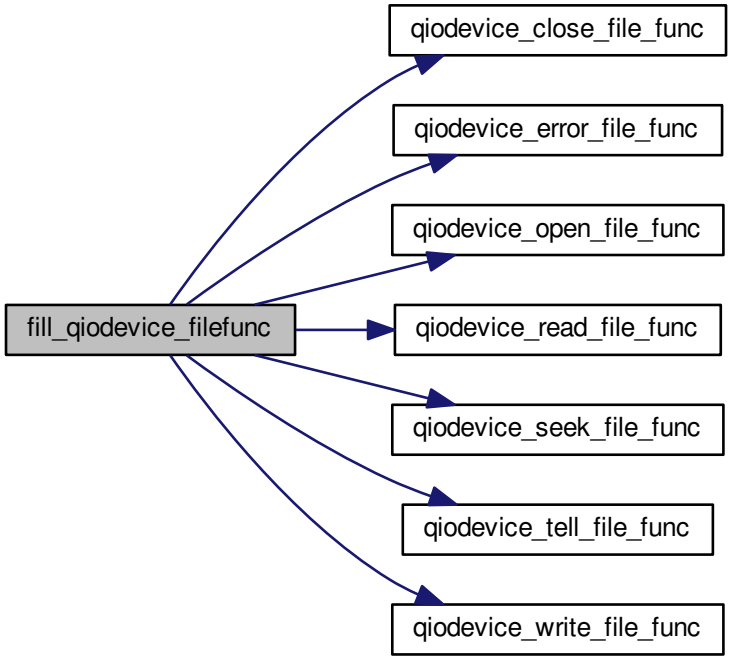

13.86.2.6 void fill_zlib_filefunc64_32_def_from_filefunc32 (zlib_filefunc64_32_def * *p_filefunc64_32*, const zlib_filefunc_def * *p_filefunc32*)

Definition at line 346 of file qioapi.cpp.

References zlib_filefunc_def_s::opaque, zlib_filefunc64_def_s::opaque, zlib_filefunc_def_s::zclose_file, zlib_filefunc64_def_s::zclose_file, zlib_filefunc_def_s::zerror_file, zlib_filefunc64_def_s::zerror_file, zlib_filefunc64_def_s::zfakeclose_file, zlib_filefunc64_32_def_s::zfile_func64, zlib_filefunc64_32_def_s::zopen32_file, zlib_filefunc64_def_s::zopen64_file, zlib_filefunc_def_s::zopen_file, zlib_filefunc_def_s::zread_file, zlib_filefunc64_def_s::zread_file, zlib_filefunc64_32_def_s::zseek32_file, zlib_filefunc64_def_s::zseek64_file, zlib_filefunc_def_s::zseek_file, zlib_filefunc64_32_def_s::ztell32_file, zlib_filefunc64_def_s::ztell64_file, zlib_filefunc_def_s::ztell_file, zlib_filefunc_def_s::zwrite_file, and zlib_filefunc64_def_s::zwrite_file.

Referenced by unzOpen2(), and zipOpen2().

```
347 {
348     p_filefunc64_32->zfile_func64.zopen64_file = NULL;
349     p_filefunc64_32->zopen32_file = p_filefunc32->zopen_file;
350     p_filefunc64_32->zfile_func64.zerror_file = p_filefunc32->
      zerror_file;
351     p_filefunc64_32->zfile_func64.zread_file = p_filefunc32->
```

```
    zread_file;
352   p_filefunc64_32->zfile_func64.zwrite_file = p_filefunc32->
    zwrite_file;
353   p_filefunc64_32->zfile_func64.ztell64_file = NULL;
354   p_filefunc64_32->zfile_func64.zseek64_file = NULL;
355   p_filefunc64_32->zfile_func64.zclose_file = p_filefunc32->
    zclose_file;
356   p_filefunc64_32->zfile_func64.zerror_file = p_filefunc32->
    zerror_file;
357   p_filefunc64_32->zfile_func64.opaque = p_filefunc32->
    opaque;
358   p_filefunc64_32->zfile_func64.zfakeclose_file = NULL;
359   p_filefunc64_32->zseek32_file = p_filefunc32->zseek_file;
360   p_filefunc64_32->ztell32_file = p_filefunc32->ztell_file;
361 }
```

Here is the caller graph for this function:

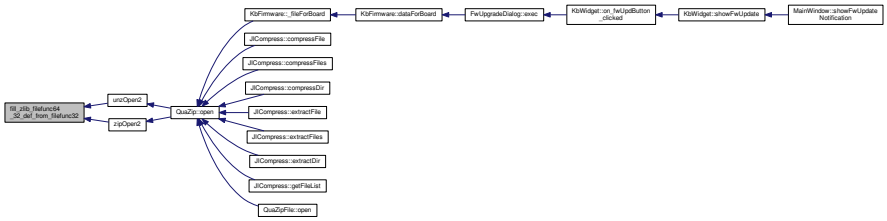

13.86.2.7 int qiodevice64_seek_file_func (voidpf , voidpf *stream*, ZPOS64_T *offset*, int *origin*)

Definition at line 244 of file qioapi.cpp.

References ZLIB_FILEFUNC_SEEK_CUR, ZLIB_FILEFUNC_SEEK_END, and ZLIB_FILEFUNC_SEEK_SET.

Referenced by fill_qiodevice64_filefunc().

```
249 {
250     QIODevice *iodevice = reinterpret_cast<QIODevice*>(stream);
251     if (iodevice->isSequential()) {
252         if (origin == ZLIB_FILEFUNC_SEEK_END
253                 && offset == 0) {
254             // sequential devices are always at end (needed in mdAppend)
255             return 0;
256         } else {
257             qWarning("qiodevice_seek_file_func() called for sequential device");
258             return -1;
259         }
260     }
261     qint64 qiodevice_seek_result=0;
262     int ret;
263     switch (origin)
264     {
265     case ZLIB_FILEFUNC_SEEK_CUR :
266         qiodevice_seek_result = ((QIODevice*)stream)->pos() + offset;
267         break;
268     case ZLIB_FILEFUNC_SEEK_END :
269         qiodevice_seek_result = ((QIODevice*)stream)->size() - offset;
270         break;
271     case ZLIB_FILEFUNC_SEEK_SET :
272         qiodevice_seek_result = offset;
273         break;
274     default:
275         return -1;
276     }
277     ret = !iodevice->seek(qiodevice_seek_result);
278     return ret;
279 }
```

Here is the caller graph for this function:

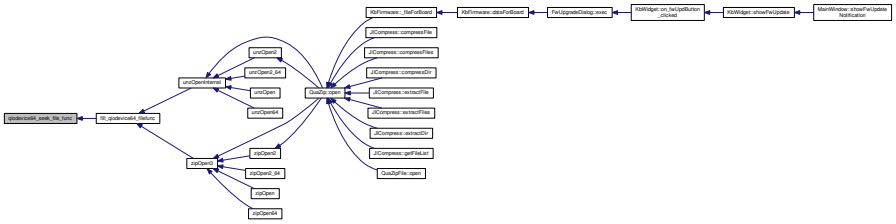

13.86.2.8 ZPOS64_T qiodevice64_tell_file_func (voidpf *opaque*, voidpf *stream*)

Definition at line 192 of file qioapi.cpp.

References QIODevice_descriptor::pos.

Referenced by fill_qiodevice64_filefunc().

```
195 {
196     QIODevice_descriptor *d = reinterpret_cast<
    QIODevice_descriptor*>(opaque);
197     QIODevice *iodevice = reinterpret_cast<QIODevice*>(stream);
198     qint64 ret;
199     if (iodevice->isSequential()) {
200         ret = d->pos;
201     } else {
202         ret = iodevice->pos();
203     }
204     return static_cast<ZPOS64_T>(ret);
205 }
```

Here is the caller graph for this function:

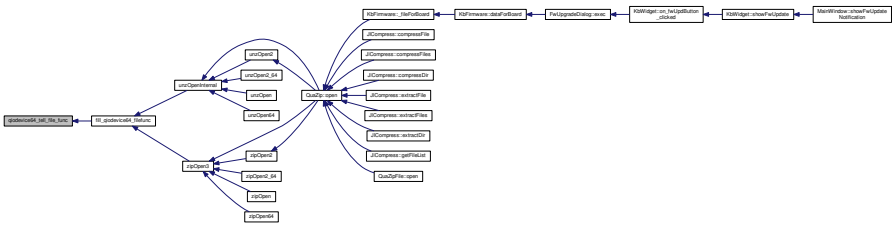

13.86.2.9 int qiodevice_close_file_func (voidpf *opaque*, voidpf *stream*)

Definition at line 281 of file qioapi.cpp.

Referenced by fill_qiodevice64_filefunc(), and fill_qiodevice_filefunc().

```
284 {
285     QIODevice_descriptor *d = reinterpret_cast<
    QIODevice_descriptor*>(opaque);
286     delete d;
287     QIODevice *device = reinterpret_cast<QIODevice*>(stream);
288 #ifdef QUAZIP_QSAVEFILE_BUG_WORKAROUND
289     // QSaveFile terribly breaks the is-a idiom:
290     // it IS a QIODevice, but it is NOT compatible with it: close() is private
291     QSaveFile *file = qobject_cast<QSaveFile*>(device);
292     if (file != NULL) {
293         // We have to call the ugly commit() instead:
294         return file->commit() ? 0 : -1;
295     }
```

```
296 #endif
297     device->close();
298     return 0;
299 }
```

Here is the caller graph for this function:

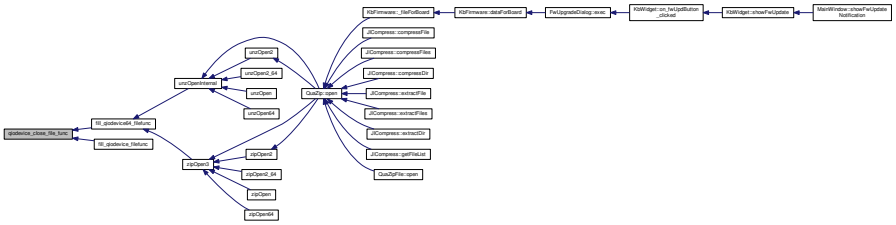

13.86.2.10 int qiodevice_error_file_func (voidpf , voidpf)

Definition at line 310 of file qioapi.cpp.

Referenced by fill_qiodevice64_filefunc(), and fill_qiodevice_filefunc().

```
313 {
314     // can't check for error due to the QIODevice API limitation
315     return 0;
316 }
```

Here is the caller graph for this function:

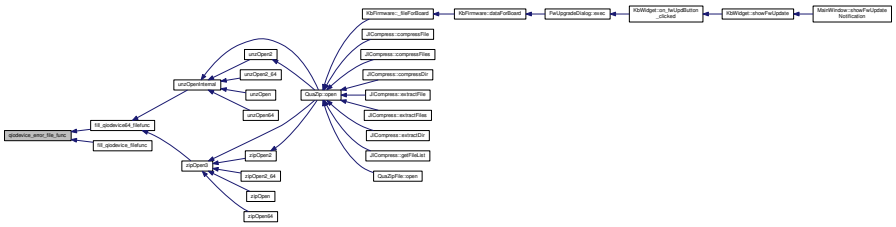

13.86.2.11 int qiodevice_fakeclose_file_func (voidpf *opaque*, voidpf)

Definition at line 301 of file qioapi.cpp.

Referenced by fill_qiodevice64_filefunc().

```
304 {
305     QIODevice_descriptor *d = reinterpret_cast<
    QIODevice_descriptor*>(opaque);
306     delete d;
307     return 0;
308 }
```

Here is the caller graph for this function:

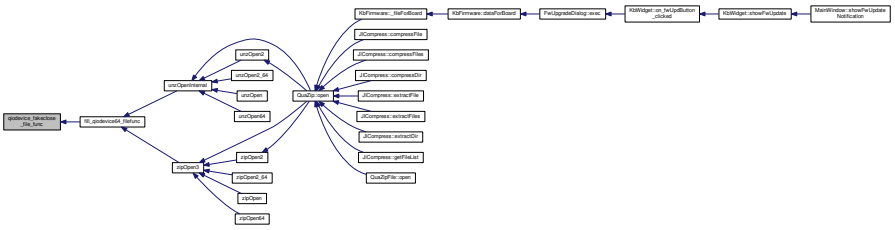

13.86.2.12 voidpf qiodevice_open_file_func (voidpf *opaque*, voidpf *file*, int *mode*)

Definition at line 86 of file qioapi.cpp.

References QIODevice_descriptor::pos, ZLIB_FILEFUNC_MODE_CREATE, ZLIB_FILEFUNC_MODE_EXISTING, ZLIB_FILEFUNC_MODE_READ, and ZLIB_FILEFUNC_MODE_READWRITEFILTER.

Referenced by fill_qiodevice64_filefunc(), and fill_qiodevice_filefunc().

```
90 {
91     QIODevice_descriptor *d = reinterpret_cast<
      QIODevice_descriptor*>(opaque);
92     QIODevice *iodevice = reinterpret_cast<QIODevice*>(file);
93     QIODevice::OpenMode desiredMode;
94     if ((mode & ZLIB_FILEFUNC_MODE_READWRITEFILTER)==
      ZLIB_FILEFUNC_MODE_READ)
95         desiredMode = QIODevice::ReadOnly;
96     else if (mode & ZLIB_FILEFUNC_MODE_EXISTING)
97         desiredMode = QIODevice::ReadWrite;
98     else if (mode & ZLIB_FILEFUNC_MODE_CREATE)
99         desiredMode = QIODevice::WriteOnly;
100     if (iodevice->isOpen()) {
101         if ((iodevice->openMode() & desiredMode) == desiredMode) {
102             if (desiredMode != QIODevice::WriteOnly
103                     && iodevice->isSequential()) {
104                 // We can use sequential devices only for writing.
105                 delete d;
106                 return NULL;
107             } else {
108                 if ((desiredMode & QIODevice::WriteOnly) != 0) {
109                     // open for writing, need to seek existing device
110                     if (!iodevice->isSequential()) {
111                         iodevice->seek(0);
112                     } else {
113                         d->pos = iodevice->pos();
114                     }
115                 }
116             }
117             return iodevice;
118         } else {
119             delete d;
120             return NULL;
121         }
122     }
123     iodevice->open(desiredMode);
124     if (iodevice->isOpen()) {
125         if (desiredMode != QIODevice::WriteOnly && iodevice->isSequential()) {
126             // We can use sequential devices only for writing.
127             iodevice->close();
128             delete d;
129             return NULL;
130         } else {
131             return iodevice;
132         }
133     } else {
134         delete d;
135         return NULL;
136     }
137 }
```

Here is the caller graph for this function:

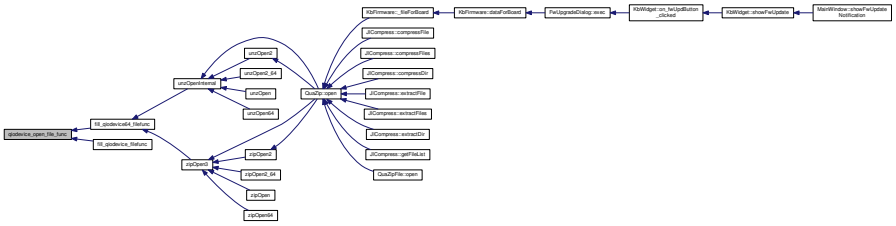

13.86.2.13 uLong qiodevice_read_file_func (voidpf *opaque,* voidpf *stream,* void * *buf,* uLong *size*)

Definition at line 140 of file qioapi.cpp.

References QIODevice_descriptor::pos.

Referenced by fill_qiodevice64_filefunc(), and fill_qiodevice_filefunc().

```
145 {
146     QIODevice_descriptor *d = reinterpret_cast<
    QIODevice_descriptor*>(opaque);
147     QIODevice *iodevice = reinterpret_cast<QIODevice*>(stream);
148     qint64 ret64 = iodevice->read((char*)buf,size);
149     uLong ret;
150     ret = (uLong) ret64;
151     if (ret64 != -1) {
152         d->pos += ret64;
153     }
154     return ret;
155 }
```

Here is the caller graph for this function:

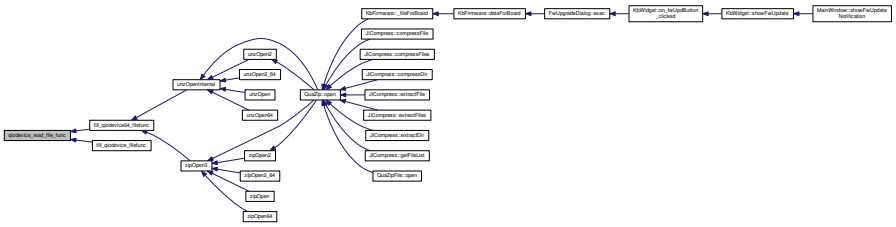

13.86.2.14 int qiodevice_seek_file_func (voidpf , voidpf *stream,* uLong *offset,* int *origin*)

Definition at line 207 of file qioapi.cpp.

References ZLIB_FILEFUNC_SEEK_CUR, ZLIB_FILEFUNC_SEEK_END, and ZLIB_FILEFUNC_SEEK_SET.

Referenced by fill_qiodevice_filefunc().

```
212 {
213     QIODevice *iodevice = reinterpret_cast<QIODevice*>(stream);
214     if (iodevice->isSequential()) {
215         if (origin == ZLIB_FILEFUNC_SEEK_END
216                 && offset == 0) {
217             // sequential devices are always at end (needed in mdAppend)
218             return 0;
219         } else {
220             qWarning("qiodevice_seek_file_func() called for sequential device");
221             return -1;
```

```
222         }
223     }
224     uLong qiodevice_seek_result=0;
225     int ret;
226     switch (origin)
227     {
228     case ZLIB_FILEFUNC_SEEK_CUR :
229         qiodevice_seek_result = ((QIODevice*)stream)->pos() + offset;
230         break;
231     case ZLIB_FILEFUNC_SEEK_END :
232         qiodevice_seek_result = ((QIODevice*)stream)->size() - offset;
233         break;
234     case ZLIB_FILEFUNC_SEEK_SET :
235         qiodevice_seek_result = offset;
236         break;
237     default:
238         return -1;
239     }
240     ret = !iodevice->seek(qiodevice_seek_result);
241     return ret;
242 }
```

Here is the caller graph for this function:



13.86.2.15 uLong qiodevice_tell_file_func (voidpf *opaque*, voidpf *stream*)

Definition at line 175 of file qioapi.cpp.

References QIODevice_descriptor::pos.

Referenced by fill_qiodevice_filefunc().

```
178 {
179     QIODevice_descriptor *d = reinterpret_cast<
      QIODevice_descriptor*>(opaque);
180     QIODevice *iodevice = reinterpret_cast<QIODevice*>(stream);
181     uLong ret;
182     qint64 ret64;
183     if (iodevice->isSequential()) {
184         ret64 = d->pos;
185     } else {
186         ret64 = iodevice->pos();
187     }
188     ret = static_cast<uLong>(ret64);
189     return ret;
190 }
```

Here is the caller graph for this function:

13.86.2.16 uLong qiodevice_write_file_func (voidpf *opaque*, voidpf *stream*, const void * *buf*, uLong *size*)

Definition at line 158 of file qioapi.cpp.

References QIODevice_descriptor::pos.

Referenced by fill_qiodevice64_filefunc(), and fill_qiodevice_filefunc().

```
163 {
164     QIODevice_descriptor *d = reinterpret_cast<
      QIODevice_descriptor*>(opaque);
165     QIODevice *iodevice = reinterpret_cast<QIODevice*>(stream);
166     uLong ret;
167     qint64 ret64 = iodevice->write((char*)buf,size);
168     if (ret64 != -1) {
169         d->pos += ret64;
170     }
171     ret = (uLong) ret64;
172     return ret;
173 }
```

Here is the caller graph for this function:

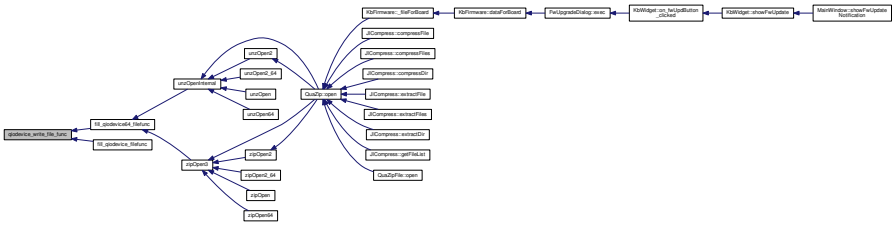

13.87 src/ckb/quazip/quaadler32.cpp File Reference

```
#include "quaadler32.h"
#include "zlib.h"
```

Include dependency graph for quaadler32.cpp:

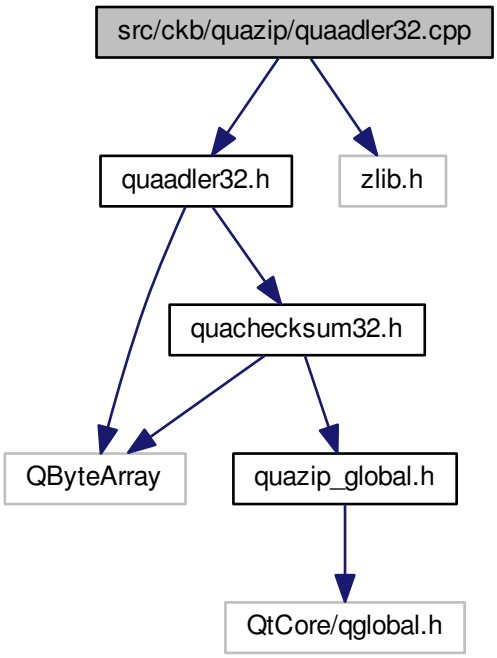

13.88 src/ckb/quazip/quaadler32.h File Reference

```
#include <QByteArray>
#include "quachecksum32.h"
```

Include dependency graph for quaadler32.h:

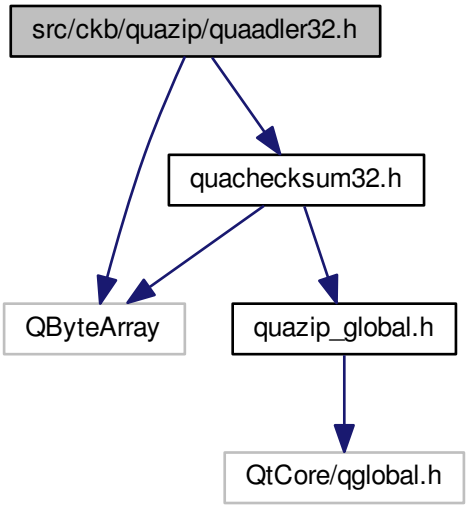

This graph shows which files directly or indirectly include this file:

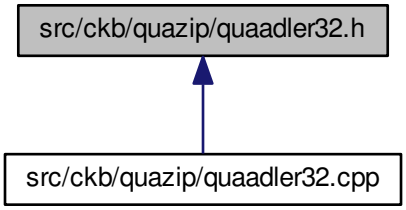

Data Structures

- class QuaAdler32

  Adler32 checksum.

13.89 src/ckb/quazip/quachecksum32.h File Reference

```
#include <QByteArray>
#include "quazip_global.h"
```

Include dependency graph for quachecksum32.h:

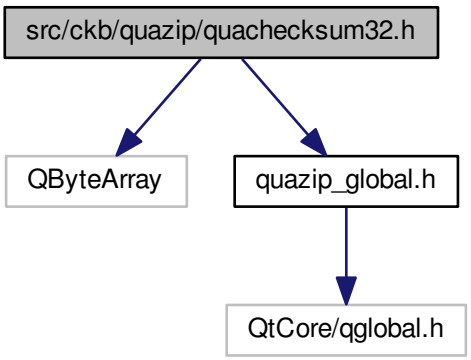

This graph shows which files directly or indirectly include this file:

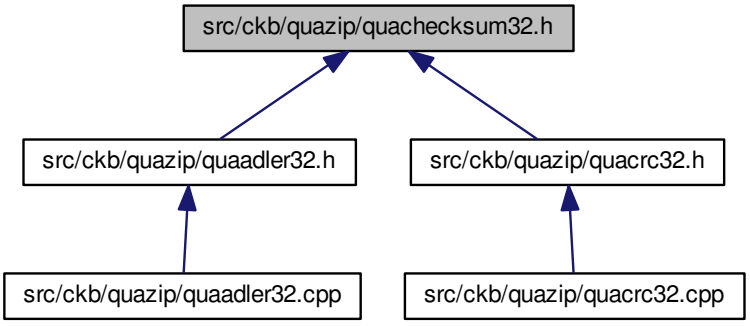

Data Structures

- class QuaChecksum32

  Checksum interface.

13.90 src/ckb/quazip/quacrc32.cpp File Reference

```
#include "quacrc32.h"
#include "zlib.h"
```

Include dependency graph for quacrc32.cpp:

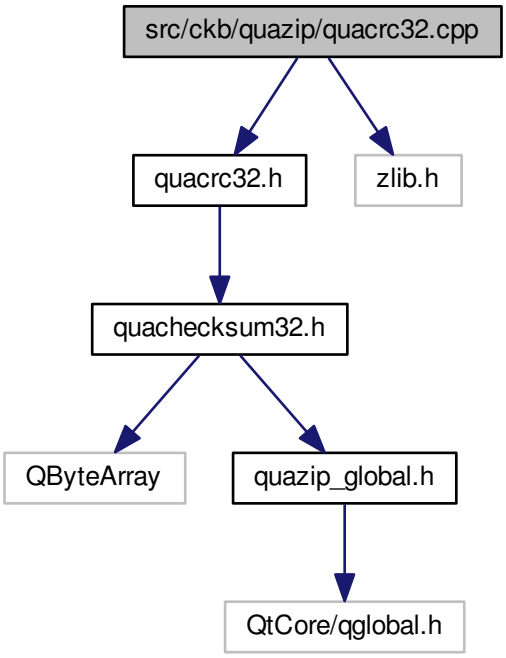

13.91 src/ckb/quazip/quacrc32.h File Reference

```
#include "quachecksum32.h"
```

Include dependency graph for quacrc32.h:

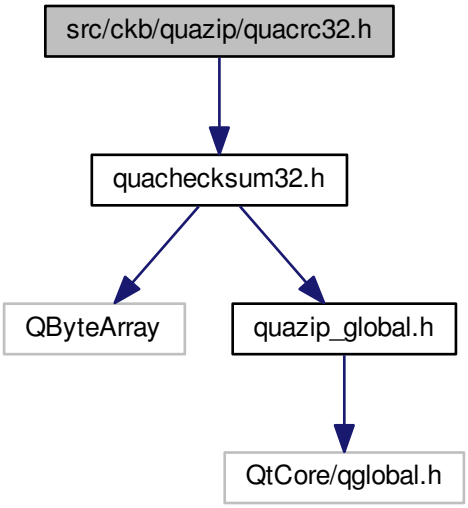

This graph shows which files directly or indirectly include this file:

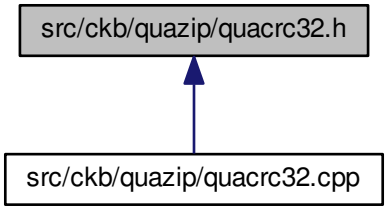

Data Structures

- class QuaCrc32

  CRC32 checksum.

13.92 src/ckb/quazip/quagzipfile.cpp File Reference

```
#include <QFile>
#include "quagzipfile.h"
```

Include dependency graph for quagzipfile.cpp:

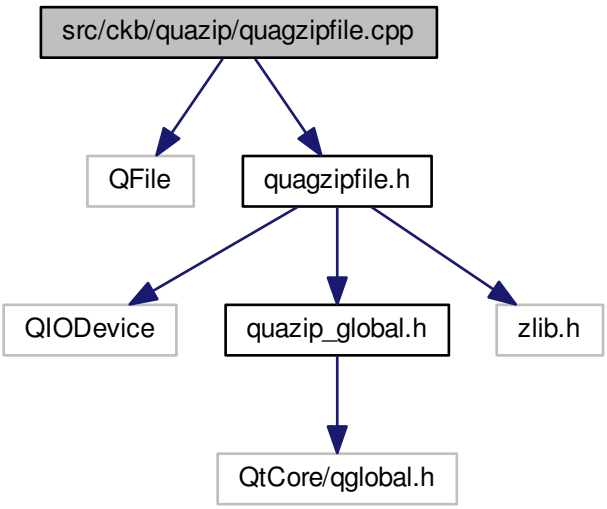

13.93 src/ckb/quazip/quagzipfile.h File Reference

```
#include <QIODevice>
#include "quazip_global.h"
#include <zlib.h>
```

Include dependency graph for quagzipfile.h:

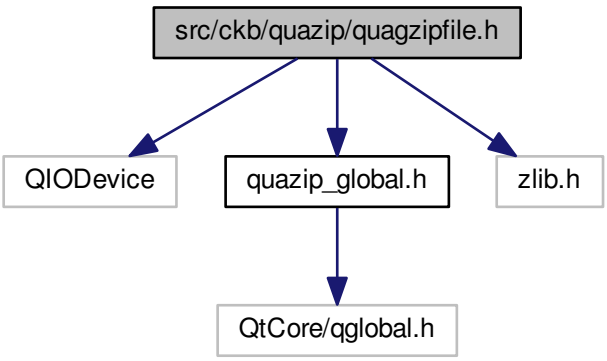

This graph shows which files directly or indirectly include this file:

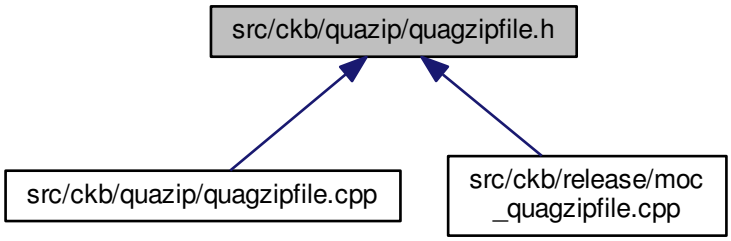

Data Structures

- class QuaGzipFile
  GZIP file.

13.94 src/ckb/quazip/quaziodevice.cpp File Reference

```
#include "quaziodevice.h"
```
Include dependency graph for quaziodevice.cpp:

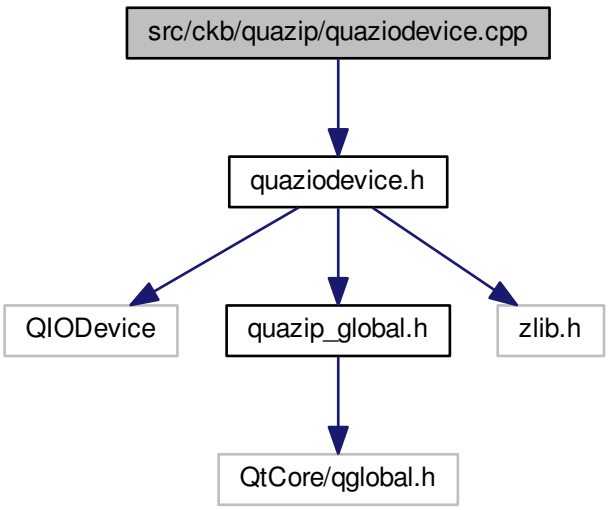

Macros

- #define QUAZIO_INBUFSIZE 4096

- #define QUAZIO_OUTBUFSIZE 4096

13.94.1 Macro Definition Documentation

13.94.1.1 #define QUAZIO_INBUFSIZE 4096

Definition at line 27 of file quaziodevice.cpp.

Referenced by QuaZIODevice::readData().

13.94.1.2 #define QUAZIO_OUTBUFSIZE 4096

Definition at line 28 of file quaziodevice.cpp.

Referenced by QuaZIODevice::flush(), and QuaZIODevice::writeData().

13.95 src/ckb/quazip/quaziodevice.h File Reference

```
#include <QIODevice>
#include "quazip_global.h"
#include <zlib.h>
```

Include dependency graph for quaziodevice.h:

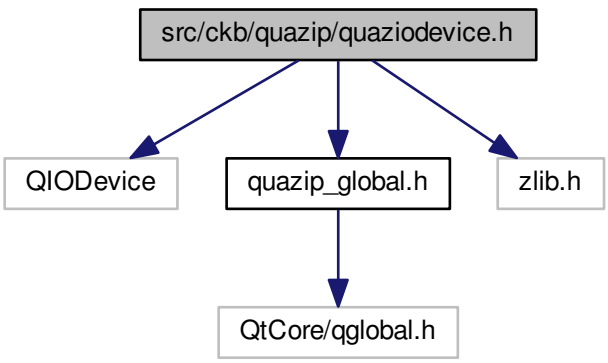

This graph shows which files directly or indirectly include this file:

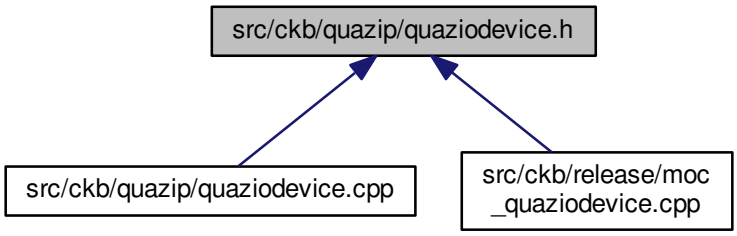

Data Structures

- class QuaZIODevice

  A class to compress/decompress QIODevice.

13.96 src/ckb/quazip/quazip.cpp File Reference

```
#include <QFile>
#include <QFlags>
#include <QHash>
#include "quazip.h"
```

Include dependency graph for quazip.cpp:

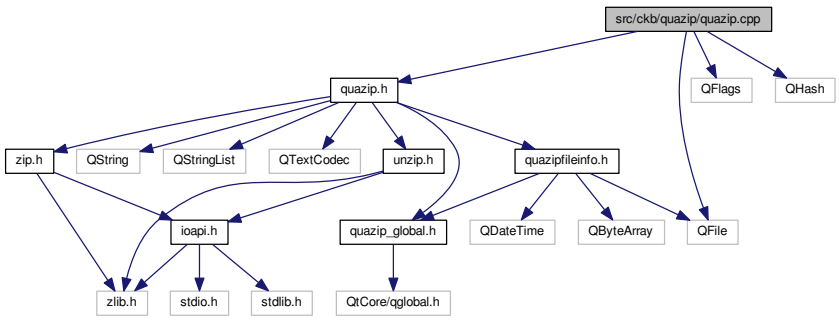

Data Structures

- class QuaZipPrivate

  All the internal stuff for the QuaZip class.

Functions

- template<typename TFileInfo >
  TFileInfo QuaZip_getFileInfo (QuaZip *zip, bool *ok)

- template<>
  QuaZipFileInfo QuaZip_getFileInfo (QuaZip *zip, bool *ok)
- template<>
  QuaZipFileInfo64 QuaZip_getFileInfo (QuaZip *zip, bool *ok)
- template<>
  QString QuaZip_getFileInfo (QuaZip *zip, bool *ok)

13.96.1 Function Documentation

13.96.1.1 template<typename TFileInfo > TFileInfo QuaZip_getFileInfo (QuaZip * *zip*, bool * *ok*)

Definition at line 663 of file quazip.cpp.

References QuaZip::getCurrentFileInfo(), and QuaZip::getCurrentFileName().

```
664 {
665     QuaZipFileInfo info;
666     *ok = zip->getCurrentFileInfo(&info);
667     return info;
668 }
```

Here is the call graph for this function:

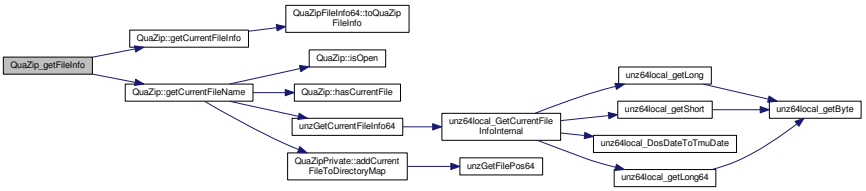

13.96.1.2 template<> QuaZipFileInfo QuaZip_getFileInfo (QuaZip * *zip*, bool * *ok*)

Definition at line 663 of file quazip.cpp.

References QuaZip::getCurrentFileInfo().

```
664 {
665     QuaZipFileInfo info;
666     *ok = zip->getCurrentFileInfo(&info);
667     return info;
668 }
```

Here is the call graph for this function:



13.96.1.3 template<> QuaZipFileInfo64 QuaZip_getFileInfo (QuaZip * *zip*, bool * *ok*)

Definition at line 671 of file quazip.cpp.

References QuaZip::getCurrentFileInfo().

```
672 {
673     QuaZipFileInfo64 info;
674     *ok = zip->getCurrentFileInfo(&info);
675     return info;
676 }
```

Here is the call graph for this function:



13.96.1.4 template<> QString QuaZip_getFileInfo (QuaZip * *zip*, bool * *ok*)

Definition at line 679 of file quazip.cpp.

References QuaZip::getCurrentFileName().

```
680 {
681     QString name = zip->getCurrentFileName();
682     *ok = !name.isEmpty();
683     return name;
684 }
```

Here is the call graph for this function:

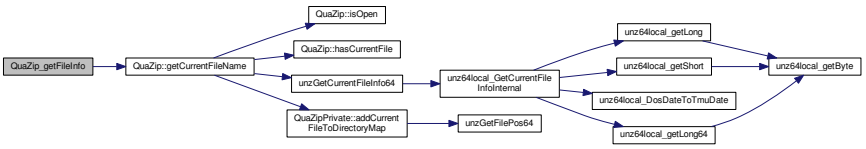

13.97 src/ckb/quazip/quazip.h File Reference

```
#include <QString>
#include <QStringList>
#include <QTextCodec>
#include "zip.h"
#include "unzip.h"
#include "quazip_global.h"
#include "quazipfileinfo.h"
```

Include dependency graph for quazip.h:

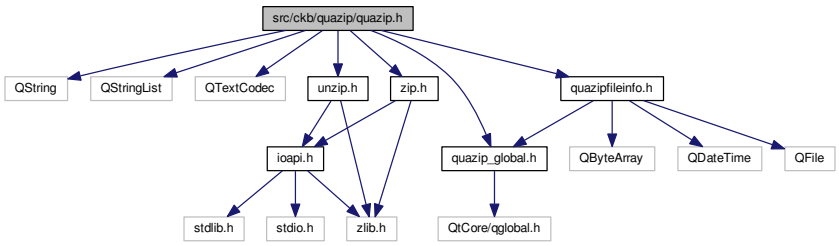

This graph shows which files directly or indirectly include this file:

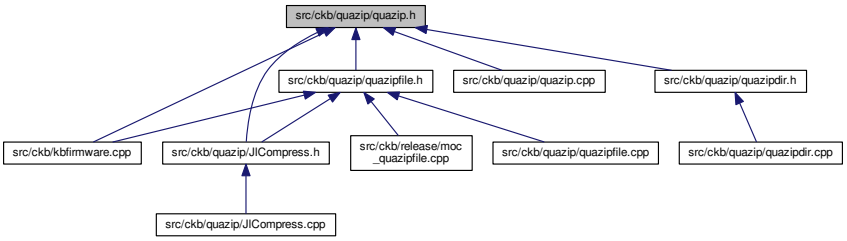

Data Structures

- class QuaZip

  ZIP archive.

Macros

- #define UNZ_OPENERROR -1000

13.97.1 Macro Definition Documentation

13.97.1.1 #define UNZ_OPENERROR -1000

Definition at line 41 of file quazip.h.

Referenced by QuaZip::open().

13.98 src/ckb/quazip/quazip_global.h File Reference

```
#include <QtCore/qglobal.h>
```

Include dependency graph for quazip_global.h:



This graph shows which files directly or indirectly include this file:

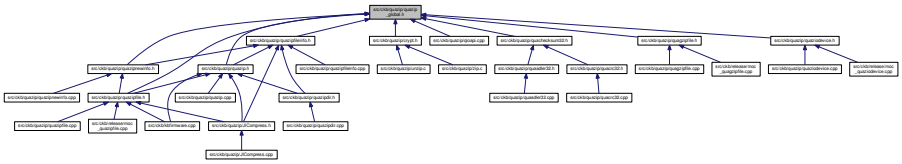

Macros

- #define QUAZIP_EXPORT Q_DECL_IMPORT

  This is automatically defined when building a static library, but when including QuaZip sources directly into a project, QUAZIP_STATIC should be defined explicitly to avoid possible troubles with unnecessary importing/exporting.
- #define UNUSED
- #define QUAZIP_EXTRA_NTFS_MAGIC 0x000Au
- #define QUAZIP_EXTRA_NTFS_TIME_MAGIC 0x0001u

13.98.1 Macro Definition Documentation

13.98.1.1 #define QUAZIP_EXPORT Q_DECL_IMPORT

When building a DLL with MSVC, QUAZIP_BUILD must be defined. qglobal.h takes care of defining Q_DECL_∗ correctly for msvc/gcc.

Definition at line 46 of file quazip_global.h.

13.98.1.2 #define QUAZIP_EXTRA_NTFS_MAGIC 0x000Au

Definition at line 56 of file quazip_global.h.

Referenced by getNTFSTime(), and setNTFSTime().

13.98.1.3 #define QUAZIP_EXTRA_NTFS_TIME_MAGIC 0x0001u

Definition at line 57 of file quazip_global.h.

Referenced by getNTFSTime(), and setNTFSTime().

13.98.1.4 #define UNUSED

Definition at line 53 of file quazip_global.h.

13.99 src/ckb/quazip/quazipdir.cpp File Reference

```
#include "quazipdir.h"
#include <QSet>
#include <QSharedData>
```

Include dependency graph for quazipdir.cpp:

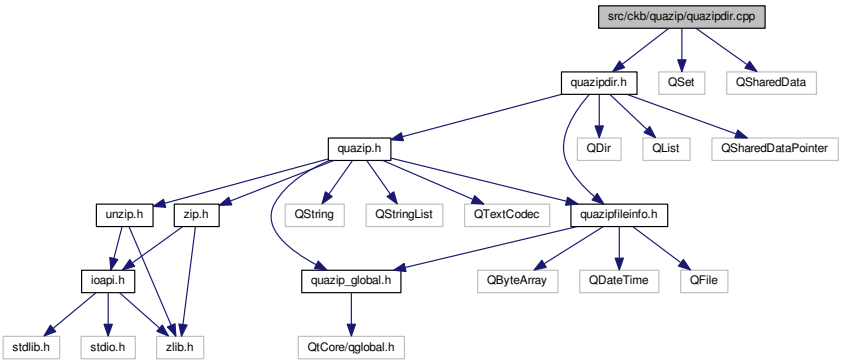

Functions

- QuaZipFileInfo64 QuaZipDir_getFileInfo (QuaZip *zip, bool *ok, const QString &relativeName, bool isReal)
- static void QuaZipDir_convertInfoList (const QList< QuaZipFileInfo64 > &from, QList< QuaZipFileInfo64 > &to)
- static void QuaZipDir_convertInfoList (const QList< QuaZipFileInfo64 > &from, QStringList &to)
- static void QuaZipDir_convertInfoList (const QList< QuaZipFileInfo64 > &from, QList< QuaZipFileInfo > &to)

13.99.1 Function Documentation

13.99.1.1 static void QuaZipDir_convertInfoList (const QList< QuaZipFileInfo64 > & *from*, QList< QuaZipFileInfo64 > & *to*) [static]

Definition at line 188 of file quazipdir.cpp.

```
190 {
191     to = from;
192 }
```

13.99.1.2 static void QuaZipDir_convertInfoList (const QList< QuaZipFileInfo64 > & *from*, QStringList & *to*) [static]

Definition at line 194 of file quazipdir.cpp.

```
196 {
197     to.clear();
198     for (QList<QuaZipFileInfo64>::const_iterator i = from.constBegin();
199             i != from.constEnd();
200             ++i) {
201         to.append(i->name);
202     }
203 }
```

13.99.1.3 static void QuaZipDir_convertInfoList (const QList< QuaZipFileInfo64 > & *from*, QList< QuaZipFileInfo > & *to*) [static]

Definition at line 205 of file quazipdir.cpp.

```
207 {
208     to.clear();
209     for (QList<QuaZipFileInfo64>::const_iterator i = from.constBegin();
210             i != from.constEnd();
211             ++i) {
212         QuaZipFileInfo info32;
213         i->toQuaZipFileInfo(info32);
214         to.append(info32);
215     }
216 }
```

13.99.1.4 QuaZipFileInfo64 QuaZipDir_getFileInfo (QuaZip * *zip*, bool * *ok*, const QString & *relativeName*, bool *isReal*)

Definition at line 165 of file quazipdir.cpp.

References QuaZipFileInfo64::compressedSize, QuaZipFileInfo64::crc, QuaZipFileInfo64::diskNumberStart, QuaZipFileInfo64::externalAttr, QuaZipFileInfo64::flags, QuaZip::getCurrentFileInfo(), QuaZipFileInfo64::internalAttr, QuaZipFileInfo64::method, QuaZipFileInfo64::name, QuaZipFileInfo64::uncompressedSize, QuaZipFileInfo64::versionCreated, and QuaZipFileInfo64::versionNeeded.

```
168 {
169     QuaZipFileInfo64 info;
170     if (isReal) {
171         *ok = zip->getCurrentFileInfo(&info);
172     } else {
173         *ok = true;
174         info.compressedSize = 0;
175         info.crc = 0;
176         info.diskNumberStart = 0;
177         info.externalAttr = 0;
178         info.flags = 0;
179         info.internalAttr = 0;
180         info.method = 0;
181         info.uncompressedSize = 0;
182         info.versionCreated = info.versionNeeded = 0;
183     }
184     info.name = relativeName;
185     return info;
186 }
```

Here is the call graph for this function:



13.100 src/ckb/quazip/quazipdir.h File Reference

```
#include "quazip.h"
#include "quazipfileinfo.h"
#include <QDir>
#include <QList>
#include <QSharedDataPointer>
```

Include dependency graph for quazipdir.h:

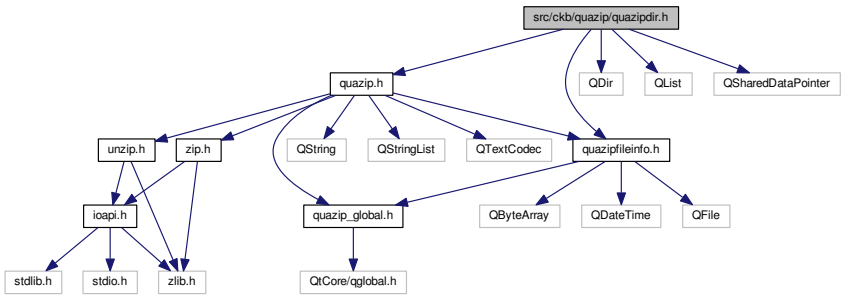

This graph shows which files directly or indirectly include this file:

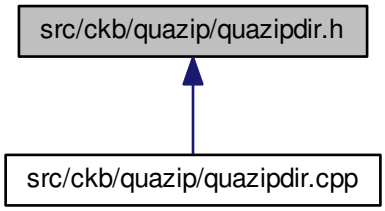

Data Structures

- class QuaZipDir

  Provides ZIP archive navigation.

13.101 src/ckb/quazip/quazipfile.cpp File Reference

```
#include "quazipfile.h"
```

Include dependency graph for quazipfile.cpp:

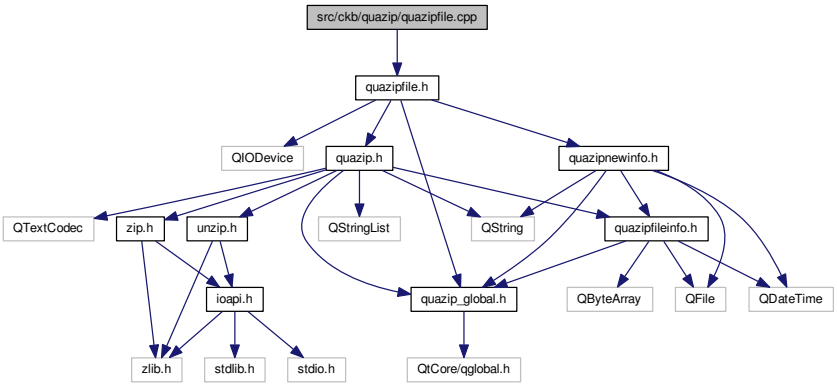

Data Structures

- class QuaZipFilePrivate

  The implementation class for QuaZip.

13.102 src/ckb/quazip/quazipfile.h File Reference

```
#include <QIODevice>
#include "quazip_global.h"
#include "quazip.h"
#include "quazipnewinfo.h"
```

Include dependency graph for quazipfile.h:

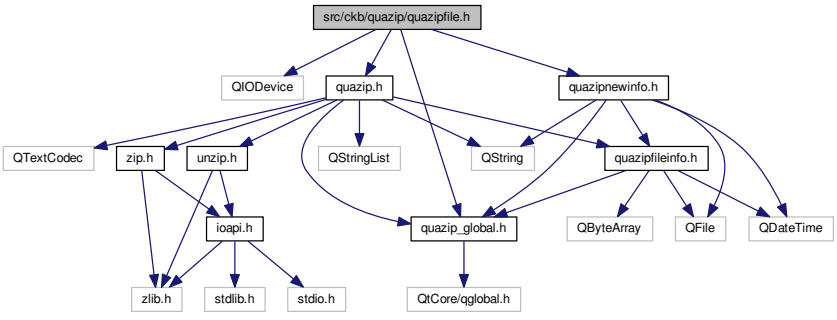

This graph shows which files directly or indirectly include this file:

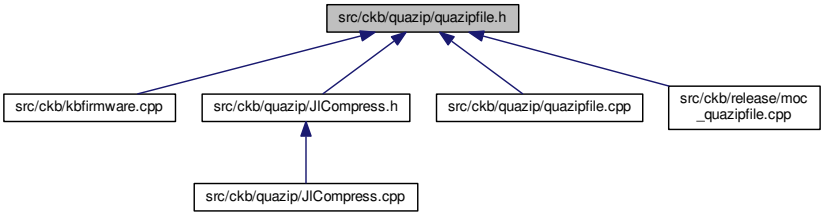

Data Structures

- class QuaZipFile

  A file inside ZIP archive.

13.103 src/ckb/quazip/quazipfileinfo.cpp File Reference

`#include "quazipfileinfo.h"`
Include dependency graph for quazipfileinfo.cpp:

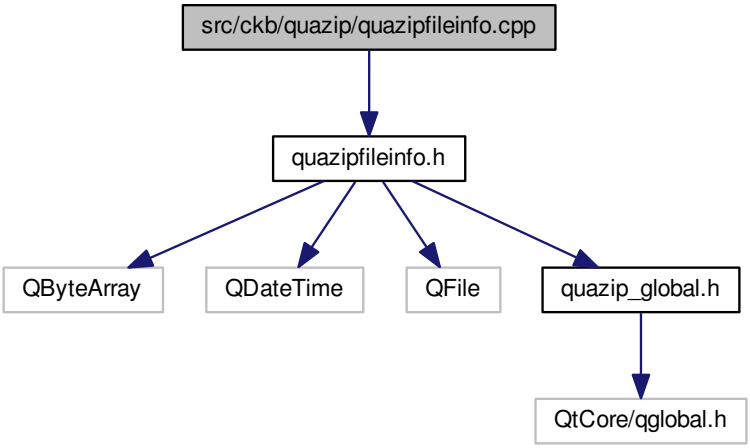

Functions

- static QFile::Permissions permissionsFromExternalAttr (quint32 externalAttr)
- static QDateTime getNTFSTime (const QByteArray &extra, int position, int *fineTicks)

13.103.1 Function Documentation

13.103.1.1 static QDateTime getNTFSTime (const QByteArray & *extra*, int *position*, int * *fineTicks*) [static]

Definition at line 92 of file quazipfileinfo.cpp.

References QUAZIP_EXTRA_NTFS_MAGIC, and QUAZIP_EXTRA_NTFS_TIME_MAGIC.

Referenced by QuaZipFileInfo64::getNTFSaTime(), QuaZipFileInfo64::getNTFScTime(), and QuaZipFileInfo64::getNTFSmTime().

```
94 {
95     QDateTime dateTime;
96     for (int i = 0; i <= extra.size() - 4; ) {
97         unsigned type = static_cast<unsigned>(static_cast<unsigned char>(
98                                                   extra.at(i)))
99                 | (static_cast<unsigned>(static_cast<unsigned char>(
100                                                    extra.at(i + 1))) << 8);
101         i += 2;
102         unsigned length = static_cast<unsigned>(static_cast<unsigned char>(
103                                                    extra.at(i)))
104                 | (static_cast<unsigned>(static_cast<unsigned char>(
105                                                    extra.at(i + 1))) << 8);
106         i += 2;
107         if (type == QUAZIP_EXTRA_NTFS_MAGIC && length >= 32) {
108             i += 4; // reserved
109             while (i <= extra.size() - 4) {
110                 unsigned tag = static_cast<unsigned>(
111                             static_cast<unsigned char>(extra.at(i)))
112                         | (static_cast<unsigned>(
113                                 static_cast<unsigned char>(extra.at(i + 1)))
114                             << 8);
115                 i += 2;
116                 int tagsize = static_cast<unsigned>(
117                             static_cast<unsigned char>(extra.at(i)))
118                         | (static_cast<unsigned>(
119                                 static_cast<unsigned char>(extra.at(i + 1)))
120                             << 8);
121                 i += 2;
122                 if (tag == QUAZIP_EXTRA_NTFS_TIME_MAGIC
123                         && tagsize >= position + 8) {
124                     i += position;
125                     quint64 mtime = static_cast<quint64>(
126                                 static_cast<unsigned char>(extra.at(i)))
127                         | (static_cast<quint64>(static_cast<unsigned char>(
128                                                    extra.at(i + 1))) << 8)
129                         | (static_cast<quint64>(static_cast<unsigned char>(
130                                                    extra.at(i + 2))) << 16)
131                         | (static_cast<quint64>(static_cast<unsigned char>(
132                                                    extra.at(i + 3))) << 24)
133                         | (static_cast<quint64>(static_cast<unsigned char>(
134                                                    extra.at(i + 4))) << 32)
135                         | (static_cast<quint64>(static_cast<unsigned char>(
136                                                    extra.at(i + 5))) << 40)
137                         | (static_cast<quint64>(static_cast<unsigned char>(
138                                                    extra.at(i + 6))) << 48)
139                         | (static_cast<quint64>(static_cast<unsigned char>(
140                                                    extra.at(i + 7))) << 56);
141                     // the NTFS time is measured from 1601 for whatever reason
142                     QDateTime base(QDate(1601, 1, 1), QTime(0, 0), Qt::UTC);
143                     dateTime = base.addMSecs(mtime / 10000);
144                     if (fineTicks != NULL) {
145                         *fineTicks = static_cast<int>(mtime % 10000);
146                     }
147                     i += tagsize - position;
148                 } else {
149                     i += tagsize;
150                 }
151 
152             }
153         } else {
154             i += length;
155         }
156     }
157     if (fineTicks != NULL && dateTime.isNull()) {
158         *fineTicks = 0;
159     }
160     return dateTime;
161 }
```

Here is the caller graph for this function:

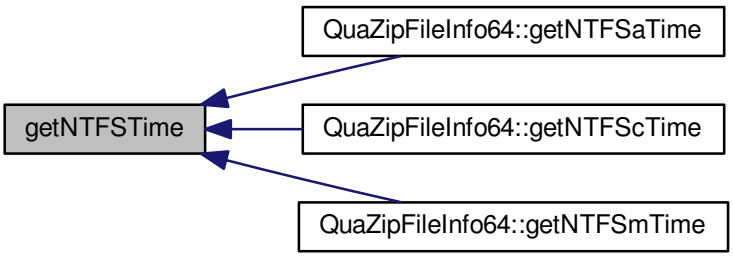

13.103.1.2 static QFile::Permissions permissionsFromExternalAttr (quint32 *externalAttr*) [static]

Definition at line 27 of file quazipfileinfo.cpp.

Referenced by QuaZipFileInfo::getPermissions(), and QuaZipFileInfo64::getPermissions().

```
27                                                                          {
28     quint32 uPerm = (externalAttr & 0xFFFF0000u) >> 16;
29     QFile::Permissions perm = 0;
30     if ((uPerm & 0400) != 0)
31         perm |= QFile::ReadOwner;
32     if ((uPerm & 0200) != 0)
33         perm |= QFile::WriteOwner;
34     if ((uPerm & 0100) != 0)
35         perm |= QFile::ExeOwner;
36     if ((uPerm & 0040) != 0)
37         perm |= QFile::ReadGroup;
38     if ((uPerm & 0020) != 0)
39         perm |= QFile::WriteGroup;
40     if ((uPerm & 0010) != 0)
41         perm |= QFile::ExeGroup;
42     if ((uPerm & 0004) != 0)
43         perm |= QFile::ReadOther;
44     if ((uPerm & 0002) != 0)
45         perm |= QFile::WriteOther;
46     if ((uPerm & 0001) != 0)
47         perm |= QFile::ExeOther;
48     return perm;
49
50 }
```

Here is the caller graph for this function:



13.104 src/ckb/quazip/quazipfileinfo.h File Reference

```
#include <QByteArray>
```

```
#include <QDateTime>
#include <QFile>
#include "quazip_global.h"
```

Include dependency graph for quazipfileinfo.h:

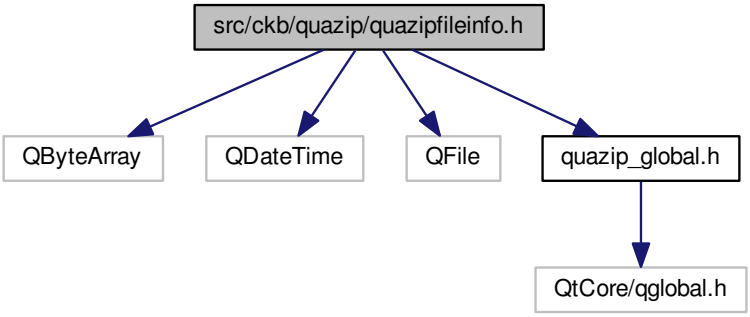

This graph shows which files directly or indirectly include this file:

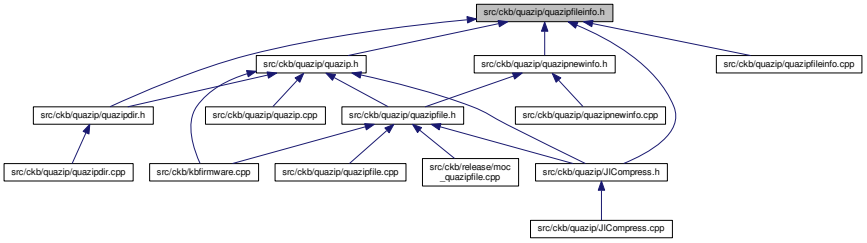

Data Structures

- struct QuaZipFileInfo

  Information about a file inside archive.

- struct QuaZipFileInfo64

  Information about a file inside archive (with zip64 support).

13.105 src/ckb/quazip/quazipnewinfo.cpp File Reference

```
#include <QFileInfo>
#include "quazipnewinfo.h"
#include <string.h>
```

Include dependency graph for quazipnewinfo.cpp:

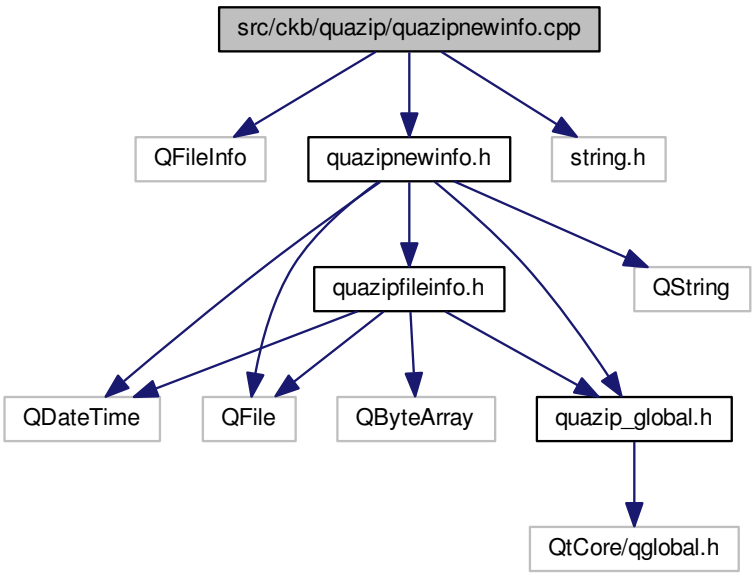

Functions

- static void QuaZipNewInfo_setPermissions (QuaZipNewInfo *info, QFile::Permissions perm, bool isDir)
- template<typename FileInfo >
  void QuaZipNewInfo_init (QuaZipNewInfo &self, const FileInfo &existing)
- static void setNTFSTime (QByteArray &extra, const QDateTime &time, int position, int fineTicks)

13.105.1 Function Documentation

13.105.1.1 template<typename FileInfo > void QuaZipNewInfo_init (QuaZipNewInfo & *self*, const FileInfo & *existing*)

Definition at line 57 of file quazipnewinfo.cpp.

Referenced by QuaZipNewInfo::QuaZipNewInfo().

```
58 {
59     self.name = existing.name;
60     self.dateTime = existing.dateTime;
61     self.internalAttr = existing.internalAttr;
62     self.externalAttr = existing.externalAttr;
63     self.comment = existing.comment;
64     self.extraLocal = existing.extra;
65     self.extraGlobal = existing.extra;
66     self.uncompressedSize = existing.uncompressedSize;
67 }
```

Here is the caller graph for this function:



13.105.1.2 static void QuaZipNewInfo_setPermissions (QuaZipNewInfo * *info*, QFile::Permissions *perm*, bool *isDir*) [static]

Definition at line 31 of file quazipnewinfo.cpp.

References QuaZipNewInfo::externalAttr.

Referenced by QuaZipNewInfo::QuaZipNewInfo(), QuaZipNewInfo::setFilePermissions(), and QuaZipNewInfo::setPermissions().

```
33 {
34     quint32 uPerm = isDir ? 0040000 : 0100000;
35     if ((perm & QFile::ReadOwner) != 0)
36         uPerm |= 0400;
37     if ((perm & QFile::WriteOwner) != 0)
38         uPerm |= 0200;
39     if ((perm & QFile::ExeOwner) != 0)
40         uPerm |= 0100;
41     if ((perm & QFile::ReadGroup) != 0)
42         uPerm |= 0040;
43     if ((perm & QFile::WriteGroup) != 0)
44         uPerm |= 0020;
45     if ((perm & QFile::ExeGroup) != 0)
46         uPerm |= 0010;
47     if ((perm & QFile::ReadOther) != 0)
48         uPerm |= 0004;
49     if ((perm & QFile::WriteOther) != 0)
50         uPerm |= 0002;
51     if ((perm & QFile::ExeOther) != 0)
52         uPerm |= 0001;
53     info->externalAttr = (info->externalAttr & ~0xFFFF0000u) | (uPerm << 16);
54 }
```

Here is the caller graph for this function:

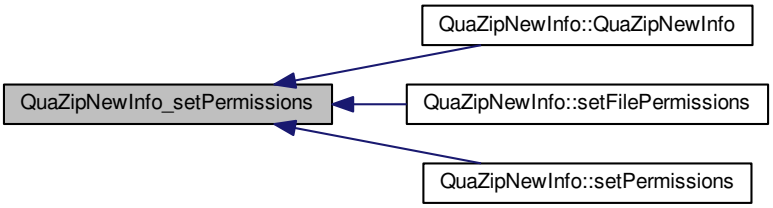

13.105.1.3 static void setNTFSTime (QByteArray & *extra*, const QDateTime & *time*, int *position*, int *fineTicks*) [static]

Definition at line 131 of file quazipnewinfo.cpp.

References QUAZIP_EXTRA_NTFS_MAGIC, and QUAZIP_EXTRA_NTFS_TIME_MAGIC.

Referenced by QuaZipNewInfo::setFileNTFSaTime(), QuaZipNewInfo::setFileNTFScTime(), and QuaZipNewInfo::setFileNTFSmTime().

```
132                                     {
133     int ntfsPos = -1, timesPos = -1;
134     unsigned ntfsLength = 0, ntfsTimesLength = 0;
135     for (int i = 0; i <= extra.size() - 4; ) {
136         unsigned type = static_cast<unsigned>(static_cast<unsigned char>(
137                                                 extra.at(i)))
138                 | (static_cast<unsigned>(static_cast<unsigned char>(
139                                                 extra.at(i + 1))) << 8);
140         i += 2;
141         unsigned length = static_cast<unsigned>(static_cast<unsigned char>(
142                                                 extra.at(i)))
143                 | (static_cast<unsigned>(static_cast<unsigned char>(
144                                                 extra.at(i + 1))) << 8);
145         i += 2;
146         if (type == QUAZIP_EXTRA_NTFS_MAGIC) {
147             ntfsPos = i - 4; // the beginning of the NTFS record
148             ntfsLength = length;
149             if (length <= 4) {
150                 break; // no times in the NTFS record
151             }
152             i += 4; // reserved
153             while (i <= extra.size() - 4) {
154                 unsigned tag = static_cast<unsigned>(
155                             static_cast<unsigned char>(extra.at(i)))
156                         | (static_cast<unsigned>(
157                                 static_cast<unsigned char>(extra.at(i + 1)))
158                             << 8);
159                 i += 2;
160                 unsigned tagsize = static_cast<unsigned>(
161                             static_cast<unsigned char>(extra.at(i)))
162                         | (static_cast<unsigned>(
163                                 static_cast<unsigned char>(extra.at(i + 1)))
164                             << 8);
165                 i += 2;
166                 if (tag == QUAZIP_EXTRA_NTFS_TIME_MAGIC) {
167                     timesPos = i - 4; // the beginning of the NTFS times tag
168                     ntfsTimesLength = tagsize;
169                     break;
170                 } else {
171                     i += tagsize;
172                 }
173             }
174             break; // I ain't going to search for yet another NTFS record!
175         } else {
176             i += length;
177         }
178     }
179     if (ntfsPos == -1) {
180         // No NTFS record, need to create one.
181         ntfsPos = extra.size();
182         ntfsLength = 32;
183         extra.resize(extra.size() + 4 + ntfsLength);
184         // the NTFS record header
185         extra[ntfsPos] = static_cast<char>(QUAZIP_EXTRA_NTFS_MAGIC);
186         extra[ntfsPos + 1] = static_cast<char>(QUAZIP_EXTRA_NTFS_MAGIC >> 8);
187         extra[ntfsPos + 2] = 32; // the 2-byte size in LittleEndian
188         extra[ntfsPos + 3] = 0;
189         // zero the record
190         memset(extra.data() + ntfsPos + 4, 0, 32);
191         timesPos = ntfsPos + 8;
192         // now set the tag data
193         extra[timesPos] = static_cast<char>(QUAZIP_EXTRA_NTFS_TIME_MAGIC);
194         extra[timesPos + 1] = static_cast<char>(QUAZIP_EXTRA_NTFS_TIME_MAGIC
195                                                 >> 8);
196         // the size:
197         extra[timesPos + 2] = 24;
198         extra[timesPos + 3] = 0;
199         ntfsTimesLength = 24;
200     }
201     if (timesPos == -1) {
202         // No time tag in the NTFS record, need to add one.
203         timesPos = ntfsPos + 4 + ntfsLength;
204         extra.resize(extra.size() + 28);
205         // Now we need to move the rest of the field
206         // (possibly zero bytes, but memmove() is OK with that).
207         // 0 ......... ntfsPos .. ntfsPos + 4   ... timesPos
208         // <some data> <header>   <NTFS record>     <need-to-move data>    <end>
209         memmove(extra.data() + timesPos + 28, extra.data() + timesPos,
210                 extra.size() - 28 - timesPos);
211         ntfsLength += 28;
212         // now set the tag data
```

```
213         extra[timesPos] = static_cast<char>(QUAZIP_EXTRA_NTFS_TIME_MAGIC);
214         extra[timesPos + 1] = static_cast<char>(QUAZIP_EXTRA_NTFS_TIME_MAGIC
215                                                 >> 8);
216         // the size:
217         extra[timesPos + 2] = 24;
218         extra[timesPos + 3] = 0;
219         // zero the record
220         memset(extra.data() + timesPos + 4, 0, 24);
221         ntfsTimesLength = 24;
222     }
223     if (ntfsTimesLength < 24) {
224         // Broken times field. OK, this is really unlikely, but just in case...
225         size_t timesEnd = timesPos + 4 + ntfsTimesLength;
226         extra.resize(extra.size() + (24 - ntfsTimesLength));
227         // Move it!
228         // 0 ......... timesPos .... timesPos + 4 .. timesEnd
229         // <some data> <time header> <broken times> <need-to-move data> <end>
230         memmove(extra.data() + timesEnd + (24 - ntfsTimesLength),
231                 extra.data() + timesEnd,
232                 extra.size() - (24 - ntfsTimesLength) - timesEnd);
233         // Now we have to increase the NTFS record and time tag lengths.
234         ntfsLength += (24 - ntfsTimesLength);
235         ntfsTimesLength = 24;
236         extra[ntfsPos + 2] = static_cast<char>(ntfsLength);
237         extra[ntfsPos + 3] = static_cast<char>(ntfsLength >> 8);
238         extra[timesPos + 2] = static_cast<char>(ntfsTimesLength);
239         extra[timesPos + 3] = static_cast<char>(ntfsTimesLength >> 8);
240     }
241     QDateTime base(QDate(1601, 1, 1), QTime(0, 0), Qt::UTC);
242 #if (QT_VERSION >= 0x040700)
243     quint64 ticks = base.msecsTo(time) * 10000 + fineTicks;
244 #else
245     QDateTime utc = time.toUTC();
246     quint64 ticks = (static_cast<qint64>(base.date().daysTo(utc.date()))
247             * Q_INT64_C(86400000)
248             + static_cast<qint64>(base.time().msecsTo(utc.time())))
249         * Q_INT64_C(10000) + fineTicks;
250 #endif
251     extra[timesPos + 4 + position] = static_cast<char>(ticks);
252     extra[timesPos + 5 + position] = static_cast<char>(ticks >> 8);
253     extra[timesPos + 6 + position] = static_cast<char>(ticks >> 16);
254     extra[timesPos + 7 + position] = static_cast<char>(ticks >> 24);
255     extra[timesPos + 8 + position] = static_cast<char>(ticks >> 32);
256     extra[timesPos + 9 + position] = static_cast<char>(ticks >> 40);
257     extra[timesPos + 10 + position] = static_cast<char>(ticks >> 48);
258     extra[timesPos + 11 + position] = static_cast<char>(ticks >> 56);
259 }
```

Here is the caller graph for this function:

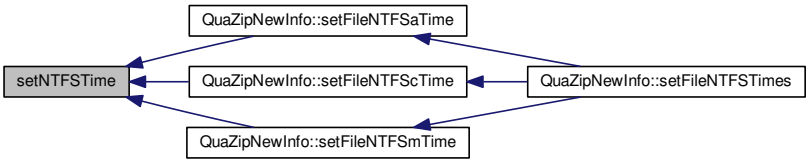

13.106 src/ckb/quazip/quazipnewinfo.h File Reference

```
#include <QDateTime>
#include <QFile>
#include <QString>
#include "quazip_global.h"
#include "quazipfileinfo.h"
```

Include dependency graph for quazipnewinfo.h:

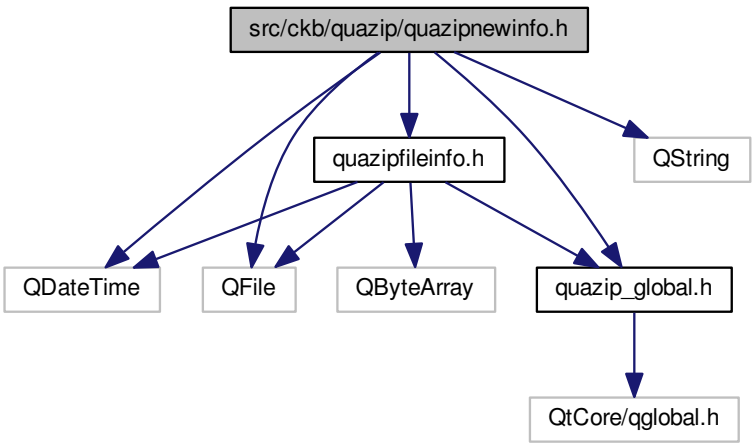

This graph shows which files directly or indirectly include this file:

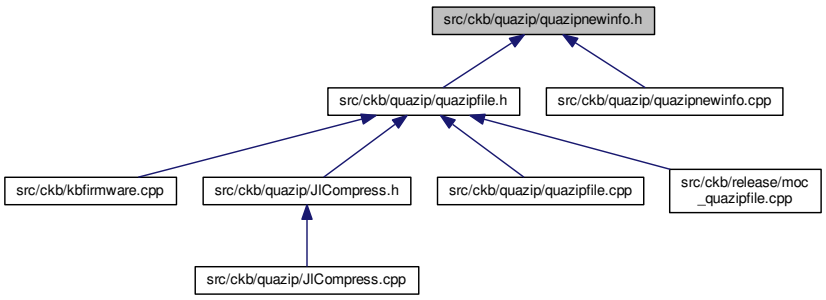

Data Structures

- struct QuaZipNewInfo

  Information about a file to be created.

13.107 src/ckb/quazip/unzip.c File Reference

```
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include "zlib.h"
#include "unzip.h"
#include <errno.h>
#include "crypt.h"
```

Include dependency graph for unzip.c:

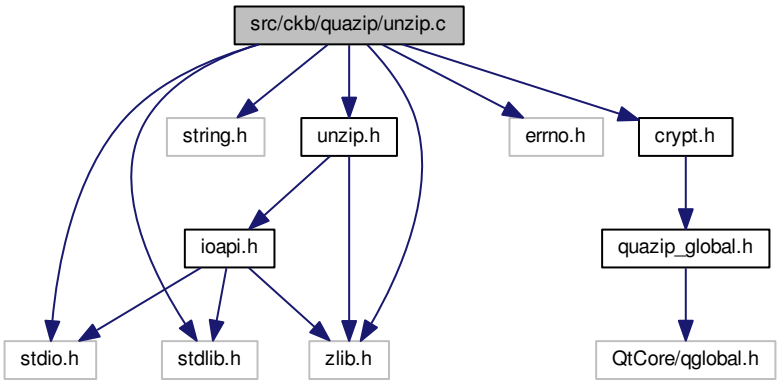

Data Structures

- struct unz_file_info64_internal_s
- struct file_in_zip64_read_info_s
- struct unz64_s

Macros

- #define local static
- #define CASESENSITIVITYDEFAULT_NO
- #define UNZ_BUFSIZE (16384)
- #define UNZ_MAXFILENAMEINZIP (256)
- #define ALLOC(size) (malloc(size))
- #define TRYFREE(p) {if (p) free(p);}
- #define SIZECENTRALDIRITEM (0x2e)
- #define SIZEZIPLOCALHEADER (0x1e)
- #define CASESENSITIVITYDEFAULTVALUE 2
- #define STRCMPCASENOSENTIVEFUNCTION strcmpcasenosensitive_internal
- #define BUFREADCOMMENT (0x400)

Typedefs

- typedef uLongf z_crc_t
- typedef struct unz_file_info64_internal_s unz_file_info64_internal

Functions

- static int unz64local_getByte _Z_OF ((const zlib_filefunc64_32_def *pzlib_filefunc_def, voidpf filestream, int *pi))
- static int unz64local_getByte (const zlib_filefunc64_32_def *pzlib_filefunc_def, voidpf filestream, int *pi)
- static int unz64local_getShort _Z_OF ((const zlib_filefunc64_32_def *pzlib_filefunc_def, voidpf filestream, uLong *pX))

- static int unz64local_getShort (const zlib_filefunc64_32_def *pzlib_filefunc_def, voidpf filestream, uLong *pX)
- static int unz64local_getLong (const zlib_filefunc64_32_def *pzlib_filefunc_def, voidpf filestream, uLong *pX)
- static int unz64local_getLong64 _Z_OF ((const zlib_filefunc64_32_def *pzlib_filefunc_def, voidpf filestream, ZPOS64_T *pX))
- static int unz64local_getLong64 (const zlib_filefunc64_32_def *pzlib_filefunc_def, voidpf filestream, ZPOS64_T *pX)
- static int strcmpcasenosensitive_internal (const char *fileName1, const char *fileName2)
- int ZEXPORT unzStringFileNameCompare (const char *fileName1, const char *fileName2, int iCaseSensitivity)
- static ZPOS64_T unz64local_SearchCentralDir _Z_OF ((const zlib_filefunc64_32_def *pzlib_filefunc_def, voidpf filestream))
- static ZPOS64_T unz64local_SearchCentralDir (const zlib_filefunc64_32_def *pzlib_filefunc_def, voidpf filestream)
- static ZPOS64_T unz64local_SearchCentralDir64 (const zlib_filefunc64_32_def *pzlib_filefunc_def, voidpf filestream)
- unzFile unzOpenInternal (voidpf file, zlib_filefunc64_32_def *pzlib_filefunc64_32_def, int is64bitOpenFunction, unsigned flags)
- unzFile ZEXPORT unzOpen2 (voidpf file, zlib_filefunc_def *pzlib_filefunc32_def)
- unzFile ZEXPORT unzOpen2_64 (voidpf file, zlib_filefunc64_def *pzlib_filefunc_def)
- unzFile ZEXPORT unzOpen (voidpf file)
- unzFile ZEXPORT unzOpen64 (voidpf file)
- int ZEXPORT unzClose (unzFile file)
- int ZEXPORT unzGetGlobalInfo64 (unzFile file, unz_global_info64 *pglobal_info)
- int ZEXPORT unzGetGlobalInfo (unzFile file, unz_global_info *pglobal_info32)
- static void unz64local_DosDateToTmuDate (ZPOS64_T ulDosDate, tm_unz *ptm)
- static int unz64local_GetCurrentFileInfoInternal _Z_OF ((unzFile file, unz_file_info64 *pfile_info, unz_file_info64_internal *pfile_info_internal, char *szFileName, uLong fileNameBufferSize, void *extraField, uLong extraFieldBufferSize, char *szComment, uLong commentBufferSize))
- static int unz64local_GetCurrentFileInfoInternal (unzFile file, unz_file_info64 *pfile_info, unz_file_info64_internal *pfile_info_internal, char *szFileName, uLong fileNameBufferSize, void *extraField, uLong extraFieldBufferSize, char *szComment, uLong commentBufferSize)
- int ZEXPORT unzGetCurrentFileInfo64 (unzFile file, unz_file_info64 *pfile_info, char *szFileName, uLong fileNameBufferSize, void *extraField, uLong extraFieldBufferSize, char *szComment, uLong commentBufferSize)
- int ZEXPORT unzGetCurrentFileInfo (unzFile file, unz_file_info *pfile_info, char *szFileName, uLong fileNameBufferSize, void *extraField, uLong extraFieldBufferSize, char *szComment, uLong commentBufferSize)
- int ZEXPORT unzGoToFirstFile (unzFile file)
- int ZEXPORT unzGoToNextFile (unzFile file)
- int ZEXPORT unzLocateFile (unzFile file, const char *szFileName, int iCaseSensitivity)
- int ZEXPORT unzGetFilePos64 (unzFile file, unz64_file_pos *file_pos)
- int ZEXPORT unzGetFilePos (unzFile file, unz_file_pos *file_pos)
- int ZEXPORT unzGoToFilePos64 (unzFile file, const unz64_file_pos *file_pos)
- int ZEXPORT unzGoToFilePos (unzFile file, unz_file_pos *file_pos)
- static int unz64local_CheckCurrentFileCoherencyHeader (unz64_s *s, uInt *piSizeVar, ZPOS64_T *poffset_local_extrafield, uInt *psize_local_extrafield)
- int ZEXPORT unzOpenCurrentFile3 (unzFile file, int *method, int *level, int raw, const char *password)
- int ZEXPORT unzOpenCurrentFile (unzFile file)
- int ZEXPORT unzOpenCurrentFilePassword (unzFile file, const char *password)
- int ZEXPORT unzOpenCurrentFile2 (unzFile file, int *method, int *level, int raw)
- ZPOS64_T ZEXPORT unzGetCurrentFileZStreamPos64 (unzFile file)

  Addition for GDAL : START.
- int ZEXPORT unzReadCurrentFile (unzFile file, voidp buf, unsigned len)

Addition for GDAL : END.

- z_off_t ZEXPORT unztell (unzFile file)
- ZPOS64_T ZEXPORT unztell64 (unzFile file)
- int ZEXPORT unzeof (unzFile file)
- int ZEXPORT unzGetLocalExtrafield (unzFile file, voidp buf, unsigned len)
- int ZEXPORT unzCloseCurrentFile (unzFile file)
- int ZEXPORT unzGetGlobalComment (unzFile file, char *szComment, uLong uSizeBuf)
- ZPOS64_T ZEXPORT unzGetOffset64 (unzFile file)
- uLong ZEXPORT unzGetOffset (unzFile file)
- int ZEXPORT unzSetOffset64 (unzFile file, ZPOS64_T pos)
- int ZEXPORT unzSetOffset (unzFile file, uLong pos)
- int ZEXPORT unzSetFlags (unzFile file, unsigned flags)
- int ZEXPORT unzClearFlags (unzFile file, unsigned flags)

Variables

- const char unz_copyright []

13.107.1 Data Structure Documentation

13.107.1.1 struct unz_file_info64_internal_s

Definition at line 128 of file unzip.c.

Collaboration diagram for unz_file_info64_internal_s:

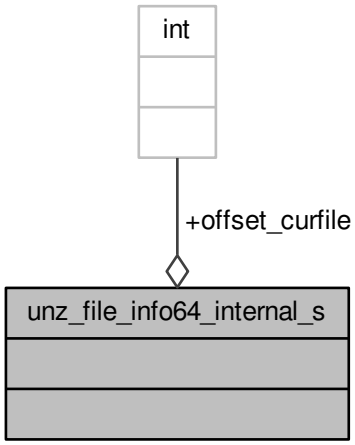

Data Fields

ZPOS64_T	offset_curfile	

13.107.1.2 struct file_in_zip64_read_info_s

Definition at line 136 of file unzip.c.

Collaboration diagram for file_in_zip64_read_info_s:

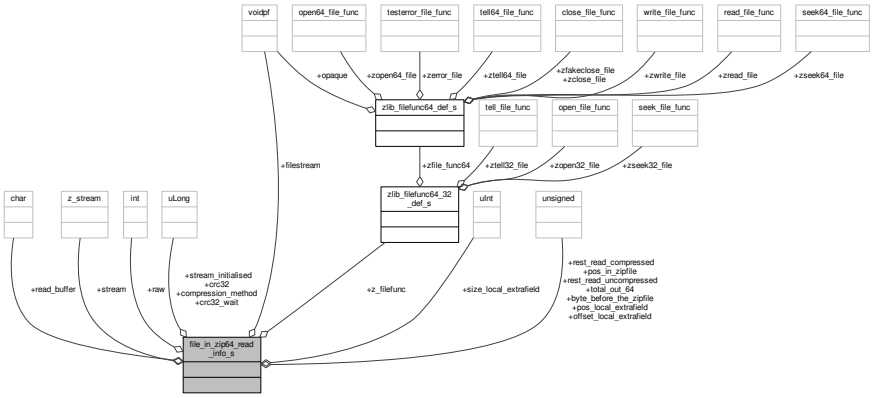

Data Fields

ZPOS64_T	byte_before_the-_zipfile	
uLong	compression_-method	
uLong	crc32	
uLong	crc32_wait	
voidpf	filestream	
ZPOS64_T	offset_local_-extrafield	
ZPOS64_T	pos_in_zipfile	
ZPOS64_T	pos_local_-extrafield	
int	raw	
char *	read_buffer	
ZPOS64_T	rest_read_-compressed	
ZPOS64_T	rest_read_-uncompressed	
uInt	size_local_-extrafield	
z_stream	stream	
uLong	stream_-initialised	
ZPOS64_T	total_out_64	
zlib_filefunc64_-32_def	z_filefunc	

13.107.1.3 struct unz64_s

Definition at line 167 of file unzip.c.

Collaboration diagram for unz64_s:

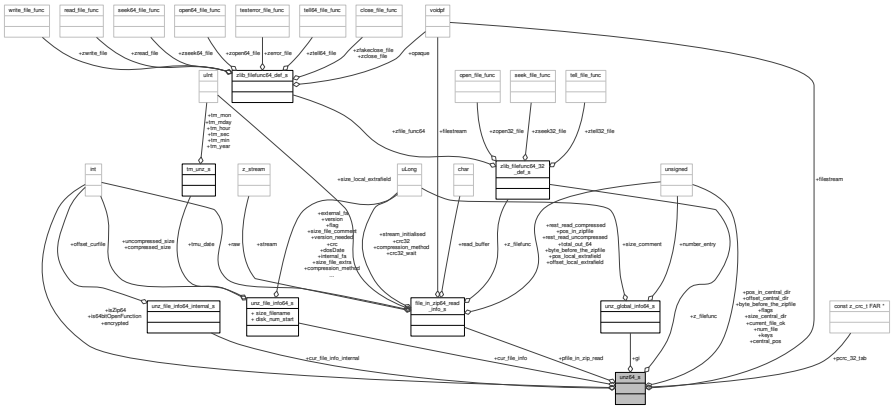

Data Fields

ZPOS64_T	byte_before_the-_zipfile	
ZPOS64_T	central_pos	
unz_file_info64	cur_file_info	
unz_file_info64_-internal	cur_file_info_-internal	
ZPOS64_T	current_file_ok	
int	encrypted	
voidpf	filestream	
unsigned	flags	
unz_global_-info64	gi	
int	is64bitOpen-Function	
int	isZip64	
unsigned long	keys[3]	
ZPOS64_T	num_file	
ZPOS64_T	offset_central_-dir	
const z_crc_t FAR *	pcrc_32_tab	
file_in_zip64_-read_info_s *	pfile_in_zip_read	
ZPOS64_T	pos_in_central_-dir	
ZPOS64_T	size_central_dir	
zlib_filefunc64_-32_def	z_filefunc	

13.107.2 Macro Definition Documentation

13.107.2.1 #define ALLOC(*size*) (malloc(size))

Definition at line 114 of file unzip.c.

Referenced by unz64local_SearchCentralDir(), unz64local_SearchCentralDir64(), unzOpenCurrentFile3(), and

unzOpenInternal().

13.107.2.2 #define BUFREADCOMMENT (0x400)

Definition at line 408 of file unzip.c.

Referenced by unz64local_SearchCentralDir(), and unz64local_SearchCentralDir64().

13.107.2.3 #define CASESENSITIVITYDEFAULT_NO

Definition at line 100 of file unzip.c.

13.107.2.4 #define CASESENSITIVITYDEFAULTVALUE 2

Definition at line 375 of file unzip.c.

Referenced by unzStringFileNameCompare().

13.107.2.5 #define local static

Definition at line 93 of file unzip.c.

13.107.2.6 #define SIZECENTRALDIRITEM (0x2e)

Definition at line 120 of file unzip.c.

Referenced by unzGoToNextFile().

13.107.2.7 #define SIZEZIPLOCALHEADER (0x1e)

Definition at line 121 of file unzip.c.

Referenced by unz64local_CheckCurrentFileCoherencyHeader(), and unzOpenCurrentFile3().

13.107.2.8 #define STRCMPCASENOSENTIVEFUNCTION strcmpcasenosensitive_internal

Definition at line 381 of file unzip.c.

Referenced by unzStringFileNameCompare().

13.107.2.9 #define TRYFREE(*p*) {if (p) free(p);}

Definition at line 117 of file unzip.c.

Referenced by unz64local_SearchCentralDir(), unz64local_SearchCentralDir64(), unzClose(), unzCloseCurrentFile(), and unzOpenCurrentFile3().

13.107.2.10 #define UNZ_BUFSIZE (16384)

Definition at line 106 of file unzip.c.

Referenced by unzOpenCurrentFile3(), and unzReadCurrentFile().

13.107.2.11 #define UNZ_MAXFILENAMEINZIP (256)

Definition at line 110 of file unzip.c.

Referenced by unzLocateFile().

13.107.3 Typedef Documentation

13.107.3.1 typedef struct unz_file_info64_internal_s unz_file_info64_internal

13.107.3.2 typedef uLongf z_crc_t

Definition at line 76 of file unzip.c.

13.107.4 Function Documentation

13.107.4.1 static int unz64local_getByte _Z_OF ((const zlib_filefunc64_32_def *pzlib_filefunc_def, voidpf filestream, int *pi)) [static]

13.107.4.2 static int unz64local_getShort _Z_OF ((const zlib_filefunc64_32_def *pzlib_filefunc_def, voidpf filestream, uLong *pX)) [static]

13.107.4.3 static int unz64local_getLong64 _Z_OF ((const zlib_filefunc64_32_def *pzlib_filefunc_def, voidpf filestream, ZPOS64_T *pX)) [static]

13.107.4.4 static ZPOS64_T unz64local_SearchCentralDir _Z_OF ((const zlib_filefunc64_32_def *pzlib_filefunc_def, voidpf filestream)) [static]

13.107.4.5 static int unz64local_GetCurrentFileInfoInternal _Z_OF ((unzFile file, unz_file_info64 *pfile_info, unz_file_info64_internal *pfile_info_internal, char *szFileName, uLong fileNameBufferSize, void *extraField, uLong extraFieldBufferSize, char *szComment, uLong commentBufferSize)) [static]

13.107.4.6 static int strcmpcasenosensitive_internal (const char * *fileName1*, const char * *fileName2*) [static]

Definition at line 352 of file unzip.c.

```
353 {
354     for (;;)
355     {
356         char c1=*(fileName1++);
357         char c2=*(fileName2++);
358         if ((c1>='a') && (c1<='z'))
359             c1 -= 0x20;
360         if ((c2>='a') && (c2<='z'))
361             c2 -= 0x20;
362         if (c1=='\0')
363             return ((c2=='\0') ? 0 : -1);
364         if (c2=='\0')
365             return 1;
366         if (c1<c2)
367             return -1;
368         if (c1>c2)
369             return 1;
370     }
371 }
```

13.107.4.7 static int unz64local_CheckCurrentFileCoherencyHeader (unz64_s * *s*, uInt * *piSizeVar*, ZPOS64_T * *poffset_local_extrafield*, uInt * *psize_local_extrafield*) [static]

Definition at line 1393 of file unzip.c.

References unz64_s::byte_before_the_zipfile, unz_file_info64_s::compressed_size, unz_file_info64_s::compression_method, unz_file_info64_s::crc, unz64_s::cur_file_info, unz64_s::cur_file_info_internal, unz64_s::filestream, unz_file_info64_internal_s::offset_curfile, unz_file_info64_s::size_filename, SIZEZIPLOCALHEADER, unz_file_info64_s::uncompressed_size, unz64local_getLong(), unz64local_getShort(), UNZ_BADZIPFILE, UNZ_ERRNO, UNZ_OK, Z_BZIP2ED, unz64_s::z_filefunc, ZLIB_FILEFUNC_SEEK_SET, and ZSEEK64.

Referenced by unzOpenCurrentFile3().

```
1396 {
1397     uLong uMagic,uData,uFlags;
1398     uLong size_filename;
1399     uLong size_extra_field;
1400     int err=UNZ_OK;
1401
1402     *piSizeVar = 0;
1403     *poffset_local_extrafield = 0;
1404     *psize_local_extrafield = 0;
1405
1406     if (ZSEEK64(s->z_filefunc, s->filestream,s->
     cur_file_info_internal.offset_curfile +
1407                                 s->byte_before_the_zipfile,
     ZLIB_FILEFUNC_SEEK_SET)!=0)
1408         return UNZ_ERRNO;
1409
1410
1411     if (err==UNZ_OK)
1412     {
1413         if (unz64local_getLong(&s->z_filefunc, s->
     filestream,&uMagic) != UNZ_OK)
1414             err=UNZ_ERRNO;
1415         else if (uMagic!=0x04034b50)
1416             err=UNZ_BADZIPFILE;
1417     }
1418
1419     if (unz64local_getShort(&s->z_filefunc, s->
     filestream,&uData) != UNZ_OK)
1420         err=UNZ_ERRNO;
1421 /*
1422     else if ((err==UNZ_OK) && (uData!=s->cur_file_info.wVersion))
1423         err=UNZ_BADZIPFILE;
1424 */
1425     if (unz64local_getShort(&s->z_filefunc, s->
     filestream,&uFlags) != UNZ_OK)
1426         err=UNZ_ERRNO;
1427
1428     if (unz64local_getShort(&s->z_filefunc, s->
     filestream,&uData) != UNZ_OK)
1429         err=UNZ_ERRNO;
1430     else if ((err==UNZ_OK) && (uData!=s->cur_file_info.
     compression_method))
1431         err=UNZ_BADZIPFILE;
1432
1433     if ((err==UNZ_OK) && (s->cur_file_info.compression_method!=0) &&
1434 /* #ifdef HAVE_BZIP2 */
1435                         (s->cur_file_info.compression_method!=
     Z_BZIP2ED) &&
1436 /* #endif */
1437                         (s->cur_file_info.compression_method!=Z_DEFLATED))
1438         err=UNZ_BADZIPFILE;
1439
1440     if (unz64local_getLong(&s->z_filefunc, s->
     filestream,&uData) != UNZ_OK) /* date/time */
1441         err=UNZ_ERRNO;
1442
1443     if (unz64local_getLong(&s->z_filefunc, s->
     filestream,&uData) != UNZ_OK) /* crc */
1444         err=UNZ_ERRNO;
1445     else if ((err==UNZ_OK) && (uData!=s->cur_file_info.crc) && ((uFlags & 8)==0))
1446         err=UNZ_BADZIPFILE;
1447
1448     if (unz64local_getLong(&s->z_filefunc, s->
     filestream,&uData) != UNZ_OK) /* size compr */
1449         err=UNZ_ERRNO;
1450     else if (uData != 0xFFFFFFFF && (err==UNZ_OK) && (uData!=s->
     cur_file_info.compressed_size) && ((uFlags & 8)==0))
1451         err=UNZ_BADZIPFILE;
1452
1453     if (unz64local_getLong(&s->z_filefunc, s->
     filestream,&uData) != UNZ_OK) /* size uncompr */
1454         err=UNZ_ERRNO;
1455     else if (uData != 0xFFFFFFFF && (err==UNZ_OK) && (uData!=s->
     cur_file_info.uncompressed_size) && ((uFlags & 8)==0))
1456         err=UNZ_BADZIPFILE;
1457
1458     if (unz64local_getShort(&s->z_filefunc, s->
```

```
    filestream,&size_filename) != UNZ_OK)
1459        err=UNZ_ERRNO;
1460    else if ((err==UNZ_OK) && (size_filename!=s->cur_file_info.
    size_filename))
1461        err=UNZ_BADZIPFILE;
1462
1463    *piSizeVar += (uInt)size_filename;
1464
1465    if (unz64local_getShort(&s->z_filefunc, s->
    filestream,&size_extra_field) != UNZ_OK)
1466        err=UNZ_ERRNO;
1467    *poffset_local_extrafield= s->cur_file_info_internal.
    offset_curfile +
1468                                SIZEZIPLOCALHEADER + size_filename;
1469    *psize_local_extrafield = (uInt)size_extra_field;
1470
1471    *piSizeVar += (uInt)size_extra_field;
1472
1473    return err;
1474 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

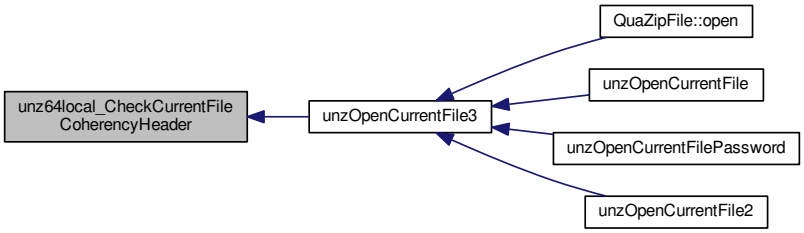

13.107.4.8 static void unz64local_DosDateToTmuDate (ZPOS64_T *ulDosDate*, tm_unz * *ptm*) [static]

Definition at line 862 of file unzip.c.

References tm_unz_s::tm_hour, tm_unz_s::tm_mday, tm_unz_s::tm_min, tm_unz_s::tm_mon, tm_unz_s::tm_sec, and tm_unz_s::tm_year.

Referenced by unz64local_GetCurrentFileInfoInternal().

```
863 {
864     ZPOS64_T uDate;
865     uDate = (ZPOS64_T)(ulDosDate>>16);
866     ptm->tm_mday = (uInt)(uDate&0x1f) ;
867     ptm->tm_mon =  (uInt)((((uDate)&0x1E0)/0x20)-1) ;
868     ptm->tm_year = (uInt)(((uDate&0x0FE00)/0x0200)+1980) ;
869
870     ptm->tm_hour = (uInt) ((ulDosDate &0xF800)/0x800);
871     ptm->tm_min =  (uInt) ((ulDosDate&0x7E0)/0x20) ;
```

```
872     ptm->tm_sec =  (uInt) (2*(ulDosDate&0x1f)) ;
873 }
```

Here is the caller graph for this function:

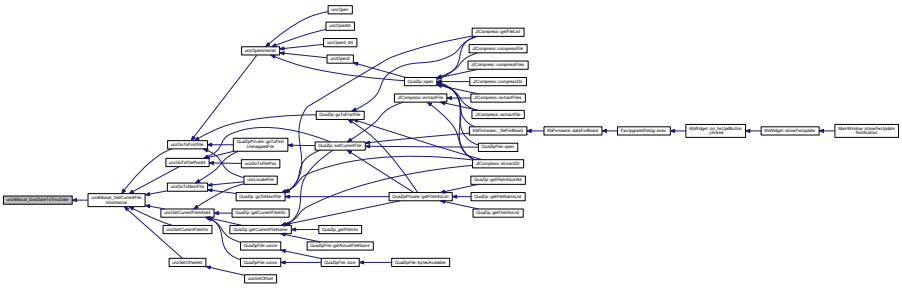

13.107.4.9 static int unz64local_getByte (const zlib_filefunc64_32_def * *pzlib_filefunc_def,* voidpf *filestream,* int * *pi*) [static]

Definition at line 215 of file unzip.c.

References UNZ_EOF, UNZ_ERRNO, UNZ_OK, ZERROR64, and ZREAD64.

Referenced by unz64local_getLong(), unz64local_getLong64(), and unz64local_getShort().

```
216 {
217     unsigned char c;
218     int err = (int)ZREAD64(*pzlib_filefunc_def,filestream,&c,1);
219     if (err==1)
220     {
221         *pi = (int)c;
222         return UNZ_OK;
223     }
224     else
225     {
226         if (ZERROR64(*pzlib_filefunc_def,filestream))
227             return UNZ_ERRNO;
228         else
229             return UNZ_EOF;
230     }
231 }
```

Here is the caller graph for this function:

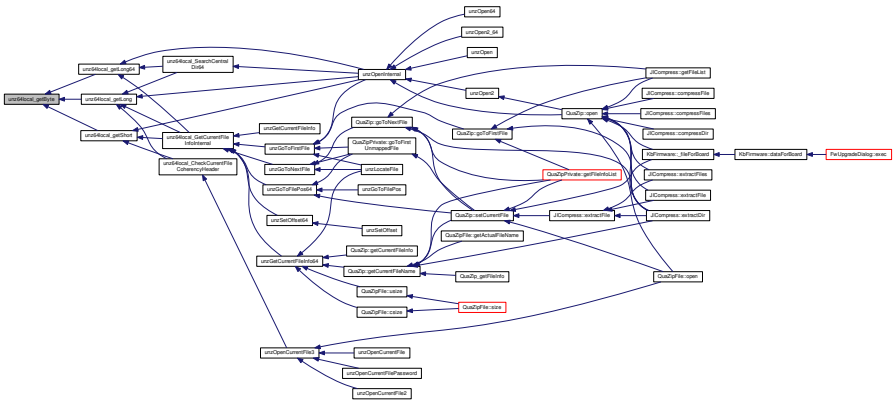

13.107.4.10 static int unz64local_GetCurrentFileInfoInternal (unzFile *file*, unz_file_info64 * *pfile_info*, unz_file_info64_internal * *pfile_info_internal*, char * *szFileName*, uLong *fileNameBufferSize*, void * *extraField*, uLong *extraFieldBufferSize*, char * *szComment*, uLong *commentBufferSize*) [static]

Definition at line 889 of file unzip.c.

References unz64_s::byte_before_the_zipfile, unz_file_info64_s::compressed_size, unz_file_info64_s::compression_method, unz_file_info64_s::crc, unz_file_info64_s::disk_num_start, unz_file_info64_s::dosDate, unz_file_info64_s::external_fa, unz64_s::filestream, unz_file_info64_s::flag, unz_file_info64_s::internal_fa, unz_file_info64_internal_s::offset_curfile, unz64_s::pos_in_central_dir, unz_file_info64_s::size_file_comment, unz_file_info64_s::size_file_extra, unz_file_info64_s::size_filename, unz_file_info64_s::tmu_date, unz_file_info64_s::uncompressed_size, unz64local_DosDateToTmuDate(), unz64local_getLong(), unz64local_getLong64(), unz64local_getShort(), UNZ_BADZIPFILE, UNZ_ERRNO, UNZ_OK, UNZ_PARAMERROR, unz_file_info64_s::version, unz_file_info64_s::version_needed, unz64_s::z_filefunc, ZLIB_FILEFUNC_SEEK_CUR, ZLIB_FILEFUNC_SEEK_SET, ZREAD64, and ZSEEK64.

Referenced by unzGetCurrentFileInfo(), unzGetCurrentFileInfo64(), unzGoToFilePos64(), unzGoToFirstFile(), unzGoToNextFile(), and unzSetOffset64().

```
899 {
900     unz64_s* s;
901     unz_file_info64 file_info;
902     unz_file_info64_internal file_info_internal;
903     int err=UNZ_OK;
904     uLong uMagic;
905     ZPOS64_T llSeek=0;
906     uLong uL;
907
908     if (file==NULL)
909         return UNZ_PARAMERROR;
910     s=(unz64_s*)file;
911     if (ZSEEK64(s->z_filefunc, s->filestream,
912               s->pos_in_central_dir+s->byte_before_the_zipfile,
913               ZLIB_FILEFUNC_SEEK_SET)!=0)
914         err=UNZ_ERRNO;
915
916
917     /* we check the magic */
918     if (err==UNZ_OK)
919     {
920         if (unz64local_getLong(&s->z_filefunc, s->
    filestream,&uMagic) != UNZ_OK)
921             err=UNZ_ERRNO;
922         else if (uMagic!=0x02014b50)
923             err=UNZ_BADZIPFILE;
924     }
925
926     if (unz64local_getShort(&s->z_filefunc, s->
    filestream,&file_info.version) != UNZ_OK)
927         err=UNZ_ERRNO;
928
929     if (unz64local_getShort(&s->z_filefunc, s->
    filestream,&file_info.version_needed) != UNZ_OK)
930         err=UNZ_ERRNO;
931
932     if (unz64local_getShort(&s->z_filefunc, s->
    filestream,&file_info.flag) != UNZ_OK)
933         err=UNZ_ERRNO;
934
935     if (unz64local_getShort(&s->z_filefunc, s->
    filestream,&file_info.compression_method) != UNZ_OK)
936         err=UNZ_ERRNO;
937
938     if (unz64local_getLong(&s->z_filefunc, s->
    filestream,&file_info.dosDate) != UNZ_OK)
939         err=UNZ_ERRNO;
940
941     unz64local_DosDateToTmuDate(file_info.dosDate,&file_info.
    tmu_date);
942
943     if (unz64local_getLong(&s->z_filefunc, s->
    filestream,&file_info.crc) != UNZ_OK)
944         err=UNZ_ERRNO;
945
946     if (unz64local_getLong(&s->z_filefunc, s->
    filestream,&uL) != UNZ_OK)
947         err=UNZ_ERRNO;
948     file_info.compressed_size = uL;
949
950     if (unz64local_getLong(&s->z_filefunc, s->
```

```
    filestream,&uL) != UNZ_OK)
951         err=UNZ_ERRNO;
952       file_info.uncompressed_size = uL;
953
954       if (unz64local_getShort(&s->z_filefunc, s->
    filestream,&file_info.size_filename) != UNZ_OK)
955         err=UNZ_ERRNO;
956
957       if (unz64local_getShort(&s->z_filefunc, s->
    filestream,&file_info.size_file_extra) != UNZ_OK)
958         err=UNZ_ERRNO;
959
960       if (unz64local_getShort(&s->z_filefunc, s->
    filestream,&file_info.size_file_comment) != UNZ_OK)
961         err=UNZ_ERRNO;
962
963       if (unz64local_getShort(&s->z_filefunc, s->
    filestream,&file_info.disk_num_start) != UNZ_OK)
964         err=UNZ_ERRNO;
965
966       if (unz64local_getShort(&s->z_filefunc, s->
    filestream,&file_info.internal_fa) != UNZ_OK)
967         err=UNZ_ERRNO;
968
969       if (unz64local_getLong(&s->z_filefunc, s->
    filestream,&file_info.external_fa) != UNZ_OK)
970         err=UNZ_ERRNO;
971
972                 /* relative offset of local header */
973       if (unz64local_getLong(&s->z_filefunc, s->
    filestream,&uL) != UNZ_OK)
974         err=UNZ_ERRNO;
975       file_info_internal.offset_curfile = uL;
976
977       llSeek+=file_info.size_filename;
978       if ((err==UNZ_OK) && (szFileName!=NULL))
979       {
980           uLong uSizeRead ;
981           if (file_info.size_filename<fileNameBufferSize)
982           {
983               *(szFileName+file_info.size_filename)='\0';
984               uSizeRead = file_info.size_filename;
985           }
986           else
987               uSizeRead = fileNameBufferSize;
988
989           if ((file_info.size_filename>0) && (fileNameBufferSize>0))
990               if (ZREAD64(s->z_filefunc, s->filestream,szFileName,uSizeRead)!=
    uSizeRead)
991                   err=UNZ_ERRNO;
992           llSeek -= uSizeRead;
993       }
994
995       /* Read extrafield */
996       if ((err==UNZ_OK) && (extraField!=NULL))
997       {
998           ZPOS64_T uSizeRead ;
999           if (file_info.size_file_extra<extraFieldBufferSize)
1000              uSizeRead = file_info.size_file_extra;
1001          else
1002              uSizeRead = extraFieldBufferSize;
1003
1004          if (llSeek!=0)
1005          {
1006              if (ZSEEK64(s->z_filefunc, s->filestream,llSeek,
    ZLIB_FILEFUNC_SEEK_CUR)==0)
1007                  llSeek=0;
1008              else
1009                  err=UNZ_ERRNO;
1010          }
1011
1012          if ((file_info.size_file_extra>0) && (extraFieldBufferSize>0))
1013              if (ZREAD64(s->z_filefunc, s->filestream,extraField,(uLong)uSizeRead
    )!=uSizeRead)
1014                  err=UNZ_ERRNO;
1015
1016          llSeek += file_info.size_file_extra - (uLong)uSizeRead;
1017      }
1018      else
1019          llSeek += file_info.size_file_extra;
1020
1021
1022      if ((err==UNZ_OK) && (file_info.size_file_extra != 0))
1023      {
1024                                  uLong acc = 0;
1025
1026          /* since lSeek now points to after the extra field we need to move back */
```

```
1027         llSeek -= file_info.size_file_extra;
1028
1029         if (llSeek!=0)
1030         {
1031             if (ZSEEK64(s->z_filefunc, s->filestream,llSeek,
     ZLIB_FILEFUNC_SEEK_CUR)==0)
1032                 llSeek=0;
1033             else
1034                 err=UNZ_ERRNO;
1035         }
1036
1037         while(acc < file_info.size_file_extra)
1038         {
1039             uLong headerId;
1040                                                 uLong dataSize;
1041
1042             if (unz64local_getShort(&s->z_filefunc, s->
     filestream,&headerId) != UNZ_OK)
1043                 err=UNZ_ERRNO;
1044
1045             if (unz64local_getShort(&s->z_filefunc, s->
     filestream,&dataSize) != UNZ_OK)
1046                 err=UNZ_ERRNO;
1047
1048             /* ZIP64 extra fields */
1049             if (headerId == 0x0001)
1050             {
1051                 uLong uL;
1052
1053                 if(file_info.uncompressed_size == (ZPOS64_T)0xFFFFFFFFu)
1054                 {
1055                     if (unz64local_getLong64(&s->z_filefunc, s->
     filestream,&file_info.uncompressed_size) != UNZ_OK)
1056                         err=UNZ_ERRNO;
1057                 }
1058
1059                 if(file_info.compressed_size == (ZPOS64_T)0xFFFFFFFFu)
1060                 {
1061                     if (unz64local_getLong64(&s->z_filefunc, s->
     filestream,&file_info.compressed_size) != UNZ_OK)
1062                         err=UNZ_ERRNO;
1063                 }
1064
1065                 if(file_info_internal.offset_curfile == (ZPOS64_T)0xFFFFFFFFu)
1066                 {
1067                     /* Relative Header offset */
1068                     if (unz64local_getLong64(&s->z_filefunc, s->
     filestream,&file_info_internal.offset_curfile) != UNZ_OK)
1069                         err=UNZ_ERRNO;
1070                 }
1071
1072                 if(file_info.disk_num_start == 0xFFFFFFFFu)
1073                 {
1074                     /* Disk Start Number */
1075                     if (unz64local_getLong(&s->z_filefunc, s->
     filestream,&uL) != UNZ_OK)
1076                         err=UNZ_ERRNO;
1077                 }
1078
1079             }
1080             else
1081             {
1082                 if (ZSEEK64(s->z_filefunc, s->filestream,dataSize,
     ZLIB_FILEFUNC_SEEK_CUR)!=0)
1083                     err=UNZ_ERRNO;
1084             }
1085
1086             acc += 2 + 2 + dataSize;
1087         }
1088     }
1089
1090     if ((err==UNZ_OK) && (szComment!=NULL))
1091     {
1092         uLong uSizeRead ;
1093         if (file_info.size_file_comment<commentBufferSize)
1094         {
1095             *(szComment+file_info.size_file_comment)='\0';
1096             uSizeRead = file_info.size_file_comment;
1097         }
1098         else
1099             uSizeRead = commentBufferSize;
1100
1101         if (llSeek!=0)
1102         {
1103             if (ZSEEK64(s->z_filefunc, s->filestream,llSeek,
     ZLIB_FILEFUNC_SEEK_CUR)==0)
1104                 llSeek=0;
```

```
1105             else
1106                 err=UNZ_ERRNO;
1107         }
1108
1109         if ((file_info.size_file_comment>0) && (commentBufferSize>0))
1110             if (ZREAD64(s->z_filefunc, s->filestream,szComment,uSizeRead)!=
     uSizeRead)
1111                 err=UNZ_ERRNO;
1112         llSeek+=file_info.size_file_comment - uSizeRead;
1113     }
1114     else
1115         llSeek+=file_info.size_file_comment;
1116
1117
1118     if ((err==UNZ_OK) && (pfile_info!=NULL))
1119         *pfile_info=file_info;
1120
1121     if ((err==UNZ_OK) && (pfile_info_internal!=NULL))
1122         *pfile_info_internal=file_info_internal;
1123
1124     return err;
1125 }
```

Here is the call graph for this function:

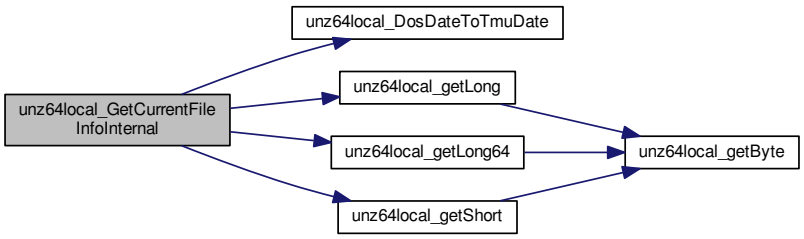

Here is the caller graph for this function:

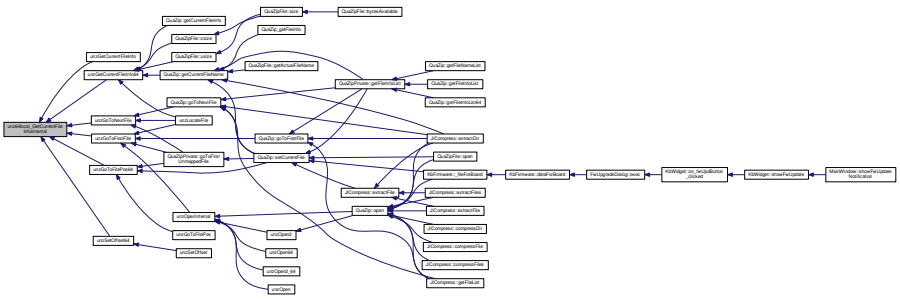

13.107.4.11 static int unz64local_getLong (const zlib_filefunc64_32_def * *pzlib_filefunc_def,* voidpf *filestream,* uLong * *pX*) [static]

Definition at line 269 of file unzip.c.

References unz64local_getByte(), and UNZ_OK.

Referenced by unz64local_CheckCurrentFileCoherencyHeader(), unz64local_GetCurrentFileInfoInternal(), unz64local_SearchCentralDir64(), and unzOpenInternal().

```
272 {
273     uLong x ;
```

```
274     int i = 0;
275     int err;
276
277     err = unz64local_getByte(pzlib_filefunc_def,filestream,&i);
278     x = (uLong)i;
279
280     if (err==UNZ_OK)
281         err = unz64local_getByte(pzlib_filefunc_def,filestream,&i);
282     x |= ((uLong)i)<<8;
283
284     if (err==UNZ_OK)
285         err = unz64local_getByte(pzlib_filefunc_def,filestream,&i);
286     x |= ((uLong)i)<<16;
287
288     if (err==UNZ_OK)
289         err = unz64local_getByte(pzlib_filefunc_def,filestream,&i);
290     x += ((uLong)i)<<24;
291
292     if (err==UNZ_OK)
293         *pX = x;
294     else
295         *pX = 0;
296     return err;
297 }
```

Here is the call graph for this function:

Here is the caller graph for this function:

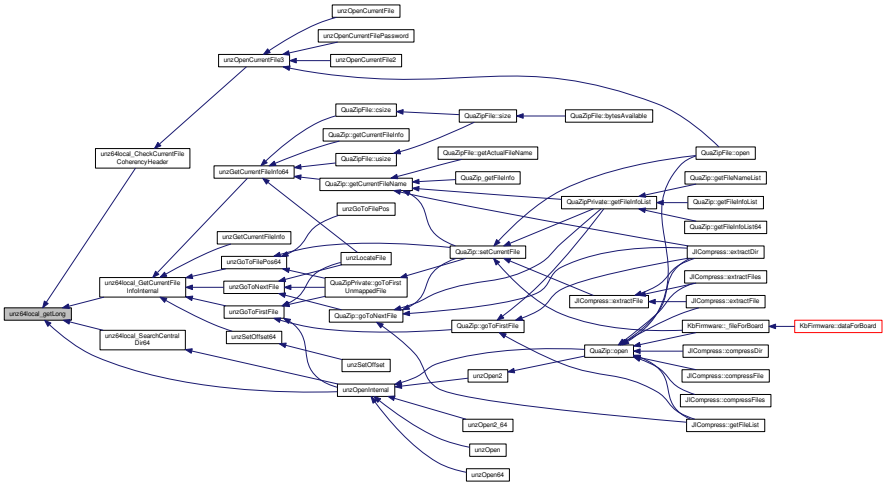

13.107.4.12 static int unz64local_getLong64 (const zlib_filefunc64_32_def * *pzlib_filefunc_def*, voidpf *filestream*, ZPOS64_T * *pX*) [static]

Definition at line 305 of file unzip.c.

References unz64local_getByte(), and UNZ_OK.

Referenced by unz64local_GetCurrentFileInfoInternal(), unz64local_SearchCentralDir64(), and unzOpenInternal().

```
308 {
309     ZPOS64_T x ;
310     int i = 0;
311     int err;
312
313     err = unz64local_getByte(pzlib_filefunc_def,filestream,&i);
314     x = (ZPOS64_T)i;
315
316     if (err==UNZ_OK)
317         err = unz64local_getByte(pzlib_filefunc_def,filestream,&i);
318     x |= ((ZPOS64_T)i)<<8;
319
320     if (err==UNZ_OK)
321         err = unz64local_getByte(pzlib_filefunc_def,filestream,&i);
322     x |= ((ZPOS64_T)i)<<16;
323
324     if (err==UNZ_OK)
325         err = unz64local_getByte(pzlib_filefunc_def,filestream,&i);
326     x |= ((ZPOS64_T)i)<<24;
327
328     if (err==UNZ_OK)
329         err = unz64local_getByte(pzlib_filefunc_def,filestream,&i);
330     x |= ((ZPOS64_T)i)<<32;
331
332     if (err==UNZ_OK)
333         err = unz64local_getByte(pzlib_filefunc_def,filestream,&i);
334     x |= ((ZPOS64_T)i)<<40;
335
336     if (err==UNZ_OK)
337         err = unz64local_getByte(pzlib_filefunc_def,filestream,&i);
338     x |= ((ZPOS64_T)i)<<48;
339
340     if (err==UNZ_OK)
341         err = unz64local_getByte(pzlib_filefunc_def,filestream,&i);
342     x |= ((ZPOS64_T)i)<<56;
343
344     if (err==UNZ_OK)
345         *pX = x;
346     else
347         *pX = 0;
348     return err;
349 }
```

Here is the call graph for this function:

Here is the caller graph for this function:

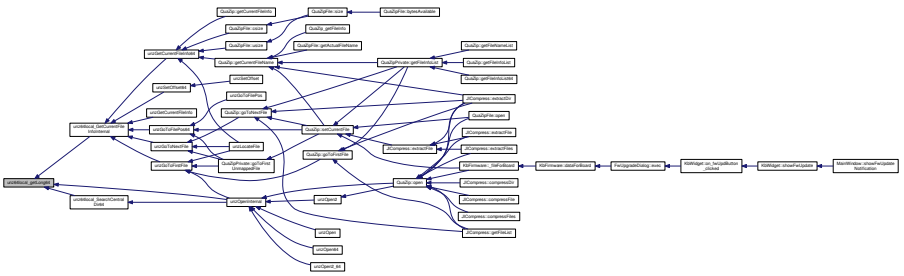

13.107.4.13 static int unz64local_getShort (const zlib_filefunc64_32_def * *pzlib_filefunc_def,* voidpf *filestream,* uLong * *pX*) [static]

Definition at line 242 of file unzip.c.

References unz64local_getByte(), and UNZ_OK.

Referenced by unz64local_CheckCurrentFileCoherencyHeader(), unz64local_GetCurrentFileInfoInternal(), and unzOpenInternal().

```
245 {
246     uLong x ;
247     int i = 0;
248     int err;
249
250     err = unz64local_getByte(pzlib_filefunc_def,filestream,&i);
251     x = (uLong)i;
252
253     if (err==UNZ_OK)
254         err = unz64local_getByte(pzlib_filefunc_def,filestream,&i);
255     x |= ((uLong)i)<<8;
256
257     if (err==UNZ_OK)
258         *pX = x;
259     else
260         *pX = 0;
261     return err;
262 }
```

Here is the call graph for this function:

Here is the caller graph for this function:

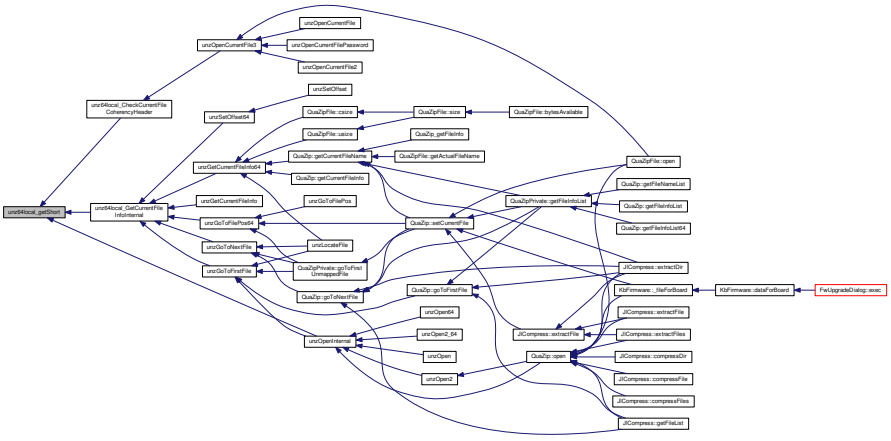

13.107.4.14 static ZPOS64_T unz64local_SearchCentralDir (const zlib_filefunc64_32_def * *pzlib_filefunc_def,* voidpf *filestream*) [static]

Definition at line 416 of file unzip.c.

References ALLOC, BUFREADCOMMENT, TRYFREE, ZLIB_FILEFUNC_SEEK_END, ZLIB_FILEFUNC_SEEK_-SET, ZREAD64, ZSEEK64, and ZTELL64.

Referenced by unzOpenInternal().

```
417 {
418     unsigned char* buf;
419     ZPOS64_T uSizeFile;
420     ZPOS64_T uBackRead;
421     ZPOS64_T uMaxBack=0xffff; /* maximum size of global comment */
422     ZPOS64_T uPosFound=0;
423
424     if (ZSEEK64(*pzlib_filefunc_def,filestream,0,ZLIB_FILEFUNC_SEEK_END) != 0)
425         return 0;
426
427
428     uSizeFile = ZTELL64(*pzlib_filefunc_def,filestream);
429
430     if (uMaxBack>uSizeFile)
431         uMaxBack = uSizeFile;
432
433     buf = (unsigned char*)ALLOC(BUFREADCOMMENT+4);
434     if (buf==NULL)
435         return 0;
436
437     uBackRead = 4;
438     while (uBackRead<uMaxBack)
439     {
440         uLong uReadSize;
441         ZPOS64_T uReadPos ;
442         int i;
443         if (uBackRead+BUFREADCOMMENT>uMaxBack)
444             uBackRead = uMaxBack;
445         else
446             uBackRead+=BUFREADCOMMENT;
447         uReadPos = uSizeFile-uBackRead ;
448
449         uReadSize = ((BUFREADCOMMENT+4) < (uSizeFile-uReadPos)) ?
450                      (BUFREADCOMMENT+4) : (uLong)(uSizeFile-uReadPos);
451         if (ZSEEK64(*pzlib_filefunc_def,filestream,uReadPos,
    ZLIB_FILEFUNC_SEEK_SET)!=0)
452             break;
453
454         if (ZREAD64(*pzlib_filefunc_def,filestream,buf,uReadSize)!=uReadSize)
455             break;
456
457         for (i=(int)uReadSize-3; (i--)>0;)
458             if (((*(buf+i))==0x50) && ((*(buf+i+1))==0x4b) &&
459                 ((*(buf+i+2))==0x05) && ((*(buf+i+3))==0x06))
460             {
461                 uPosFound = uReadPos+i;
462                 break;
463             }
464
465         if (uPosFound!=0)
466             break;
467     }
468     TRYFREE(buf);
469     return uPosFound;
470 }
```

Here is the caller graph for this function:

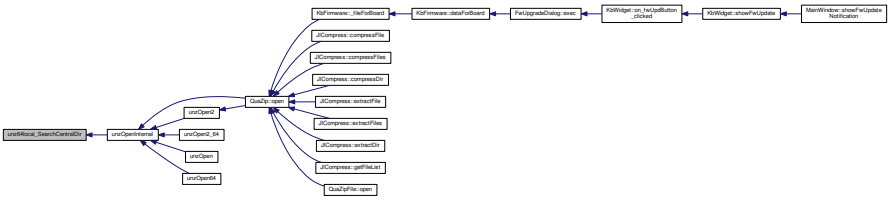

13.107.4.15 static ZPOS64_T unz64local_SearchCentralDir64 (const zlib_filefunc64_32_def * *pzlib_filefunc_def,* voidpf *filestream*) [static]

Definition at line 481 of file unzip.c.

References ALLOC, BUFREADCOMMENT, TRYFREE, unz64local_getLong(), unz64local_getLong64(), UNZ_OK, ZLIB_FILEFUNC_SEEK_END, ZLIB_FILEFUNC_SEEK_SET, ZREAD64, ZSEEK64, and ZTELL64.

Referenced by unzOpenInternal().

```
483 {
484     unsigned char* buf;
485     ZPOS64_T uSizeFile;
486     ZPOS64_T uBackRead;
487     ZPOS64_T uMaxBack=0xffff; /* maximum size of global comment */
488     ZPOS64_T uPosFound=0;
489     uLong uL;
490                 ZPOS64_T relativeOffset;
491
492     if (ZSEEK64(*pzlib_filefunc_def,filestream,0,ZLIB_FILEFUNC_SEEK_END) != 0)
493         return 0;
494
495
496     uSizeFile = ZTELL64(*pzlib_filefunc_def,filestream);
497
498     if (uMaxBack>uSizeFile)
499         uMaxBack = uSizeFile;
500
501     buf = (unsigned char*)ALLOC(BUFREADCOMMENT+4);
502     if (buf==NULL)
503         return 0;
504
505     uBackRead = 4;
506     while (uBackRead<uMaxBack)
507     {
508         uLong uReadSize;
509         ZPOS64_T uReadPos;
510         int i;
511         if (uBackRead+BUFREADCOMMENT>uMaxBack)
512             uBackRead = uMaxBack;
513         else
514             uBackRead+=BUFREADCOMMENT;
515         uReadPos = uSizeFile-uBackRead ;
516
517         uReadSize = ((BUFREADCOMMENT+4) < (uSizeFile-uReadPos)) ?
518                      (BUFREADCOMMENT+4) : (uLong)(uSizeFile-uReadPos);
519         if (ZSEEK64(*pzlib_filefunc_def,filestream,uReadPos,
    ZLIB_FILEFUNC_SEEK_SET)!=0)
520             break;
521
522         if (ZREAD64(*pzlib_filefunc_def,filestream,buf,uReadSize)!=uReadSize)
523             break;
524
525         for (i=(int)uReadSize-3; (i--)>0;)
526             if (((*(buf+i))==0x50) && ((*(buf+i+1))==0x4b) &&
527                 ((*(buf+i+2))==0x06) && ((*(buf+i+3))==0x07))
528             {
529                 uPosFound = uReadPos+i;
530                 break;
531             }
532
533         if (uPosFound!=0)
534             break;
535     }
536     TRYFREE(buf);
537     if (uPosFound == 0)
538         return 0;
539
540     /* Zip64 end of central directory locator */
541     if (ZSEEK64(*pzlib_filefunc_def,filestream, uPosFound,
    ZLIB_FILEFUNC_SEEK_SET)!=0)
542         return 0;
543
544     /* the signature, already checked */
545     if (unz64local_getLong(pzlib_filefunc_def,filestream,&uL)!=
    UNZ_OK)
546         return 0;
547
548     /* number of the disk with the start of the zip64 end of  central directory */
549     if (unz64local_getLong(pzlib_filefunc_def,filestream,&uL)!=
    UNZ_OK)
550         return 0;
551     if (uL != 0)
552         return 0;
```

```
553
554     /* relative offset of the zip64 end of central directory record */
555     if (unz64local_getLong64(pzlib_filefunc_def,filestream,&relativeOffset)!=
    UNZ_OK)
556         return 0;
557
558     /* total number of disks */
559     if (unz64local_getLong(pzlib_filefunc_def,filestream,&uL)!=
    UNZ_OK)
560         return 0;
561     if (uL != 1)
562         return 0;
563
564     /* Goto end of central directory record */
565     if (ZSEEK64(*pzlib_filefunc_def,filestream, relativeOffset,
    ZLIB_FILEFUNC_SEEK_SET)!=0)
566         return 0;
567
568      /* the signature */
569     if (unz64local_getLong(pzlib_filefunc_def,filestream,&uL)!=
    UNZ_OK)
570         return 0;
571
572     if (uL != 0x06064b50)
573         return 0;
574
575     return relativeOffset;
576 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

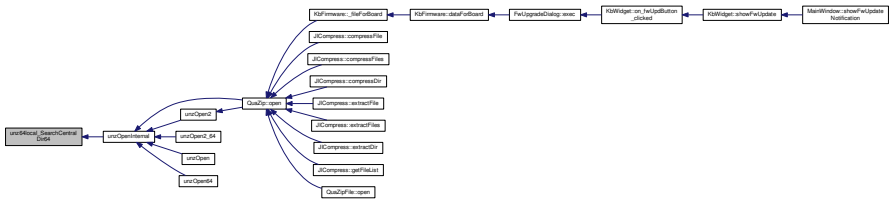

13.107.4.16 int ZEXPORT unzClearFlags (unzFile *file,* unsigned *flags*)

Definition at line 2147 of file unzip.c.

References unz64_s::flags, UNZ_OK, and UNZ_PARAMERROR.

Referenced by QuaZip::open().

```
2148 {
2149     unz64_s* s;
2150     if (file == NULL)
2151         return UNZ_PARAMERROR;
2152     s = (unz64_s*)file;
2153     s->flags &= ~flags;
2154     return UNZ_OK;
2155 }
```

Here is the caller graph for this function:

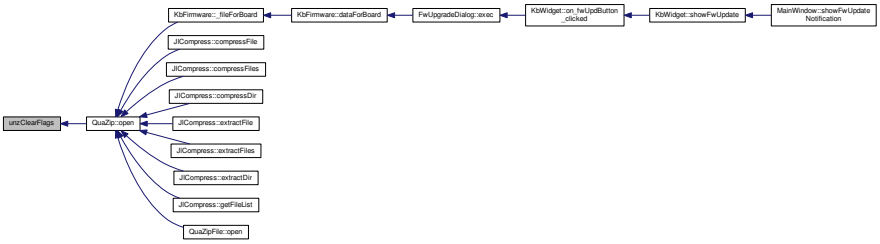

13.107.4.17 int ZEXPORT unzClose (unzFile *file*)

Definition at line 815 of file unzip.c.

References unz64_s::filestream, unz64_s::flags, unz64_s::pfile_in_zip_read, TRYFREE, UNZ_AUTO_CLOSE, UNZ_OK, UNZ_PARAMERROR, unzCloseCurrentFile(), unz64_s::z_filefunc, ZCLOSE64, and ZFAKECLOSE64.

Referenced by QuaZip::close(), and QuaZip::open().

```
816 {
817     unz64_s* s;
818     if (file==NULL)
819         return UNZ_PARAMERROR;
820     s=(unz64_s*)file;
821
822     if (s->pfile_in_zip_read!=NULL)
823         unzCloseCurrentFile(file);
824
825     if ((s->flags & UNZ_AUTO_CLOSE) != 0)
826         ZCLOSE64(s->z_filefunc, s->filestream);
827     else
828         ZFAKECLOSE64(s->z_filefunc, s->filestream);
829     TRYFREE(s);
830     return UNZ_OK;
831 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

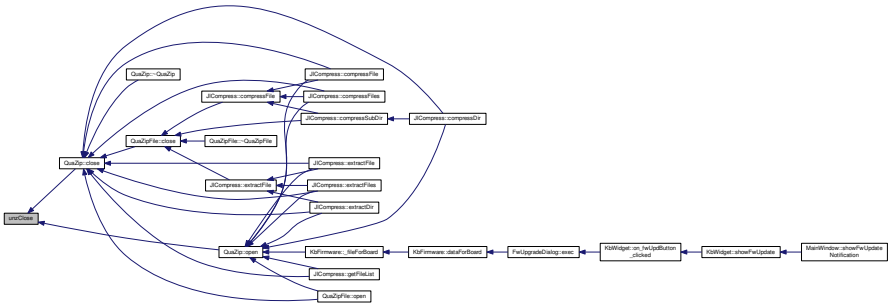

13.107.4.18 int ZEXPORT unzCloseCurrentFile (unzFile *file*)

Definition at line 2012 of file unzip.c.

References file_in_zip64_read_info_s::crc32, file_in_zip64_read_info_s::crc32_wait, unz64_s::pfile_in_zip_read, file_in_zip64_read_info_s::raw, file_in_zip64_read_info_s::read_buffer, file_in_zip64_read_info_s::rest_read_uncompressed, file_in_zip64_read_info_s::stream, file_in_zip64_read_info_s::stream_initialised, TRYFREE, UNZ_CRCERROR, UNZ_OK, UNZ_PARAMERROR, and Z_BZIP2ED.

Referenced by QuaZipFile::close(), unzClose(), and unzOpenCurrentFile3().

```
2013 {
2014     int err=UNZ_OK;
2015
2016     unz64_s* s;
2017     file_in_zip64_read_info_s* pfile_in_zip_read_info;
2018     if (file==NULL)
2019         return UNZ_PARAMERROR;
2020     s=(unz64_s*)file;
2021     pfile_in_zip_read_info=s->pfile_in_zip_read;
2022
2023     if (pfile_in_zip_read_info==NULL)
2024         return UNZ_PARAMERROR;
2025
2026
2027     if ((pfile_in_zip_read_info->rest_read_uncompressed == 0) &&
2028         (!pfile_in_zip_read_info->raw))
2029     {
2030         if (pfile_in_zip_read_info->crc32 != pfile_in_zip_read_info->
    crc32_wait)
2031             err=UNZ_CRCERROR;
2032     }
2033
2034
2035     TRYFREE(pfile_in_zip_read_info->read_buffer);
2036     pfile_in_zip_read_info->read_buffer = NULL;
2037     if (pfile_in_zip_read_info->stream_initialised == Z_DEFLATED)
2038         inflateEnd(&pfile_in_zip_read_info->stream);
2039 #ifdef HAVE_BZIP2
2040     else if (pfile_in_zip_read_info->stream_initialised ==
    Z_BZIP2ED)
2041         BZ2_bzDecompressEnd(&pfile_in_zip_read_info->bstream);
2042 #endif
2043
2044
2045     pfile_in_zip_read_info->stream_initialised = 0;
2046     TRYFREE(pfile_in_zip_read_info);
2047
2048     s->pfile_in_zip_read=NULL;
2049
2050     return err;
2051 }
```

Here is the caller graph for this function:

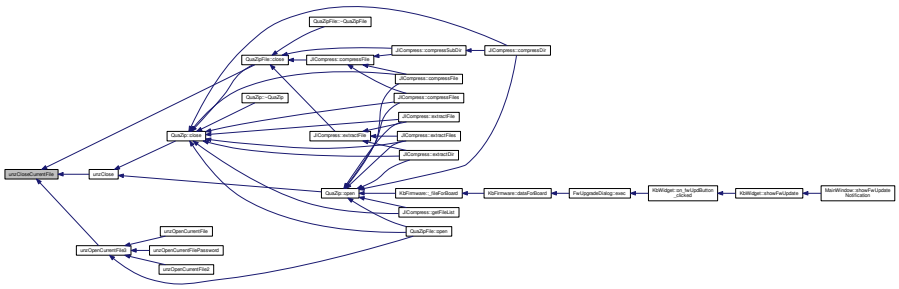

13.107.4.19 int ZEXPORT unzeof (unzFile *file*)

Definition at line 1932 of file unzip.c.

References unz64_s::pfile_in_zip_read, file_in_zip64_read_info_s::rest_read_uncompressed, and UNZ_PARAMERROR.

Referenced by QuaZipFile::atEnd().

```
1933 {
1934     unz64_s* s;
1935     file_in_zip64_read_info_s* pfile_in_zip_read_info;
1936     if (file==NULL)
1937         return UNZ_PARAMERROR;
1938     s=(unz64_s*)file;
1939     pfile_in_zip_read_info=s->pfile_in_zip_read;
1940
1941     if (pfile_in_zip_read_info==NULL)
1942         return UNZ_PARAMERROR;
1943
1944     if (pfile_in_zip_read_info->rest_read_uncompressed == 0)
1945         return 1;
1946     else
1947         return 0;
1948 }
```

Here is the caller graph for this function:



13.107.4.20 int ZEXPORT unzGetCurrentFileInfo (unzFile *file*, unz_file_info * *pfile_info*, char * *szFileName*, uLong *fileNameBufferSize*, void * *extraField*, uLong *extraFieldBufferSize*, char * *szComment*, uLong *commentBufferSize*)

Definition at line 1146 of file unzip.c.

References unz_file_info64_s::compressed_size, unz_file_info_s::compressed_size, unz_file_info64_s::compression_method, unz_file_info_s::compression_method, unz_file_info64_s::crc, unz_file_info_s::crc, unz_file_info64_s::disk_num_start, unz_file_info_s::disk_num_start, unz_file_info64_s::dosDate, unz_file_info_s::dosDate,

unz_file_info64_s::external_fa, unz_file_info_s::external_fa, unz_file_info64_s::flag, unz_file_info_s::flag, unz_file_info64_s::internal_fa, unz_file_info_s::internal_fa, unz_file_info64_s::size_file_comment, unz_file_info_s::size_file_comment, unz_file_info64_s::size_file_extra, unz_file_info_s::size_file_extra, unz_file_info64_s::size_filename, unz_file_info_s::size_filename, unz_file_info64_s::tmu_date, unz_file_info_s::tmu_date, unz_file_info64_s::uncompressed_size, unz_file_info_s::uncompressed_size, unz64local_GetCurrentFileInfoInternal(), UNZ_OK, unz_file_info64_s::version, unz_file_info_s::version, unz_file_info64_s::version_needed, and unz_file_info_s::version_needed.

```
1151 {
1152     int err;
1153     unz_file_info64 file_info64;
1154     err = unz64local_GetCurrentFileInfoInternal(file,&file_info64,NULL
     ,
1155                                                 szFileName,fileNameBufferSize,
1156                                                 extraField,extraFieldBufferSize,
1157                                                 szComment,commentBufferSize);
1158     if (err==UNZ_OK && pfile_info != NULL)
1159     {
1160         pfile_info->version = file_info64.version;
1161         pfile_info->version_needed = file_info64.version_needed;
1162         pfile_info->flag = file_info64.flag;
1163         pfile_info->compression_method = file_info64.
     compression_method;
1164         pfile_info->dosDate = file_info64.dosDate;
1165         pfile_info->crc = file_info64.crc;
1166 
1167         pfile_info->size_filename = file_info64.size_filename;
1168         pfile_info->size_file_extra = file_info64.size_file_extra;
1169         pfile_info->size_file_comment = file_info64.
     size_file_comment;
1170 
1171         pfile_info->disk_num_start = file_info64.disk_num_start;
1172         pfile_info->internal_fa = file_info64.internal_fa;
1173         pfile_info->external_fa = file_info64.external_fa;
1174 
1175         pfile_info->tmu_date = file_info64.tmu_date,
1176 
1177 
1178         pfile_info->compressed_size = (uLong)file_info64.
     compressed_size;
1179         pfile_info->uncompressed_size = (uLong)file_info64.
     uncompressed_size;
1180 
1181     }
1182     return err;
1183 }
```

Here is the call graph for this function:

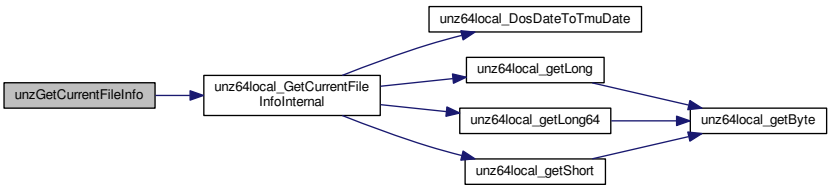

13.107.4.21 int ZEXPORT unzGetCurrentFileInfo64 (unzFile *file*, unz_file_info64 * *pfile_info*, char * *szFileName*, uLong *fileNameBufferSize*, void * *extraField*, uLong *extraFieldBufferSize*, char * *szComment*, uLong *commentBufferSize*)

Definition at line 1134 of file unzip.c.

References unz64local_GetCurrentFileInfoInternal().

Referenced by QuaZipFile::csize(), QuaZip::getCurrentFileInfo(), QuaZip::getCurrentFileName(), unzLocateFile(), and QuaZipFile::usize().

```
1139 {
1140     return unz64local_GetCurrentFileInfoInternal(file,pfile_info,NULL,
1141                                                  szFileName,fileNameBufferSize,
1142                                                  extraField,extraFieldBufferSize,
1143                                                  szComment,commentBufferSize);
1144 }
```

Here is the call graph for this function:

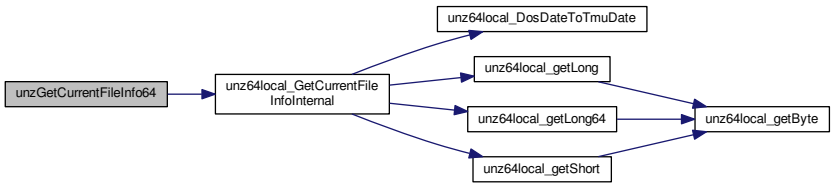

Here is the caller graph for this function:

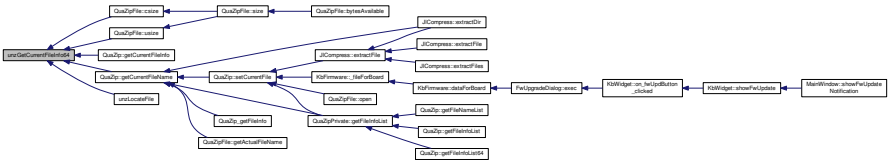

13.107.4.22 ZPOS64_T ZEXPORT unzGetCurrentFileZStreamPos64 (unzFile *file*)

Definition at line 1666 of file unzip.c.

References file_in_zip64_read_info_s::byte_before_the_zipfile, unz64_s::pfile_in_zip_read, and file_in_zip64_-read_info_s::pos_in_zipfile.

```
1667 {
1668     unz64_s* s;
1669     file_in_zip64_read_info_s* pfile_in_zip_read_info;
1670     s=(unz64_s*)file;
1671     if (file==NULL)
1672         return 0; /*UNZ_PARAMERROR; */
1673     pfile_in_zip_read_info=s->pfile_in_zip_read;
1674     if (pfile_in_zip_read_info==NULL)
1675         return 0; /*UNZ_PARAMERROR; */
1676     return pfile_in_zip_read_info->pos_in_zipfile +
1677                          pfile_in_zip_read_info->byte_before_the_zipfile;
1678 }
```

13.107.4.23 int ZEXPORT unzGetFilePos (unzFile *file,* unz_file_pos * *file_pos*)

Definition at line 1334 of file unzip.c.

References unz_file_pos_s::num_of_file, unz64_file_pos_s::num_of_file, unz_file_pos_s::pos_in_zip_directory, unz64_file_pos_s::pos_in_zip_directory, UNZ_OK, and unzGetFilePos64().

```
1337 {
1338     unz64_file_pos file_pos64;
1339     int err = unzGetFilePos64(file,&file_pos64);
1340     if (err==UNZ_OK)
1341     {
```

```
1342         file_pos->pos_in_zip_directory = (uLong)file_pos64.
     pos_in_zip_directory;
1343         file_pos->num_of_file = (uLong)file_pos64.num_of_file;
1344     }
1345     return err;
1346 }
```

Here is the call graph for this function:

13.107.4.24 int ZEXPORT unzGetFilePos64 (unzFile *file*, unz64_file_pos * *file_pos*)

Definition at line 1318 of file unzip.c.

References unz64_s::current_file_ok, unz64_s::num_file, unz64_file_pos_s::num_of_file, unz64_s::pos_in_central_dir, unz64_file_pos_s::pos_in_zip_directory, UNZ_END_OF_LIST_OF_FILE, UNZ_OK, and UNZ_PARAMERROR.

Referenced by QuaZipPrivate::addCurrentFileToDirectoryMap(), and unzGetFilePos().

```
1319 {
1320     unz64_s* s;
1321
1322     if (file==NULL || file_pos==NULL)
1323         return UNZ_PARAMERROR;
1324     s=(unz64_s*)file;
1325     if (!s->current_file_ok)
1326         return UNZ_END_OF_LIST_OF_FILE;
1327
1328     file_pos->pos_in_zip_directory  = s->pos_in_central_dir;
1329     file_pos->num_of_file           = s->num_file;
1330
1331     return UNZ_OK;
1332 }
```

Here is the caller graph for this function:

13.107.4.25 int ZEXPORT unzGetGlobalComment (unzFile *file*, char * *szComment*, uLong *uSizeBuf*)

Definition at line 2059 of file unzip.c.

References unz64_s::central_pos, unz64_s::filestream, unz64_s::gi, unz_global_info64_s::size_comment, UNZ_ERRNO, UNZ_PARAMERROR, unz64_s::z_filefunc, ZLIB_FILEFUNC_SEEK_SET, ZREAD64, and ZSEEK64.

Referenced by QuaZip::getComment().

```
2060 {
2061     unz64_s* s;
2062     uLong uReadThis ;
2063     if (file==NULL)
2064         return (int)UNZ_PARAMERROR;
2065     s=(unz64_s*)file;
2066
2067     uReadThis = uSizeBuf;
2068     if (uReadThis>s->gi.size_comment)
2069         uReadThis = s->gi.size_comment;
2070
2071     if (ZSEEK64(s->z_filefunc,s->filestream,s->
     central_pos+22,ZLIB_FILEFUNC_SEEK_SET)!=0)
2072         return UNZ_ERRNO;
2073
2074     if (uReadThis>0)
2075     {
2076       *szComment='\0';
2077       if (ZREAD64(s->z_filefunc,s->filestream,szComment,uReadThis)!=uReadThis)
2078         return UNZ_ERRNO;
2079     }
2080
2081     if ((szComment != NULL) && (uSizeBuf > s->gi.size_comment))
2082         *(szComment+s->gi.size_comment)='\0';
2083     return (int)uReadThis;
2084 }
```

Here is the caller graph for this function:

13.107.4.26 int ZEXPORT unzGetGlobalInfo (unzFile *file*, unz_global_info * *pglobal_info32*)

Definition at line 848 of file unzip.c.

References unz64_s::gi, unz_global_info64_s::number_entry, unz_global_info_s::number_entry, unz_global_info64_s::size_comment, unz_global_info_s::size_comment, UNZ_OK, and UNZ_PARAMERROR.

```
849 {
850     unz64_s* s;
851     if (file==NULL)
852         return UNZ_PARAMERROR;
853     s=(unz64_s*)file;
854     /* to do : check if number_entry is not truncated */
855     pglobal_info32->number_entry = (uLong)s->gi.number_entry;
856     pglobal_info32->size_comment = s->gi.size_comment;
857     return UNZ_OK;
858 }
```

13.107.4.27 int ZEXPORT unzGetGlobalInfo64 (unzFile *file*, unz_global_info64 * *pglobal_info*)

Definition at line 838 of file unzip.c.

References unz64_s::gi, UNZ_OK, and UNZ_PARAMERROR.

Referenced by QuaZip::getComment(), and QuaZip::getEntriesCount().

```
839 {
840     unz64_s* s;
841     if (file==NULL)
```

```
842         return UNZ_PARAMERROR;
843     s=(unz64_s*)file;
844     *pglobal_info=s->gi;
845     return UNZ_OK;
846 }
```

Here is the caller graph for this function:

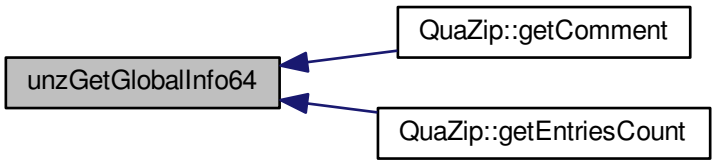

13.107.4.28 int ZEXPORT unzGetLocalExtrafield (unzFile *file*, voidp *buf*, unsigned *len*)

Definition at line 1964 of file unzip.c.

References file_in_zip64_read_info_s::filestream, file_in_zip64_read_info_s::offset_local_extrafield, unz64_s::pfile_in_zip_read, file_in_zip64_read_info_s::pos_local_extrafield, file_in_zip64_read_info_s::size_local_extrafield, UNZ_ERRNO, UNZ_PARAMERROR, file_in_zip64_read_info_s::z_filefunc, ZLIB_FILEFUNC_SEEK_SET, ZREAD64, and ZSEEK64.

```
1965 {
1966     unz64_s* s;
1967     file_in_zip64_read_info_s* pfile_in_zip_read_info;
1968     uInt read_now;
1969     ZPOS64_T size_to_read;
1970
1971     if (file==NULL)
1972         return UNZ_PARAMERROR;
1973     s=(unz64_s*)file;
1974     pfile_in_zip_read_info=s->pfile_in_zip_read;
1975
1976     if (pfile_in_zip_read_info==NULL)
1977         return UNZ_PARAMERROR;
1978
1979     size_to_read = (pfile_in_zip_read_info->size_local_extrafield -
1980                 pfile_in_zip_read_info->pos_local_extrafield);
1981
1982     if (buf==NULL)
1983         return (int)size_to_read;
1984
1985     if (len>size_to_read)
1986         read_now = (uInt)size_to_read;
1987     else
1988         read_now = (uInt)len ;
1989
1990     if (read_now==0)
1991         return 0;
1992
1993     if (ZSEEK64(pfile_in_zip_read_info->z_filefunc,
1994               pfile_in_zip_read_info->filestream,
1995               pfile_in_zip_read_info->offset_local_extrafield +
1996               pfile_in_zip_read_info->pos_local_extrafield,
1997               ZLIB_FILEFUNC_SEEK_SET)!=0)
1998         return UNZ_ERRNO;
1999
2000     if (ZREAD64(pfile_in_zip_read_info->z_filefunc,
2001               pfile_in_zip_read_info->filestream,
2002               buf,read_now)!=read_now)
2003         return UNZ_ERRNO;
2004
2005     return (int)read_now;
2006 }
```

13.107.4.29 uLong ZEXPORT unzGetOffset (unzFile *file*)

Definition at line 2102 of file unzip.c.

References unzGetOffset64().

```
2103 {
2104     ZPOS64_T offset64;
2105
2106     if (file==NULL)
2107           return 0; /*UNZ_PARAMERROR; */
2108     offset64 = unzGetOffset64(file);
2109     return (uLong)offset64;
2110 }
```

Here is the call graph for this function:

13.107.4.30 ZPOS64_T ZEXPORT unzGetOffset64 (unzFile *file*)

Definition at line 2087 of file unzip.c.

References unz64_s::current_file_ok, unz64_s::gi, unz64_s::num_file, unz_global_info64_s::number_entry, and unz64_s::pos_in_central_dir.

Referenced by unzGetOffset().

```
2088 {
2089     unz64_s* s;
2090
2091     if (file==NULL)
2092           return 0; /*UNZ_PARAMERROR; */
2093     s=(unz64_s*)file;
2094     if (!s->current_file_ok)
2095       return 0;
2096     if (s->gi.number_entry != 0 && s->gi.number_entry != 0xffff)
2097       if (s->num_file==s->gi.number_entry)
2098          return 0;
2099     return s->pos_in_central_dir;
2100 }
```

Here is the caller graph for this function:

13.107.4.31 int ZEXPORT unzGoToFilePos (unzFile *file*, unz_file_pos * *file_pos*)

Definition at line 1370 of file unzip.c.

References unz_file_pos_s::num_of_file, unz64_file_pos_s::num_of_file, unz_file_pos_s::pos_in_zip_directory, unz64_file_pos_s::pos_in_zip_directory, UNZ_PARAMERROR, and unzGoToFilePos64().

```
1373 {
1374     unz64_file_pos file_pos64;
1375     if (file_pos == NULL)
1376         return UNZ_PARAMERROR;
1377
1378     file_pos64.pos_in_zip_directory = file_pos->
     pos_in_zip_directory;
1379     file_pos64.num_of_file = file_pos->num_of_file;
1380     return unzGoToFilePos64(file,&file_pos64);
1381 }
```

Here is the call graph for this function:

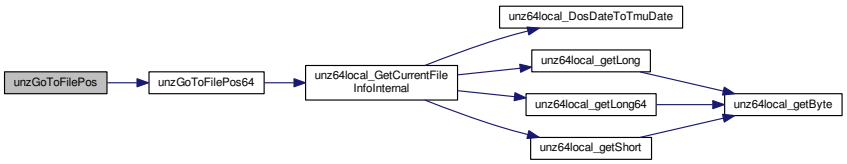

13.107.4.32 int ZEXPORT unzGoToFilePos64 (unzFile *file*, const unz64_file_pos * *file_pos*)

Definition at line 1348 of file unzip.c.

References unz64_s::cur_file_info, unz64_s::cur_file_info_internal, unz64_s::current_file_ok, unz64_s::num_file, unz64_file_pos_s::num_of_file, unz64_s::pos_in_central_dir, unz64_file_pos_s::pos_in_zip_directory, unz64local-_GetCurrentFileInfoInternal(), UNZ_OK, and UNZ_PARAMERROR.

Referenced by QuaZipPrivate::goToFirstUnmappedFile(), QuaZip::setCurrentFile(), and unzGoToFilePos().

```
1349 {
1350     unz64_s* s;
1351     int err;
1352
1353     if (file==NULL || file_pos==NULL)
1354         return UNZ_PARAMERROR;
1355     s=(unz64_s*)file;
1356
1357     /* jump to the right spot */
1358     s->pos_in_central_dir = file_pos->pos_in_zip_directory;
1359     s->num_file           = file_pos->num_of_file;
1360
1361     /* set the current file */
1362     err = unz64local_GetCurrentFileInfoInternal(file,&s->
      cur_file_info,
1363                                                 &s->cur_file_info_internal,
1364                                                 NULL,0,NULL,0,NULL,0);
1365     /* return results */
1366     s->current_file_ok = (err == UNZ_OK);
1367     return err;
1368 }
```

Here is the call graph for this function:

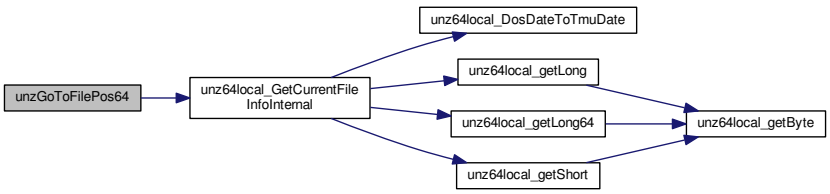

Here is the caller graph for this function:

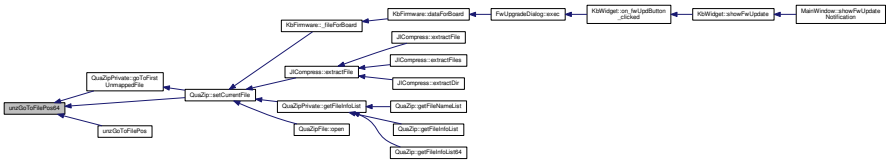

13.107.4.33 int ZEXPORT unzGoToFirstFile (unzFile *file*)

Definition at line 1188 of file unzip.c.

References unz64_s::cur_file_info, unz64_s::cur_file_info_internal, unz64_s::current_file_ok, unz64_s::num_file, unz64_s::offset_central_dir, unz64_s::pos_in_central_dir, unz64local_GetCurrentFileInfoInternal(), UNZ_OK, and UNZ_PARAMERROR.

Referenced by QuaZip::goToFirstFile(), QuaZipPrivate::goToFirstUnmappedFile(), unzLocateFile(), and unzOpenInternal().

```
1189 {
1190     int err=UNZ_OK;
1191     unz64_s* s;
1192     if (file==NULL)
1193         return UNZ_PARAMERROR;
1194     s=(unz64_s*)file;
1195     s->pos_in_central_dir=s->offset_central_dir;
1196     s->num_file=0;
1197     err=unz64local_GetCurrentFileInfoInternal(file,&s->
      cur_file_info,
1198                                               &s->cur_file_info_internal,
1199                                               NULL,0,NULL,0,NULL,0);
1200     s->current_file_ok = (err == UNZ_OK);
1201     return err;
1202 }
```

Here is the call graph for this function:

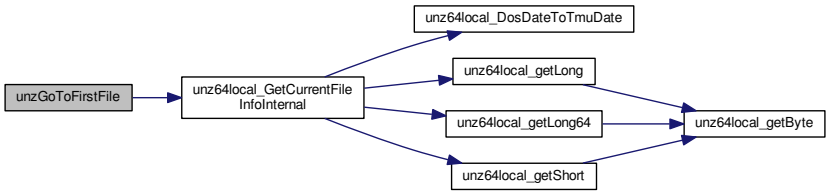

Here is the caller graph for this function:

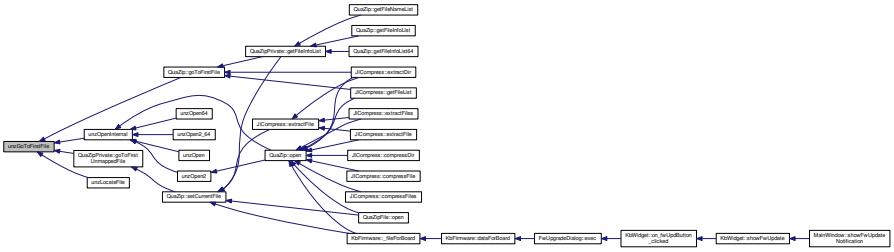

13.107.4.34 int ZEXPORT unzGoToNextFile (unzFile *file*)

Definition at line 1209 of file unzip.c.

References unz64_s::cur_file_info, unz64_s::cur_file_info_internal, unz64_s::current_file_ok, unz64_s::gi, unz64_s::num_file, unz_global_info64_s::number_entry, unz64_s::pos_in_central_dir, unz_file_info64_s::size_file_comment, unz_file_info64_s::size_file_extra, unz_file_info64_s::size_filename, SIZECENTRALDIRITEM, unz64local_GetCurrentFileInfoInternal(), UNZ_END_OF_LIST_OF_FILE, UNZ_OK, and UNZ_PARAMERROR.

Referenced by QuaZipPrivate::goToFirstUnmappedFile(), QuaZip::goToNextFile(), and unzLocateFile().

```
1210 {
1211     unz64_s* s;
1212     int err;
1213
1214     if (file==NULL)
1215         return UNZ_PARAMERROR;
1216     s=(unz64_s*)file;
1217     if (!s->current_file_ok)
1218         return UNZ_END_OF_LIST_OF_FILE;
1219     if (s->gi.number_entry != 0xffff)    /* 2^16 files overflow hack */
1220       if (s->num_file+1==s->gi.number_entry)
1221         return UNZ_END_OF_LIST_OF_FILE;
1222
1223     s->pos_in_central_dir += SIZECENTRALDIRITEM + s->
     cur_file_info.size_filename +
1224             s->cur_file_info.size_file_extra + s->
     cur_file_info.size_file_comment ;
1225     s->num_file++;
1226     err = unz64local_GetCurrentFileInfoInternal(file,&s->
     cur_file_info,
1227                                                 &s->cur_file_info_internal,
1228                                                 NULL,0,NULL,0,NULL,0);
1229     s->current_file_ok = (err == UNZ_OK);
1230     return err;
1231 }
```

Here is the call graph for this function:

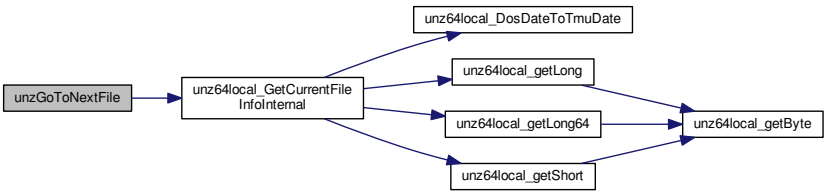

Here is the caller graph for this function:

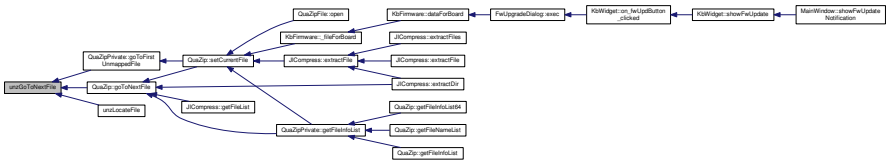

13.107.4.35 int ZEXPORT unzLocateFile (unzFile *file*, const char * *szFileName*, int *iCaseSensitivity*)

Definition at line 1242 of file unzip.c.

References unz64_s::cur_file_info, unz64_s::cur_file_info_internal, unz64_s::current_file_ok, unz64_s::num_file, unz64_s::pos_in_central_dir, UNZ_END_OF_LIST_OF_FILE, UNZ_MAXFILENAMEINZIP, UNZ_OK, UNZ_PARAMERROR, unzGetCurrentFileInfo64(), unzGoToFirstFile(), unzGoToNextFile(), and unzStringFileNameCompare().

```
1243 {
1244     unz64_s* s;
1245     int err;
1246
1247     /* We remember the 'current' position in the file so that we can jump
1248      * back there if we fail.
1249      */
1250     unz_file_info64 cur_file_infoSaved;
1251     unz_file_info64_internal cur_file_info_internalSaved;
1252     ZPOS64_T num_fileSaved;
1253     ZPOS64_T pos_in_central_dirSaved;
1254
1255
1256     if (file==NULL)
1257         return UNZ_PARAMERROR;
1258
1259     if (strlen(szFileName)>=UNZ_MAXFILENAMEINZIP)
1260         return UNZ_PARAMERROR;
1261
1262     s=(unz64_s*)file;
1263     if (!s->current_file_ok)
1264         return UNZ_END_OF_LIST_OF_FILE;
1265
1266     /* Save the current state */
1267     num_fileSaved = s->num_file;
1268     pos_in_central_dirSaved = s->pos_in_central_dir;
1269     cur_file_infoSaved = s->cur_file_info;
1270     cur_file_info_internalSaved = s->cur_file_info_internal;
1271
1272     err = unzGoToFirstFile(file);
1273
1274     while (err == UNZ_OK)
1275     {
1276         char szCurrentFileName[UNZ_MAXFILENAMEINZIP+1];
1277         err = unzGetCurrentFileInfo64(file,NULL,
1278                                       szCurrentFileName,sizeof(szCurrentFileName)-1,
1279                                       NULL,0,NULL,0);
1280         if (err == UNZ_OK)
1281         {
1282             if (unzStringFileNameCompare(szCurrentFileName,
1283                                          szFileName,iCaseSensitivity)==0)
1284                 return UNZ_OK;
1285             err = unzGoToNextFile(file);
1286         }
1287     }
1288
1289     /* We failed, so restore the state of the 'current file' to where we
1290      * were.
1291      */
1292     s->num_file = num_fileSaved ;
1293     s->pos_in_central_dir = pos_in_central_dirSaved ;
1294     s->cur_file_info = cur_file_infoSaved;
1295     s->cur_file_info_internal = cur_file_info_internalSaved;
1296     return err;
1297 }
```

Here is the call graph for this function:

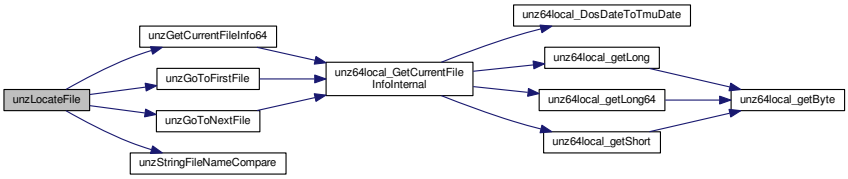

13.107.4.36 unzFile ZEXPORT unzOpen (voidpf *file*)

Definition at line 800 of file unzip.c.

References UNZ_DEFAULT_FLAGS, and unzOpenInternal().

```
801 {
802     return unzOpenInternal(file, NULL, 0, UNZ_DEFAULT_FLAGS);
803 }
```

Here is the call graph for this function:

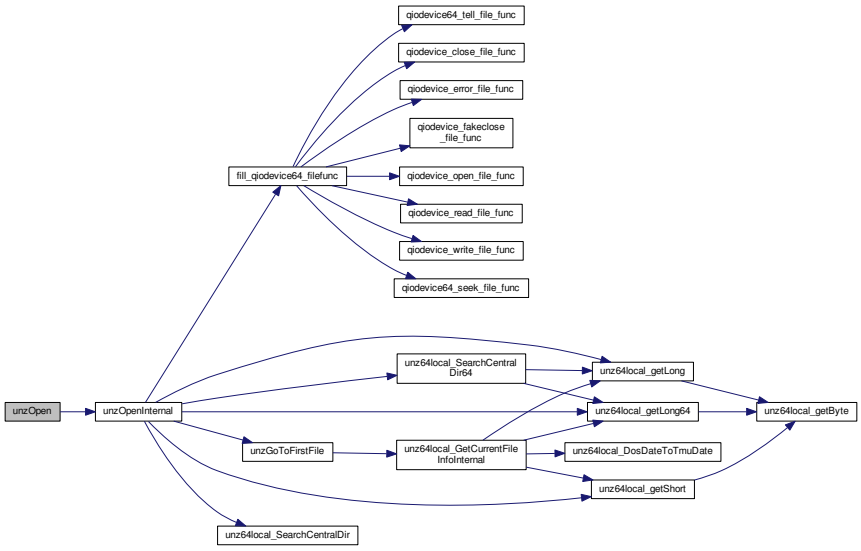

13.107.4.37 unzFile ZEXPORT unzOpen2 (voidpf *file*, zlib_filefunc_def * *pzlib_filefunc32_def*)

Definition at line 772 of file unzip.c.

References fill_zlib_filefunc64_32_def_from_filefunc32(), UNZ_DEFAULT_FLAGS, and unzOpenInternal().

Referenced by QuaZip::open().

```
774 {
775     if (pzlib_filefunc32_def != NULL)
776     {
777         zlib_filefunc64_32_def zlib_filefunc64_32_def_fill;
778         fill_zlib_filefunc64_32_def_from_filefunc32(&
```

```
      zlib_filefunc64_32_def_fill,pzlib_filefunc32_def);
779         return unzOpenInternal(file, &zlib_filefunc64_32_def_fill, 0,
    UNZ_DEFAULT_FLAGS);
780     }
781     else
782         return unzOpenInternal(file, NULL, 0, UNZ_DEFAULT_FLAGS);
783 }
```

Here is the call graph for this function:

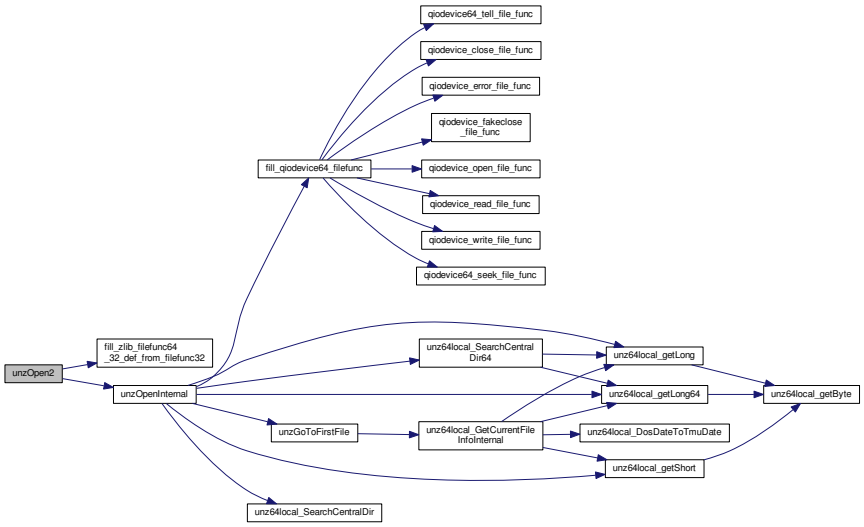

Here is the caller graph for this function:

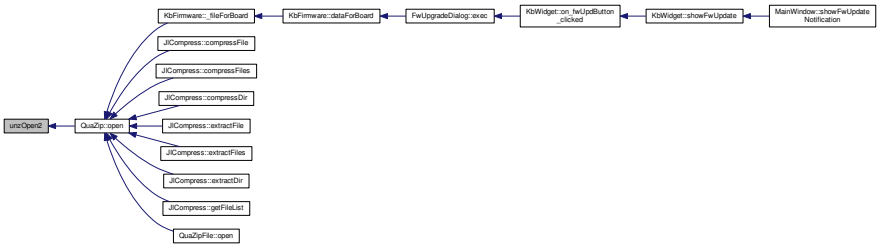

13.107.4.38 unzFile ZEXPORT unzOpen2_64 (voidpf *file*, zlib_filefunc64_def * *pzlib_filefunc_def*)

Definition at line 785 of file unzip.c.

References UNZ_DEFAULT_FLAGS, unzOpenInternal(), zlib_filefunc64_32_def_s::zfile_func64, zlib_filefunc64_-32_def_s::zseek32_file, and zlib_filefunc64_32_def_s::ztell32_file.

```
787 {
788     if (pzlib_filefunc_def != NULL)
789     {
790         zlib_filefunc64_32_def zlib_filefunc64_32_def_fill;
791         zlib_filefunc64_32_def_fill.zfile_func64 = *pzlib_filefunc_def;
792         zlib_filefunc64_32_def_fill.ztell32_file = NULL;
793         zlib_filefunc64_32_def_fill.zseek32_file = NULL;
794         return unzOpenInternal(file, &zlib_filefunc64_32_def_fill, 1,
    UNZ_DEFAULT_FLAGS);
795     }
796     else
```

```
797         return unzOpenInternal(file, NULL, 1, UNZ_DEFAULT_FLAGS);
798 }
```

Here is the call graph for this function:

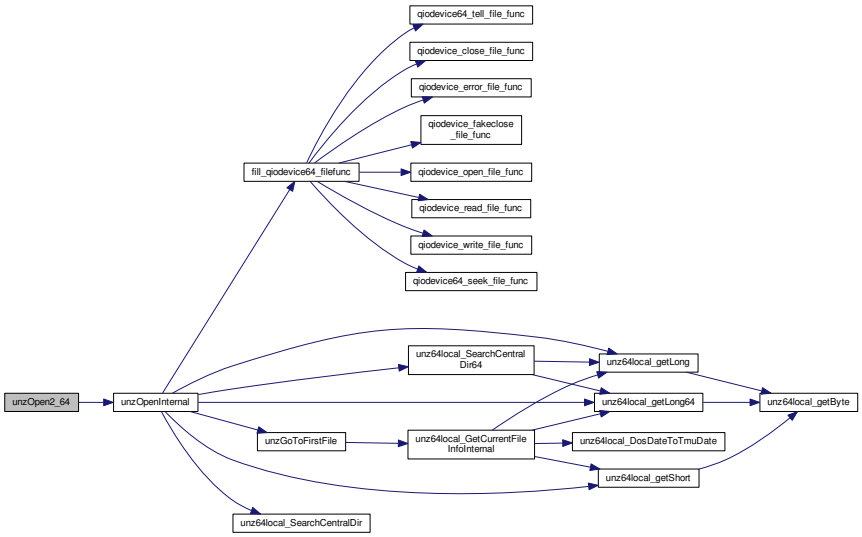

13.107.4.39 unzFile ZEXPORT unzOpen64 (voidpf *file*)

Definition at line 805 of file unzip.c.

References UNZ_DEFAULT_FLAGS, and unzOpenInternal().

```
806 {
807     return unzOpenInternal(file, NULL, 1, UNZ_DEFAULT_FLAGS);
808 }
```

Here is the call graph for this function:

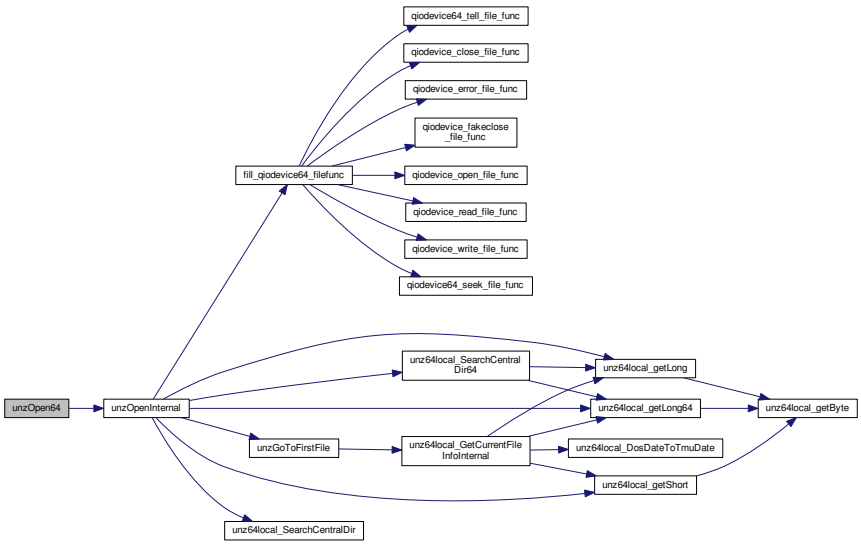

13.107.4.40 int ZEXPORT unzOpenCurrentFile (unzFile *file*)

Definition at line 1649 of file unzip.c.

References unzOpenCurrentFile3().

```
1650 {
1651     return unzOpenCurrentFile3(file, NULL, NULL, 0, NULL);
1652 }
```

Here is the call graph for this function:



13.107.4.41 int ZEXPORT unzOpenCurrentFile2 (unzFile *file*, int * *method*, int * *level*, int *raw*)

Definition at line 1659 of file unzip.c.

References unzOpenCurrentFile3().

```
1660 {
1661     return unzOpenCurrentFile3(file, method, level, raw, NULL);
1662 }
```

Here is the call graph for this function:



13.107.4.42 int ZEXPORT unzOpenCurrentFile3 (unzFile *file*, int * *method*, int * *level*, int *raw*, const char * *password*)

Definition at line 1480 of file unzip.c.

References ALLOC, file_in_zip64_read_info_s::byte_before_the_zipfile, unz64_s::byte_before_the_zipfile, unz_file_info64_s::compressed_size, unz_file_info64_s::compression_method, file_in_zip64_read_info_s::compression_method, unz_file_info64_s::crc, file_in_zip64_read_info_s::crc32, file_in_zip64_read_info_s::crc32_wait, unz64_s::cur_file_info, unz64_s::cur_file_info_internal, unz64_s::current_file_ok, unz64_s::encrypted, file_in_zip64_read_info_s::filestream, unz64_s::filestream, unz_file_info64_s::flag, init_keys(), unz64_s::keys, unz_file_info64_internal_s::offset_curfile, file_in_zip64_read_info_s::offset_local_extrafield, unz64_s::pcrc_32_tab, unz64_s::pfile_in_zip_read, file_in_zip64_read_info_s::pos_in_zipfile, file_in_zip64_read_info_s::pos_local_extrafield, file_in_zip64_read_info_s::raw, file_in_zip64_read_info_s::read_buffer, file_in_zip64_read_info_s::rest_read_compressed, file_in_zip64_read_info_s::rest_read_uncompressed, SEEK_SET, file_in_zip64_read_info_s::size_local_extrafield,

SIZEZIPLOCALHEADER, file_in_zip64_read_info_s::stream, file_in_zip64_read_info_s::stream_initialised, file_in_zip64_read_info_s::total_out_64, TRYFREE, unz_file_info64_s::uncompressed_size, unz64local_CheckCurrentFileCoherencyHeader(), UNZ_BADZIPFILE, UNZ_BUFSIZE, UNZ_INTERNALERROR, UNZ_OK, UNZ_PARAMERROR, unzCloseCurrentFile(), Z_BZIP2ED, file_in_zip64_read_info_s::z_filefunc, unz64_s::z_filefunc, zdecode, ZREAD64, and ZSEEK64.

Referenced by QuaZipFile::open(), unzOpenCurrentFile(), unzOpenCurrentFile2(), and unzOpenCurrentFilePassword().

```
1482 {
1483     int err=UNZ_OK;
1484     uInt iSizeVar;
1485     unz64_s* s;
1486     file_in_zip64_read_info_s* pfile_in_zip_read_info;
1487     ZPOS64_T offset_local_extrafield;  /* offset of the local extra field */
1488     uInt  size_local_extrafield;    /* size of the local extra field */
1489 #    ifndef NOUNCRYPT
1490     char source[12];
1491 #    else
1492     if (password != NULL)
1493         return UNZ_PARAMERROR;
1494 #    endif
1495
1496     if (file==NULL)
1497         return UNZ_PARAMERROR;
1498     s=(unz64_s*)file;
1499     if (!s->current_file_ok)
1500         return UNZ_PARAMERROR;
1501
1502     if (s->pfile_in_zip_read != NULL)
1503         unzCloseCurrentFile(file);
1504
1505     if (unz64local_CheckCurrentFileCoherencyHeader(s,&iSizeVar, &
     offset_local_extrafield,&size_local_extrafield)!=UNZ_OK)
1506         return UNZ_BADZIPFILE;
1507
1508     pfile_in_zip_read_info = (file_in_zip64_read_info_s*)
     ALLOC(sizeof(file_in_zip64_read_info_s));
1509     if (pfile_in_zip_read_info==NULL)
1510         return UNZ_INTERNALERROR;
1511
1512     pfile_in_zip_read_info->read_buffer=(char*)ALLOC(UNZ_BUFSIZE);
1513     pfile_in_zip_read_info->offset_local_extrafield = offset_local_extrafield;
1514     pfile_in_zip_read_info->size_local_extrafield = size_local_extrafield;
1515     pfile_in_zip_read_info->pos_local_extrafield=0;
1516     pfile_in_zip_read_info->raw=raw;
1517
1518     if (pfile_in_zip_read_info->read_buffer==NULL)
1519     {
1520         TRYFREE(pfile_in_zip_read_info);
1521         return UNZ_INTERNALERROR;
1522     }
1523
1524     pfile_in_zip_read_info->stream_initialised=0;
1525
1526     if (method!=NULL)
1527         *method = (int)s->cur_file_info.compression_method;
1528
1529     if (level!=NULL)
1530     {
1531         *level = 6;
1532         switch (s->cur_file_info.flag & 0x06)
1533         {
1534           case 6 : *level = 1; break;
1535           case 4 : *level = 2; break;
1536           case 2 : *level = 9; break;
1537         }
1538     }
1539
1540     if ((s->cur_file_info.compression_method!=0) &&
1541 /* #ifdef HAVE_BZIP2 */
1542         (s->cur_file_info.compression_method!=
     Z_BZIP2ED) &&
1543 /* #endif */
1544         (s->cur_file_info.compression_method!=Z_DEFLATED))
1545
1546         err=UNZ_BADZIPFILE;
1547
1548     pfile_in_zip_read_info->crc32_wait=s->cur_file_info.
     crc;
1549     pfile_in_zip_read_info->crc32=0;
1550     pfile_in_zip_read_info->total_out_64=0;
1551     pfile_in_zip_read_info->compression_method = s->
     cur_file_info.compression_method;
```

```
1552     pfile_in_zip_read_info->filestream=s->filestream;
1553     pfile_in_zip_read_info->z_filefunc=s->z_filefunc;
1554     pfile_in_zip_read_info->byte_before_the_zipfile=s->
     byte_before_the_zipfile;
1555
1556     pfile_in_zip_read_info->stream.total_out = 0;
1557
1558     if ((s->cur_file_info.compression_method==
     Z_BZIP2ED) && (!raw))
1559     {
1560 #ifdef HAVE_BZIP2
1561       pfile_in_zip_read_info->bstream.bzalloc = (void *(*) (void *, int, int))0;
1562       pfile_in_zip_read_info->bstream.bzfree = (free_func)0;
1563       pfile_in_zip_read_info->bstream.opaque = (voidpf)0;
1564       pfile_in_zip_read_info->bstream.state = (voidpf)0;
1565
1566       pfile_in_zip_read_info->stream.zalloc = (alloc_func)0;
1567       pfile_in_zip_read_info->stream.zfree = (free_func)0;
1568       pfile_in_zip_read_info->stream.opaque = (voidpf)0;
1569       pfile_in_zip_read_info->stream.next_in = (voidpf)0;
1570       pfile_in_zip_read_info->stream.avail_in = 0;
1571
1572       err=BZ2_bzDecompressInit(&pfile_in_zip_read_info->bstream, 0, 0);
1573       if (err == Z_OK)
1574         pfile_in_zip_read_info->stream_initialised=Z_BZIP2ED;
1575       else
1576       {
1577         TRYFREE(pfile_in_zip_read_info);
1578         return err;
1579       }
1580 #else
1581       pfile_in_zip_read_info->raw=1;
1582 #endif
1583     }
1584     else if ((s->cur_file_info.compression_method==Z_DEFLATED) && (!raw))
1585     {
1586       pfile_in_zip_read_info->stream.zalloc = (alloc_func)0;
1587       pfile_in_zip_read_info->stream.zfree = (free_func)0;
1588       pfile_in_zip_read_info->stream.opaque = (voidpf)0;
1589       pfile_in_zip_read_info->stream.next_in = 0;
1590       pfile_in_zip_read_info->stream.avail_in = 0;
1591
1592       err=inflateInit2(&pfile_in_zip_read_info->stream, -MAX_WBITS);
1593       if (err == Z_OK)
1594         pfile_in_zip_read_info->stream_initialised=Z_DEFLATED;
1595       else
1596       {
1597         TRYFREE(pfile_in_zip_read_info);
1598         return err;
1599       }
1600         /* windowBits is passed < 0 to tell that there is no zlib header.
1601          * Note that in this case inflate *requires* an extra "dummy" byte
1602          * after the compressed stream in order to complete decompression and
1603          * return Z_STREAM_END.
1604          * In unzip, i don't wait absolutely Z_STREAM_END because I known the
1605          * size of both compressed and uncompressed data
1606          */
1607     }
1608     pfile_in_zip_read_info->rest_read_compressed =
1609             s->cur_file_info.compressed_size ;
1610     pfile_in_zip_read_info->rest_read_uncompressed =
1611             s->cur_file_info.uncompressed_size ;
1612
1613
1614     pfile_in_zip_read_info->pos_in_zipfile =
1615             s->cur_file_info_internal.offset_curfile +
     SIZEZIPLOCALHEADER +
1616               iSizeVar;
1617
1618     pfile_in_zip_read_info->stream.avail_in = (uInt)0;
1619
1620     s->pfile_in_zip_read = pfile_in_zip_read_info;
1621                 s->encrypted = 0;
1622
1623 #    ifndef NOUNCRYPT
1624     if (password != NULL)
1625     {
1626         int i;
1627         s->pcrc_32_tab = get_crc_table();
1628         init_keys(password,s->keys,s->pcrc_32_tab);
1629         if (ZSEEK64(s->z_filefunc, s->filestream,
1630                   s->pfile_in_zip_read->pos_in_zipfile +
1631                      s->pfile_in_zip_read->
     byte_before_the_zipfile,
1632                   SEEK_SET)!=0)
1633             return UNZ_INTERNALERROR;
1634         if(ZREAD64(s->z_filefunc, s->filestream,source, 12)<12)
```

```
1635             return UNZ_INTERNALERROR;
1636
1637         for (i = 0; i<12; i++)
1638             zdecode(s->keys,s->pcrc_32_tab,source[i]);
1639
1640         s->pfile_in_zip_read->pos_in_zipfile+=12;
1641         s->encrypted=1;
1642     }
1643 #    endif
1644
1645
1646     return UNZ_OK;
1647 }
```

Here is the call graph for this function:

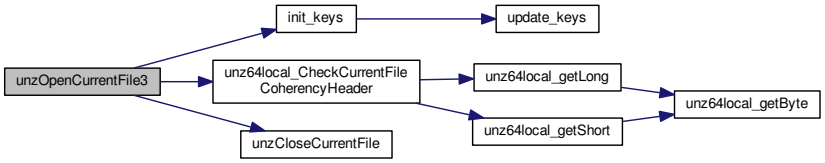

Here is the caller graph for this function:

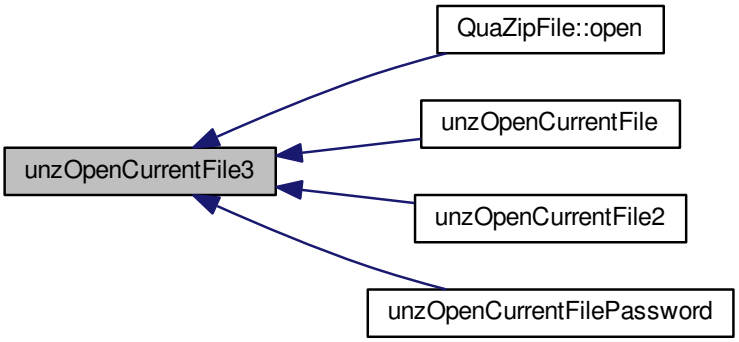

13.107.4.43 int ZEXPORT unzOpenCurrentFilePassword (unzFile *file*, const char * *password*)

Definition at line 1654 of file unzip.c.

References unzOpenCurrentFile3().

```
1655 {
1656     return unzOpenCurrentFile3(file, NULL, NULL, 0, password);
1657 }
```

Here is the call graph for this function:



13.107.4.44 unzFile unzOpenInternal (voidpf *file*, zlib_filefunc64_32_def * *pzlib_filefunc64_32_def*, int *is64bitOpenFunction*, unsigned *flags*)

Definition at line 587 of file unzip.c.

References ALLOC, unz64_s::byte_before_the_zipfile, unz64_s::central_pos, unz64_s::encrypted, unz64_s::filestream, fill_qiodevice64_filefunc(), unz64_s::flags, unz64_s::gi, unz64_s::is64bitOpenFunction, unz64_s::isZip64, unz_global_info64_s::number_entry, unz64_s::offset_central_dir, unz64_s::pfile_in_zip_read, unz64_s::size_central_dir, unz_global_info64_s::size_comment, unz64local_getLong(), unz64local_getLong64(), unz64local_getShort(), unz64local_SearchCentralDir(), unz64local_SearchCentralDir64(), UNZ_AUTO_CLOSE, UNZ_BADZIPFILE, unz_copyright, UNZ_ERRNO, UNZ_OK, unzGoToFirstFile(), unz64_s::z_filefunc, ZCLOSE64, ZFAKECLOSE64, zlib_filefunc64_32_def_s::zfile_func64, ZLIB_FILEFUNC_MODE_EXISTING, ZLIB_FILEFUNC_MODE_READ, ZLIB_FILEFUNC_SEEK_SET, ZOPEN64, zlib_filefunc64_32_def_s::zseek32_file, ZSEEK64, and zlib_filefunc64_32_def_s::ztell32_file.

Referenced by QuaZip::open(), unzOpen(), unzOpen2(), unzOpen2_64(), and unzOpen64().

```
590 {
591     unz64_s us;
592     unz64_s *s;
593     ZPOS64_T central_pos;
594     uLong   uL;
595 
596     uLong number_disk;          /* number of the current dist, used for
597                                    spaning ZIP, unsupported, always 0*/
598     uLong number_disk_with_CD;  /* number the the disk with central dir, used
599                                    for spaning ZIP, unsupported, always 0*/
600     ZPOS64_T number_entry_CD;       /* total number of entries in
601                                    the central dir
602                                    (same than number_entry on nospan) */
603 
604     int err=UNZ_OK;
605 
606     if (unz_copyright[0]!=' ')
607         return NULL;
608 
609     us.flags = flags;
610     us.z_filefunc.zseek32_file = NULL;
611     us.z_filefunc.ztell32_file = NULL;
612     if (pzlib_filefunc64_32_def==NULL)
613         fill_qiodevice64_filefunc(&us.z_filefunc.
    zfile_func64);
614     else
615         us.z_filefunc = *pzlib_filefunc64_32_def;
616     us.is64bitOpenFunction = is64bitOpenFunction;
617 
618 
619 
620     us.filestream = ZOPEN64(us.z_filefunc,
621                                                 file,
622                                                 ZLIB_FILEFUNC_MODE_READ |
623                                                 ZLIB_FILEFUNC_MODE_EXISTING);
624     if (us.filestream==NULL)
625         return NULL;
626 
627     central_pos = unz64local_SearchCentralDir64(&us.
    z_filefunc,us.filestream);
628     if (central_pos)
629     {
630         uLong uS;
631         ZPOS64_T uL64;
632 
```

```
633         us.isZip64 = 1;
634
635         if (ZSEEK64(us.z_filefunc, us.filestream,
636                                         central_pos,ZLIB_FILEFUNC_SEEK_SET)!=0)
637         err=UNZ_ERRNO;
638
639         /* the signature, already checked */
640         if (unz64local_getLong(&us.z_filefunc, us.
    filestream,&uL)!=UNZ_OK)
641             err=UNZ_ERRNO;
642
643         /* size of zip64 end of central directory record */
644         if (unz64local_getLong64(&us.z_filefunc, us.
    filestream,&uL64)!=UNZ_OK)
645             err=UNZ_ERRNO;
646
647         /* version made by */
648         if (unz64local_getShort(&us.z_filefunc, us.
    filestream,&uS)!=UNZ_OK)
649             err=UNZ_ERRNO;
650
651         /* version needed to extract */
652         if (unz64local_getShort(&us.z_filefunc, us.
    filestream,&uS)!=UNZ_OK)
653             err=UNZ_ERRNO;
654
655         /* number of this disk */
656         if (unz64local_getLong(&us.z_filefunc, us.
    filestream,&number_disk)!=UNZ_OK)
657             err=UNZ_ERRNO;
658
659         /* number of the disk with the start of the central directory */
660         if (unz64local_getLong(&us.z_filefunc, us.
    filestream,&number_disk_with_CD)!=UNZ_OK)
661             err=UNZ_ERRNO;
662
663         /* total number of entries in the central directory on this disk */
664         if (unz64local_getLong64(&us.z_filefunc, us.
    filestream,&us.gi.number_entry)!=UNZ_OK)
665             err=UNZ_ERRNO;
666
667         /* total number of entries in the central directory */
668         if (unz64local_getLong64(&us.z_filefunc, us.
    filestream,&number_entry_CD)!=UNZ_OK)
669             err=UNZ_ERRNO;
670
671         if ((number_entry_CD!=us.gi.number_entry) ||
672             (number_disk_with_CD!=0) ||
673             (number_disk!=0))
674             err=UNZ_BADZIPFILE;
675
676         /* size of the central directory */
677         if (unz64local_getLong64(&us.z_filefunc, us.
    filestream,&us.size_central_dir)!=UNZ_OK)
678             err=UNZ_ERRNO;
679
680         /* offset of start of central directory with respect to the
681           starting disk number */
682         if (unz64local_getLong64(&us.z_filefunc, us.
    filestream,&us.offset_central_dir)!=UNZ_OK)
683             err=UNZ_ERRNO;
684
685         us.gi.size_comment = 0;
686     }
687     else
688     {
689         central_pos = unz64local_SearchCentralDir(&us.
    z_filefunc,us.filestream);
690         if (central_pos==0)
691             err=UNZ_ERRNO;
692
693         us.isZip64 = 0;
694
695         if (ZSEEK64(us.z_filefunc, us.filestream,
696                                         central_pos,ZLIB_FILEFUNC_SEEK_SET)!=0)
697             err=UNZ_ERRNO;
698
699         /* the signature, already checked */
700         if (unz64local_getLong(&us.z_filefunc, us.
    filestream,&uL)!=UNZ_OK)
701             err=UNZ_ERRNO;
702
703         /* number of this disk */
704         if (unz64local_getShort(&us.z_filefunc, us.
    filestream,&number_disk)!=UNZ_OK)
705             err=UNZ_ERRNO;
706
```

```
707         /* number of the disk with the start of the central directory */
708         if (unz64local_getShort(&us.z_filefunc, us.
    filestream,&number_disk_with_CD)!=UNZ_OK)
709             err=UNZ_ERRNO;
710
711         /* total number of entries in the central dir on this disk */
712         if (unz64local_getShort(&us.z_filefunc, us.
    filestream,&uL)!=UNZ_OK)
713             err=UNZ_ERRNO;
714         us.gi.number_entry = uL;
715
716         /* total number of entries in the central dir */
717         if (unz64local_getShort(&us.z_filefunc, us.
    filestream,&uL)!=UNZ_OK)
718             err=UNZ_ERRNO;
719         number_entry_CD = uL;
720
721         if ((number_entry_CD!=us.gi.number_entry) ||
722             (number_disk_with_CD!=0) ||
723             (number_disk!=0))
724             err=UNZ_BADZIPFILE;
725
726         /* size of the central directory */
727         if (unz64local_getLong(&us.z_filefunc, us.
    filestream,&uL)!=UNZ_OK)
728             err=UNZ_ERRNO;
729         us.size_central_dir = uL;
730
731         /* offset of start of central directory with respect to the
732             starting disk number */
733         if (unz64local_getLong(&us.z_filefunc, us.
    filestream,&uL)!=UNZ_OK)
734             err=UNZ_ERRNO;
735         us.offset_central_dir = uL;
736
737         /* zipfile comment length */
738         if (unz64local_getShort(&us.z_filefunc, us.
    filestream,&us.gi.size_comment)!=UNZ_OK)
739             err=UNZ_ERRNO;
740     }
741
742     if ((central_pos<us.offset_central_dir+us.size_central_dir) &&
743         (err==UNZ_OK))
744         err=UNZ_BADZIPFILE;
745
746     if (err!=UNZ_OK)
747     {
748         if ((us.flags & UNZ_AUTO_CLOSE) != 0)
749             ZCLOSE64(us.z_filefunc, us.filestream);
750         else
751             ZFAKECLOSE64(us.z_filefunc, us.filestream);
752         return NULL;
753     }
754
755     us.byte_before_the_zipfile = central_pos -
756                             (us.offset_central_dir+us.
    size_central_dir);
757     us.central_pos = central_pos;
758     us.pfile_in_zip_read = NULL;
759     us.encrypted = 0;
760
761
762     s=(unz64_s*)ALLOC(sizeof(unz64_s));
763     if( s != NULL)
764     {
765         *s=us;
766         unzGoToFirstFile((unzFile)s);
767     }
768     return (unzFile)s;
769 }
```

Here is the call graph for this function:

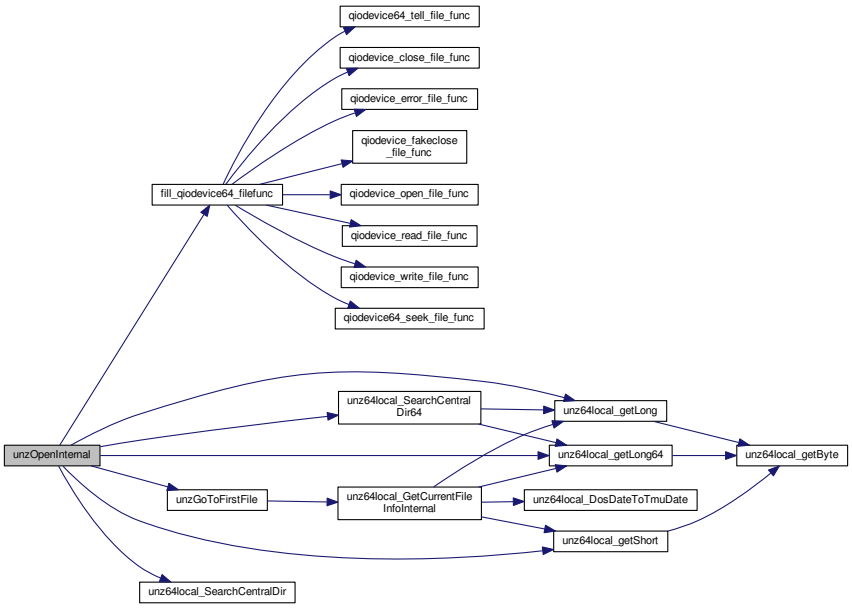

Here is the caller graph for this function:

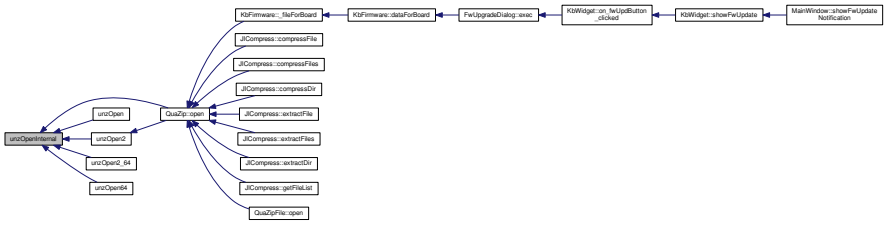

13.107.4.45 int ZEXPORT unzReadCurrentFile (unzFile *file,* voidp *buf,* unsigned *len*)

Definition at line 1692 of file unzip.c.

References file_in_zip64_read_info_s::byte_before_the_zipfile, file_in_zip64_read_info_s::compression_method, file_in_zip64_read_info_s::crc32, unz64_s::encrypted, file_in_zip64_read_info_s::filestream, unz64_s::keys, unz64_s::pcrc_32_tab, unz64_s::pfile_in_zip_read, file_in_zip64_read_info_s::pos_in_zipfile, file_in_zip64_read_info_s::raw, file_in_zip64_read_info_s::read_buffer, file_in_zip64_read_info_s::rest_read_compressed, file_in_zip64_read_info_s::rest_read_uncompressed, file_in_zip64_read_info_s::stream, file_in_zip64_read_info_s::total_out_64, UNZ_BUFSIZE, UNZ_END_OF_LIST_OF_FILE, UNZ_EOF, UNZ_ERRNO, UNZ_OK, UNZ_PARAMERROR, Z_BZIP2ED, file_in_zip64_read_info_s::z_filefunc, zdecode, ZLIB_FILEFUNC_SEEK_SET, ZREAD64, and ZSEEK64.

Referenced by QuaZipFile::readData().

```
1693 {
1694     int err=UNZ_OK;
1695     uInt iRead = 0;
1696     unz64_s* s;
1697     file_in_zip64_read_info_s* pfile_in_zip_read_info;
1698     if (file==NULL)
```

```
1699         return UNZ_PARAMERROR;
1700     s=(unz64_s*)file;
1701     pfile_in_zip_read_info=s->pfile_in_zip_read;
1702 
1703     if (pfile_in_zip_read_info==NULL)
1704         return UNZ_PARAMERROR;
1705 
1706 
1707     if (pfile_in_zip_read_info->read_buffer == NULL)
1708         return UNZ_END_OF_LIST_OF_FILE;
1709     if (len==0)
1710         return 0;
1711 
1712     pfile_in_zip_read_info->stream.next_out = (Bytef*)buf;
1713 
1714     pfile_in_zip_read_info->stream.avail_out = (uInt)len;
1715 
1716     if ((len>pfile_in_zip_read_info->rest_read_uncompressed) &&
1717         (!(pfile_in_zip_read_info->raw)))
1718         pfile_in_zip_read_info->stream.avail_out =
1719             (uInt)pfile_in_zip_read_info->rest_read_uncompressed;
1720 
1721     if ((len>pfile_in_zip_read_info->rest_read_compressed+
1722            pfile_in_zip_read_info->stream.avail_in) &&
1723          (pfile_in_zip_read_info->raw))
1724         pfile_in_zip_read_info->stream.avail_out =
1725             (uInt)pfile_in_zip_read_info->rest_read_compressed+
1726             pfile_in_zip_read_info->stream.avail_in;
1727 
1728     while (pfile_in_zip_read_info->stream.avail_out>0)
1729     {
1730         if ((pfile_in_zip_read_info->stream.avail_in==0) &&
1731             (pfile_in_zip_read_info->rest_read_compressed>0))
1732         {
1733             uInt uReadThis = UNZ_BUFSIZE;
1734             if (pfile_in_zip_read_info->rest_read_compressed<uReadThis)
1735                 uReadThis = (uInt)pfile_in_zip_read_info->rest_read_compressed;
1736             if (uReadThis == 0)
1737                 return UNZ_EOF;
1738             if (ZSEEK64(pfile_in_zip_read_info->z_filefunc,
1739                       pfile_in_zip_read_info->filestream,
1740                       pfile_in_zip_read_info->pos_in_zipfile +
1741                          pfile_in_zip_read_info->byte_before_the_zipfile,
1742                          ZLIB_FILEFUNC_SEEK_SET)!=0)
1743                 return UNZ_ERRNO;
1744             if (ZREAD64(pfile_in_zip_read_info->z_filefunc,
1745                       pfile_in_zip_read_info->filestream,
1746                       pfile_in_zip_read_info->read_buffer,
1747                       uReadThis)!=uReadThis)
1748                 return UNZ_ERRNO;
1749 
1750 
1751 #            ifndef NOUNCRYPT
1752             if(s->encrypted)
1753             {
1754                 uInt i;
1755                 for(i=0;i<uReadThis;i++)
1756                   pfile_in_zip_read_info->read_buffer[i] =
1757                       zdecode(s->keys,s->pcrc_32_tab,
1758                               pfile_in_zip_read_info->read_buffer[i]);
1759             }
1760 #            endif
1761 
1762 
1763             pfile_in_zip_read_info->pos_in_zipfile += uReadThis;
1764 
1765             pfile_in_zip_read_info->rest_read_compressed-=uReadThis;
1766 
1767             pfile_in_zip_read_info->stream.next_in =
1768                 (Bytef*)pfile_in_zip_read_info->read_buffer;
1769             pfile_in_zip_read_info->stream.avail_in = (uInt)uReadThis;
1770         }
1771 
1772         if ((pfile_in_zip_read_info->compression_method==0) || (pfile_in_zip_read_info->
    raw))
1773         {
1774             uInt uDoCopy,i ;
1775 
1776             if ((pfile_in_zip_read_info->stream.avail_in == 0) &&
1777                 (pfile_in_zip_read_info->rest_read_compressed == 0))
1778                 return (iRead==0) ? UNZ_EOF : iRead;
1779 
1780             if (pfile_in_zip_read_info->stream.avail_out <
1781                             pfile_in_zip_read_info->stream.avail_in)
1782                 uDoCopy = pfile_in_zip_read_info->stream.avail_out ;
1783             else
1784                 uDoCopy = pfile_in_zip_read_info->stream.avail_in ;
```

```
1785
1786            for (i=0;i<uDoCopy;i++)
1787                *(pfile_in_zip_read_info->stream.next_out+i) =
1788                        *(pfile_in_zip_read_info->stream.next_in+i);
1789
1790            pfile_in_zip_read_info->total_out_64 = pfile_in_zip_read_info->
    total_out_64 + uDoCopy;
1791
1792            pfile_in_zip_read_info->crc32 = crc32(pfile_in_zip_read_info->
    crc32,
1793                                  pfile_in_zip_read_info->stream.next_out,
1794                                  uDoCopy);
1795            pfile_in_zip_read_info->rest_read_uncompressed-=uDoCopy;
1796            pfile_in_zip_read_info->stream.avail_in -= uDoCopy;
1797            pfile_in_zip_read_info->stream.avail_out -= uDoCopy;
1798            pfile_in_zip_read_info->stream.next_out += uDoCopy;
1799            pfile_in_zip_read_info->stream.next_in += uDoCopy;
1800            pfile_in_zip_read_info->stream.total_out += uDoCopy;
1801            iRead += uDoCopy;
1802        }
1803        else if (pfile_in_zip_read_info->compression_method==
    Z_BZIP2ED)
1804        {
1805 #ifdef HAVE_BZIP2
1806            uLong uTotalOutBefore,uTotalOutAfter;
1807            const Bytef *bufBefore;
1808            uLong uOutThis;
1809
1810            pfile_in_zip_read_info->bstream.next_in        = (char*)pfile_in_zip_read_info->
    stream.next_in;
1811            pfile_in_zip_read_info->bstream.avail_in       = pfile_in_zip_read_info->
    stream.avail_in;
1812            pfile_in_zip_read_info->bstream.total_in_lo32  = pfile_in_zip_read_info->
    stream.total_in;
1813            pfile_in_zip_read_info->bstream.total_in_hi32  = 0;
1814            pfile_in_zip_read_info->bstream.next_out       = (char*)pfile_in_zip_read_info->
    stream.next_out;
1815            pfile_in_zip_read_info->bstream.avail_out      = pfile_in_zip_read_info->
    stream.avail_out;
1816            pfile_in_zip_read_info->bstream.total_out_lo32 = pfile_in_zip_read_info->
    stream.total_out;
1817            pfile_in_zip_read_info->bstream.total_out_hi32 = 0;
1818
1819            uTotalOutBefore = pfile_in_zip_read_info->bstream.total_out_lo32;
1820            bufBefore = (const Bytef *)pfile_in_zip_read_info->bstream.next_out;
1821
1822            err=BZ2_bzDecompress(&pfile_in_zip_read_info->bstream);
1823
1824            uTotalOutAfter = pfile_in_zip_read_info->bstream.total_out_lo32;
1825            uOutThis = uTotalOutAfter-uTotalOutBefore;
1826
1827            pfile_in_zip_read_info->total_out_64 = pfile_in_zip_read_info->
    total_out_64 + uOutThis;
1828
1829            pfile_in_zip_read_info->crc32 = crc32(pfile_in_zip_read_info->
    crc32,bufBefore, (uInt)(uOutThis));
1830            pfile_in_zip_read_info->rest_read_uncompressed -= uOutThis;
1831            iRead += (uInt)(uTotalOutAfter - uTotalOutBefore);
1832
1833            pfile_in_zip_read_info->stream.next_in   = (Bytef*)pfile_in_zip_read_info->bstream.
    next_in;
1834            pfile_in_zip_read_info->stream.avail_in  = pfile_in_zip_read_info->bstream.avail_in;
1835            pfile_in_zip_read_info->stream.total_in  = pfile_in_zip_read_info->bstream.total_in_lo32;
1836            pfile_in_zip_read_info->stream.next_out  = (Bytef*)pfile_in_zip_read_info->bstream.
    next_out;
1837            pfile_in_zip_read_info->stream.avail_out = pfile_in_zip_read_info->bstream.avail_out;
1838            pfile_in_zip_read_info->stream.total_out = pfile_in_zip_read_info->bstream.total_out_lo32
    ;
1839
1840            if (err==BZ_STREAM_END)
1841              return (iRead==0) ? UNZ_EOF : iRead;
1842            if (err!=BZ_OK)
1843              break;
1844 #endif
1845        } /* end Z_BZIP2ED */
1846        else
1847        {
1848            ZPOS64_T uTotalOutBefore,uTotalOutAfter;
1849            const Bytef *bufBefore;
1850            ZPOS64_T uOutThis;
1851            int flush=Z_SYNC_FLUSH;
1852
1853            uTotalOutBefore = pfile_in_zip_read_info->stream.total_out;
1854            bufBefore = pfile_in_zip_read_info->stream.next_out;
1855
1856            /*
1857            if ((pfile_in_zip_read_info->rest_read_uncompressed ==
```

```
1858                     pfile_in_zip_read_info->stream.avail_out) &&
1859                 (pfile_in_zip_read_info->rest_read_compressed == 0))
1860                 flush = Z_FINISH;
1861             */
1862             err=inflate(&pfile_in_zip_read_info->stream,flush);
1863
1864             if ((err>=0) && (pfile_in_zip_read_info->stream.msg!=NULL))
1865               err = Z_DATA_ERROR;
1866
1867             uTotalOutAfter = pfile_in_zip_read_info->stream.total_out;
1868             uOutThis = uTotalOutAfter-uTotalOutBefore;
1869
1870             pfile_in_zip_read_info->total_out_64 = pfile_in_zip_read_info->
      total_out_64 + uOutThis;
1871
1872             pfile_in_zip_read_info->crc32 =
1873                 crc32(pfile_in_zip_read_info->crc32,bufBefore,
1874                         (uInt)(uOutThis));
1875
1876             pfile_in_zip_read_info->rest_read_uncompressed -=
1877                 uOutThis;
1878
1879             iRead += (uInt)(uTotalOutAfter - uTotalOutBefore);
1880
1881             if (err==Z_STREAM_END)
1882                 return (iRead==0) ? UNZ_EOF : iRead;
1883             if (err!=Z_OK)
1884                 break;
1885         }
1886     }
1887
1888     if (err==Z_OK)
1889         return iRead;
1890     return err;
1891 }
```

Here is the caller graph for this function:

13.107.4.46 int ZEXPORT unzSetFlags (unzFile *file*, unsigned *flags*)

Definition at line 2136 of file unzip.c.

References unz64_s::flags, UNZ_OK, and UNZ_PARAMERROR.

Referenced by QuaZip::open().

```
2137 {
2138     unz64_s* s;
2139     if (file == NULL)
2140         return UNZ_PARAMERROR;
2141     s = (unz64_s*)file;
2142     s->flags |= flags;
2143     return UNZ_OK;
2144 }
```

Here is the caller graph for this function:

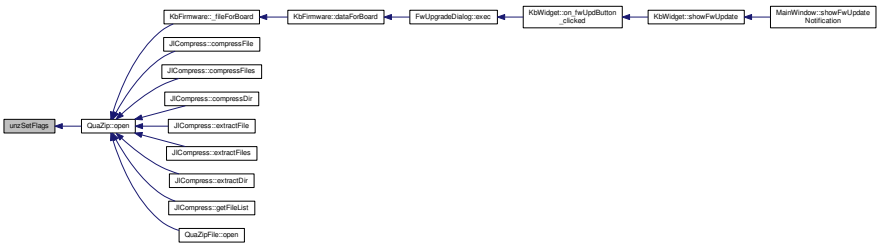

13.107.4.47 int ZEXPORT unzSetOffset (unzFile *file*, uLong *pos*)

Definition at line 2130 of file unzip.c.

References unzSetOffset64().

```
2131 {
2132     return unzSetOffset64(file,pos);
2133 }
```

Here is the call graph for this function:

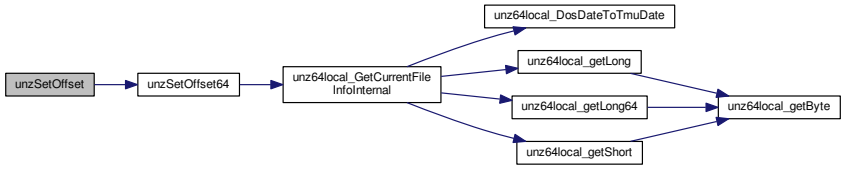

13.107.4.48 int ZEXPORT unzSetOffset64 (unzFile *file*, ZPOS64_T *pos*)

Definition at line 2112 of file unzip.c.

References unz64_s::cur_file_info, unz64_s::cur_file_info_internal, unz64_s::current_file_ok, unz64_s::gi, unz64_s::num_file, unz_global_info64_s::number_entry, unz64_s::pos_in_central_dir, unz64local_GetCurrentFileInfoInternal(), UNZ_OK, and UNZ_PARAMERROR.

Referenced by unzSetOffset().

```
2113 {
2114     unz64_s* s;
2115     int err;
2116
2117     if (file==NULL)
2118         return UNZ_PARAMERROR;
2119     s=(unz64_s*)file;
2120
2121     s->pos_in_central_dir = pos;
2122     s->num_file = s->gi.number_entry;       /* hack */
2123     err = unz64local_GetCurrentFileInfoInternal(file,&s->
      cur_file_info,
2124                                                 &s->cur_file_info_internal,
2125                                                 NULL,0,NULL,0,NULL,0);
2126     s->current_file_ok = (err == UNZ_OK);
2127     return err;
2128 }
```

Here is the call graph for this function:

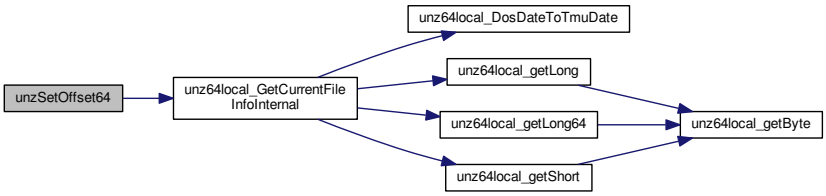

Here is the caller graph for this function:

13.107.4.49 int ZEXPORT unzStringFileNameCompare (const char * *fileName1*, const char * *fileName2*, int *iCaseSensitivity*)

Definition at line 393 of file unzip.c.

References CASESENSITIVITYDEFAULTVALUE, and STRCMPCASENOSENTIVEFUNCTION.

Referenced by unzLocateFile().

```
397 {
398     if (iCaseSensitivity==0)
399         iCaseSensitivity=CASESENSITIVITYDEFAULTVALUE;
400
401     if (iCaseSensitivity==1)
402         return strcmp(fileName1,fileName2);
403
404     return STRCMPCASENOSENTIVEFUNCTION(fileName1,fileName2);
405 }
```

Here is the caller graph for this function:

13.107.4.50 z_off_t ZEXPORT unztell (unzFile *file*)

Definition at line 1897 of file unzip.c.

References unz64_s::pfile_in_zip_read, file_in_zip64_read_info_s::stream, and UNZ_PARAMERROR.

Referenced by QuaZipFile::pos().

```
1898 {
1899     unz64_s* s;
1900     file_in_zip64_read_info_s* pfile_in_zip_read_info;
1901     if (file==NULL)
1902         return UNZ_PARAMERROR;
1903     s=(unz64_s*)file;
1904     pfile_in_zip_read_info=s->pfile_in_zip_read;
1905
1906     if (pfile_in_zip_read_info==NULL)
1907         return UNZ_PARAMERROR;
1908
1909     return (z_off_t)pfile_in_zip_read_info->stream.total_out;
1910 }
```

Here is the caller graph for this function:



13.107.4.51 ZPOS64_T ZEXPORT unztell64 (unzFile *file*)

Definition at line 1912 of file unzip.c.

References unz64_s::pfile_in_zip_read, and file_in_zip64_read_info_s::total_out_64.

```
1913 {
1914
1915     unz64_s* s;
1916     file_in_zip64_read_info_s* pfile_in_zip_read_info;
1917     if (file==NULL)
1918         return (ZPOS64_T)-1;
1919     s=(unz64_s*)file;
1920     pfile_in_zip_read_info=s->pfile_in_zip_read;
1921
1922     if (pfile_in_zip_read_info==NULL)
1923         return (ZPOS64_T)-1;
1924
1925     return pfile_in_zip_read_info->total_out_64;
1926 }
```

13.107.5 Variable Documentation

13.107.5.1 const char unz_copyright[ ]

Initial value:

```
=
   " unzip 1.01 Copyright 1998-2004 Gilles Vollant - http://www.winimage.com/zLibDll"
```

Definition at line 124 of file unzip.c.

Referenced by unzOpenInternal().

13.108 src/ckb/quazip/unzip.h File Reference

```
#include "zlib.h"
#include "ioapi.h"
```

Include dependency graph for unzip.h:

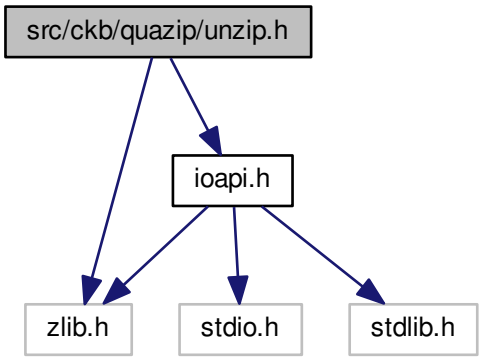

This graph shows which files directly or indirectly include this file:

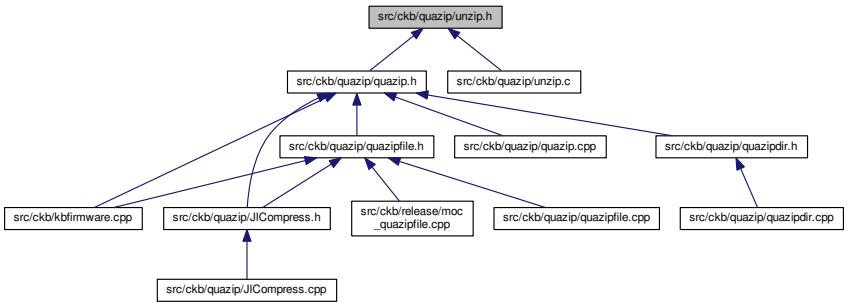

Data Structures

- struct tm_unz_s
- struct unz_global_info64_s
- struct unz_global_info_s
- struct unz_file_info64_s
- struct unz_file_info_s
- struct unz_file_pos_s
- struct unz64_file_pos_s

Macros

- #define Z_BZIP2ED 12

- #define UNZ_OK (0)
- #define UNZ_END_OF_LIST_OF_FILE (-100)
- #define UNZ_ERRNO (Z_ERRNO)
- #define UNZ_EOF (0)
- #define UNZ_PARAMERROR (-102)
- #define UNZ_BADZIPFILE (-103)
- #define UNZ_INTERNALERROR (-104)
- #define UNZ_CRCERROR (-105)
- #define UNZ_AUTO_CLOSE 0x01u
- #define UNZ_DEFAULT_FLAGS UNZ_AUTO_CLOSE

Typedefs

- typedef voidp unzFile
- typedef struct tm_unz_s tm_unz
- typedef struct unz_global_info64_s unz_global_info64
- typedef struct unz_global_info_s unz_global_info
- typedef struct unz_file_info64_s unz_file_info64
- typedef struct unz_file_info_s unz_file_info
- typedef struct unz_file_pos_s unz_file_pos
- typedef struct unz64_file_pos_s unz64_file_pos

Functions

- int ZEXPORT unzStringFileNameCompare _Z_OF ((const char ∗fileName1, const char ∗fileName2, int iCaseSensitivity))
- unzFile ZEXPORT unzOpen _Z_OF ((voidpf file))
- unzFile ZEXPORT unzOpen2 _Z_OF ((voidpf file, zlib_filefunc_def ∗pzlib_filefunc_def))
- unzFile ZEXPORT unzOpen2_64 _Z_OF ((voidpf file, zlib_filefunc64_def ∗pzlib_filefunc_def))
- unzFile unzOpenInternal (voidpf file, zlib_filefunc64_32_def ∗pzlib_filefunc64_32_def, int is64bitOpenFunction, unsigned flags)
- int ZEXPORT unzClose _Z_OF ((unzFile file))

  Addition for GDAL : START.
- int ZEXPORT unzGetGlobalInfo _Z_OF ((unzFile file, unz_global_info ∗pglobal_info))
- int ZEXPORT unzGetGlobalInfo64 _Z_OF ((unzFile file, unz_global_info64 ∗pglobal_info))
- int ZEXPORT unzGetGlobalComment _Z_OF ((unzFile file, char ∗szComment, uLong uSizeBuf))
- int ZEXPORT unzLocateFile _Z_OF ((unzFile file, const char ∗szFileName, int iCaseSensitivity))
- int ZEXPORT unzGetFilePos (unzFile file, unz_file_pos ∗file_pos)
- int ZEXPORT unzGoToFilePos (unzFile file, unz_file_pos ∗file_pos)
- int ZEXPORT unzGetFilePos64 (unzFile file, unz64_file_pos ∗file_pos)
- int ZEXPORT unzGoToFilePos64 (unzFile file, const unz64_file_pos ∗file_pos)
- int ZEXPORT unzGetCurrentFileInfo64 _Z_OF ((unzFile file, unz_file_info64 ∗pfile_info, char ∗szFileName, uLong fileNameBufferSize, void ∗extraField, uLong extraFieldBufferSize, char ∗szComment, uLong commentBufferSize))
- int ZEXPORT unzGetCurrentFileInfo _Z_OF ((unzFile file, unz_file_info ∗pfile_info, char ∗szFileName, uLong fileNameBufferSize, void ∗extraField, uLong extraFieldBufferSize, char ∗szComment, uLong commentBufferSize))
- int ZEXPORT unzOpenCurrentFilePassword _Z_OF ((unzFile file, const char ∗password))
- int ZEXPORT unzOpenCurrentFile2 _Z_OF ((unzFile file, int ∗method, int ∗level, int raw))
- int ZEXPORT unzOpenCurrentFile3 _Z_OF ((unzFile file, int ∗method, int ∗level, int raw, const char ∗password))
- int ZEXPORT unzReadCurrentFile _Z_OF ((unzFile file, voidp buf, unsigned len))
- ZPOS64_T ZEXPORT unzGetOffset64 (unzFile file)

- uLong ZEXPORT unzGetOffset (unzFile file)
- int ZEXPORT unzSetOffset64 (unzFile file, ZPOS64_T pos)
- int ZEXPORT unzSetOffset (unzFile file, uLong pos)
- int ZEXPORT unzSetFlags (unzFile file, unsigned flags)
- int ZEXPORT unzClearFlags (unzFile file, unsigned flags)

13.108.1 Data Structure Documentation

13.108.1.1 struct tm_unz_s

Definition at line 92 of file unzip.h.

Collaboration diagram for tm_unz_s:

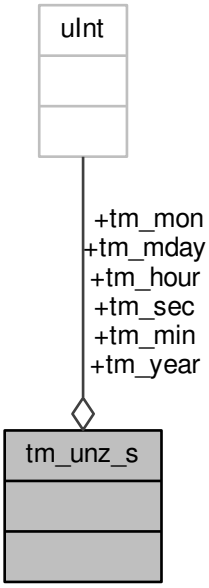

Data Fields

uInt	tm_hour	
uInt	tm_mday	
uInt	tm_min	
uInt	tm_mon	
uInt	tm_sec	
uInt	tm_year	

13.108.1.2 struct unz_global_info64_s

Definition at line 104 of file unzip.h.

Collaboration diagram for unz_global_info64_s:

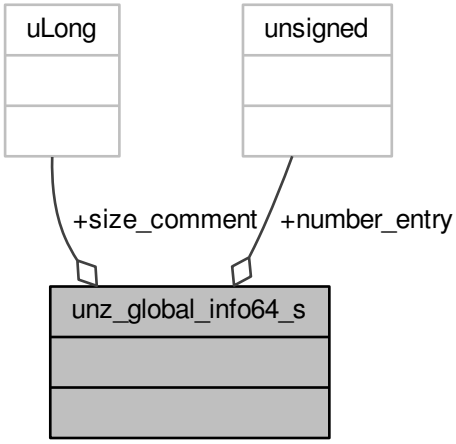

Data Fields

ZPOS64_T	number_entry	
uLong	size_comment	

13.108.1.3 struct unz_global_info_s

Definition at line 111 of file unzip.h.

Collaboration diagram for unz_global_info_s:

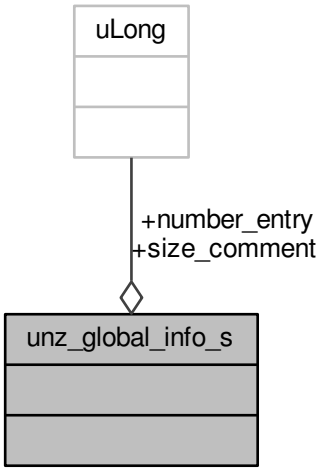

Data Fields

uLong	number_entry	
uLong	size_comment	

13.108.1.4 struct unz_file_info64_s

Definition at line 119 of file unzip.h.

Collaboration diagram for unz_file_info64_s:

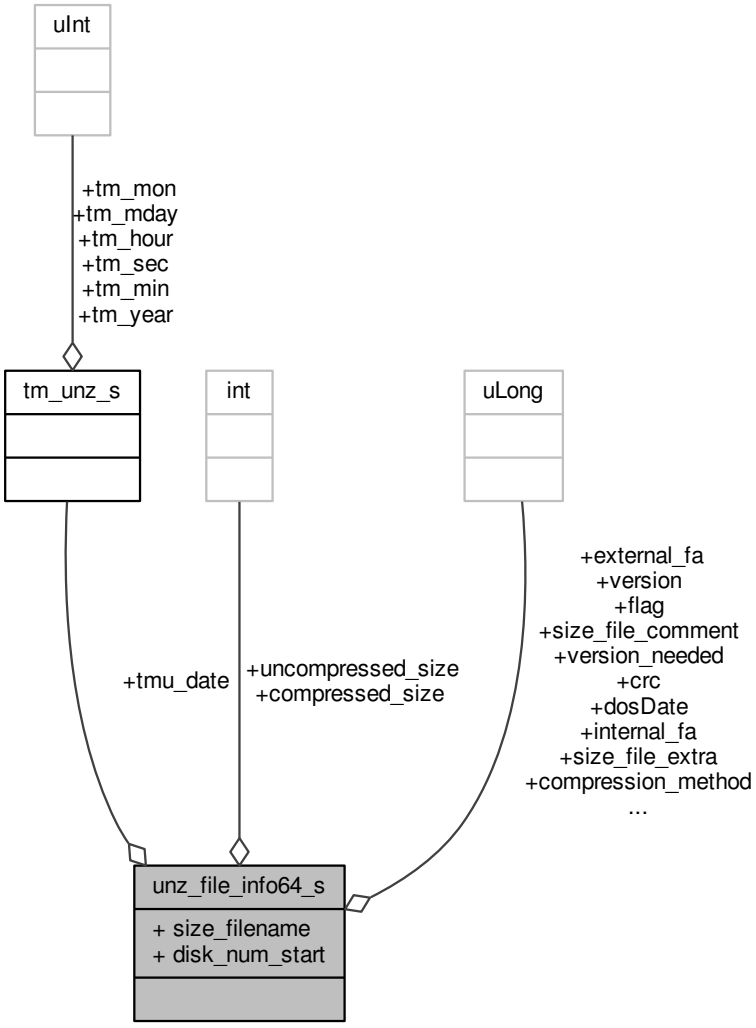

Data Fields

ZPOS64_T	compressed_-size	

uLong	compression_- method	
uLong	crc	
uLong	disk_num_start	
uLong	dosDate	
uLong	external_fa	
uLong	flag	
uLong	internal_fa	
uLong	size_file_- comment	
uLong	size_file_extra	
uLong	size_filename	
tm_unz	tmu_date	
ZPOS64_T	uncompressed_- size	
uLong	version	
uLong	version_needed	

13.108.1.5 struct unz_file_info_s

Definition at line 140 of file unzip.h.

Collaboration diagram for unz_file_info_s:

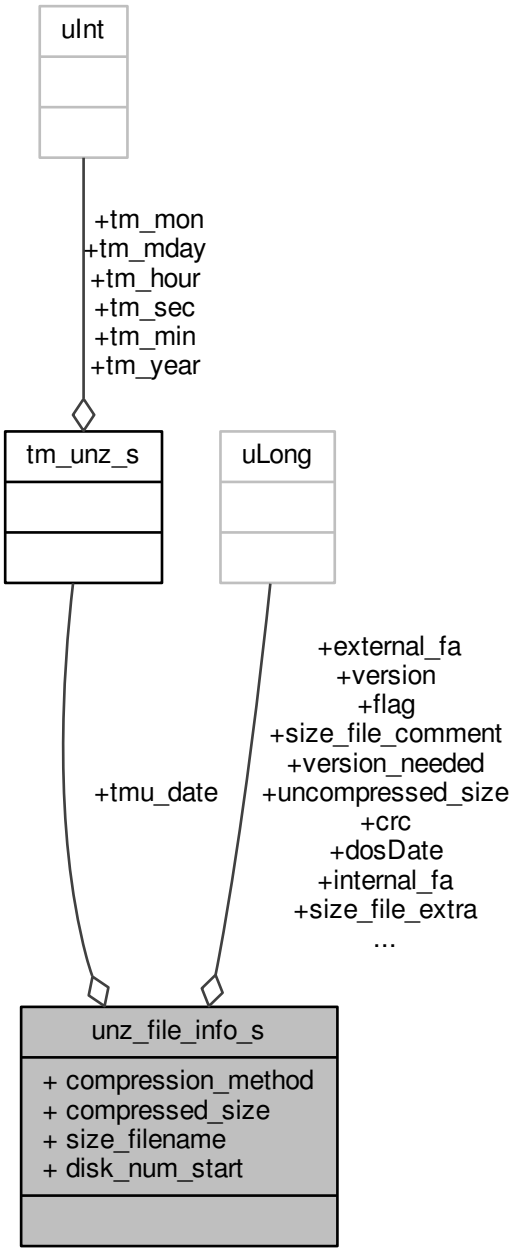

Data Fields

uLong	compressed_-size	

uLong	compression_-method	
uLong	crc	
uLong	disk_num_start	
uLong	dosDate	
uLong	external_fa	
uLong	flag	
uLong	internal_fa	
uLong	size_file_-comment	
uLong	size_file_extra	
uLong	size_filename	
tm_unz	tmu_date	
uLong	uncompressed_-size	
uLong	version	
uLong	version_needed	

13.108.1.6 struct unz_file_pos_s

Definition at line 278 of file unzip.h.

Collaboration diagram for unz_file_pos_s:

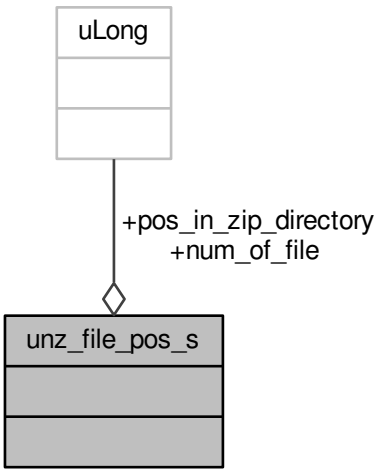

Data Fields

uLong	num_of_file	
uLong	pos_in_zip_-directory	

13.108.1.7 struct unz64_file_pos_s

Definition at line 292 of file unzip.h.

Collaboration diagram for unz64_file_pos_s:

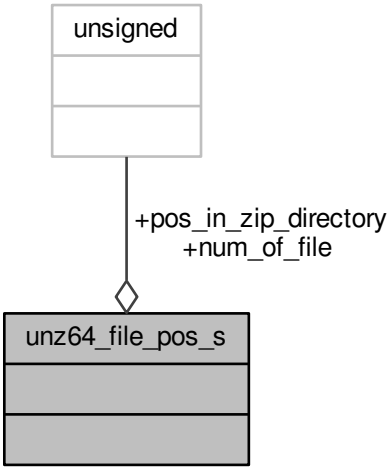

Data Fields

ZPOS64_T	num_of_file	
ZPOS64_T	pos_in_zip_-directory	

13.108.2 Macro Definition Documentation

13.108.2.1 #define UNZ_AUTO_CLOSE 0x01u

Definition at line 88 of file unzip.h.

Referenced by QuaZip::open(), unzClose(), and unzOpenInternal().

13.108.2.2 #define UNZ_BADZIPFILE (-103)

Definition at line 84 of file unzip.h.

Referenced by unz64local_CheckCurrentFileCoherencyHeader(), unz64local_GetCurrentFileInfoInternal(), unzOpenCurrentFile3(), and unzOpenInternal().

13.108.2.3 #define UNZ_CRCERROR (-105)

Definition at line 86 of file unzip.h.

Referenced by unzCloseCurrentFile().

13.108.2.4 #define UNZ_DEFAULT_FLAGS UNZ_AUTO_CLOSE

Definition at line 89 of file unzip.h.

Referenced by unzOpen(), unzOpen2(), unzOpen2_64(), and unzOpen64().

13.108.2.5 #define UNZ_END_OF_LIST_OF_FILE (-100)

Definition at line 80 of file unzip.h.

Referenced by QuaZipPrivate::goToFirstUnmappedFile(), QuaZip::goToNextFile(), unzGetFilePos64(), unzGoToNextFile(), unzLocateFile(), and unzReadCurrentFile().

13.108.2.6 #define UNZ_EOF (0)

Definition at line 82 of file unzip.h.

Referenced by unz64local_getByte(), and unzReadCurrentFile().

13.108.2.7 #define UNZ_ERRNO (Z_ERRNO)

Definition at line 81 of file unzip.h.

Referenced by unz64local_CheckCurrentFileCoherencyHeader(), unz64local_getByte(), unz64local_GetCurrentFileInfoInternal(), unzGetGlobalComment(), unzGetLocalExtrafield(), unzOpenInternal(), and unzReadCurrentFile().

13.108.2.8 #define UNZ_INTERNALERROR (-104)

Definition at line 85 of file unzip.h.

Referenced by unzOpenCurrentFile3().

13.108.2.9 #define UNZ_OK (0)

Definition at line 79 of file unzip.h.

Referenced by QuaZip::close(), QuaZipFile::close(), JlCompress::compressFile(), QuaZipFile::csize(), JlCompress::extractFile(), QuaZipFile::getActualFileName(), QuaZip::getComment(), QuaZip::getCurrentFileInfo(), QuaZip::getCurrentFileName(), QuaZip::getEntriesCount(), QuaZipFile::getFileInfo(), QuaZipPrivate::getFileInfoList(), QuaZip::goToFirstFile(), QuaZipPrivate::goToFirstUnmappedFile(), QuaZip::goToNextFile(), QuaZip::open(), QuaZipFile::open(), QuaZipFile::readData(), QuaZipFilePrivate::resetZipError(), QuaZip::setCurrentFile(), QuaZipFilePrivate::setZipError(), unz64local_CheckCurrentFileCoherencyHeader(), unz64local_getByte(), unz64local_GetCurrentFileInfoInternal(), unz64local_getLong(), unz64local_getLong64(), unz64local_getShort(), unz64local_SearchCentralDir64(), unzClearFlags(), unzClose(), unzCloseCurrentFile(), unzGetCurrentFileInfo(), unzGetFilePos(), unzGetFilePos64(), unzGetGlobalInfo(), unzGetGlobalInfo64(), unzGoToFilePos64(), unzGoToFirstFile(), unzGoToNextFile(), unzLocateFile(), unzOpenCurrentFile3(), unzOpenInternal(), unzReadCurrentFile(), unzSetFlags(), unzSetOffset64(), and QuaZipFile::usize().

13.108.2.10 #define UNZ_PARAMERROR (-102)

Definition at line 83 of file unzip.h.

Referenced by QuaZip::setCurrentFile(), unz64local_GetCurrentFileInfoInternal(), unzClearFlags(), unzClose(), unzCloseCurrentFile(), unzeof(), unzGetFilePos64(), unzGetGlobalComment(), unzGetGlobalInfo(), unzGetGlobalInfo64(), unzGetLocalExtrafield(), unzGoToFilePos(), unzGoToFilePos64(), unzGoToFirstFile(), unzGoToNextFile(), unzLocateFile(), unzOpenCurrentFile3(), unzReadCurrentFile(), unzSetFlags(), unzSetOffset64(), and unztell().

13.108.2.11 #define Z_BZIP2ED 12

Definition at line 67 of file unzip.h.

Referenced by unz64local_CheckCurrentFileCoherencyHeader(), unzCloseCurrentFile(), unzOpenCurrentFile3(), unzReadCurrentFile(), zip64FlushWriteBuffer(), zipCloseFileInZipRaw64(), zipOpenNewFileInZip4_64(), and zipWriteInFileInZip().

13.108.3 Typedef Documentation

13.108.3.1 typedef struct tm_unz_s tm_unz

13.108.3.2 typedef struct unz64_file_pos_s unz64_file_pos

13.108.3.3 typedef struct unz_file_info_s unz_file_info

13.108.3.4 typedef struct unz_file_info64_s unz_file_info64

13.108.3.5 typedef struct unz_file_pos_s unz_file_pos

13.108.3.6 typedef struct unz_global_info_s unz_global_info

13.108.3.7 typedef struct unz_global_info64_s unz_global_info64

13.108.3.8 typedef voidp unzFile

Definition at line 75 of file unzip.h.

13.108.4 Function Documentation

13.108.4.1 int ZEXPORT unzStringFileNameCompare _Z_OF ((const char *fileName1, const char *fileName2, int iCaseSensitivity))

13.108.4.2 unzFile ZEXPORT unzOpen _Z_OF ((voidpf file))

13.108.4.3 unzFile ZEXPORT unzOpen2 _Z_OF ((voidpf file, zlib_filefunc_def *pzlib_filefunc_def))

13.108.4.4 unzFile ZEXPORT unzOpen2_64 _Z_OF ((voidpf file, zlib_filefunc64_def *pzlib_filefunc_def))

13.108.4.5 int ZEXPORT unzClose _Z_OF ((unzFile file))

Addition for GDAL : END.

13.108.4.6 int ZEXPORT unzGetGlobalInfo _Z_OF ((unzFile file, unz_global_info *pglobal_info))

13.108.4.7 int ZEXPORT unzGetGlobalInfo64 _Z_OF ((unzFile file, unz_global_info64 *pglobal_info))

13.108.4.8 int ZEXPORT unzGetGlobalComment _Z_OF ((unzFile file, char *szComment, uLong uSizeBuf))

13.108.4.9 int ZEXPORT unzLocateFile _Z_OF ((unzFile file, const char *szFileName, int iCaseSensitivity))

13.108.4.10 int ZEXPORT unzGetCurrentFileInfo64 _Z_OF ((unzFile file, unz_file_info64 *pfile_info, char *szFileName, uLong fileNameBufferSize, void *extraField, uLong extraFieldBufferSize, char *szComment, uLong commentBufferSize))

13.108.4.11 int ZEXPORT unzGetCurrentFileInfo _Z_OF ((unzFile file, unz_file_info ∗pfile_info, char ∗szFileName, uLong fileNameBufferSize, void ∗extraField, uLong extraFieldBufferSize, char ∗szComment, uLong commentBufferSize))

13.108.4.12 int ZEXPORT unzOpenCurrentFilePassword _Z_OF ((unzFile file, const char ∗password))

13.108.4.13 int ZEXPORT unzOpenCurrentFile2 _Z_OF ((unzFile file, int ∗method, int ∗level, int raw))

13.108.4.14 int ZEXPORT unzOpenCurrentFile3 _Z_OF ((unzFile file, int ∗method, int ∗level, int raw, const char ∗password))

13.108.4.15 int ZEXPORT unzReadCurrentFile _Z_OF ((unzFile file, voidp buf, unsigned len))

13.108.4.16 int ZEXPORT unzClearFlags (unzFile *file,* unsigned *flags*)

Definition at line 2147 of file unzip.c.

References unz64_s::flags, UNZ_OK, and UNZ_PARAMERROR.

Referenced by QuaZip::open().

```
2148 {
2149     unz64_s* s;
2150     if (file == NULL)
2151         return UNZ_PARAMERROR;
2152     s = (unz64_s*)file;
2153     s->flags &= ~flags;
2154     return UNZ_OK;
2155 }
```

Here is the caller graph for this function:

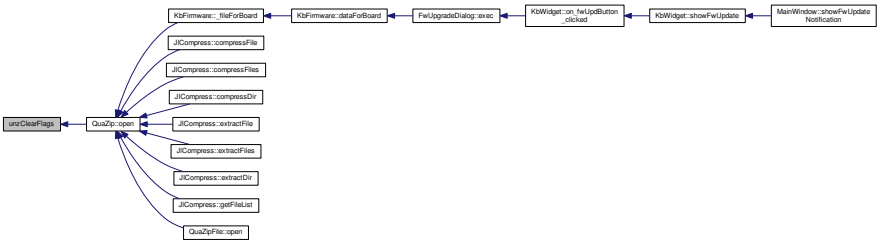

13.108.4.17 int ZEXPORT unzGetFilePos (unzFile *file,* unz_file_pos ∗ *file_pos*)

Definition at line 1334 of file unzip.c.

References unz_file_pos_s::num_of_file, unz64_file_pos_s::num_of_file, unz_file_pos_s::pos_in_zip_directory, unz64_file_pos_s::pos_in_zip_directory, UNZ_OK, and unzGetFilePos64().

```
1337 {
1338     unz64_file_pos file_pos64;
1339     int err = unzGetFilePos64(file,&file_pos64);
1340     if (err==UNZ_OK)
1341     {
1342         file_pos->pos_in_zip_directory = (uLong)file_pos64.
      pos_in_zip_directory;
1343         file_pos->num_of_file = (uLong)file_pos64.num_of_file;
1344     }
1345     return err;
1346 }
```

Here is the call graph for this function:

13.108.4.18 int ZEXPORT unzGetFilePos64 (unzFile *file*, unz64_file_pos * *file_pos*)

Definition at line 1318 of file unzip.c.

References unz64_s::current_file_ok, unz64_s::num_file, unz64_file_pos_s::num_of_file, unz64_s::pos_in_central_dir, unz64_file_pos_s::pos_in_zip_directory, UNZ_END_OF_LIST_OF_FILE, UNZ_OK, and UNZ_PARAMERROR.

Referenced by QuaZipPrivate::addCurrentFileToDirectoryMap(), and unzGetFilePos().

```
1319 {
1320     unz64_s* s;
1321
1322     if (file==NULL || file_pos==NULL)
1323         return UNZ_PARAMERROR;
1324     s=(unz64_s*)file;
1325     if (!s->current_file_ok)
1326         return UNZ_END_OF_LIST_OF_FILE;
1327
1328     file_pos->pos_in_zip_directory  = s->pos_in_central_dir;
1329     file_pos->num_of_file           = s->num_file;
1330
1331     return UNZ_OK;
1332 }
```

Here is the caller graph for this function:



13.108.4.19 uLong ZEXPORT unzGetOffset (unzFile *file*)

Definition at line 2102 of file unzip.c.

References unzGetOffset64().

```
2103 {
2104     ZPOS64_T offset64;
2105
2106     if (file==NULL)
2107           return 0; /*UNZ_PARAMERROR; */
2108     offset64 = unzGetOffset64(file);
2109     return (uLong)offset64;
2110 }
```

Here is the call graph for this function:

13.108.4.20 ZPOS64_T ZEXPORT unzGetOffset64 (unzFile *file*)

Definition at line 2087 of file unzip.c.

References unz64_s::current_file_ok, unz64_s::gi, unz64_s::num_file, unz_global_info64_s::number_entry, and unz64_s::pos_in_central_dir.

Referenced by unzGetOffset().

```
2088 {
2089     unz64_s* s;
2090
2091     if (file==NULL)
2092           return 0; /*UNZ_PARAMERROR; */
2093     s=(unz64_s*)file;
2094     if (!s->current_file_ok)
2095       return 0;
2096     if (s->gi.number_entry != 0 && s->gi.number_entry != 0xffff)
2097       if (s->num_file==s->gi.number_entry)
2098          return 0;
2099     return s->pos_in_central_dir;
2100 }
```

Here is the caller graph for this function:

13.108.4.21 int ZEXPORT unzGoToFilePos (unzFile *file,* unz_file_pos * *file_pos*)

Definition at line 1370 of file unzip.c.

References unz_file_pos_s::num_of_file, unz64_file_pos_s::num_of_file, unz_file_pos_s::pos_in_zip_directory, unz64_file_pos_s::pos_in_zip_directory, UNZ_PARAMERROR, and unzGoToFilePos64().

```
1373 {
1374     unz64_file_pos file_pos64;
1375     if (file_pos == NULL)
1376         return UNZ_PARAMERROR;
1377
1378     file_pos64.pos_in_zip_directory = file_pos->
    pos_in_zip_directory;
1379     file_pos64.num_of_file = file_pos->num_of_file;
1380     return unzGoToFilePos64(file,&file_pos64);
1381 }
```

Here is the call graph for this function:

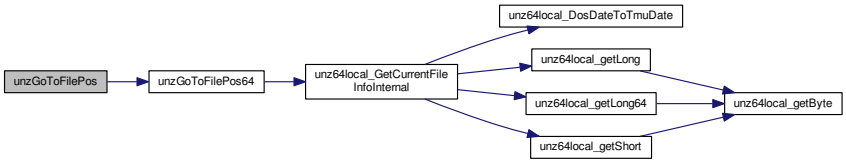

13.108.4.22 int ZEXPORT unzGoToFilePos64 (unzFile *file*, const unz64_file_pos * *file_pos*)

Definition at line 1348 of file unzip.c.

References unz64_s::cur_file_info, unz64_s::cur_file_info_internal, unz64_s::current_file_ok, unz64_s::num_file, unz64_file_pos_s::num_of_file, unz64_s::pos_in_central_dir, unz64_file_pos_s::pos_in_zip_directory, unz64local_GetCurrentFileInfoInternal(), UNZ_OK, and UNZ_PARAMERROR.

Referenced by QuaZipPrivate::goToFirstUnmappedFile(), QuaZip::setCurrentFile(), and unzGoToFilePos().

```
1349 {
1350     unz64_s* s;
1351     int err;
1352
1353     if (file==NULL || file_pos==NULL)
1354         return UNZ_PARAMERROR;
1355     s=(unz64_s*)file;
1356
1357     /* jump to the right spot */
1358     s->pos_in_central_dir = file_pos->pos_in_zip_directory;
1359     s->num_file           = file_pos->num_of_file;
1360
1361     /* set the current file */
1362     err = unz64local_GetCurrentFileInfoInternal(file,&s->
      cur_file_info,
1363                                                 &s->cur_file_info_internal,
1364                                                 NULL,0,NULL,0,NULL,0);
1365     /* return results */
1366     s->current_file_ok = (err == UNZ_OK);
1367     return err;
1368 }
```

Here is the call graph for this function:

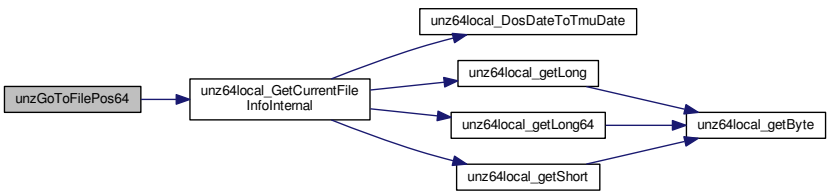

Here is the caller graph for this function:

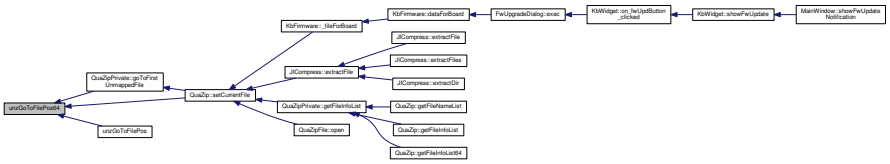

13.108.4.23 unzFile unzOpenInternal (voidpf *file*, zlib_filefunc64_32_def * *pzlib_filefunc64_32_def*, int *is64bitOpenFunction*, unsigned *flags*)

Definition at line 587 of file unzip.c.

References ALLOC, unz64_s::byte_before_the_zipfile, unz64_s::central_pos, unz64_s::encrypted, unz64_s::filestream, fill_qiodevice64_filefunc(), unz64_s::flags, unz64_s::gi, unz64_s::is64bitOpenFunction, unz64_s::isZip64, unz_global_info64_s::number_entry, unz64_s::offset_central_dir, unz64_s::pfile_in_zip_read, unz64_s::size_central_dir, unz_global_info64_s::size_comment, unz64local_getLong(), unz64local_getLong64(), unz64local_getShort(), unz64local_SearchCentralDir(), unz64local_SearchCentralDir64(), UNZ_AUTO_CLOSE, UNZ_BADZIPFILE, unz_copyright, UNZ_ERRNO, UNZ_OK, unzGoToFirstFile(), unz64_s::z_filefunc, ZCLOSE64, ZFAKECLOSE64, zlib_filefunc64_32_def_s::zfile_func64, ZLIB_FILEFUNC_MODE_EXISTING, ZLIB_FILEFUNC_MODE_READ, ZLIB_FILEFUNC_SEEK_SET, ZOPEN64, zlib_filefunc64_32_def_s::zseek32_file, ZSEEK64, and zlib_filefunc64_32_def_s::ztell32_file.

Referenced by QuaZip::open(), unzOpen(), unzOpen2(), unzOpen2_64(), and unzOpen64().

```
590 {
591     unz64_s us;
592     unz64_s *s;
593     ZPOS64_T central_pos;
594     uLong   uL;
595 
596     uLong number_disk;          /* number of the current dist, used for
597                                    spaning ZIP, unsupported, always 0*/
598     uLong number_disk_with_CD;  /* number the the disk with central dir, used
599                                    for spaning ZIP, unsupported, always 0*/
600     ZPOS64_T number_entry_CD;       /* total number of entries in
601                                    the central dir
602                                    (same than number_entry on nospan) */
603 
604     int err=UNZ_OK;
605 
606     if (unz_copyright[0]!=' ')
607         return NULL;
608 
609     us.flags = flags;
610     us.z_filefunc.zseek32_file = NULL;
611     us.z_filefunc.ztell32_file = NULL;
612     if (pzlib_filefunc64_32_def==NULL)
613         fill_qiodevice64_filefunc(&us.z_filefunc.
    zfile_func64);
614     else
615         us.z_filefunc = *pzlib_filefunc64_32_def;
616     us.is64bitOpenFunction = is64bitOpenFunction;
617 
618 
619 
620     us.filestream = ZOPEN64(us.z_filefunc,
621                                                 file,
622                                                 ZLIB_FILEFUNC_MODE_READ |
623                                                 ZLIB_FILEFUNC_MODE_EXISTING);
624     if (us.filestream==NULL)
625         return NULL;
626 
627     central_pos = unz64local_SearchCentralDir64(&us.
    z_filefunc,us.filestream);
628     if (central_pos)
629     {
630         uLong uS;
631         ZPOS64_T uL64;
632 
```

```
633         us.isZip64 = 1;
634
635         if (ZSEEK64(us.z_filefunc, us.filestream,
636                                         central_pos,ZLIB_FILEFUNC_SEEK_SET)!=0)
637         err=UNZ_ERRNO;
638
639         /* the signature, already checked */
640         if (unz64local_getLong(&us.z_filefunc, us.
    filestream,&uL)!=UNZ_OK)
641             err=UNZ_ERRNO;
642
643         /* size of zip64 end of central directory record */
644         if (unz64local_getLong64(&us.z_filefunc, us.
    filestream,&uL64)!=UNZ_OK)
645             err=UNZ_ERRNO;
646
647         /* version made by */
648         if (unz64local_getShort(&us.z_filefunc, us.
    filestream,&uS)!=UNZ_OK)
649             err=UNZ_ERRNO;
650
651         /* version needed to extract */
652         if (unz64local_getShort(&us.z_filefunc, us.
    filestream,&uS)!=UNZ_OK)
653             err=UNZ_ERRNO;
654
655         /* number of this disk */
656         if (unz64local_getLong(&us.z_filefunc, us.
    filestream,&number_disk)!=UNZ_OK)
657             err=UNZ_ERRNO;
658
659         /* number of the disk with the start of the central directory */
660         if (unz64local_getLong(&us.z_filefunc, us.
    filestream,&number_disk_with_CD)!=UNZ_OK)
661             err=UNZ_ERRNO;
662
663         /* total number of entries in the central directory on this disk */
664         if (unz64local_getLong64(&us.z_filefunc, us.
    filestream,&us.gi.number_entry)!=UNZ_OK)
665             err=UNZ_ERRNO;
666
667         /* total number of entries in the central directory */
668         if (unz64local_getLong64(&us.z_filefunc, us.
    filestream,&number_entry_CD)!=UNZ_OK)
669             err=UNZ_ERRNO;
670
671         if ((number_entry_CD!=us.gi.number_entry) ||
672             (number_disk_with_CD!=0) ||
673             (number_disk!=0))
674             err=UNZ_BADZIPFILE;
675
676         /* size of the central directory */
677         if (unz64local_getLong64(&us.z_filefunc, us.
    filestream,&us.size_central_dir)!=UNZ_OK)
678             err=UNZ_ERRNO;
679
680         /* offset of start of central directory with respect to the
681           starting disk number */
682         if (unz64local_getLong64(&us.z_filefunc, us.
    filestream,&us.offset_central_dir)!=UNZ_OK)
683             err=UNZ_ERRNO;
684
685         us.gi.size_comment = 0;
686     }
687     else
688     {
689         central_pos = unz64local_SearchCentralDir(&us.
    z_filefunc,us.filestream);
690         if (central_pos==0)
691             err=UNZ_ERRNO;
692
693         us.isZip64 = 0;
694
695         if (ZSEEK64(us.z_filefunc, us.filestream,
696                                         central_pos,ZLIB_FILEFUNC_SEEK_SET)!=0)
697             err=UNZ_ERRNO;
698
699         /* the signature, already checked */
700         if (unz64local_getLong(&us.z_filefunc, us.
    filestream,&uL)!=UNZ_OK)
701             err=UNZ_ERRNO;
702
703         /* number of this disk */
704         if (unz64local_getShort(&us.z_filefunc, us.
    filestream,&number_disk)!=UNZ_OK)
705             err=UNZ_ERRNO;
706
```

```
707         /* number of the disk with the start of the central directory */
708         if (unz64local_getShort(&us.z_filefunc, us.
    filestream,&number_disk_with_CD)!=UNZ_OK)
709             err=UNZ_ERRNO;
710
711         /* total number of entries in the central dir on this disk */
712         if (unz64local_getShort(&us.z_filefunc, us.
    filestream,&uL)!=UNZ_OK)
713             err=UNZ_ERRNO;
714         us.gi.number_entry = uL;
715
716         /* total number of entries in the central dir */
717         if (unz64local_getShort(&us.z_filefunc, us.
    filestream,&uL)!=UNZ_OK)
718             err=UNZ_ERRNO;
719         number_entry_CD = uL;
720
721         if ((number_entry_CD!=us.gi.number_entry) ||
722             (number_disk_with_CD!=0) ||
723             (number_disk!=0))
724             err=UNZ_BADZIPFILE;
725
726         /* size of the central directory */
727         if (unz64local_getLong(&us.z_filefunc, us.
    filestream,&uL)!=UNZ_OK)
728             err=UNZ_ERRNO;
729         us.size_central_dir = uL;
730
731         /* offset of start of central directory with respect to the
732             starting disk number */
733         if (unz64local_getLong(&us.z_filefunc, us.
    filestream,&uL)!=UNZ_OK)
734             err=UNZ_ERRNO;
735         us.offset_central_dir = uL;
736
737         /* zipfile comment length */
738         if (unz64local_getShort(&us.z_filefunc, us.
    filestream,&us.gi.size_comment)!=UNZ_OK)
739             err=UNZ_ERRNO;
740     }
741
742     if ((central_pos<us.offset_central_dir+us.size_central_dir) &&
743         (err==UNZ_OK))
744         err=UNZ_BADZIPFILE;
745
746     if (err!=UNZ_OK)
747     {
748         if ((us.flags & UNZ_AUTO_CLOSE) != 0)
749             ZCLOSE64(us.z_filefunc, us.filestream);
750         else
751             ZFAKECLOSE64(us.z_filefunc, us.filestream);
752         return NULL;
753     }
754
755     us.byte_before_the_zipfile = central_pos -
756                             (us.offset_central_dir+us.
    size_central_dir);
757     us.central_pos = central_pos;
758     us.pfile_in_zip_read = NULL;
759     us.encrypted = 0;
760
761
762     s=(unz64_s*)ALLOC(sizeof(unz64_s));
763     if( s != NULL)
764     {
765         *s=us;
766         unzGoToFirstFile((unzFile)s);
767     }
768     return (unzFile)s;
769 }
```

Here is the call graph for this function:

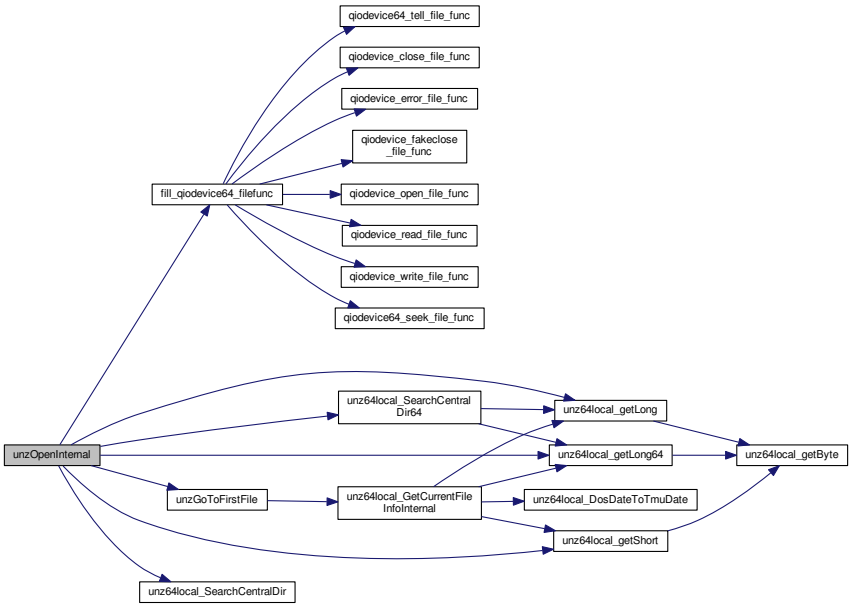

Here is the caller graph for this function:

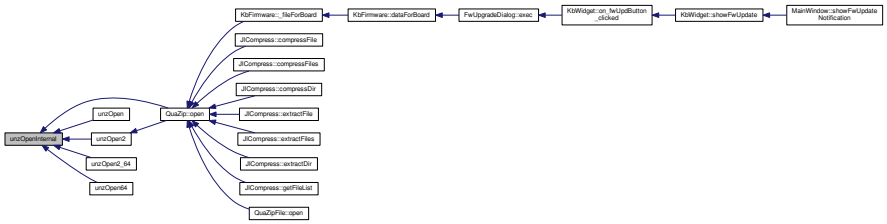

13.108.4.24 int ZEXPORT unzSetFlags (unzFile *file*, unsigned *flags*)

Definition at line 2136 of file unzip.c.

References unz64_s::flags, UNZ_OK, and UNZ_PARAMERROR.

Referenced by QuaZip::open().

```
2137 {
2138     unz64_s* s;
2139     if (file == NULL)
2140         return UNZ_PARAMERROR;
2141     s = (unz64_s*)file;
2142     s->flags |= flags;
2143     return UNZ_OK;
2144 }
```

Here is the caller graph for this function:

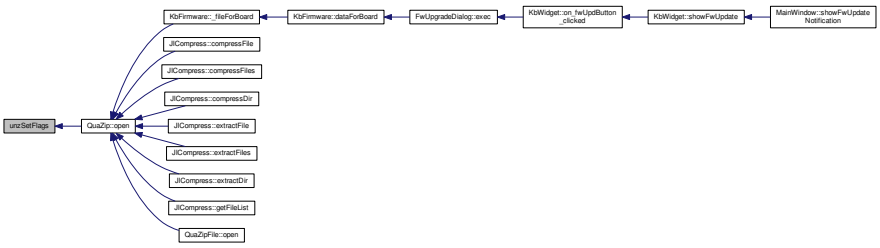

13.108.4.25 int ZEXPORT unzSetOffset (unzFile *file*, uLong *pos*)

Definition at line 2130 of file unzip.c.

References unzSetOffset64().

```
2131 {
2132     return unzSetOffset64(file,pos);
2133 }
```

Here is the call graph for this function:

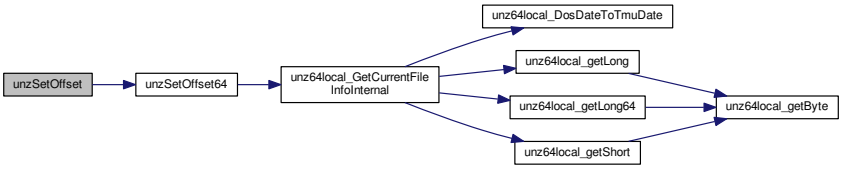

13.108.4.26 int ZEXPORT unzSetOffset64 (unzFile *file*, ZPOS64_T *pos*)

Definition at line 2112 of file unzip.c.

References unz64_s::cur_file_info, unz64_s::cur_file_info_internal, unz64_s::current_file_ok, unz64_s::gi, unz64_s::num_file, unz_global_info64_s::number_entry, unz64_s::pos_in_central_dir, unz64local_GetCurrentFileInfoInternal(), UNZ_OK, and UNZ_PARAMERROR.

Referenced by unzSetOffset().

```
2113 {
2114     unz64_s* s;
2115     int err;
2116
2117     if (file==NULL)
2118         return UNZ_PARAMERROR;
2119     s=(unz64_s*)file;
2120
2121     s->pos_in_central_dir = pos;
2122     s->num_file = s->gi.number_entry;       /* hack */
2123     err = unz64local_GetCurrentFileInfoInternal(file,&s->
      cur_file_info,
2124                                                 &s->cur_file_info_internal,
2125                                                 NULL,0,NULL,0,NULL,0);
2126     s->current_file_ok = (err == UNZ_OK);
2127     return err;
2128 }
```

Here is the call graph for this function:

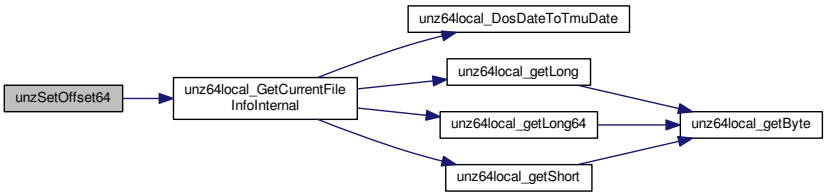

Here is the caller graph for this function:

13.109 src/ckb/quazip/zip.c File Reference

```
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <time.h>
#include "zlib.h"
#include "zip.h"
#include <errno.h>
#include "crypt.h"
```

Include dependency graph for zip.c:

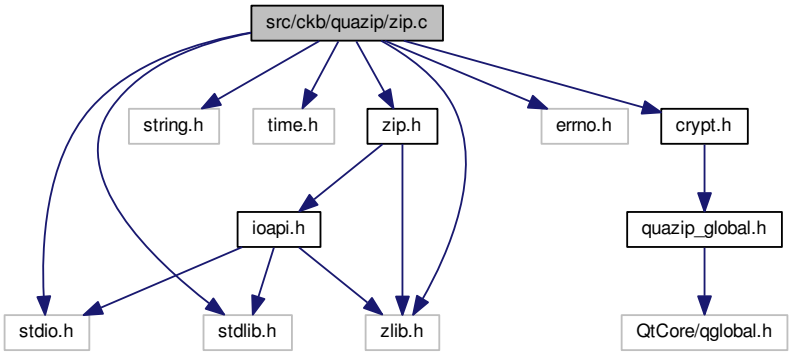

Data Structures

- struct linkedlist_datablock_internal_s
- struct linkedlist_data_s
- struct curfile64_info
- struct zip64_internal

Macros

- #define local static
- #define VERSIONMADEBY (0x031e) /* best for standard pkware crypt */
- #define Z_BUFSIZE (64*1024) /* (16384) */
- #define Z_MAXFILENAMEINZIP (256)
- #define ALLOC(size) (malloc(size))
- #define TRYFREE(p) {if (p) free(p);}
- #define MAKEULONG64(a, b) ((ZPOS64_T)(((unsigned long)(a)) | ((ZPOS64_T)((unsigned long)(b))) << 32))
- #define SEEK_CUR 1
- #define SEEK_END 2
- #define SEEK_SET 0
- #define SIZEDATA_INDATABLOCK (4096-(4*4))
- #define LOCALHEADERMAGIC (0x04034b50)
- #define DESCRIPTORHEADERMAGIC (0x08074b50)
- #define CENTRALHEADERMAGIC (0x02014b50)
- #define ENDHEADERMAGIC (0x06054b50)
- #define ZIP64ENDHEADERMAGIC (0x6064b50)
- #define ZIP64ENDLOCHEADERMAGIC (0x7064b50)
- #define FLAG_LOCALHEADER_OFFSET (0x06)
- #define CRC_LOCALHEADER_OFFSET (0x0e)
- #define SIZECENTRALHEADER (0x2e) /* 46 */
- #define INCLUDECRYPTINGCODE_IFCRYPTALLOWED
- #define BUFREADCOMMENT (0x400)

Typedefs

- typedef uLongf z_crc_t
- typedef struct linkedlist_datablock_internal_s linkedlist_datablock_internal
- typedef struct linkedlist_data_s linkedlist_data

Functions

- static linkedlist_datablock_internal * allocate_new_datablock ()
- static void free_datablock (linkedlist_datablock_internal *ldi)
- static void init_linkedlist (linkedlist_data *ll)
- static void free_linkedlist (linkedlist_data *ll)
- static int add_data_in_datablock (linkedlist_data *ll, const void *buf, uLong len)
- static int zip64local_putValue _Z_OF ((const zlib_filefunc64_32_def *pzlib_filefunc_def, voidpf filestream, ZPOS64_T x, int nbByte))
- static int zip64local_putValue (const zlib_filefunc64_32_def *pzlib_filefunc_def, voidpf filestream, ZPOS64_T x, int nbByte)
- static void zip64local_putValue_inmemory _Z_OF ((void *dest, ZPOS64_T x, int nbByte))

- static void zip64local_putValue_inmemory (void *dest, ZPOS64_T x, int nbByte)
- static uLong zip64local_TmzDateToDosDate (const tm_zip *ptm)
- static int zip64local_getByte _Z_OF ((const zlib_filefunc64_32_def *pzlib_filefunc_def, voidpf filestream, int *pi))
- static int zip64local_getByte (const zlib_filefunc64_32_def *pzlib_filefunc_def, voidpf filestream, int *pi)
- static int zip64local_getShort _Z_OF ((const zlib_filefunc64_32_def *pzlib_filefunc_def, voidpf filestream, uLong *pX))
- static int zip64local_getShort (const zlib_filefunc64_32_def *pzlib_filefunc_def, voidpf filestream, uLong *pX)
- static int zip64local_getLong (const zlib_filefunc64_32_def *pzlib_filefunc_def, voidpf filestream, uLong *pX)
- static int zip64local_getLong64 _Z_OF ((const zlib_filefunc64_32_def *pzlib_filefunc_def, voidpf filestream, ZPOS64_T *pX))
- static int zip64local_getLong64 (const zlib_filefunc64_32_def *pzlib_filefunc_def, voidpf filestream, ZPOS64_T *pX)
- static ZPOS64_T zip64local_SearchCentralDir _Z_OF ((const zlib_filefunc64_32_def *pzlib_filefunc_def, voidpf filestream))
- static ZPOS64_T zip64local_SearchCentralDir (const zlib_filefunc64_32_def *pzlib_filefunc_def, voidpf filestream)
- static ZPOS64_T zip64local_SearchCentralDir64 (const zlib_filefunc64_32_def *pzlib_filefunc_def, voidpf filestream)
- int LoadCentralDirectoryRecord (zip64_internal *pziinit)
- zipFile ZEXPORT zipOpen3 (voidpf file, int append, zipcharpc *globalcomment, zlib_filefunc64_32_def *pzlib_filefunc64_32_def, unsigned flags)
- zipFile ZEXPORT zipOpen2 (voidpf file, int append, zipcharpc *globalcomment, zlib_filefunc_def *pzlib_filefunc32_def)
- zipFile ZEXPORT zipOpen2_64 (voidpf file, int append, zipcharpc *globalcomment, zlib_filefunc64_def *pzlib_filefunc_def)
- zipFile ZEXPORT zipOpen (voidpf file, int append)
- zipFile ZEXPORT zipOpen64 (voidpf file, int append)
- int Write_LocalFileHeader (zip64_internal *zi, const char *filename, uInt size_extrafield_local, const void *extrafield_local, uLong version_to_extract)
- int ZEXPORT zipOpenNewFileInZip4_64 (zipFile file, const char *filename, const zip_fileinfo *zipfi, const void *extrafield_local, uInt size_extrafield_local, const void *extrafield_global, uInt size_extrafield_global, const char *comment, int method, int level, int raw, int windowBits, int memLevel, int strategy, const char *password, uLong crcForCrypting, uLong versionMadeBy, uLong flagBase, int zip64)
- int ZEXPORT zipOpenNewFileInZip4 (zipFile file, const char *filename, const zip_fileinfo *zipfi, const void *extrafield_local, uInt size_extrafield_local, const void *extrafield_global, uInt size_extrafield_global, const char *comment, int method, int level, int raw, int windowBits, int memLevel, int strategy, const char *password, uLong crcForCrypting, uLong versionMadeBy, uLong flagBase)
- int ZEXPORT zipOpenNewFileInZip3 (zipFile file, const char *filename, const zip_fileinfo *zipfi, const void *extrafield_local, uInt size_extrafield_local, const void *extrafield_global, uInt size_extrafield_global, const char *comment, int method, int level, int raw, int windowBits, int memLevel, int strategy, const char *password, uLong crcForCrypting)
- int ZEXPORT zipOpenNewFileInZip3_64 (zipFile file, const char *filename, const zip_fileinfo *zipfi, const void *extrafield_local, uInt size_extrafield_local, const void *extrafield_global, uInt size_extrafield_global, const char *comment, int method, int level, int raw, int windowBits, int memLevel, int strategy, const char *password, uLong crcForCrypting, int zip64)
- int ZEXPORT zipOpenNewFileInZip2 (zipFile file, const char *filename, const zip_fileinfo *zipfi, const void *extrafield_local, uInt size_extrafield_local, const void *extrafield_global, uInt size_extrafield_global, const char *comment, int method, int level, int raw)
- int ZEXPORT zipOpenNewFileInZip2_64 (zipFile file, const char *filename, const zip_fileinfo *zipfi, const void *extrafield_local, uInt size_extrafield_local, const void *extrafield_global, uInt size_extrafield_global, const char *comment, int method, int level, int raw, int zip64)
- int ZEXPORT zipOpenNewFileInZip64 (zipFile file, const char *filename, const zip_fileinfo *zipfi, const void *extrafield_local, uInt size_extrafield_local, const void *extrafield_global, uInt size_extrafield_global, const char *comment, int method, int level, int zip64)

- int ZEXPORT zipOpenNewFileInZip (zipFile file, const char ∗filename, const zip_fileinfo ∗zipfi, const void ∗extrafield_local, uInt size_extrafield_local, const void ∗extrafield_global, uInt size_extrafield_global, const char ∗comment, int method, int level)
- static int zip64FlushWriteBuffer (zip64_internal ∗zi)
- int ZEXPORT zipWriteInFileInZip (zipFile file, const void ∗buf, unsigned int len)
- int ZEXPORT zipCloseFileInZipRaw (zipFile file, uLong uncompressed_size, uLong crc32)
- int ZEXPORT zipCloseFileInZipRaw64 (zipFile file, ZPOS64_T uncompressed_size, uLong crc32)
- int ZEXPORT zipCloseFileInZip (zipFile file)
- int Write_Zip64EndOfCentralDirectoryLocator (zip64_internal ∗zi, ZPOS64_T zip64eocd_pos_inzip)
- int Write_Zip64EndOfCentralDirectoryRecord (zip64_internal ∗zi, uLong size_centraldir, ZPOS64_T centraldir_pos_inzip)
- int Write_EndOfCentralDirectoryRecord (zip64_internal ∗zi, uLong size_centraldir, ZPOS64_T centraldir_pos_inzip)
- int Write_GlobalComment (zip64_internal ∗zi, const char ∗global_comment)
- int ZEXPORT zipClose (zipFile file, const char ∗global_comment)
- int ZEXPORT zipRemoveExtraInfoBlock (char ∗pData, int ∗dataLen, short sHeader)
- int ZEXPORT zipSetFlags (zipFile file, unsigned flags)
- int ZEXPORT zipClearFlags (zipFile file, unsigned flags)

Variables

- const char zip_copyright [] =" zip 1.01 Copyright 1998-2004 Gilles Vollant - http://www.winimage.com/zLibDll"

13.109.1 Data Structure Documentation

13.109.1.1 struct linkedlist_datablock_internal_s

Definition at line 121 of file zip.c.

Collaboration diagram for linkedlist_datablock_internal_s:

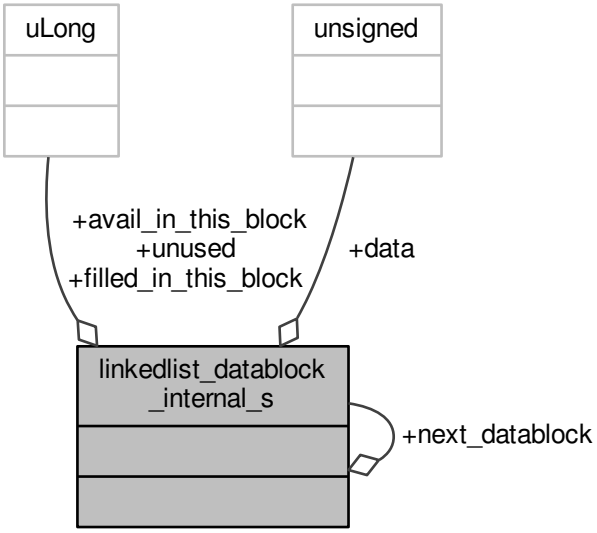

Data Fields

uLong	avail_in_this_-block	
unsigned char	data[(4096-(4 ∗4))]	
uLong	filled_in_this_-block	
struct linkedlist_-datablock_-internal_s ∗	next_datablock	
uLong	unused	

13.109.1.2 struct linkedlist_data_s

Definition at line 130 of file zip.c.

Collaboration diagram for linkedlist_data_s:

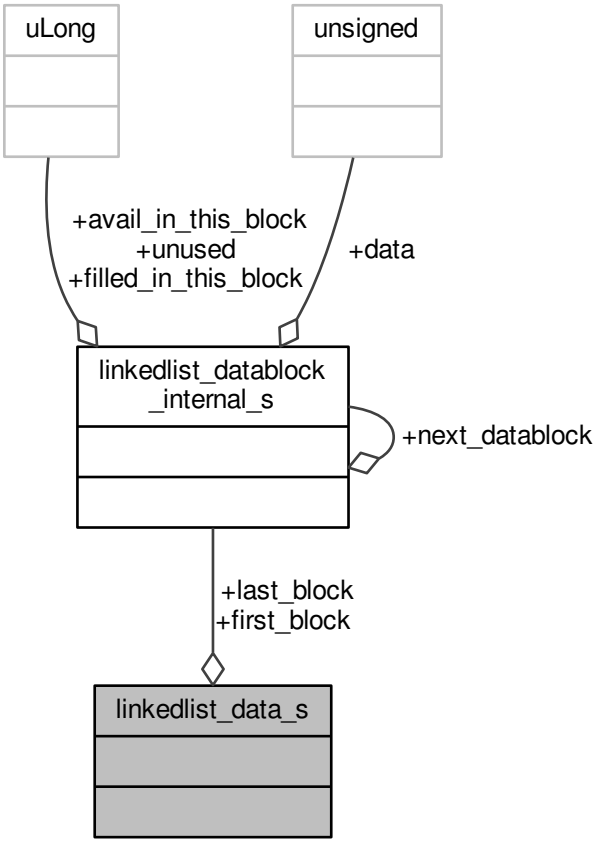

Data Fields

linkedlist_-datablock_-internal *	first_block	
linkedlist_-datablock_-internal *	last_block	

13.109.1.3 struct curfile64_info

Definition at line 137 of file zip.c.

Collaboration diagram for curfile64_info:

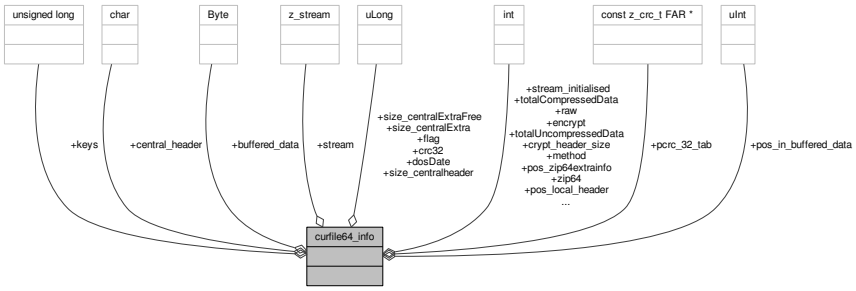

Data Fields

Byte	buffered_-data[(64 ∗1024)]	
char ∗	central_header	
uLong	crc32	
int	crypt_header_-size	
uLong	dosDate	
int	encrypt	
uLong	flag	
unsigned long	keys[3]	
int	method	
const z_crc_t FAR ∗	pcrc_32_tab	
uInt	pos_in_buffered-_data	
ZPOS64_T	pos_local_-header	
ZPOS64_T	pos_-zip64extrainfo	

int	raw	
uLong	size_central-Extra	
uLong	size_central-ExtraFree	
uLong	size_-centralheader	
z_stream	stream	
int	stream_-initialised	
ZPOS64_T	total-Compressed-Data	
ZPOS64_T	total-Uncompressed-Data	
int	zip64	

13.109.1.4 struct zip64_internal

Definition at line 172 of file zip.c.

Collaboration diagram for zip64_internal:

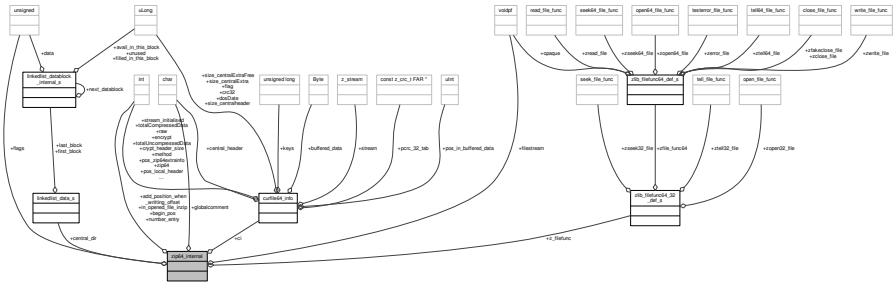

Data Fields

ZPOS64_T	add_position_-when_writting_-offset	
ZPOS64_T	begin_pos	
linkedlist_data	central_dir	
curfile64_info	ci	
voidpf	filestream	
unsigned	flags	
char *	globalcomment	
int	in_opened_file_-inzip	
ZPOS64_T	number_entry	
zlib_filefunc64_-32_def	z_filefunc	

13.109.2 Macro Definition Documentation

13.109.2.1 #define ALLOC(*size*) (malloc(size))

Definition at line 68 of file zip.c.

Referenced by allocate_new_datablock(), LoadCentralDirectoryRecord(), zip64local_SearchCentralDir(), zip64local_SearchCentralDir64(), zipOpen3(), zipOpenNewFileInZip4_64(), and zipRemoveExtraInfoBlock().

13.109.2.2 #define BUFREADCOMMENT (0x400)

Definition at line 481 of file zip.c.

Referenced by zip64local_SearchCentralDir(), and zip64local_SearchCentralDir64().

13.109.2.3 #define CENTRALHEADERMAGIC (0x02014b50)

Definition at line 111 of file zip.c.

Referenced by zipOpenNewFileInZip4_64().

13.109.2.4 #define CRC_LOCALHEADER_OFFSET (0x0e)

Definition at line 117 of file zip.c.

13.109.2.5 #define DESCRIPTORHEADERMAGIC (0x08074b50)

Definition at line 110 of file zip.c.

Referenced by zipCloseFileInZipRaw64().

13.109.2.6 #define ENDHEADERMAGIC (0x06054b50)

Definition at line 112 of file zip.c.

Referenced by Write_EndOfCentralDirectoryRecord().

13.109.2.7 #define FLAG_LOCALHEADER_OFFSET (0x06)

Definition at line 116 of file zip.c.

13.109.2.8 #define INCLUDECRYPTINGCODE_IFCRYPTALLOWED

Definition at line 194 of file zip.c.

13.109.2.9 #define local static

Definition at line 51 of file zip.c.

13.109.2.10 #define LOCALHEADERMAGIC (0x04034b50)

Definition at line 109 of file zip.c.

Referenced by Write_LocalFileHeader().

13.109.2.11 #define MAKEULONG64(a, b) ((ZPOS64_T)(((unsigned long)(a)) | ((ZPOS64_T)((unsigned long)(b))) << 32))

Definition at line 83 of file zip.c.

13.109.2.12 #define SEEK_CUR 1

Definition at line 86 of file zip.c.

13.109.2.13 #define SEEK_END 2

Definition at line 90 of file zip.c.

Referenced by zipOpen3().

13.109.2.14 #define SEEK_SET 0

Definition at line 94 of file zip.c.

13.109.2.15 #define SIZECENTRALHEADER (0x2e) /* 46 */

Definition at line 119 of file zip.c.

Referenced by zipOpenNewFileInZip4_64().

13.109.2.16 #define SIZEDATA_INDATABLOCK (4096-(4*4))

Definition at line 107 of file zip.c.

Referenced by allocate_new_datablock(), and LoadCentralDirectoryRecord().

13.109.2.17 #define TRYFREE(p) {if (p) free(p);}

Definition at line 71 of file zip.c.

Referenced by free_datablock(), LoadCentralDirectoryRecord(), zip64local_SearchCentralDir(), zip64local_SearchCentralDir64(), zipClose(), zipOpen3(), and zipRemoveExtraInfoBlock().

13.109.2.18 #define VERSIONMADEBY (0x031e) /* best for standard pkware crypt */

Definition at line 56 of file zip.c.

Referenced by zipOpenNewFileInZip(), zipOpenNewFileInZip2(), zipOpenNewFileInZip2_64(), zipOpenNewFileInZip3(), zipOpenNewFileInZip3_64(), and zipOpenNewFileInZip64().

13.109.2.19 #define Z_BUFSIZE (64*1024) /* (16384) */

Definition at line 60 of file zip.c.

Referenced by zipCloseFileInZipRaw64(), zipOpenNewFileInZip4_64(), and zipWriteInFileInZip().

13.109.2.20 #define Z_MAXFILENAMEINZIP (256)

Definition at line 64 of file zip.c.

13.109.2.21 #define ZIP64ENDHEADERMAGIC (0x6064b50)

Definition at line 113 of file zip.c.

Referenced by Write_Zip64EndOfCentralDirectoryRecord().

13.109.2.22 #define ZIP64ENDLOCHEADERMAGIC (0x7064b50)

Definition at line 114 of file zip.c.

Referenced by Write_Zip64EndOfCentralDirectoryLocator().

13.109.3 Typedef Documentation

13.109.3.1 typedef struct linkedlist_data_s linkedlist_data

13.109.3.2 typedef struct linkedlist_datablock_internal_s linkedlist_datablock_internal

13.109.3.3 typedef uLongf z_crc_t

Definition at line 34 of file zip.c.

13.109.4 Function Documentation

13.109.4.1 static int zip64local_putValue _Z_OF ((const zlib_filefunc64_32_def *pzlib_filefunc_def, voidpf filestream, ZPOS64_T x, int nbByte)) [static]

13.109.4.2 static void zip64local_putValue_inmemory _Z_OF ((void *dest, ZPOS64_T x, int nbByte)) [static]

13.109.4.3 static int zip64local_getByte _Z_OF ((const zlib_filefunc64_32_def *pzlib_filefunc_def, voidpf filestream, int *pi)) [static]

13.109.4.4 static int zip64local_getShort _Z_OF ((const zlib_filefunc64_32_def *pzlib_filefunc_def, voidpf filestream, uLong *pX)) [static]

13.109.4.5 static int zip64local_getLong64 _Z_OF ((const zlib_filefunc64_32_def *pzlib_filefunc_def, voidpf filestream, ZPOS64_T *pX)) [static]

13.109.4.6 static ZPOS64_T zip64local_SearchCentralDir _Z_OF ((const zlib_filefunc64_32_def *pzlib_filefunc_def, voidpf filestream)) [static]

13.109.4.7 static int add_data_in_datablock (linkedlist_data * *ll*, const void * *buf*, uLong *len*) [static]

Definition at line 234 of file zip.c.

References allocate_new_datablock(), linkedlist_datablock_internal_s::avail_in_this_block, linkedlist_datablock_internal_s::data, linkedlist_datablock_internal_s::filled_in_this_block, linkedlist_data_s::first_block, linkedlist_data_s::last_block, linkedlist_datablock_internal_s::next_datablock, ZIP_INTERNALERROR, and ZIP_OK.

Referenced by LoadCentralDirectoryRecord(), and zipCloseFileInZipRaw64().

```
235 {
236     linkedlist_datablock_internal* ldi;
237     const unsigned char* from_copy;
238
239     if (ll==NULL)
240         return ZIP_INTERNALERROR;
241
242     if (ll->last_block == NULL)
243     {
```

```
244         ll->first_block = ll->last_block =
    allocate_new_datablock();
245         if (ll->first_block == NULL)
246             return ZIP_INTERNALERROR;
247     }
248
249     ldi = ll->last_block;
250     from_copy = (unsigned char*)buf;
251
252     while (len>0)
253     {
254         uInt copy_this;
255         uInt i;
256         unsigned char* to_copy;
257
258         if (ldi->avail_in_this_block==0)
259         {
260             ldi->next_datablock = allocate_new_datablock();
261             if (ldi->next_datablock == NULL)
262                 return ZIP_INTERNALERROR;
263             ldi = ldi->next_datablock ;
264             ll->last_block = ldi;
265         }
266
267         if (ldi->avail_in_this_block < len)
268             copy_this = (uInt)ldi->avail_in_this_block;
269         else
270             copy_this = (uInt)len;
271
272         to_copy = &(ldi->data[ldi->filled_in_this_block]);
273
274         for (i=0;i<copy_this;i++)
275             *(to_copy+i)=*(from_copy+i);
276
277         ldi->filled_in_this_block += copy_this;
278         ldi->avail_in_this_block -= copy_this;
279         from_copy += copy_this ;
280         len -= copy_this;
281     }
282     return ZIP_OK;
283 }
```

Here is the call graph for this function:

Here is the caller graph for this function:

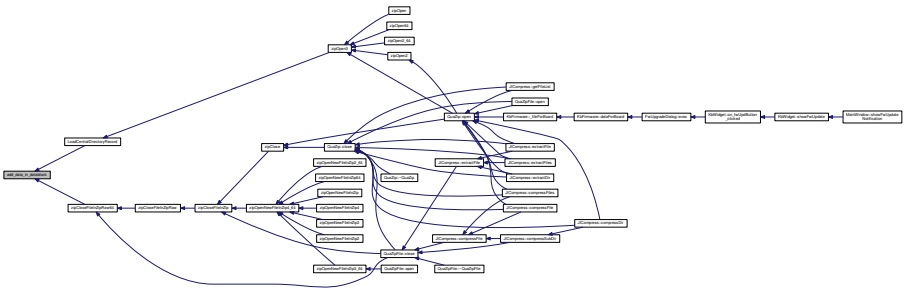

13.109.4.8 static linkedlist_datablock_internal* allocate_new_datablock ( ) [static]

Definition at line 198 of file zip.c.

References ALLOC, linkedlist_datablock_internal_s::avail_in_this_block, linkedlist_datablock_internal_s::filled_in_this_block, linkedlist_datablock_internal_s::next_datablock, and SIZEDATA_INDATABLOCK.

Referenced by add_data_in_datablock().

```
199 {
200     linkedlist_datablock_internal* ldi;
201     ldi = (linkedlist_datablock_internal*)
202                 ALLOC(sizeof(linkedlist_datablock_internal));
203     if (ldi!=NULL)
204     {
205         ldi->next_datablock = NULL ;
206         ldi->filled_in_this_block = 0 ;
207         ldi->avail_in_this_block = SIZEDATA_INDATABLOCK ;
208     }
209     return ldi;
210 }
```

Here is the caller graph for this function:

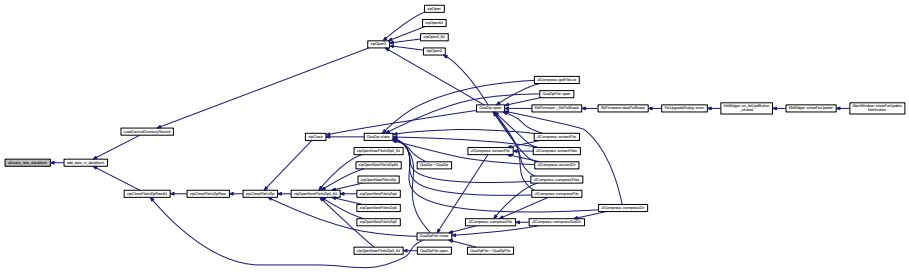

13.109.4.9 static void free_datablock (linkedlist_datablock_internal * ldi) [static]

Definition at line 212 of file zip.c.

References linkedlist_datablock_internal_s::next_datablock, and TRYFREE.

Referenced by free_linkedlist().

```
213 {
214     while (ldi!=NULL)
215     {
216         linkedlist_datablock_internal* ldinext = ldi->
    next_datablock;
217         TRYFREE(ldi);
218         ldi = ldinext;
219     }
220 }
```

Here is the caller graph for this function:

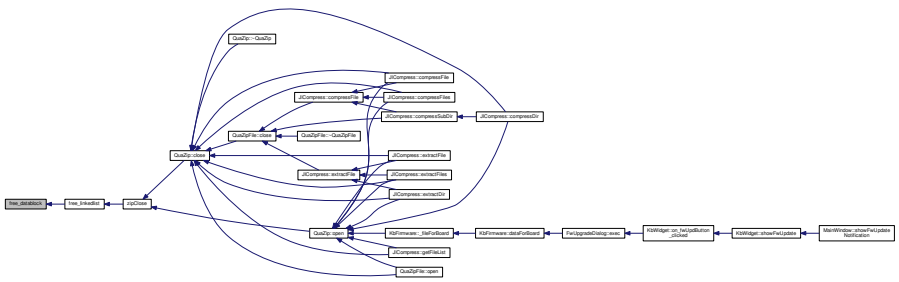

13.109.4.10 static void free_linkedlist (linkedlist_data * ll) [static]

Definition at line 227 of file zip.c.

References linkedlist_data_s::first_block, free_datablock(), and linkedlist_data_s::last_block.

Referenced by zipClose().

```
228 {
229     free_datablock(ll->first_block);
230     ll->first_block = ll->last_block = NULL;
231 }
```

Here is the call graph for this function:

Here is the caller graph for this function:

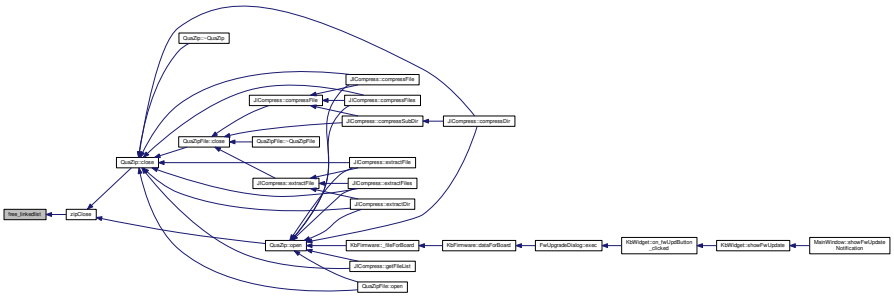

13.109.4.11 static void init_linkedlist (linkedlist_data * ll) [static]

Definition at line 222 of file zip.c.

References linkedlist_data_s::first_block, and linkedlist_data_s::last_block.

Referenced by zipOpen3().

```
223 {
224     ll->first_block = ll->last_block = NULL;
225 }
```

Here is the caller graph for this function:

13.109.4.12 int LoadCentralDirectoryRecord (zip64_internal * *pziinit*)

Definition at line 649 of file zip.c.

References add_data_in_datablock(), zip64_internal::add_position_when_writting_offset, ALLOC, zip64_internal::begin_pos, zip64_internal::central_dir, zip64_internal::filestream, zip64_internal::flags, zip64_internal::globalcomment, zip64_internal::number_entry, SIZEDATA_INDATABLOCK, TRYFREE, zip64_internal::z_filefunc, ZCLOSE64, ZFAKECLOSE64, zip64local_getLong(), zip64local_getLong64(), zip64local_getShort(), zip64local_SearchCentralDir(), zip64local_SearchCentralDir64(), ZIP_AUTO_CLOSE, ZIP_BADZIPFILE, ZIP_ERRNO, ZIP_OK, ZLIB_FILEFUNC_SEEK_SET, ZREAD64, and ZSEEK64.

Referenced by zipOpen3().

```
650 {
651   int err=ZIP_OK;
652   ZPOS64_T byte_before_the_zipfile;/* byte before the zipfile, (>0 for sfx)*/
653
654   ZPOS64_T size_central_dir;     /* size of the central directory  */
655   ZPOS64_T offset_central_dir;   /* offset of start of central directory */
656   ZPOS64_T central_pos;
657   uLong uL;
658
659   uLong number_disk;          /* number of the current dist, used for
660                                  spaning ZIP, unsupported, always 0*/
661   uLong number_disk_with_CD;  /* number the the disk with central dir, used
662                                  for spaning ZIP, unsupported, always 0*/
663   ZPOS64_T number_entry;
664   ZPOS64_T number_entry_CD;      /* total number of entries in
665                                    the central dir
666                                    (same than number_entry on nospan) */
667   uLong VersionMadeBy;
668   uLong VersionNeeded;
669   uLong size_comment;
670
671   int hasZIP64Record = 0;
672
673   /* check first if we find a ZIP64 record */
674   central_pos = zip64local_SearchCentralDir64(&pziinit->
      z_filefunc,pziinit->filestream);
675   if(central_pos > 0)
676   {
677     hasZIP64Record = 1;
678   }
679   else if(central_pos == 0)
680   {
681     central_pos = zip64local_SearchCentralDir(&pziinit->
      z_filefunc,pziinit->filestream);
682   }
683
684 /* disable to allow appending to empty ZIP archive
685         if (central_pos==0)
686             err=ZIP_ERRNO;
687 */
688
689   if(hasZIP64Record)
690   {
691     ZPOS64_T sizeEndOfCentralDirectory;
692     if (ZSEEK64(pziinit->z_filefunc, pziinit->filestream, central_pos,
      ZLIB_FILEFUNC_SEEK_SET) != 0)
693       err=ZIP_ERRNO;
694
695     /* the signature, already checked */
```

```
696     if (zip64local_getLong(&pziinit->z_filefunc, pziinit->
      filestream,&uL)!=ZIP_OK)
697       err=ZIP_ERRNO;
698
699     /* size of zip64 end of central directory record */
700     if (zip64local_getLong64(&pziinit->z_filefunc, pziinit->
      filestream, &sizeEndOfCentralDirectory)!=ZIP_OK)
701       err=ZIP_ERRNO;
702
703     /* version made by */
704     if (zip64local_getShort(&pziinit->z_filefunc, pziinit->
      filestream, &VersionMadeBy)!=ZIP_OK)
705       err=ZIP_ERRNO;
706
707     /* version needed to extract */
708     if (zip64local_getShort(&pziinit->z_filefunc, pziinit->
      filestream, &VersionNeeded)!=ZIP_OK)
709       err=ZIP_ERRNO;
710
711     /* number of this disk */
712     if (zip64local_getLong(&pziinit->z_filefunc, pziinit->
      filestream,&number_disk)!=ZIP_OK)
713       err=ZIP_ERRNO;
714
715     /* number of the disk with the start of the central directory */
716     if (zip64local_getLong(&pziinit->z_filefunc, pziinit->
      filestream,&number_disk_with_CD)!=ZIP_OK)
717       err=ZIP_ERRNO;
718
719     /* total number of entries in the central directory on this disk */
720     if (zip64local_getLong64(&pziinit->z_filefunc, pziinit->
      filestream, &number_entry)!=ZIP_OK)
721       err=ZIP_ERRNO;
722
723     /* total number of entries in the central directory */
724     if (zip64local_getLong64(&pziinit->z_filefunc, pziinit->
      filestream,&number_entry_CD)!=ZIP_OK)
725       err=ZIP_ERRNO;
726
727     if ((number_entry_CD!=number_entry) || (number_disk_with_CD!=0) || (number_disk!=0))
728       err=ZIP_BADZIPFILE;
729
730     /* size of the central directory */
731     if (zip64local_getLong64(&pziinit->z_filefunc, pziinit->
      filestream,&size_central_dir)!=ZIP_OK)
732       err=ZIP_ERRNO;
733
734     /* offset of start of central directory with respect to the
735     starting disk number */
736     if (zip64local_getLong64(&pziinit->z_filefunc, pziinit->
      filestream,&offset_central_dir)!=ZIP_OK)
737       err=ZIP_ERRNO;
738
739     /* TODO.. */
740     /* read the comment from the standard central header. */
741     size_comment = 0;
742   }
743   else
744   {
745     /* Read End of central Directory info */
746     if (ZSEEK64(pziinit->z_filefunc, pziinit->filestream, central_pos,
      ZLIB_FILEFUNC_SEEK_SET)!=0)
747       err=ZIP_ERRNO;
748
749     /* the signature, already checked */
750     if (zip64local_getLong(&pziinit->z_filefunc, pziinit->
      filestream,&uL)!=ZIP_OK)
751       err=ZIP_ERRNO;
752
753     /* number of this disk */
754     if (zip64local_getShort(&pziinit->z_filefunc, pziinit->
      filestream,&number_disk)!=ZIP_OK)
755       err=ZIP_ERRNO;
756
757     /* number of the disk with the start of the central directory */
758     if (zip64local_getShort(&pziinit->z_filefunc, pziinit->
      filestream,&number_disk_with_CD)!=ZIP_OK)
759       err=ZIP_ERRNO;
760
761     /* total number of entries in the central dir on this disk */
762     number_entry = 0;
763     if (zip64local_getShort(&pziinit->z_filefunc, pziinit->
      filestream, &uL)!=ZIP_OK)
764       err=ZIP_ERRNO;
765     else
766       number_entry = uL;
767
```

```
768     /* total number of entries in the central dir */
769     number_entry_CD = 0;
770     if (zip64local_getShort(&pziinit->z_filefunc, pziinit->
    filestream, &uL)!=ZIP_OK)
771       err=ZIP_ERRNO;
772     else
773       number_entry_CD = uL;
774
775     if ((number_entry_CD!=number_entry) || (number_disk_with_CD!=0) || (number_disk!=0))
776       err=ZIP_BADZIPFILE;
777
778     /* size of the central directory */
779     size_central_dir = 0;
780     if (zip64local_getLong(&pziinit->z_filefunc, pziinit->
    filestream, &uL)!=ZIP_OK)
781       err=ZIP_ERRNO;
782     else
783       size_central_dir = uL;
784
785     /* offset of start of central directory with respect to the starting disk number */
786     offset_central_dir = 0;
787     if (zip64local_getLong(&pziinit->z_filefunc, pziinit->
    filestream, &uL)!=ZIP_OK)
788       err=ZIP_ERRNO;
789     else
790       offset_central_dir = uL;
791
792
793     /* zipfile global comment length */
794     if (zip64local_getShort(&pziinit->z_filefunc, pziinit->
    filestream, &size_comment)!=ZIP_OK)
795       err=ZIP_ERRNO;
796   }
797
798   if ((central_pos<offset_central_dir+size_central_dir) &&
799     (err==ZIP_OK))
800     err=ZIP_BADZIPFILE;
801
802   if (err!=ZIP_OK)
803   {
804       if ((pziinit->flags & ZIP_AUTO_CLOSE) != 0) {
805         ZCLOSE64(pziinit->z_filefunc, pziinit->filestream);
806       } else {
807         ZFAKECLOSE64(pziinit->z_filefunc, pziinit->
    filestream);
808       }
809     return ZIP_ERRNO;
810   }
811
812   if (size_comment>0)
813   {
814     pziinit->globalcomment = (char*)ALLOC(size_comment+1);
815     if (pziinit->globalcomment)
816     {
817       size_comment = ZREAD64(pziinit->z_filefunc, pziinit->
    filestream, pziinit->globalcomment,size_comment);
818       pziinit->globalcomment[size_comment]=0;
819     }
820   }
821
822   byte_before_the_zipfile = central_pos - (offset_central_dir+size_central_dir);
823   pziinit->add_position_when_writting_offset = byte_before_the_zipfile;
824
825   {
826     ZPOS64_T size_central_dir_to_read = size_central_dir;
827     size_t buf_size = SIZEDATA_INDATABLOCK;
828     void* buf_read = (void*)ALLOC(buf_size);
829     if (ZSEEK64(pziinit->z_filefunc, pziinit->filestream, offset_central_dir +
    byte_before_the_zipfile, ZLIB_FILEFUNC_SEEK_SET) != 0)
830       err=ZIP_ERRNO;
831
832     while ((size_central_dir_to_read>0) && (err==ZIP_OK))
833     {
834       ZPOS64_T read_this = SIZEDATA_INDATABLOCK;
835       if (read_this > size_central_dir_to_read)
836         read_this = size_central_dir_to_read;
837
838       if (ZREAD64(pziinit->z_filefunc, pziinit->filestream,buf_read,(uLong)
    read_this) != read_this)
839         err=ZIP_ERRNO;
840
841       if (err==ZIP_OK)
842         err = add_data_in_datablock(&pziinit->central_dir,buf_read, (uLong)
    read_this);
843
844       size_central_dir_to_read-=read_this;
845     }
```

```
846     TRYFREE(buf_read);
847   }
848   pziinit->begin_pos = byte_before_the_zipfile;
849   pziinit->number_entry = number_entry_CD;
850
851   if (ZSEEK64(pziinit->z_filefunc, pziinit->filestream, offset_central_dir+
      byte_before_the_zipfile,ZLIB_FILEFUNC_SEEK_SET) != 0)
852     err=ZIP_ERRNO;
853
854   return err;
855 }
```

Here is the call graph for this function:

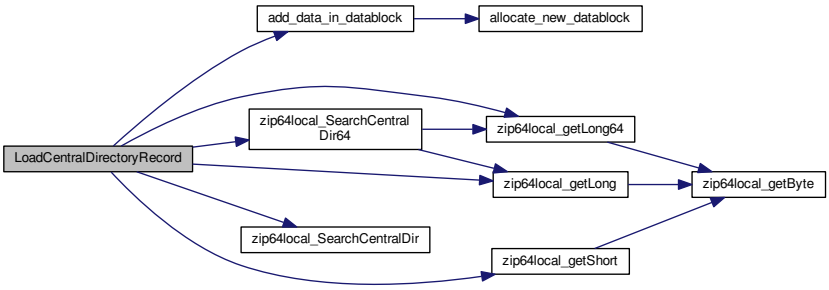

Here is the caller graph for this function:

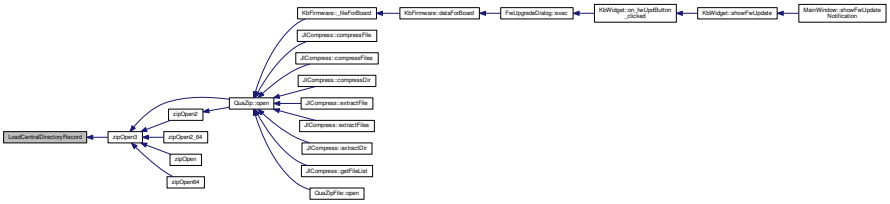

13.109.4.13 int Write_EndOfCentralDirectoryRecord (zip64_internal * *zi*, uLong *size_centraldir*, ZPOS64_T *centraldir_pos_inzip*)

Definition at line 1876 of file zip.c.

References zip64_internal::add_position_when_writting_offset, ENDHEADERMAGIC, zip64_internal::filestream, zip64_internal::number_entry, zip64_internal::z_filefunc, zip64local_putValue(), and ZIP_OK.

Referenced by zipClose().

```
1877 {
1878   int err = ZIP_OK;
1879
1880   /*signature*/
1881   err = zip64local_putValue(&zi->z_filefunc,zi->
      filestream,(uLong)ENDHEADERMAGIC,4);
1882
1883   if (err==ZIP_OK) /* number of this disk */
1884     err = zip64local_putValue(&zi->z_filefunc,zi->
      filestream,(uLong)0,2);
1885
1886   if (err==ZIP_OK) /* number of the disk with the start of the central directory */
1887     err = zip64local_putValue(&zi->z_filefunc,zi->
      filestream,(uLong)0,2);
1888
1889   if (err==ZIP_OK) /* total number of entries in the central dir on this disk */
```

```
1890   {
1891     {
1892       if(zi->number_entry >= 0xFFFF)
1893         err = zip64local_putValue(&zi->z_filefunc,zi->
      filestream,(uLong)0xffff,2); /* use value in ZIP64 record */
1894       else
1895         err = zip64local_putValue(&zi->z_filefunc,zi->
      filestream,(uLong)zi->number_entry,2);
1896     }
1897   }
1898
1899   if (err==ZIP_OK) /* total number of entries in the central dir */
1900   {
1901     if(zi->number_entry >= 0xFFFF)
1902       err = zip64local_putValue(&zi->z_filefunc,zi->
      filestream,(uLong)0xffff,2); /* use value in ZIP64 record */
1903     else
1904       err = zip64local_putValue(&zi->z_filefunc,zi->
      filestream,(uLong)zi->number_entry,2);
1905   }
1906
1907   if (err==ZIP_OK) /* size of the central directory */
1908     err = zip64local_putValue(&zi->z_filefunc,zi->
      filestream,(uLong)size_centraldir,4);
1909
1910   if (err==ZIP_OK) /* offset of start of central directory with respect to the starting disk number
      */
1911   {
1912     ZPOS64_T pos = centraldir_pos_inzip - zi->
      add_position_when_writting_offset;
1913     if(pos >= 0xffffffff)
1914     {
1915       err = zip64local_putValue(&zi->z_filefunc,zi->
      filestream, (uLong)0xffffffff,4);
1916     }
1917     else
1918                   err = zip64local_putValue(&zi->z_filefunc,zi->
      filestream, (uLong)(centraldir_pos_inzip - zi->
      add_position_when_writting_offset),4);
1919   }
1920
1921    return err;
1922 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

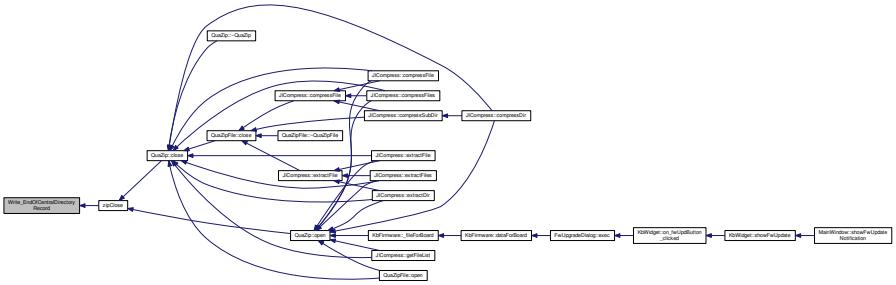

13.109.4.14 int Write_GlobalComment (zip64_internal * zi, const char * global_comment)

Definition at line 1924 of file zip.c.

References zip64_internal::filestream, zip64_internal::z_filefunc, zip64local_putValue(), ZIP_ERRNO, ZIP_OK, and ZWRITE64.

Referenced by zipClose().

```
1925 {
1926   int err = ZIP_OK;
1927   uInt size_global_comment = 0;
1928
1929   if(global_comment != NULL)
1930     size_global_comment = (uInt)strlen(global_comment);
1931
1932   err = zip64local_putValue(&zi->z_filefunc,zi->
      filestream,(uLong)size_global_comment,2);
1933
1934   if (err == ZIP_OK && size_global_comment > 0)
1935   {
1936     if (ZWRITE64(zi->z_filefunc,zi->filestream, global_comment,
      size_global_comment) != size_global_comment)
1937       err = ZIP_ERRNO;
1938   }
1939   return err;
1940 }
```

Here is the call graph for this function:

Here is the caller graph for this function:

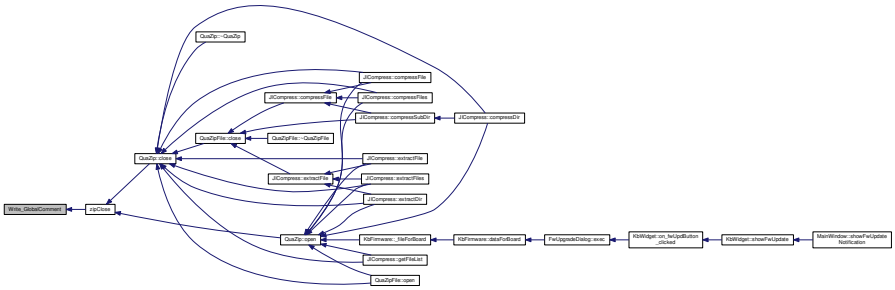

13.109.4.15 int Write_LocalFileHeader (zip64_internal * zi, const char * filename, uInt size_extrafield_local, const void * extrafield_local, uLong version_to_extract)

Definition at line 977 of file zip.c.

References zip64_internal::ci, curfile64_info::dosDate, zip64_internal::filestream, curfile64_info::flag, LOCALHEADERMAGIC, curfile64_info::method, curfile64_info::pos_zip64extrainfo, zip64_internal::z_filefunc, curfile64_info::zip64, zip64local_putValue(), ZIP_ERRNO, ZIP_OK, ZTELL64, and ZWRITE64.

Referenced by zipOpenNewFileInZip4_64().

```
981 {
982   /* write the local header */
983   int err;
984   uInt size_filename = (uInt)strlen(filename);
985   uInt size_extrafield = size_extrafield_local;
986 
987   err = zip64local_putValue(&zi->z_filefunc,zi->
      filestream,(uLong)LOCALHEADERMAGIC, 4);
988 
989   if (err==ZIP_OK)
990   {
991     if(zi->ci.zip64)
992       err = zip64local_putValue(&zi->z_filefunc,zi->
      filestream,(uLong)45,2);/* version needed to extract */
993     else
994       err = zip64local_putValue(&zi->z_filefunc,zi->
      filestream,(uLong)version_to_extract,2);
995   }
996 
997   if (err==ZIP_OK)
998     err = zip64local_putValue(&zi->z_filefunc,zi->
      filestream,(uLong)zi->ci.flag,2);
999 
1000   if (err==ZIP_OK)
1001     err = zip64local_putValue(&zi->z_filefunc,zi->
      filestream,(uLong)zi->ci.method,2);
1002 
1003   if (err==ZIP_OK)
1004     err = zip64local_putValue(&zi->z_filefunc,zi->
      filestream,(uLong)zi->ci.dosDate,4);
1005 
1006   /* CRC / Compressed size / Uncompressed size will be filled in later and rewritten later */
1007   if (err==ZIP_OK)
1008     err = zip64local_putValue(&zi->z_filefunc,zi->
      filestream,(uLong)0,4); /* crc 32, unknown */
1009   if (err==ZIP_OK)
1010   {
1011     if(zi->ci.zip64)
1012       err = zip64local_putValue(&zi->z_filefunc,zi->
      filestream,(uLong)0xFFFFFFFF,4); /* compressed size, unknown */
1013     else
1014       err = zip64local_putValue(&zi->z_filefunc,zi->
      filestream,(uLong)0,4); /* compressed size, unknown */
1015   }
1016   if (err==ZIP_OK)
1017   {
1018     if(zi->ci.zip64)
1019       err = zip64local_putValue(&zi->z_filefunc,zi->
      filestream,(uLong)0xFFFFFFFF,4); /* uncompressed size, unknown */
1020     else
1021       err = zip64local_putValue(&zi->z_filefunc,zi->
      filestream,(uLong)0,4); /* uncompressed size, unknown */
1022   }
1023 
1024   if (err==ZIP_OK)
1025     err = zip64local_putValue(&zi->z_filefunc,zi->
      filestream,(uLong)size_filename,2);
1026 
1027   if(zi->ci.zip64)
1028   {
1029     size_extrafield += 20;
1030   }
1031 
1032   if (err==ZIP_OK)
1033     err = zip64local_putValue(&zi->z_filefunc,zi->
      filestream,(uLong)size_extrafield,2);
1034 
1035   if ((err==ZIP_OK) && (size_filename > 0))
1036   {
1037     if (ZWRITE64(zi->z_filefunc,zi->filestream,filename,size_filename)!=
      size_filename)
1038       err = ZIP_ERRNO;
1039   }
1040 
1041   if ((err==ZIP_OK) && (size_extrafield_local > 0))
1042   {
1043     if (ZWRITE64(zi->z_filefunc, zi->filestream, extrafield_local,
      size_extrafield_local) != size_extrafield_local)
1044       err = ZIP_ERRNO;
1045   }
1046 
1047 
1048   if ((err==ZIP_OK) && (zi->ci.zip64))
1049   {
1050       /* write the Zip64 extended info */
1051       short HeaderID = 1;
1052       short DataSize = 16;
```

```
1053       ZPOS64_T CompressedSize = 0;
1054       ZPOS64_T UncompressedSize = 0;
1055
1056       /* Remember position of Zip64 extended info for the local file header. (needed when we update size
     after done with file) */
1057       zi->ci.pos_zip64extrainfo = ZTELL64(zi->
    z_filefunc,zi->filestream);
1058
1059       err = zip64local_putValue(&zi->z_filefunc, zi->
    filestream, (short)HeaderID,2);
1060       err = zip64local_putValue(&zi->z_filefunc, zi->
    filestream, (short)DataSize,2);
1061
1062       err = zip64local_putValue(&zi->z_filefunc, zi->
    filestream, (ZPOS64_T)UncompressedSize,8);
1063       err = zip64local_putValue(&zi->z_filefunc, zi->
    filestream, (ZPOS64_T)CompressedSize,8);
1064     }
1065
1066     return err;
1067 }
```

Here is the call graph for this function:

Here is the caller graph for this function:

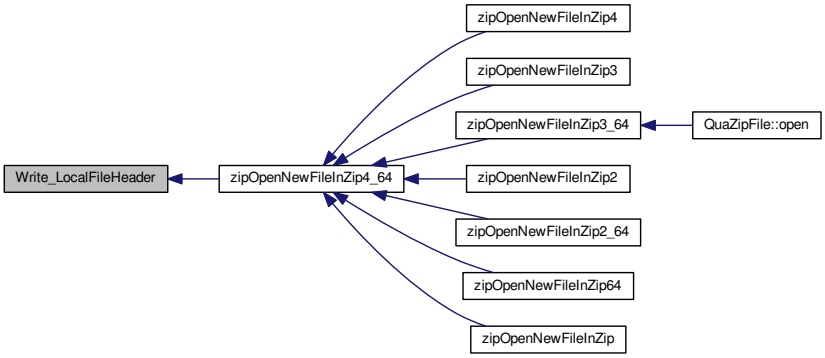

13.109.4.16 int Write_Zip64EndOfCentralDirectoryLocator (zip64_internal * *zi*, ZPOS64_T *zip64eocd_pos_inzip*)

Definition at line 1815 of file zip.c.

References zip64_internal::add_position_when_writting_offset, zip64_internal::filestream, zip64_internal::z_filefunc, ZIP64ENDLOCHEADERMAGIC, zip64local_putValue(), and ZIP_OK.

Referenced by zipClose().

```
1816 {
1817   int err = ZIP_OK;
```

```
1818   ZPOS64_T pos = zip64eocd_pos_inzip - zi->
      add_position_when_writting_offset;
1819
1820   err = zip64local_putValue(&zi->z_filefunc,zi->
      filestream,(uLong)ZIP64ENDLOCHEADERMAGIC,4);
1821
1822   /*num disks*/
1823     if (err==ZIP_OK) /* number of the disk with the start of the central directory */
1824       err = zip64local_putValue(&zi->z_filefunc,zi->
      filestream,(uLong)0,4);
1825
1826   /*relative offset*/
1827     if (err==ZIP_OK) /* Relative offset to the Zip64EndOfCentralDirectory */
1828       err = zip64local_putValue(&zi->z_filefunc,zi->
      filestream, pos,8);
1829
1830   /*total disks*/ /* Do not support spawning of disk so always say 1 here*/
1831     if (err==ZIP_OK) /* number of the disk with the start of the central directory */
1832       err = zip64local_putValue(&zi->z_filefunc,zi->
      filestream,(uLong)1,4);
1833
1834     return err;
1835 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

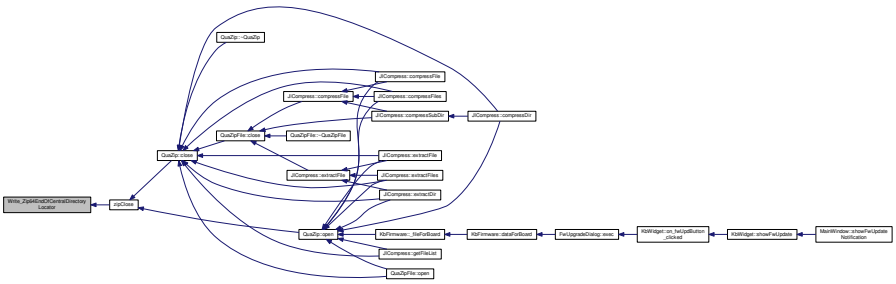

13.109.4.17 int Write_Zip64EndOfCentralDirectoryRecord (zip64_internal * *zi*, uLong *size_centraldir*, ZPOS64_T *centraldir_pos_inzip*)

Definition at line 1837 of file zip.c.

References zip64_internal::add_position_when_writting_offset, zip64_internal::filestream, zip64_internal::number-_entry, zip64_internal::z_filefunc, ZIP64ENDHEADERMAGIC, zip64local_putValue(), and ZIP_OK.

Referenced by zipClose().

```
1838 {
1839   int err = ZIP_OK;
1840
1841   uLong Zip64DataSize = 44;
1842
1843   err = zip64local_putValue(&zi->z_filefunc,zi->
```

```
    filestream,(uLong)ZIP64ENDHEADERMAGIC,4);
1844
1845   if (err==ZIP_OK) /* size of this 'zip64 end of central directory' */
1846     err = zip64local_putValue(&zi->z_filefunc,zi->
    filestream,(ZPOS64_T)Zip64DataSize,8); /* why ZPOS64_T of this ? */
1847
1848   if (err==ZIP_OK) /* version made by */
1849     err = zip64local_putValue(&zi->z_filefunc,zi->
    filestream,(uLong)45,2);
1850
1851   if (err==ZIP_OK) /* version needed */
1852     err = zip64local_putValue(&zi->z_filefunc,zi->
    filestream,(uLong)45,2);
1853
1854   if (err==ZIP_OK) /* number of this disk */
1855     err = zip64local_putValue(&zi->z_filefunc,zi->
    filestream,(uLong)0,4);
1856
1857   if (err==ZIP_OK) /* number of the disk with the start of the central directory */
1858     err = zip64local_putValue(&zi->z_filefunc,zi->
    filestream,(uLong)0,4);
1859
1860   if (err==ZIP_OK) /* total number of entries in the central dir on this disk */
1861     err = zip64local_putValue(&zi->z_filefunc, zi->
    filestream, zi->number_entry, 8);
1862
1863   if (err==ZIP_OK) /* total number of entries in the central dir */
1864     err = zip64local_putValue(&zi->z_filefunc, zi->
    filestream, zi->number_entry, 8);
1865
1866   if (err==ZIP_OK) /* size of the central directory */
1867     err = zip64local_putValue(&zi->z_filefunc,zi->
    filestream,(ZPOS64_T)size_centraldir,8);
1868
1869   if (err==ZIP_OK) /* offset of start of central directory with respect to the starting disk number
    */
1870   {
1871     ZPOS64_T pos = centraldir_pos_inzip - zi->
    add_position_when_writting_offset;
1872     err = zip64local_putValue(&zi->z_filefunc,zi->
    filestream, (ZPOS64_T)pos,8);
1873   }
1874   return err;
1875 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

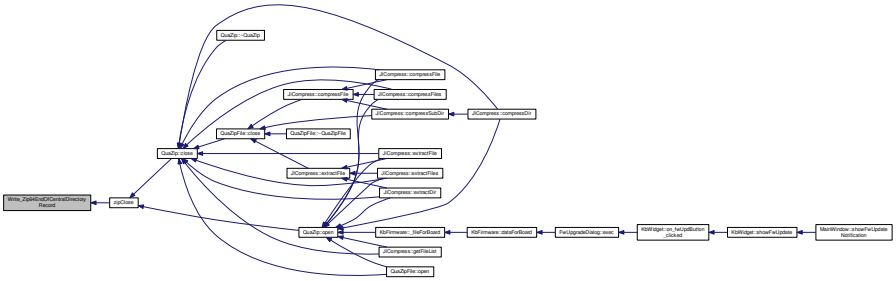

13.109.4.18 static int zip64FlushWriteBuffer (zip64_internal * *zi*) [static]

Definition at line 1403 of file zip.c.

References curfile64_info::buffered_data, zip64_internal::ci, curfile64_info::encrypt, zip64_internal::filestream, curfile64_info::keys, curfile64_info::method, curfile64_info::pcrc_32_tab, curfile64_info::pos_in_buffered_data, curfile64_info::stream, curfile64_info::totalCompressedData, curfile64_info::totalUncompressedData, Z_BZIP2ED, zip64_internal::z_filefunc, zencode, ZIP_ERRNO, ZIP_OK, and ZWRITE64.

Referenced by zipCloseFileInZipRaw64(), and zipWriteInFileInZip().

```
1404 {
1405     int err=ZIP_OK;
1406
1407     if (zi->ci.encrypt != 0)
1408     {
1409 #ifndef NOCRYPT
1410         uInt i;
1411         int t;
1412         for (i=0;i<zi->ci.pos_in_buffered_data;i++)
1413             zi->ci.buffered_data[i] = zencode(zi->ci.
      keys, zi->ci.pcrc_32_tab, zi->ci.buffered_data[i],t);
1414 #endif
1415     }
1416
1417     if (ZWRITE64(zi->z_filefunc,zi->filestream,zi->
      ci.buffered_data,zi->ci.pos_in_buffered_data) != zi->
      ci.pos_in_buffered_data)
1418       err = ZIP_ERRNO;
1419
1420     zi->ci.totalCompressedData += zi->ci.
      pos_in_buffered_data;
1421
1422 #ifdef HAVE_BZIP2
1423     if(zi->ci.method == Z_BZIP2ED)
1424     {
1425       zi->ci.totalUncompressedData += zi->ci.bstream.total_in_lo32;
1426       zi->ci.bstream.total_in_lo32 = 0;
1427       zi->ci.bstream.total_in_hi32 = 0;
1428     }
1429     else
1430 #endif
1431     {
1432       zi->ci.totalUncompressedData += zi->ci.stream.total_in;
1433       zi->ci.stream.total_in = 0;
1434     }
1435
1436
1437     zi->ci.pos_in_buffered_data = 0;
1438
1439     return err;
1440 }
```

Here is the caller graph for this function:

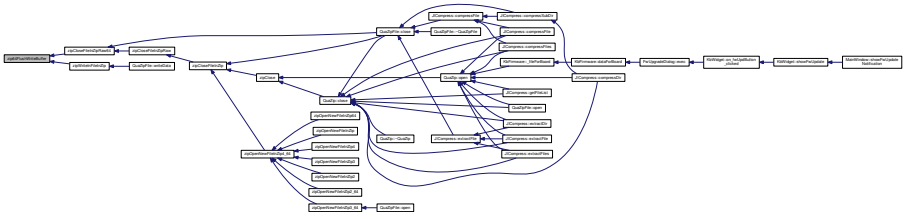

13.109.4.19 static int zip64local_getByte (const zlib_filefunc64_32_def * *pzlib_filefunc_def,* voidpf *filestream,* int * *pi*) [static]

Definition at line 358 of file zip.c.

References ZERROR64, ZIP_EOF, ZIP_ERRNO, ZIP_OK, and ZREAD64.

Referenced by zip64local_getLong(), zip64local_getLong64(), and zip64local_getShort().

```
359 {
360     unsigned char c;
361     int err = (int)ZREAD64(*pzlib_filefunc_def,filestream,&c,1);
362     if (err==1)
363     {
364         *pi = (int)c;
365         return ZIP_OK;
366     }
367     else
368     {
369         if (ZERROR64(*pzlib_filefunc_def,filestream))
370             return ZIP_ERRNO;
371         else
372             return ZIP_EOF;
373     }
374 }
```

Here is the caller graph for this function:

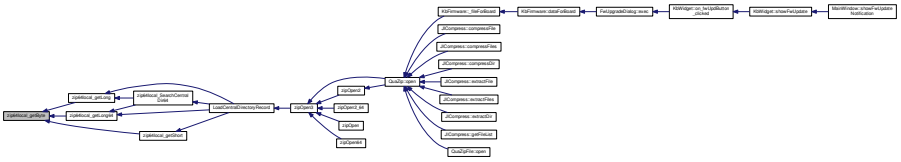

13.109.4.20 static int zip64local_getLong (const zlib_filefunc64_32_def * *pzlib_filefunc_def,* voidpf *filestream,* uLong * *pX*) [static]

Definition at line 404 of file zip.c.

References zip64local_getByte(), and ZIP_OK.

Referenced by LoadCentralDirectoryRecord(), and zip64local_SearchCentralDir64().

```
405 {
406     uLong x ;
407     int i = 0;
408     int err;
409
410     err = zip64local_getByte(pzlib_filefunc_def,filestream,&i);
411     x = (uLong)i;
412
413     if (err==ZIP_OK)
414         err = zip64local_getByte(pzlib_filefunc_def,filestream,&i);
415     x += ((uLong)i)<<8;
416
417     if (err==ZIP_OK)
418         err = zip64local_getByte(pzlib_filefunc_def,filestream,&i);
419     x += ((uLong)i)<<16;
420
421     if (err==ZIP_OK)
422         err = zip64local_getByte(pzlib_filefunc_def,filestream,&i);
423     x += ((uLong)i)<<24;
424
425     if (err==ZIP_OK)
426         *pX = x;
427     else
428         *pX = 0;
429     return err;
430 }
```

Here is the call graph for this function:

Here is the caller graph for this function:

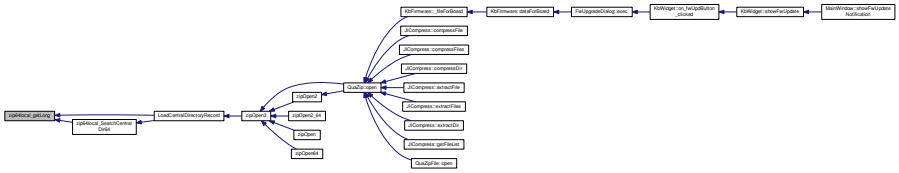

13.109.4.21 static int zip64local_getLong64 (const zlib_filefunc64_32_def * *pzlib_filefunc_def*, voidpf *filestream*, ZPOS64_T * *pX*) [static]

Definition at line 435 of file zip.c.

References zip64local_getByte(), and ZIP_OK.

Referenced by LoadCentralDirectoryRecord(), and zip64local_SearchCentralDir64().

```
436 {
437   ZPOS64_T x;
438   int i = 0;
439   int err;
440
441   err = zip64local_getByte(pzlib_filefunc_def,filestream,&i);
442   x = (ZPOS64_T)i;
443
444   if (err==ZIP_OK)
445     err = zip64local_getByte(pzlib_filefunc_def,filestream,&i);
446   x += ((ZPOS64_T)i)<<8;
447
448   if (err==ZIP_OK)
449     err = zip64local_getByte(pzlib_filefunc_def,filestream,&i);
450   x += ((ZPOS64_T)i)<<16;
451
452   if (err==ZIP_OK)
453     err = zip64local_getByte(pzlib_filefunc_def,filestream,&i);
454   x += ((ZPOS64_T)i)<<24;
455
456   if (err==ZIP_OK)
457     err = zip64local_getByte(pzlib_filefunc_def,filestream,&i);
458   x += ((ZPOS64_T)i)<<32;
459
460   if (err==ZIP_OK)
461     err = zip64local_getByte(pzlib_filefunc_def,filestream,&i);
462   x += ((ZPOS64_T)i)<<40;
463
464   if (err==ZIP_OK)
465     err = zip64local_getByte(pzlib_filefunc_def,filestream,&i);
466   x += ((ZPOS64_T)i)<<48;
467
468   if (err==ZIP_OK)
469     err = zip64local_getByte(pzlib_filefunc_def,filestream,&i);
470   x += ((ZPOS64_T)i)<<56;
471
472   if (err==ZIP_OK)
473     *pX = x;
```

```
474   else
475     *pX = 0;
476
477   return err;
478 }
```

Here is the call graph for this function:

Here is the caller graph for this function:

13.109.4.22 static int zip64local_getShort (const zlib_filefunc64_32_def * *pzlib_filefunc_def,* voidpf *filestream,* uLong * *pX*) [static]

Definition at line 382 of file zip.c.

References zip64local_getByte(), and ZIP_OK.

Referenced by LoadCentralDirectoryRecord().

```
383 {
384     uLong x ;
385     int i = 0;
386     int err;
387
388     err = zip64local_getByte(pzlib_filefunc_def,filestream,&i);
389     x = (uLong)i;
390
391     if (err==ZIP_OK)
392         err = zip64local_getByte(pzlib_filefunc_def,filestream,&i);
393     x += ((uLong)i)<<8;
394
395     if (err==ZIP_OK)
396         *pX = x;
397     else
398         *pX = 0;
399     return err;
400 }
```

Here is the call graph for this function:

Here is the caller graph for this function:

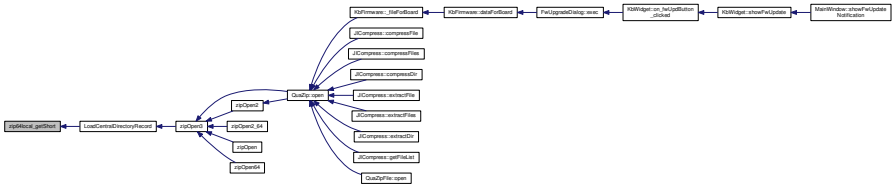

13.109.4.23 static int zip64local_putValue (const zlib_filefunc64_32_def * *pzlib_filefunc_def,* voidpf *filestream,* ZPOS64_T *x,* int *nbByte*) [static]

Definition at line 296 of file zip.c.

References ZIP_ERRNO, ZIP_OK, and ZWRITE64.

Referenced by Write_EndOfCentralDirectoryRecord(), Write_GlobalComment(), Write_LocalFileHeader(), Write_-Zip64EndOfCentralDirectoryLocator(), Write_Zip64EndOfCentralDirectoryRecord(), and zipCloseFileInZipRaw64().

```
297 {
298     unsigned char buf[8];
299     int n;
300     for (n = 0; n < nbByte; n++)
301     {
302         buf[n] = (unsigned char)(x & 0xff);
303         x >>= 8;
304     }
305     if (x != 0)
306       {     /* data overflow - hack for ZIP64 (X Roche) */
307       for (n = 0; n < nbByte; n++)
308         {
309           buf[n] = 0xff;
310         }
311       }
312
313     if (ZWRITE64(*pzlib_filefunc_def,filestream,buf,nbByte)!=(uLong)nbByte)
314         return ZIP_ERRNO;
315     else
316         return ZIP_OK;
317 }
```

Here is the caller graph for this function:

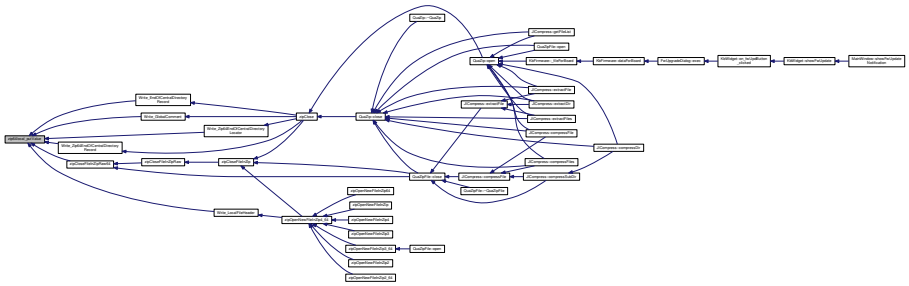

13.109.4.24 static void zip64local_putValue_inmemory (void * *dest*, ZPOS64_T *x*, int *nbByte*) [static]

Definition at line 320 of file zip.c.

Referenced by zipCloseFileInZipRaw64(), and zipOpenNewFileInZip4_64().

```
321 {
322     unsigned char* buf=(unsigned char*)dest;
323     int n;
324     for (n = 0; n < nbByte; n++) {
325         buf[n] = (unsigned char)(x & 0xff);
326         x >>= 8;
327     }
328
329     if (x != 0)
330     {     /* data overflow - hack for ZIP64 */
331        for (n = 0; n < nbByte; n++)
332        {
333           buf[n] = 0xff;
334        }
335     }
336 }
```

Here is the caller graph for this function:

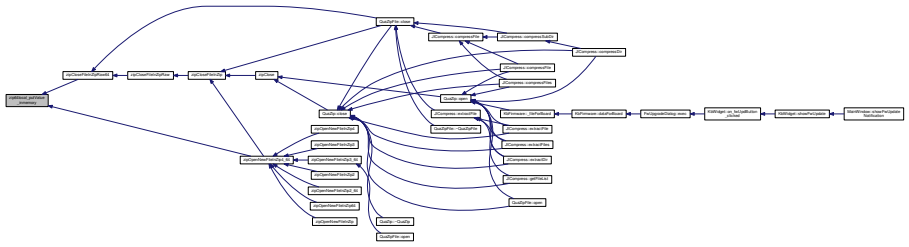

13.109.4.25 static ZPOS64_T zip64local_SearchCentralDir (const zlib_filefunc64_32_def * *pzlib_filefunc_def*, voidpf *filestream*) [static]

Definition at line 489 of file zip.c.

References ALLOC, BUFREADCOMMENT, TRYFREE, ZLIB_FILEFUNC_SEEK_END, ZLIB_FILEFUNC_SEEK_-SET, ZREAD64, ZSEEK64, and ZTELL64.

Referenced by LoadCentralDirectoryRecord().

```
490 {
491   unsigned char* buf;
492   ZPOS64_T uSizeFile;
```

```
493   ZPOS64_T uBackRead;
494   ZPOS64_T uMaxBack=0xffff; /* maximum size of global comment */
495   ZPOS64_T uPosFound=0;
496
497   if (ZSEEK64(*pzlib_filefunc_def,filestream,0,ZLIB_FILEFUNC_SEEK_END) != 0)
498     return 0;
499
500
501   uSizeFile = ZTELL64(*pzlib_filefunc_def,filestream);
502
503   if (uMaxBack>uSizeFile)
504     uMaxBack = uSizeFile;
505
506   buf = (unsigned char*)ALLOC(BUFREADCOMMENT+4);
507   if (buf==NULL)
508     return 0;
509
510   uBackRead = 4;
511   while (uBackRead<uMaxBack)
512   {
513     uLong uReadSize;
514     ZPOS64_T uReadPos ;
515     int i;
516     if (uBackRead+BUFREADCOMMENT>uMaxBack)
517       uBackRead = uMaxBack;
518     else
519       uBackRead+=BUFREADCOMMENT;
520     uReadPos = uSizeFile-uBackRead ;
521
522     uReadSize = ((BUFREADCOMMENT+4) < (uSizeFile-uReadPos)) ?
523       (BUFREADCOMMENT+4) : (uLong)(uSizeFile-uReadPos);
524     if (ZSEEK64(*pzlib_filefunc_def,filestream,uReadPos,
      ZLIB_FILEFUNC_SEEK_SET)!=0)
525       break;
526
527     if (ZREAD64(*pzlib_filefunc_def,filestream,buf,uReadSize)!=uReadSize)
528       break;
529
530     for (i=(int)uReadSize-3; (i--)>0;)
531       if (((*(buf+i))==0x50) && ((*(buf+i+1))==0x4b) &&
532         ((*(buf+i+2))==0x05) && ((*(buf+i+3))==0x06))
533       {
534         uPosFound = uReadPos+i;
535         break;
536       }
537
538     if (uPosFound!=0)
539       break;
540   }
541   TRYFREE(buf);
542   return uPosFound;
543 }
```

Here is the caller graph for this function:

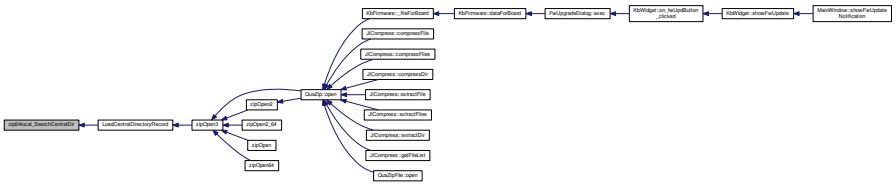

13.109.4.26 static ZPOS64_T zip64local_SearchCentralDir64 (const zlib_filefunc64_32_def * *pzlib_filefunc_def,* voidpf *filestream*) [static]

Definition at line 551 of file zip.c.

References ALLOC, BUFREADCOMMENT, TRYFREE, zip64local_getLong(), zip64local_getLong64(), ZIP_OK, ZLIB_FILEFUNC_SEEK_END, ZLIB_FILEFUNC_SEEK_SET, ZREAD64, ZSEEK64, and ZTELL64.

Referenced by LoadCentralDirectoryRecord().

```
552 {
```

```
553   unsigned char* buf;
554   ZPOS64_T uSizeFile;
555   ZPOS64_T uBackRead;
556   ZPOS64_T uMaxBack=0xffff; /* maximum size of global comment */
557   ZPOS64_T uPosFound=0;
558   uLong uL;
559   ZPOS64_T relativeOffset;
560
561   if (ZSEEK64(*pzlib_filefunc_def,filestream,0,ZLIB_FILEFUNC_SEEK_END) != 0)
562     return 0;
563
564   uSizeFile = ZTELL64(*pzlib_filefunc_def,filestream);
565
566   if (uMaxBack>uSizeFile)
567     uMaxBack = uSizeFile;
568
569   buf = (unsigned char*)ALLOC(BUFREADCOMMENT+4);
570   if (buf==NULL)
571     return 0;
572
573   uBackRead = 4;
574   while (uBackRead<uMaxBack)
575   {
576     uLong uReadSize;
577     ZPOS64_T uReadPos;
578     int i;
579     if (uBackRead+BUFREADCOMMENT>uMaxBack)
580       uBackRead = uMaxBack;
581     else
582       uBackRead+=BUFREADCOMMENT;
583     uReadPos = uSizeFile-uBackRead ;
584
585     uReadSize = ((BUFREADCOMMENT+4) < (uSizeFile-uReadPos)) ?
586       (BUFREADCOMMENT+4) : (uLong)(uSizeFile-uReadPos);
587     if (ZSEEK64(*pzlib_filefunc_def,filestream,uReadPos,
    ZLIB_FILEFUNC_SEEK_SET)!=0)
588       break;
589
590     if (ZREAD64(*pzlib_filefunc_def,filestream,buf,uReadSize)!=uReadSize)
591       break;
592
593     for (i=(int)uReadSize-3; (i--)>0;)
594     {
595       /* Signature "0x07064b50" Zip64 end of central directory locater */
596       if (((*(buf+i))==0x50) && ((*(buf+i+1))==0x4b) && ((*(buf+i+2))==0x06) && ((*(buf+i+3))==0x07))
597       {
598         uPosFound = uReadPos+i;
599         break;
600       }
601     }
602
603       if (uPosFound!=0)
604         break;
605   }
606
607   TRYFREE(buf);
608   if (uPosFound == 0)
609     return 0;
610
611   /* Zip64 end of central directory locator */
612   if (ZSEEK64(*pzlib_filefunc_def,filestream, uPosFound,
    ZLIB_FILEFUNC_SEEK_SET)!=0)
613     return 0;
614
615   /* the signature, already checked */
616   if (zip64local_getLong(pzlib_filefunc_def,filestream,&uL)!=
    ZIP_OK)
617     return 0;
618
619   /* number of the disk with the start of the zip64 end of  central directory */
620   if (zip64local_getLong(pzlib_filefunc_def,filestream,&uL)!=
    ZIP_OK)
621     return 0;
622   if (uL != 0)
623     return 0;
624
625   /* relative offset of the zip64 end of central directory record */
626   if (zip64local_getLong64(pzlib_filefunc_def,filestream,&relativeOffset)!=
    ZIP_OK)
627     return 0;
628
629   /* total number of disks */
630   if (zip64local_getLong(pzlib_filefunc_def,filestream,&uL)!=
    ZIP_OK)
631     return 0;
632   if (uL != 1)
633     return 0;
```

```
634
635   /* Goto Zip64 end of central directory record */
636   if (ZSEEK64(*pzlib_filefunc_def,filestream, relativeOffset,
      ZLIB_FILEFUNC_SEEK_SET)!=0)
637     return 0;
638
639   /* the signature */
640   if (zip64local_getLong(pzlib_filefunc_def,filestream,&uL)!=
      ZIP_OK)
641     return 0;
642
643   if (uL != 0x06064b50) /* signature of 'Zip64 end of central directory' */
644     return 0;
645
646   return relativeOffset;
647 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

13.109.4.27 static uLong zip64local_TmzDateToDosDate (const tm_zip * *ptm*) [static]

Definition at line 341 of file zip.c.

References tm_zip_s::tm_hour, tm_zip_s::tm_mday, tm_zip_s::tm_min, tm_zip_s::tm_mon, tm_zip_s::tm_sec, and tm_zip_s::tm_year.

Referenced by zipOpenNewFileInZip4_64().

```
342 {
343     uLong year = (uLong)ptm->tm_year;
344     if (year>=1980)
345         year-=1980;
346     else if (year>=80)
347         year-=80;
348     return
349       (uLong) (((ptm->tm_mday) + (32 * (ptm->tm_mon+1)) + (512 * year)) << 16) |
350         ((ptm->tm_sec/2) + (32* ptm->tm_min) + (2048 * (uLong)ptm->
      tm_hour));
351 }
```

Here is the caller graph for this function:

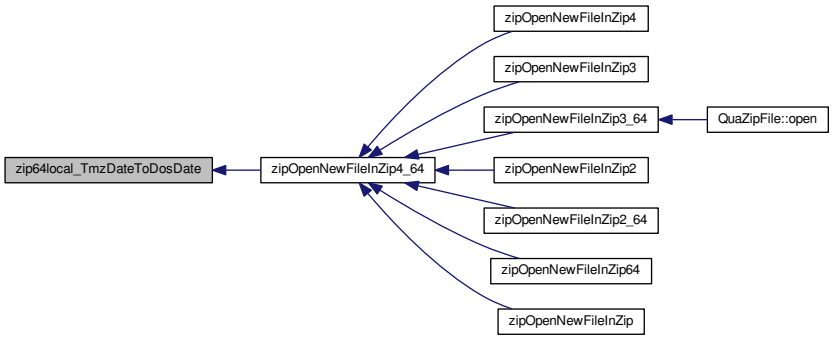

13.109.4.28 int ZEXPORT zipClearFlags (zipFile *file*, unsigned *flags*)

Definition at line 2091 of file zip.c.

References zip64_internal::flags, ZIP_OK, ZIP_PARAMERROR, ZIP_SEQUENTIAL, and ZIP_WRITE_DATA_DESCRIPTOR.

Referenced by QuaZipFile::open().

```
2092 {
2093     zip64_internal* zi;
2094     if (file == NULL)
2095         return ZIP_PARAMERROR;
2096     zi = (zip64_internal*)file;
2097     zi->flags &= ~flags;
2098     // If the data descriptor is not written, we can't use a non-seekable output.
2099     if ((zi->flags & ZIP_WRITE_DATA_DESCRIPTOR) == 0) {
2100         zi->flags &= ~ZIP_SEQUENTIAL;
2101     }
2102     return ZIP_OK;
2103 }
```

Here is the caller graph for this function:

13.109.4.29 int ZEXPORT zipClose (zipFile *file*, const char * *global_comment*)

Definition at line 1942 of file zip.c.

References zip64_internal::add_position_when_writting_offset, zip64_internal::central_dir, linkedlist_datablock_internal_s::data, zip64_internal::filestream, linkedlist_datablock_internal_s::filled_in_this_block, linkedlist_data_s::first_block, zip64_internal::flags, free_linkedlist(), zip64_internal::globalcomment, zip64_internal::in_opened_file_inzip, linkedlist_datablock_internal_s::next_datablock, zip64_internal::number_entry, TRYFREE, Write_EndOf-

CentralDirectoryRecord(), Write_GlobalComment(), Write_Zip64EndOfCentralDirectoryLocator(), Write_Zip64EndOfCentralDirectoryRecord(), zip64_internal::z_filefunc, ZCLOSE64, ZFAKECLOSE64, ZIP_AUTO_CLOSE, ZIP_ERRNO, ZIP_OK, ZIP_PARAMERROR, zipCloseFileInZip(), ZTELL64, and ZWRITE64.

Referenced by QuaZip::close(), and QuaZip::open().

```
1943 {
1944     zip64_internal* zi;
1945     int err = 0;
1946     uLong size_centraldir = 0;
1947     ZPOS64_T centraldir_pos_inzip;
1948     ZPOS64_T pos;
1949 
1950     if (file == NULL)
1951         return ZIP_PARAMERROR;
1952 
1953     zi = (zip64_internal*)file;
1954 
1955     if (zi->in_opened_file_inzip == 1)
1956     {
1957         err = zipCloseFileInZip (file);
1958     }
1959 
1960 #ifndef NO_ADDFILEINEXISTINGZIP
1961     if (global_comment==NULL)
1962         global_comment = zi->globalcomment;
1963 #endif
1964 
1965     centraldir_pos_inzip = ZTELL64(zi->z_filefunc,zi->
     filestream);
1966 
1967     if (err==ZIP_OK)
1968     {
1969         linkedlist_datablock_internal* ldi = zi->
     central_dir.first_block;
1970         while (ldi!=NULL)
1971         {
1972             if ((err==ZIP_OK) && (ldi->filled_in_this_block>0))
1973             {
1974                 if (ZWRITE64(zi->z_filefunc,zi->filestream, ldi->
     data, ldi->filled_in_this_block) != ldi->
     filled_in_this_block)
1975                     err = ZIP_ERRNO;
1976             }
1977 
1978             size_centraldir += ldi->filled_in_this_block;
1979             ldi = ldi->next_datablock;
1980         }
1981     }
1982     free_linkedlist(&(zi->central_dir));
1983 
1984     pos = centraldir_pos_inzip - zi->add_position_when_writting_offset;
1985     if(pos >= 0xffffffff || zi->number_entry > 0xFFFF)
1986     {
1987       ZPOS64_T Zip64EOCDpos = ZTELL64(zi->z_filefunc,zi->
     filestream);
1988       Write_Zip64EndOfCentralDirectoryRecord(zi, size_centraldir,
     centraldir_pos_inzip);
1989 
1990       Write_Zip64EndOfCentralDirectoryLocator(zi, Zip64EOCDpos);
1991     }
1992 
1993     if (err==ZIP_OK)
1994       err = Write_EndOfCentralDirectoryRecord(zi, size_centraldir,
     centraldir_pos_inzip);
1995 
1996     if(err == ZIP_OK)
1997       err = Write_GlobalComment(zi, global_comment);
1998 
1999     if ((zi->flags & ZIP_AUTO_CLOSE) != 0) {
2000         if (ZCLOSE64(zi->z_filefunc,zi->filestream) != 0) {
2001             if (err == ZIP_OK)
2002                 err = ZIP_ERRNO;
2003         }
2004     } else {
2005         if (ZFAKECLOSE64(zi->z_filefunc,zi->filestream) != 0) {
2006             if (err == ZIP_OK)
2007                 err = ZIP_ERRNO;
2008         }
2009     }
2010 
2011 #ifndef NO_ADDFILEINEXISTINGZIP
2012     TRYFREE(zi->globalcomment);
2013 #endif
2014     TRYFREE(zi);
2015 
```

```
2016     return err;
2017 }
```

Here is the call graph for this function:

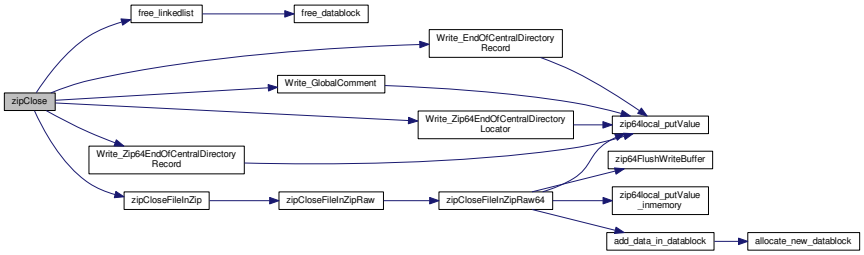

Here is the caller graph for this function:

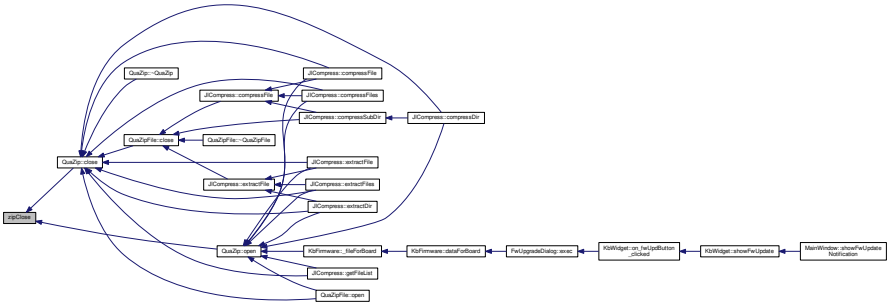

13.109.4.30 int ZEXPORT zipCloseFileInZip (zipFile *file*)

Definition at line 1810 of file zip.c.

References zipCloseFileInZipRaw().

Referenced by QuaZipFile::close(), zipClose(), and zipOpenNewFileInZip4_64().

```
1811 {
1812     return zipCloseFileInZipRaw (file,0,0);
1813 }
```

Here is the call graph for this function:

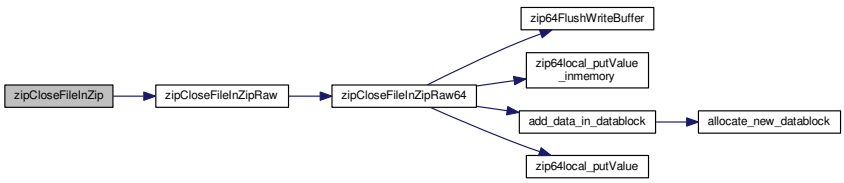

Here is the caller graph for this function:

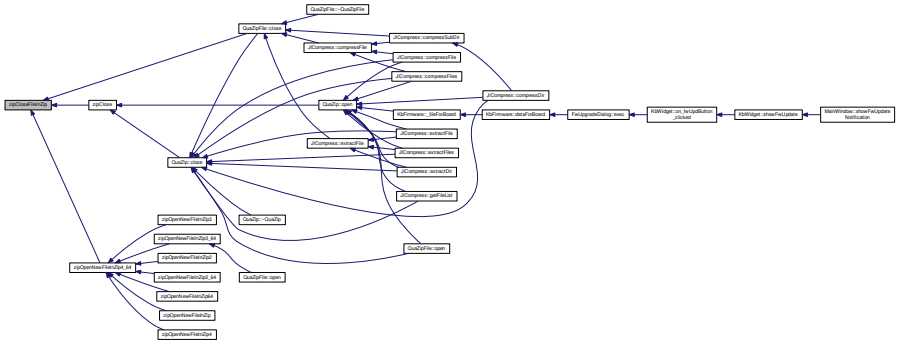

13.109.4.31 int ZEXPORT zipCloseFileInZipRaw (zipFile *file*, uLong *uncompressed_size*, uLong *crc32*)

Definition at line 1549 of file zip.c.

References zipCloseFileInZipRaw64().

Referenced by zipCloseFileInZip().

```
1550 {
1551     return zipCloseFileInZipRaw64 (file, uncompressed_size, crc32);
1552 }
```

Here is the call graph for this function:

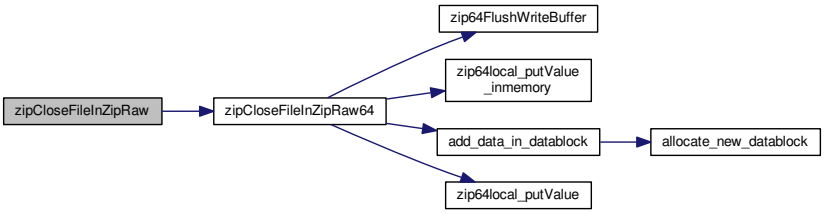

Here is the caller graph for this function:

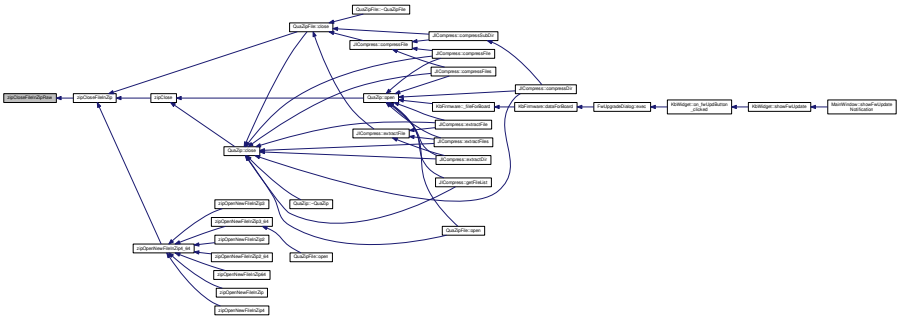

13.109.4.32 int ZEXPORT zipCloseFileInZipRaw64 (zipFile *file*, ZPOS64_T *uncompressed_size*, uLong *crc32*)

Definition at line 1554 of file zip.c.

References add_data_in_datablock(), curfile64_info::buffered_data, zip64_internal::central_dir, curfile64_info::central_header, zip64_internal::ci, curfile64_info::crc32, curfile64_info::crypt_header_size, DESCRIPTORHEADERMAGIC, zip64_internal::filestream, curfile64_info::flag, zip64_internal::flags, zip64_internal::in_opened_file_inzip, curfile64_info::method, zip64_internal::number_entry, curfile64_info::pos_in_buffered_data, curfile64_info::pos_local_header, curfile64_info::pos_zip64extrainfo, curfile64_info::raw, curfile64_info::size_centralExtra, curfile64_info::size_centralExtraFree, curfile64_info::size_centralheader, curfile64_info::stream, curfile64_info::stream_initialised, curfile64_info::totalCompressedData, curfile64_info::totalUncompressedData, Z_BUFSIZE, Z_BZIP2ED, zip64_internal::z_filefunc, curfile64_info::zip64, zip64FlushWriteBuffer(), zip64local_putValue(), zip64local_putValue_inmemory(), ZIP_BADZIPFILE, ZIP_ERRNO, ZIP_OK, ZIP_PARAMERROR, ZIP_SEQUENTIAL, ZLIB_FILEFUNC_SEEK_SET, ZSEEK64, and ZTELL64.

Referenced by QuaZipFile::close(), and zipCloseFileInZipRaw().

```
1555 {
1556     zip64_internal* zi;
1557     ZPOS64_T compressed_size;
1558     uLong invalidValue = 0xffffffff;
1559     short datasize = 0;
1560     int err=ZIP_OK;
1561
1562     if (file == NULL)
1563         return ZIP_PARAMERROR;
1564     zi = (zip64_internal*)file;
1565
1566     if (zi->in_opened_file_inzip == 0)
1567         return ZIP_PARAMERROR;
1568     zi->ci.stream.avail_in = 0;
1569
1570     if ((zi->ci.method == Z_DEFLATED) && (!zi->ci.raw))
1571                 {
1572                         while (err==ZIP_OK)
1573                         {
1574                                 uLong uTotalOutBefore;
1575                                 if (zi->ci.stream.avail_out == 0)
1576                                 {
1577                                         if (zip64FlushWriteBuffer(zi) ==
     ZIP_ERRNO)
1578                                                 err = ZIP_ERRNO;
1579                                         zi->ci.stream.avail_out = (uInt)
     Z_BUFSIZE;
1580                                         zi->ci.stream.next_out = zi->ci.
     buffered_data;
1581                                 }
1582                                 uTotalOutBefore = zi->ci.stream.total_out;
1583                                 err=deflate(&zi->ci.stream,  Z_FINISH);
1584                                 zi->ci.pos_in_buffered_data += (uInt)(zi->
     ci.stream.total_out - uTotalOutBefore) ;
1585                         }
1586                 }
1587     else if ((zi->ci.method == Z_BZIP2ED) && (!zi->ci.raw))
1588     {
1589 #ifdef HAVE_BZIP2
1590       err = BZ_FINISH_OK;
1591       while (err==BZ_FINISH_OK)
1592       {
1593         uLong uTotalOutBefore;
1594         if (zi->ci.bstream.avail_out == 0)
1595         {
1596           if (zip64FlushWriteBuffer(zi) == ZIP_ERRNO)
1597             err = ZIP_ERRNO;
1598           zi->ci.bstream.avail_out = (uInt)Z_BUFSIZE;
1599           zi->ci.bstream.next_out = (char*)zi->ci.buffered_data;
1600         }
1601         uTotalOutBefore = zi->ci.bstream.total_out_lo32;
1602         err=BZ2_bzCompress(&zi->ci.bstream,  BZ_FINISH);
1603         if(err == BZ_STREAM_END)
1604           err = Z_STREAM_END;
1605
1606         zi->ci.pos_in_buffered_data += (uInt)(zi->ci.bstream.total_out_lo32 -
     uTotalOutBefore);
1607       }
1608
1609       if(err == BZ_FINISH_OK)
1610         err = ZIP_OK;
1611 #endif
1612     }
1613
```

```
1614     if (err==Z_STREAM_END)
1615         err=ZIP_OK; /* this is normal */
1616
1617     if ((zi->ci.pos_in_buffered_data>0) && (err==ZIP_OK))
1618                 {
1619         if (zip64FlushWriteBuffer(zi)==ZIP_ERRNO)
1620             err = ZIP_ERRNO;
1621                 }
1622
1623     if ((zi->ci.method == Z_DEFLATED) && (!zi->ci.raw))
1624     {
1625         int tmp_err = deflateEnd(&zi->ci.stream);
1626         if (err == ZIP_OK)
1627             err = tmp_err;
1628         zi->ci.stream_initialised = 0;
1629     }
1630 #ifdef HAVE_BZIP2
1631     else if((zi->ci.method == Z_BZIP2ED) && (!zi->ci.raw))
1632     {
1633       int tmperr = BZ2_bzCompressEnd(&zi->ci.bstream);
1634                         if (err==ZIP_OK)
1635                                 err = tmperr;
1636                         zi->ci.stream_initialised = 0;
1637     }
1638 #endif
1639
1640     if (!zi->ci.raw)
1641     {
1642         crc32 = (uLong)zi->ci.crc32;
1643         uncompressed_size = zi->ci.totalUncompressedData;
1644     }
1645     compressed_size = zi->ci.totalCompressedData;
1646
1647 #    ifndef NOCRYPT
1648     compressed_size += zi->ci.crypt_header_size;
1649 #    endif
1650
1651     /* update Current Item crc and sizes, */
1652     if(compressed_size >= 0xffffffff || uncompressed_size >= 0xffffffff || zi->
      ci.pos_local_header >= 0xffffffff)
1653     {
1654       /*version Made by*/
1655       zip64local_putValue_inmemory(zi->ci.
      central_header+4,(uLong)45,2);
1656       /*version needed*/
1657       zip64local_putValue_inmemory(zi->ci.
      central_header+6,(uLong)45,2);
1658
1659     }
1660
1661     zip64local_putValue_inmemory(zi->ci.
      central_header+16,crc32,4); /*crc*/
1662
1663
1664     if(compressed_size >= 0xffffffff)
1665       zip64local_putValue_inmemory(zi->ci.
      central_header+20, invalidValue,4); /*compr size*/
1666     else
1667       zip64local_putValue_inmemory(zi->ci.
      central_header+20, compressed_size,4); /*compr size*/
1668
1669     /* set internal file attributes field */
1670     if (zi->ci.stream.data_type == Z_ASCII)
1671         zip64local_putValue_inmemory(zi->ci.
      central_header+36,(uLong)Z_ASCII,2);
1672
1673     if(uncompressed_size >= 0xffffffff)
1674       zip64local_putValue_inmemory(zi->ci.
      central_header+24, invalidValue,4); /*uncompr size*/
1675     else
1676       zip64local_putValue_inmemory(zi->ci.
      central_header+24, uncompressed_size,4); /*uncompr size*/
1677
1678     /* Add ZIP64 extra info field for uncompressed size */
1679     if(uncompressed_size >= 0xffffffff)
1680       datasize += 8;
1681
1682     /* Add ZIP64 extra info field for compressed size */
1683     if(compressed_size >= 0xffffffff)
1684       datasize += 8;
1685
1686     /* Add ZIP64 extra info field for relative offset to local file header of current file */
1687     if(zi->ci.pos_local_header >= 0xffffffff)
1688       datasize += 8;
1689
1690     if(datasize > 0)
1691     {
```

```
1692       char* p = NULL;
1693
1694       if((uLong)(datasize + 4) > zi->ci.size_centralExtraFree)
1695       {
1696         /* we can not write more data to the buffer that we have room for. */
1697         return ZIP_BADZIPFILE;
1698       }
1699
1700       p = zi->ci.central_header + zi->ci.size_centralheader;
1701
1702       /* Add Extra Information Header for 'ZIP64 information' */
1703       zip64local_putValue_inmemory(p, 0x0001, 2); /* HeaderID */
1704       p += 2;
1705       zip64local_putValue_inmemory(p, datasize, 2); /* DataSize */
1706       p += 2;
1707
1708       if(uncompressed_size >= 0xffffffff)
1709       {
1710         zip64local_putValue_inmemory(p, uncompressed_size, 8);
1711         p += 8;
1712       }
1713
1714       if(compressed_size >= 0xffffffff)
1715       {
1716         zip64local_putValue_inmemory(p, compressed_size, 8);
1717         p += 8;
1718       }
1719
1720       if(zi->ci.pos_local_header >= 0xffffffff)
1721       {
1722         zip64local_putValue_inmemory(p, zi->ci.
     pos_local_header, 8);
1723         p += 8;
1724       }
1725
1726       /* Update how much extra free space we got in the memory buffer */
1727       /* and increase the centralheader size so the new ZIP64 fields are included */
1728       /* ( 4 below is the size of HeaderID and DataSize field ) */
1729       zi->ci.size_centralExtraFree -= datasize + 4;
1730       zi->ci.size_centralheader += datasize + 4;
1731
1732       /* Update the extra info size field */
1733       zi->ci.size_centralExtra += datasize + 4;
1734       zip64local_putValue_inmemory(zi->ci.
     central_header+30,(uLong)zi->ci.size_centralExtra,2);
1735     }
1736
1737     if (err==ZIP_OK)
1738         err = add_data_in_datablock(&zi->central_dir, zi->
     ci.central_header, (uLong)zi->ci.size_centralheader);
1739
1740     free(zi->ci.central_header);
1741
1742     if (err==ZIP_OK)
1743     {
1744         if ((zi->flags & ZIP_SEQUENTIAL) == 0) {
1745             /* Update the LocalFileHeader with the new values. */
1746
1747             ZPOS64_T cur_pos_inzip = ZTELL64(zi->z_filefunc,zi->
     filestream);
1748
1749             if (ZSEEK64(zi->z_filefunc,zi->filestream, zi->
     ci.pos_local_header + 14,ZLIB_FILEFUNC_SEEK_SET)!=0)
1750                 err = ZIP_ERRNO;
1751
1752             if (err==ZIP_OK)
1753                 err = zip64local_putValue(&zi->z_filefunc,zi->
     filestream,crc32,4); /* crc 32, unknown */
1754
1755             if(uncompressed_size >= 0xffffffff || compressed_size >= 0xffffffff)
1756             {
1757                 if(zi->ci.pos_zip64extrainfo > 0)
1758                 {
1759                     /* Update the size in the ZIP64 extended field. */
1760                     if (ZSEEK64(zi->z_filefunc,zi->filestream, zi->
     ci.pos_zip64extrainfo + 4,ZLIB_FILEFUNC_SEEK_SET)!=0)
1761                         err = ZIP_ERRNO;
1762
1763                     if (err==ZIP_OK) /* compressed size, unknown */
1764                         err = zip64local_putValue(&zi->
     z_filefunc, zi->filestream, uncompressed_size, 8);
1765
1766                     if (err==ZIP_OK) /* uncompressed size, unknown */
1767                         err = zip64local_putValue(&zi->
     z_filefunc, zi->filestream, compressed_size, 8);
1768                 }
1769             }
```

```
1770            else
1771            {
1772                if (err==ZIP_OK) /* compressed size, unknown */
1773                    err = zip64local_putValue(&zi->z_filefunc,zi->
     filestream,compressed_size,4);
1774
1775                if (err==ZIP_OK) /* uncompressed size, unknown */
1776                    err = zip64local_putValue(&zi->z_filefunc,zi->
     filestream,uncompressed_size,4);
1777            }
1778
1779            if (ZSEEK64(zi->z_filefunc,zi->filestream, cur_pos_inzip,
     ZLIB_FILEFUNC_SEEK_SET)!=0)
1780                err = ZIP_ERRNO;
1781        }
1782
1783        if ((zi->ci.flag & 8) != 0) {
1784            /* Write local Descriptor after file data */
1785            if (err==ZIP_OK)
1786                err = zip64local_putValue(&zi->z_filefunc,zi->
     filestream,(uLong)DESCRIPTORHEADERMAGIC,4);
1787            if (err==ZIP_OK)
1788                err = zip64local_putValue(&zi->z_filefunc,zi->
     filestream,crc32,4); /* crc 32, unknown */
1789            if (zi->ci.zip64) {
1790                if (err==ZIP_OK) /* compressed size, unknown */
1791                    err = zip64local_putValue(&zi->z_filefunc,zi->
     filestream,compressed_size,8);
1792
1793                if (err==ZIP_OK) /* uncompressed size, unknown */
1794                    err = zip64local_putValue(&zi->z_filefunc,zi->
     filestream,uncompressed_size,8);
1795            } else {
1796                if (err==ZIP_OK) /* compressed size, unknown */
1797                    err = zip64local_putValue(&zi->z_filefunc,zi->
     filestream,compressed_size,4);
1798                if (err==ZIP_OK) /* uncompressed size, unknown */
1799                    err = zip64local_putValue(&zi->z_filefunc,zi->
     filestream,uncompressed_size,4);
1800            }
1801        }
1802    }
1803
1804    zi->number_entry ++;
1805    zi->in_opened_file_inzip = 0;
1806
1807    return err;
1808 }
```

Here is the call graph for this function:

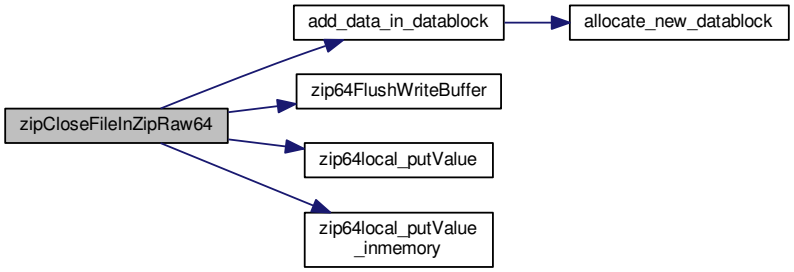

Here is the caller graph for this function:

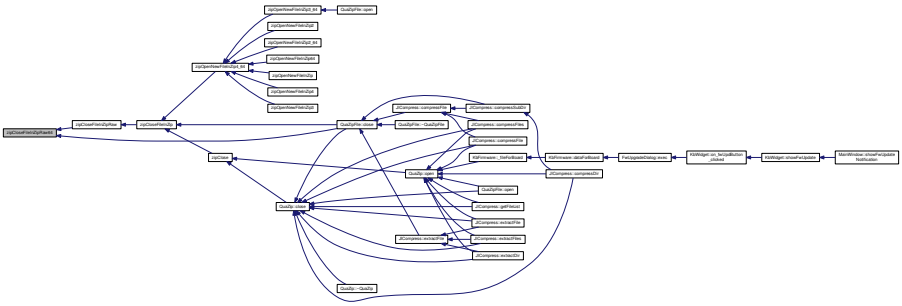

13.109.4.33 zipFile ZEXPORT zipOpen (voidpf *file*, int *append*)

Definition at line 967 of file zip.c.

References ZIP_DEFAULT_FLAGS, and zipOpen3().

```
968 {
969     return zipOpen3(file,append,NULL,NULL, ZIP_DEFAULT_FLAGS);
970 }
```

Here is the call graph for this function:

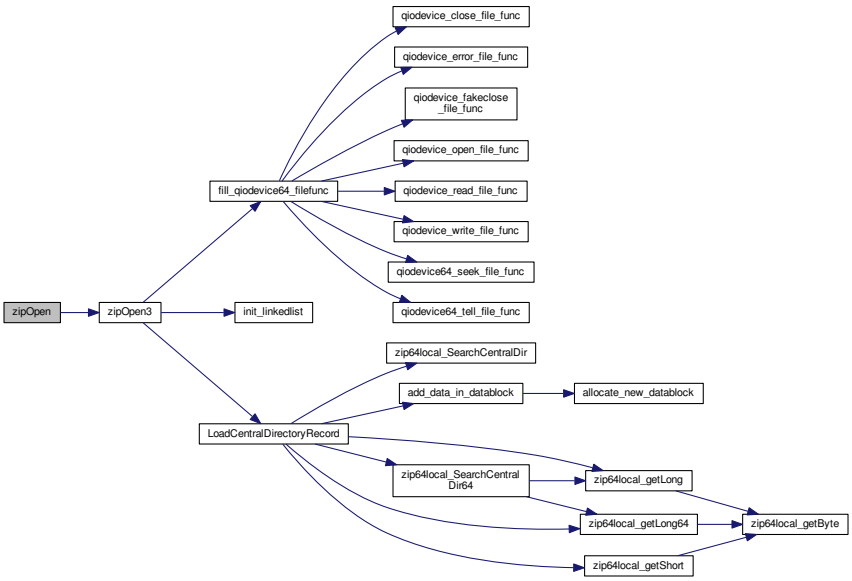

13.109.4.34 zipFile ZEXPORT zipOpen2 (voidpf *file*, int *append*, zipcharpc * *globalcomment*, zlib_filefunc_def * *pzlib_filefunc32_def*)

Definition at line 939 of file zip.c.

References fill_zlib_filefunc64_32_def_from_filefunc32(), ZIP_DEFAULT_FLAGS, and zipOpen3().

Referenced by QuaZip::open().

```
940 {
941     if (pzlib_filefunc32_def != NULL)
942     {
943         zlib_filefunc64_32_def zlib_filefunc64_32_def_fill;
944         fill_zlib_filefunc64_32_def_from_filefunc32(&
    zlib_filefunc64_32_def_fill,pzlib_filefunc32_def);
945         return zipOpen3(file, append, globalcomment, &zlib_filefunc64_32_def_fill,
    ZIP_DEFAULT_FLAGS);
946     }
947     else
948         return zipOpen3(file, append, globalcomment, NULL,
    ZIP_DEFAULT_FLAGS);
949 }
```

Here is the call graph for this function:

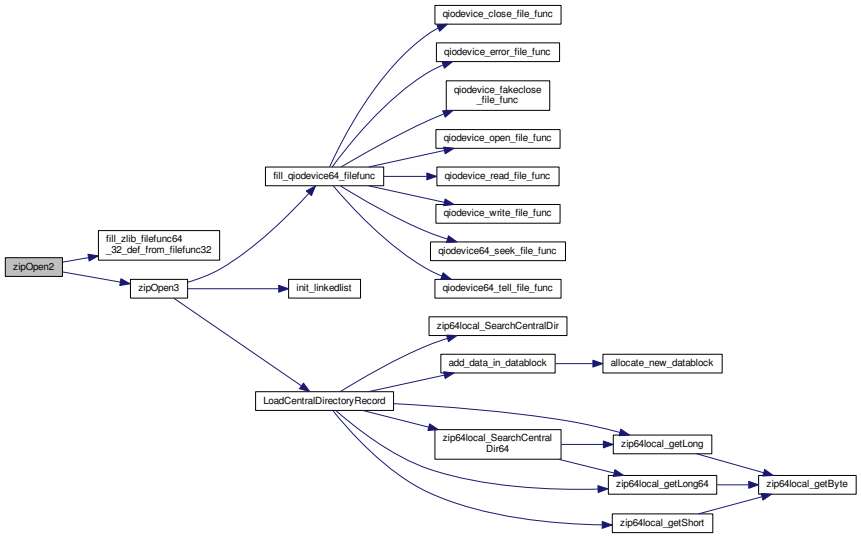

Here is the caller graph for this function:

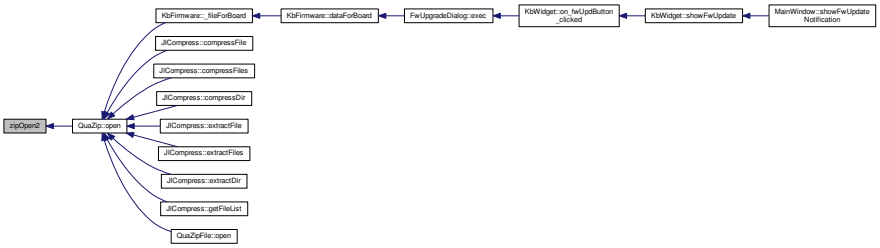

13.109.4.35 zipFile ZEXPORT zipOpen2_64 (voidpf *file*, int *append*, zipcharpc * *globalcomment*, zlib_filefunc64_def * *pzlib_filefunc_def*)

Definition at line 951 of file zip.c.

References zlib_filefunc64_32_def_s::zfile_func64, ZIP_DEFAULT_FLAGS, zipOpen3(), zlib_filefunc64_32_def_s::zseek32_file, and zlib_filefunc64_32_def_s::ztell32_file.

```
952 {
953     if (pzlib_filefunc_def != NULL)
954     {
```

```
955         zlib_filefunc64_32_def zlib_filefunc64_32_def_fill;
956         zlib_filefunc64_32_def_fill.zfile_func64 = *pzlib_filefunc_def;
957         zlib_filefunc64_32_def_fill.ztell32_file = NULL;
958         zlib_filefunc64_32_def_fill.zseek32_file = NULL;
959         return zipOpen3(file, append, globalcomment, &zlib_filefunc64_32_def_fill,
    ZIP_DEFAULT_FLAGS);
960     }
961     else
962         return zipOpen3(file, append, globalcomment, NULL,
    ZIP_DEFAULT_FLAGS);
963 }
```

Here is the call graph for this function:

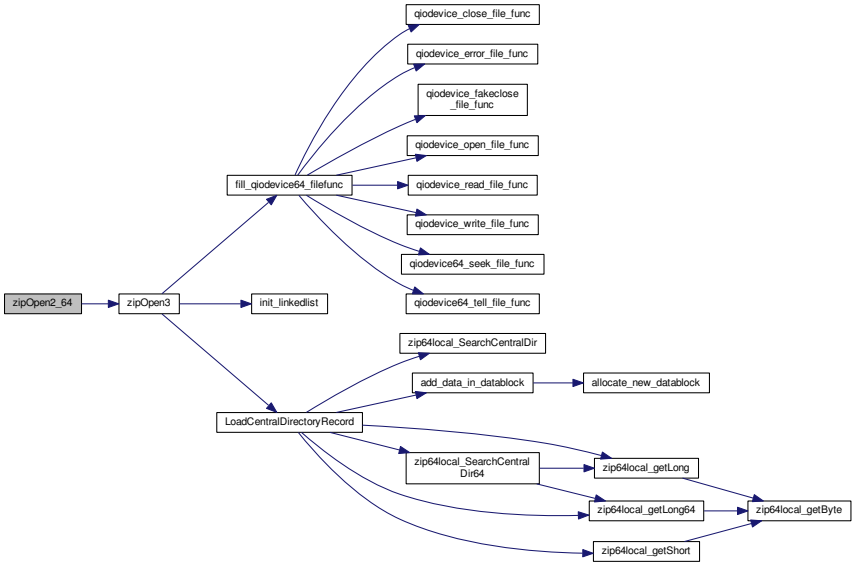

13.109.4.36 zipFile ZEXPORT zipOpen3 (voidpf *file*, int *append*, zipcharpc * *globalcomment*, zlib_filefunc64_32_def * *pzlib_filefunc64_32_def*, unsigned *flags*)

Definition at line 862 of file zip.c.

References zip64_internal::add_position_when_writting_offset, ALLOC, APPEND_STATUS_ADDINZIP, APPEND_STATUS_CREATE, APPEND_STATUS_CREATEAFTER, zip64_internal::begin_pos, zip64_internal::central_dir, zip64_internal::ci, zip64_internal::filestream, fill_qiodevice64_filefunc(), zip64_internal::flags, zip64_internal::globalcomment, zip64_internal::in_opened_file_inzip, init_linkedlist(), LoadCentralDirectoryRecord(), zip64_internal::number_entry, SEEK_END, curfile64_info::stream_initialised, TRYFREE, zip64_internal::z_filefunc, ZCLOSE64, ZFAKECLOSE64, zlib_filefunc64_32_def_s::zfile_func64, ZIP_AUTO_CLOSE, ZIP_OK, ZLIB_FILEFUNC_MODE_CREATE, ZLIB_FILEFUNC_MODE_EXISTING, ZLIB_FILEFUNC_MODE_READ, ZLIB_FILEFUNC_MODE_WRITE, ZOPEN64, zlib_filefunc64_32_def_s::zseek32_file, ZSEEK64, zlib_filefunc64_32_def_s::ztell32_file, and ZTELL64.

Referenced by QuaZip::open(), zipOpen(), zipOpen2(), zipOpen2_64(), and zipOpen64().

```
864 {
865     zip64_internal ziinit;
866     zip64_internal* zi;
867     int err=ZIP_OK;
868
869     ziinit.flags = flags;
870     ziinit.z_filefunc.zseek32_file = NULL;
871     ziinit.z_filefunc.ztell32_file = NULL;
872     if (pzlib_filefunc64_32_def==NULL)
873         fill_qiodevice64_filefunc(&ziinit.z_filefunc.
    zfile_func64);
```

```
874     else
875         ziinit.z_filefunc = *pzlib_filefunc64_32_def;
876
877     ziinit.filestream = ZOPEN64(ziinit.z_filefunc,
878                   file,
879                   (append == APPEND_STATUS_CREATE) ?
880                   (ZLIB_FILEFUNC_MODE_READ |
    ZLIB_FILEFUNC_MODE_WRITE | ZLIB_FILEFUNC_MODE_CREATE) :
881                     (ZLIB_FILEFUNC_MODE_READ |
    ZLIB_FILEFUNC_MODE_WRITE | ZLIB_FILEFUNC_MODE_EXISTING))
    ;
882
883     if (ziinit.filestream == NULL)
884         return NULL;
885
886     if (append == APPEND_STATUS_CREATEAFTER)
887         ZSEEK64(ziinit.z_filefunc,ziinit.filestream,0,
    SEEK_END);
888
889     ziinit.begin_pos = ZTELL64(ziinit.z_filefunc,ziinit.
    filestream);
890     ziinit.in_opened_file_inzip = 0;
891     ziinit.ci.stream_initialised = 0;
892     ziinit.number_entry = 0;
893     ziinit.add_position_when_writting_offset = 0;
894     init_linkedlist(&(ziinit.central_dir));
895
896
897
898     zi = (zip64_internal*)ALLOC(sizeof(zip64_internal));
899     if (zi==NULL)
900     {
901         if ((ziinit.flags & ZIP_AUTO_CLOSE) != 0) {
902             ZCLOSE64(ziinit.z_filefunc,ziinit.filestream);
903         } else {
904             ZFAKECLOSE64(ziinit.z_filefunc,ziinit.
    filestream);
905         }
906         return NULL;
907     }
908
909     /* now we add file in a zipfile */
910 #    ifndef NO_ADDFILEINEXISTINGZIP
911     ziinit.globalcomment = NULL;
912     if (append == APPEND_STATUS_ADDINZIP)
913     {
914       /* Read and Cache Central Directory Records */
915       err = LoadCentralDirectoryRecord(&ziinit);
916     }
917
918     if (globalcomment)
919     {
920       *globalcomment = ziinit.globalcomment;
921     }
922 #    endif /* !NO_ADDFILEINEXISTINGZIP*/
923
924     if (err != ZIP_OK)
925     {
926 #    ifndef NO_ADDFILEINEXISTINGZIP
927         TRYFREE(ziinit.globalcomment);
928 #    endif /* !NO_ADDFILEINEXISTINGZIP*/
929         TRYFREE(zi);
930         return NULL;
931     }
932     else
933     {
934         *zi = ziinit;
935         return (zipFile)zi;
936     }
937 }
```

Here is the call graph for this function:

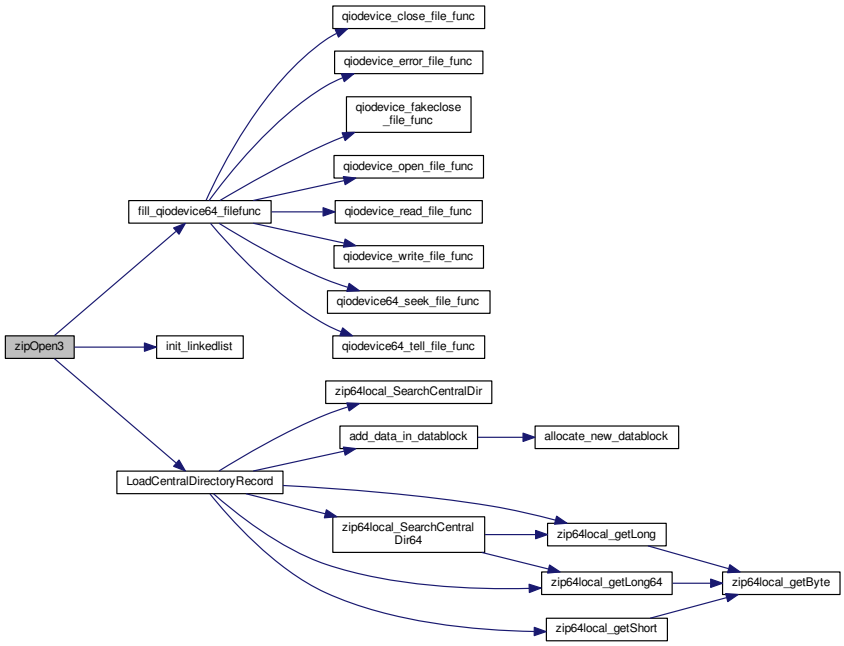

Here is the caller graph for this function:

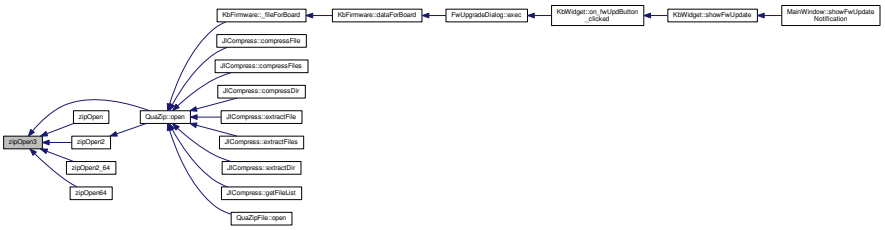

13.109.4.37 zipFile ZEXPORT zipOpen64 (voidpf *file,* int *append*)

Definition at line 972 of file zip.c.

References ZIP_DEFAULT_FLAGS, and zipOpen3().

```
973 {
974     return zipOpen3(file,append,NULL,NULL, ZIP_DEFAULT_FLAGS);
975 }
```

Here is the call graph for this function:

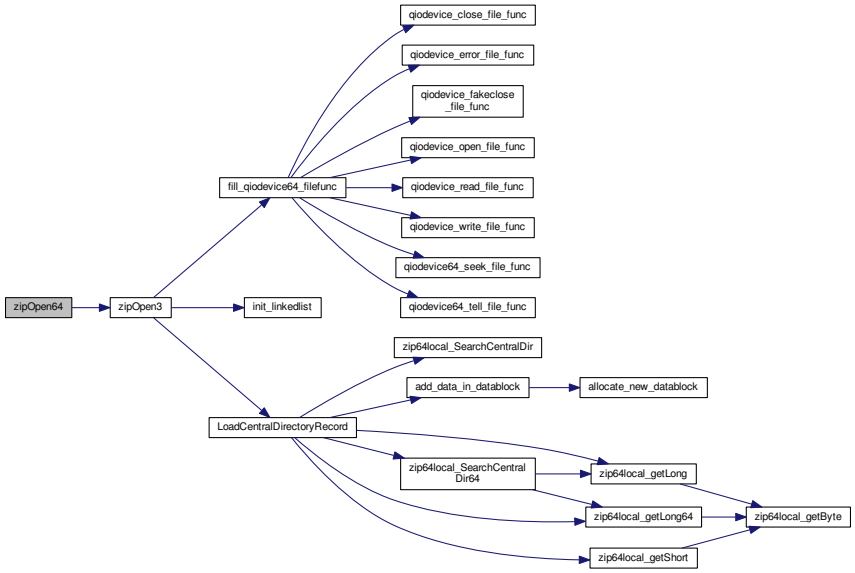

13.109.4.38 int ZEXPORT zipOpenNewFileInZip (zipFile *file*, const char * *filename*, const zip_fileinfo * *zipfi*, const void * *extrafield_local*, uInt *size_extrafield_local*, const void * *extrafield_global*, uInt *size_extrafield_global*, const char * *comment*, int *method*, int *level*)

Definition at line 1390 of file zip.c.

References DEF_MEM_LEVEL, VERSIONMADEBY, and zipOpenNewFileInZip4_64().

```
1394 {
1395     return zipOpenNewFileInZip4_64 (file, filename, zipfi,
1396                                     extrafield_local, size_extrafield_local,
1397                                     extrafield_global, size_extrafield_global,
1398                                     comment, method, level, 0,
1399                                     -MAX_WBITS, DEF_MEM_LEVEL, Z_DEFAULT_STRATEGY,
1400                                     NULL, 0, VERSIONMADEBY, 0, 0);
1401 }
```

Here is the call graph for this function:

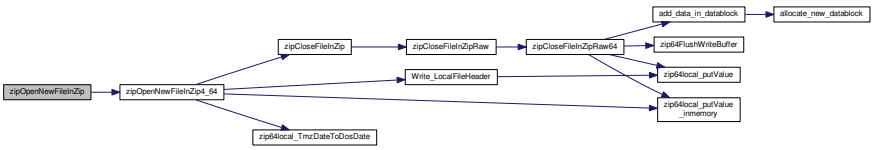

13.109.4.39 int ZEXPORT zipOpenNewFileInZip2 (zipFile *file*, const char * *filename*, const zip_fileinfo * *zipfi*, const void * *extrafield_local*, uInt *size_extrafield_local*, const void * *extrafield_global*, uInt *size_extrafield_global*, const char * *comment*, int *method*, int *level*, int *raw*)

Definition at line 1351 of file zip.c.

References DEF_MEM_LEVEL, VERSIONMADEBY, and zipOpenNewFileInZip4_64().

```
1355 {
1356     return zipOpenNewFileInZip4_64 (file, filename, zipfi,
1357                                     extrafield_local, size_extrafield_local,
1358                                     extrafield_global, size_extrafield_global,
1359                                     comment, method, level, raw,
1360                                     -MAX_WBITS, DEF_MEM_LEVEL, Z_DEFAULT_STRATEGY,
1361                                     NULL, 0, VERSIONMADEBY, 0, 0);
1362 }
```

Here is the call graph for this function:

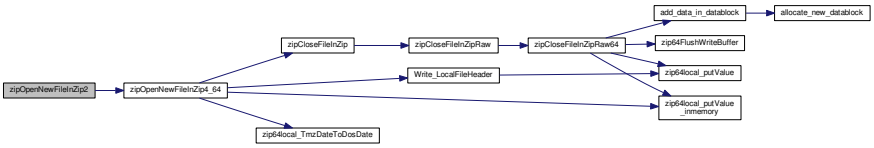

13.109.4.40 int ZEXPORT zipOpenNewFileInZip2_64 (zipFile *file*, const char * *filename*, const zip_fileinfo * *zipfi*, const void * *extrafield_local*, uInt *size_extrafield_local*, const void * *extrafield_global*, uInt *size_extrafield_global*, const char * *comment*, int *method*, int *level*, int *raw*, int *zip64*)

Definition at line 1364 of file zip.c.

References DEF_MEM_LEVEL, VERSIONMADEBY, and zipOpenNewFileInZip4_64().

```
1368 {
1369     return zipOpenNewFileInZip4_64 (file, filename, zipfi,
1370                                     extrafield_local, size_extrafield_local,
1371                                     extrafield_global, size_extrafield_global,
1372                                     comment, method, level, raw,
1373                                     -MAX_WBITS, DEF_MEM_LEVEL, Z_DEFAULT_STRATEGY,
1374                                     NULL, 0, VERSIONMADEBY, 0, zip64);
1375 }
```

Here is the call graph for this function:



13.109.4.41 int ZEXPORT zipOpenNewFileInZip3 (zipFile *file*, const char * *filename*, const zip_fileinfo * *zipfi*, const void * *extrafield_local*, uInt *size_extrafield_local*, const void * *extrafield_global*, uInt *size_extrafield_global*, const char * *comment*, int *method*, int *level*, int *raw*, int *windowBits*, int *memLevel*, int *strategy*, const char * *password*, uLong *crcForCrypting*)

Definition at line 1321 of file zip.c.

References VERSIONMADEBY, and zipOpenNewFileInZip4_64().

```
1327 {
1328     return zipOpenNewFileInZip4_64 (file, filename, zipfi,
1329                                     extrafield_local, size_extrafield_local,
1330                                     extrafield_global, size_extrafield_global,
1331                                     comment, method, level, raw,
1332                                     windowBits, memLevel, strategy,
1333                                     password, crcForCrypting, VERSIONMADEBY, 0, 0);
1334 }
```

Here is the call graph for this function:

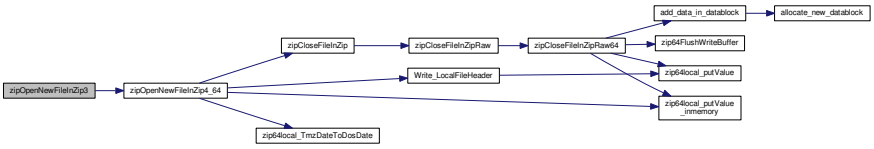

13.109.4.42 int ZEXPORT zipOpenNewFileInZip3_64 (zipFile *file*, const char * *filename*, const zip_fileinfo * *zipfi*, const void * *extrafield_local*, uInt *size_extrafield_local*, const void * *extrafield_global*, uInt *size_extrafield_global*, const char * *comment*, int *method*, int *level*, int *raw*, int *windowBits*, int *memLevel*, int *strategy*, const char * *password*, uLong *crcForCrypting*, int *zip64*)

Definition at line 1336 of file zip.c.

References VERSIONMADEBY, and zipOpenNewFileInZip4_64().

Referenced by QuaZipFile::open().

```
1342 {
1343     return zipOpenNewFileInZip4_64 (file, filename, zipfi,
1344                                     extrafield_local, size_extrafield_local,
1345                                     extrafield_global, size_extrafield_global,
1346                                     comment, method, level, raw,
1347                                     windowBits, memLevel, strategy,
1348                                     password, crcForCrypting, VERSIONMADEBY, 0, zip64);
1349 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

13.109.4.43 int ZEXPORT zipOpenNewFileInZip4 (zipFile *file*, const char * *filename*, const zip_fileinfo * *zipfi*, const void * *extrafield_local*, uInt *size_extrafield_local*, const void * *extrafield_global*, uInt *size_extrafield_global*, const char * *comment*, int *method*, int *level*, int *raw*, int *windowBits*, int *memLevel*, int *strategy*, const char * *password*, uLong *crcForCrypting*, uLong *versionMadeBy*, uLong *flagBase*)

Definition at line 1305 of file zip.c.

References zipOpenNewFileInZip4_64().

```
1312 {
1313     return zipOpenNewFileInZip4_64 (file, filename, zipfi,
1314                                     extrafield_local, size_extrafield_local,
1315                                     extrafield_global, size_extrafield_global,
1316                                     comment, method, level, raw,
1317                                     windowBits, memLevel, strategy,
1318                                     password, crcForCrypting, versionMadeBy, flagBase, 0);
1319 }
```

Here is the call graph for this function:



13.109.4.44 int ZEXPORT zipOpenNewFileInZip4_64 (zipFile *file*, const char * *filename*, const zip_fileinfo * *zipfi*, const void * *extrafield_local*, uInt *size_extrafield_local*, const void * *extrafield_global*, uInt *size_extrafield_global*, const char * *comment*, int *method*, int *level*, int *raw*, int *windowBits*, int *memLevel*, int *strategy*, const char * *password*, uLong *crcForCrypting*, uLong *versionMadeBy*, uLong *flagBase*, int *zip64*)

Definition at line 1077 of file zip.c.

References zip64_internal::add_position_when_writting_offset, ALLOC, curfile64_info::buffered_data, curfile64_info::central_header, CENTRALHEADERMAGIC, zip64_internal::ci, curfile64_info::crc32, curfile64_info::crypt_header_size, zip_fileinfo::dosDate, curfile64_info::dosDate, curfile64_info::encrypt, zip_fileinfo::external_fa, zip64_internal::filestream, curfile64_info::flag, zip64_internal::flags, zip64_internal::in_opened_file_inzip, zip_fileinfo::internal_fa, curfile64_info::keys, curfile64_info::method, curfile64_info::pcrc_32_tab, curfile64_info::pos_in_buffered_data, curfile64_info::pos_local_header, curfile64_info::pos_zip64extrainfo, curfile64_info::raw, curfile64_info::size_centralExtra, curfile64_info::size_centralExtraFree, curfile64_info::size_centralheader, SIZECENTRALHEADER, curfile64_info::stream, curfile64_info::stream_initialised, zip_fileinfo::tmz_date, curfile64_info::totalCompressedData, curfile64_info::totalUncompressedData, Write_LocalFileHeader(), Z_BUFSIZE, Z_BZIP2ED, zip64_internal::z_filefunc, curfile64_info::zip64, zip64local_putValue_inmemory(), zip64local_TmzDateToDosDate(), ZIP_ERRNO, ZIP_INTERNALERROR, ZIP_OK, ZIP_PARAMERROR, ZIP_SEQUENTIAL, ZIP_WRITE_DATA_DESCRIPTOR, zipCloseFileInZip(), ZTELL64, and ZWRITE64.

Referenced by zipOpenNewFileInZip(), zipOpenNewFileInZip2(), zipOpenNewFileInZip2_64(), zipOpenNewFileInZip3(), zipOpenNewFileInZip3_64(), zipOpenNewFileInZip4(), and zipOpenNewFileInZip64().

```
1084 {
1085     zip64_internal* zi;
1086     uInt size_filename;
1087     uInt size_comment;
1088     uInt i;
1089     int err = ZIP_OK;
1090     uLong version_to_extract;
1091
1092 #    ifdef NOCRYPT
1093     if (password != NULL)
1094         return ZIP_PARAMERROR;
1095 #    endif
1096
1097     if (file == NULL)
1098         return ZIP_PARAMERROR;
1099
1100 #ifdef HAVE_BZIP2
1101     if ((method!=0) && (method!=Z_DEFLATED) && (method!=Z_BZIP2ED))
1102       return ZIP_PARAMERROR;
1103 #else
1104     if ((method!=0) && (method!=Z_DEFLATED))
1105       return ZIP_PARAMERROR;
1106 #endif
```

```
1107
1108      zi = (zip64_internal*)file;
1109
1110      if (zi->in_opened_file_inzip == 1)
1111      {
1112          err = zipCloseFileInZip (file);
1113          if (err != ZIP_OK)
1114              return err;
1115      }
1116
1117      if (method == 0
1118              && (level == 0 || (zi->flags & ZIP_WRITE_DATA_DESCRIPTOR) == 0)
1119              && (zi->flags & ZIP_SEQUENTIAL) == 0)
1120      {
1121          version_to_extract = 10;
1122      }
1123      else
1124      {
1125          version_to_extract = 20;
1126      }
1127
1128      if (filename==NULL)
1129          filename="-";
1130
1131      if (comment==NULL)
1132          size_comment = 0;
1133      else
1134          size_comment = (uInt)strlen(comment);
1135
1136      size_filename = (uInt)strlen(filename);
1137
1138      if (zipfi == NULL)
1139          zi->ci.dosDate = 0;
1140      else
1141      {
1142          if (zipfi->dosDate != 0)
1143              zi->ci.dosDate = zipfi->dosDate;
1144          else
1145            zi->ci.dosDate = zip64local_TmzDateToDosDate(&zipfi->
      tmz_date);
1146      }
1147
1148      zi->ci.flag = flagBase;
1149      if ((level==8) || (level==9))
1150        zi->ci.flag |= 2;
1151      if (level==2)
1152        zi->ci.flag |= 4;
1153      if (level==1)
1154        zi->ci.flag |= 6;
1155      if (password != NULL)
1156        zi->ci.flag |= 1;
1157      if (version_to_extract >= 20
1158              && ((zi->flags & ZIP_WRITE_DATA_DESCRIPTOR) != 0
1159                  || (zi->flags & ZIP_SEQUENTIAL) != 0))
1160        zi->ci.flag |= 8;
1161
1162      zi->ci.crc32 = 0;
1163      zi->ci.method = method;
1164      zi->ci.encrypt = 0;
1165      zi->ci.stream_initialised = 0;
1166      zi->ci.pos_in_buffered_data = 0;
1167      zi->ci.raw = raw;
1168      zi->ci.pos_local_header = ZTELL64(zi->z_filefunc,zi->
      filestream);
1169
1170      zi->ci.size_centralheader = SIZECENTRALHEADER + size_filename +
      size_extrafield_global + size_comment;
1171      zi->ci.size_centralExtraFree = 32; /* Extra space we have reserved in case we
       need to add ZIP64 extra info data */
1172
1173      zi->ci.central_header = (char*)ALLOC((uInt)zi->ci.
      size_centralheader + zi->ci.size_centralExtraFree);
1174
1175      zi->ci.size_centralExtra = size_extrafield_global;
1176      zip64local_putValue_inmemory(zi->ci.
      central_header,(uLong)CENTRALHEADERMAGIC,4);
1177      /* version info */
1178      zip64local_putValue_inmemory(zi->ci.
      central_header+4,(uLong)versionMadeBy,2);
1179      zip64local_putValue_inmemory(zi->ci.
      central_header+6,(uLong)version_to_extract,2);
1180      zip64local_putValue_inmemory(zi->ci.
      central_header+8,(uLong)zi->ci.flag,2);
1181      zip64local_putValue_inmemory(zi->ci.
      central_header+10,(uLong)zi->ci.method,2);
1182      zip64local_putValue_inmemory(zi->ci.
      central_header+12,(uLong)zi->ci.dosDate,4);
```

```
1183     zip64local_putValue_inmemory(zi->ci.
     central_header+16,(uLong)0,4); /*crc*/
1184     zip64local_putValue_inmemory(zi->ci.
     central_header+20,(uLong)0,4); /*compr size*/
1185     zip64local_putValue_inmemory(zi->ci.
     central_header+24,(uLong)0,4); /*uncompr size*/
1186     zip64local_putValue_inmemory(zi->ci.
     central_header+28,(uLong)size_filename,2);
1187     zip64local_putValue_inmemory(zi->ci.
     central_header+30,(uLong)size_extrafield_global,2);
1188     zip64local_putValue_inmemory(zi->ci.
     central_header+32,(uLong)size_comment,2);
1189     zip64local_putValue_inmemory(zi->ci.
     central_header+34,(uLong)0,2); /*disk nm start*/
1190
1191     if (zipfi==NULL)
1192         zip64local_putValue_inmemory(zi->ci.
     central_header+36,(uLong)0,2);
1193     else
1194         zip64local_putValue_inmemory(zi->ci.
     central_header+36,(uLong)zipfi->internal_fa,2);
1195
1196     if (zipfi==NULL)
1197         zip64local_putValue_inmemory(zi->ci.
     central_header+38,(uLong)0,4);
1198     else
1199         zip64local_putValue_inmemory(zi->ci.
     central_header+38,(uLong)zipfi->external_fa,4);
1200
1201     if(zi->ci.pos_local_header >= 0xffffffff)
1202       zip64local_putValue_inmemory(zi->ci.
     central_header+42,(uLong)0xffffffff,4);
1203     else
1204       zip64local_putValue_inmemory(zi->ci.
     central_header+42,(uLong)zi->ci.pos_local_header - zi->
     add_position_when_writting_offset,4);
1205
1206     for (i=0;i<size_filename;i++)
1207         *(zi->ci.central_header+SIZECENTRALHEADER+i) = *(filename+i);
1208
1209     for (i=0;i<size_extrafield_global;i++)
1210         *(zi->ci.central_header+SIZECENTRALHEADER+size_filename+i) =
1211               *(((const char*)extrafield_global)+i);
1212
1213     for (i=0;i<size_comment;i++)
1214         *(zi->ci.central_header+SIZECENTRALHEADER+size_filename+
1215               size_extrafield_global+i) = *(comment+i);
1216     if (zi->ci.central_header == NULL)
1217         return ZIP_INTERNALERROR;
1218
1219     zi->ci.zip64 = zip64;
1220     zi->ci.totalCompressedData = 0;
1221     zi->ci.totalUncompressedData = 0;
1222     zi->ci.pos_zip64extrainfo = 0;
1223
1224     err = Write_LocalFileHeader(zi, filename, size_extrafield_local,
1225                                 extrafield_local, version_to_extract);
1226
1227 #ifdef HAVE_BZIP2
1228     zi->ci.bstream.avail_in = (uInt)0;
1229     zi->ci.bstream.avail_out = (uInt)Z_BUFSIZE;
1230     zi->ci.bstream.next_out = (char*)zi->ci.buffered_data;
1231     zi->ci.bstream.total_in_hi32 = 0;
1232     zi->ci.bstream.total_in_lo32 = 0;
1233     zi->ci.bstream.total_out_hi32 = 0;
1234     zi->ci.bstream.total_out_lo32 = 0;
1235 #endif
1236
1237     zi->ci.stream.avail_in = (uInt)0;
1238     zi->ci.stream.avail_out = (uInt)Z_BUFSIZE;
1239     zi->ci.stream.next_out = zi->ci.buffered_data;
1240     zi->ci.stream.total_in = 0;
1241     zi->ci.stream.total_out = 0;
1242     zi->ci.stream.data_type = Z_BINARY;
1243
1244 #ifdef HAVE_BZIP2
1245     if ((err==ZIP_OK) && (zi->ci.method == Z_DEFLATED || zi->ci.
     method == Z_BZIP2ED) && (!zi->ci.raw))
1246 #else
1247     if ((err==ZIP_OK) && (zi->ci.method == Z_DEFLATED) && (!zi->ci.
     raw))
1248 #endif
1249     {
1250         if(zi->ci.method == Z_DEFLATED)
1251         {
1252           zi->ci.stream.zalloc = (alloc_func)0;
1253           zi->ci.stream.zfree = (free_func)0;
```

```
1254           zi->ci.stream.opaque = (voidpf)0;
1255
1256           if (windowBits>0)
1257               windowBits = -windowBits;
1258
1259           err = deflateInit2(&zi->ci.stream, level, Z_DEFLATED, windowBits, memLevel, strategy);
1260
1261           if (err==Z_OK)
1262               zi->ci.stream_initialised = Z_DEFLATED;
1263         }
1264         else if(zi->ci.method == Z_BZIP2ED)
1265         {
1266 #ifdef HAVE_BZIP2
1267             /* Init BZip stuff here */
1268           zi->ci.bstream.bzalloc = 0;
1269           zi->ci.bstream.bzfree = 0;
1270           zi->ci.bstream.opaque = (voidpf)0;
1271
1272           err = BZ2_bzCompressInit(&zi->ci.bstream, level, 0,35);
1273           if(err == BZ_OK)
1274             zi->ci.stream_initialised = Z_BZIP2ED;
1275 #endif
1276         }
1277
1278     }
1279
1280 #    ifndef NOCRYPT
1281     zi->ci.crypt_header_size = 0;
1282     if ((err==Z_OK) && (password != NULL))
1283     {
1284         unsigned char bufHead[RAND_HEAD_LEN];
1285         unsigned int sizeHead;
1286         zi->ci.encrypt = 1;
1287         zi->ci.pcrc_32_tab = get_crc_table();
1288         /*init_keys(password,zi->ci.keys,zi->ci.pcrc_32_tab);*/
1289         if (crcForCrypting == 0) {
1290             crcForCrypting = (uLong)zi->ci.dosDate << 16; /* ATTANTION! Without this row, you
     don't unpack your password protected archive in other app. */
1291         }
1292         sizeHead=crypthead(password,bufHead,RAND_HEAD_LEN,zi->ci.keys,zi->
      ci.pcrc_32_tab,crcForCrypting);
1293         zi->ci.crypt_header_size = sizeHead;
1294
1295         if (ZWRITE64(zi->z_filefunc,zi->filestream,bufHead,sizeHead) !=
     sizeHead)
1296                 err = ZIP_ERRNO;
1297     }
1298 #    endif
1299
1300     if (err==Z_OK)
1301         zi->in_opened_file_inzip = 1;
1302     return err;
1303 }
```

Here is the call graph for this function:

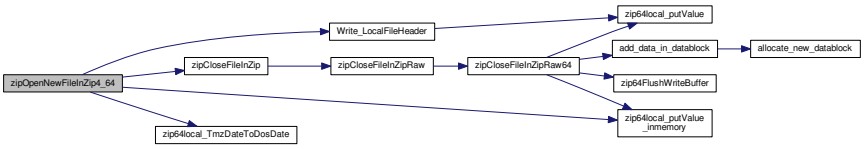

Here is the caller graph for this function:

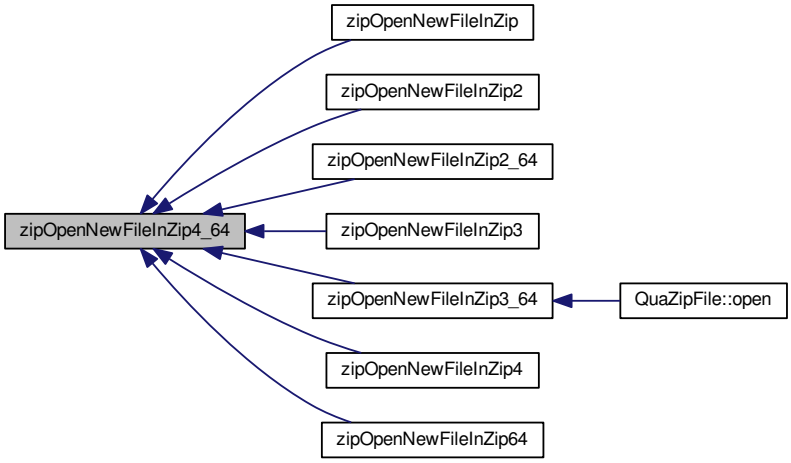

13.109.4.45 int ZEXPORT zipOpenNewFileInZip64 (zipFile *file*, const char * *filename*, const zip_fileinfo * *zipfi*, const void * *extrafield_local*, uInt *size_extrafield_local*, const void * *extrafield_global*, uInt *size_extrafield_global*, const char * *comment*, int *method*, int *level*, int *zip64*)

Definition at line 1377 of file zip.c.

References DEF_MEM_LEVEL, VERSIONMADEBY, and zipOpenNewFileInZip4_64().

```
1381 {
1382     return zipOpenNewFileInZip4_64 (file, filename, zipfi,
1383                                     extrafield_local, size_extrafield_local,
1384                                     extrafield_global, size_extrafield_global,
1385                                     comment, method, level, 0,
1386                                     -MAX_WBITS, DEF_MEM_LEVEL, Z_DEFAULT_STRATEGY,
1387                                     NULL, 0, VERSIONMADEBY, 0, zip64);
1388 }
```

Here is the call graph for this function:



13.109.4.46 int ZEXPORT zipRemoveExtraInfoBlock (char * *pData*, int * *dataLen*, short *sHeader*)

Definition at line 2019 of file zip.c.

References ALLOC, TRYFREE, ZIP_ERRNO, ZIP_OK, and ZIP_PARAMERROR.

```
2020 {
2021   char* p = pData;
2022   int size = 0;
```

```
2023   char* pNewHeader;
2024   char* pTmp;
2025   short header;
2026   short dataSize;
2027
2028   int retVal = ZIP_OK;
2029
2030   if(pData == NULL || *dataLen < 4)
2031     return ZIP_PARAMERROR;
2032
2033   pNewHeader = (char*)ALLOC(*dataLen);
2034   pTmp = pNewHeader;
2035
2036   while(p < (pData + *dataLen))
2037   {
2038     header = *(short*)p;
2039     dataSize = *(((short*)p)+1);
2040
2041     if( header == sHeader ) /* Header found. */
2042     {
2043       p += dataSize + 4; /* skip it. do not copy to temp buffer */
2044     }
2045     else
2046     {
2047       /* Extra Info block should not be removed, So copy it to the temp buffer. */
2048       memcpy(pTmp, p, dataSize + 4);
2049       p += dataSize + 4;
2050       size += dataSize + 4;
2051     }
2052
2053   }
2054
2055   if(size < *dataLen)
2056   {
2057     /* clean old extra info block. */
2058     memset(pData,0, *dataLen);
2059
2060     /* copy the new extra info block over the old */
2061     if(size > 0)
2062       memcpy(pData, pNewHeader, size);
2063
2064     /* set the new extra info size */
2065     *dataLen = size;
2066
2067     retVal = ZIP_OK;
2068   }
2069   else
2070     retVal = ZIP_ERRNO;
2071
2072   TRYFREE(pNewHeader);
2073
2074   return retVal;
2075 }
```

13.109.4.47 int ZEXPORT zipSetFlags (zipFile *file*, unsigned *flags*)

Definition at line 2077 of file zip.c.

References zip64_internal::flags, ZIP_OK, ZIP_PARAMERROR, ZIP_SEQUENTIAL, and ZIP_WRITE_DATA_DESCRIPTOR.

Referenced by QuaZip::open(), and QuaZipFile::open().

```
2078 {
2079     zip64_internal* zi;
2080     if (file == NULL)
2081         return ZIP_PARAMERROR;
2082     zi = (zip64_internal*)file;
2083     zi->flags |= flags;
2084     // If the output is non-seekable, the data descriptor is needed.
2085     if ((zi->flags & ZIP_SEQUENTIAL) != 0) {
2086         zi->flags |= ZIP_WRITE_DATA_DESCRIPTOR;
2087     }
2088     return ZIP_OK;
2089 }
```

Here is the caller graph for this function:

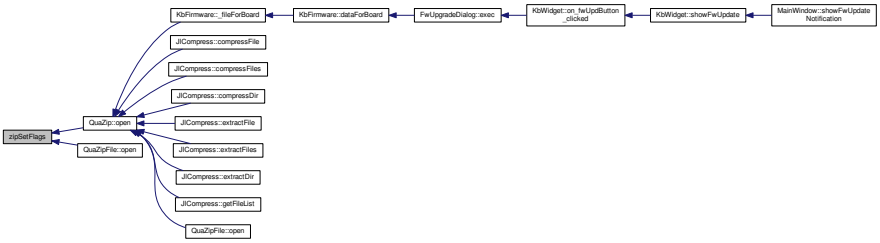

13.109.4.48 int ZEXPORT zipWriteInFileInZip (zipFile *file*, const void * *buf*, unsigned int *len*)

Definition at line 1442 of file zip.c.

References curfile64_info::buffered_data, zip64_internal::ci, curfile64_info::crc32, zip64_internal::in_opened_file_inzip, curfile64_info::method, curfile64_info::pos_in_buffered_data, curfile64_info::raw, curfile64_info::stream, Z_BUFSIZE, Z_BZIP2ED, zip64FlushWriteBuffer(), ZIP_ERRNO, ZIP_OK, and ZIP_PARAMERROR.

Referenced by QuaZipFile::writeData().

```
1443 {
1444     zip64_internal* zi;
1445     int err=ZIP_OK;
1446
1447     if (file == NULL)
1448         return ZIP_PARAMERROR;
1449     zi = (zip64_internal*)file;
1450
1451     if (zi->in_opened_file_inzip == 0)
1452         return ZIP_PARAMERROR;
1453
1454     zi->ci.crc32 = crc32(zi->ci.crc32,buf,(uInt)len);
1455
1456 #ifdef HAVE_BZIP2
1457     if(zi->ci.method == Z_BZIP2ED && (!zi->ci.raw))
1458     {
1459       zi->ci.bstream.next_in = (void*)buf;
1460       zi->ci.bstream.avail_in = len;
1461       err = BZ_RUN_OK;
1462
1463       while ((err==BZ_RUN_OK) && (zi->ci.bstream.avail_in>0))
1464       {
1465         if (zi->ci.bstream.avail_out == 0)
1466         {
1467           if (zip64FlushWriteBuffer(zi) == ZIP_ERRNO)
1468             err = ZIP_ERRNO;
1469           zi->ci.bstream.avail_out = (uInt)Z_BUFSIZE;
1470           zi->ci.bstream.next_out = (char*)zi->ci.buffered_data;
1471         }
1472
1473
1474         if(err != BZ_RUN_OK)
1475           break;
1476
1477         if ((zi->ci.method == Z_BZIP2ED) && (!zi->ci.raw))
1478         {
1479           uLong uTotalOutBefore_lo = zi->ci.bstream.total_out_lo32;
1480 /*          uLong uTotalOutBefore_hi = zi->ci.bstream.total_out_hi32; */
1481           err=BZ2_bzCompress(&zi->ci.bstream,  BZ_RUN);
1482
1483           zi->ci.pos_in_buffered_data += (uInt)(zi->ci.bstream.total_out_lo32 -
     uTotalOutBefore_lo) ;
1484         }
1485       }
1486
1487       if(err == BZ_RUN_OK)
1488         err = ZIP_OK;
1489     }
1490     else
1491 #endif
1492     {
1493       zi->ci.stream.next_in = (Bytef*)buf;
```

```
1494        zi->ci.stream.avail_in = len;
1495
1496        while ((err==ZIP_OK) && (zi->ci.stream.avail_in>0))
1497        {
1498            if (zi->ci.stream.avail_out == 0)
1499            {
1500                if (zip64FlushWriteBuffer(zi) == ZIP_ERRNO)
1501                    err = ZIP_ERRNO;
1502                zi->ci.stream.avail_out = (uInt)Z_BUFSIZE;
1503                zi->ci.stream.next_out = zi->ci.buffered_data;
1504            }
1505
1506
1507            if(err != ZIP_OK)
1508                break;
1509
1510            if ((zi->ci.method == Z_DEFLATED) && (!zi->ci.raw))
1511            {
1512                uLong uTotalOutBefore = zi->ci.stream.total_out;
1513                err=deflate(&zi->ci.stream,  Z_NO_FLUSH);
1514                if(uTotalOutBefore > zi->ci.stream.total_out)
1515                {
1516                  int bBreak = 0;
1517                  bBreak++;
1518                }
1519
1520                zi->ci.pos_in_buffered_data += (uInt)(zi->ci.
    stream.total_out - uTotalOutBefore) ;
1521            }
1522            else
1523            {
1524                uInt copy_this,i;
1525                if (zi->ci.stream.avail_in < zi->ci.stream.avail_out)
1526                    copy_this = zi->ci.stream.avail_in;
1527                else
1528                    copy_this = zi->ci.stream.avail_out;
1529
1530                for (i = 0; i < copy_this; i++)
1531                    *(((char*)zi->ci.stream.next_out)+i) =
1532                        *(((const char*)zi->ci.stream.next_in)+i);
1533                {
1534                    zi->ci.stream.avail_in -= copy_this;
1535                    zi->ci.stream.avail_out-= copy_this;
1536                    zi->ci.stream.next_in+= copy_this;
1537                    zi->ci.stream.next_out+= copy_this;
1538                    zi->ci.stream.total_in+= copy_this;
1539                    zi->ci.stream.total_out+= copy_this;
1540                    zi->ci.pos_in_buffered_data += copy_this;
1541                }
1542            }
1543        }/* while(...) */
1544    }
1545
1546    return err;
1547 }
```

Here is the call graph for this function:



Here is the caller graph for this function:

13.109.5 Variable Documentation

13.109.5.1 const char zip_copyright[ ] =" zip 1.01 Copyright 1998-2004 Gilles Vollant - http://www.winimage.com/zLibDll"

Definition at line 104 of file zip.c.

13.110 src/ckb/quazip/zip.h File Reference

```
#include "zlib.h"
#include "ioapi.h"
```

Include dependency graph for zip.h:

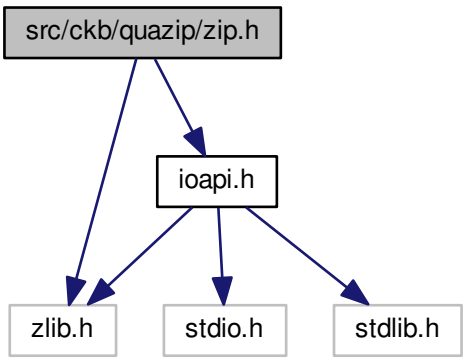

This graph shows which files directly or indirectly include this file:

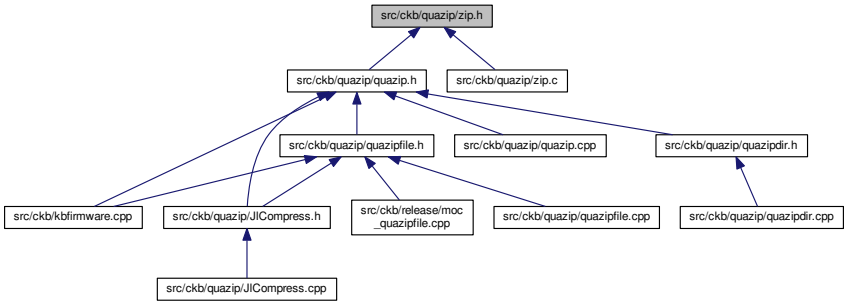

Data Structures

- struct tm_zip_s
- struct zip_fileinfo

Macros

- #define Z_BZIP2ED 12
- #define ZIP_OK (0)
- #define ZIP_EOF (0)
- #define ZIP_ERRNO (Z_ERRNO)
- #define ZIP_PARAMERROR (-102)
- #define ZIP_BADZIPFILE (-103)
- #define ZIP_INTERNALERROR (-104)
- #define ZIP_WRITE_DATA_DESCRIPTOR 0x8u
- #define ZIP_AUTO_CLOSE 0x1u
- #define ZIP_SEQUENTIAL 0x2u
- #define ZIP_DEFAULT_FLAGS (ZIP_AUTO_CLOSE | ZIP_WRITE_DATA_DESCRIPTOR)
- #define DEF_MEM_LEVEL MAX_MEM_LEVEL
- #define APPEND_STATUS_CREATE (0)
- #define APPEND_STATUS_CREATEAFTER (1)
- #define APPEND_STATUS_ADDINZIP (2)

Typedefs

- typedef voidp zipFile
- typedef struct tm_zip_s tm_zip
- typedef const char * zipcharpc

Functions

- zipFile ZEXPORT zipOpen _Z_OF ((voidpf file, int append))
- zipFile ZEXPORT zipOpen2 _Z_OF ((voidpf file, int append, zipcharpc *globalcomment, zlib_filefunc_def *pzlib_filefunc_def))
- zipFile ZEXPORT zipOpen2_64 _Z_OF ((voidpf file, int append, zipcharpc *globalcomment, zlib_filefunc64_def *pzlib_filefunc_def))
- zipFile ZEXPORT zipOpen3 (voidpf file, int append, zipcharpc *globalcomment, zlib_filefunc64_32_def *pzlib_filefunc64_32_def, unsigned flags)

- int ZEXPORT zipOpenNewFileInZip _Z_OF ((zipFile file, const char ∗filename, const zip_fileinfo ∗zipfi, const void ∗extrafield_local, uInt size_extrafield_local, const void ∗extrafield_global, uInt size_extrafield_global, const char ∗comment, int method, int level))
- int ZEXPORT zipOpenNewFileInZip64 _Z_OF ((zipFile file, const char ∗filename, const zip_fileinfo ∗zipfi, const void ∗extrafield_local, uInt size_extrafield_local, const void ∗extrafield_global, uInt size_extrafield_global, const char ∗comment, int method, int level, int zip64))
- int ZEXPORT zipOpenNewFileInZip2 _Z_OF ((zipFile file, const char ∗filename, const zip_fileinfo ∗zipfi, const void ∗extrafield_local, uInt size_extrafield_local, const void ∗extrafield_global, uInt size_extrafield_global, const char ∗comment, int method, int level, int raw))
- int ZEXPORT zipOpenNewFileInZip2_64 _Z_OF ((zipFile file, const char ∗filename, const zip_fileinfo ∗zipfi, const void ∗extrafield_local, uInt size_extrafield_local, const void ∗extrafield_global, uInt size_extrafield_global, const char ∗comment, int method, int level, int raw, int zip64))
- int ZEXPORT zipOpenNewFileInZip3 _Z_OF ((zipFile file, const char ∗filename, const zip_fileinfo ∗zipfi, const void ∗extrafield_local, uInt size_extrafield_local, const void ∗extrafield_global, uInt size_extrafield_global, const char ∗comment, int method, int level, int raw, int windowBits, int memLevel, int strategy, const char ∗password, uLong crcForCrypting))
- int ZEXPORT zipOpenNewFileInZip3_64 _Z_OF ((zipFile file, const char ∗filename, const zip_fileinfo ∗zipfi, const void ∗extrafield_local, uInt size_extrafield_local, const void ∗extrafield_global, uInt size_extrafield_global, const char ∗comment, int method, int level, int raw, int windowBits, int memLevel, int strategy, const char ∗password, uLong crcForCrypting, int zip64))
- int ZEXPORT zipOpenNewFileInZip4 _Z_OF ((zipFile file, const char ∗filename, const zip_fileinfo ∗zipfi, const void ∗extrafield_local, uInt size_extrafield_local, const void ∗extrafield_global, uInt size_extrafield_global, const char ∗comment, int method, int level, int raw, int windowBits, int memLevel, int strategy, const char ∗password, uLong crcForCrypting, uLong versionMadeBy, uLong flagBase))
- int ZEXPORT zipOpenNewFileInZip4_64 _Z_OF ((zipFile file, const char ∗filename, const zip_fileinfo ∗zipfi, const void ∗extrafield_local, uInt size_extrafield_local, const void ∗extrafield_global, uInt size_extrafield_global, const char ∗comment, int method, int level, int raw, int windowBits, int memLevel, int strategy, const char ∗password, uLong crcForCrypting, uLong versionMadeBy, uLong flagBase, int zip64))
- int ZEXPORT zipWriteInFileInZip _Z_OF ((zipFile file, const void ∗buf, unsigned len))
- int ZEXPORT zipCloseFileInZip _Z_OF ((zipFile file))
- int ZEXPORT zipCloseFileInZipRaw _Z_OF ((zipFile file, uLong uncompressed_size, uLong crc32))
- int ZEXPORT zipCloseFileInZipRaw64 _Z_OF ((zipFile file, ZPOS64_T uncompressed_size, uLong crc32))
- int ZEXPORT zipClose _Z_OF ((zipFile file, const char ∗global_comment))
- int ZEXPORT zipRemoveExtraInfoBlock _Z_OF ((char ∗pData, int ∗dataLen, short sHeader))
- int ZEXPORT zipSetFlags (zipFile file, unsigned flags)
- int ZEXPORT zipClearFlags (zipFile file, unsigned flags)

13.110.1 Data Structure Documentation

13.110.1.1 struct tm_zip_s

Definition at line 100 of file zip.h.

Collaboration diagram for tm_zip_s:

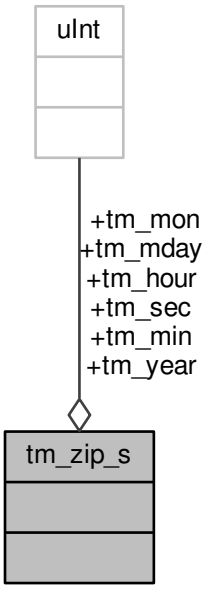

Data Fields

uInt	tm_hour	
uInt	tm_mday	
uInt	tm_min	
uInt	tm_mon	
uInt	tm_sec	
uInt	tm_year	

13.110.1.2 struct zip_fileinfo

Definition at line 110 of file zip.h.

Collaboration diagram for zip_fileinfo:

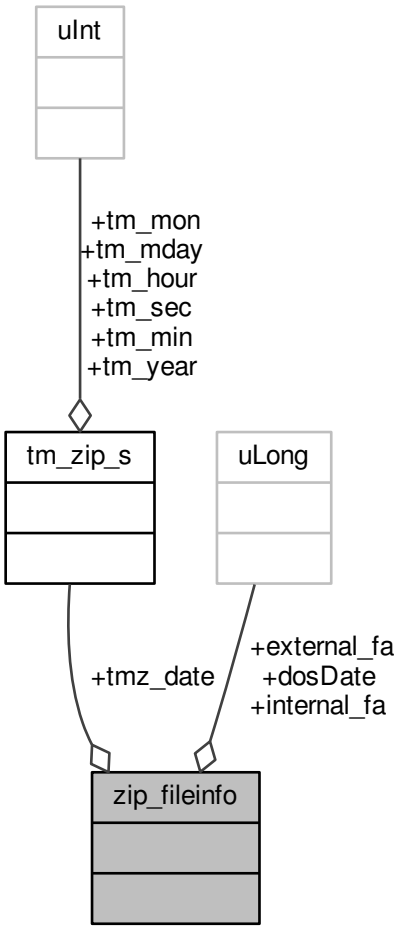

Data Fields

uLong	dosDate	
uLong	external_fa	
uLong	internal_fa	
tm_zip	tmz_date	

13.110.2 Macro Definition Documentation

13.110.2.1 #define APPEND_STATUS_ADDINZIP (2)

Definition at line 125 of file zip.h.

Referenced by QuaZip::open(), and zipOpen3().

13.110.2.2 #define APPEND_STATUS_CREATE (0)

Definition at line 123 of file zip.h.

Referenced by QuaZip::open(), and zipOpen3().

13.110.2.3 #define APPEND_STATUS_CREATEAFTER (1)

Definition at line 124 of file zip.h.

Referenced by QuaZip::open(), and zipOpen3().

13.110.2.4 #define DEF_MEM_LEVEL MAX_MEM_LEVEL

Definition at line 94 of file zip.h.

Referenced by zipOpenNewFileInZip(), zipOpenNewFileInZip2(), zipOpenNewFileInZip2_64(), and zipOpenNewFileInZip64().

13.110.2.5 #define Z_BZIP2ED 12

Definition at line 67 of file zip.h.

13.110.2.6 #define ZIP_AUTO_CLOSE 0x1u

Definition at line 86 of file zip.h.

Referenced by LoadCentralDirectoryRecord(), QuaZip::open(), zipClose(), and zipOpen3().

13.110.2.7 #define ZIP_BADZIPFILE (-103)

Definition at line 82 of file zip.h.

Referenced by LoadCentralDirectoryRecord(), and zipCloseFileInZipRaw64().

13.110.2.8 #define ZIP_DEFAULT_FLAGS (ZIP_AUTO_CLOSE | ZIP_WRITE_DATA_DESCRIPTOR)

Definition at line 88 of file zip.h.

Referenced by zipOpen(), zipOpen2(), zipOpen2_64(), and zipOpen64().

13.110.2.9 #define ZIP_EOF (0)

Definition at line 79 of file zip.h.

Referenced by zip64local_getByte().

13.110.2.10 #define ZIP_ERRNO (Z_ERRNO)

Definition at line 80 of file zip.h.

Referenced by LoadCentralDirectoryRecord(), Write_GlobalComment(), Write_LocalFileHeader(), zip64FlushWriteBuffer(), zip64local_getByte(), zip64local_putValue(), zipClose(), zipCloseFileInZipRaw64(), zipOpenNewFileInZip4_64(), zipRemoveExtraInfoBlock(), and zipWriteInFileInZip().

13.110.2.11 #define ZIP_INTERNALERROR (-104)

Definition at line 83 of file zip.h.

Referenced by add_data_in_datablock(), and zipOpenNewFileInZip4_64().

13.110.2.12 #define ZIP_OK (0)

Definition at line 78 of file zip.h.

Referenced by add_data_in_datablock(), LoadCentralDirectoryRecord(), Write_EndOfCentralDirectoryRecord(), Write_GlobalComment(), Write_LocalFileHeader(), Write_Zip64EndOfCentralDirectoryLocator(), Write_Zip64EndOfCentralDirectoryRecord(), QuaZipFile::writeData(), zip64FlushWriteBuffer(), zip64local_getByte(), zip64local_getLong(), zip64local_getLong64(), zip64local_getShort(), zip64local_putValue(), zip64local_SearchCentralDir64(), zipClearFlags(), zipClose(), zipCloseFileInZipRaw64(), zipOpen3(), zipOpenNewFileInZip4_64(), zipRemoveExtraInfoBlock(), zipSetFlags(), and zipWriteInFileInZip().

13.110.2.13 #define ZIP_PARAMERROR (-102)

Definition at line 81 of file zip.h.

Referenced by zipClearFlags(), zipClose(), zipCloseFileInZipRaw64(), zipOpenNewFileInZip4_64(), zipRemoveExtraInfoBlock(), zipSetFlags(), and zipWriteInFileInZip().

13.110.2.14 #define ZIP_SEQUENTIAL 0x2u

Definition at line 87 of file zip.h.

Referenced by QuaZip::open(), zipClearFlags(), zipCloseFileInZipRaw64(), zipOpenNewFileInZip4_64(), and zipSetFlags().

13.110.2.15 #define ZIP_WRITE_DATA_DESCRIPTOR 0x8u

Definition at line 85 of file zip.h.

Referenced by QuaZip::open(), QuaZipFile::open(), zipClearFlags(), zipOpenNewFileInZip4_64(), and zipSetFlags().

13.110.3 Typedef Documentation

13.110.3.1 typedef struct tm_zip_s tm_zip

13.110.3.2 typedef const char* zipcharpc

Definition at line 120 of file zip.h.

13.110.3.3 typedef voidp zipFile

Definition at line 75 of file zip.h.

13.110.4 Function Documentation

13.110.4.1 zipFile ZEXPORT zipOpen _Z_OF ((voidpf file, int append))

13.110.4.2 zipFile ZEXPORT zipOpen2 _Z_OF ((voidpf file, int append, zipcharpc *globalcomment, zlib_filefunc_def *pzlib_filefunc_def))

13.110.4.3 zipFile ZEXPORT zipOpen2_64 _Z_OF ((voidpf file, int append, zipcharpc *globalcomment, zlib_filefunc64_def *pzlib_filefunc_def))

13.110.4.4 int ZEXPORT zipOpenNewFileInZip _Z_OF ((zipFile file, const char ∗filename, const zip_fileinfo ∗zipfi, const void ∗extrafield_local, uInt size_extrafield_local, const void ∗extrafield_global, uInt size_extrafield_global, const char ∗comment, int method, int level))

13.110.4.5 int ZEXPORT zipOpenNewFileInZip64 _Z_OF ((zipFile file, const char ∗filename, const zip_fileinfo ∗zipfi, const void ∗extrafield_local, uInt size_extrafield_local, const void ∗extrafield_global, uInt size_extrafield_global, const char ∗comment, int method, int level, int zip64))

13.110.4.6 int ZEXPORT zipOpenNewFileInZip2 _Z_OF ((zipFile file, const char ∗filename, const zip_fileinfo ∗zipfi, const void ∗extrafield_local, uInt size_extrafield_local, const void ∗extrafield_global, uInt size_extrafield_global, const char ∗comment, int method, int level, int raw))

13.110.4.7 int ZEXPORT zipOpenNewFileInZip2_64 _Z_OF ((zipFile file, const char ∗filename, const zip_fileinfo ∗zipfi, const void ∗extrafield_local, uInt size_extrafield_local, const void ∗extrafield_global, uInt size_extrafield_global, const char ∗comment, int method, int level, int raw, int zip64))

13.110.4.8 int ZEXPORT zipOpenNewFileInZip3 _Z_OF ((zipFile file, const char ∗filename, const zip_fileinfo ∗zipfi, const void ∗extrafield_local, uInt size_extrafield_local, const void ∗extrafield_global, uInt size_extrafield_global, const char ∗comment, int method, int level, int raw, int windowBits, int memLevel, int strategy, const char ∗password, uLong crcForCrypting))

13.110.4.9 int ZEXPORT zipOpenNewFileInZip3_64 _Z_OF ((zipFile file, const char ∗filename, const zip_fileinfo ∗zipfi, const void ∗extrafield_local, uInt size_extrafield_local, const void ∗extrafield_global, uInt size_extrafield_global, const char ∗comment, int method, int level, int raw, int windowBits, int memLevel, int strategy, const char ∗password, uLong crcForCrypting, int zip64))

13.110.4.10 int ZEXPORT zipOpenNewFileInZip4 _Z_OF ((zipFile file, const char ∗filename, const zip_fileinfo ∗zipfi, const void ∗extrafield_local, uInt size_extrafield_local, const void ∗extrafield_global, uInt size_extrafield_global, const char ∗comment, int method, int level, int raw, int windowBits, int memLevel, int strategy, const char ∗password, uLong crcForCrypting, uLong versionMadeBy, uLong flagBase))

13.110.4.11 int ZEXPORT zipOpenNewFileInZip4_64 _Z_OF ((zipFile file, const char ∗filename, const zip_fileinfo ∗zipfi, const void ∗extrafield_local, uInt size_extrafield_local, const void ∗extrafield_global, uInt size_extrafield_global, const char ∗comment, int method, int level, int raw, int windowBits, int memLevel, int strategy, const char ∗password, uLong crcForCrypting, uLong versionMadeBy, uLong flagBase, int zip64))

13.110.4.12 int ZEXPORT zipWriteInFileInZip _Z_OF ((zipFile file, const void ∗buf, unsigned len))

13.110.4.13 int ZEXPORT zipCloseFileInZip _Z_OF ((zipFile file))

13.110.4.14 int ZEXPORT zipCloseFileInZipRaw _Z_OF ((zipFile file, uLong uncompressed_size, uLong crc32))

13.110.4.15 int ZEXPORT zipCloseFileInZipRaw64 _Z_OF ((zipFile file, ZPOS64_T uncompressed_size, uLong crc32))

13.110.4.16 int ZEXPORT zipClose _Z_OF ((zipFile file, const char ∗global_comment))

13.110.4.17 int ZEXPORT zipRemoveExtraInfoBlock _Z_OF ((char ∗pData, int ∗dataLen, short sHeader))

13.110.4.18 int ZEXPORT zipClearFlags (zipFile *file,* unsigned *flags*)

Definition at line 2091 of file zip.c.

References zip64_internal::flags, ZIP_OK, ZIP_PARAMERROR, ZIP_SEQUENTIAL, and ZIP_WRITE_DATA_DESCRIPTOR.

Referenced by QuaZipFile::open().

```
2092 {
2093     zip64_internal* zi;
```

```
2094     if (file == NULL)
2095         return ZIP_PARAMERROR;
2096     zi = (zip64_internal*)file;
2097     zi->flags &= ~flags;
2098     // If the data descriptor is not written, we can't use a non-seekable output.
2099     if ((zi->flags & ZIP_WRITE_DATA_DESCRIPTOR) == 0) {
2100         zi->flags &= ~ZIP_SEQUENTIAL;
2101     }
2102     return ZIP_OK;
2103 }
```

Here is the caller graph for this function:

13.110.4.19 zipFile ZEXPORT zipOpen3 (voidpf *file*, int *append*, zipcharpc * *globalcomment*, zlib_filefunc64_32_def * *pzlib_filefunc64_32_def*, unsigned *flags*)

Definition at line 862 of file zip.c.

References zip64_internal::add_position_when_writting_offset, ALLOC, APPEND_STATUS_ADDINZIP, APPEND_STATUS_CREATE, APPEND_STATUS_CREATEAFTER, zip64_internal::begin_pos, zip64_internal::central_dir, zip64_internal::ci, zip64_internal::filestream, fill_qiodevice64_filefunc(), zip64_internal::flags, zip64_internal::globalcomment, zip64_internal::in_opened_file_inzip, init_linkedlist(), LoadCentralDirectoryRecord(), zip64_internal::number_entry, SEEK_END, curfile64_info::stream_initialised, TRYFREE, zip64_internal::z_filefunc, ZCLOSE64, ZFAKECLOSE64, zlib_filefunc64_32_def_s::zfile_func64, ZIP_AUTO_CLOSE, ZIP_OK, ZLIB_FILEFUNC_MODE_CREATE, ZLIB_FILEFUNC_MODE_EXISTING, ZLIB_FILEFUNC_MODE_READ, ZLIB_FILEFUNC_MODE_WRITE, ZOPEN64, zlib_filefunc64_32_def_s::zseek32_file, ZSEEK64, zlib_filefunc64_32_def_s::ztell32_file, and ZTELL64.

Referenced by QuaZip::open(), zipOpen(), zipOpen2(), zipOpen2_64(), and zipOpen64().

```
864 {
865     zip64_internal ziinit;
866     zip64_internal* zi;
867     int err=ZIP_OK;
868 
869     ziinit.flags = flags;
870     ziinit.z_filefunc.zseek32_file = NULL;
871     ziinit.z_filefunc.ztell32_file = NULL;
872     if (pzlib_filefunc64_32_def==NULL)
873         fill_qiodevice64_filefunc(&ziinit.z_filefunc.
      zfile_func64);
874     else
875         ziinit.z_filefunc = *pzlib_filefunc64_32_def;
876 
877     ziinit.filestream = ZOPEN64(ziinit.z_filefunc,
878                 file,
879                 (append == APPEND_STATUS_CREATE) ?
880                 (ZLIB_FILEFUNC_MODE_READ |
      ZLIB_FILEFUNC_MODE_WRITE | ZLIB_FILEFUNC_MODE_CREATE) :
881                   (ZLIB_FILEFUNC_MODE_READ |
      ZLIB_FILEFUNC_MODE_WRITE | ZLIB_FILEFUNC_MODE_EXISTING))
      ;
882 
883     if (ziinit.filestream == NULL)
884         return NULL;
885 
886     if (append == APPEND_STATUS_CREATEAFTER)
887         ZSEEK64(ziinit.z_filefunc,ziinit.filestream,0,
      SEEK_END);
888 
```

```
889     ziinit.begin_pos = ZTELL64(ziinit.z_filefunc,ziinit.
      filestream);
890     ziinit.in_opened_file_inzip = 0;
891     ziinit.ci.stream_initialised = 0;
892     ziinit.number_entry = 0;
893     ziinit.add_position_when_writting_offset = 0;
894     init_linkedlist(&(ziinit.central_dir));
895
896
897
898     zi = (zip64_internal*)ALLOC(sizeof(zip64_internal));
899     if (zi==NULL)
900     {
901         if ((ziinit.flags & ZIP_AUTO_CLOSE) != 0) {
902             ZCLOSE64(ziinit.z_filefunc,ziinit.filestream);
903         } else {
904             ZFAKECLOSE64(ziinit.z_filefunc,ziinit.
      filestream);
905         }
906         return NULL;
907     }
908
909     /* now we add file in a zipfile */
910 #    ifndef NO_ADDFILEINEXISTINGZIP
911     ziinit.globalcomment = NULL;
912     if (append == APPEND_STATUS_ADDINZIP)
913     {
914       /* Read and Cache Central Directory Records */
915       err = LoadCentralDirectoryRecord(&ziinit);
916     }
917
918     if (globalcomment)
919     {
920       *globalcomment = ziinit.globalcomment;
921     }
922 #    endif /* !NO_ADDFILEINEXISTINGZIP*/
923
924     if (err != ZIP_OK)
925     {
926 #    ifndef NO_ADDFILEINEXISTINGZIP
927         TRYFREE(ziinit.globalcomment);
928 #    endif /* !NO_ADDFILEINEXISTINGZIP*/
929         TRYFREE(zi);
930         return NULL;
931     }
932     else
933     {
934         *zi = ziinit;
935         return (zipFile)zi;
936     }
937 }
```

Here is the call graph for this function:

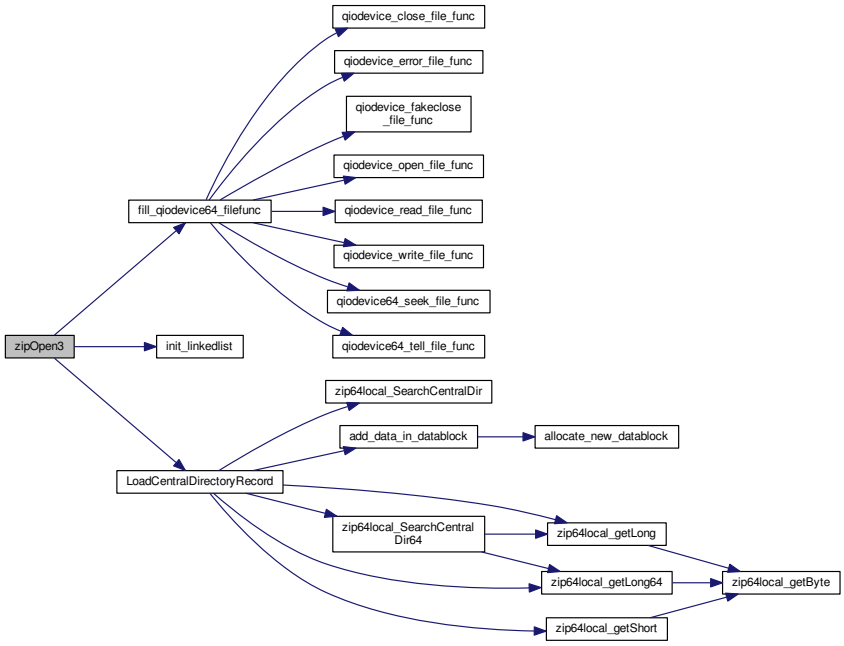

Here is the caller graph for this function:

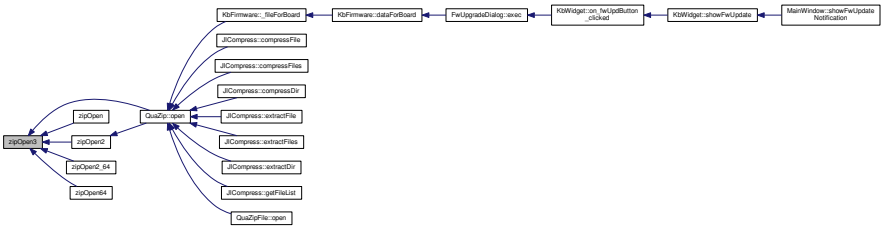

13.110.4.20 int ZEXPORT zipSetFlags (zipFile *file*, unsigned *flags*)

Definition at line 2077 of file zip.c.

References zip64_internal::flags, ZIP_OK, ZIP_PARAMERROR, ZIP_SEQUENTIAL, and ZIP_WRITE_DATA_DESCRIPTOR.

Referenced by QuaZip::open(), and QuaZipFile::open().

```
2078 {
2079     zip64_internal* zi;
2080     if (file == NULL)
2081         return ZIP_PARAMERROR;
2082     zi = (zip64_internal*)file;
2083     zi->flags |= flags;
2084     // If the output is non-seekable, the data descriptor is needed.
2085     if ((zi->flags & ZIP_SEQUENTIAL) != 0) {
2086         zi->flags |= ZIP_WRITE_DATA_DESCRIPTOR;
2087     }
2088     return ZIP_OK;
2089 }
```

Here is the caller graph for this function:

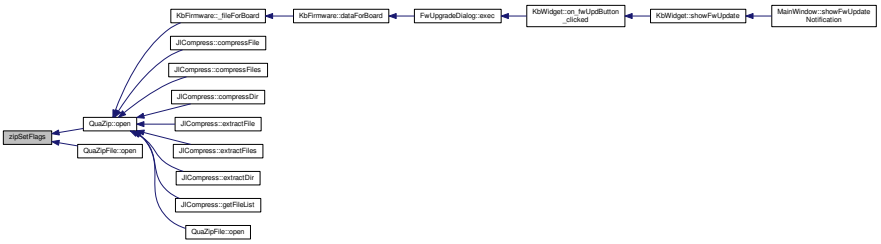

13.111 src/ckb/rebindwidget.cpp File Reference

```
#include <QStandardPaths>
#include "rebindwidget.h"
#include "ui_rebindwidget.h"
#include <qdebug.h>
```

Include dependency graph for rebindwidget.cpp:

Variables

- static const int DPI_OFFSET = -KeyAction::DPI_UP + 1
- static const int DPI_CUST_IDX = KeyAction::DPI_CUSTOM + DPI_OFFSET

13.111.1 Variable Documentation

13.111.1.1 const int DPI_CUST_IDX = KeyAction::DPI_CUSTOM + DPI_OFFSET [static]

Definition at line 7 of file rebindwidget.cpp.

Referenced by RebindWidget::on_dpiBox_currentIndexChanged().

13.111.1.2 const int DPI_OFFSET = -KeyAction::DPI_UP + 1 [static]

Definition at line 6 of file rebindwidget.cpp.

Referenced by RebindWidget::applyChanges(), and RebindWidget::setSelection().

13.112 src/ckb/rebindwidget.h File Reference

```
#include <QWidget>
#include "kbbind.h"
#include "kbprofile.h"
#include "macroreader.h"
```

Include dependency graph for rebindwidget.h:

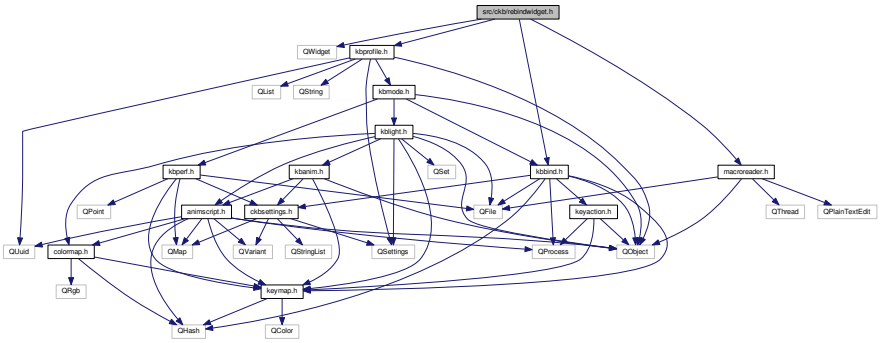

This graph shows which files directly or indirectly include this file:

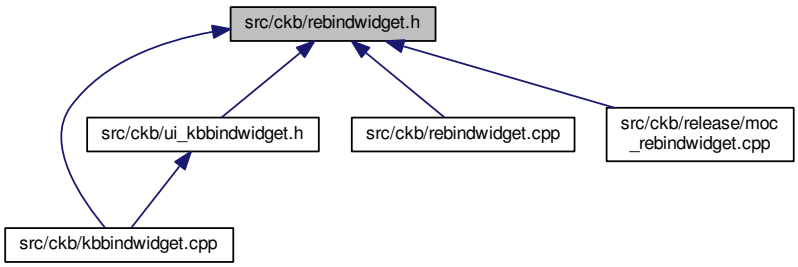

Data Structures

- class RebindWidget

Namespaces

- Ui

13.113 src/ckb/release/moc_animadddialog.cpp File Reference

```
#include "../animadddialog.h"
#include <QtCore/qbytearray.h>
#include <QtCore/qmetatype.h>
```

Include dependency graph for moc_animadddialog.cpp:

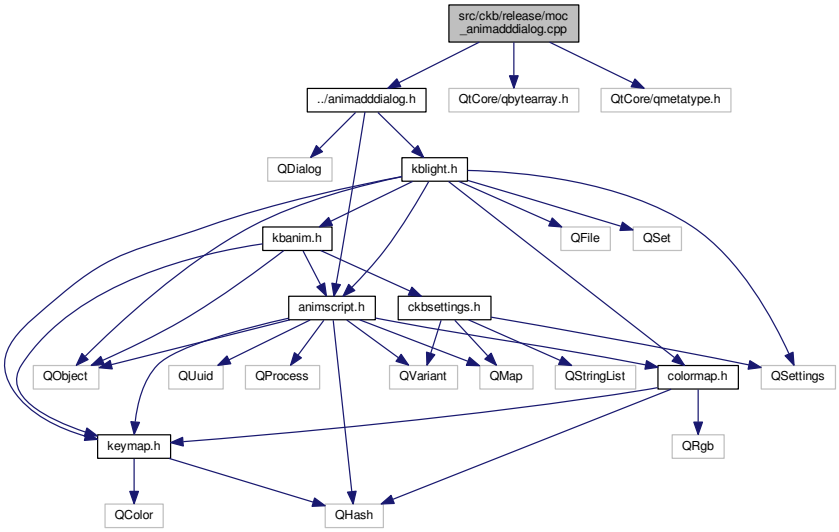

Data Structures

- struct qt_meta_stringdata_AnimAddDialog_t

Macros

- #define QT_MOC_LITERAL(idx, ofs, len)

Variables

- static const qt_meta_stringdata_AnimAddDialog_t qt_meta_stringdata_AnimAddDialog
- static const uint qt_meta_data_AnimAddDialog []

13.113.1 Data Structure Documentation

13.113.1.1 struct qt_meta_stringdata_AnimAddDialog_t

Definition at line 21 of file moc_animadddialog.cpp.

Collaboration diagram for qt_meta_stringdata_AnimAddDialog_t:

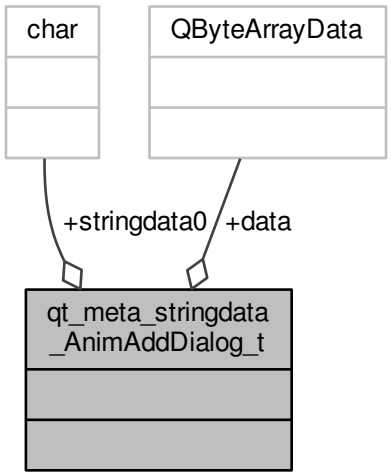

Data Fields

QByteArrayData	data[7]	
char	stringdata0[95]	

13.113.2 Macro Definition Documentation

13.113.2.1 #define QT_MOC_LITERAL(*idx, ofs, len*)

Value:

```
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET(len, \
    qptrdiff(offsetof(qt_meta_stringdata_AnimAddDialog_t, stringdata0) +
      ofs \
        - idx * sizeof(QByteArrayData)) \
    )
```

Definition at line 25 of file moc_animadddialog.cpp.

13.113.3 Variable Documentation

13.113.3.1 const uint qt_meta_data_AnimAddDialog[] [static]

Initial value:

```
= {

       7,
       0,
       0,    0,
       3,   14,
       0,    0,
       0,    0,
       0,    0,
```

```
       0,
       0,


       1,    1,   29,    2, 0x08 ,
       4,    1,   32,    2, 0x08 ,
       5,    1,   35,    2, 0x08 ,


    QMetaType::Void, QMetaType::Int,    3,
    QMetaType::Void, QMetaType::Int,    3,
    QMetaType::Void, QMetaType::Bool,    6,

       0
}
```

Definition at line 47 of file moc_animadddialog.cpp.

13.113.3.2 const qt_meta_stringdata_AnimAddDialog_t qt_meta_stringdata_AnimAddDialog [static]

Initial value:

```
= {
    {
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 13 ,   qptrdiff(offsetof(
      qt_meta_stringdata_AnimAddDialog_t, stringdata0) +  0    -  0  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 20 ,   qptrdiff(offsetof(
      qt_meta_stringdata_AnimAddDialog_t, stringdata0) +  14    -  1  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 0 ,   qptrdiff(offsetof(
      qt_meta_stringdata_AnimAddDialog_t, stringdata0) +  35    -  2  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 5 ,   qptrdiff(offsetof(
      qt_meta_stringdata_AnimAddDialog_t, stringdata0) +  36    -  3  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 22 ,   qptrdiff(offsetof(
      qt_meta_stringdata_AnimAddDialog_t, stringdata0) +  42    -  4  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 21 ,   qptrdiff(offsetof(
      qt_meta_stringdata_AnimAddDialog_t, stringdata0) +  65    -  5  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 7 ,   qptrdiff(offsetof(
      qt_meta_stringdata_AnimAddDialog_t, stringdata0) +  87    -  6  * sizeof(
      QByteArrayData))   )

    },
    "AnimAddDialog\0on_animBox_activated\0\0"
    "index\0on_presetBox_activated\0"
    "on_previewBox_clicked\0checked"
}
```

Definition at line 30 of file moc_animadddialog.cpp.

13.114 src/ckb/release/moc_animscript.cpp File Reference

```
#include "../animscript.h"
#include <QtCore/qbytearray.h>
#include <QtCore/qmetatype.h>
```

Include dependency graph for moc_animscript.cpp:

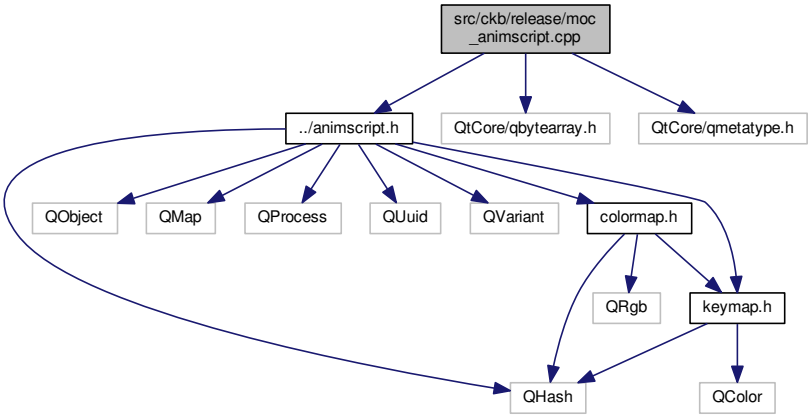

Data Structures

- struct qt_meta_stringdata_AnimScript_t

Macros

- #define QT_MOC_LITERAL(idx, ofs, len)

Variables

- static const qt_meta_stringdata_AnimScript_t qt_meta_stringdata_AnimScript
- static const uint qt_meta_data_AnimScript [ ]

13.114.1 Data Structure Documentation

13.114.1.1 struct qt_meta_stringdata_AnimScript_t

Definition at line 21 of file moc_animscript.cpp.

Collaboration diagram for qt_meta_stringdata_AnimScript_t:

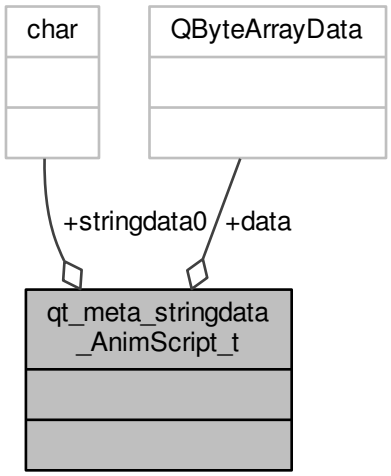

Data Fields

QByteArrayData	data[3]	
char	stringdata0[24]	

13.114.2 Macro Definition Documentation

13.114.2.1 #define QT_MOC_LITERAL(*idx, ofs, len*)

Value:

```
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET(len, \
    qptrdiff(offsetof(qt_meta_stringdata_AnimScript_t, stringdata0) + ofs \
        - idx * sizeof(QByteArrayData)) \
    )
```

Definition at line 25 of file moc_animscript.cpp.

13.114.3 Variable Documentation

13.114.3.1 const uint qt_meta_data_AnimScript[] [static]

Initial value:

```
= {

       7,
       0,
       0,    0,
       1,   14,
       0,    0,
       0,    0,
       0,    0,
       0,
```

```
        0,

        1,    0,   19,    2, 0x08 ,

    QMetaType::Void,

        0
}
```

Definition at line 41 of file moc_animscript.cpp.

13.114.3.2 const qt_meta_stringdata_AnimScript_t qt_meta_stringdata_AnimScript [static]

Initial value:

```
= {
    {
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 10 ,   qptrdiff(offsetof(
      qt_meta_stringdata_AnimScript_t, stringdata0) +  0    -  0  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 11 ,   qptrdiff(offsetof(
      qt_meta_stringdata_AnimScript_t, stringdata0) +  11    -  1  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 0 ,   qptrdiff(offsetof(
      qt_meta_stringdata_AnimScript_t, stringdata0) +  23    -  2  * sizeof(
      QByteArrayData))   )

    },
    "AnimScript\0readProcess\0"
}
```

Definition at line 30 of file moc_animscript.cpp.

13.115 src/ckb/release/moc_animsettingdialog.cpp File Reference

```
#include "../animsettingdialog.h"
#include <QtCore/qbytearray.h>
#include <QtCore/qmetatype.h>
```

Include dependency graph for moc_animsettingdialog.cpp:

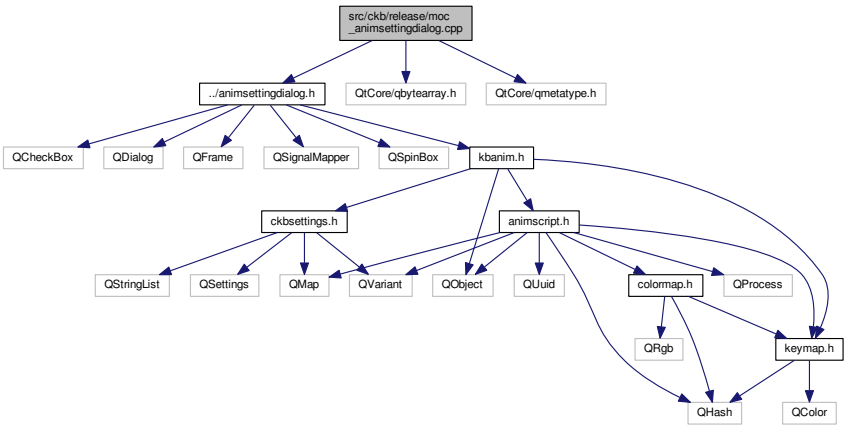

Data Structures

- struct qt_meta_stringdata_AnimSettingDialog_t

Macros

- #define QT_MOC_LITERAL(idx, ofs, len)

Variables

- static const qt_meta_stringdata_AnimSettingDialog_t qt_meta_stringdata_AnimSettingDialog
- static const uint qt_meta_data_AnimSettingDialog []

13.115.1 Data Structure Documentation

13.115.1.1 struct qt_meta_stringdata_AnimSettingDialog_t

Definition at line 21 of file moc_animsettingdialog.cpp.

Collaboration diagram for qt_meta_stringdata_AnimSettingDialog_t:

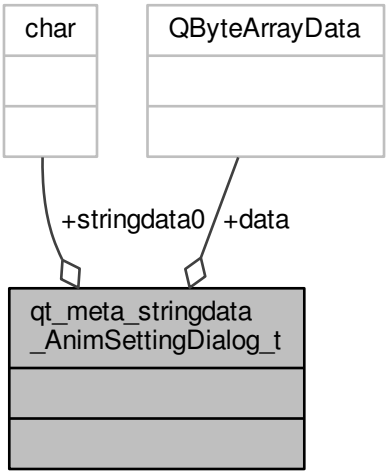

Data Fields

QByteArrayData	data[15]	
char	stringdata0[246]	

13.115.2 Macro Definition Documentation

13.115.2.1 #define QT_MOC_LITERAL(*idx, ofs, len*)

Value:

```
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET(len, \
    qptrdiff(offsetof(qt_meta_stringdata_AnimSettingDialog_t,
      stringdata0) + ofs \
        - idx * sizeof(QByteArrayData)) \
    )
```

Definition at line 25 of file moc_animsettingdialog.cpp.

13.115.3 Variable Documentation

13.115.3.1 const uint qt_meta_data_AnimSettingDialog[] [static]

Definition at line 60 of file moc_animsettingdialog.cpp.

13.115.3.2 const qt_meta_stringdata_AnimSettingDialog_t qt_meta_stringdata_AnimSettingDialog [static]

Initial value:

```
= {
    {
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 17 ,   qptrdiff(offsetof(
      qt_meta_stringdata_AnimSettingDialog_t, stringdata0) +  0    -  0  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 11 ,   qptrdiff(offsetof(
      qt_meta_stringdata_AnimSettingDialog_t, stringdata0) +  18    -  1  *
       sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 0 ,   qptrdiff(offsetof(
      qt_meta_stringdata_AnimSettingDialog_t, stringdata0) +  30    -  2  *
       sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 8 ,   qptrdiff(offsetof(
      qt_meta_stringdata_AnimSettingDialog_t, stringdata0) +  31    -  3  *
       sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 11 ,   qptrdiff(offsetof(
      qt_meta_stringdata_AnimSettingDialog_t, stringdata0) +  40    -  4  *
       sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 16 ,   qptrdiff(offsetof(
      qt_meta_stringdata_AnimSettingDialog_t, stringdata0) +  52    -  5  *
       sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 4 ,   qptrdiff(offsetof(
      qt_meta_stringdata_AnimSettingDialog_t, stringdata0) +  69    -  6  *
       sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 19 ,   qptrdiff(offsetof(
      qt_meta_stringdata_AnimSettingDialog_t, stringdata0) +  74    -  7  *
       sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 11 ,   qptrdiff(offsetof(
      qt_meta_stringdata_AnimSettingDialog_t, stringdata0) +  94    -  8  *
       sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 24 ,   qptrdiff(offsetof(
      qt_meta_stringdata_AnimSettingDialog_t, stringdata0) +  106    -  9
      * sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 4 ,   qptrdiff(offsetof(
      qt_meta_stringdata_AnimSettingDialog_t, stringdata0) +  131    -  10
       * sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 25 ,   qptrdiff(offsetof(
      qt_meta_stringdata_AnimSettingDialog_t, stringdata0) +  136    -  11
       * sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 26 ,   qptrdiff(offsetof(
      qt_meta_stringdata_AnimSettingDialog_t, stringdata0) +  162    -  12
       * sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 27 ,   qptrdiff(offsetof(
      qt_meta_stringdata_AnimSettingDialog_t, stringdata0) +  189    -  13
       * sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 28 ,   qptrdiff(offsetof(
      qt_meta_stringdata_AnimSettingDialog_t, stringdata0) +  217    -  14
       * sizeof(QByteArrayData))   )

    },
    "AnimSettingDialog\0newDuration\0\0duration\0"
    "updateStops\0angleDialChanged\0name\0"
    "angleSpinnerChanged\0updateParam\0"
    "on_delayBox_valueChanged\0arg1\0"
    "on_repeatBox_valueChanged\0"
    "on_kpDelayBox_valueChanged\0"
    "on_kpRepeatBox_valueChanged\0"
    "on_kpReleaseBox_stateChanged"
}
```

Definition at line 30 of file moc_animsettingdialog.cpp.

13.116 src/ckb/release/moc_ckbsettingswriter.cpp File Reference

```
#include "../ckbsettingswriter.h"
#include <QtCore/qbytearray.h>
#include <QtCore/qmetatype.h>
```

Include dependency graph for moc_ckbsettingswriter.cpp:

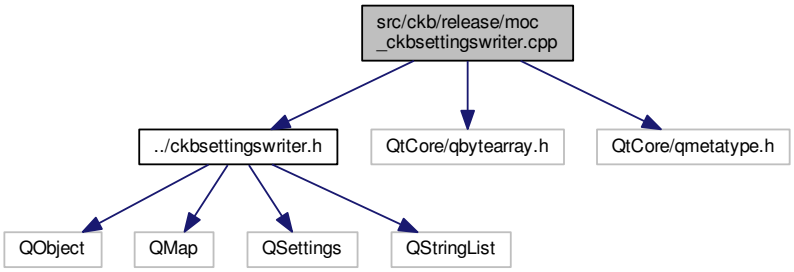

Data Structures

- struct qt_meta_stringdata_CkbSettingsWriter_t

Macros

- #define QT_MOC_LITERAL(idx, ofs, len)

Variables

- static const qt_meta_stringdata_CkbSettingsWriter_t qt_meta_stringdata_CkbSettingsWriter
- static const uint qt_meta_data_CkbSettingsWriter [ ]

13.116.1 Data Structure Documentation

13.116.1.1 struct qt_meta_stringdata_CkbSettingsWriter_t

Definition at line 21 of file moc_ckbsettingswriter.cpp.

Collaboration diagram for qt_meta_stringdata_CkbSettingsWriter_t:

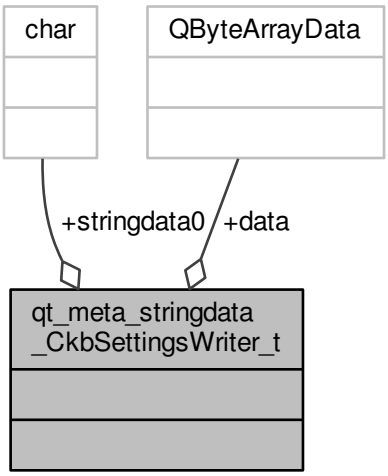

Data Fields

QByteArrayData	data[3]	
char	stringdata0[23]	

13.116.2 Macro Definition Documentation

13.116.2.1 #define QT_MOC_LITERAL(*idx, ofs, len*)

Value:

```
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET(len, \
    qptrdiff(offsetof(qt_meta_stringdata_CkbSettingsWriter_t,
      stringdata0) + ofs \
        - idx * sizeof(QByteArrayData)) \
    )
```

Definition at line 25 of file moc_ckbsettingswriter.cpp.

13.116.3 Variable Documentation

13.116.3.1 const uint qt_meta_data_CkbSettingsWriter[] [static]

Initial value:

```
= {

       7,
       0,
       0,    0,
       1,   14,
       0,    0,
       0,    0,
       0,    0,
```

```
        0,
        0,

        1,    0,   19,    2, 0x0a ,

    QMetaType::Void,

        0
}
```

Definition at line 41 of file moc_ckbsettingswriter.cpp.

13.116.3.2 const qt_meta_stringdata_CkbSettingsWriter_t qt_meta_stringdata_CkbSettingsWriter [static]

Initial value:

```
= {
    {
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 17 ,   qptrdiff(offsetof(
      qt_meta_stringdata_CkbSettingsWriter_t, stringdata0) +  0    -  0  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 3 ,   qptrdiff(offsetof(
      qt_meta_stringdata_CkbSettingsWriter_t, stringdata0) +  18    -  1  *
       sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 0 ,   qptrdiff(offsetof(
      qt_meta_stringdata_CkbSettingsWriter_t, stringdata0) +  22    -  2  *
       sizeof(QByteArrayData))   )

    },
    "CkbSettingsWriter\0run\0"
}
```

Definition at line 30 of file moc_ckbsettingswriter.cpp.

13.117 src/ckb/release/moc_colorbutton.cpp File Reference

```
#include "../colorbutton.h"
#include <QtCore/qbytearray.h>
#include <QtCore/qmetatype.h>
```

Include dependency graph for moc_colorbutton.cpp:

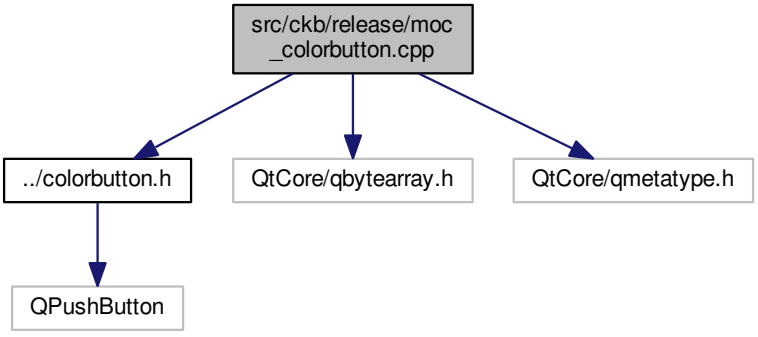

Data Structures

- struct qt_meta_stringdata_ColorButton_t

Macros

- #define QT_MOC_LITERAL(idx, ofs, len)

Variables

- static const qt_meta_stringdata_ColorButton_t qt_meta_stringdata_ColorButton
- static const uint qt_meta_data_ColorButton [ ]

13.117.1 Data Structure Documentation

13.117.1.1 struct qt_meta_stringdata_ColorButton_t

Definition at line 21 of file moc_colorbutton.cpp.

Collaboration diagram for qt_meta_stringdata_ColorButton_t:

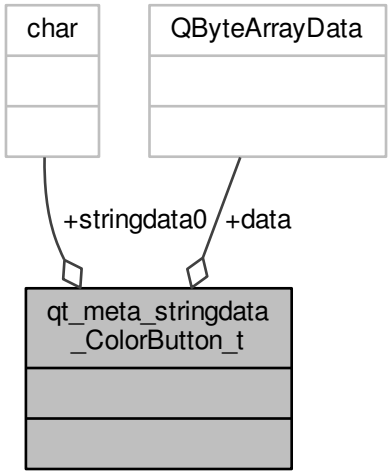

Data Fields

QByteArrayData	data[5]	
char	stringdata0[45]	

13.117.2 Macro Definition Documentation

13.117.2.1 #define QT_MOC_LITERAL(*idx, ofs, len*)

Value:

```
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET(len, \
    qptrdiff(offsetof(qt_meta_stringdata_ColorButton_t, stringdata0) + ofs
      \
        - idx * sizeof(QByteArrayData)) \
    )
```

Definition at line 25 of file moc_colorbutton.cpp.

13.117.3 Variable Documentation

13.117.3.1 const uint qt_meta_data_ColorButton[] [static]

Initial value:

```
= {

       7,
       0,
       0,    0,
       2,   14,
       0,    0,
       0,    0,
       0,    0,
       0,
       1,


       1,    1,   24,    2, 0x06 ,


       4,    0,   27,    2, 0x08 ,


    QMetaType::Void, QMetaType::QColor,    3,


    QMetaType::Void,

       0
}
```

Definition at line 44 of file moc_colorbutton.cpp.

13.117.3.2 const qt_meta_stringdata_ColorButton_t qt_meta_stringdata_ColorButton [static]

Initial value:

```
= {
    {
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 11 ,   qptrdiff(offsetof(
      qt_meta_stringdata_ColorButton_t, stringdata0) +  0    -  0  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 12 ,   qptrdiff(offsetof(
      qt_meta_stringdata_ColorButton_t, stringdata0) +  12    -  1  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 0 ,   qptrdiff(offsetof(
      qt_meta_stringdata_ColorButton_t, stringdata0) +  25    -  2  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 8 ,   qptrdiff(offsetof(
      qt_meta_stringdata_ColorButton_t, stringdata0) +  26    -  3  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 9 ,   qptrdiff(offsetof(
      qt_meta_stringdata_ColorButton_t, stringdata0) +  35    -  4  * sizeof(
      QByteArrayData))   )

    },
    "ColorButton\0colorChanged\0\0newColor\0"
    "pickColor"
}
```

Definition at line 30 of file moc_colorbutton.cpp.

13.118 src/ckb/release/moc_extrasettingswidget.cpp File Reference

```
#include "../extrasettingswidget.h"
```

```
#include <QtCore/qbytearray.h>
#include <QtCore/qmetatype.h>
```

Include dependency graph for moc_extrasettingswidget.cpp:

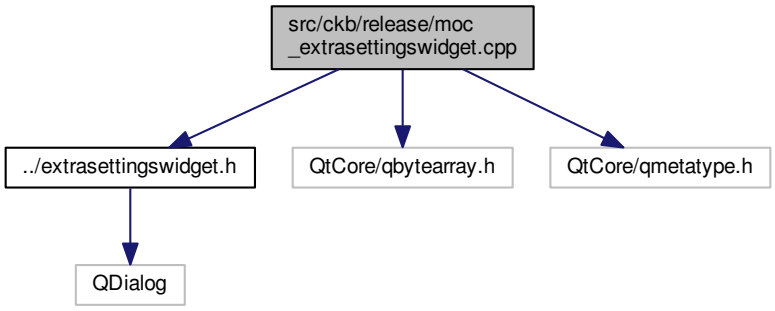

Data Structures

- struct qt_meta_stringdata_ExtraSettingsWidget_t

Macros

- #define QT_MOC_LITERAL(idx, ofs, len)

Variables

- static const qt_meta_stringdata_ExtraSettingsWidget_t qt_meta_stringdata_ExtraSettingsWidget
- static const uint qt_meta_data_ExtraSettingsWidget [ ]

13.118.1 Data Structure Documentation

13.118.1.1 struct qt_meta_stringdata_ExtraSettingsWidget_t

Definition at line 21 of file moc_extrasettingswidget.cpp.

Collaboration diagram for qt_meta_stringdata_ExtraSettingsWidget_t:

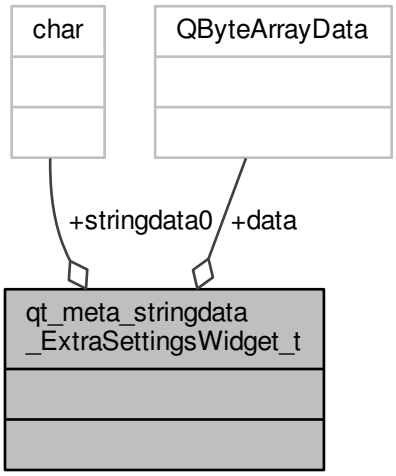

Data Fields

QByteArrayData	data[13]	
char	stringdata0[236]	

13.118.2 Macro Definition Documentation

13.118.2.1 #define QT_MOC_LITERAL(*idx, ofs, len*)

Value:

```
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET(len, \
    qptrdiff(offsetof(qt_meta_stringdata_ExtraSettingsWidget_t,
      stringdata0) + ofs \
        - idx * sizeof(QByteArrayData)) \
    )
```

Definition at line 25 of file moc_extrasettingswidget.cpp.

13.118.3 Variable Documentation

13.118.3.1 const uint qt_meta_data_ExtraSettingsWidget[ ] [static]

Definition at line 57 of file moc_extrasettingswidget.cpp.

13.118.3.2 const qt_meta_stringdata_ExtraSettingsWidget_t qt_meta_stringdata_ExtraSettingsWidget [static]

Initial value:

```
= {
    {
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 19 ,   qptrdiff(offsetof(
```

```
      qt_meta_stringdata_ExtraSettingsWidget_t, stringdata0) +  0    -  0
        * sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 18 ,   qptrdiff(offsetof(
      qt_meta_stringdata_ExtraSettingsWidget_t, stringdata0) +  20    -
      1  * sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 0 ,   qptrdiff(offsetof(
      qt_meta_stringdata_ExtraSettingsWidget_t, stringdata0) +  39    -
      2  * sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 7 ,   qptrdiff(offsetof(
      qt_meta_stringdata_ExtraSettingsWidget_t, stringdata0) +  40    -
      3  * sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 24 ,   qptrdiff(offsetof(
      qt_meta_stringdata_ExtraSettingsWidget_t, stringdata0) +  48    -
      4  * sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 25 ,   qptrdiff(offsetof(
      qt_meta_stringdata_ExtraSettingsWidget_t, stringdata0) +  73    -
      5  * sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 22 ,   qptrdiff(offsetof(
      qt_meta_stringdata_ExtraSettingsWidget_t, stringdata0) +  99    -
      6  * sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 4 ,   qptrdiff(offsetof(
      qt_meta_stringdata_ExtraSettingsWidget_t, stringdata0) +  122    -
       7  * sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 20 ,   qptrdiff(offsetof(
      qt_meta_stringdata_ExtraSettingsWidget_t, stringdata0) +  127    -
       8  * sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 20 ,   qptrdiff(offsetof(
      qt_meta_stringdata_ExtraSettingsWidget_t, stringdata0) +  148    -
       9  * sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 20 ,   qptrdiff(offsetof(
      qt_meta_stringdata_ExtraSettingsWidget_t, stringdata0) +  169    -
       10  * sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 25 ,   qptrdiff(offsetof(
      qt_meta_stringdata_ExtraSettingsWidget_t, stringdata0) +  190    -
       11  * sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 19 ,   qptrdiff(offsetof(
      qt_meta_stringdata_ExtraSettingsWidget_t, stringdata0) +  216    -
       12  * sizeof(QByteArrayData))   )

    },
    "ExtraSettingsWidget\0on_trayBox_clicked\0"
    "\0checked\0on_brightnessBox_clicked\0"
    "on_animScanButton_clicked\0"
    "on_fpsBox_valueChanged\0arg1\0"
    "on_ditherBox_clicked\0on_mAccelBox_clicked\0"
    "on_sAccelBox_clicked\0on_sSpeedBox_valueChanged\0"
    "on_delayBox_clicked"
}
```

Definition at line 30 of file moc_extrasettingswidget.cpp.

13.119 src/ckb/release/moc_fwupgradedialog.cpp File Reference

```
#include "../fwupgradedialog.h"
#include <QtCore/qbytearray.h>
#include <QtCore/qmetatype.h>
```

Include dependency graph for moc_fwupgradedialog.cpp:

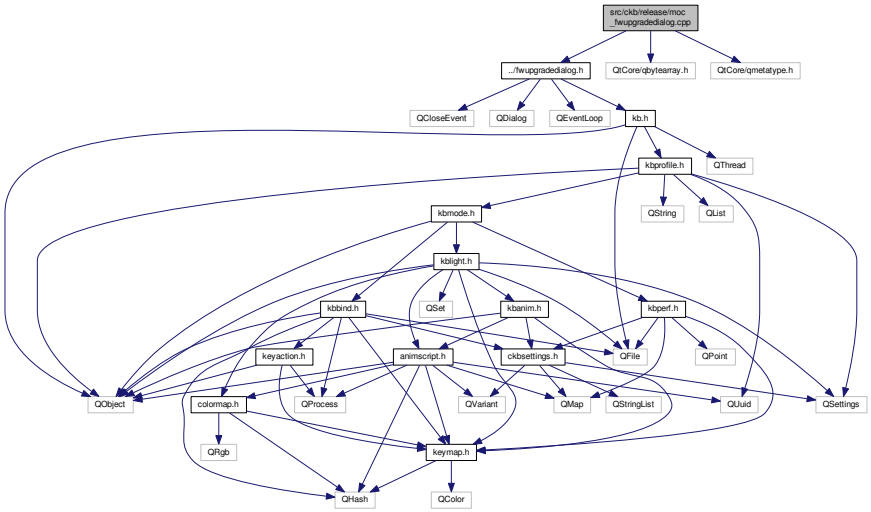

Data Structures

- struct qt_meta_stringdata_FwUpgradeDialog_t

Macros

- #define QT_MOC_LITERAL(idx, ofs, len)

Variables

- static const qt_meta_stringdata_FwUpgradeDialog_t qt_meta_stringdata_FwUpgradeDialog
- static const uint qt_meta_data_FwUpgradeDialog [ ]

13.119.1 Data Structure Documentation

13.119.1.1 struct qt_meta_stringdata_FwUpgradeDialog_t

Definition at line 21 of file moc_fwupgradedialog.cpp.

Collaboration diagram for qt_meta_stringdata_FwUpgradeDialog_t:

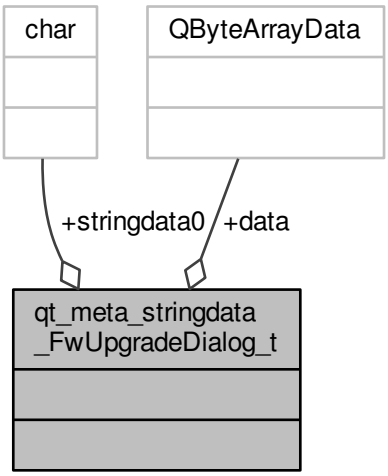

Data Fields

QByteArrayData	data[10]	
char	stringdata0[133]	

13.119.2 Macro Definition Documentation

13.119.2.1 #define QT_MOC_LITERAL(*idx, ofs, len*)

Value:

```
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET(len, \
    qptrdiff(offsetof(qt_meta_stringdata_FwUpgradeDialog_t, stringdata0
      ) + ofs \
        - idx * sizeof(QByteArrayData)) \
    )
```

Definition at line 25 of file moc_fwupgradedialog.cpp.

13.119.3 Variable Documentation

13.119.3.1 const uint qt_meta_data_FwUpgradeDialog[ ] [static]

Initial value:

```
= {

       7,
       0,
       0,    0,
       5,   14,
       0,    0,
       0,    0,
       0,    0,
```

```
       0,
       0,


       1,    2,   39,    2, 0x08 ,
       5,    1,   44,    2, 0x08 ,
       7,    0,   47,    2, 0x08 ,
       8,    0,   48,    2, 0x08 ,
       9,    0,   49,    2, 0x08 ,


    QMetaType::Void, QMetaType::Int, QMetaType::Int,    3,    4,
    QMetaType::Void, QMetaType::Bool,    6,
    QMetaType::Void,
    QMetaType::Void,
    QMetaType::Void,

       0
}
```

Definition at line 51 of file moc_fwupgradedialog.cpp.

13.119.3.2 const qt_meta_stringdata_FwUpgradeDialog_t qt_meta_stringdata_FwUpgradeDialog [static]

Initial value:

```
= {
    {
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 15 ,   qptrdiff(offsetof(
      qt_meta_stringdata_FwUpgradeDialog_t, stringdata0) +  0    -  0  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 16 ,   qptrdiff(offsetof(
      qt_meta_stringdata_FwUpgradeDialog_t, stringdata0) +  16    -  1  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 0 ,   qptrdiff(offsetof(
      qt_meta_stringdata_FwUpgradeDialog_t, stringdata0) +  33    -  2  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 7 ,   qptrdiff(offsetof(
      qt_meta_stringdata_FwUpgradeDialog_t, stringdata0) +  34    -  3  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 5 ,   qptrdiff(offsetof(
      qt_meta_stringdata_FwUpgradeDialog_t, stringdata0) +  42    -  4  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 16 ,   qptrdiff(offsetof(
      qt_meta_stringdata_FwUpgradeDialog_t, stringdata0) +  48    -  5  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 9 ,   qptrdiff(offsetof(
      qt_meta_stringdata_FwUpgradeDialog_t, stringdata0) +  65    -  6  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 9 ,   qptrdiff(offsetof(
      qt_meta_stringdata_FwUpgradeDialog_t, stringdata0) +  75    -  7  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 23 ,   qptrdiff(offsetof(
      qt_meta_stringdata_FwUpgradeDialog_t, stringdata0) +  85    -  8  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 23 ,   qptrdiff(offsetof(
      qt_meta_stringdata_FwUpgradeDialog_t, stringdata0) +  109    -  9  *
      sizeof(QByteArrayData))   )

    },
    "FwUpgradeDialog\0fwUpdateProgress\0\0"
    "current\0total\0fwUpdateFinished\0succeeded\0"
    "removeDev\0on_cancelButton_clicked\0"
    "on_actionButton_clicked"
}
```

Definition at line 30 of file moc_fwupgradedialog.cpp.

13.120 src/ckb/release/moc_gradientbutton.cpp File Reference

```
#include "../gradientbutton.h"
#include <QtCore/qbytearray.h>
#include <QtCore/qmetatype.h>
```

Include dependency graph for moc_gradientbutton.cpp:

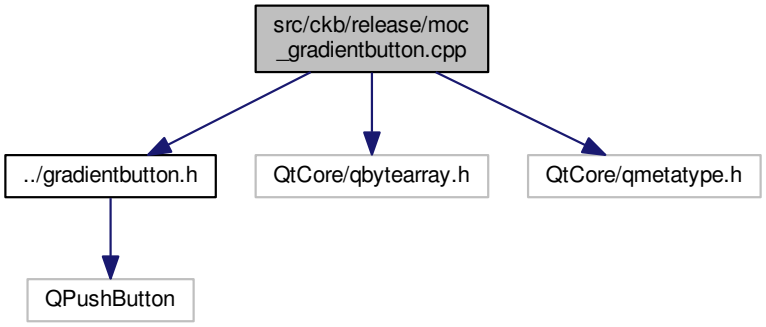

Data Structures

- struct qt_meta_stringdata_GradientButton_t

Macros

- #define QT_MOC_LITERAL(idx, ofs, len)

Variables

- static const qt_meta_stringdata_GradientButton_t qt_meta_stringdata_GradientButton
- static const uint qt_meta_data_GradientButton []

13.120.1 Data Structure Documentation

13.120.1.1 struct qt_meta_stringdata_GradientButton_t

Definition at line 21 of file moc_gradientbutton.cpp.

Collaboration diagram for qt_meta_stringdata_GradientButton_t:

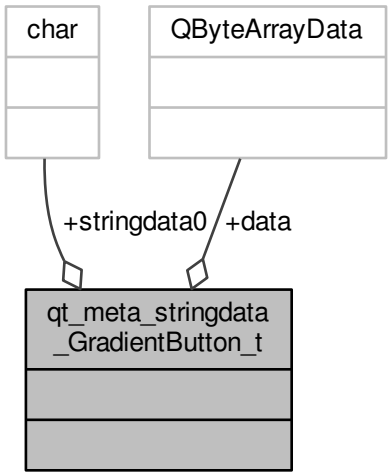

Data Fields

QByteArrayData	data[4]	
char	stringdata0[45]	

13.120.2 Macro Definition Documentation

13.120.2.1 #define QT_MOC_LITERAL(*idx, ofs, len*)

Value:

```
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET(len, \
    qptrdiff(offsetof(qt_meta_stringdata_GradientButton_t, stringdata0)
      + ofs \
        - idx * sizeof(QByteArrayData)) \
    )
```

Definition at line 25 of file moc_gradientbutton.cpp.

13.120.3 Variable Documentation

13.120.3.1 const uint qt_meta_data_GradientButton[] [static]

Initial value:

```
= {

       7,
       0,
       0,    0,
       2,   14,
       0,    0,
       0,    0,
       0,    0,
```

```
        0,
        1,

        1,    0,   24,    2, 0x06 ,

        3,    0,   25,    2, 0x08 ,

    QMetaType::Void,

    QMetaType::Void,

        0
}
```

Definition at line 43 of file moc_gradientbutton.cpp.

13.120.3.2 const qt_meta_stringdata_GradientButton_t qt_meta_stringdata_GradientButton [static]

Initial value:

```
= {
    {
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 14 ,   qptrdiff(offsetof(
      qt_meta_stringdata_GradientButton_t, stringdata0) +  0    -  0  * sizeof
      (QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 15 ,   qptrdiff(offsetof(
      qt_meta_stringdata_GradientButton_t, stringdata0) +  15    -  1  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 0 ,   qptrdiff(offsetof(
      qt_meta_stringdata_GradientButton_t, stringdata0) +  31    -  2  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 12 ,   qptrdiff(offsetof(
      qt_meta_stringdata_GradientButton_t, stringdata0) +  32    -  3  *
      sizeof(QByteArrayData))   )

    },
    "GradientButton\0gradientChanged\0\0"
    "pickGradient"
}
```

Definition at line 30 of file moc_gradientbutton.cpp.

13.121 src/ckb/release/moc_gradientdialog.cpp File Reference

```
#include "../gradientdialog.h"
#include <QtCore/qbytearray.h>
#include <QtCore/qmetatype.h>
```

Include dependency graph for moc_gradientdialog.cpp:

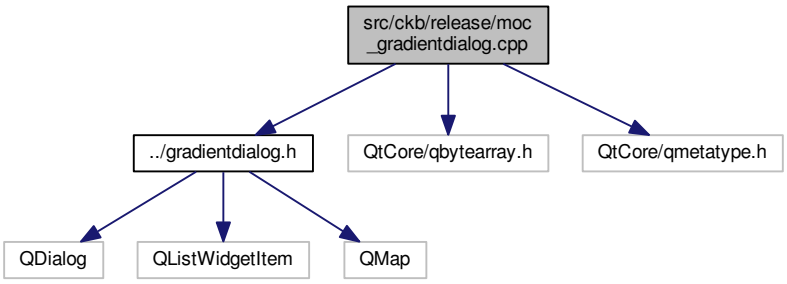

Data Structures

- struct qt_meta_stringdata_GradientDialog_t

Macros

- #define QT_MOC_LITERAL(idx, ofs, len)

Variables

- static const qt_meta_stringdata_GradientDialog_t qt_meta_stringdata_GradientDialog
- static const uint qt_meta_data_GradientDialog []

13.121.1 Data Structure Documentation

13.121.1.1 struct qt_meta_stringdata_GradientDialog_t

Definition at line 21 of file moc_gradientdialog.cpp.

Collaboration diagram for qt_meta_stringdata_GradientDialog_t:

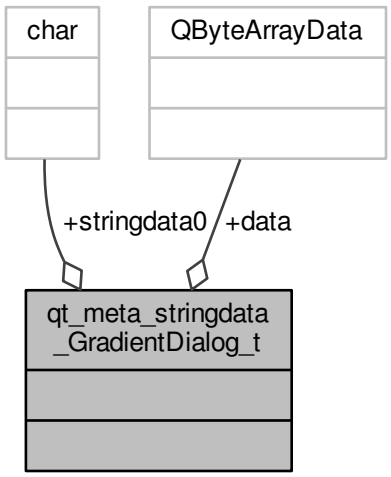

Data Fields

QByteArrayData	data[17]	
char	stringdata0[266]	

13.121.2 Macro Definition Documentation

13.121.2.1 #define QT_MOC_LITERAL(*idx, ofs, len*)

Value:

```
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET(len, \
    qptrdiff(offsetof(qt_meta_stringdata_GradientDialog_t, stringdata0)
      + ofs \
        - idx * sizeof(QByteArrayData)) \
    )
```

Definition at line 25 of file moc_gradientdialog.cpp.

13.121.3 Variable Documentation

13.121.3.1 const uint qt_meta_data_GradientDialog[] [static]

Definition at line 62 of file moc_gradientdialog.cpp.

13.121.3.2 const qt_meta_stringdata_GradientDialog_t qt_meta_stringdata_GradientDialog [static]

Initial value:

```
= {
    {
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 14 ,   qptrdiff(offsetof(
      qt_meta_stringdata_GradientDialog_t, stringdata0) +  0    -  0  * sizeof
      (QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 14 ,   qptrdiff(offsetof(
      qt_meta_stringdata_GradientDialog_t, stringdata0) +  15    -  1  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 0 ,   qptrdiff(offsetof(
      qt_meta_stringdata_GradientDialog_t, stringdata0) +  30    -  2  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 5 ,   qptrdiff(offsetof(
      qt_meta_stringdata_GradientDialog_t, stringdata0) +  31    -  3  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 11 ,   qptrdiff(offsetof(
      qt_meta_stringdata_GradientDialog_t, stringdata0) +  37    -  4  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 8 ,   qptrdiff(offsetof(
      qt_meta_stringdata_GradientDialog_t, stringdata0) +  49    -  5  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 12 ,   qptrdiff(offsetof(
      qt_meta_stringdata_GradientDialog_t, stringdata0) +  58    -  6  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 32 ,   qptrdiff(offsetof(
      qt_meta_stringdata_GradientDialog_t, stringdata0) +  71    -  7  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 16 ,   qptrdiff(offsetof(
      qt_meta_stringdata_GradientDialog_t, stringdata0) +  104    -  8  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 7 ,   qptrdiff(offsetof(
      qt_meta_stringdata_GradientDialog_t, stringdata0) +  121    -  9  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 8 ,   qptrdiff(offsetof(
      qt_meta_stringdata_GradientDialog_t, stringdata0) +  129    -  10  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 24 ,   qptrdiff(offsetof(
      qt_meta_stringdata_GradientDialog_t, stringdata0) +  138    -  11  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 4 ,   qptrdiff(offsetof(
      qt_meta_stringdata_GradientDialog_t, stringdata0) +  163    -  12  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 21 ,   qptrdiff(offsetof(
      qt_meta_stringdata_GradientDialog_t, stringdata0) +  168    -  13  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 23 ,   qptrdiff(offsetof(
      qt_meta_stringdata_GradientDialog_t, stringdata0) +  190    -  14  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 23 ,   qptrdiff(offsetof(
      qt_meta_stringdata_GradientDialog_t, stringdata0) +  214    -  15  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 27 ,   qptrdiff(offsetof(
      qt_meta_stringdata_GradientDialog_t, stringdata0) +  238    -  16  *
      sizeof(QByteArrayData))   )

    },
    "GradientDialog\0currentChanged\0\0color\0"
    "spontaneous\0position\0colorChanged\0"
    "on_presetList_currentItemChanged\0"
    "QListWidgetItem*\0current\0previous\0"
```

```
    "on_presetName_textEdited\0arg1\0"
    "on_presetSave_clicked\0on_presetDelete_clicked\0"
    "on_stopPos_valueChanged\0"
    "on_stopOpacity_valueChanged"
}
```

Definition at line 30 of file moc_gradientdialog.cpp.

13.122 src/ckb/release/moc_gradientdialogwidget.cpp File Reference

```
#include "../gradientdialogwidget.h"
#include <QtCore/qbytearray.h>
#include <QtCore/qmetatype.h>
```

Include dependency graph for moc_gradientdialogwidget.cpp:

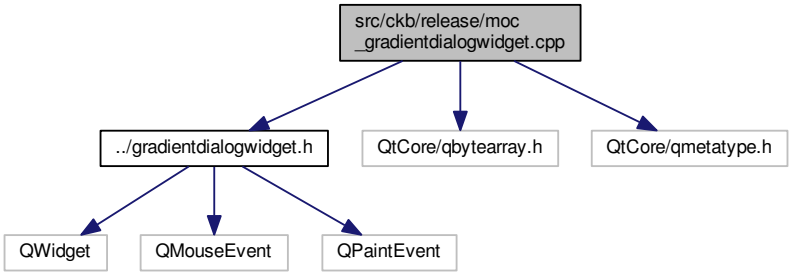

Data Structures

- struct qt_meta_stringdata_GradientDialogWidget_t

Macros

- #define QT_MOC_LITERAL(idx, ofs, len)

Variables

- static const qt_meta_stringdata_GradientDialogWidget_t qt_meta_stringdata_GradientDialogWidget
- static const uint qt_meta_data_GradientDialogWidget [ ]

13.122.1 Data Structure Documentation

13.122.1.1 struct qt_meta_stringdata_GradientDialogWidget_t

Definition at line 21 of file moc_gradientdialogwidget.cpp.

Collaboration diagram for qt_meta_stringdata_GradientDialogWidget_t:

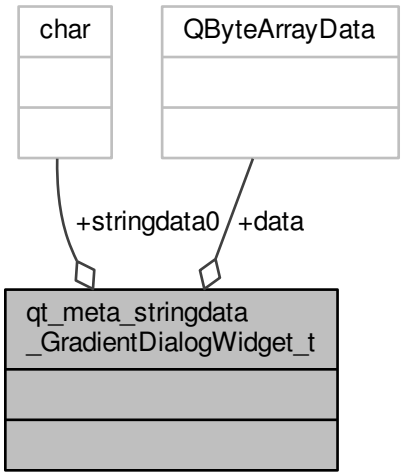

Data Fields

QByteArrayData	data[6]	
char	stringdata0[64]	

13.122.2 Macro Definition Documentation

13.122.2.1 #define QT_MOC_LITERAL(*idx, ofs, len*)

Value:

```
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET(len, \
    qptrdiff(offsetof(qt_meta_stringdata_GradientDialogWidget_t,
      stringdata0) + ofs \
        - idx * sizeof(QByteArrayData)) \
    )
```

Definition at line 25 of file moc_gradientdialogwidget.cpp.

13.122.3 Variable Documentation

13.122.3.1 const uint qt_meta_data_GradientDialogWidget[] [static]

Initial value:

```
= {

       7,
       0,
       0,    0,
       1,   14,
       0,    0,
       0,    0,
       0,    0,
```

```
       0,
       1,

       1,    3,   19,    2, 0x06 ,

    QMetaType::Void, QMetaType::QColor, QMetaType::Bool, QMetaType::Int,    3,    4,    5,

       0
}
```

Definition at line 45 of file moc_gradientdialogwidget.cpp.

13.122.3.2 const qt_meta_stringdata_GradientDialogWidget_t qt_meta_stringdata_GradientDialogWidget [static]

Initial value:

```
= {
    {
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 20 ,   qptrdiff(offsetof(
      qt_meta_stringdata_GradientDialogWidget_t, stringdata0) +  0    -
       0  * sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 14 ,   qptrdiff(offsetof(
      qt_meta_stringdata_GradientDialogWidget_t, stringdata0) +  21    -
        1  * sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 0 ,   qptrdiff(offsetof(
      qt_meta_stringdata_GradientDialogWidget_t, stringdata0) +  36    -
        2  * sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 5 ,   qptrdiff(offsetof(
      qt_meta_stringdata_GradientDialogWidget_t, stringdata0) +  37    -
        3  * sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 11 ,   qptrdiff(offsetof(
      qt_meta_stringdata_GradientDialogWidget_t, stringdata0) +  43    -
        4  * sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 8 ,   qptrdiff(offsetof(
      qt_meta_stringdata_GradientDialogWidget_t, stringdata0) +  55    -
        5  * sizeof(QByteArrayData))   )

    },
    "GradientDialogWidget\0currentChanged\0"
    "\0color\0spontaneous\0position"
}
```

Definition at line 30 of file moc_gradientdialogwidget.cpp.

13.123 src/ckb/release/moc_kb.cpp File Reference

```
#include "../kb.h"
#include <QtCore/qbytearray.h>
#include <QtCore/qmetatype.h>
```

Include dependency graph for moc_kb.cpp:

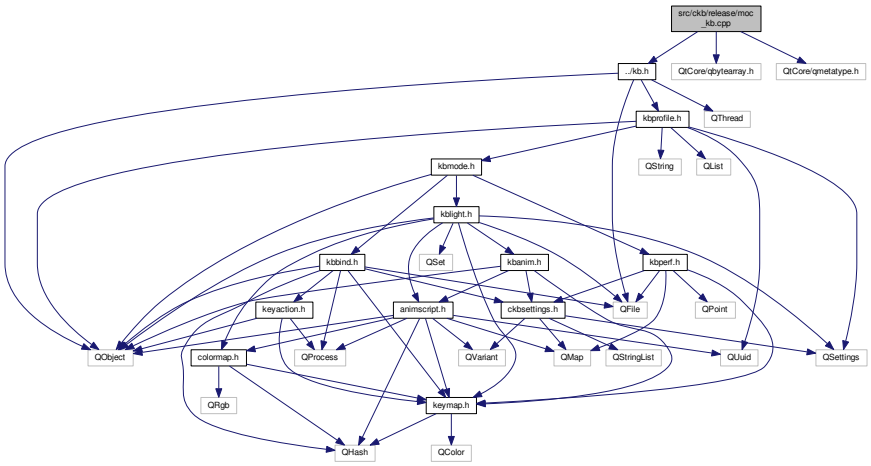

Data Structures

- struct qt_meta_stringdata_Kb_t

Macros

- #define QT_MOC_LITERAL(idx, ofs, len)

Variables

- static const qt_meta_stringdata_Kb_t qt_meta_stringdata_Kb
- static const uint qt_meta_data_Kb [ ]

13.123.1 Data Structure Documentation

13.123.1.1 struct qt_meta_stringdata_Kb_t

Definition at line 21 of file moc_kb.cpp.

Collaboration diagram for qt_meta_stringdata_Kb_t:

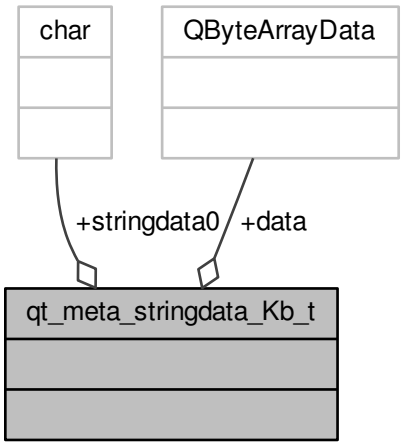

Data Fields

QByteArrayData	data[20]	
char	stringdata0[214]	

13.123.2 Macro Definition Documentation

13.123.2.1 #define QT_MOC_LITERAL(*idx, ofs, len*)

Value:

```
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET(len, \
    qptrdiff(offsetof(qt_meta_stringdata_Kb_t, stringdata0) + ofs \
        - idx * sizeof(QByteArrayData)) \
    )
```

Definition at line 25 of file moc_kb.cpp.

13.123.3 Variable Documentation

13.123.3.1 const uint qt_meta_data_Kb[] [static]

Definition at line 63 of file moc_kb.cpp.

13.123.3.2 const qt_meta_stringdata_Kb_t qt_meta_stringdata_Kb [static]

Definition at line 30 of file moc_kb.cpp.

13.124 src/ckb/release/moc_kbanim.cpp File Reference

```
#include "../kbanim.h"
#include <QtCore/qbytearray.h>
#include <QtCore/qmetatype.h>
```

Include dependency graph for moc_kbanim.cpp:

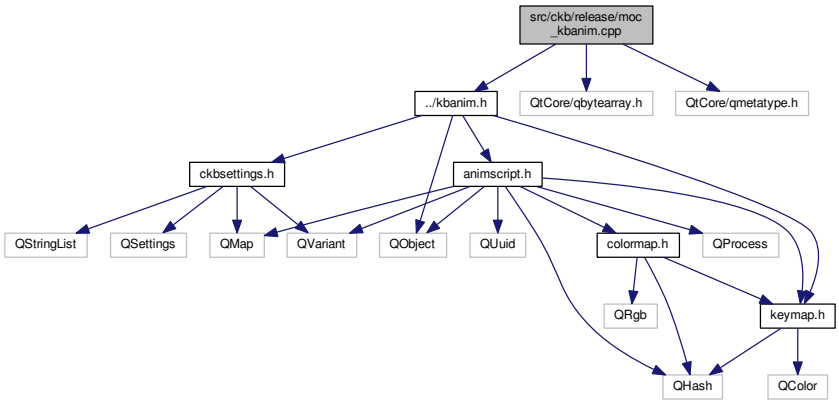

Data Structures

- struct qt_meta_stringdata_KbAnim_t

Macros

- #define QT_MOC_LITERAL(idx, ofs, len)

Variables

- static const qt_meta_stringdata_KbAnim_t qt_meta_stringdata_KbAnim
- static const uint qt_meta_data_KbAnim [ ]

13.124.1 Data Structure Documentation

13.124.1.1 struct qt_meta_stringdata_KbAnim_t

Definition at line 21 of file moc_kbanim.cpp.

Collaboration diagram for qt_meta_stringdata_KbAnim_t:

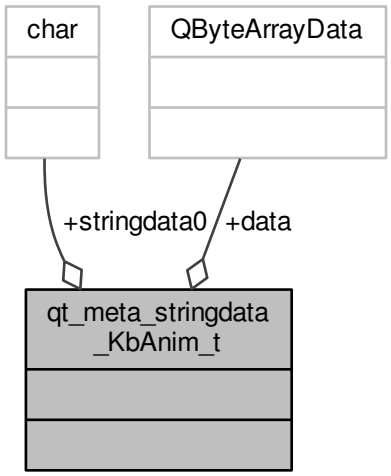

Data Fields

QByteArrayData	data[7]	
char	stringdata0[48]	

13.124.2 Macro Definition Documentation

13.124.2.1 #define QT_MOC_LITERAL(*idx, ofs, len*)

Value:

```
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET(len, \
    qptrdiff(offsetof(qt_meta_stringdata_KbAnim_t, stringdata0) + ofs \
        - idx * sizeof(QByteArrayData)) \
    )
```

Definition at line 25 of file moc_kbanim.cpp.

13.124.3 Variable Documentation

13.124.3.1 const uint qt_meta_data_KbAnim[] [static]

Initial value:

```
= {

       7,
       0,
       0,    0,
       0,    0,
       0,    0,
       1,   14,
       0,    0,
       0,
```

```
        0,

        1, 0x0,    5,   18,

        2, uint(KbAnim::Normal),
        3, uint(KbAnim::Add),
        4, uint(KbAnim::Subtract),
        5, uint(KbAnim::Multiply),
        6, uint(KbAnim::Divide),

        0
}
```

Definition at line 46 of file moc_kbanim.cpp.

13.124.3.2 const qt_meta_stringdata_KbAnim_t qt_meta_stringdata_KbAnim [static]

Initial value:

```
= {
    {
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 6 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbAnim_t, stringdata0) +  0    -  0  * sizeof(QByteArrayData)
      )   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 4 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbAnim_t, stringdata0) +  7    -  1  * sizeof(QByteArrayData)
      )   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 6 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbAnim_t, stringdata0) +  12    -  2  * sizeof(QByteArrayData
      ))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 3 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbAnim_t, stringdata0) +  19    -  3  * sizeof(QByteArrayData
      ))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 8 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbAnim_t, stringdata0) +  23    -  4  * sizeof(QByteArrayData
      ))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 8 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbAnim_t, stringdata0) +  32    -  5  * sizeof(QByteArrayData
      ))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 6 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbAnim_t, stringdata0) +  41    -  6  * sizeof(QByteArrayData
      ))   )

    },
    "KbAnim\0Mode\0Normal\0Add\0Subtract\0"
    "Multiply\0Divide"
}
```

Definition at line 30 of file moc_kbanim.cpp.

13.125 src/ckb/release/moc_kbanimwidget.cpp File Reference

```
#include "../kbanimwidget.h"
#include <QtCore/qbytearray.h>
#include <QtCore/qmetatype.h>
```

Include dependency graph for moc_kbanimwidget.cpp:

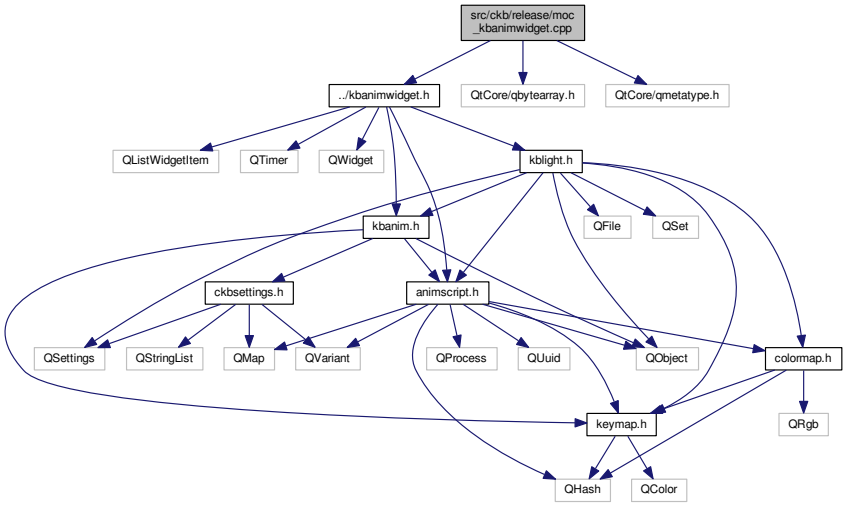

Data Structures

- struct qt_meta_stringdata_KbAnimWidget_t

Macros

- #define QT_MOC_LITERAL(idx, ofs, len)

Variables

- static const qt_meta_stringdata_KbAnimWidget_t qt_meta_stringdata_KbAnimWidget
- static const uint qt_meta_data_KbAnimWidget []

13.125.1 Data Structure Documentation

13.125.1.1 struct qt_meta_stringdata_KbAnimWidget_t

Definition at line 21 of file moc_kbanimwidget.cpp.

Collaboration diagram for qt_meta_stringdata_KbAnimWidget_t:

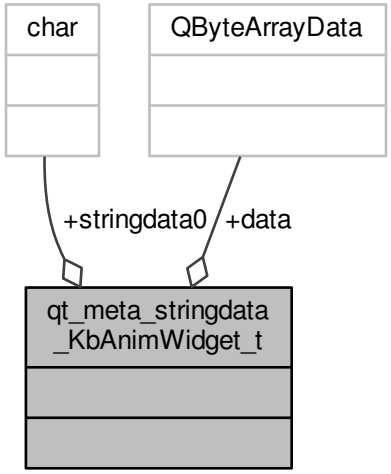

Data Fields

QByteArrayData	data[25]	
char	stringdata0[383]	

13.125.2 Macro Definition Documentation

13.125.2.1 #define QT_MOC_LITERAL(*idx, ofs, len*)

Value:

```
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET(len, \
    qptrdiff(offsetof(qt_meta_stringdata_KbAnimWidget_t, stringdata0) +
      ofs \
        - idx * sizeof(QByteArrayData)) \
    )
```

Definition at line 25 of file moc_kbanimwidget.cpp.

13.125.3 Variable Documentation

13.125.3.1 const uint qt_meta_data_KbAnimWidget[] [static]

Definition at line 74 of file moc_kbanimwidget.cpp.

13.125.3.2 const qt_meta_stringdata_KbAnimWidget_t qt_meta_stringdata_KbAnimWidget [static]

Definition at line 30 of file moc_kbanimwidget.cpp.

13.126 src/ckb/release/moc_kbbind.cpp File Reference

```
#include "../kbbind.h"
#include <QtCore/qbytearray.h>
#include <QtCore/qmetatype.h>
```

Include dependency graph for moc_kbbind.cpp:

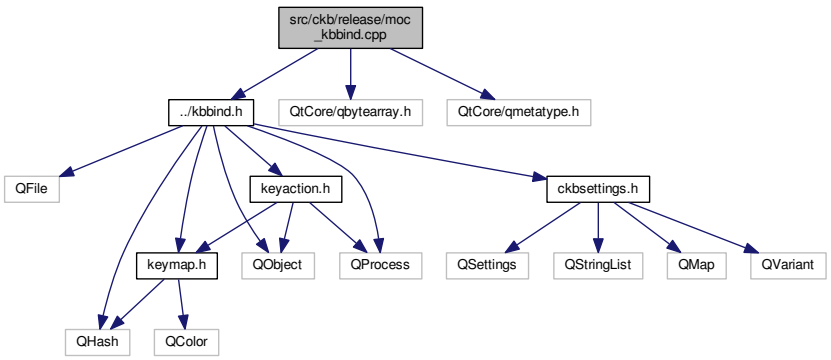

Data Structures

- struct qt_meta_stringdata_KbBind_t

Macros

- #define QT_MOC_LITERAL(idx, ofs, len)

Variables

- static const qt_meta_stringdata_KbBind_t qt_meta_stringdata_KbBind
- static const uint qt_meta_data_KbBind []

13.126.1 Data Structure Documentation

13.126.1.1 struct qt_meta_stringdata_KbBind_t

Definition at line 21 of file moc_kbbind.cpp.

Collaboration diagram for qt_meta_stringdata_KbBind_t:

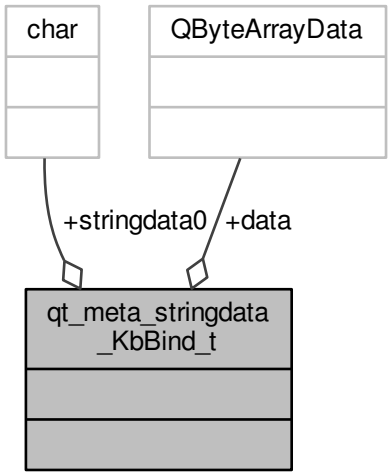

Data Fields

QByteArrayData	data[8]	
char	stringdata0[56]	

13.126.2 Macro Definition Documentation

13.126.2.1 #define QT_MOC_LITERAL(*idx, ofs, len*)

Value:

```
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET(len, \
    qptrdiff(offsetof(qt_meta_stringdata_KbBind_t, stringdata0) + ofs \
        - idx * sizeof(QByteArrayData)) \
    )
```

Definition at line 25 of file moc_kbbind.cpp.

13.126.3 Variable Documentation

13.126.3.1 const uint qt_meta_data_KbBind[] [static]

Definition at line 47 of file moc_kbbind.cpp.

13.126.3.2 const qt_meta_stringdata_KbBind_t qt_meta_stringdata_KbBind [static]

Initial value:

```
= {
    {
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 6 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbBind_t, stringdata0) +  0    -  0  * sizeof(QByteArrayData)
```

```
      )   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 7 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbBind_t, stringdata0) +  7    -  1  * sizeof(QByteArrayData)
      )   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 0 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbBind_t, stringdata0) +  15    -  2  * sizeof(QByteArrayData
      ))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 13 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbBind_t, stringdata0) +  16    -  3  * sizeof(QByteArrayData
      ))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 7 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbBind_t, stringdata0) +  30    -  4  * sizeof(QByteArrayData
      ))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 8 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbBind_t, stringdata0) +  38    -  5  * sizeof(QByteArrayData
      ))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 3 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbBind_t, stringdata0) +  47    -  6  * sizeof(QByteArrayData
      ))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 4 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbBind_t, stringdata0) +  51    -  7  * sizeof(QByteArrayData
      ))   )

    },
    "KbBind\0didLoad\0\0layoutChanged\0updated\0"
    "keyEvent\0key\0down"
}
```

Definition at line 30 of file moc_kbbind.cpp.

13.127 src/ckb/release/moc_kbbindwidget.cpp File Reference

```
#include "../kbbindwidget.h"
#include <QtCore/qbytearray.h>
#include <QtCore/qmetatype.h>
```

Include dependency graph for moc_kbbindwidget.cpp:

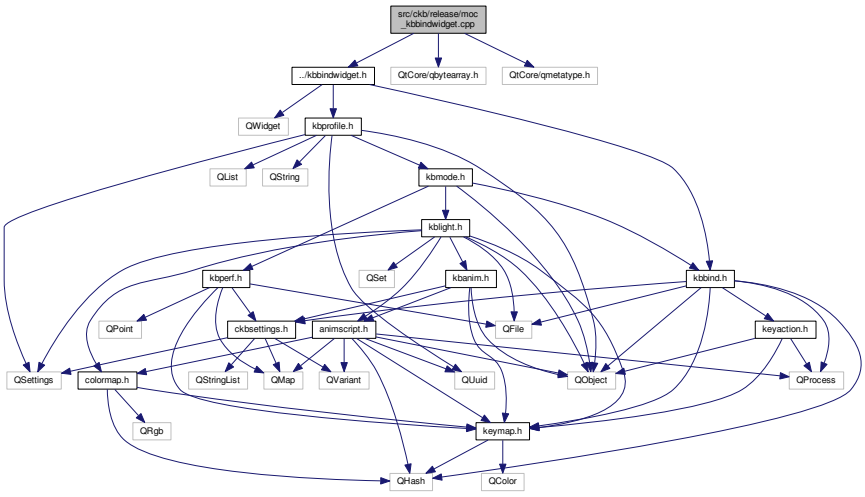

Data Structures

- struct qt_meta_stringdata_KbBindWidget_t

Macros

- #define QT_MOC_LITERAL(idx, ofs, len)

Variables

- static const qt_meta_stringdata_KbBindWidget_t qt_meta_stringdata_KbBindWidget
- static const uint qt_meta_data_KbBindWidget [ ]

13.127.1 Data Structure Documentation

13.127.1.1 struct qt_meta_stringdata_KbBindWidget_t

Definition at line 21 of file moc_kbbindwidget.cpp.

Collaboration diagram for qt_meta_stringdata_KbBindWidget_t:

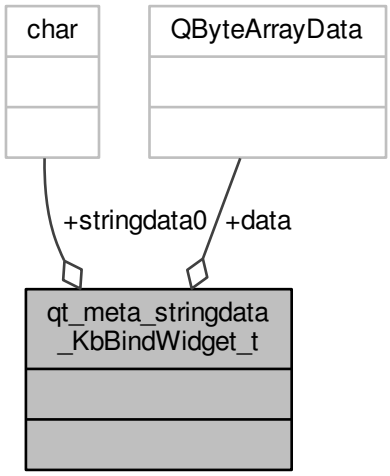

Data Fields

QByteArrayData	data[9]	
char	stringdata0[120]	

13.127.2 Macro Definition Documentation

13.127.2.1 #define QT_MOC_LITERAL(*idx, ofs, len*)

Value:

```
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET(len, \
    qptrdiff(offsetof(qt_meta_stringdata_KbBindWidget_t, stringdata0) +
      ofs \
        - idx * sizeof(QByteArrayData)) \
    )
```

Definition at line 25 of file moc_kbbindwidget.cpp.

13.127.3 Variable Documentation

13.127.3.1 const uint qt_meta_data_KbBindWidget[] [static]

Definition at line 49 of file moc_kbbindwidget.cpp.

13.127.3.2 const qt_meta_stringdata_KbBindWidget_t qt_meta_stringdata_KbBindWidget [static]

Initial value:

```
= {
    {
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 12 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbBindWidget_t, stringdata0) +  0    -  0  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 10 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbBindWidget_t, stringdata0) +  13    -  1  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 0 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbBindWidget_t, stringdata0) +  24    -  2  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 9 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbBindWidget_t, stringdata0) +  25    -  3  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 12 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbBindWidget_t, stringdata0) +  35    -  4  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 9 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbBindWidget_t, stringdata0) +  48    -  5  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 16 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbBindWidget_t, stringdata0) +  58    -  6  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 22 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbBindWidget_t, stringdata0) +  75    -  7  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 21 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbBindWidget_t, stringdata0) +  98    -  8  * sizeof(
      QByteArrayData))   )

    },
    "KbBindWidget\0updateBind\0\0newLayout\0"
    "newSelection\0selection\0updateSelDisplay\0"
    "on_resetButton_clicked\0on_copyButton_clicked"
}
```

Definition at line 30 of file moc_kbbindwidget.cpp.

13.128 src/ckb/release/moc_kbfirmware.cpp File Reference

```
#include "../kbfirmware.h"
#include <QtCore/qbytearray.h>
#include <QtCore/qmetatype.h>
```

Include dependency graph for moc_kbfirmware.cpp:

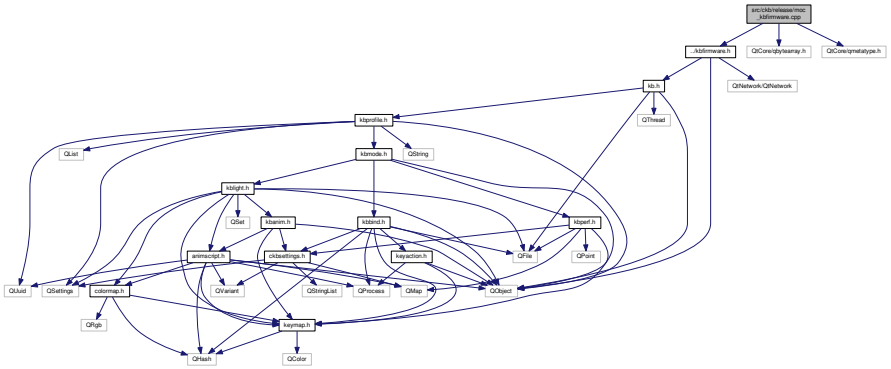

Data Structures

- struct qt_meta_stringdata_KbFirmware_t

Macros

- #define QT_MOC_LITERAL(idx, ofs, len)

Variables

- static const qt_meta_stringdata_KbFirmware_t qt_meta_stringdata_KbFirmware
- static const uint qt_meta_data_KbFirmware [ ]

13.128.1 Data Structure Documentation

13.128.1.1 struct qt_meta_stringdata_KbFirmware_t

Definition at line 21 of file moc_kbfirmware.cpp.

Collaboration diagram for qt_meta_stringdata_KbFirmware_t:

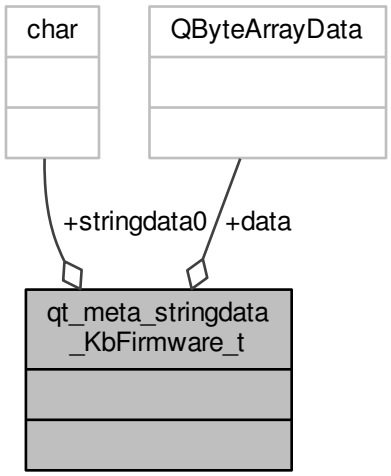

Data Fields

QByteArrayData	data[7]	
char	stringdata0[77]	

13.128.2 Macro Definition Documentation

13.128.2.1 #define QT_MOC_LITERAL(*idx, ofs, len*)

Value:

```
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET(len, \
    qptrdiff(offsetof(qt_meta_stringdata_KbFirmware_t, stringdata0) + ofs \
        - idx * sizeof(QByteArrayData)) \
    )
```

Definition at line 25 of file moc_kbfirmware.cpp.

13.128.3 Variable Documentation

13.128.3.1 const uint qt_meta_data_KbFirmware[] [static]

Initial value:

```
= {

       7,
       0,
       0,    0,
       3,   14,
       0,    0,
       0,    0,
       0,    0,
       0,
```

```
       1,

       1,    0,   29,    2, 0x06 ,

       3,    1,   30,    2, 0x08 ,
       6,    0,   33,    2, 0x08 ,

    QMetaType::Void,

    QMetaType::Void, 0x80000000 | 4,    5,
    QMetaType::Void,

       0
}
```

Definition at line 46 of file moc_kbfirmware.cpp.

13.128.3.2 const qt_meta_stringdata_KbFirmware_t qt_meta_stringdata_KbFirmware [static]

Initial value:

```
= {
    {
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 10 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbFirmware_t, stringdata0) +  0    -  0  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 10 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbFirmware_t, stringdata0) +  11    -  1  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 0 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbFirmware_t, stringdata0) +  22    -  2  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 15 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbFirmware_t, stringdata0) +  23    -  3  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 14 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbFirmware_t, stringdata0) +  39    -  4  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 5 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbFirmware_t, stringdata0) +  54    -  5  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 16 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbFirmware_t, stringdata0) +  60    -  6  * sizeof(
      QByteArrayData))   )

    },
    "KbFirmware\0downloaded\0\0processDownload\0"
    "QNetworkReply*\0reply\0downloadFinished"
}
```

Definition at line 30 of file moc_kbfirmware.cpp.

13.129 src/ckb/release/moc_kblight.cpp File Reference

```
#include "../kblight.h"
#include <QtCore/qbytearray.h>
#include <QtCore/qmetatype.h>
#include <QtCore/QSet>
```

Include dependency graph for moc_kblight.cpp:

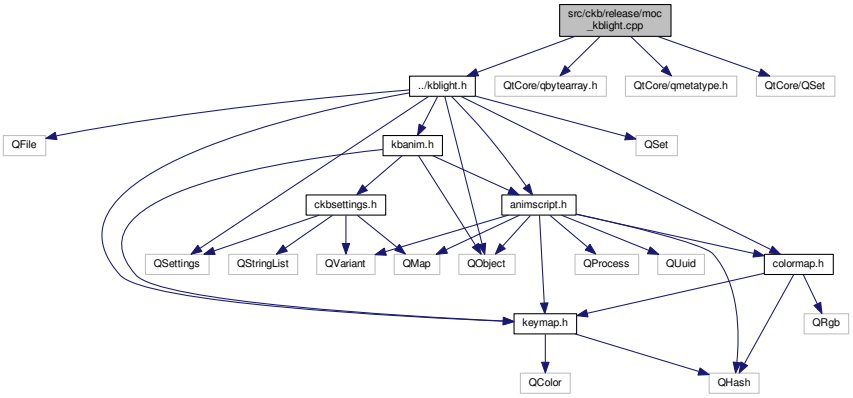

Data Structures

- struct qt_meta_stringdata_KbLight_t

Macros

- #define QT_MOC_LITERAL(idx, ofs, len)

Variables

- static const qt_meta_stringdata_KbLight_t qt_meta_stringdata_KbLight
- static const uint qt_meta_data_KbLight [ ]

13.129.1 Data Structure Documentation

13.129.1.1 struct qt_meta_stringdata_KbLight_t

Definition at line 22 of file moc_kblight.cpp.

Collaboration diagram for qt_meta_stringdata_KbLight_t:

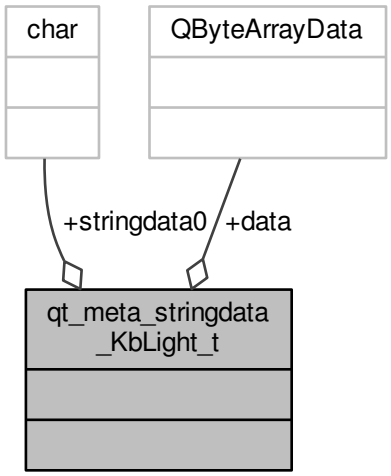

Data Fields

QByteArrayData	data[9]	
char	stringdata0[92]	

13.129.2 Macro Definition Documentation

13.129.2.1 #define QT_MOC_LITERAL(*idx, ofs, len*)

Value:

```
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET(len, \
    qptrdiff(offsetof(qt_meta_stringdata_KbLight_t, stringdata0) + ofs \
        - idx * sizeof(QByteArrayData)) \
    )
```

Definition at line 26 of file moc_kblight.cpp.

13.129.3 Variable Documentation

13.129.3.1 const uint qt_meta_data_KbLight[ ] [static]

Initial value:

```
= {

       7,
       0,
       0,    0,
       3,   14,
       0,    0,
       0,    0,
       0,    0,
       0,
```

```
       3,

       1,    0,   29,    2, 0x06 ,
       3,    0,   30,    2, 0x06 ,
       4,    2,   31,    2, 0x06 ,

    QMetaType::Void,
    QMetaType::Void,
    QMetaType::Void, 0x80000000 | 5, 0x80000000 | 7,    6,    8,

       0
}
```

Definition at line 50 of file moc_kblight.cpp.

13.129.3.2 const qt_meta_stringdata_KbLight_t qt_meta_stringdata_KbLight [static]

Initial value:

```
= {
    {
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 7 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbLight_t, stringdata0) +  0    -  0  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 7 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbLight_t, stringdata0) +  8    -  1  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 0 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbLight_t, stringdata0) +  16    -  2  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 7 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbLight_t, stringdata0) +  17    -  3  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 14 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbLight_t, stringdata0) +  25    -  4  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 8 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbLight_t, stringdata0) +  40    -  5  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 14 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbLight_t, stringdata0) +  49    -  6  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 13 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbLight_t, stringdata0) +  64    -  7  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 13 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbLight_t, stringdata0) +  78    -  8  * sizeof(
      QByteArrayData))   )

    },
    "KbLight\0didLoad\0\0updated\0frameDisplayed\0"
    "ColorMap\0animatedColors\0QSet<QString>\0"
    "indicatorList"
}
```

Definition at line 31 of file moc_kblight.cpp.

13.130 src/ckb/release/moc_kblightwidget.cpp File Reference

```
#include "../kblightwidget.h"
#include <QtCore/qbytearray.h>
#include <QtCore/qmetatype.h>
```

Include dependency graph for moc_kblightwidget.cpp:

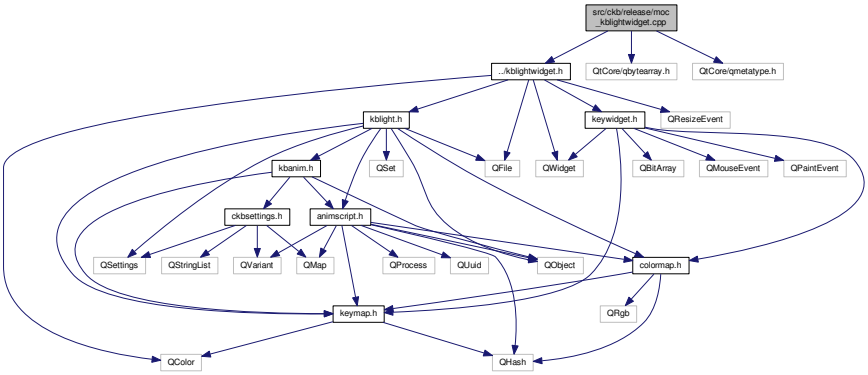

Data Structures

- struct qt_meta_stringdata_KbLightWidget_t

Macros

- #define QT_MOC_LITERAL(idx, ofs, len)

Variables

- static const qt_meta_stringdata_KbLightWidget_t qt_meta_stringdata_KbLightWidget
- static const uint qt_meta_data_KbLightWidget [ ]

13.130.1 Data Structure Documentation

13.130.1.1 struct qt_meta_stringdata_KbLightWidget_t

Definition at line 21 of file moc_kblightwidget.cpp.

Collaboration diagram for qt_meta_stringdata_KbLightWidget_t:

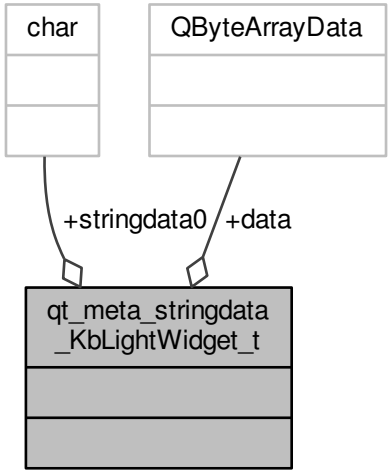

Data Fields

QByteArrayData	data[19]	
char	stringdata0[240]	

13.130.2 Macro Definition Documentation

13.130.2.1 #define QT_MOC_LITERAL(*idx, ofs, len*)

Value:

```
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET(len, \
    qptrdiff(offsetof(qt_meta_stringdata_KbLightWidget_t, stringdata0) +
      ofs \
        - idx * sizeof(QByteArrayData)) \
    )
```

Definition at line 25 of file moc_kblightwidget.cpp.

13.130.3 Variable Documentation

13.130.3.1 const uint qt_meta_data_KbLightWidget[] [static]

Definition at line 63 of file moc_kblightwidget.cpp.

13.130.3.2 const qt_meta_stringdata_KbLightWidget_t qt_meta_stringdata_KbLightWidget [static]

Definition at line 30 of file moc_kblightwidget.cpp.

13.131 src/ckb/release/moc_kbmanager.cpp File Reference

```
#include "../kbmanager.h"
#include <QtCore/qbytearray.h>
#include <QtCore/qmetatype.h>
```

Include dependency graph for moc_kbmanager.cpp:

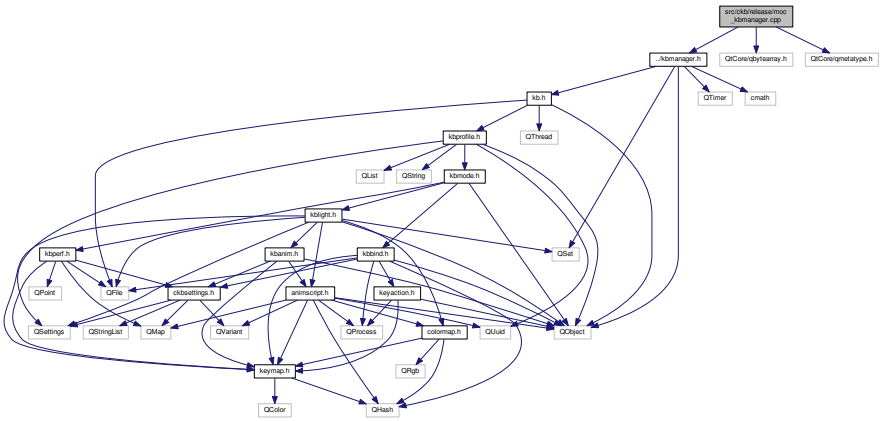

Data Structures

- struct qt_meta_stringdata_KbManager_t

Macros

- #define QT_MOC_LITERAL(idx, ofs, len)

Variables

- static const qt_meta_stringdata_KbManager_t qt_meta_stringdata_KbManager
- static const uint qt_meta_data_KbManager [ ]

13.131.1 Data Structure Documentation

13.131.1.1 struct qt_meta_stringdata_KbManager_t

Definition at line 21 of file moc_kbmanager.cpp.

Collaboration diagram for qt_meta_stringdata_KbManager_t:

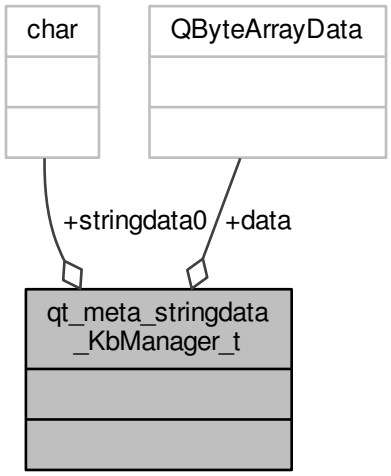

Data Fields

QByteArrayData	data[8]	
char	stringdata0[78]	

13.131.2 Macro Definition Documentation

13.131.2.1 #define QT_MOC_LITERAL(*idx, ofs, len*)

Value:

```
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET(len, \
    qptrdiff(offsetof(qt_meta_stringdata_KbManager_t, stringdata0) + ofs \
        - idx * sizeof(QByteArrayData)) \
    )
```

Definition at line 25 of file moc_kbmanager.cpp.

13.131.3 Variable Documentation

13.131.3.1 const uint qt_meta_data_KbManager[] [static]

Definition at line 48 of file moc_kbmanager.cpp.

13.131.3.2 const qt_meta_stringdata_KbManager_t qt_meta_stringdata_KbManager [static]

Initial value:

```
= {
    {
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 9 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbManager_t, stringdata0) +  0    -  0  * sizeof(
```

```
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 11 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbManager_t, stringdata0) +  10    -  1  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 0 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbManager_t, stringdata0) +  22    -  2  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 3 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbManager_t, stringdata0) +  23    -  3  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 6 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbManager_t, stringdata0) +  27    -  4  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 14 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbManager_t, stringdata0) +  34    -  5  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 14 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbManager_t, stringdata0) +  49    -  6  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 13 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbManager_t, stringdata0) +  64    -  7  * sizeof(
      QByteArrayData))   )

    },
    "KbManager\0kbConnected\0\0Kb*\0device\0"
    "kbDisconnected\0versionUpdated\0"
    "scanKeyboards"
}
```

Definition at line 30 of file moc_kbmanager.cpp.

13.132 src/ckb/release/moc_kbmode.cpp File Reference

```
#include "../kbmode.h"
#include <QtCore/qbytearray.h>
#include <QtCore/qmetatype.h>
```

Include dependency graph for moc_kbmode.cpp:

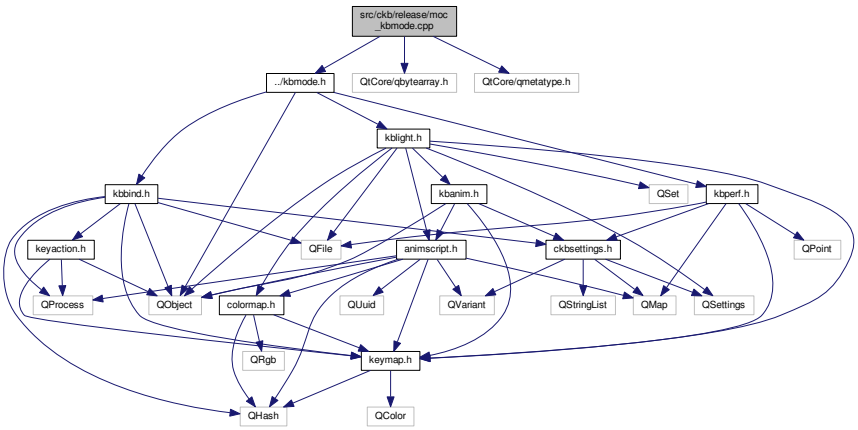

Data Structures

- struct qt_meta_stringdata_KbMode_t

Macros

- #define QT_MOC_LITERAL(idx, ofs, len)

Variables

- static const qt_meta_stringdata_KbMode_t qt_meta_stringdata_KbMode
- static const uint qt_meta_data_KbMode [ ]

13.132.1 Data Structure Documentation

13.132.1.1 struct qt_meta_stringdata_KbMode_t

Definition at line 21 of file moc_kbmode.cpp.

Collaboration diagram for qt_meta_stringdata_KbMode_t:

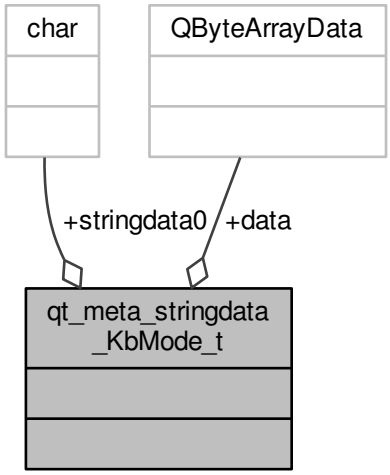

Data Fields

QByteArrayData	data[4]	
char	stringdata0[25]	

13.132.2 Macro Definition Documentation

13.132.2.1 #define QT_MOC_LITERAL(*idx, ofs, len*)

Value:

```
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET(len, \
    qptrdiff(offsetof(qt_meta_stringdata_KbMode_t, stringdata0) + ofs \
        - idx * sizeof(QByteArrayData)) \
    )
```

Definition at line 25 of file moc_kbmode.cpp.

13.132.3 Variable Documentation

13.132.3.1 const uint qt_meta_data_KbMode[] [static]

Initial value:

```
= {

       7,
       0,
       0,    0,
       2,   14,
       0,    0,
       0,    0,
       0,    0,
       0,
       1,


       1,    0,   24,    2, 0x06 ,


       3,    0,   25,    2, 0x08 ,


    QMetaType::Void,


    QMetaType::Void,

       0
}
```

Definition at line 42 of file moc_kbmode.cpp.

13.132.3.2 const qt_meta_stringdata_KbMode_t qt_meta_stringdata_KbMode [static]

Initial value:

```
= {
    {
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 6 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbMode_t, stringdata0) +  0    -  0  * sizeof(QByteArrayData)
      )   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 7 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbMode_t, stringdata0) +  7    -  1  * sizeof(QByteArrayData)
      )   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 0 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbMode_t, stringdata0) +  15    -  2  * sizeof(QByteArrayData
      ))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 8 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbMode_t, stringdata0) +  16    -  3  * sizeof(QByteArrayData
      ))   )

    },
    "KbMode\0updated\0\0doUpdate"
}
```

Definition at line 30 of file moc_kbmode.cpp.

13.133 src/ckb/release/moc_kbperf.cpp File Reference

```
#include "../kbperf.h"
#include <QtCore/qbytearray.h>
#include <QtCore/qmetatype.h>
```

Include dependency graph for moc_kbperf.cpp:

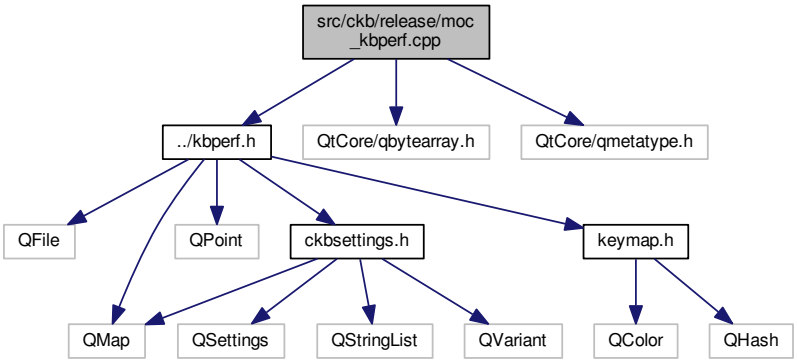

Data Structures

- struct qt_meta_stringdata_KbPerf_t

Macros

- #define QT_MOC_LITERAL(idx, ofs, len)

Variables

- static const qt_meta_stringdata_KbPerf_t qt_meta_stringdata_KbPerf
- static const uint qt_meta_data_KbPerf [ ]

13.133.1 Data Structure Documentation

13.133.1.1 struct qt_meta_stringdata_KbPerf_t

Definition at line 21 of file moc_kbperf.cpp.

Collaboration diagram for qt_meta_stringdata_KbPerf_t:

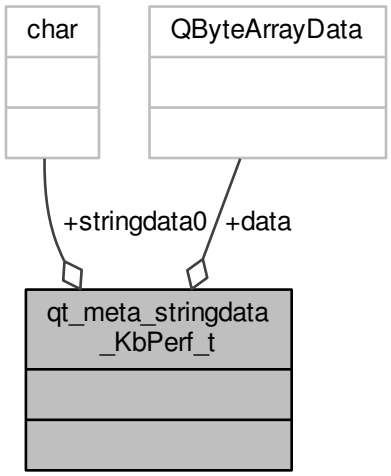

Data Fields

QByteArrayData	data[4]	
char	stringdata0[32]	

13.133.2 Macro Definition Documentation

13.133.2.1 #define QT_MOC_LITERAL(*idx, ofs, len*)

Value:

```
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET(len, \
    qptrdiff(offsetof(qt_meta_stringdata_KbPerf_t, stringdata0) + ofs \
        - idx * sizeof(QByteArrayData)) \
    )
```

Definition at line 25 of file moc_kbperf.cpp.

13.133.3 Variable Documentation

13.133.3.1 const uint qt_meta_data_KbPerf[] [static]

Initial value:

```
= {

       7,
       0,
       0,    0,
       2,   14,
       0,    0,
       0,    0,
       0,    0,
       0,
```

```
        2,

        1,    0,   24,    2, 0x06 ,
        3,    0,   25,    2, 0x06 ,

    QMetaType::Void,
    QMetaType::Void,

        0
}
```

Definition at line 42 of file moc_kbperf.cpp.

13.133.3.2 const qt_meta_stringdata_KbPerf_t qt_meta_stringdata_KbPerf [static]

Initial value:

```
= {
    {
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 6 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbPerf_t, stringdata0) +  0    -  0  * sizeof(QByteArrayData)
      )   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 7 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbPerf_t, stringdata0) +  7    -  1  * sizeof(QByteArrayData)
      )   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 0 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbPerf_t, stringdata0) +  15    -  2  * sizeof(QByteArrayData
      ))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 15 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbPerf_t, stringdata0) +  16    -  3  * sizeof(QByteArrayData
      ))   )

    },
    "KbPerf\0didLoad\0\0settingsUpdated"
}
```

Definition at line 30 of file moc_kbperf.cpp.

13.134 src/ckb/release/moc_kbprofile.cpp File Reference

```
#include "../kbprofile.h"
#include <QtCore/qbytearray.h>
#include <QtCore/qmetatype.h>
```

Include dependency graph for moc_kbprofile.cpp:

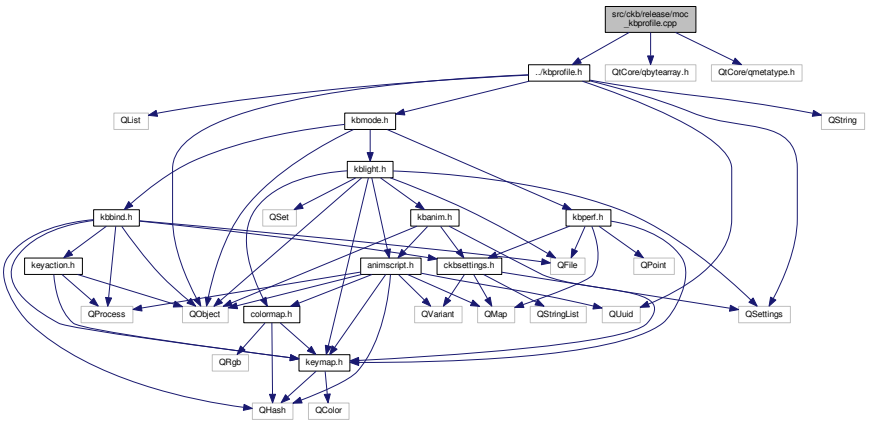

Data Structures

- struct qt_meta_stringdata_KbProfile_t

Macros

- #define QT_MOC_LITERAL(idx, ofs, len)

Variables

- static const qt_meta_stringdata_KbProfile_t qt_meta_stringdata_KbProfile
- static const uint qt_meta_data_KbProfile []

13.134.1 Data Structure Documentation

13.134.1.1 struct qt_meta_stringdata_KbProfile_t

Definition at line 21 of file moc_kbprofile.cpp.

Collaboration diagram for qt_meta_stringdata_KbProfile_t:

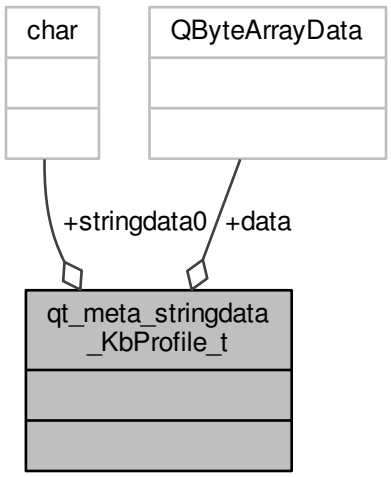

Data Fields

QByteArrayData	data[1]	
char	stringdata0[10]	

13.134.2 Macro Definition Documentation

13.134.2.1 #define QT_MOC_LITERAL(*idx, ofs, len*)

Value:

```
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET(len, \
    qptrdiff(offsetof(qt_meta_stringdata_KbProfile_t, stringdata0) + ofs \
        - idx * sizeof(QByteArrayData)) \
    )
```

Definition at line 25 of file moc_kbprofile.cpp.

13.134.3 Variable Documentation

13.134.3.1 const uint qt_meta_data_KbProfile[] [static]

Initial value:

```
= {

       7,
       0,
       0,    0,
       0,    0,
       0,    0,
       0,    0,
       0,    0,
       0,
       0,

       0
}
```

Definition at line 39 of file moc_kbprofile.cpp.

13.134.3.2 const qt_meta_stringdata_KbProfile_t qt_meta_stringdata_KbProfile [static]

Initial value:

```
= {
    {
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 9 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbProfile_t, stringdata0) +  0    -  0  * sizeof(
      QByteArrayData))   )

    },
    "KbProfile"
}
```

Definition at line 30 of file moc_kbprofile.cpp.

13.135 src/ckb/release/moc_kbprofiledialog.cpp File Reference

```
#include "../kbprofiledialog.h"
#include <QtCore/qbytearray.h>
#include <QtCore/qmetatype.h>
```

Include dependency graph for moc_kbprofiledialog.cpp:

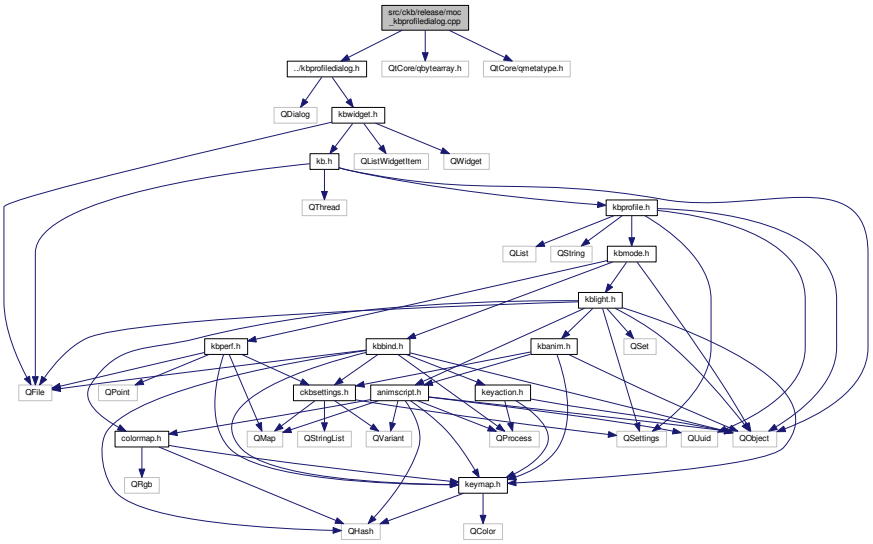

Data Structures

- struct qt_meta_stringdata_KbProfileDialog_t

Macros

- #define QT_MOC_LITERAL(idx, ofs, len)

Variables

- static const qt_meta_stringdata_KbProfileDialog_t qt_meta_stringdata_KbProfileDialog
- static const uint qt_meta_data_KbProfileDialog []

13.135.1 Data Structure Documentation

13.135.1.1 struct qt_meta_stringdata_KbProfileDialog_t

Definition at line 21 of file moc_kbprofiledialog.cpp.

Collaboration diagram for qt_meta_stringdata_KbProfileDialog_t:

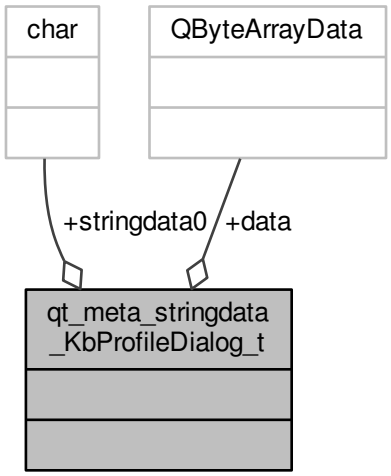

Data Fields

QByteArrayData	data[12]	
char	stringdata0[212]	

13.135.2 Macro Definition Documentation

13.135.2.1 #define QT_MOC_LITERAL(*idx, ofs, len*)

Value:

```
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET(len, \
    qptrdiff(offsetof(qt_meta_stringdata_KbProfileDialog_t, stringdata0
      ) + ofs \
        - idx * sizeof(QByteArrayData)) \
    )
```

Definition at line 25 of file moc_kbprofiledialog.cpp.

13.135.3 Variable Documentation

13.135.3.1 const uint qt_meta_data_KbProfileDialog[] [static]

Initial value:

```
= {

       7,
       0,
       0,    0,
       5,   14,
       0,    0,
       0,    0,
       0,    0,
```

```
        0,
        0,


        1,    0,   39,    2, 0x08 ,
        3,    2,   40,    2, 0x08 ,
        7,    1,   45,    2, 0x08 ,
        9,    1,   48,    2, 0x08 ,
       10,    1,   51,    2, 0x08 ,


    QMetaType::Void,
    QMetaType::Void, 0x80000000 | 4, 0x80000000 | 4,    5,    6,
    QMetaType::Void, 0x80000000 | 4,    8,
    QMetaType::Void, 0x80000000 | 4,    8,
    QMetaType::Void, QMetaType::QPoint,   11,

        0
}
```

Definition at line 56 of file moc_kbprofiledialog.cpp.

13.135.3.2 const qt_meta_stringdata_KbProfileDialog_t qt_meta_stringdata_KbProfileDialog [static]

Initial value:

```
= {
    {
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 15 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbProfileDialog_t, stringdata0) +  0    -  0  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 21 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbProfileDialog_t, stringdata0) +  16    -  1  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 0 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbProfileDialog_t, stringdata0) +  38    -  2  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 33 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbProfileDialog_t, stringdata0) +  39    -  3  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 16 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbProfileDialog_t, stringdata0) +  73    -  4  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 7 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbProfileDialog_t, stringdata0) +  90    -  5  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 8 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbProfileDialog_t, stringdata0) +  98    -  6  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 26 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbProfileDialog_t, stringdata0) +  107    -  7  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 4 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbProfileDialog_t, stringdata0) +  134    -  8  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 26 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbProfileDialog_t, stringdata0) +  139    -  9  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 41 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbProfileDialog_t, stringdata0) +  166    -  10  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 3 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KbProfileDialog_t, stringdata0) +  208    -  11  *
      sizeof(QByteArrayData))   )

    },
    "KbProfileDialog\0profileList_reordered\0"
    "\0on_profileList_currentItemChanged\0"
    "QListWidgetItem*\0current\0previous\0"
    "on_profileList_itemClicked\0item\0"
    "on_profileList_itemChanged\0"
    "on_profileList_customContextMenuRequested\0"
    "pos"
}
```

Definition at line 30 of file moc_kbprofiledialog.cpp.

13.136 src/ckb/release/moc_kbwidget.cpp File Reference

```
#include "../kbwidget.h"
#include <QtCore/qbytearray.h>
#include <QtCore/qmetatype.h>
```

Include dependency graph for moc_kbwidget.cpp:

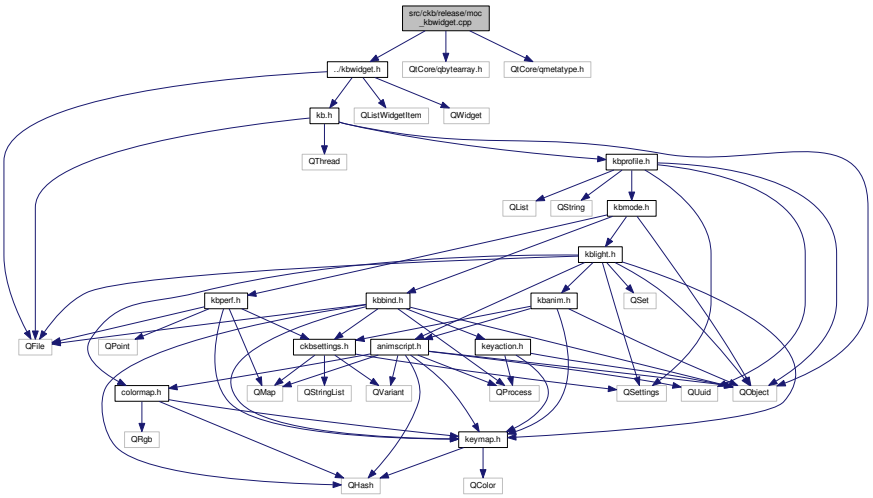

Data Structures

- struct qt_meta_stringdata_KbWidget_t

Macros

- #define QT_MOC_LITERAL(idx, ofs, len)

Variables

- static const qt_meta_stringdata_KbWidget_t qt_meta_stringdata_KbWidget
- static const uint qt_meta_data_KbWidget [ ]

13.136.1 Data Structure Documentation

13.136.1.1 struct qt_meta_stringdata_KbWidget_t

Definition at line 21 of file moc_kbwidget.cpp.

Collaboration diagram for qt_meta_stringdata_KbWidget_t:

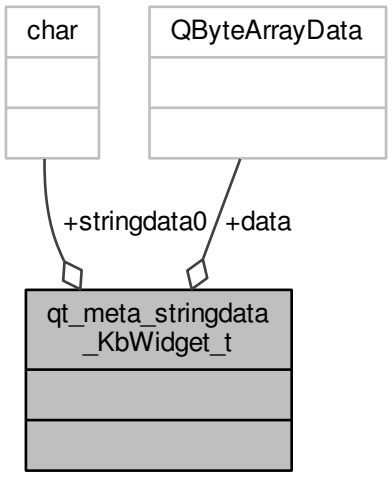

Data Fields

QByteArrayData	data[29]	
char	stringdata0[442]	

13.136.2 Macro Definition Documentation

13.136.2.1 #define QT_MOC_LITERAL(*idx, ofs, len*)

Value:

```
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET(len, \
    qptrdiff(offsetof(qt_meta_stringdata_KbWidget_t, stringdata0) + ofs \
        - idx * sizeof(QByteArrayData)) \
    )
```

Definition at line 25 of file moc_kbwidget.cpp.

13.136.3 Variable Documentation

13.136.3.1 const uint qt_meta_data_KbWidget[ ] [static]

Definition at line 80 of file moc_kbwidget.cpp.

13.136.3.2 const qt_meta_stringdata_KbWidget_t qt_meta_stringdata_KbWidget [static]

Definition at line 30 of file moc_kbwidget.cpp.

13.137 src/ckb/release/moc_keyaction.cpp File Reference

```
#include "../keyaction.h"
#include <QtCore/qbytearray.h>
#include <QtCore/qmetatype.h>
```

Include dependency graph for moc_keyaction.cpp:

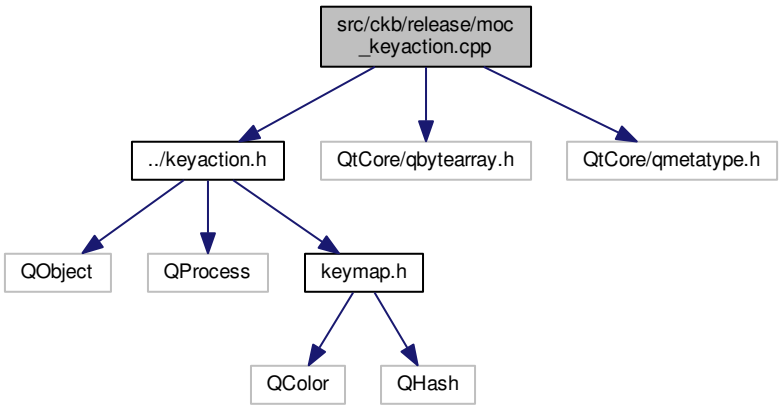

Data Structures

- struct qt_meta_stringdata_KeyAction_t

Macros

- #define QT_MOC_LITERAL(idx, ofs, len)

Variables

- static const qt_meta_stringdata_KeyAction_t qt_meta_stringdata_KeyAction
- static const uint qt_meta_data_KeyAction [ ]

13.137.1 Data Structure Documentation

13.137.1.1 struct qt_meta_stringdata_KeyAction_t

Definition at line 21 of file moc_keyaction.cpp.

Collaboration diagram for qt_meta_stringdata_KeyAction_t:

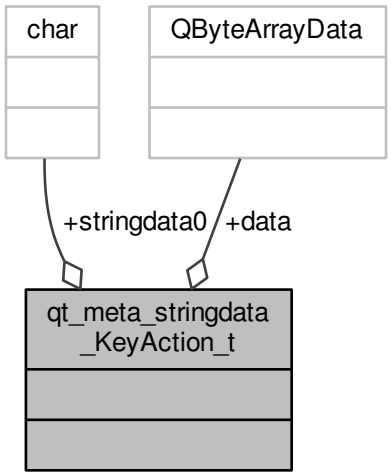

Data Fields

QByteArrayData	data[1]	
char	stringdata0[10]	

13.137.2 Macro Definition Documentation

13.137.2.1 #define QT_MOC_LITERAL(*idx, ofs, len*)

Value:

```
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET(len, \
    qptrdiff(offsetof(qt_meta_stringdata_KeyAction_t, stringdata0) + ofs \
        - idx * sizeof(QByteArrayData)) \
    )
```

Definition at line 25 of file moc_keyaction.cpp.

13.137.3 Variable Documentation

13.137.3.1 const uint qt_meta_data_KeyAction[] [static]

Initial value:

```
= {

       7,
       0,
       0,    0,
       0,    0,
       0,    0,
       0,    0,
       0,    0,
       0,
```

```
        0,

        0
}
```

Definition at line 39 of file moc_keyaction.cpp.

13.137.3.2 const qt_meta_stringdata_KeyAction_t qt_meta_stringdata_KeyAction [static]

Initial value:

```
= {
    {
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 9 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KeyAction_t, stringdata0) +  0    -  0  * sizeof(
      QByteArrayData))   )

    },
    "KeyAction"
}
```

Definition at line 30 of file moc_keyaction.cpp.

13.138 src/ckb/release/moc_keywidget.cpp File Reference

```
#include "../keywidget.h"
#include <QtCore/qbytearray.h>
#include <QtCore/qmetatype.h>
#include <QtCore/QSet>
```

Include dependency graph for moc_keywidget.cpp:

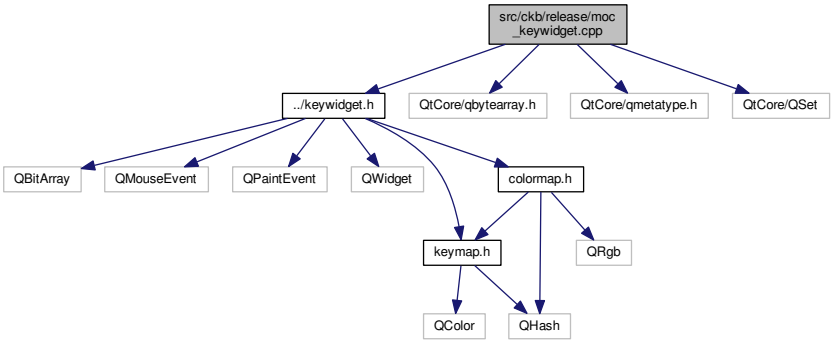

Data Structures

- struct qt_meta_stringdata_KeyWidget_t

Macros

- #define QT_MOC_LITERAL(idx, ofs, len)

Variables

- static const qt_meta_stringdata_KeyWidget_t qt_meta_stringdata_KeyWidget
- static const uint qt_meta_data_KeyWidget [ ]

13.138.1 Data Structure Documentation

13.138.1.1 struct qt_meta_stringdata_KeyWidget_t

Definition at line 22 of file moc_keywidget.cpp.

Collaboration diagram for qt_meta_stringdata_KeyWidget_t:

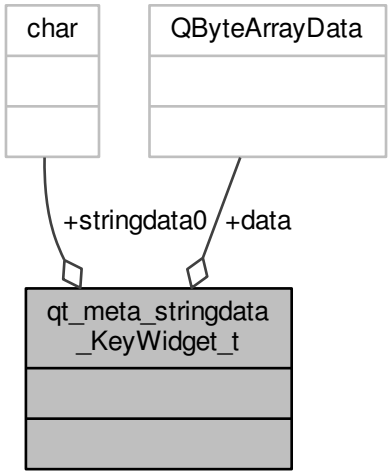

Data Fields

QByteArrayData	data[10]	
char	stringdata0[118]	

13.138.2 Macro Definition Documentation

13.138.2.1 #define QT_MOC_LITERAL(*idx, ofs, len*)

Value:

```
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET(len, \
    qptrdiff(offsetof(qt_meta_stringdata_KeyWidget_t, stringdata0) + ofs \
        - idx * sizeof(QByteArrayData)) \
    )
```

Definition at line 26 of file moc_keywidget.cpp.

13.138.3 Variable Documentation

13.138.3.1 const uint qt_meta_data_KeyWidget[] [static]

Definition at line 52 of file moc_keywidget.cpp.

13.138.3.2 const qt_meta_stringdata_KeyWidget_t qt_meta_stringdata_KeyWidget [static]

Initial value:

```
= {
    {
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 9 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KeyWidget_t, stringdata0) +  0    -  0  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 16 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KeyWidget_t, stringdata0) +  10    -  1  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 0 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KeyWidget_t, stringdata0) +  27    -  2  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 8 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KeyWidget_t, stringdata0) +  28    -  3  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 16 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KeyWidget_t, stringdata0) +  37    -  4  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 15 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KeyWidget_t, stringdata0) +  54    -  5  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 8 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KeyWidget_t, stringdata0) +  70    -  6  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 13 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KeyWidget_t, stringdata0) +  79    -  7  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 13 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KeyWidget_t, stringdata0) +  93    -  8  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 10 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KeyWidget_t, stringdata0) +  107    -  9  * sizeof(
      QByteArrayData))   )

    },
    "KeyWidget\0selectionChanged\0\0selected\0"
    "sidelightToggled\0displayColorMap\0"
    "ColorMap\0newDisplayMap\0QSet<QString>\0"
    "indicators"
}
```

Definition at line 31 of file moc_keywidget.cpp.

13.139 src/ckb/release/moc_kperfwidget.cpp File Reference

```
#include "../kperfwidget.h"
#include <QtCore/qbytearray.h>
#include <QtCore/qmetatype.h>
```

Include dependency graph for moc_kperfwidget.cpp:

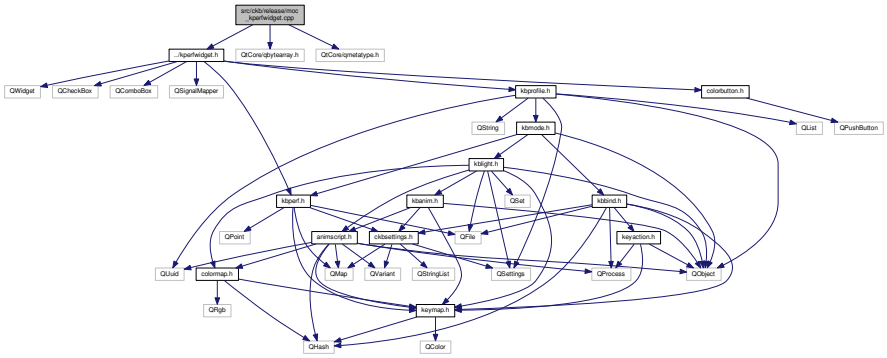

Data Structures

- struct qt_meta_stringdata_KPerfWidget_t

Macros

- #define QT_MOC_LITERAL(idx, ofs, len)

Variables

- static const qt_meta_stringdata_KPerfWidget_t qt_meta_stringdata_KPerfWidget
- static const uint qt_meta_data_KPerfWidget [ ]

13.139.1 Data Structure Documentation

13.139.1.1 struct qt_meta_stringdata_KPerfWidget_t

Definition at line 21 of file moc_kperfwidget.cpp.

Collaboration diagram for qt_meta_stringdata_KPerfWidget_t:

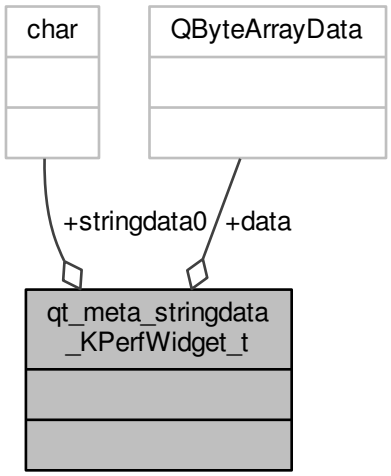

Data Fields

QByteArrayData	data[7]	
char	stringdata0[85]	

13.139.2 Macro Definition Documentation

13.139.2.1 #define QT_MOC_LITERAL(*idx, ofs, len*)

Value:

```
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET(len, \
    qptrdiff(offsetof(qt_meta_stringdata_KPerfWidget_t, stringdata0) + ofs
      \
        - idx * sizeof(QByteArrayData)) \
    )
```

Definition at line 25 of file moc_kperfwidget.cpp.

13.139.3 Variable Documentation

13.139.3.1 const uint qt_meta_data_KPerfWidget[] [static]

Initial value:

```
= {

       7,
       0,
       0,    0,
       3,   14,
       0,    0,
       0,    0,
       0,    0,
```

```
        0,
        0,


        1,    1,   29,    2, 0x08 ,
        4,    1,   32,    2, 0x08 ,
        6,    0,   35,    2, 0x08 ,


    QMetaType::Void, QMetaType::Int,    3,
    QMetaType::Void, QMetaType::Int,    5,
    QMetaType::Void,

        0
}
```

Definition at line 47 of file moc_kperfwidget.cpp.

13.139.3.2 const qt_meta_stringdata_KPerfWidget_t qt_meta_stringdata_KPerfWidget [static]

Initial value:

```
= {
    {
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 11 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KPerfWidget_t, stringdata0) +  0    -  0  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 9 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KPerfWidget_t, stringdata0) +  12    -  1  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 0 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KPerfWidget_t, stringdata0) +  22    -  2  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 5 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KPerfWidget_t, stringdata0) +  23    -  3  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 28 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KPerfWidget_t, stringdata0) +  29    -  4  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 4 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KPerfWidget_t, stringdata0) +  58    -  5  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 21 ,   qptrdiff(offsetof(
      qt_meta_stringdata_KPerfWidget_t, stringdata0) +  63    -  6  * sizeof(
      QByteArrayData))   )

    },
    "KPerfWidget\0uiUpdated\0\0index\0"
    "on_intensityBox_valueChanged\0arg1\0"
    "on_copyButton_clicked"
}
```

Definition at line 30 of file moc_kperfwidget.cpp.

13.140 src/ckb/release/moc_layoutdialog.cpp File Reference

```
#include "../layoutdialog.h"
#include <QtCore/qbytearray.h>
#include <QtCore/qmetatype.h>
```

Include dependency graph for moc_layoutdialog.cpp:

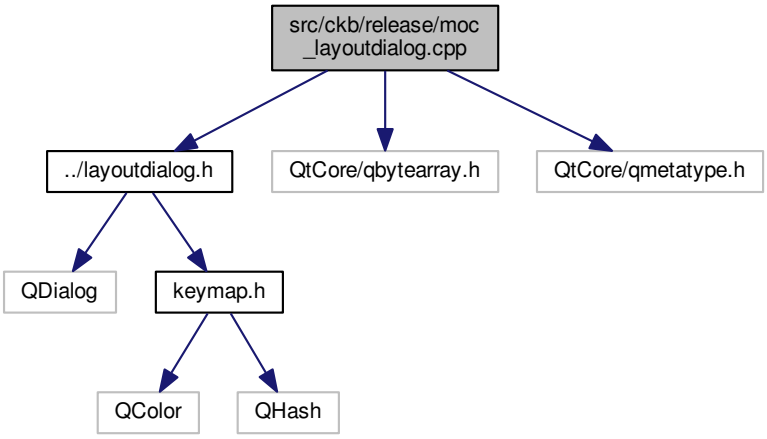

Data Structures

- struct qt_meta_stringdata_LayoutDialog_t

Macros

- #define QT_MOC_LITERAL(idx, ofs, len)

Variables

- static const qt_meta_stringdata_LayoutDialog_t qt_meta_stringdata_LayoutDialog
- static const uint qt_meta_data_LayoutDialog [ ]

13.140.1 Data Structure Documentation

13.140.1.1 struct qt_meta_stringdata_LayoutDialog_t

Definition at line 21 of file moc_layoutdialog.cpp.

Collaboration diagram for qt_meta_stringdata_LayoutDialog_t:

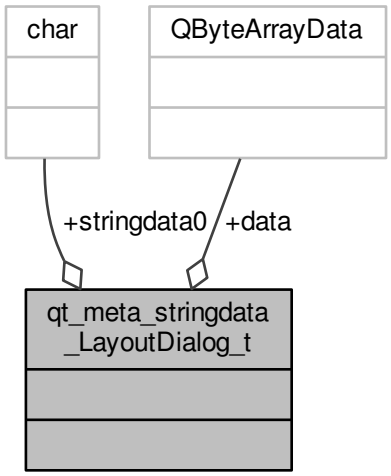

Data Fields

QByteArrayData	data[1]	
char	stringdata0[13]	

13.140.2 Macro Definition Documentation

13.140.2.1 #define QT_MOC_LITERAL(*idx, ofs, len*)

Value:

```
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET(len, \
    qptrdiff(offsetof(qt_meta_stringdata_LayoutDialog_t, stringdata0) +
      ofs \
        - idx * sizeof(QByteArrayData)) \
    )
```

Definition at line 25 of file moc_layoutdialog.cpp.

13.140.3 Variable Documentation

13.140.3.1 const uint qt_meta_data_LayoutDialog[] [static]

Initial value:

```
= {

       7,
       0,
       0,    0,
       0,    0,
       0,    0,
       0,    0,
       0,    0,
```

```
        0,
        0,

        0
}
```

Definition at line 39 of file moc_layoutdialog.cpp.

13.140.3.2 const qt_meta_stringdata_LayoutDialog_t qt_meta_stringdata_LayoutDialog [static]

Initial value:

```
= {
    {
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 12 ,   qptrdiff(offsetof(
      qt_meta_stringdata_LayoutDialog_t, stringdata0) +  0    -  0  * sizeof(
      QByteArrayData))   )

    },
    "LayoutDialog"
}
```

Definition at line 30 of file moc_layoutdialog.cpp.

13.141 src/ckb/release/moc_macroreader.cpp File Reference

```
#include "../macroreader.h"
#include <QtCore/qbytearray.h>
#include <QtCore/qmetatype.h>
```

Include dependency graph for moc_macroreader.cpp:

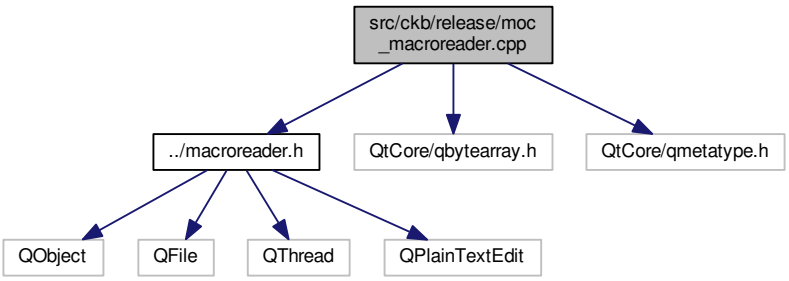

Data Structures

- struct qt_meta_stringdata_MacroReaderThread_t
- struct qt_meta_stringdata_MacroReader_t

Macros

- #define QT_MOC_LITERAL(idx, ofs, len)
- #define QT_MOC_LITERAL(idx, ofs, len)

Variables

- static const qt_meta_stringdata_MacroReaderThread_t qt_meta_stringdata_MacroReaderThread
- static const uint qt_meta_data_MacroReaderThread []
- static const qt_meta_stringdata_MacroReader_t qt_meta_stringdata_MacroReader
- static const uint qt_meta_data_MacroReader []

13.141.1 Data Structure Documentation

13.141.1.1 struct qt_meta_stringdata_MacroReaderThread_t

Definition at line 21 of file moc_macroreader.cpp.

Collaboration diagram for qt_meta_stringdata_MacroReaderThread_t:

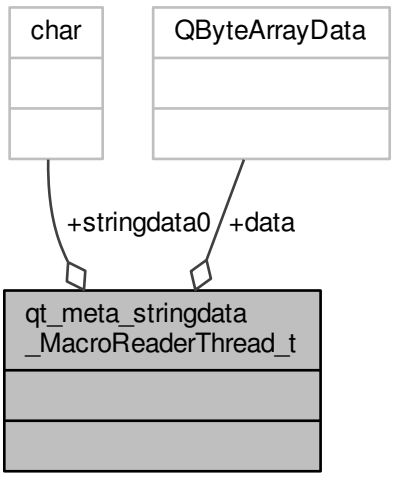

Data Fields

QByteArrayData	data[4]	
char	stringdata0[34]	

13.141.1.2 struct qt_meta_stringdata_MacroReader_t

Definition at line 111 of file moc_macroreader.cpp.

Collaboration diagram for qt_meta_stringdata_MacroReader_t:

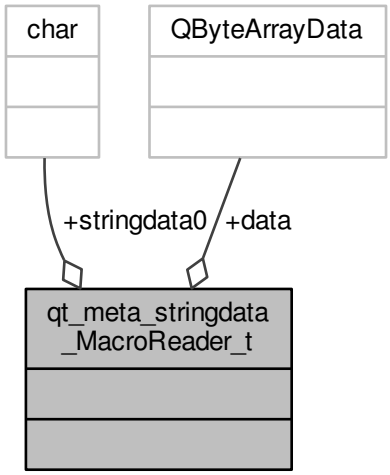

Data Fields

QByteArrayData	data[1]	
char	stringdata0[12]	

13.141.2 Macro Definition Documentation

13.141.2.1 #define QT_MOC_LITERAL(*idx, ofs, len*)

Value:

```
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET(len, \
    qptrdiff(offsetof(qt_meta_stringdata_MacroReaderThread_t,
      stringdata0) + ofs \
        - idx * sizeof(QByteArrayData)) \
    )
```

Definition at line 115 of file moc_macroreader.cpp.

13.141.2.2 #define QT_MOC_LITERAL(*idx, ofs, len*)

Value:

```
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET(len, \
    qptrdiff(offsetof(qt_meta_stringdata_MacroReader_t, stringdata0) + ofs
      \
        - idx * sizeof(QByteArrayData)) \
    )
```

Definition at line 115 of file moc_macroreader.cpp.

13.141.3 Variable Documentation

13.141.3.1 const uint qt_meta_data_MacroReader[] [static]

Initial value:

```
= {

       7,
       0,
       0,    0,
       0,    0,
       0,    0,
       0,    0,
       0,    0,
       0,
       0,

       0
}
```

Definition at line 129 of file moc_macroreader.cpp.

13.141.3.2 const uint qt_meta_data_MacroReaderThread[] [static]

Initial value:

```
= {

       7,
       0,
       0,    0,
       1,   14,
       0,    0,
       0,    0,
       0,    0,
       0,
       0,


       1,    1,   19,    2, 0x08 ,


    QMetaType::Void, QMetaType::QString,    3,

       0
}
```

Definition at line 42 of file moc_macroreader.cpp.

13.141.3.3 const qt_meta_stringdata_MacroReader_t qt_meta_stringdata_MacroReader [static]

Initial value:

```
= {
    {
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 11 ,   qptrdiff(offsetof(
      qt_meta_stringdata_MacroReader_t, stringdata0) +  0    -  0  * sizeof(
      QByteArrayData))   )

    },
    "MacroReader"
}
```

Definition at line 120 of file moc_macroreader.cpp.

13.141.3.4 const qt_meta_stringdata_MacroReaderThread_t qt_meta_stringdata_MacroReaderThread [static]

Initial value:

```
= {
    {
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 17 ,   qptrdiff(offsetof(
      qt_meta_stringdata_MacroReaderThread_t, stringdata0) +  0    -  0  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 9 ,   qptrdiff(offsetof(
      qt_meta_stringdata_MacroReaderThread_t, stringdata0) +  18    -  1  *
       sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 0 ,   qptrdiff(offsetof(
      qt_meta_stringdata_MacroReaderThread_t, stringdata0) +  28    -  2  *
       sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 4 ,   qptrdiff(offsetof(
      qt_meta_stringdata_MacroReaderThread_t, stringdata0) +  29    -  3  *
       sizeof(QByteArrayData))   )

    },
    "MacroReaderThread\0readMacro\0\0line"
}
```

Definition at line 30 of file moc_macroreader.cpp.

13.142 src/ckb/release/moc_mainwindow.cpp File Reference

```
#include "../mainwindow.h"
#include <QtCore/qbytearray.h>
#include <QtCore/qmetatype.h>
```

Include dependency graph for moc_mainwindow.cpp:

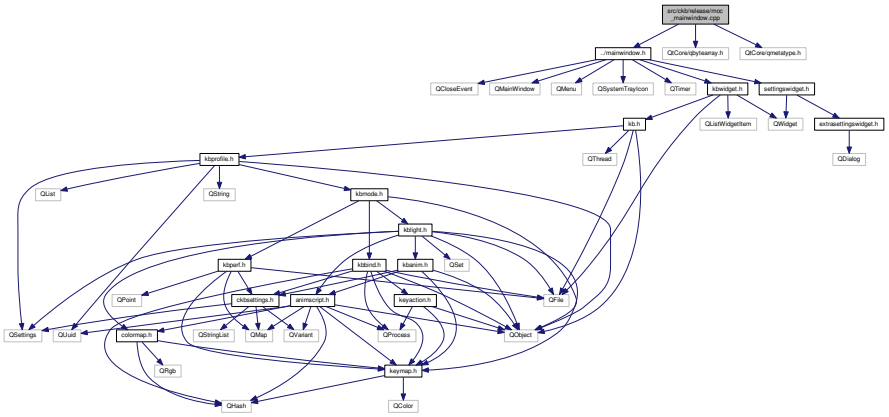

Data Structures

- struct qt_meta_stringdata_MainWindow_t

Macros

- #define QT_MOC_LITERAL(idx, ofs, len)

Variables

- static const qt_meta_stringdata_MainWindow_t qt_meta_stringdata_MainWindow
- static const uint qt_meta_data_MainWindow []

13.142.1 Data Structure Documentation

13.142.1.1 struct qt_meta_stringdata_MainWindow_t

Definition at line 21 of file moc_mainwindow.cpp.

Collaboration diagram for qt_meta_stringdata_MainWindow_t:

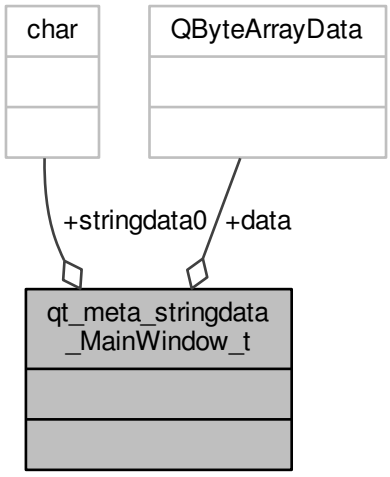

Data Fields

QByteArrayData	data[22]	
char	stringdata0[253]	

13.142.2 Macro Definition Documentation

13.142.2.1 #define QT_MOC_LITERAL(*idx, ofs, len*)

Value:

```
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET(len, \
    qptrdiff(offsetof(qt_meta_stringdata_MainWindow_t, stringdata0) + ofs \
        - idx * sizeof(QByteArrayData)) \
    )
```

Definition at line 25 of file moc_mainwindow.cpp.

13.142.3 Variable Documentation

13.142.3.1 const uint qt_meta_data_MainWindow[] [static]

Definition at line 66 of file moc_mainwindow.cpp.

13.142.3.2 const qt_meta_stringdata_MainWindow_t qt_meta_stringdata_MainWindow [static]

Definition at line 30 of file moc_mainwindow.cpp.

13.143 src/ckb/release/moc_modeselectdialog.cpp File Reference

```
#include "../modeselectdialog.h"
#include <QtCore/qbytearray.h>
#include <QtCore/qmetatype.h>
```

Include dependency graph for moc_modeselectdialog.cpp:

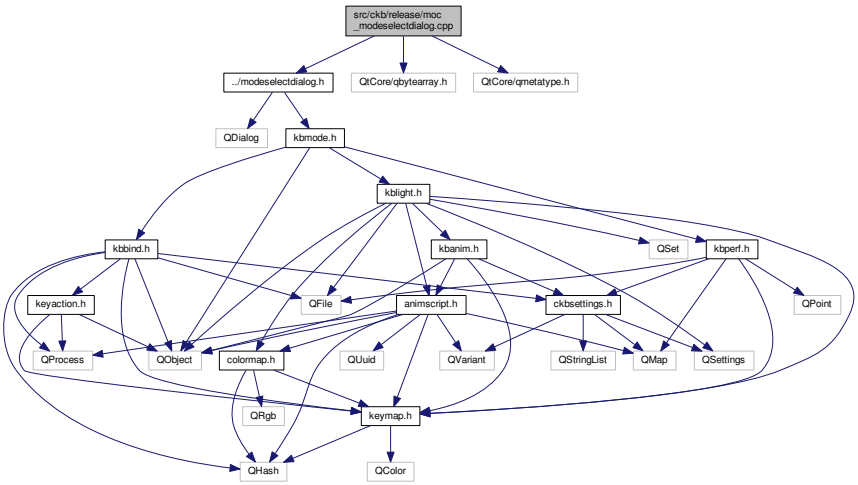

Data Structures

- struct qt_meta_stringdata_ModeSelectDialog_t

Macros

- #define QT_MOC_LITERAL(idx, ofs, len)

Variables

- static const qt_meta_stringdata_ModeSelectDialog_t qt_meta_stringdata_ModeSelectDialog
- static const uint qt_meta_data_ModeSelectDialog []

13.143.1 Data Structure Documentation

13.143.1.1 struct qt_meta_stringdata_ModeSelectDialog_t

Definition at line 21 of file moc_modeselectdialog.cpp.

Collaboration diagram for qt_meta_stringdata_ModeSelectDialog_t:

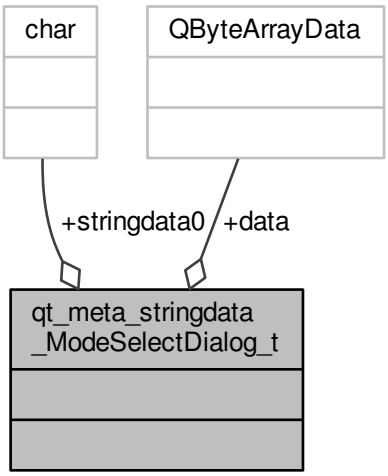

Data Fields

QByteArrayData	data[4]	
char	stringdata0[67]	

13.143.2 Macro Definition Documentation

13.143.2.1 #define QT_MOC_LITERAL(*idx, ofs, len*)

Value:

```
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET(len, \
    qptrdiff(offsetof(qt_meta_stringdata_ModeSelectDialog_t,
      stringdata0) + ofs \
        - idx * sizeof(QByteArrayData)) \
    )
```

Definition at line 25 of file moc_modeselectdialog.cpp.

13.143.3 Variable Documentation

13.143.3.1 const uint qt_meta_data_ModeSelectDialog[] [static]

Initial value:

```
= {

       7,
       0,
       0,    0,
       2,   14,
       0,    0,
       0,    0,
       0,    0,
```

```
        0,
        0,


        1,    0,   24,    2, 0x08 ,
        3,    0,   25,    2, 0x08 ,


    QMetaType::Void,
    QMetaType::Void,

        0
}
```

Definition at line 43 of file moc_modeselectdialog.cpp.

13.143.3.2 const qt_meta_stringdata_ModeSelectDialog_t qt_meta_stringdata_ModeSelectDialog [static]

Initial value:

```
= {
    {
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 16 ,   qptrdiff(offsetof(
      qt_meta_stringdata_ModeSelectDialog_t, stringdata0) +  0    -  0  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 23 ,   qptrdiff(offsetof(
      qt_meta_stringdata_ModeSelectDialog_t, stringdata0) +  17    -  1  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 0 ,   qptrdiff(offsetof(
      qt_meta_stringdata_ModeSelectDialog_t, stringdata0) +  41    -  2  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 24 ,   qptrdiff(offsetof(
      qt_meta_stringdata_ModeSelectDialog_t, stringdata0) +  42    -  3  *
      sizeof(QByteArrayData))   )

    },
    "ModeSelectDialog\0on_selAllButton_clicked\0"
    "\0on_selNoneButton_clicked"
}
```

Definition at line 30 of file moc_modeselectdialog.cpp.

13.144 src/ckb/release/moc_mperfwidget.cpp File Reference

```
#include "../mperfwidget.h"
#include <QtCore/qbytearray.h>
#include <QtCore/qmetatype.h>
```

Include dependency graph for moc_mperfwidget.cpp:

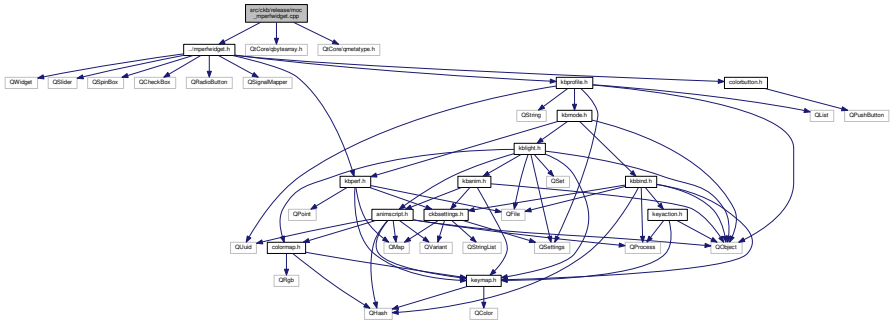

Data Structures

- struct qt_meta_stringdata_MPerfWidget_t

Macros

- #define QT_MOC_LITERAL(idx, ofs, len)

Variables

- static const qt_meta_stringdata_MPerfWidget_t qt_meta_stringdata_MPerfWidget
- static const uint qt_meta_data_MPerfWidget []

13.144.1 Data Structure Documentation

13.144.1.1 struct qt_meta_stringdata_MPerfWidget_t

Definition at line 21 of file moc_mperfwidget.cpp.

Collaboration diagram for qt_meta_stringdata_MPerfWidget_t:

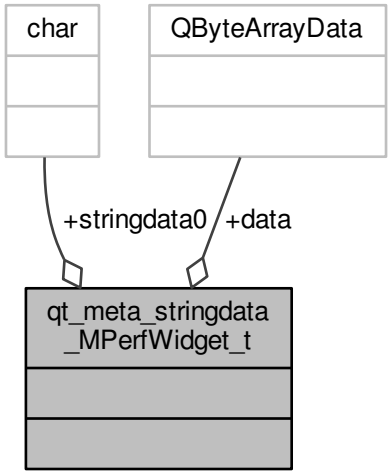

Data Fields

QByteArrayData	data[18]	
char	stringdata0[249]	

13.144.2 Macro Definition Documentation

13.144.2.1 #define QT_MOC_LITERAL(*idx, ofs, len*)

Value:

```
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET(len, \
    qptrdiff(offsetof(qt_meta_stringdata_MPerfWidget_t, stringdata0) + ofs
      \
        - idx * sizeof(QByteArrayData)) \
    )
```

Definition at line 25 of file moc_mperfwidget.cpp.

13.144.3 Variable Documentation

13.144.3.1 const uint qt_meta_data_MPerfWidget[] [static]

Definition at line 62 of file moc_mperfwidget.cpp.

13.144.3.2 const qt_meta_stringdata_MPerfWidget_t qt_meta_stringdata_MPerfWidget [static]

Initial value:

```
= {
    {
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 11 ,   qptrdiff(offsetof(
      qt_meta_stringdata_MPerfWidget_t, stringdata0) +  0    -  0  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 12 ,   qptrdiff(offsetof(
      qt_meta_stringdata_MPerfWidget_t, stringdata0) +  12    -  1  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 0 ,   qptrdiff(offsetof(
      qt_meta_stringdata_MPerfWidget_t, stringdata0) +  25    -  2  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 5 ,   qptrdiff(offsetof(
      qt_meta_stringdata_MPerfWidget_t, stringdata0) +  26    -  3  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 12 ,   qptrdiff(offsetof(
      qt_meta_stringdata_MPerfWidget_t, stringdata0) +  32    -  4  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 12 ,   qptrdiff(offsetof(
      qt_meta_stringdata_MPerfWidget_t, stringdata0) +  45    -  5  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 12 ,   qptrdiff(offsetof(
      qt_meta_stringdata_MPerfWidget_t, stringdata0) +  58    -  6  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 11 ,   qptrdiff(offsetof(
      qt_meta_stringdata_MPerfWidget_t, stringdata0) +  71    -  7  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 11 ,   qptrdiff(offsetof(
      qt_meta_stringdata_MPerfWidget_t, stringdata0) +  83    -  8  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 13 ,   qptrdiff(offsetof(
      qt_meta_stringdata_MPerfWidget_t, stringdata0) +  95    -  9  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 16 ,   qptrdiff(offsetof(
      qt_meta_stringdata_MPerfWidget_t, stringdata0) +  109    -  10  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 7 ,   qptrdiff(offsetof(
      qt_meta_stringdata_MPerfWidget_t, stringdata0) +  126    -  11  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 19 ,   qptrdiff(offsetof(
      qt_meta_stringdata_MPerfWidget_t, stringdata0) +  134    -  12  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 19 ,   qptrdiff(offsetof(
      qt_meta_stringdata_MPerfWidget_t, stringdata0) +  154    -  13  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 23 ,   qptrdiff(offsetof(
      qt_meta_stringdata_MPerfWidget_t, stringdata0) +  174    -  14  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 21 ,   qptrdiff(offsetof(
      qt_meta_stringdata_MPerfWidget_t, stringdata0) +  198    -  15  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 23 ,   qptrdiff(offsetof(
      qt_meta_stringdata_MPerfWidget_t, stringdata0) +  220    -  16  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 4 ,   qptrdiff(offsetof(
      qt_meta_stringdata_MPerfWidget_t, stringdata0) +  244    -  17  * sizeof(
      QByteArrayData))   )

    },
    "MPerfWidget\0colorClicked\0\0index\0"
    "colorChanged\0sliderXMoved\0sliderYMoved\0"
    "boxXChanged\0boxYChanged\0enableChanged\0"
    "on_xyBox_clicked\0checked\0on_indicBox_clicked\0"
    "on_aSnapBox_clicked\0on_lHeightBox_activated\0"
    "on_copyButton_clicked\0on_spinBox_valueChanged\0"
    "arg1"
}
```

Definition at line 30 of file moc_mperfwidget.cpp.

13.145 src/ckb/release/moc_quagzipfile.cpp File Reference

```
#include "../quazip/quagzipfile.h"
#include <QtCore/qbytearray.h>
#include <QtCore/qmetatype.h>
```

Include dependency graph for moc_quagzipfile.cpp:

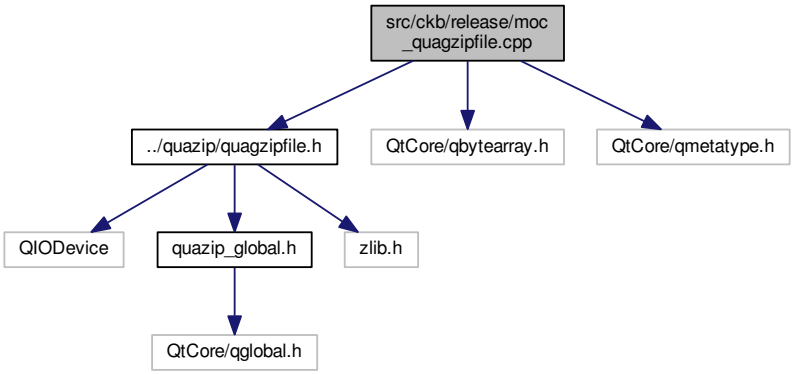

Data Structures

- struct qt_meta_stringdata_QuaGzipFile_t

Macros

- #define QT_MOC_LITERAL(idx, ofs, len)

Variables

- static const qt_meta_stringdata_QuaGzipFile_t qt_meta_stringdata_QuaGzipFile
- static const uint qt_meta_data_QuaGzipFile []

13.145.1 Data Structure Documentation

13.145.1.1 struct qt_meta_stringdata_QuaGzipFile_t

Definition at line 21 of file moc_quagzipfile.cpp.

Collaboration diagram for qt_meta_stringdata_QuaGzipFile_t:

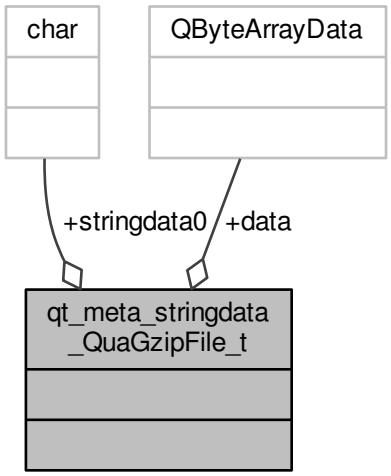

Data Fields

QByteArrayData	data[1]	
char	stringdata0[12]	

13.145.2 Macro Definition Documentation

13.145.2.1 #define QT_MOC_LITERAL(*idx, ofs, len*)

Value:

```
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET(len, \
    qptrdiff(offsetof(qt_meta_stringdata_QuaGzipFile_t, stringdata0) + ofs
      \
        - idx * sizeof(QByteArrayData)) \
    )
```

Definition at line 25 of file moc_quagzipfile.cpp.

13.145.3 Variable Documentation

13.145.3.1 const uint qt_meta_data_QuaGzipFile[] [static]

Initial value:

```
= {

       7,
       0,
       0,    0,
       0,    0,
       0,    0,
       0,    0,
       0,    0,
```

```
        0,
        0,

        0
}
```

Definition at line 39 of file moc_quagzipfile.cpp.

13.145.3.2 const qt_meta_stringdata_QuaGzipFile_t qt_meta_stringdata_QuaGzipFile [static]

Initial value:

```
= {
    {
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 11 ,   qptrdiff(offsetof(
      qt_meta_stringdata_QuaGzipFile_t, stringdata0) +  0    -  0  * sizeof(
      QByteArrayData))   )

    },
    "QuaGzipFile"
}
```

Definition at line 30 of file moc_quagzipfile.cpp.

13.146 src/ckb/release/moc_quaziodevice.cpp File Reference

```
#include "../quazip/quaziodevice.h"
#include <QtCore/qbytearray.h>
#include <QtCore/qmetatype.h>
```

Include dependency graph for moc_quaziodevice.cpp:

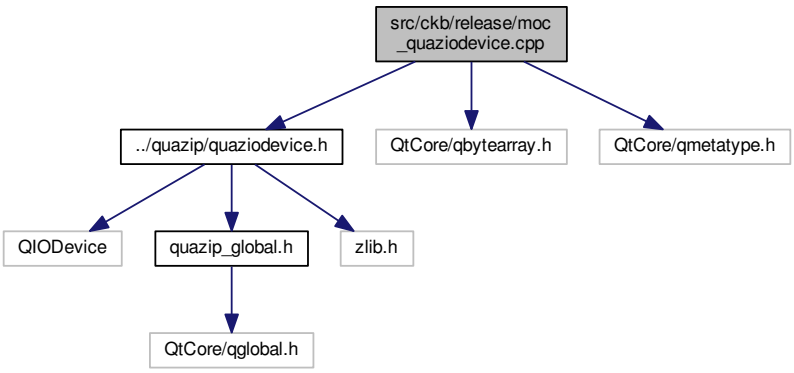

Data Structures

- struct qt_meta_stringdata_QuaZIODevice_t

Macros

- #define QT_MOC_LITERAL(idx, ofs, len)

Variables

- static const qt_meta_stringdata_QuaZIODevice_t qt_meta_stringdata_QuaZIODevice
- static const uint qt_meta_data_QuaZIODevice []

13.146.1 Data Structure Documentation

13.146.1.1 struct qt_meta_stringdata_QuaZIODevice_t

Definition at line 21 of file moc_quaziodevice.cpp.

Collaboration diagram for qt_meta_stringdata_QuaZIODevice_t:

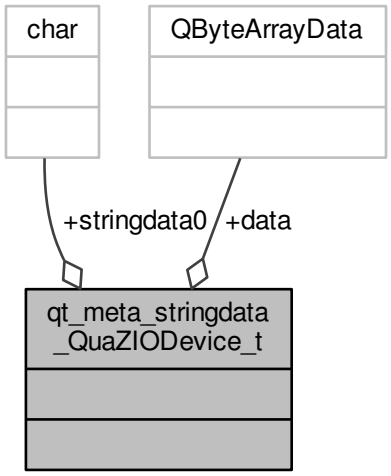

Data Fields

QByteArrayData	data[1]	
char	stringdata0[13]	

13.146.2 Macro Definition Documentation

13.146.2.1 #define QT_MOC_LITERAL(*idx, ofs, len*)

Value:

```
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET(len, \
    qptrdiff(offsetof(qt_meta_stringdata_QuaZIODevice_t, stringdata0) +
      ofs \
        - idx * sizeof(QByteArrayData)) \
    )
```

Definition at line 25 of file moc_quaziodevice.cpp.

13.146.3 Variable Documentation

13.146.3.1 const uint qt_meta_data_QuaZIODevice[] [static]

Initial value:

```
= {

       7,
       0,
       0,    0,
       0,    0,
       0,    0,
       0,    0,
       0,    0,
       0,
       0,

       0
}
```

Definition at line 39 of file moc_quaziodevice.cpp.

13.146.3.2 const qt_meta_stringdata_QuaZIODevice_t qt_meta_stringdata_QuaZIODevice [static]

Initial value:

```
= {
    {
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 12 ,   qptrdiff(offsetof(
      qt_meta_stringdata_QuaZIODevice_t, stringdata0) +  0    -  0  * sizeof(
      QByteArrayData))   )

    },
    "QuaZIODevice"
}
```

Definition at line 30 of file moc_quaziodevice.cpp.

13.147 src/ckb/release/moc_quazipfile.cpp File Reference

```
#include "../quazip/quazipfile.h"
#include <QtCore/qbytearray.h>
#include <QtCore/qmetatype.h>
```

Include dependency graph for moc_quazipfile.cpp:

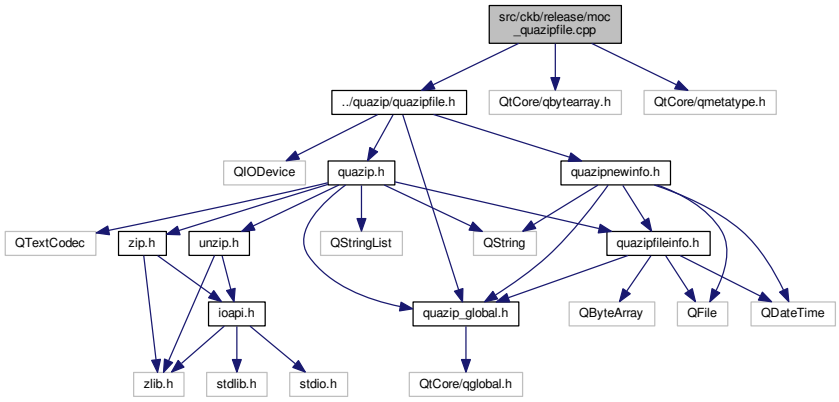

Data Structures

- struct qt_meta_stringdata_QuaZipFile_t

Macros

- #define QT_MOC_LITERAL(idx, ofs, len)

Variables

- static const qt_meta_stringdata_QuaZipFile_t qt_meta_stringdata_QuaZipFile
- static const uint qt_meta_data_QuaZipFile []

13.147.1 Data Structure Documentation

13.147.1.1 struct qt_meta_stringdata_QuaZipFile_t

Definition at line 21 of file moc_quazipfile.cpp.

Collaboration diagram for qt_meta_stringdata_QuaZipFile_t:

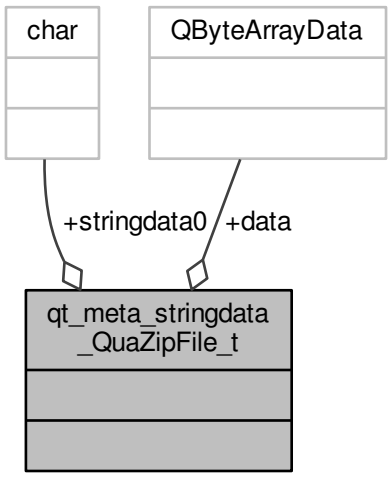

Data Fields

QByteArrayData	data[1]	
char	stringdata0[11]	

13.147.2 Macro Definition Documentation

13.147.2.1 #define QT_MOC_LITERAL(*idx, ofs, len*)

Value:

```
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET(len, \
    qptrdiff(offsetof(qt_meta_stringdata_QuaZipFile_t, stringdata0) + ofs \
        - idx * sizeof(QByteArrayData)) \
    )
```

Definition at line 25 of file moc_quazipfile.cpp.

13.147.3 Variable Documentation

13.147.3.1 const uint qt_meta_data_QuaZipFile[] [static]

Initial value:

```
= {

       7,
       0,
       0,    0,
       0,    0,
       0,    0,
       0,    0,
       0,    0,
       0,
       0,

       0
}
```

Definition at line 39 of file moc_quazipfile.cpp.

13.147.3.2 const qt_meta_stringdata_QuaZipFile_t qt_meta_stringdata_QuaZipFile [static]

Initial value:

```
= {
    {
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 10 ,   qptrdiff(offsetof(
      qt_meta_stringdata_QuaZipFile_t, stringdata0) +  0    -  0  * sizeof(
      QByteArrayData))   )

    },
    "QuaZipFile"
}
```

Definition at line 30 of file moc_quazipfile.cpp.

13.148 src/ckb/release/moc_rebindwidget.cpp File Reference

```
#include "../rebindwidget.h"
#include <QtCore/qbytearray.h>
#include <QtCore/qmetatype.h>
```

Include dependency graph for moc_rebindwidget.cpp:

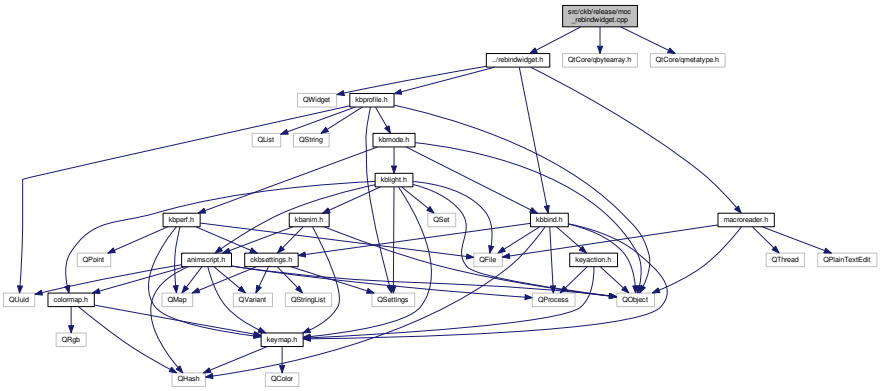

Data Structures

- struct qt_meta_stringdata_RebindWidget_t

Macros

- #define QT_MOC_LITERAL(idx, ofs, len)

Variables

- static const qt_meta_stringdata_RebindWidget_t qt_meta_stringdata_RebindWidget
- static const uint qt_meta_data_RebindWidget []

13.148.1 Data Structure Documentation

13.148.1.1 struct qt_meta_stringdata_RebindWidget_t

Definition at line 21 of file moc_rebindwidget.cpp.

Collaboration diagram for qt_meta_stringdata_RebindWidget_t:

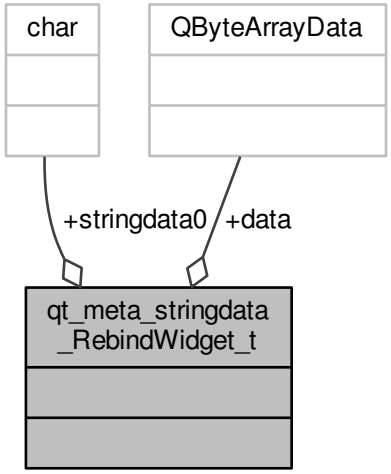

Data Fields

QByteArrayData	data[51]	
char	stringdata0[1179]	

13.148.2 Macro Definition Documentation

13.148.2.1 #define QT_MOC_LITERAL(*idx, ofs, len*)

Value:

```
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET(len, \
    qptrdiff(offsetof(qt_meta_stringdata_RebindWidget_t, stringdata0) +
      ofs \
        - idx * sizeof(QByteArrayData)) \
    )
```

Definition at line 25 of file moc_rebindwidget.cpp.

13.148.3 Variable Documentation

13.148.3.1 const uint qt_meta_data_RebindWidget[ ] [static]

Definition at line 124 of file moc_rebindwidget.cpp.

13.148.3.2 const qt_meta_stringdata_RebindWidget_t qt_meta_stringdata_RebindWidget [static]

Definition at line 30 of file moc_rebindwidget.cpp.

13.149 src/ckb/release/moc_rlistwidget.cpp File Reference

```
#include "../rlistwidget.h"
#include <QtCore/qbytearray.h>
#include <QtCore/qmetatype.h>
```

Include dependency graph for moc_rlistwidget.cpp:

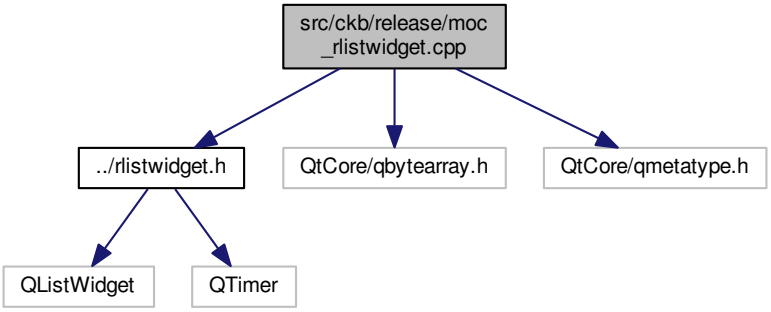

Data Structures

- struct qt_meta_stringdata_RListWidget_t

Macros

- #define QT_MOC_LITERAL(idx, ofs, len)

Variables

- static const qt_meta_stringdata_RListWidget_t qt_meta_stringdata_RListWidget
- static const uint qt_meta_data_RListWidget []

13.149.1 Data Structure Documentation

13.149.1.1 struct qt_meta_stringdata_RListWidget_t

Definition at line 21 of file moc_rlistwidget.cpp.

Collaboration diagram for qt_meta_stringdata_RListWidget_t:

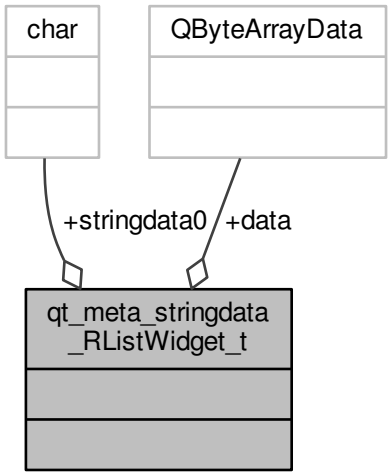

Data Fields

QByteArrayData	data[8]	
char	stringdata0[71]	

13.149.2 Macro Definition Documentation

13.149.2.1 #define QT_MOC_LITERAL(*idx, ofs, len*)

Value:

```
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET(len, \
    qptrdiff(offsetof(qt_meta_stringdata_RListWidget_t, stringdata0) + ofs
      \
        - idx * sizeof(QByteArrayData)) \
    )
```

Definition at line 25 of file moc_rlistwidget.cpp.

13.149.3 Variable Documentation

13.149.3.1 const uint qt_meta_data_RListWidget[] [static]

Definition at line 47 of file moc_rlistwidget.cpp.

13.149.3.2 const qt_meta_stringdata_RListWidget_t qt_meta_stringdata_RListWidget [static]

Initial value:

```
= {
    {
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 11 ,   qptrdiff(offsetof(
```

```
      qt_meta_stringdata_RListWidget_t, stringdata0) +  0    -  0  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 12 ,   qptrdiff(offsetof(
      qt_meta_stringdata_RListWidget_t, stringdata0) +  12    -  1  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 0 ,   qptrdiff(offsetof(
      qt_meta_stringdata_RListWidget_t, stringdata0) +  25    -  2  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 9 ,   qptrdiff(offsetof(
      qt_meta_stringdata_RListWidget_t, stringdata0) +  26    -  3  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 5 ,   qptrdiff(offsetof(
      qt_meta_stringdata_RListWidget_t, stringdata0) +  36    -  4  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 16 ,   qptrdiff(offsetof(
      qt_meta_stringdata_RListWidget_t, stringdata0) +  42    -  5  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 4 ,   qptrdiff(offsetof(
      qt_meta_stringdata_RListWidget_t, stringdata0) +  59    -  6  * sizeof(
      QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 6 ,   qptrdiff(offsetof(
      qt_meta_stringdata_RListWidget_t, stringdata0) +  64    -  7  * sizeof(
      QByteArrayData))   )

    },
    "RListWidget\0orderChanged\0\0timerTick\0"
    "enter\0QListWidgetItem*\0item\0change"
}
```

Definition at line 30 of file moc_rlistwidget.cpp.

13.150 src/ckb/release/moc_settingswidget.cpp File Reference

```
#include "../settingswidget.h"
#include <QtCore/qbytearray.h>
#include <QtCore/qmetatype.h>
```

Include dependency graph for moc_settingswidget.cpp:

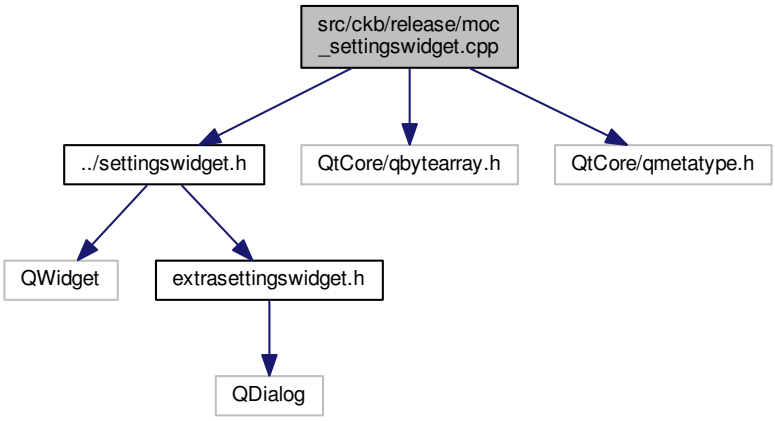

Data Structures

- struct qt_meta_stringdata_SettingsWidget_t

Macros

- #define QT_MOC_LITERAL(idx, ofs, len)

Variables

- static const qt_meta_stringdata_SettingsWidget_t qt_meta_stringdata_SettingsWidget
- static const uint qt_meta_data_SettingsWidget []

13.150.1 Data Structure Documentation

13.150.1.1 struct qt_meta_stringdata_SettingsWidget_t

Definition at line 21 of file moc_settingswidget.cpp.

Collaboration diagram for qt_meta_stringdata_SettingsWidget_t:

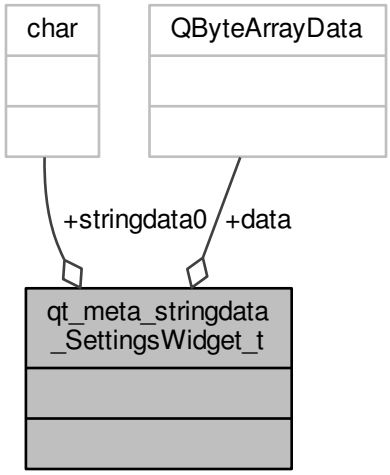

Data Fields

QByteArrayData	data[15]	
char	stringdata0[264]	

13.150.2 Macro Definition Documentation

13.150.2.1 #define QT_MOC_LITERAL(*idx, ofs, len*)

Value:

```
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET(len, \
    qptrdiff(offsetof(qt_meta_stringdata_SettingsWidget_t, stringdata0)
      + ofs \
        - idx * sizeof(QByteArrayData)) \
    )
```

Definition at line 25 of file moc_settingswidget.cpp.

13.150.3 Variable Documentation

13.150.3.1 const uint qt_meta_data_SettingsWidget[] [static]

Definition at line 59 of file moc_settingswidget.cpp.

13.150.3.2 const qt_meta_stringdata_SettingsWidget_t qt_meta_stringdata_SettingsWidget [static]

Initial value:

```
= {
    {
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 14 ,   qptrdiff(offsetof(
      qt_meta_stringdata_SettingsWidget_t, stringdata0) +  0    -  0  * sizeof
      (QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 21 ,   qptrdiff(offsetof(
      qt_meta_stringdata_SettingsWidget_t, stringdata0) +  15    -  1  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 0 ,   qptrdiff(offsetof(
      qt_meta_stringdata_SettingsWidget_t, stringdata0) +  37    -  2  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 20 ,   qptrdiff(offsetof(
      qt_meta_stringdata_SettingsWidget_t, stringdata0) +  38    -  3  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 5 ,   qptrdiff(offsetof(
      qt_meta_stringdata_SettingsWidget_t, stringdata0) +  59    -  4  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 21 ,   qptrdiff(offsetof(
      qt_meta_stringdata_SettingsWidget_t, stringdata0) +  65    -  5  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 20 ,   qptrdiff(offsetof(
      qt_meta_stringdata_SettingsWidget_t, stringdata0) +  87    -  6  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 19 ,   qptrdiff(offsetof(
      qt_meta_stringdata_SettingsWidget_t, stringdata0) +  108    -  7  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 19 ,   qptrdiff(offsetof(
      qt_meta_stringdata_SettingsWidget_t, stringdata0) +  128    -  8  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 20 ,   qptrdiff(offsetof(
      qt_meta_stringdata_SettingsWidget_t, stringdata0) +  148    -  9  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 7 ,   qptrdiff(offsetof(
      qt_meta_stringdata_SettingsWidget_t, stringdata0) +  169    -  10  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 23 ,   qptrdiff(offsetof(
      qt_meta_stringdata_SettingsWidget_t, stringdata0) +  177    -  11  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 22 ,   qptrdiff(offsetof(
      qt_meta_stringdata_SettingsWidget_t, stringdata0) +  201    -  12  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 16 ,   qptrdiff(offsetof(
      qt_meta_stringdata_SettingsWidget_t, stringdata0) +  224    -  13  *
      sizeof(QByteArrayData))   ),
Q_STATIC_BYTE_ARRAY_DATA_HEADER_INITIALIZER_WITH_OFFSET( 22 ,   qptrdiff(offsetof(
      qt_meta_stringdata_SettingsWidget_t, stringdata0) +  241    -  14  *
      sizeof(QByteArrayData))   )

    },
    "SettingsWidget\0on_pushButton_clicked\0"
    "\0on_capsBox_activated\0index\0"
    "on_shiftBox_activated\0on_ctrlBox_activated\0"
    "on_altBox_activated\0on_winBox_activated\0"
    "on_autoFWBox_clicked\0checked\0"
    "on_loginItemBox_clicked\0on_layoutBox_activated\0"
    "showLayoutDialog\0on_extraButton_clicked"
}
```

Definition at line 30 of file moc_settingswidget.cpp.

13.151 src/ckb/release/qrc_binary.cpp File Reference

Macros

- #define QT_RCC_PREPEND_NAMESPACE(name) name
- #define QT_RCC_MANGLE_NAMESPACE(name) name

Functions

- bool qRegisterResourceData (int, const unsigned char *, const unsigned char *, const unsigned char *)
- bool qUnregisterResourceData (int, const unsigned char *, const unsigned char *, const unsigned char *)
- int qInitResources_binary ()
- int qCleanupResources_binary ()

Variables

- static const unsigned char qt_resource_data []
- static const unsigned char qt_resource_name []
- static const unsigned char qt_resource_struct []

13.151.1 Macro Definition Documentation

13.151.1.1 #define QT_RCC_MANGLE_NAMESPACE(*name*) name

Definition at line 147 of file qrc_binary.cpp.

13.151.1.2 #define QT_RCC_PREPEND_NAMESPACE(*name*) name

Definition at line 146 of file qrc_binary.cpp.

Referenced by qCleanupResources_binary(), and qInitResources_binary().

13.151.2 Function Documentation

13.151.2.1 int qCleanupResources_binary ( )

Definition at line 171 of file qrc_binary.cpp.

References QT_RCC_PREPEND_NAMESPACE, qt_resource_data, qt_resource_name, qt_resource_struct, and qUnregisterResourceData().

```
172 {
173     QT_RCC_PREPEND_NAMESPACE(qUnregisterResourceData)
174         (0x01, qt_resource_struct, qt_resource_name,
    qt_resource_data);
175     return 1;
176 }
```

Here is the call graph for this function:

13.151.2.2 int qInitResources_binary ( )

Definition at line 163 of file qrc_binary.cpp.

References qRegisterResourceData(), QT_RCC_PREPEND_NAMESPACE, qt_resource_data, qt_resource_name, and qt_resource_struct.

```
164 {
165     QT_RCC_PREPEND_NAMESPACE(qRegisterResourceData)
166         (0x01, qt_resource_struct, qt_resource_name,
      qt_resource_data);
167     return 1;
168 }
```

Here is the call graph for this function:

13.151.2.3 bool qRegisterResourceData (int , const unsigned char * , const unsigned char * , const unsigned char *)

Referenced by qInitResources_binary().

Here is the caller graph for this function:

13.151.2.4 bool qUnregisterResourceData (int , const unsigned char * , const unsigned char * , const unsigned char *)

Referenced by qCleanupResources_binary().

Here is the caller graph for this function:

13.151.3 Variable Documentation

13.151.3.1 const unsigned char qt_resource_data[] [static]

Definition at line 9 of file qrc_binary.cpp.

Referenced by qCleanupResources_binary(), and qInitResources_binary().

13.151.3.2 const unsigned char qt_resource_name[] [static]

Initial value:

```
= {

  0x0,0x3,
  0x0,0x0,0x68,0xfe,
  0x0,0x62,
  0x0,0x69,0x0,0x6e,

  0x0,0x10,
  0x9,0x4b,0x25,0x27,
  0x0,0x63,
  0x0,0x6b,0x0,0x62,0x0,0x2d,0x0,0x6e,0x0,0x65,0x0,0x78,0x0,0x74,0x0,0x2d,0x0,0x6b,0x0,0x65,0x0,0x79,0x0,
       0x2e,0x0,0x67,0x0,0x70,0x0,0x67,

}
```

Definition at line 114 of file qrc_binary.cpp.

Referenced by qCleanupResources_binary(), and qInitResources_binary().

13.151.3.3 const unsigned char qt_resource_struct[] [static]

Initial value:

```
= {

  0x0,0x0,0x0,0x0,0x0,0x2,0x0,0x0,0x0,0x1,0x0,0x0,0x0,0x1,

  0x0,0x0,0x0,0x0,0x0,0x2,0x0,0x0,0x0,0x1,0x0,0x0,0x0,0x2,

  0x0,0x0,0x0,0xc,0x0,0x0,0x0,0x0,0x0,0x1,0x0,0x0,0x0,0x0,

}
```

Definition at line 128 of file qrc_binary.cpp.

Referenced by qCleanupResources_binary(), and qInitResources_binary().

13.152 src/ckb/release/qrc_image.cpp File Reference

Macros

- #define QT_RCC_PREPEND_NAMESPACE(name) name
- #define QT_RCC_MANGLE_NAMESPACE(name) name

Functions

- bool qRegisterResourceData (int, const unsigned char *, const unsigned char *, const unsigned char *)
- bool qUnregisterResourceData (int, const unsigned char *, const unsigned char *, const unsigned char *)
- int qInitResources_image ()
- int qCleanupResources_image ()

Variables

- static const unsigned char qt_resource_data []
- static const unsigned char qt_resource_name []
- static const unsigned char qt_resource_struct []

13.152.1 Macro Definition Documentation

13.152.1.1 #define QT_RCC_MANGLE_NAMESPACE(*name*) name

Definition at line 9796 of file qrc_image.cpp.

13.152.1.2 #define QT_RCC_PREPEND_NAMESPACE(*name*) name

Definition at line 9795 of file qrc_image.cpp.

Referenced by qCleanupResources_image(), and qInitResources_image().

13.152.2 Function Documentation

13.152.2.1 int qCleanupResources_image ( )

Definition at line 9820 of file qrc_image.cpp.

References QT_RCC_PREPEND_NAMESPACE, qt_resource_data, qt_resource_name, qt_resource_struct, and qUnregisterResourceData().

```
9821 {
9822     QT_RCC_PREPEND_NAMESPACE(qUnregisterResourceData)
9823         (0x01, qt_resource_struct, qt_resource_name,
      qt_resource_data);
9824     return 1;
9825 }
```

Here is the call graph for this function:

13.152.2.2 int qInitResources_image ( )

Definition at line 9812 of file qrc_image.cpp.

References qRegisterResourceData(), QT_RCC_PREPEND_NAMESPACE, qt_resource_data, qt_resource_-name, and qt_resource_struct.

```
9813 {
9814     QT_RCC_PREPEND_NAMESPACE(qRegisterResourceData)
9815         (0x01, qt_resource_struct, qt_resource_name,
      qt_resource_data);
9816     return 1;
9817 }
```

Here is the call graph for this function:

13.152.2.3 bool qRegisterResourceData (int , const unsigned char * , const unsigned char * , const unsigned char *)

Referenced by qInitResources_image().

Here is the caller graph for this function:

13.152.2.4 bool qUnregisterResourceData (int , const unsigned char * , const unsigned char * , const unsigned char *)

Referenced by qCleanupResources_image().

Here is the caller graph for this function:

13.152.3 Variable Documentation

13.152.3.1 const unsigned char qt_resource_data[] [static]

Definition at line 9 of file qrc_image.cpp.

Referenced by qCleanupResources_image(), and qInitResources_image().

13.152.3.2 const unsigned char qt_resource_name[] [static]

Definition at line 9659 of file qrc_image.cpp.

Referenced by qCleanupResources_image(), and qInitResources_image().

13.152.3.3 const unsigned char qt_resource_struct[] [static]

Definition at line 9749 of file qrc_image.cpp.

Referenced by qCleanupResources_image(), and qInitResources_image().

13.153 src/ckb/release/qrc_text.cpp File Reference

Macros

- #define QT_RCC_PREPEND_NAMESPACE(name) name
- #define QT_RCC_MANGLE_NAMESPACE(name) name

Functions

- bool qRegisterResourceData (int, const unsigned char *, const unsigned char *, const unsigned char *)
- bool qUnregisterResourceData (int, const unsigned char *, const unsigned char *, const unsigned char *)
- int qInitResources_text ()
- int qCleanupResources_text ()

Variables

- static const unsigned char qt_resource_data []
- static const unsigned char qt_resource_name []
- static const unsigned char qt_resource_struct []

13.153.1 Macro Definition Documentation

13.153.1.1 #define QT_RCC_MANGLE_NAMESPACE(*name*) name

Definition at line 350 of file qrc_text.cpp.

13.153.1.2 #define QT_RCC_PREPEND_NAMESPACE(*name*) name

Definition at line 349 of file qrc_text.cpp.

Referenced by qCleanupResources_text(), and qInitResources_text().

13.153.2 Function Documentation

13.153.2.1 int qCleanupResources_text ( )

Definition at line 374 of file qrc_text.cpp.

References QT_RCC_PREPEND_NAMESPACE, qt_resource_data, qt_resource_name, qt_resource_struct, and qUnregisterResourceData().

```
375 {
376     QT_RCC_PREPEND_NAMESPACE(qUnregisterResourceData)
377         (0x01, qt_resource_struct, qt_resource_name,
      qt_resource_data);
378     return 1;
379 }
```

Here is the call graph for this function:

13.153.2.2 int qInitResources_text ( )

Definition at line 366 of file qrc_text.cpp.

References qRegisterResourceData(), QT_RCC_PREPEND_NAMESPACE, qt_resource_data, qt_resource_name, and qt_resource_struct.

```
367 {
368     QT_RCC_PREPEND_NAMESPACE(qRegisterResourceData)
369         (0x01, qt_resource_struct, qt_resource_name,
      qt_resource_data);
370     return 1;
371 }
```

Here is the call graph for this function:



13.153.2.3 bool qRegisterResourceData (int , const unsigned char * , const unsigned char * , const unsigned char *)

Referenced by qInitResources_text().

Here is the caller graph for this function:



13.153.2.4 bool qUnregisterResourceData (int , const unsigned char * , const unsigned char * , const unsigned char *)

Referenced by qCleanupResources_text().

Here is the caller graph for this function:

13.153.3 Variable Documentation

13.153.3.1 const unsigned char qt_resource_data[] [static]

Definition at line 9 of file qrc_text.cpp.

Referenced by qCleanupResources_text(), and qInitResources_text().

13.153.3.2 const unsigned char qt_resource_name[] [static]

Initial value:

```
= {

  0x0,0x3,
  0x0,0x0,0x7b,0xf4,
  0x0,0x74,
  0x0,0x78,0x0,0x74,

  0x0,0xb,
  0xa,0x1e,0x1,0xe0,
  0x0,0x63,
  0x0,0x6b,0x0,0x62,0x0,0x2e,0x0,0x64,0x0,0x65,0x0,0x73,0x0,0x6b,0x0,0x74,0x0,0x6f,0x0,0x70,

  0x0,0x10,
  0xe,0xac,0xaf,0x46,
  0x0,0x64,
  0x0,0x65,0x0,0x6d,0x0,0x6f,0x0,0x70,0x0,0x72,0x0,0x6f,0x0,0x66,0x0,0x69,0x0,0x6c,0x0,0x65,0x0,0x2e,0x0,
       0x63,0x0,0x6f,0x0,0x6e,0x0,0x66,

  0x0,0x11,
  0x0,0xd4,0x25,0xa4,
  0x0,0x63,
  0x0,0x6f,0x0,0x6d,0x0,0x2e,0x0,0x63,0x0,0x6b,0x0,0x62,0x0,0x2e,0x0,0x63,0x0,0x6b,0x0,0x62,0x0,0x2e,0x0,
       0x70,0x0,0x6c,0x0,0x69,0x0,0x73,0x0,0x74,


}
```

Definition at line 302 of file qrc_text.cpp.

Referenced by qCleanupResources_text(), and qInitResources_text().

13.153.3.3 const unsigned char qt_resource_struct[] [static]

Initial value:

```
= {

  0x0,0x0,0x0,0x0,0x0,0x2,0x0,0x0,0x0,0x1,0x0,0x0,0x0,0x1,
```

```
  0x0,0x0,0x0,0x0,0x0,0x2,0x0,0x0,0x0,0x3,0x0,0x0,0x0,0x2,
  0x0,0x0,0x0,0x4e,0x0,0x0,0x0,0x0,0x0,0x1,0x0,0x0,0xf,0x74,
  0x0,0x0,0x0,0xc,0x0,0x0,0x0,0x0,0x0,0x1,0x0,0x0,0x0,0x0,
  0x0,0x0,0x0,0x28,0x0,0x1,0x0,0x0,0x0,0x1,0x0,0x0,0x0,0xc6,
}
```

Definition at line 327 of file qrc_text.cpp.

Referenced by qCleanupResources_text(), and qInitResources_text().

13.154 src/ckb/rlistwidget.cpp File Reference

```
#include <QUuid>
#include "rlistwidget.h"
```

Include dependency graph for rlistwidget.cpp:

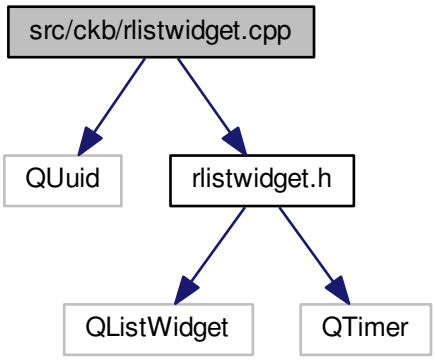

13.155 src/ckb/rlistwidget.h File Reference

```
#include <QListWidget>
#include <QTimer>
```

Include dependency graph for rlistwidget.h:

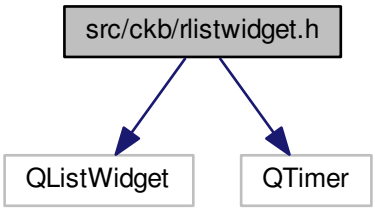

This graph shows which files directly or indirectly include this file:

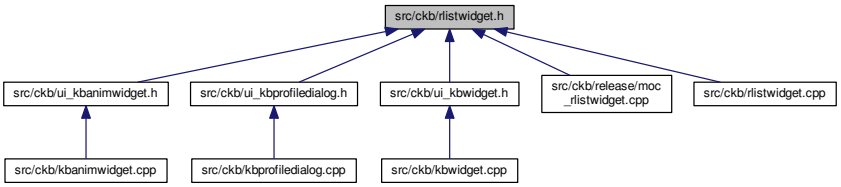

Data Structures

- class RListWidget

13.156 src/ckb/settingswidget.cpp File Reference

```
#include <QTimer>
#include "animscript.h"
#include "autorun.h"
#include "ckbsettings.h"
#include "kb.h"
#include "layoutdialog.h"
#include "settingswidget.h"
#include "ui_settingswidget.h"
```

Include dependency graph for settingswidget.cpp:

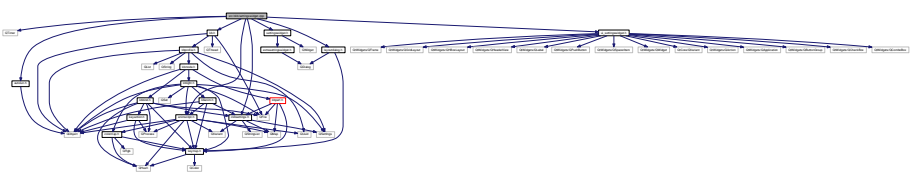

Functions

- static QString right (const QString &left)

Variables

- QString devpath
- static QStringList modKeys
- static QStringList modNames

13.156.1 Function Documentation

13.156.1.1 static QString right (const QString & *left*) [inline], [static]

Definition at line 118 of file settingswidget.cpp.

Referenced by GradientDialogWidget::mouseMoveEvent(), and SettingsWidget::updateModifiers().

```
118                                                 {
119     if(left[0] != 'l')
120         return left;
121     return "r" + left.mid(1);
122 }
```

Here is the caller graph for this function:

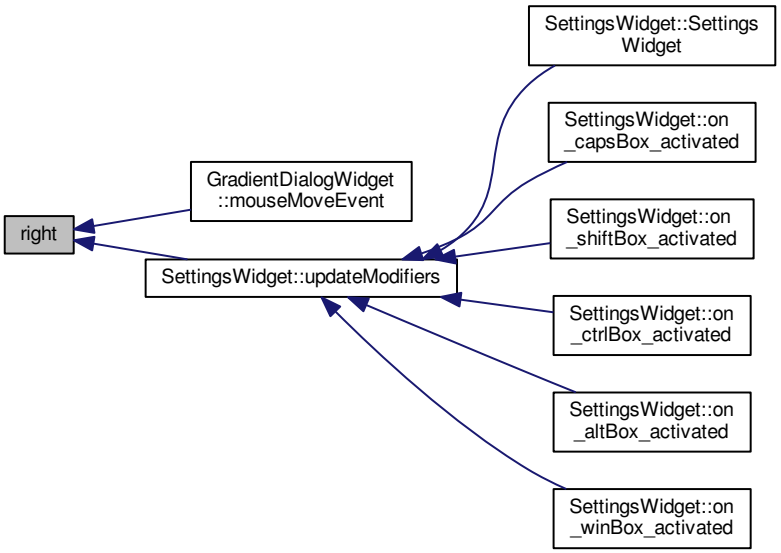

13.156.2 Variable Documentation

13.156.2.1 QString devpath

Definition at line 4 of file kbmanager.cpp.

Referenced by KbManager::scanKeyboards().

13.156.2.2 QStringList modKeys [static]

Definition at line 13 of file settingswidget.cpp.

Referenced by SettingsWidget::SettingsWidget(), and SettingsWidget::updateModifiers().

13.156.2.3 QStringList modNames [static]

Definition at line 13 of file settingswidget.cpp.

Referenced by SettingsWidget::SettingsWidget().

13.157 src/ckb/settingswidget.h File Reference

```
#include <QWidget>
#include "extrasettingswidget.h"
```

Include dependency graph for settingswidget.h:

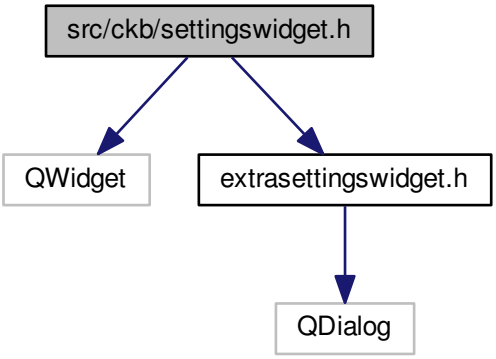

This graph shows which files directly or indirectly include this file:

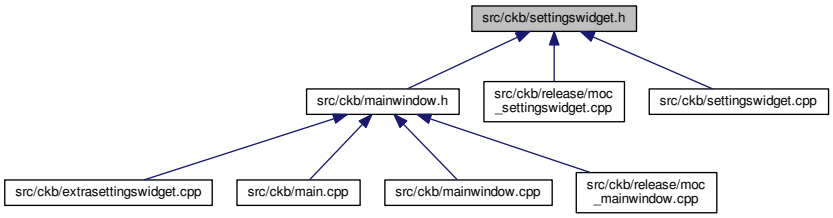

Data Structures

- class SettingsWidget

Namespaces

- Ui

13.158 src/ckb/ui_animadddialog.h File Reference

```
#include <QtCore/QVariant>
#include <QtWidgets/QAction>
#include <QtWidgets/QApplication>
#include <QtWidgets/QButtonGroup>
#include <QtWidgets/QCheckBox>
#include <QtWidgets/QComboBox>
#include <QtWidgets/QDialog>
#include <QtWidgets/QDialogButtonBox>
#include <QtWidgets/QGridLayout>
#include <QtWidgets/QHBoxLayout>
#include <QtWidgets/QHeaderView>
#include <QtWidgets/QLabel>
#include <QtWidgets/QSpacerItem>
```

Include dependency graph for ui_animadddialog.h:

This graph shows which files directly or indirectly include this file:

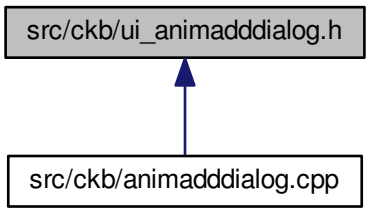

Data Structures

- class Ui_AnimAddDialog
- class Ui::AnimAddDialog

Namespaces

- Ui

13.159 src/ckb/ui_animsettingdialog.h File Reference

```
#include <QtCore/QVariant>
#include <QtWidgets/QAction>
#include <QtWidgets/QApplication>
#include <QtWidgets/QButtonGroup>
#include <QtWidgets/QCheckBox>
#include <QtWidgets/QDialog>
#include <QtWidgets/QDialogButtonBox>
#include <QtWidgets/QDoubleSpinBox>
#include <QtWidgets/QFrame>
#include <QtWidgets/QGridLayout>
#include <QtWidgets/QHeaderView>
#include <QtWidgets/QLabel>
#include <QtWidgets/QLineEdit>
#include <QtWidgets/QSpacerItem>
#include <QtWidgets/QTabWidget>
#include <QtWidgets/QWidget>
```

Include dependency graph for ui_animsettingdialog.h:

This graph shows which files directly or indirectly include this file:

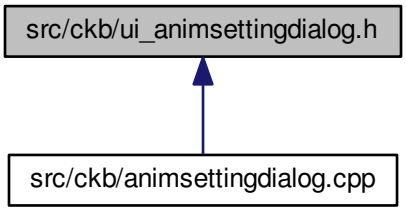

Data Structures

- class Ui_AnimSettingDialog
- class Ui::AnimSettingDialog

Namespaces

- Ui

13.160 src/ckb/ui_extrasettingswidget.h File Reference

```
#include <QtCore/QVariant>
```

```
#include <QtWidgets/QAction>
#include <QtWidgets/QApplication>
#include <QtWidgets/QButtonGroup>
#include <QtWidgets/QCheckBox>
#include <QtWidgets/QDialog>
#include <QtWidgets/QDialogButtonBox>
#include <QtWidgets/QFrame>
#include <QtWidgets/QGridLayout>
#include <QtWidgets/QHBoxLayout>
#include <QtWidgets/QHeaderView>
#include <QtWidgets/QLabel>
#include <QtWidgets/QPushButton>
#include <QtWidgets/QSpacerItem>
#include <QtWidgets/QSpinBox>
#include <QtWidgets/QWidget>
```

Include dependency graph for ui_extrasettingswidget.h:

This graph shows which files directly or indirectly include this file:

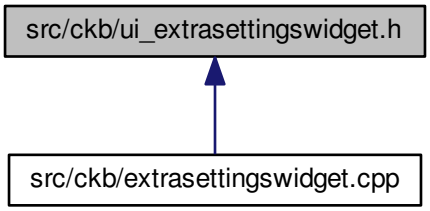

Data Structures

- class Ui_ExtraSettingsWidget
- class Ui::ExtraSettingsWidget

Namespaces

- Ui

13.161 src/ckb/ui_fwupgradedialog.h File Reference

```
#include <QtCore/QVariant>
```

```
#include <QtWidgets/QAction>
#include <QtWidgets/QApplication>
#include <QtWidgets/QButtonGroup>
#include <QtWidgets/QDialog>
#include <QtWidgets/QGridLayout>
#include <QtWidgets/QHeaderView>
#include <QtWidgets/QLabel>
#include <QtWidgets/QProgressBar>
#include <QtWidgets/QPushButton>
#include <QtWidgets/QSpacerItem>
```

Include dependency graph for ui_fwupgradedialog.h:

This graph shows which files directly or indirectly include this file:

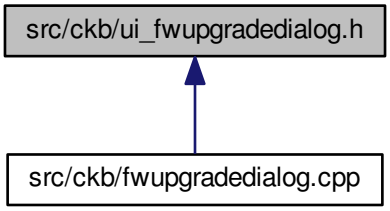

Data Structures

- class Ui_FwUpgradeDialog
- class Ui::FwUpgradeDialog

Namespaces

- Ui

13.162 src/ckb/ui_gradientdialog.h File Reference

```
#include <QtCore/QVariant>
```

```
#include <QtWidgets/QAction>
#include <QtWidgets/QApplication>
#include <QtWidgets/QButtonGroup>
#include <QtWidgets/QDialog>
#include <QtWidgets/QDialogButtonBox>
#include <QtWidgets/QGridLayout>
#include <QtWidgets/QGroupBox>
#include <QtWidgets/QHBoxLayout>
#include <QtWidgets/QHeaderView>
#include <QtWidgets/QLabel>
#include <QtWidgets/QLineEdit>
#include <QtWidgets/QListWidget>
#include <QtWidgets/QPushButton>
#include <QtWidgets/QSpacerItem>
#include <QtWidgets/QSpinBox>
#include "colorbutton.h"
#include "gradientdialogwidget.h"
```

Include dependency graph for ui_gradientdialog.h:



This graph shows which files directly or indirectly include this file:

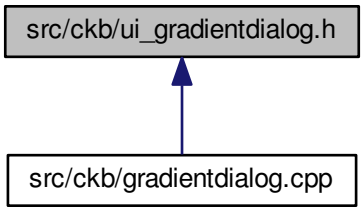

Data Structures

- class Ui_GradientDialog
- class Ui::GradientDialog

Namespaces

- Ui

13.163 src/ckb/ui_kbanimwidget.h File Reference

```
#include <QtCore/QVariant>
```

```
#include <QtWidgets/QAction>
#include <QtWidgets/QApplication>
#include <QtWidgets/QButtonGroup>
#include <QtWidgets/QComboBox>
#include <QtWidgets/QDoubleSpinBox>
#include <QtWidgets/QGridLayout>
#include <QtWidgets/QHBoxLayout>
#include <QtWidgets/QHeaderView>
#include <QtWidgets/QLabel>
#include <QtWidgets/QLineEdit>
#include <QtWidgets/QPushButton>
#include <QtWidgets/QSpacerItem>
#include <QtWidgets/QStackedWidget>
#include <QtWidgets/QVBoxLayout>
#include <QtWidgets/QWidget>
#include "rlistwidget.h"
```

Include dependency graph for ui_kbanimwidget.h:



This graph shows which files directly or indirectly include this file:

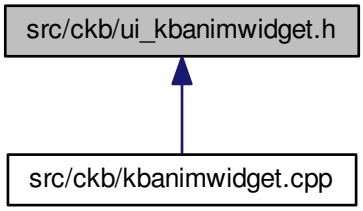

Data Structures

- class Ui_KbAnimWidget
- class Ui::KbAnimWidget

Namespaces

- Ui

13.164 src/ckb/ui_kbbindwidget.h File Reference

```
#include <QtCore/QVariant>
```

```
#include <QtWidgets/QAction>
#include <QtWidgets/QApplication>
#include <QtWidgets/QButtonGroup>
#include <QtWidgets/QFrame>
#include <QtWidgets/QGridLayout>
#include <QtWidgets/QHBoxLayout>
#include <QtWidgets/QHeaderView>
#include <QtWidgets/QLabel>
#include <QtWidgets/QPushButton>
#include <QtWidgets/QSpacerItem>
#include <QtWidgets/QVBoxLayout>
#include <QtWidgets/QWidget>
#include "keywidget.h"
#include "rebindwidget.h"
```

Include dependency graph for ui_kbbindwidget.h:

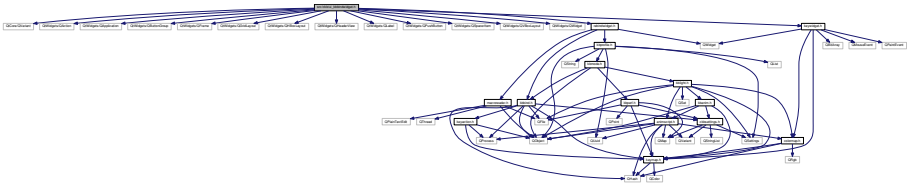

This graph shows which files directly or indirectly include this file:

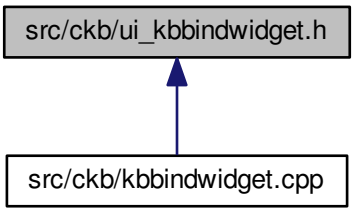

Data Structures

- class Ui_KbBindWidget
- class Ui::KbBindWidget

Namespaces

- Ui

13.165 src/ckb/ui_kblightwidget.h File Reference

```
#include <QtCore/QVariant>
```

```
#include <QtWidgets/QAction>
#include <QtWidgets/QApplication>
#include <QtWidgets/QButtonGroup>
#include <QtWidgets/QCheckBox>
#include <QtWidgets/QComboBox>
#include <QtWidgets/QFrame>
#include <QtWidgets/QGridLayout>
#include <QtWidgets/QHBoxLayout>
#include <QtWidgets/QHeaderView>
#include <QtWidgets/QLabel>
#include <QtWidgets/QPushButton>
#include <QtWidgets/QSpacerItem>
#include <QtWidgets/QVBoxLayout>
#include <QtWidgets/QWidget>
#include "colorbutton.h"
#include "kbanimwidget.h"
#include "keywidget.h"
```

Include dependency graph for ui_kblightwidget.h:

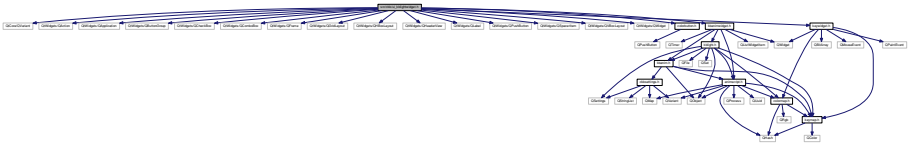

This graph shows which files directly or indirectly include this file:

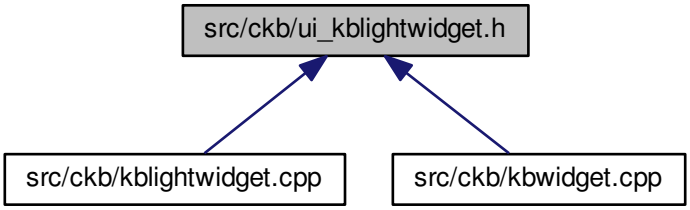

Data Structures

- class Ui_KbLightWidget
- class Ui::KbLightWidget

Namespaces

- Ui

13.166 src/ckb/ui_kbprofiledialog.h File Reference

```
#include <QtCore/QVariant>
```

```
#include <QtWidgets/QAction>
#include <QtWidgets/QApplication>
#include <QtWidgets/QButtonGroup>
#include <QtWidgets/QDialog>
#include <QtWidgets/QDialogButtonBox>
#include <QtWidgets/QGridLayout>
#include <QtWidgets/QHeaderView>
#include <QtWidgets/QSpacerItem>
#include "rlistwidget.h"
```

Include dependency graph for ui_kbprofiledialog.h:

This graph shows which files directly or indirectly include this file:

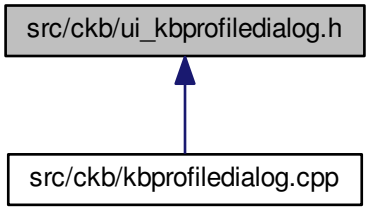

Data Structures

- class Ui_KbProfileDialog
- class Ui::KbProfileDialog

Namespaces

- Ui

13.167 src/ckb/ui_kbwidget.h File Reference

```
#include <QtCore/QVariant>
```

```
#include <QtWidgets/QAction>
#include <QtWidgets/QApplication>
#include <QtWidgets/QButtonGroup>
#include <QtWidgets/QComboBox>
#include <QtWidgets/QGridLayout>
#include <QtWidgets/QHBoxLayout>
#include <QtWidgets/QHeaderView>
#include <QtWidgets/QLabel>
#include <QtWidgets/QPushButton>
#include <QtWidgets/QSpacerItem>
#include <QtWidgets/QTabWidget>
#include <QtWidgets/QWidget>
#include <kblightwidget.h>
#include "kbbindwidget.h"
#include "kperfwidget.h"
#include "mperfwidget.h"
#include "rlistwidget.h"
```

Include dependency graph for ui_kbwidget.h:

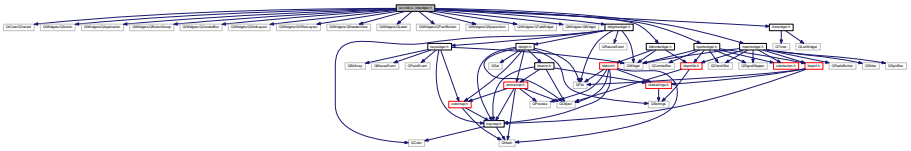

This graph shows which files directly or indirectly include this file:



Data Structures

- class Ui_KbWidget
- class Ui::KbWidget

Namespaces

- Ui

13.168 src/ckb/ui_kperfwidget.h File Reference

```
#include <QtCore/QVariant>
```

```
#include <QtWidgets/QAction>
#include <QtWidgets/QApplication>
#include <QtWidgets/QButtonGroup>
#include <QtWidgets/QCheckBox>
#include <QtWidgets/QComboBox>
#include <QtWidgets/QFrame>
#include <QtWidgets/QGridLayout>
#include <QtWidgets/QHBoxLayout>
#include <QtWidgets/QHeaderView>
#include <QtWidgets/QLabel>
#include <QtWidgets/QPushButton>
#include <QtWidgets/QSpacerItem>
#include <QtWidgets/QSpinBox>
#include <QtWidgets/QWidget>
#include <colorbutton.h>
```

Include dependency graph for ui_kperfwidget.h:

This graph shows which files directly or indirectly include this file:



Data Structures

- class Ui_KPerfWidget
- class Ui::KPerfWidget

Namespaces

- Ui

13.169 src/ckb/ui_layoutdialog.h File Reference

```
#include <QtCore/QVariant>
```

```
#include <QtWidgets/QAction>
#include <QtWidgets/QApplication>
#include <QtWidgets/QButtonGroup>
#include <QtWidgets/QComboBox>
#include <QtWidgets/QDialog>
#include <QtWidgets/QDialogButtonBox>
#include <QtWidgets/QGridLayout>
#include <QtWidgets/QHeaderView>
#include <QtWidgets/QLabel>
#include <QtWidgets/QSpacerItem>
```

Include dependency graph for ui_layoutdialog.h:

This graph shows which files directly or indirectly include this file:



Data Structures

- class Ui_LayoutDialog
- class Ui::LayoutDialog

Namespaces

- Ui

13.170 src/ckb/ui_mainwindow.h File Reference

```
#include <QtCore/QVariant>
#include <QtWidgets/QAction>
#include <QtWidgets/QApplication>
#include <QtWidgets/QButtonGroup>
#include <QtWidgets/QGridLayout>
#include <QtWidgets/QHeaderView>
#include <QtWidgets/QMainWindow>
#include <QtWidgets/QTabWidget>
#include <QtWidgets/QWidget>
```

Include dependency graph for ui_mainwindow.h:

This graph shows which files directly or indirectly include this file:



Data Structures

- class Ui_MainWindow
- class Ui::MainWindow

Namespaces

- Ui

13.171 src/ckb/ui_modeselectdialog.h File Reference

```
#include <QtCore/QVariant>
#include <QtWidgets/QAction>
#include <QtWidgets/QApplication>
#include <QtWidgets/QButtonGroup>
#include <QtWidgets/QDialog>
#include <QtWidgets/QDialogButtonBox>
#include <QtWidgets/QGridLayout>
#include <QtWidgets/QHeaderView>
#include <QtWidgets/QLabel>
#include <QtWidgets/QListWidget>
#include <QtWidgets/QPushButton>
```

Include dependency graph for ui_modeselectdialog.h:

This graph shows which files directly or indirectly include this file:

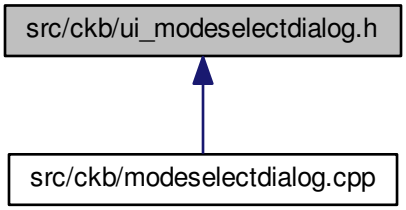

Data Structures

- class Ui_ModeSelectDialog
- class Ui::ModeSelectDialog

Namespaces

- Ui

13.172 src/ckb/ui_mperfwidget.h File Reference

```
#include <QtCore/QVariant>
#include <QtWidgets/QAction>
#include <QtWidgets/QApplication>
#include <QtWidgets/QButtonGroup>
#include <QtWidgets/QCheckBox>
#include <QtWidgets/QComboBox>
#include <QtWidgets/QFrame>
#include <QtWidgets/QGridLayout>
#include <QtWidgets/QHBoxLayout>
#include <QtWidgets/QHeaderView>
#include <QtWidgets/QLabel>
#include <QtWidgets/QPushButton>
#include <QtWidgets/QSlider>
#include <QtWidgets/QSpacerItem>
#include <QtWidgets/QSpinBox>
#include <QtWidgets/QVBoxLayout>
#include <QtWidgets/QWidget>
#include <colorbutton.h>
```

Include dependency graph for ui_mperfwidget.h:



This graph shows which files directly or indirectly include this file:



Data Structures

- class Ui_MPerfWidget
- class Ui::MPerfWidget

Namespaces

- Ui

13.173 src/ckb/ui_rebindwidget.h File Reference

```
#include <QtCore/QVariant>
#include <QtWidgets/QAction>
#include <QtWidgets/QApplication>
#include <QtWidgets/QButtonGroup>
#include <QtWidgets/QCheckBox>
#include <QtWidgets/QComboBox>
#include <QtWidgets/QGridLayout>
#include <QtWidgets/QGroupBox>
#include <QtWidgets/QHBoxLayout>
#include <QtWidgets/QHeaderView>
#include <QtWidgets/QLabel>
#include <QtWidgets/QLineEdit>
#include <QtWidgets/QPlainTextEdit>
#include <QtWidgets/QPushButton>
#include <QtWidgets/QRadioButton>
#include <QtWidgets/QSpacerItem>
#include <QtWidgets/QSpinBox>
#include <QtWidgets/QTabWidget>
#include <QtWidgets/QVBoxLayout>
#include <QtWidgets/QWidget>
```

Include dependency graph for ui_rebindwidget.h:

This graph shows which files directly or indirectly include this file:

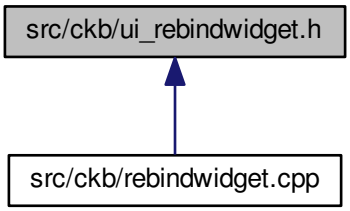

Data Structures

- class Ui_RebindWidget
- class Ui::RebindWidget

Namespaces

- Ui

13.174 src/ckb/ui_settingswidget.h File Reference

```
#include <QtCore/QVariant>
#include <QtWidgets/QAction>
#include <QtWidgets/QApplication>
#include <QtWidgets/QButtonGroup>
#include <QtWidgets/QCheckBox>
#include <QtWidgets/QComboBox>
#include <QtWidgets/QFrame>
#include <QtWidgets/QGridLayout>
#include <QtWidgets/QHBoxLayout>
#include <QtWidgets/QHeaderView>
#include <QtWidgets/QLabel>
#include <QtWidgets/QPushButton>
#include <QtWidgets/QSpacerItem>
#include <QtWidgets/QWidget>
```

Include dependency graph for ui_settingswidget.h:

This graph shows which files directly or indirectly include this file:

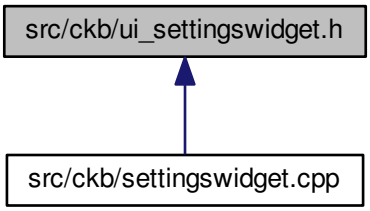

Data Structures

- class Ui_SettingsWidget
- class Ui::SettingsWidget

Namespaces

- Ui

Index

~AnimAddDialog
AnimAddDialog, 43
~AnimScript
AnimScript, 57
~AnimSettingDialog
AnimSettingDialog, 105
~CkbSettings
CkbSettings, 125
~CkbSettingsWriter
CkbSettingsWriter, 138
~ColorMap
ColorMap, 150
~ExtraSettingsWidget
ExtraSettingsWidget, 173
~FwUpgradeDialog
FwUpgradeDialog, 182
~GradientDialog
GradientDialog, 212
~KPerfWidget
KPerfWidget, 701
~Kb
Kb, 260
~KbAnimWidget
KbAnimWidget, 345
~KbBindWidget
KbBindWidget, 399
~KbFirmware
KbFirmware, 411
~KbLight
KbLight, 425
~KbLightWidget
KbLightWidget, 460
~KbMode
KbMode, 488
~KbProfileDialog
KbProfileDialog, 551
~KbWidget
KbWidget, 567
~KeyAction
KeyAction, 603
~LayoutDialog
LayoutDialog, 714
~MPerfWidget
MPerfWidget, 775
~MacroReader
MacroReader, 718
~MainWindow
MainWindow, 731
~ModeSelectDialog
ModeSelectDialog, 748
~QuaGzipFile
QuaGzipFile, 810
~QuaZIODevice
QuaZIODevice, 816
~QuaZip
QuaZip, 825
~QuaZipDir
QuaZipDir, 856
~QuaZipFile
QuaZipFile, 876
~QuaZipFilePrivate
QuaZipFilePrivate, 907
~RebindWidget
RebindWidget, 964
~SGroup
SGroup, 1026
~SettingsWidget
SettingsWidget, 1004
_LAYOUT_MAX
KeyMap, 631
_MODEL_MAX
KeyMap, 632
_FILE_OFFSET_BIT
ioapi.h, 1325
_LARGEFILE64_SOURCE
ioapi.h, 1326
_Z_OF
ioapi.h, 1328
unzip.c, 1376
unzip.h, 1430, 1431
zip.c, 1449
zip.h, 1502, 1503
__USE_FILE_OFFSET64
ioapi.h, 1325
__USE_LARGEFILE64
ioapi.h, 1325
_alpha
ColorButton, 148
GradientButton, 200
_angleSnap
KbPerf, 528
_anim
AnimSettingDialog, 116
_animList
KbLight, 447
_animMap
KbLight, 447
_backing

CkbSettingsWriter, 139
_bigIcons
ColorButton, 148
_bind
KbBind, 388
KbMode, 496
_bindMap
KeyWidget, 672
_checkUpdates
KbFirmware, 411
_color
ColorButton, 148
_colorBuffer
AnimScript, 81
_colorMap
KbLight, 448
KeyWidget, 672
_colors
AnimScript, 81
ColorMap, 157
GradientDialogWidget, 236
_count
ColorMap, 157
_curDpi
KbPerf, 503
_current
GradientDialogWidget, 236
_currentMode
Kb, 301
KbProfile, 548
_currentProfile
Kb, 301
_daemonVersion
KbManager, 482
_delay
Kb, 301
_devParent
KbBind, 388
_devices
KbManager, 482
_dimming
KbLight, 448
_displayColorMap
KeyWidget, 673
_dither
Kb, 301
_dpiIndicator
KbPerf, 528
_eventTimer
KbManager, 482
_fileForBoard
KbFirmware, 412
_frameRate
Kb, 301
_friendlyName
Key, 597
_globalRemap
KbBind, 388
_globalSettings
ckbsettings.cpp, 1236
_guiVersion
KbManager, 482
_guid
KbAnim, 330
_hwProfile
Kb, 301
_iOpacity
KbPerf, 528
_id
KbMode, 496
KbProfile, 548
_indicatorList
KbLight, 448
_indicatorMap
KbLight, 448
_indicators
KeyWidget, 673
_info
AnimScript, 81
_isActive
KbAnim, 330
_isActiveKp
KbAnim, 330
_kbManager
KbManager, 483
_keyMap
KbProfile, 548
_keyNames
ColorMap, 157
_keys
AnimAddDialog, 46
AnimScript, 81
KbAnim, 330
KeyMap, 651
_latestForBoard
KbFirmware, 413
_layout
Kb, 302
_liftHeight
KbPerf, 528
_light
AnimAddDialog, 46
KbMode, 496
_map
AnimScript, 81
KbAnim, 330
KbBind, 388
KbLight, 448
_mapCount
ColorMap, 157
_mode
KbAnim, 330
_modeList
ModeSelectDialog, 749
_model
Kb, 302

_modes
KbProfile, 548
_monochrome
KeyWidget, 673
_mouseAccel
Kb, 302
_name
KbAnim, 330
KbMode, 496
KbProfile, 548
_needsMapRefresh
KbLight, 448
_needsSave
Kb, 302
KbAnim, 330
KbBind, 388
KbLight, 448
KbMode, 496
KbPerf, 528
KbProfile, 548
_needsUpdate
KbBind, 388
KbPerf, 529
_opacity
KbAnim, 331
_paramValues
AnimScript, 81
_parameters
KbAnim, 331
_patch
keymap.cpp, 1283
_path
AnimScript, 81
_perf
KbMode, 496
_presetValues
AnimScript, 82
_presets
AnimScript, 81
_previewAnim
KbLight, 448
_profiles
Kb, 302
_qColorMap
KbLight, 448
_removals
CkbSettingsWriter, 139
_rgbMode
KeyWidget, 673
_scanTimer
KbManager, 483
_script
KbAnim, 331
_scriptGuid
KbAnim, 331
_scriptName
KbAnim, 331
_scrollSpeed
Kb, 302
_setLabel
ColorButton, 148
_settings
SGroup, 1026
_shareDimming
kblight.cpp, 1266
_start
KbLight, 449
_stops
GradientButton, 200
GradientDialogWidget, 236
_storageName
Key, 597
_tempParameters
KbAnim, 331
_updates
CkbSettingsWriter, 139
_value
KeyAction, 625
_winLock
KbBind, 388
_xyLink
MPerfWidget, 785

ADD
KeyWidget, 655
ALWAYS_OFF
KPerfWidget, 699
ALWAYS_ON
KPerfWidget, 699
aCopyLabel
Ui::KbAnimWidget, 338
Ui_KbAnimWidget, 1075
ALLOC
unzip.c, 1374
zip.c, 1446
aMissingLabel
Ui::KbAnimWidget, 338
Ui_KbAnimWidget, 1075
aMissingPage
Ui::KbAnimWidget, 338
Ui_KbAnimWidget, 1075
ANIM_KRSTOP
keyaction.cpp, 1277
ANIM_ONCE
keyaction.cpp, 1277
ANSI_ENTER_H
keymap.cpp, 1280
ANSI_ENTER_W
keymap.cpp, 1280
ANSI_ENTER_X
keymap.cpp, 1280
ANSI_ENTER_Y
keymap.cpp, 1280
ANSI_LSHIFT_W
keymap.cpp, 1280
ANSI_LSHIFT_X
keymap.cpp, 1281

aNameLabel
Ui::KbAnimWidget, 338
Ui_KbAnimWidget, 1075
APPEND_STATUS_CREATE
zip.h, 1500
aSnapBox
Ui::MPerfWidget, 761
Ui_MPerfWidget, 1150
AUTO_CHECK_TIME
kbfirmware.cpp, 1262
aVerLabel
Ui::KbAnimWidget, 339
Ui_KbAnimWidget, 1076
action
KbBind, 364
actionAbout
Ui::MainWindow, 726
Ui_MainWindow, 1134
actionButton
Ui::FwUpgradeDialog, 192
Ui_FwUpgradeDialog, 1060
actionExit
Ui::MainWindow, 726
Ui_MainWindow, 1134
actionTab
Ui::RebindWidget, 944
Ui_RebindWidget, 1174
activeDevices
kb.cpp, 1253
activeLights
kblight.cpp, 1266
Add
KbAnim, 308
add_data_in_datablock
zip.c, 1449
addAnim
KbAnimWidget, 345
KbLight, 425
addCurrentFileToDirectoryMap
QuaZipPrivate, 921
addDevice
MainWindow, 732
addNewModeItem
KbWidget, 567
addNewProfileItem
KbProfileDialog, 551
addPreset
GradientDialog, 212
adjustDisplay
KeyAction, 603
advance
AnimScript, 58
alloc
ColorMap, 151
allocate_new_datablock
zip.c, 1450
allowAlpha
ColorButton, 142, 143
altBox
Ui::SettingsWidget, 1019
Ui_SettingsWidget, 1196
altLabel
Ui::SettingsWidget, 1019
Ui_SettingsWidget, 1196
angleDialChanged
AnimSettingDialog, 105
angleDialMapper
AnimSettingDialog, 116
angleFlip
animsettingdialog.cpp, 1212
angleSnap
KbPerf, 503, 504
angleSpinnerChanged
AnimSettingDialog, 106
angleSpinnerMapper
AnimSettingDialog, 116
angleSpinners
AnimSettingDialog, 116
AnimScript::Param, 56, 1210
animAction
KeyAction, 604
AnimAddDialog, 41
∼AnimAddDialog, 43
_keys, 46
_light, 46
AnimAddDialog, 42
AnimAddDialog, 42
chosenPreset, 43
chosenScript, 44
on_animBox_activated, 44
on_presetBox_activated, 45
on_previewBox_clicked, 46
scripts, 46
showPreview, 46
ui, 47
animBox
Ui::AnimAddDialog, 50
Ui::RebindWidget, 944
Ui_AnimAddDialog, 1030
Ui_RebindWidget, 1174
animButton
Ui::KbLightWidget, 455
Ui::RebindWidget, 944
Ui_KbLightWidget, 1090
Ui_RebindWidget, 1174
animChanged
KbAnimWidget, 346
animCountLabel
Ui::ExtraSettingsWidget, 165
Ui_ExtraSettingsWidget, 1051
animInfo
KeyAction, 605
animKeypress
KbLight, 425
animKrBox
Ui::RebindWidget, 944

Ui_RebindWidget, 1174
AnimList
KbLight, 424
animList
KbLight, 426, 427
Ui::KbAnimWidget, 338
Ui_KbAnimWidget, 1075
animName
Ui::AnimSettingDialog, 91
Ui_AnimSettingDialog, 1038
animOnceBox
Ui::RebindWidget, 945
Ui_RebindWidget, 1175
animPage
Ui::KbAnimWidget, 338
Ui_KbAnimWidget, 1076
animPathLabel
Ui::ExtraSettingsWidget, 165
Ui_ExtraSettingsWidget, 1051
animScanButton
Ui::ExtraSettingsWidget, 165
Ui_ExtraSettingsWidget, 1052
AnimScript, 52
~AnimScript, 57
_colorBuffer, 81
_colors, 81
_info, 81
_keys, 81
_map, 81
_paramValues, 81
_path, 81
_presetValues, 82
_presets, 81
advance, 58
AnimScript, 57
AnimScript, 57
author, 58
begin, 59
colors, 60
copy, 60
copyright, 61
count, 61
description, 62
durationMsec, 82
end, 62
firstFrame, 82
frame, 63
guid, 64
hasFrame, 64
hasKeypress, 65
hasParam, 65
inFrame, 82
init, 66
initialized, 82
KP_NAME, 82
KP_NONE, 82
KP_POSITION, 82
keypress, 67
lastFrame, 82
license, 68
list, 68
load, 69
minX, 83
minY, 83
name, 72
param, 72
paramIterator, 74
parameters, 73
path, 74
preset, 74
PresetValue, 57
presets, 75
printParams, 75
process, 83
readAnyFrame, 83
readFrame, 83
readProcess, 76
repeatMsec, 83
retrigger, 77
scan, 78
scripts, 83
setDuration, 78
stop, 79
stopped, 83
version, 80
year, 80
AnimSettingDialog, 97
~AnimSettingDialog, 105
_anim, 116
angleDialChanged, 105
angleDialMapper, 116
angleSpinnerChanged, 106
angleSpinnerMapper, 116
angleSpinners, 116
AnimSettingDialog, 100
AnimSettingDialog, 100
hLine, 107
hasRepeat, 117
kpStopCheck, 117
lastDuration, 117
name, 108
newDuration, 108
on_delayBox_valueChanged, 109
on_kpDelayBox_valueChanged, 110
on_kpReleaseBox_stateChanged, 110
on_kpRepeatBox_valueChanged, 111
on_repeatBox_valueChanged, 111
settingWidgets, 117
stopCheck, 117
ui, 117
updateMapper, 117
updateParam, 112
updateStops, 115
animTab
Ui::RebindWidget, 945
Ui_RebindWidget, 1175

animWidget
Ui::KbLightWidget, 455
Ui_KbLightWidget, 1091
animation
KeyWidget, 673
animations
KbAnimWidget, 359
animscript.cpp
ONE_DAY, 1209
urlParam, 1209
animsettingdialog.cpp
angleFlip, 1212
appShare
main.cpp, 1302
mainwindow.cpp, 1307
append
KbProfile, 536
appendProfile
Kb, 263
applyButton
Ui::RebindWidget, 945
Ui_RebindWidget, 1175
applyChanges
RebindWidget, 964
applyIndicators
KbPerf, 504
atEnd
QuaZipFile, 876
author
AnimScript, 58
autoClose
QuaZipPrivate, 925
autoFWBox
Ui::SettingsWidget, 1019
Ui_SettingsWidget, 1196
AutoRun, 118
available, 118
disable, 119
enable, 119
isEnabled, 120
once, 121
autoSave
Kb, 263
autorun.cpp
settingPath, 1214
available
AutoRun, 118

BOTH
KPerfWidget, 699
BUFREADCOMMENT
unzip.c, 1375
zip.c, 1447
BUILD.md, 1207
backing
CkbSettings, 136
base
KbLight, 427
begin
AnimScript, 59
beginGroup
CkbSettings, 125
bgButton
Ui::KbLightWidget, 455
Ui_KbLightWidget, 1091
bigIcons
ColorButton, 143, 144
bind
KbBindWidget, 407
KbMode, 488
KbPerf, 505
RebindWidget, 992
bindAction
KbBind, 364
BindMap
KeyWidget, 654
bindMap
KeyWidget, 655
bindTab
Ui::KbWidget, 591
Ui_KbWidget, 1103
bindWidget
Ui::KbWidget, 591
Ui_KbWidget, 1103
blend
KbAnim, 311
blendAdd
kbanim.cpp, 1255
blendBox
Ui::KbAnimWidget, 339
Ui_KbAnimWidget, 1076
blendDivide
kbanim.cpp, 1255
blendFunc
kbanim.cpp, 1255
blendMultiply
kbanim.cpp, 1255
blendNormal
kbanim.cpp, 1255
blendSubtract
kbanim.cpp, 1256
blob
FwUpgradeDialog, 187
boxXChanged
MPerfWidget, 775
boxXMapper
MPerfWidget, 785
boxYChanged
MPerfWidget, 776
boxYMapper
MPerfWidget, 785
brightnessBox
Ui::ExtraSettingsWidget, 165
Ui::KbLightWidget, 455
Ui_ExtraSettingsWidget, 1052
Ui_KbLightWidget, 1091
btnClearMacro

Ui::RebindWidget, 945
Ui_RebindWidget, 1175
btnStartMacro
Ui::RebindWidget, 945
Ui_RebindWidget, 1175
btnStopMacro
Ui::RebindWidget, 945
Ui_RebindWidget, 1175
builtIn
GradientDialog::Preset, 788
buttonBox
Ui::AnimAddDialog, 51
Ui::AnimSettingDialog, 91
Ui::ExtraSettingsWidget, 165
Ui::GradientDialog, 205
Ui::KbProfileDialog, 562
Ui::LayoutDialog, 711
Ui::ModeSelectDialog, 745
Ui_AnimAddDialog, 1030
Ui_AnimSettingDialog, 1038
Ui_ExtraSettingsWidget, 1052
Ui_GradientDialog, 1067
Ui_KbProfileDialog, 1096
Ui_LayoutDialog, 1130
Ui_ModeSelectDialog, 1138
buttonMapper1
MPerfWidget, 785
buttonMapper2
MPerfWidget, 785
byPosition
KeyMap, 633
bytesAvailable
QuaZipFile, 877

CAPS
KbPerf, 501
CENTRALHEADERMAGIC
zip.c, 1447
CKB_CONTAINER
ckb-anim.h, 1220
CKB_COPYRIGHT
ckb-anim.h, 1220
CKB_DESCRIPTION
ckb-anim.h, 1220
CKB_DOWN
ckb-anim.h, 1220
CKB_GRAD_MAX
ckb-anim.h, 1220
CKB_GUID
ckb-anim.h, 1221
CKB_KEYCLEAR
ckb-anim.h, 1221
CKB_KEYNAME_MAX
ckb-anim.h, 1221
CKB_KP_NAME
ckb-anim.h, 1221
CKB_KP_NONE
ckb-anim.h, 1221
CKB_KP_POSITION
ckb-anim.h, 1221
CKB_KPMODE
ckb-anim.h, 1221
CKB_LICENSE
ckb-anim.h, 1221
CKB_LIVEPARAMS
ckb-anim.h, 1221
CKB_MAX_WORD
ckb-anim.h, 1221
CKB_NAME
ckb-anim.h, 1221
CKB_PARAM
ckb-anim.h, 1222
CKB_PARAM_AGRADIENT
ckb-anim.h, 1222
CKB_PARAM_ANGLE
ckb-anim.h, 1222
CKB_PARAM_ARGB
ckb-anim.h, 1222
CKB_PARAM_BOOL
ckb-anim.h, 1222
CKB_PARAM_DOUBLE
ckb-anim.h, 1222
CKB_PARAM_GRADIENT
ckb-anim.h, 1222
CKB_PARAM_LABEL
ckb-anim.h, 1222
CKB_PARAM_LONG
ckb-anim.h, 1222
CKB_PARAM_RGB
ckb-anim.h, 1222
CKB_PARAM_STRING
ckb-anim.h, 1223
CKB_PARSE_AGRADIENT
ckb-anim.h, 1223
CKB_PARSE_ANGLE
ckb-anim.h, 1223
CKB_PARSE_ARGB
ckb-anim.h, 1223
CKB_PARSE_BOOL
ckb-anim.h, 1223
CKB_PARSE_DOUBLE
ckb-anim.h, 1223
CKB_PARSE_GRADIENT
ckb-anim.h, 1223
CKB_PARSE_LONG
ckb-anim.h, 1223
CKB_PARSE_RGB
ckb-anim.h, 1223
CKB_PARSE_STRING
ckb-anim.h, 1223
CKB_PREEMPT
ckb-anim.h, 1224
CKB_PRESET_END
ckb-anim.h, 1224
CKB_PRESET_PARAM
ckb-anim.h, 1224
CKB_PRESET_START

ckb-anim.h, 1224
CKB_REAL_ANGLE
ckb-anim.h, 1224
CKB_REPEAT
ckb-anim.h, 1224
CKB_TIME_ABSOLUTE
ckb-anim.h, 1224
CKB_TIME_DURATION
ckb-anim.h, 1224
CKB_TIMEMODE
ckb-anim.h, 1224
CKB_UP
ckb-anim.h, 1224
CKB_VERSION
ckb-anim.h, 1224
CRC32
crypt.h, 1320
cacheWritesInProgress
ckbsettings.cpp, 1235
ckbsettingswriter.cpp, 1239
calculate
QuaAdler32, 799
QuaChecksum32, 802
QuaCrc32, 805
call_zopen64
qioapi.cpp, 1333
call_zseek64
qioapi.cpp, 1333
call_ztell64
qioapi.cpp, 1333
cancelButton
Ui::FwUpgradeDialog, 192
Ui::RebindWidget, 945
Ui_FwUpgradeDialog, 1061
Ui_RebindWidget, 1175
capsBox
Ui::KPerfWidget, 686
Ui::SettingsWidget, 1019
Ui_KPerfWidget, 1117
Ui_SettingsWidget, 1196
capsColorOff
Ui::KPerfWidget, 686
Ui_KPerfWidget, 1117
capsColorOn
Ui::KPerfWidget, 686
Ui_KPerfWidget, 1118
capsLabel
Ui::SettingsWidget, 1019
Ui_SettingsWidget, 1196
CaseSensitivity
QuaZip, 824
caseSensitivity
QuaZipDir, 857
QuaZipFilePrivate, 908
catchUp
KbAnim, 312
cd
QuaZipDir, 857
cdUp
QuaZipDir, 859
centralWidget
Ui::MainWindow, 726
Ui_MainWindow, 1134
change
RListWidget, 997
changeAnim
KbLightWidget, 461
changeAnimKeys
KbLightWidget, 461
changeColor
KbLightWidget, 462
checkFwUpdates
MainWindow, 732
checkUpdates
KbFirmware, 414
checksum
QuaAdler32, 800
QuaCrc32, 806
childGroups
CkbSettings, 125
childKeys
CkbSettings, 126
chosenPreset
AnimAddDialog, 43
chosenScript
AnimAddDialog, 44
ckb-anim.h
CKB_CONTAINER, 1220
CKB_COPYRIGHT, 1220
CKB_DESCRIPTION, 1220
CKB_DOWN, 1220
CKB_GRAD_MAX, 1220
CKB_GUID, 1221
CKB_KEYCLEAR, 1221
CKB_KEYNAME_MAX, 1221
CKB_KP_NAME, 1221
CKB_KP_NONE, 1221
CKB_KP_POSITION, 1221
CKB_KPMODE, 1221
CKB_LICENSE, 1221
CKB_LIVEPARAMS, 1221
CKB_MAX_WORD, 1221
CKB_NAME, 1221
CKB_PARAM, 1222
CKB_PARAM_AGRADIENT, 1222
CKB_PARAM_ANGLE, 1222
CKB_PARAM_ARGB, 1222
CKB_PARAM_BOOL, 1222
CKB_PARAM_DOUBLE, 1222
CKB_PARAM_GRADIENT, 1222
CKB_PARAM_LABEL, 1222
CKB_PARAM_LONG, 1222
CKB_PARAM_RGB, 1222
CKB_PARAM_STRING, 1223
CKB_PARSE_AGRADIENT, 1223
CKB_PARSE_ANGLE, 1223

CKB_PARSE_ARGB, 1223
CKB_PARSE_BOOL, 1223
CKB_PARSE_DOUBLE, 1223
CKB_PARSE_GRADIENT, 1223
CKB_PARSE_LONG, 1223
CKB_PARSE_RGB, 1223
CKB_PARSE_STRING, 1223
CKB_PREEMPT, 1224
CKB_PRESET_END, 1224
CKB_PRESET_PARAM, 1224
CKB_PRESET_START, 1224
CKB_REAL_ANGLE, 1224
CKB_REPEAT, 1224
CKB_TIME_ABSOLUTE, 1224
CKB_TIME_DURATION, 1224
CKB_TIMEMODE, 1224
CKB_UP, 1224
CKB_VERSION, 1224
ckb_alpha_blend, 1225
ckb_frame, 1225
ckb_getline, 1225
ckb_grad_color, 1226
ckb_info, 1227
ckb_init, 1227
ckb_keypress, 1227
ckb_parameter, 1227
ckb_read_params, 1228
ckb_scan_grad, 1229
ckb_start, 1229
ckb_time, 1230
FALSE, 1224
M_PI, 1225
main, 1230
printurl, 1232
TRUE, 1225
urldecode, 1233
ckb_gradient, 1219
ckb_key, 1217
ckb_runctx, 1218
ckb_alpha_blend
ckb-anim.h, 1225
ckb_frame
ckb-anim.h, 1225
ckb_getline
ckb-anim.h, 1225
ckb_grad_color
ckb-anim.h, 1226
ckb_info
ckb-anim.h, 1227
ckb_init
ckb-anim.h, 1227
ckb_keypress
ckb-anim.h, 1227
ckb_parameter
ckb-anim.h, 1227
ckb_read_params
ckb-anim.h, 1228
ckb_scan_grad
ckb-anim.h, 1229
ckb_start
ckb-anim.h, 1229
ckb_time
ckb-anim.h, 1230
ckbDaemonVersion
KbManager, 474
ckbDaemonVersionF
KbManager, 474
ckbGuiVersion
KbManager, 475
ckbGuiVersionF
KbManager, 475
CkbSettings, 122
∼CkbSettings, 125
backing, 136
beginGroup, 125
childGroups, 125
childKeys, 126
CkbSettings, 124, 125
CkbSettings, 124, 125
cleanUp, 127
contains, 128
containsGroup, 128
endGroup, 129
get, 129
groups, 136
isBusy, 130
pwd, 131, 132
remove, 133
removeCache, 137
set, 133
setValue, 134
value, 135
writeCache, 137
CkbSettingsWriter, 137
∼CkbSettingsWriter, 138
_backing, 139
_removals, 139
_updates, 139
CkbSettingsWriter, 138
CkbSettingsWriter, 138
run, 139
ckbVersion
KbFirmware::FW, 179
ckbsettings.cpp
_globalSettings, 1236
cacheWritesInProgress, 1235
globalCache, 1236
globalSettings, 1235
globalThread, 1236
lockMutex, 1234
lockMutexCache, 1234
lockMutexStatic, 1235
lockMutexStatic2, 1235
settingsCacheMutex, 1236
settingsMutex, 1236
ckbsettingswriter.cpp

cacheWritesInProgress, 1239
lockMutex, 1238
lockMutexCache, 1238
lockMutexStatic, 1238
lockMutexStatic2, 1238
settingsCacheMutex, 1239
settingsMutex, 1239
cleanBlob
FwUpgradeDialog, 182
cleanUp
CkbSettings, 127
cleanup
MainWindow, 733
clear
ColorMap, 151
clearAnimation
KeyWidget, 656
clearDirectoryMap
QuaZipPrivate, 922
clearSelection
KbAnimWidget, 347
KeyWidget, 656
close
KbLight, 428
QuaGzipFile, 810
QuaZIODevice, 816
QuaZip, 826
QuaZipFile, 877
closeAction
MainWindow, 741
closeEvent
FwUpgradeDialog, 182
MainWindow, 734
cmd
Kb, 302
cmdpath
Kb, 302
color
ColorButton, 144, 145
KbLight, 429
colorAt
GradientDialogWidget, 224
ColorButton, 139
_alpha, 148
_bigIcons, 148
_color, 148
_setLabel, 148
allowAlpha, 142, 143
bigIcons, 143, 144
color, 144, 145
ColorButton, 142
colorChanged, 146
ColorButton, 142
pickColor, 146
setLabel, 146, 147
updateImage, 147
colorChanged
ColorButton, 146
GradientDialog, 213
MPerfWidget, 777
colorClicked
MPerfWidget, 778
colorForName
ColorMap, 152, 153
colorLink
MPerfWidget, 786
ColorMap, 149
∼ColorMap, 150
_colors, 157
_count, 157
_keyNames, 157
_mapCount, 157
alloc, 151
clear, 151
colorForName, 152, 153
ColorMap, 150
ColorMap, 150
colors, 153, 154
count, 154
deAlloc, 154
init, 155
keyNames, 156
operator=, 156
colorMap
KbLight, 430
KeyWidget, 656, 657
colormap.cpp
qs_strcmp, 1241
colormap.h
QColorMap, 1243
QColorMapIterator, 1243
QMutableColorMapIterator, 1243
colors
AnimScript, 60
ColorMap, 153, 154
comboBox
Ui::LayoutDialog, 711
Ui_LayoutDialog, 1130
CommandLineBackground
main.cpp, 1302
CommandLineClose
main.cpp, 1302
CommandLineError
main.cpp, 1302
CommandLineHelpRequested
main.cpp, 1302
CommandLineOK
main.cpp, 1302
CommandLineVersionRequested
main.cpp, 1302
CommandLineParseResults
main.cpp, 1302
comment
QuaZipFileInfo, 896
QuaZipFileInfo64, 903
QuaZipNewInfo, 917

QuaZipPrivate, 925
commentCodec
QuaZipPrivate, 925
commitParams
KbAnim, 314
compressDir
JlCompress, 238
compressFile
JlCompress, 239, 240
compressFiles
JlCompress, 241
compressSubDir
JlCompress, 243
compressedSize
QuaZipFileInfo, 896
QuaZipFileInfo64, 903
configLabel
mainwindow.cpp, 1307
Constants
QuaZip, 824
contains
CkbSettings, 128
KeyMap, 633
containsGroup
CkbSettings, 128
convertCaseSensitivity
QuaZip, 827
convertMacroBox
RebindWidget, 966
copy
AnimScript, 60
copyButton
Ui::KbBindWidget, 394
Ui::KPerfWidget, 686
Ui::MPerfWidget, 761
Ui_KbBindWidget, 1083
Ui_KPerfWidget, 1118
Ui_MPerfWidget, 1150
copyData
JlCompress.cpp, 1330
copyright
AnimScript, 61
count
AnimScript, 61
ColorMap, 154
KeyMap, 634
QuaZipDir, 859
crc
QuaZipFileInfo, 896
QuaZipFileInfo64, 903
QuaZipFilePrivate, 908
crypt.h
CRC32, 1320
decrypt_byte, 1320
init_keys, 1320
update_keys, 1321
zdecode, 1320
zencode, 1320
csDefault
QuaZip, 824
csInsensitive
QuaZip, 824
csSensitive
QuaZip, 824
csize
QuaZipFile, 878
ctrlBox
Ui::SettingsWidget, 1020
Ui_SettingsWidget, 1196
ctrlLabel
Ui::SettingsWidget, 1020
Ui_SettingsWidget, 1196
curDpi
KbPerf, 506, 507
curDpiIdx
KbPerf, 507, 508
curLabel
Ui::FwUpgradeDialog, 192
Ui_FwUpgradeDialog, 1061
curfile64_info, 1445
current
GradientDialogWidget, 225
KbAnimWidget, 359
currentBind
Kb, 263
currentChanged
GradientDialog, 213
GradientDialogWidget, 225
currentData
RListWidget, 1000
currentLight
Kb, 264
currentMode
Kb, 265
KbProfile, 536, 537
KbWidget, 584
currentPerf
Kb, 265
currentPreset
GradientDialog, 220
currentProfile
Kb, 266
currentSelection
KbBindWidget, 407
KbLightWidget, 470

d
QuaGzipFile, 813
QuaZIODevice, 820
QuaZipDir, 870
DE
KeyMap, 631
DK
KeyMap, 631
DAEMON.md, 1207
DATA_ROLE
RListWidget, 1000

DEF_MEM_LEVEL
zip.h, 1501
DESCRIPTORHEADERMAGIC
zip.c, 1447
DIALOG_HEIGHT_MAX
fwupgradedialog.cpp, 1246
DIALOG_HEIGHT_MIN
fwupgradedialog.cpp, 1247
DIALOG_WIDTH
fwupgradedialog.cpp, 1247
DPI_BASE
mperfwidget.cpp, 1316
DPI_COUNT
KbPerf, 529
MPerfWidget, 786
DPI_CUST_IDX
rebindwidget.cpp, 1507
DPI_CUSTOM
KeyAction, 625
DPI_DOWN
KeyAction, 626
DPI_MAX
KbPerf, 529
MPerfWidget, 786
DPI_MIN
KbPerf, 529
MPerfWidget, 786
DPI_OFFSET
rebindwidget.cpp, 1507
DPI_SNIPER
KeyAction, 626
DPI_UP
KeyAction, 626
dataDescriptorWritingEnabled
QuaZipPrivate, 925
dataForBoard
KbFirmware, 414
dateTime
QuaZipFileInfo, 896
QuaZipFileInfo64, 903
QuaZipNewInfo, 917
deAlloc
ColorMap, 154
decrypt_byte
crypt.h, 1320
defaultAction
KbBind, 365
KeyAction, 605
defaultFileNameCodec
QuaZipPrivate, 926
delayBox
Ui::AnimSettingDialog, 91
Ui::ExtraSettingsWidget, 165
Ui_AnimSettingDialog, 1039
Ui_ExtraSettingsWidget, 1052
delayButtons
Ui::RebindWidget, 945
Ui_RebindWidget, 1175
deleteButton
Ui::KbAnimWidget, 339
Ui_KbAnimWidget, 1076
deleteHw
Kb, 266
deletePrevious
Kb, 267
description
AnimScript, 62
devLabel
Ui::FwUpgradeDialog, 192
Ui_FwUpgradeDialog, 1061
devParent
KbBind, 366
devTab
Ui::KbWidget, 591
Ui_KbWidget, 1103
devUpdate
KbWidget, 568
device
KbProfileDialog, 557
KbWidget, 584
devices
KbManager, 476
devicesLabel
Ui::SettingsWidget, 1020
Ui_SettingsWidget, 1196
devpath
Kb, 302
kbmanager.cpp, 1269
settingswidget.cpp, 1616
didLoad
KbBind, 366
KbLight, 430
KbPerf, 508
didUpdateSelection
KbAnimWidget, 347
dimming
KbLight, 431
dirName
QuaZipDir, 860
directoryCaseInsensitive
QuaZipPrivate, 926
directoryCaseSensitive
QuaZipPrivate, 926
disable
AutoRun, 119
disableAppNap
media_mac.m, 1312
diskNumberStart
QuaZipFileInfo, 896
QuaZipFileInfo64, 903
displayColorMap
KeyWidget, 657
dither
Kb, 267, 268
ditherBox
Ui::ExtraSettingsWidget, 165

Ui_ExtraSettingsWidget, 1052
Divide
KbAnim, 309
doUpdate
KbMode, 488
downloadFinished
KbFirmware, 415
downloaded
KbFirmware, 415
dpi
KbPerf, 509
dpiAction
KeyAction, 606
dpiBox
Ui::RebindWidget, 946
Ui_RebindWidget, 1175
dpiButton
Ui::RebindWidget, 946
Ui_RebindWidget, 1176
dpiClr
KbPerf, 529
dpiColor
KbPerf, 510, 511
dpiCurIdx
KbPerf, 529
dpiCurX
KbPerf, 529
dpiCurY
KbPerf, 529
dpiCustLabel
Ui::RebindWidget, 946
Ui_RebindWidget, 1176
dpiCustXBox
Ui::RebindWidget, 946
Ui_RebindWidget, 1176
dpiCustYBox
Ui::RebindWidget, 946
Ui_RebindWidget, 1176
dpiDown
KbPerf, 511
dpiEnabled
KbPerf, 512
dpiExp
mperfwidget.cpp, 1315
dpiIndicator
KbPerf, 512, 513
dpiInfo
KeyAction, 607
dpiLastIdx
KbPerf, 529
dpiLog
mperfwidget.cpp, 1315
dpiOn
KbPerf, 529
dpiRound
mperfwidget.cpp, 1316
dpiUp
KbPerf, 513
dpiWarning
Ui::RebindWidget, 946
Ui_RebindWidget, 1176
dpiX
KbPerf, 530
dpiY
KbPerf, 530
dragged
RListWidget, 1000
drawInfo
KeyWidget, 657
driverName
KeyAction, 607
duplicateAnim
KbAnimWidget, 348
KbLight, 432
durationMsec
AnimScript, 82

ES
KeyMap, 631
EU
KeyMap, 631
EU_DVORAK
KeyMap, 631
eBox1
Ui::MPerfWidget, 761
Ui_MPerfWidget, 1150
eBox2
Ui::MPerfWidget, 761
Ui_MPerfWidget, 1150
eBox3
Ui::MPerfWidget, 762
Ui_MPerfWidget, 1150
eBox4
Ui::MPerfWidget, 762
Ui_MPerfWidget, 1150
eBox5
Ui::MPerfWidget, 762
Ui_MPerfWidget, 1151
ENDHEADERMAGIC
zip.c, 1447
ENUM_C
media.h, 1309
ENUM_END_C
media.h, 1309
EXTERN_C
media.h, 1309
effectiveParams
KbAnim, 314
enable
AutoRun, 119
enableChanged
MPerfWidget, 778
enableMapper
MPerfWidget, 786
end
AnimScript, 62
endGroup

CkbSettings, 129
enter
RListWidget, 997
entryInfoList
QuaZipDir, 860, 861
entryInfoList64
QuaZipDir, 861, 862
entryList
QuaZipDir, 862, 863
evLoop
FwUpgradeDialog, 187
eventTimer
KbManager, 476
exec
FwUpgradeDialog, 183
exists
QuaZipDir, 863, 864
exitSuccess
FwUpgradeDialog, 187
externalAttr
QuaZipFileInfo, 896
QuaZipFileInfo64, 903
QuaZipNewInfo, 917
extra
QuaZipFileInfo, 896
QuaZipFileInfo64, 904
SettingsWidget, 1011
extraButton
Ui::SettingsWidget, 1020
Ui_SettingsWidget, 1197
extraGlobal
QuaZipNewInfo, 918
extraLocal
QuaZipNewInfo, 918
ExtraSettingsWidget, 170
∼ExtraSettingsWidget, 173
ExtraSettingsWidget, 172
ExtraSettingsWidget, 172
on_animScanButton_clicked, 173
on_brightnessBox_clicked, 174
on_delayBox_clicked, 174
on_ditherBox_clicked, 174
on_fpsBox_valueChanged, 175
on_mAccelBox_clicked, 175
on_sAccelBox_clicked, 176
on_sSpeedBox_valueChanged, 176
on_trayBox_clicked, 177
pollUpdates, 177
ui, 178
extractDir
JlCompress, 246
extractFile
JlCompress, 248, 250
extractFiles
JlCompress, 251
extrasettingswidget.cpp
lastSharedDimming, 1243

FR
KeyMap, 631
FALSE
ckb-anim.h, 1224
FW
KbFirmware::FW, 179
features
Kb, 303
file_in_zip64_read_info_s, 1372
fileName
KbFirmware::FW, 179
QuaZipFilePrivate, 908
fileNameCodec
QuaZipPrivate, 926
filePath
QuaZipDir, 865
fill_qiodevice64_filefunc
qioapi.cpp, 1334
fill_qiodevice_filefunc
qioapi.cpp, 1335
fill_zlib_filefunc64_32_def_from_filefunc32
ioapi.h, 1328
qioapi.cpp, 1336
fillRect
GradientDialogWidget, 225
filter
QuaZipDir, 865
find
Kb, 268
KbProfile, 537
findAnim
KbLight, 432
findAnimIdx
KbLight, 433
firmware
Kb, 303
firstFrame
AnimScript, 82
flags
QuaZipFileInfo, 896
QuaZipFileInfo64, 904
flush
QuaGzipFile, 811
QuaZIODevice, 817
fnBox
Ui::RebindWidget, 946
Ui_RebindWidget, 1176
fnButton
Ui::RebindWidget, 946
Ui_RebindWidget, 1176
fnKeys
RebindWidget, 993
fps
KbManager, 476
fpsBox
Ui::ExtraSettingsWidget, 165
Ui_ExtraSettingsWidget, 1052
fpsWarnLabel
Ui::ExtraSettingsWidget, 165

Ui_ExtraSettingsWidget, 1052
frame
AnimScript, 63
frameDisplayed
KbLight, 434
frameRate
Kb, 269
frameUpdate
Kb, 270
KbLight, 434
free_datablock
zip.c, 1451
free_linkedlist
zip.c, 1451
friendlyActionName
KbBind, 367
friendlyName
KbBind, 367
Key, 596
KeyAction, 608
KeyMap, 634
fromName
KeyMap, 635
fromStorage
KeyMap, 636
fromString
GradientButton, 196
functions
kbanim.cpp, 1256
fwLabel
Ui::KbWidget, 591
Ui_KbWidget, 1103
fwTable
KbFirmware, 419
fwTableHash
KbFirmware, 419
fwUpdButton
Ui::KbWidget, 591
Ui_KbWidget, 1103
fwUpdLabel
Ui::KbWidget, 592
Ui_KbWidget, 1103
fwUpdLayout
Ui::KbWidget, 592
Ui_KbWidget, 1104
fwUpdPath
Kb, 303
fwUpdate
Kb, 271
fwUpdateFinished
FwUpgradeDialog, 184
Kb, 272
fwUpdateProgress
FwUpgradeDialog, 185
Kb, 272
FwUpgradeDialog, 179
~FwUpgradeDialog, 182
blob, 187
cleanBlob, 182
closeEvent, 182
evLoop, 187
exec, 183
exitSuccess, 187
fwUpdateFinished, 184
fwUpdateProgress, 185
FwUpgradeDialog, 181
FwUpgradeDialog, 181
kb, 187
on_actionButton_clicked, 185
on_cancelButton_clicked, 186
removeDev, 186
saveBlob, 186
savePath, 187
ui, 188
fwVersion
KbFirmware::FW, 179
fwupgradedialog.cpp
DIALOG_HEIGHT_MAX, 1246
DIALOG_HEIGHT_MIN, 1247
DIALOG_WIDTH, 1247
ids, 1247
verifyFw, 1246

GB
KeyMap, 631
GB_DVORAK
KeyMap, 631
GUID
KbProfileDialog, 558
KbWidget, 585
get
CkbSettings, 129
getActualFileName
QuaZipFile, 879
getCaseSensitivity
QuaZipFile, 880
getComment
QuaZip, 828
getCommentCodec
QuaZip, 828
getCurrentFileInfo
QuaZip, 829, 830
getCurrentFileName
QuaZip, 831
getDefaultFileNameCodec
QuaZipPrivate, 923
getEntriesCount
QuaZip, 832
getFileInfo
QuaZipFile, 880, 881
getFileInfoList
QuaZip, 833
QuaZipPrivate, 923
getFileInfoList64
QuaZip, 833
getFileList
JlCompress, 252

getFileName
QuaGzipFile, 811
QuaZipFile, 882
getFileNameCodec
QuaZip, 834
getFileNameList
QuaZip, 834
getGradient
GradientDialog, 214
getIndicator
KbPerf, 513
getIoDevice
QuaZIODevice, 818
QuaZip, 835
getKeyMap
Kb, 273
getLayout
KeyMap, 637
getMacroNumber
Kb, 273
KbBind, 368
getMacroPath
Kb, 273
KbBind, 368
getMap
keymap.cpp, 1284
getMode
QuaZip, 835
getModel
KeyMap, 638, 639
getMuteState
media.h, 1309
media_linux.cpp, 1311
media_mac.m, 1312
getNTFSTime
quazipfileinfo.cpp, 1361
getNTFSaTime
QuaZipFileInfo64, 899
getNTFScTime
QuaZipFileInfo64, 900
getNTFSmTime
QuaZipFileInfo64, 900
getPermissions
QuaZipFileInfo, 895
QuaZipFileInfo64, 901
getUnzFile
QuaZip, 836
getZip
QuaZipFile, 882
getZipError
QuaZip, 837
QuaZipFile, 882
getZipFile
QuaZip, 838
getZipName
QuaZip, 838
QuaZipFile, 883
globalCache
ckbsettings.cpp, 1236
globalRemap
KbBind, 369
globalRemapTime
KbBind, 389
globalSettings
ckbsettings.cpp, 1235
globalThread
ckbsettings.cpp, 1236
goToFirstFile
QuaZip, 839
goToFirstUnmappedFile
QuaZipPrivate, 924
goToNextFile
QuaZip, 840
gradient
GradientDialog::Preset, 788
GradientButton, 194
_alpha, 200
_stops, 200
fromString, 196
GradientButton, 196
gradientChanged, 197
GradientButton, 196
pickGradient, 197
toString, 198
updateImage, 199
gradientChanged
GradientButton, 197
GradientDialog, 208
~GradientDialog, 212
addPreset, 212
colorChanged, 213
currentChanged, 213
currentPreset, 220
getGradient, 214
GradientDialog, 211
GradientDialog, 211
makeIcon, 215
on_presetDelete_clicked, 216
on_presetList_currentItemChanged, 216
on_presetName_textEdited, 217
on_presetSave_clicked, 217
on_stopOpacity_valueChanged, 218
on_stopPos_valueChanged, 218
presets, 220
setPreset, 218
ui, 221
updatePresets, 219
GradientDialog::Preset, 787
builtIn, 788
gradient, 788
name, 788
Preset, 788
GradientDialogWidget, 221
_colors, 236
_current, 236
_stops, 236

colorAt, 224
current, 225
currentChanged, 225
fillRect, 225
GradientDialogWidget, 224
GradientDialogWidget, 224
makeStops, 226
mouseMoveEvent, 227
mousePressEvent, 228
mouseReleaseEvent, 228
moveCurrent, 229
paintEvent, 230
selected, 236
selectedOffset, 236
selectedPos, 236
selectedStop, 231
selectionColors, 232
setCurrentColor, 232
setStops, 233
stopCount, 234
stopRect, 234
stops, 235
gradientdialog.cpp
prefsPath, 1250
gridLayout
Ui::AnimAddDialog, 51
Ui::AnimSettingDialog, 91
Ui::ExtraSettingsWidget, 166
Ui::FwUpgradeDialog, 193
Ui::GradientDialog, 205
Ui::KbAnimWidget, 339
Ui::KbBindWidget, 394
Ui::KbLightWidget, 455
Ui::KbProfileDialog, 562
Ui::KbWidget, 592
Ui::KPerfWidget, 686
Ui::LayoutDialog, 711
Ui::MainWindow, 727
Ui::ModeSelectDialog, 745
Ui::MPerfWidget, 762
Ui::RebindWidget, 947
Ui::SettingsWidget, 1020
Ui_AnimAddDialog, 1030
Ui_AnimSettingDialog, 1039
Ui_ExtraSettingsWidget, 1052
Ui_FwUpgradeDialog, 1061
Ui_GradientDialog, 1067
Ui_KbAnimWidget, 1076
Ui_KbBindWidget, 1083
Ui_KbLightWidget, 1091
Ui_KbProfileDialog, 1096
Ui_KbWidget, 1104
Ui_KPerfWidget, 1118
Ui_LayoutDialog, 1130
Ui_MainWindow, 1134
Ui_ModeSelectDialog, 1138
Ui_MPerfWidget, 1151
Ui_RebindWidget, 1176
Ui_SettingsWidget, 1197
gridLayout_10
Ui::RebindWidget, 947
Ui_RebindWidget, 1177
gridLayout_2
Ui::AnimSettingDialog, 92
Ui::FwUpgradeDialog, 193
Ui::GradientDialog, 205
Ui::KbAnimWidget, 339
Ui::KbBindWidget, 394
Ui::KbLightWidget, 455
Ui::KbWidget, 592
Ui::RebindWidget, 947
Ui_AnimSettingDialog, 1039
Ui_FwUpgradeDialog, 1061
Ui_GradientDialog, 1067
Ui_KbAnimWidget, 1076
Ui_KbBindWidget, 1083
Ui_KbLightWidget, 1091
Ui_KbWidget, 1104
Ui_RebindWidget, 1177
gridLayout_3
Ui::GradientDialog, 205
Ui::KbAnimWidget, 339
Ui::KbWidget, 592
Ui::RebindWidget, 947
Ui::SettingsWidget, 1020
Ui_GradientDialog, 1067
Ui_KbAnimWidget, 1076
Ui_KbWidget, 1104
Ui_RebindWidget, 1177
Ui_SettingsWidget, 1197
gridLayout_4
Ui::KbAnimWidget, 339
Ui::KbLightWidget, 455
Ui::KbWidget, 592
Ui::RebindWidget, 947
Ui_KbAnimWidget, 1076
Ui_KbLightWidget, 1091
Ui_KbWidget, 1104
Ui_RebindWidget, 1177
gridLayout_5
Ui::KbWidget, 592
Ui::RebindWidget, 947
Ui::SettingsWidget, 1020
Ui_KbWidget, 1104
Ui_RebindWidget, 1177
Ui_SettingsWidget, 1197
gridLayout_7
Ui::KbWidget, 592
Ui_KbWidget, 1104
gridLayout_8
Ui::RebindWidget, 947
Ui_RebindWidget, 1177
groupBox_2
Ui::GradientDialog, 206
Ui::RebindWidget, 947
Ui_GradientDialog, 1068

Ui_RebindWidget, 1177
groupBox_3
Ui::RebindWidget, 947
Ui_RebindWidget, 1177
groupBox_4
Ui::RebindWidget, 947
Ui_RebindWidget, 1177
groups
CkbSettings, 136
guid
AnimScript, 64
KbAnim, 315
UsbId, 1205
guidString
UsbId, 1202, 1203

HIGH
KbPerf, 500
HW_IMAX
KbPerf, 501
hLine
AnimSettingDialog, 107
HW_I_COUNT
KbPerf, 530
KPerfWidget, 706
HWMODE_MAX
Kb, 303
handleNotificationChannel
KbBind, 370
hasCurrentFile
QuaZip, 841
hasCurrentFile_f
QuaZipPrivate, 926
hasDownloaded
KbFirmware, 416
hasFrame
AnimScript, 64
hasGPG
KbFirmware, 419
hasKeypress
AnimScript, 65
hasLed
Key, 597
hasParam
AnimScript, 65
hasParameter
KbAnim, 315
hasRepeat
AnimSettingDialog, 117
hasScan
Key, 597
hasShownNewFW
KbWidget, 585
hash
KbFirmware::FW, 179
height
KbPerf, 500
Key, 597
KeyMap, 639
helpStatus
RebindWidget, 967
horizontalLayout
Ui::AnimAddDialog, 51
Ui::ExtraSettingsWidget, 166
Ui::GradientDialog, 206
Ui::KbAnimWidget, 339
Ui::KbLightWidget, 456
Ui::KPerfWidget, 686
Ui::MPerfWidget, 762
Ui::RebindWidget, 948
Ui::SettingsWidget, 1020
Ui_AnimAddDialog, 1030
Ui_ExtraSettingsWidget, 1052
Ui_GradientDialog, 1068
Ui_KbAnimWidget, 1076
Ui_KbLightWidget, 1091
Ui_KPerfWidget, 1118
Ui_MPerfWidget, 1151
Ui_RebindWidget, 1178
Ui_SettingsWidget, 1197
horizontalLayout_2
Ui::ExtraSettingsWidget, 166
Ui::GradientDialog, 206
Ui::KbBindWidget, 394
Ui::KbLightWidget, 456
Ui::KPerfWidget, 686
Ui::MPerfWidget, 762
Ui::RebindWidget, 948
Ui::SettingsWidget, 1020
Ui_ExtraSettingsWidget, 1053
Ui_GradientDialog, 1068
Ui_KbBindWidget, 1084
Ui_KbLightWidget, 1091
Ui_KPerfWidget, 1118
Ui_MPerfWidget, 1151
Ui_RebindWidget, 1178
Ui_SettingsWidget, 1197
horizontalLayout_3
Ui::KbLightWidget, 456
Ui::RebindWidget, 948
Ui_KbLightWidget, 1091
Ui_RebindWidget, 1178
horizontalLayout_4
Ui::MPerfWidget, 762
Ui_MPerfWidget, 1151
horizontalSpacer
Ui::AnimAddDialog, 51
Ui::AnimSettingDialog, 92
Ui::ExtraSettingsWidget, 166
Ui::FwUpgradeDialog, 193
Ui::GradientDialog, 206
Ui::KbAnimWidget, 339
Ui::KbBindWidget, 394
Ui::KbProfileDialog, 562
Ui::KPerfWidget, 686
Ui::LayoutDialog, 711
Ui::MPerfWidget, 762

Ui::RebindWidget, 948
Ui::SettingsWidget, 1021
Ui_AnimAddDialog, 1030
Ui_AnimSettingDialog, 1039
Ui_ExtraSettingsWidget, 1053
Ui_FwUpgradeDialog, 1061
Ui_GradientDialog, 1068
Ui_KbAnimWidget, 1077
Ui_KbBindWidget, 1084
Ui_KbProfileDialog, 1097
Ui_KPerfWidget, 1118
Ui_LayoutDialog, 1130
Ui_MPerfWidget, 1151
Ui_RebindWidget, 1178
Ui_SettingsWidget, 1197
horizontalSpacer_10
Ui::RebindWidget, 948
Ui::SettingsWidget, 1021
Ui_RebindWidget, 1178
Ui_SettingsWidget, 1197
horizontalSpacer_11
Ui::RebindWidget, 948
Ui_RebindWidget, 1178
horizontalSpacer_12
Ui::RebindWidget, 948
Ui_RebindWidget, 1178
horizontalSpacer_13
Ui::RebindWidget, 948
Ui_RebindWidget, 1178
horizontalSpacer_14
Ui::RebindWidget, 948
Ui_RebindWidget, 1178
horizontalSpacer_15
Ui::RebindWidget, 949
Ui_RebindWidget, 1179
horizontalSpacer_16
Ui::RebindWidget, 949
Ui_RebindWidget, 1179
horizontalSpacer_17
Ui::RebindWidget, 949
Ui_RebindWidget, 1179
horizontalSpacer_18
Ui::RebindWidget, 949
Ui_RebindWidget, 1179
horizontalSpacer_19
Ui::RebindWidget, 949
Ui_RebindWidget, 1179
horizontalSpacer_2
Ui::AnimAddDialog, 51
Ui::AnimSettingDialog, 92
Ui::ExtraSettingsWidget, 166
Ui::FwUpgradeDialog, 193
Ui::GradientDialog, 206
Ui::KbAnimWidget, 340
Ui::KbBindWidget, 394
Ui::KbProfileDialog, 562
Ui::KbWidget, 592
Ui::KPerfWidget, 687
Ui::LayoutDialog, 711
Ui::MPerfWidget, 762
Ui::RebindWidget, 949
Ui::SettingsWidget, 1021
Ui_AnimAddDialog, 1030
Ui_AnimSettingDialog, 1039
Ui_ExtraSettingsWidget, 1053
Ui_FwUpgradeDialog, 1061
Ui_GradientDialog, 1068
Ui_KbAnimWidget, 1077
Ui_KbBindWidget, 1084
Ui_KbProfileDialog, 1097
Ui_KbWidget, 1104
Ui_KPerfWidget, 1118
Ui_LayoutDialog, 1130
Ui_MPerfWidget, 1151
Ui_RebindWidget, 1179
Ui_SettingsWidget, 1197
horizontalSpacer_20
Ui::RebindWidget, 949
Ui_RebindWidget, 1179
horizontalSpacer_21
Ui::RebindWidget, 949
Ui_RebindWidget, 1179
horizontalSpacer_22
Ui::RebindWidget, 949
Ui_RebindWidget, 1179
horizontalSpacer_23
Ui::RebindWidget, 950
Ui_RebindWidget, 1180
horizontalSpacer_24
Ui::RebindWidget, 950
Ui_RebindWidget, 1180
horizontalSpacer_25
Ui::RebindWidget, 950
Ui_RebindWidget, 1180
horizontalSpacer_26
Ui::RebindWidget, 950
Ui_RebindWidget, 1180
horizontalSpacer_3
Ui::AnimSettingDialog, 92
Ui::ExtraSettingsWidget, 166
Ui::FwUpgradeDialog, 193
Ui::GradientDialog, 206
Ui::KbAnimWidget, 340
Ui::KbLightWidget, 456
Ui::KbWidget, 593
Ui::KPerfWidget, 687
Ui::MPerfWidget, 763
Ui::RebindWidget, 950
Ui_AnimSettingDialog, 1039
Ui_ExtraSettingsWidget, 1053
Ui_FwUpgradeDialog, 1061
Ui_GradientDialog, 1068
Ui_KbAnimWidget, 1077
Ui_KbLightWidget, 1091
Ui_KbWidget, 1104
Ui_KPerfWidget, 1118

Ui_MPerfWidget, 1151
Ui_RebindWidget, 1180
horizontalSpacer_4
Ui::AnimSettingDialog, 92
Ui::FwUpgradeDialog, 193
Ui::KbAnimWidget, 340
Ui::KbLightWidget, 456
Ui::KPerfWidget, 687
Ui::MPerfWidget, 763
Ui::RebindWidget, 950
Ui_AnimSettingDialog, 1039
Ui_FwUpgradeDialog, 1061
Ui_KbAnimWidget, 1077
Ui_KbLightWidget, 1092
Ui_KPerfWidget, 1118
Ui_MPerfWidget, 1151
Ui_RebindWidget, 1180
horizontalSpacer_5
Ui::AnimSettingDialog, 92
Ui::KbAnimWidget, 340
Ui::KbLightWidget, 456
Ui::KPerfWidget, 687
Ui::MPerfWidget, 763
Ui::RebindWidget, 950
Ui_AnimSettingDialog, 1039
Ui_KbAnimWidget, 1077
Ui_KbLightWidget, 1092
Ui_KPerfWidget, 1119
Ui_MPerfWidget, 1152
Ui_RebindWidget, 1180
horizontalSpacer_6
Ui::AnimSettingDialog, 92
Ui::KbLightWidget, 456
Ui::KPerfWidget, 687
Ui::MPerfWidget, 763
Ui::RebindWidget, 950
Ui_AnimSettingDialog, 1039
Ui_KbLightWidget, 1092
Ui_KPerfWidget, 1119
Ui_MPerfWidget, 1152
Ui_RebindWidget, 1180
horizontalSpacer_7
Ui::KPerfWidget, 687
Ui::MPerfWidget, 763
Ui::RebindWidget, 950
Ui::SettingsWidget, 1021
Ui_KPerfWidget, 1119
Ui_MPerfWidget, 1152
Ui_RebindWidget, 1180
Ui_SettingsWidget, 1198
horizontalSpacer_8
Ui::KPerfWidget, 687
Ui::RebindWidget, 951
Ui_KPerfWidget, 1119
Ui_RebindWidget, 1181
horizontalSpacer_9
Ui::RebindWidget, 951
Ui::SettingsWidget, 1021
Ui_RebindWidget, 1181
Ui_SettingsWidget, 1198
hwIType
KbPerf, 530
hwLoading
Kb, 303
HwMode
KPerfWidget, 699
hwModeCount
Kb, 303
hwModified
UsbId, 1205
hwModifiedString
UsbId, 1203
hwProfile
Kb, 274
hwSave
Kb, 275
hwSaveButton
Ui::KbWidget, 593
Ui_KbWidget, 1105

IT
KeyMap, 631
I_COUNT
KbPerf, 530
KPerfWidget, 707
i_hw
KbPerf, 500
KPerfWidget, 698
iButton0
Ui::MPerfWidget, 763
Ui_MPerfWidget, 1152
iButton1
Ui::MPerfWidget, 763
Ui_MPerfWidget, 1152
iButton2
Ui::MPerfWidget, 763
Ui_MPerfWidget, 1152
iButton3
Ui::MPerfWidget, 763
Ui_MPerfWidget, 1152
iButton4
Ui::MPerfWidget, 764
Ui_MPerfWidget, 1152
iButton5
Ui::MPerfWidget, 764
Ui_MPerfWidget, 1152
iButtonO
Ui::MPerfWidget, 764
Ui_MPerfWidget, 1153
iColor
KbPerf, 530
iEnable
KbPerf, 530
iOpacity
KbPerf, 514
iState
Kb, 303

iconClicked
MainWindow, 734
id
KbMode, 489
KbProfile, 538
ids
fwupgradedialog.cpp, 1247
inFrame
AnimScript, 82
indexOf
Kb, 276
KbProfile, 539
indicBox
Ui::MPerfWidget, 764
Ui_MPerfWidget, 1153
indicator
KbPerf, 501
KPerfWidget, 699
indicators
KPerfWidget, 707
infoTab
Ui::AnimSettingDialog, 92
Ui_AnimSettingDialog, 1039
infoUpdated
Kb, 277
init
AnimScript, 66
ColorMap, 155
KbManager, 477
init_keys
crypt.h, 1320
init_linkedlist
zip.c, 1452
initManager
KbFirmware, 416
initialized
AnimScript, 82
insert
KbProfile, 539
instance
KbFirmware, 419
intensityBox
Ui::KPerfWidget, 687
Ui_KPerfWidget, 1119
internal
QuaZipFilePrivate, 908
internalAttr
QuaZipFileInfo, 897
QuaZipFileInfo64, 904
QuaZipNewInfo, 918
ioDevice
QuaZipPrivate, 926
ioapi.h
_FILE_OFFSET_BIT, 1325
_LARGEFILE64_SOURCE, 1326
_Z_OF, 1328
__USE_LARGEFILE64, 1325
fill_zlib_filefunc64_32_def_from_filefunc32, 1328
OF, 1326
ZCALLBACK, 1326
ZCLOSE64, 1326
ZERROR64, 1326
ZFAKECLOSE64, 1326
ZOPEN64, 1327
ZPOS64_T, 1328
ZREAD64, 1327
ZSEEK64, 1327
ZTELL64, 1328
ZWRITE64, 1328
zlib_filefunc64_32_def, 1328
zlib_filefunc64_def, 1328
zlib_filefunc_def, 1328
isActive
KbAnim, 316
isAnim
KeyAction, 609
isAutoClose
QuaZip, 841
isBusy
CkbSettings, 130
isDPI
KeyAction, 610
isDataDescriptorWritingEnabled
QuaZip, 841
isEnabled
AutoRun, 120
isEncrypted
QuaZipFileInfo64, 902
isISO
KbBind, 371
KeyMap, 639, 640
isKeyboard
Kb, 277
KbBind, 371
KeyMap, 640, 641
isMacro
KeyAction, 610
isMedia
KeyAction, 610
isMouse
Kb, 278
KbBind, 371
KeyAction, 611
KeyMap, 642
isNormal
KeyAction, 611
isOpen
Kb, 279
QuaZip, 842
isProgram
KeyAction, 612
isRaw
QuaZipFile, 883
isRoot
QuaZipDir, 866
isRunning

KbAnim, 316
main.cpp, 1302
isSequential
QuaGzipFile, 811
QuaZIODevice, 818
QuaZipFile, 884
isSetting
MPerfWidget, 786
isSpecial
KeyAction, 612
isStarted
KbLight, 436
isUnbound
KeyAction, 613
isValidMacro
KeyAction, 613
isZip64Enabled
QuaZip, 842

JlCompress, 237
compressDir, 238
compressFile, 239, 240
compressFiles, 241
compressSubDir, 243
extractDir, 246
extractFile, 248, 250
extractFiles, 251
getFileList, 252
removeFile, 253
JlCompress.cpp
copyData, 1330

K65
KeyMap, 631
K65_HEIGHT
keymap.cpp, 1281
K65_TOP_COUNT
keymap.cpp, 1281
K65_WIDTH
keymap.cpp, 1281
K65TopRow
keymap.cpp, 1287
K70
KeyMap, 631
K70_HEIGHT
keymap.cpp, 1281
K70_WIDTH
keymap.cpp, 1281
K70_X_START
keymap.cpp, 1281
K95
KeyMap, 631
K95_HEIGHT
keymap.cpp, 1281
K95_WIDTH
keymap.cpp, 1281
K95BaseMap
keymap.cpp, 1287
K95Keys
keymap.cpp, 1287
k95Label1
Ui::KPerfWidget, 687
Ui_KPerfWidget, 1119
k95Label2
Ui::KPerfWidget, 688
Ui_KPerfWidget, 1119
k95Label3
Ui::KPerfWidget, 688
Ui_KPerfWidget, 1119
k95Label4
Ui::KPerfWidget, 688
Ui_KPerfWidget, 1119
k95Label5
Ui::KPerfWidget, 688
Ui_KPerfWidget, 1120
k95Label6
Ui::KPerfWidget, 688
Ui_KPerfWidget, 1120
k95Line
Ui::KPerfWidget, 688
Ui_KPerfWidget, 1120
k95Spacer
Ui::KPerfWidget, 688
Ui_KPerfWidget, 1120
k95Widgets
KPerfWidget, 707
KPerfWidget
ALWAYS_OFF, 699
ALWAYS_ON, 699
BOTH, 699
NORMAL, 699
RGB, 699
KPerfWidget::IndicatorUi, 697, 1296
KEY_SIZE
keywidget.cpp, 1294
KEYCOUNT_K95
keymap.cpp, 1281
KEYCOUNT_M65
keymap.cpp, 1282
KEYCOUNT_SABRE
keymap.cpp, 1282
KEYCOUNT_SCIM
keymap.cpp, 1282
KP_NAME
AnimScript, 82
KP_NONE
AnimScript, 82
KP_POSITION
AnimScript, 82
kPerfTab
Ui::KbWidget, 593
Ui_KbWidget, 1105
KPerfWidget, 694
~KPerfWidget, 701
HW_I_COUNT, 706
HwMode, 699
I_COUNT, 707

i_hw, 698
indicator, 699
indicators, 707
k95Widgets, 707
KPerfWidget, 699
KPerfWidget, 699
mode2Raw, 701
on_copyButton_clicked, 702
on_intensityBox_valueChanged, 703
perf, 707
profile, 707
raw2Mode, 703
setPerf, 704
ui, 707
uiUpdated, 705
updateMapper, 707
kPerfWidget
Ui::KbWidget, 593
Ui_KbWidget, 1105
KSTRAFE_HEIGHT
keymap.cpp, 1282
KSTRAFE_WIDTH
keymap.cpp, 1282
KSTRAFE_X_START
keymap.cpp, 1282
KStrafeKeys
keymap.cpp, 1288
Kb, 255
~Kb, 260
_currentMode, 301
_currentProfile, 301
_delay, 301
_dither, 301
_frameRate, 301
_hwProfile, 301
_layout, 302
_model, 302
_mouseAccel, 302
_needsSave, 302
_profiles, 302
_scrollSpeed, 302
appendProfile, 263
autoSave, 263
cmd, 302
cmdpath, 302
currentBind, 263
currentLight, 264
currentMode, 265
currentPerf, 265
currentProfile, 266
deleteHw, 266
deletePrevious, 267
devpath, 302
dither, 267, 268
features, 303
find, 268
firmware, 303
frameRate, 269
frameUpdate, 270
fwUpdPath, 303
fwUpdate, 271
fwUpdateFinished, 272
fwUpdateProgress, 272
getKeyMap, 273
getMacroNumber, 273
getMacroPath, 273
HWMODE_MAX, 303
hwLoading, 303
hwModeCount, 303
hwProfile, 274
hwSave, 275
iState, 303
indexOf, 276
infoUpdated, 277
isKeyboard, 277
isMouse, 278
isOpen, 279
Kb, 260
KbManager, 301
lastAutoSave, 303
layout, 279
load, 280
macroDelay, 281
macroNumber, 303
macroPath, 304
matches, 282
modeChanged, 282
modeRenamed, 283
model, 282
monochrome, 304
mouseAccel, 283
needsSave, 284
newMode, 284, 285
newProfile, 285, 286
notifyNumber, 304
notifyPath, 304
pollrate, 304
prefsPath, 304
prevMode, 304
prevProfile, 304
profileAdded, 287
profileChanged, 287
profileRenamed, 287
profiles, 288
readNotify, 289
run, 293
save, 294
scrollSpeed, 295
setCurrentMode, 296, 297
setCurrentProfile, 298
updateLayout, 299
usbModel, 304
usbSerial, 305
writeProfileHeader, 300
kb
FwUpgradeDialog, 187

kb.cpp
activeDevices, 1253
notifyPathMutex, 1253
notifyPaths, 1253
KbAnim
Add, 308
Divide, 309
Multiply, 308
Normal, 308
Subtract, 308
KbFirmware
NO, 411
UNKNOWN, 411
YES, 411
KbId, 1245
KbPerf
CAPS, 501
HIGH, 500
HW_IMAX, 501
LIGHT, 501
LOCK, 501
LOW, 500
LOWMED, 500
MACRO, 501
MEDHIGH, 500
MEDIUM, 500
MODE, 501
MUTE, 501
NONE, 501
NORMAL, 501
NUM, 501
OFF, 501
ON, 501
SCROLL, 501
KbAnim, 305
_guid, 330
_isActive, 330
_isActiveKp, 330
_keys, 330
_map, 330
_mode, 330
_name, 330
_needsSave, 330
_opacity, 331
_parameters, 331
_script, 331
_scriptGuid, 331
_scriptName, 331
_tempParameters, 331
blend, 311
catchUp, 312
commitParams, 314
effectiveParams, 314
guid, 315
hasParameter, 315
isActive, 316
isRunning, 316
KbAnim, 309–311
KbAnim, 309–311
keypress, 317
keys, 318, 319
kpRepeatMsec, 331
kpRepeatTime, 331
kpStopTime, 331
map, 319, 320
Mode, 308
mode, 320
name, 320, 321
needsSave, 321
newId, 322
opacity, 322
parameter, 322, 323
reInit, 324
repeatKey, 332
repeatMsec, 332
repeatTime, 332
resetParams, 324
save, 325
script, 326
scriptName, 326
stop, 327
stopTime, 332
trigger, 328
updateParams, 329
KbAnimWidget, 342
~KbAnimWidget, 345
addAnim, 345
animChanged, 346
animations, 359
clearSelection, 347
current, 359
didUpdateSelection, 347
duplicateAnim, 348
KbAnimWidget, 344
KbAnimWidget, 344
light, 359
noReorder, 359
on_animList_currentItemChanged, 348
on_animList_customContextMenuRequested, 349
on_animList_itemChanged, 350
on_blendBox_activated, 350
on_deleteButton_clicked, 351
on_keyButton_clicked, 351
on_nameBox_textEdited, 352
on_opacityBox_valueChanged, 353
on_propertyButton_clicked, 353
refreshList, 354
reorderAnims, 355
selectedKeys, 359
setCurrent, 356
setLight, 357
setSelectedKeys, 358
ui, 359
KbBind, 360
_bind, 388
_devParent, 388

_globalRemap, 388
_map, 388
_needsSave, 388
_needsUpdate, 388
_winLock, 388
action, 364
bindAction, 364
defaultAction, 365
devParent, 366
didLoad, 366
friendlyActionName, 367
friendlyName, 367
getMacroNumber, 368
getMacroPath, 368
globalRemap, 369
globalRemapTime, 389
handleNotificationChannel, 370
isISO, 371
isKeyboard, 371
isMouse, 371
KbBind, 363
KbBind, 363
KeyAction, 388
keyEvent, 372
lastCmd, 389
lastGlobalRemapTime, 389
layoutChanged, 373
light, 374
load, 374
loadGlobalRemap, 375
map, 376, 377
modeParent, 377
needsSave, 377
noAction, 378
perf, 379
resetAction, 380
save, 381
saveGlobalRemap, 382
setAction, 383
setGlobalRemap, 384
setNeedsUpdate, 385
update, 385
updated, 387
winLock, 387
KbBindWidget, 396
~KbBindWidget, 399
bind, 407
currentSelection, 407
KbBindWidget, 399
KbBindWidget, 399
newLayout, 400
newSelection, 401
on_copyButton_clicked, 402
on_resetButton_clicked, 403
profile, 407
setBind, 404
ui, 408
updateBind, 405
updateSelDisplay, 406
kbConnected
KbManager, 478
kbDisconnected
KbManager, 478
KbFirmware, 408
~KbFirmware, 411
_checkUpdates, 411
_fileForBoard, 412
_latestForBoard, 413
checkUpdates, 414
dataForBoard, 414
downloadFinished, 415
downloaded, 415
fwTable, 419
fwTableHash, 419
hasDownloaded, 416
hasGPG, 419
initManager, 416
instance, 419
KbFirmware, 411
KbFirmware, 411
lastCheck, 419
lastFinished, 419
networkManager, 419
processDownload, 417
tableDownload, 420
versionForBoard, 418
KbFirmware::FW, 178
ckbVersion, 179
FW, 179
fileName, 179
fwVersion, 179
hash, 179
url, 179
KbLight, 420
~KbLight, 425
_animList, 447
_animMap, 447
_colorMap, 448
_dimming, 448
_indicatorList, 448
_indicatorMap, 448
_map, 448
_needsMapRefresh, 448
_needsSave, 448
_previewAnim, 448
_qColorMap, 448
_start, 449
addAnim, 425
animKeypress, 425
AnimList, 424
animList, 426, 427
base, 427
close, 428
color, 429
colorMap, 430
didLoad, 430

dimming, 431
duplicateAnim, 432
findAnim, 432
findAnimIdx, 433
frameDisplayed, 434
frameUpdate, 434
isStarted, 436
KbLight, 424
KbLight, 424
lastFrameSignal, 449
load, 436
MAX_DIM, 449
map, 438
needsSave, 439
open, 439
previewAnim, 440
printRGB, 441
rebuildBaseMap, 442
resetIndicators, 443
restartAnimation, 443
save, 444
setIndicator, 445
shareDimming, 445, 446
stopPreview, 446
updated, 447
KbLightWidget, 458
~KbLightWidget, 460
changeAnim, 461
changeAnimKeys, 461
changeColor, 462
currentSelection, 470
KbLightWidget, 460
KbLightWidget, 460
light, 470
newSelection, 463
on_animButton_clicked, 464
on_bgButton_clicked, 465
on_brightnessBox_activated, 465
on_showAnimBox_clicked, 466
setLight, 466
setMonochrome, 467
toggleSidelight, 468
ui, 470
updateLight, 469
KbManager, 471
_daemonVersion, 482
_devices, 482
_eventTimer, 482
_guiVersion, 482
_kbManager, 483
_scanTimer, 483
ckbDaemonVersion, 474
ckbDaemonVersionF, 474
ckbGuiVersion, 475
ckbGuiVersionF, 475
devices, 476
eventTimer, 476
fps, 476
init, 477
Kb, 301
kbConnected, 478
kbDisconnected, 478
KbManager, 473
kbManager, 478
KbManager, 473
parseVersionString, 479
scanKeyboards, 479
scanTimer, 481
stop, 481
versionUpdated, 482
kbManager
KbManager, 478
KbMode, 483
~KbMode, 488
_bind, 496
_id, 496
_light, 496
_name, 496
_needsSave, 496
_perf, 496
bind, 488
doUpdate, 488
id, 489
KbMode, 486, 487
KbMode, 486, 487
keyMap, 490
light, 490
name, 491
needsSave, 492
newId, 492
perf, 493
save, 493
setNeedsSave, 494
setNeedsUpdate, 495
updated, 495
KbPerf, 497
_angleSnap, 528
_curDpi, 503
_dpiIndicator, 528
_iOpacity, 528
_liftHeight, 528
_needsSave, 528
_needsUpdate, 529
angleSnap, 503, 504
applyIndicators, 504
bind, 505
curDpi, 506, 507
curDpiIdx, 507, 508
DPI_COUNT, 529
DPI_MAX, 529
DPI_MIN, 529
didLoad, 508
dpi, 509
dpiClr, 529
dpiColor, 510, 511
dpiCurIdx, 529

dpiCurX, 529
dpiCurY, 529
dpiDown, 511
dpiEnabled, 512
dpiIndicator, 512, 513
dpiLastIdx, 529
dpiOn, 529
dpiUp, 513
dpiX, 530
dpiY, 530
getIndicator, 513
HW_I_COUNT, 530
height, 500
hwIType, 530
I_COUNT, 530
i_hw, 500
iColor, 530
iEnable, 530
iOpacity, 514
indicator, 501
KbPerf, 501, 502
KbPerf, 501, 502
liftHeight, 515
light, 515
light100Color, 530
lightIndicator, 516
load, 517
modeParent, 518
muteNAColor, 530
needsSave, 519
OTHER, 531
operator=, 519
popDpi, 520
pushDpi, 520, 521
pushSniper, 522
pushedDpis, 531
runningPushIdx, 531
SNIPER, 531
save, 523
setIndicator, 524
setNeedsUpdate, 524
settingsUpdated, 525
sniperDpi, 525, 526
update, 527
KbProfile, 531
_currentMode, 548
_id, 548
_keyMap, 548
_modes, 548
_name, 548
_needsSave, 548
append, 536
currentMode, 536, 537
find, 537
id, 538
indexOf, 539
insert, 539
KbProfile, 534, 535
KbProfile, 534, 535
keyMap, 540
modeCount, 541
ModeList, 534
modes, 541, 542
move, 542
name, 543
needsSave, 543
newId, 544
removeAll, 545
save, 546
setNeedsSave, 547
setNeedsUpdate, 547
KbProfileDialog, 549
~KbProfileDialog, 551
addNewProfileItem, 551
device, 557
GUID, 558
KbProfileDialog, 551
KbProfileDialog, 551
NEW_FLAG, 558
on_profileList_currentItemChanged, 552
on_profileList_customContextMenuRequested, 552
on_profileList_itemChanged, 554
on_profileList_itemClicked, 555
profileList_reordered, 555
repopulate, 556
ui, 558
KbWidget, 563
~KbWidget, 567
addNewModeItem, 567
currentMode, 584
devUpdate, 568
device, 584
GUID, 585
hasShownNewFW, 585
KbWidget, 565
KbWidget, 565
lastAutoSave, 585
modeChanged, 568
modeIcon, 570
modeUpdate, 572
modesList_reordered, 571
NEW_FLAG, 585
name, 572
on_fwUpdButton_clicked, 572
on_hwSaveButton_clicked, 574
on_modesList_currentItemChanged, 575
on_modesList_customContextMenuRequested, 576
on_modesList_itemChanged, 577
on_modesList_itemClicked, 578
on_profileBox_activated, 579
on_tabWidget_currentChanged, 579
profileChanged, 580
showFirstTab, 581
showFwUpdate, 581

showLastTab, 582
ui, 585
updateFwButton, 582
updateProfileList, 583
kbWidgets
MainWindow, 741
kbanim.cpp
blendAdd, 1255
blendDivide, 1255
blendFunc, 1255
blendMultiply, 1255
blendNormal, 1255
blendSubtract, 1256
functions, 1256
kbfirmware.cpp
AUTO_CHECK_TIME, 1262
tableName, 1262
kblight.cpp
_shareDimming, 1266
activeLights, 1266
lToS, 1264
monoRgb, 1264
sToL, 1265
kbmanager.cpp
devpath, 1269
kbperf.cpp
map_last, 1271
Key, 595
_friendlyName, 597
_storageName, 597
friendlyName, 596
hasLed, 597
hasScan, 597
height, 597
name, 598
operator bool, 596
storageName, 597
width, 598
x, 598
y, 598
key
KeyMap, 643
KeyAction
NORMAL, 602
SPECIAL, 602
UNBOUND, 602
KeyMap
_LAYOUT_MAX, 631
_MODEL_MAX, 632
DE, 631
DK, 631
ES, 631
EU, 631
EU_DVORAK, 631
FR, 631
GB, 631
GB_DVORAK, 631
IT, 631
K65, 631
K70, 631
K95, 631
M65, 632
MX, 631
NO, 631
NO_LAYOUT, 631
NO_MODEL, 631
PL, 631
SABRE, 632
SCIMITAR, 632
SE, 631
STRAFE, 632
US, 631
US_DVORAK, 631
KeyPatch, 1279
KeyWidget
ADD, 655
NONE, 655
SET, 655
SUBTRACT, 655
TOGGLE, 655
KeyAction, 598
~KeyAction, 603
_value, 625
adjustDisplay, 603
animAction, 604
animInfo, 605
DPI_CUSTOM, 625
DPI_DOWN, 626
DPI_SNIPER, 626
DPI_UP, 626
defaultAction, 605
dpiAction, 606
dpiInfo, 607
driverName, 607
friendlyName, 608
isAnim, 609
isDPI, 610
isMacro, 610
isMedia, 610
isMouse, 611
isNormal, 611
isProgram, 612
isSpecial, 612
isUnbound, 613
isValidMacro, 613
KbBind, 388
KeyAction, 603
keyEvent, 614
keyRelease, 617
KeyAction, 603
LIGHT_DOWN, 626
LIGHT_DOWN_WRAP, 626
LIGHT_UP, 626
LIGHT_UP_WRAP, 626
LOCK_OFF, 626
LOCK_ON, 626

LOCK_TOGGLE, 627
lightAction, 617
lockAction, 618
MODE_NEXT, 627
MODE_NEXT_WRAP, 627
MODE_PREV, 627
MODE_PREV_WRAP, 627
macroAction, 618
macroContent, 619
macroDisplay, 619
macroFullLine, 620
macroLine, 621
macroTiming, 621
modeAction, 622
noAction, 622
operator QString, 623
operator=, 623
PROGRAM_PR_INDEF, 627
PROGRAM_PR_KPSTOP, 627
PROGRAM_PR_KRSTOP, 627
PROGRAM_PR_MULTI, 628
PROGRAM_RE_INDEF, 628
PROGRAM_RE_KPSTOP, 628
PROGRAM_RE_MULTI, 628
preProgram, 627
programAction, 623
programInfo, 623
relProgram, 628
sniperValue, 628
specialInfo, 624
Type, 602
type, 624
value, 625
keyButton
Ui::KbAnimWidget, 340
Ui_KbAnimWidget, 1077
keyEvent
KbBind, 372
KeyAction, 614
keyHeight
KeyMap, 651
keyLayout
KeyMap, 651
KeyMap, 628
_keys, 651
byPosition, 633
contains, 633
count, 634
friendlyName, 634
fromName, 635
fromStorage, 636
getLayout, 637
getModel, 638, 639
height, 639
isISO, 639, 640
isKeyboard, 640, 641
isMouse, 642
key, 643
keyHeight, 651
keyLayout, 651
KeyMap, 632
keyModel, 651
keyWidth, 651
KeyMap, 632
keys, 643
Layout, 631
layout, 644
layoutNames, 644
locale, 645
map, 646
Model, 631
model, 646
modelHeight, 646
modelWidth, 647
name, 647
operator const QHash< QString, Key > &, 648
positions, 648
strLayout, 649
strModel, 649
toStorage, 650
width, 650
keyMap
KbMode, 490
KbProfile, 540
KeyWidget, 673
keyModel
KeyMap, 651
keyNames
ColorMap, 156
keyRelease
KeyAction, 617
keyTab
Ui::RebindWidget, 951
Ui_RebindWidget, 1181
KeyWidget, 651
_bindMap, 672
_colorMap, 672
_displayColorMap, 673
_indicators, 673
_monochrome, 673
_rgbMode, 673
animation, 673
BindMap, 654
bindMap, 655
clearAnimation, 656
clearSelection, 656
colorMap, 656, 657
displayColorMap, 657
drawInfo, 657
keyMap, 673
KeyWidget, 655
KeyWidget, 655
map, 658, 659
monochrome, 659, 660
mouseCurrentX, 673
mouseCurrentY, 673

mouseDownMode, 673
mouseDownX, 674
mouseDownY, 674
mouseMoveEvent, 660
mousePressEvent, 661
mouseReleaseEvent, 662
newSelection, 674
paintEvent, 663
rgbMode, 668, 669
selectAll, 669
selection, 674
selectionChanged, 670
setAnimation, 670
setAnimationToSelection, 671
setSelection, 671
sidelightToggled, 672
keyWidget
Ui::KbBindWidget, 395
Ui::KbLightWidget, 456
Ui_KbBindWidget, 1084
Ui_KbLightWidget, 1092
keyWidth
KeyMap, 651
keyaction.cpp
ANIM_KRSTOP, 1277
ANIM_ONCE, 1277
keymap.cpp
_patch, 1283
ANSI_ENTER_H, 1280
ANSI_ENTER_W, 1280
ANSI_ENTER_X, 1280
ANSI_ENTER_Y, 1280
ANSI_LSHIFT_W, 1280
ANSI_LSHIFT_X, 1281
getMap, 1284
K65_HEIGHT, 1281
K65_TOP_COUNT, 1281
K65_WIDTH, 1281
K65TopRow, 1287
K70_HEIGHT, 1281
K70_WIDTH, 1281
K70_X_START, 1281
K95_HEIGHT, 1281
K95_WIDTH, 1281
K95BaseMap, 1287
K95Keys, 1287
KEYCOUNT_K95, 1281
KEYCOUNT_M65, 1282
KEYCOUNT_SABRE, 1282
KEYCOUNT_SCIM, 1282
KSTRAFE_HEIGHT, 1282
KSTRAFE_WIDTH, 1282
KSTRAFE_X_START, 1282
KStrafeKeys, 1288
M65_HEIGHT, 1282
M65_WIDTH, 1282
M65Keys, 1289
N_LAYOUTS, 1282
N_MODELS, 1283
NS, 1283
PATCH_COUNT, 1283
patch, 1283
patchANSI, 1286
patchDE, 1289
patchDK, 1289
patchDvorak, 1289
patchES, 1289
patchEU, 1290
patchFR, 1290
patchISO, 1287
patchIT, 1290
patchMX, 1290
patchNO, 1290
patchSE, 1291
SABRE_HEIGHT, 1283
SABRE_WIDTH, 1283
SCIM_HEIGHT, 1283
SCIM_WIDTH, 1283
SabreKeys, 1291
ScimKeys, 1291
standardMaps, 1291
keypress
AnimScript, 67
KbAnim, 317
keys
KbAnim, 318, 319
KeyMap, 643
keywidget.cpp
KEY_SIZE, 1294
m65Overlay, 1294
monoRgb, 1293
sabOverlay, 1294
scimOverlay, 1294
kpDelayBox
Ui::AnimSettingDialog, 92
Ui_AnimSettingDialog, 1040
kpModeStopBox
Ui::AnimSettingDialog, 93
Ui_AnimSettingDialog, 1040
kpReleaseBox
Ui::AnimSettingDialog, 93
Ui_AnimSettingDialog, 1040
kpRepeatBox
Ui::AnimSettingDialog, 93
Ui_AnimSettingDialog, 1040
kpRepeatLabel
Ui::AnimSettingDialog, 93
Ui_AnimSettingDialog, 1040
kpRepeatLabel_2
Ui::AnimSettingDialog, 93
Ui_AnimSettingDialog, 1040
kpRepeatMsec
KbAnim, 331
kpRepeatTime
KbAnim, 331
kpStopCheck

AnimSettingDialog, 117
kpStopTime
KbAnim, 331

LIGHT
KbPerf, 501
LOCK
KbPerf, 501
LOW
KbPerf, 500
LOWMED
KbPerf, 500
lHeightBox
Ui::MPerfWidget, 766
Ui_MPerfWidget, 1154
LIGHT_DOWN
KeyAction, 626
LIGHT_DOWN_WRAP
KeyAction, 626
LIGHT_UP
KeyAction, 626
LIGHT_UP_WRAP
KeyAction, 626
LOCALHEADERMAGIC
zip.c, 1447
LOCK_OFF
KeyAction, 626
LOCK_ON
KeyAction, 626
LOCK_TOGGLE
KeyAction, 627
lToS
kblight.cpp, 1264
label
Ui::AnimAddDialog, 51
Ui::AnimSettingDialog, 93
Ui::ExtraSettingsWidget, 166
Ui::GradientDialog, 206
Ui::KbBindWidget, 395
Ui::KbLightWidget, 456
Ui::KPerfWidget, 688
Ui::LayoutDialog, 711
Ui::ModeSelectDialog, 745
Ui::MPerfWidget, 764
Ui::RebindWidget, 951
Ui::SettingsWidget, 1021
Ui_AnimAddDialog, 1031
Ui_AnimSettingDialog, 1040
Ui_ExtraSettingsWidget, 1053
Ui_GradientDialog, 1068
Ui_KbBindWidget, 1084
Ui_KbLightWidget, 1092
Ui_KPerfWidget, 1120
Ui_LayoutDialog, 1130
Ui_ModeSelectDialog, 1138
Ui_MPerfWidget, 1153
Ui_RebindWidget, 1181
Ui_SettingsWidget, 1198
label_10
Ui::AnimSettingDialog, 93
Ui::ExtraSettingsWidget, 166
Ui::KPerfWidget, 688
Ui_AnimSettingDialog, 1040
Ui_ExtraSettingsWidget, 1053
Ui_KPerfWidget, 1120
label_11
Ui::AnimSettingDialog, 93
Ui::ExtraSettingsWidget, 166
Ui::KPerfWidget, 689
Ui::MPerfWidget, 764
Ui_AnimSettingDialog, 1040
Ui_ExtraSettingsWidget, 1053
Ui_KPerfWidget, 1120
Ui_MPerfWidget, 1153
label_12
Ui::AnimSettingDialog, 93
Ui::KPerfWidget, 689
Ui::MPerfWidget, 764
Ui_AnimSettingDialog, 1041
Ui_KPerfWidget, 1120
Ui_MPerfWidget, 1153
label_13
Ui::AnimSettingDialog, 94
Ui::MPerfWidget, 764
Ui_AnimSettingDialog, 1041
Ui_MPerfWidget, 1153
label_14
Ui::KPerfWidget, 689
Ui::MPerfWidget, 764
Ui_KPerfWidget, 1120
Ui_MPerfWidget, 1153
label_15
Ui::KPerfWidget, 689
Ui::MPerfWidget, 765
Ui_KPerfWidget, 1121
Ui_MPerfWidget, 1153
label_16
Ui::KPerfWidget, 689
Ui_KPerfWidget, 1121
label_17
Ui::KPerfWidget, 689
Ui_KPerfWidget, 1121
label_18
Ui::KPerfWidget, 689
Ui_KPerfWidget, 1121
label_19
Ui::KPerfWidget, 689
Ui_KPerfWidget, 1121
label_2
Ui::AnimAddDialog, 51
Ui::AnimSettingDialog, 94
Ui::ExtraSettingsWidget, 167
Ui::FwUpgradeDialog, 193
Ui::GradientDialog, 206
Ui::KbBindWidget, 395
Ui::KbLightWidget, 457
Ui::KPerfWidget, 689

Ui::LayoutDialog, 712
Ui::MPerfWidget, 765
Ui::SettingsWidget, 1021
Ui_AnimAddDialog, 1031
Ui_AnimSettingDialog, 1041
Ui_ExtraSettingsWidget, 1053
Ui_FwUpgradeDialog, 1062
Ui_GradientDialog, 1068
Ui_KbBindWidget, 1084
Ui_KbLightWidget, 1092
Ui_KPerfWidget, 1121
Ui_LayoutDialog, 1131
Ui_MPerfWidget, 1153
Ui_SettingsWidget, 1198
label_20
Ui::KPerfWidget, 690
Ui_KPerfWidget, 1121
label_21
Ui::KPerfWidget, 690
Ui_KPerfWidget, 1121
label_22
Ui::KPerfWidget, 690
Ui_KPerfWidget, 1121
label_23
Ui::KPerfWidget, 690
Ui_KPerfWidget, 1122
label_24
Ui::KPerfWidget, 690
Ui_KPerfWidget, 1122
label_25
Ui::MPerfWidget, 765
Ui_MPerfWidget, 1154
label_3
Ui::AnimSettingDialog, 94
Ui::ExtraSettingsWidget, 167
Ui::KbLightWidget, 457
Ui::KbWidget, 593
Ui::KPerfWidget, 690
Ui::MPerfWidget, 765
Ui::SettingsWidget, 1021
Ui_AnimSettingDialog, 1041
Ui_ExtraSettingsWidget, 1053
Ui_KbLightWidget, 1092
Ui_KbWidget, 1105
Ui_KPerfWidget, 1122
Ui_MPerfWidget, 1154
Ui_SettingsWidget, 1198
label_4
Ui::AnimSettingDialog, 94
Ui::FwUpgradeDialog, 193
Ui::KbWidget, 593
Ui::KPerfWidget, 690
Ui::MPerfWidget, 765
Ui_AnimSettingDialog, 1041
Ui_FwUpgradeDialog, 1062
Ui_KbWidget, 1105
Ui_KPerfWidget, 1122
Ui_MPerfWidget, 1154
label_5
Ui::AnimSettingDialog, 94
Ui::ExtraSettingsWidget, 167
Ui::KbAnimWidget, 340
Ui::KPerfWidget, 690
Ui::MPerfWidget, 765
Ui::SettingsWidget, 1021
Ui_AnimSettingDialog, 1041
Ui_ExtraSettingsWidget, 1054
Ui_KbAnimWidget, 1077
Ui_KPerfWidget, 1122
Ui_MPerfWidget, 1154
Ui_SettingsWidget, 1198
label_6
Ui::AnimSettingDialog, 94
Ui::ExtraSettingsWidget, 167
Ui::KbAnimWidget, 340
Ui::KPerfWidget, 690
Ui::MPerfWidget, 765
Ui::SettingsWidget, 1022
Ui_AnimSettingDialog, 1041
Ui_ExtraSettingsWidget, 1054
Ui_KbAnimWidget, 1077
Ui_KPerfWidget, 1122
Ui_MPerfWidget, 1154
Ui_SettingsWidget, 1198
label_7
Ui::AnimSettingDialog, 94
Ui::KbAnimWidget, 340
Ui::KPerfWidget, 691
Ui::MPerfWidget, 765
Ui_AnimSettingDialog, 1041
Ui_KbAnimWidget, 1077
Ui_KPerfWidget, 1122
Ui_MPerfWidget, 1154
label_8
Ui::AnimSettingDialog, 94
Ui::KPerfWidget, 691
Ui::MPerfWidget, 765
Ui::SettingsWidget, 1022
Ui_AnimSettingDialog, 1041
Ui_KPerfWidget, 1122
Ui_MPerfWidget, 1154
Ui_SettingsWidget, 1198
label_9
Ui::AnimSettingDialog, 94
Ui::KbWidget, 593
Ui_AnimSettingDialog, 1042
Ui_KbWidget, 1105
lastAutoSave
Kb, 303
KbWidget, 585
lastCheck
KbFirmware, 419
lastCmd
KbBind, 389
lastDuration
AnimSettingDialog, 117

lastFinished
KbFirmware, 419
lastFrame
AnimScript, 82
lastFrameSignal
KbLight, 449
lastGlobalRemapTime
KbBind, 389
lastMappedDirectoryEntry
QuaZipPrivate, 926
lastSharedDimming
extrasettingswidget.cpp, 1243
Layout
KeyMap, 631
layout
Kb, 279
KeyMap, 644
layoutBox
Ui::SettingsWidget, 1022
Ui_SettingsWidget, 1198
layoutChanged
KbBind, 373
LayoutDialog, 712
∼LayoutDialog, 714
LayoutDialog, 714
LayoutDialog, 714
selected, 715
ui, 715
layoutNames
KeyMap, 644
layoutWidget
Ui::RebindWidget, 951
Ui_RebindWidget, 1181
layoutWidget1
Ui::RebindWidget, 951
Ui_RebindWidget, 1181
layoutWidget2
Ui::RebindWidget, 951
Ui_RebindWidget, 1181
layoutWidget_2
Ui::RebindWidget, 951
Ui_RebindWidget, 1181
lbl_macro
Ui::RebindWidget, 951
Ui_RebindWidget, 1181
license
AnimScript, 68
liftHeight
KbPerf, 515
light
KbAnimWidget, 359
KbBind, 374
KbLightWidget, 470
KbMode, 490
KbPerf, 515
light100Color
KbPerf, 530
lightAction
KeyAction, 617
lightBox
Ui::KPerfWidget, 691
Ui::RebindWidget, 952
Ui_KPerfWidget, 1122
Ui_RebindWidget, 1182
lightButton
Ui::RebindWidget, 952
Ui_RebindWidget, 1182
lightColor1
Ui::KPerfWidget, 691
Ui_KPerfWidget, 1123
lightColor2
Ui::KPerfWidget, 691
Ui_KPerfWidget, 1123
lightColor3
Ui::KPerfWidget, 691
Ui_KPerfWidget, 1123
lightIndicator
KbPerf, 516
lightTab
Ui::KbWidget, 593
Ui_KbWidget, 1105
lightWidget
Ui::KbWidget, 593
Ui_KbWidget, 1105
lightWrapBox
Ui::RebindWidget, 952
Ui_RebindWidget, 1182
line
Ui::AnimSettingDialog, 95
Ui::ExtraSettingsWidget, 167
Ui::KbBindWidget, 395
Ui::KbLightWidget, 457
Ui::KPerfWidget, 691
Ui::MPerfWidget, 766
Ui::SettingsWidget, 1022
Ui_AnimSettingDialog, 1042
Ui_ExtraSettingsWidget, 1054
Ui_KbBindWidget, 1084
Ui_KbLightWidget, 1092
Ui_KPerfWidget, 1123
Ui_MPerfWidget, 1154
Ui_SettingsWidget, 1199
line_2
Ui::AnimSettingDialog, 95
Ui::ExtraSettingsWidget, 167
Ui::KbBindWidget, 395
Ui::KbLightWidget, 457
Ui::KPerfWidget, 691
Ui::MPerfWidget, 766
Ui::SettingsWidget, 1022
Ui_AnimSettingDialog, 1042
Ui_ExtraSettingsWidget, 1054
Ui_KbBindWidget, 1084
Ui_KbLightWidget, 1092
Ui_KPerfWidget, 1123
Ui_MPerfWidget, 1155

Ui_SettingsWidget, 1199
line_3
Ui::ExtraSettingsWidget, 167
Ui::KPerfWidget, 691
Ui::MPerfWidget, 766
Ui::SettingsWidget, 1022
Ui_ExtraSettingsWidget, 1054
Ui_KPerfWidget, 1123
Ui_MPerfWidget, 1155
Ui_SettingsWidget, 1199
linkedlist_data_s, 1444
linkedlist_datablock_internal_s, 1443
linkedlist_data
zip.c, 1449
linkedlist_datablock_internal
zip.c, 1449
list
AnimScript, 68
load
AnimScript, 69
Kb, 280
KbBind, 374
KbLight, 436
KbPerf, 517
LoadCentralDirectoryRecord
zip.c, 1453
loadGlobalRemap
KbBind, 375
local
unzip.c, 1375
zip.c, 1447
locale
KeyMap, 645
lockAction
KeyAction, 618
lockBox
Ui::KPerfWidget, 692
Ui::RebindWidget, 952
Ui_KPerfWidget, 1123
Ui_RebindWidget, 1182
lockButton
Ui::RebindWidget, 952
Ui_RebindWidget, 1182
lockColorOff
Ui::KPerfWidget, 692
Ui_KPerfWidget, 1123
lockColorOn
Ui::KPerfWidget, 692
Ui_KPerfWidget, 1123
lockMutex
ckbsettings.cpp, 1234
ckbsettingswriter.cpp, 1238
lockMutexCache
ckbsettings.cpp, 1234
ckbsettingswriter.cpp, 1238
lockMutexStatic
ckbsettings.cpp, 1235
ckbsettingswriter.cpp, 1238
lockMutexStatic2
ckbsettings.cpp, 1235
ckbsettingswriter.cpp, 1238
loginItemBox
Ui::SettingsWidget, 1022
Ui_SettingsWidget, 1199

M65
KeyMap, 632
M65_HEIGHT
keymap.cpp, 1282
M65_WIDTH
keymap.cpp, 1282
M65Keys
keymap.cpp, 1289
m65Overlay
keywidget.cpp, 1294
MACRO
KbPerf, 501
MAX_FILE_NAME_LENGTH
QuaZip, 824
MEDHIGH
KbPerf, 500
MEDIUM
KbPerf, 500
MODE
KbPerf, 501
MPerfWidget::DpiUi, 772, 1318
MUTE
KbPerf, 501
MUTED
media.h, 1309
MX
KeyMap, 631
M_PI
ckb-anim.h, 1225
MAKEULONG64
zip.c, 1447
MAX_DIM
KbLight, 449
mAccelBox
Ui::ExtraSettingsWidget, 167
Ui_ExtraSettingsWidget, 1054
MODE_NEXT
KeyAction, 627
MODE_NEXT_WRAP
KeyAction, 627
MODE_PREV
KeyAction, 627
MODE_PREV_WRAP
KeyAction, 627
mPerfTab
Ui::KbWidget, 594
Ui_KbWidget, 1106
MPerfWidget, 769
~MPerfWidget, 775
_xyLink, 785
boxXChanged, 775
boxXMapper, 785

boxYChanged, 776
boxYMapper, 785
buttonMapper1, 785
buttonMapper2, 785
colorChanged, 777
colorClicked, 778
colorLink, 786
DPI_COUNT, 786
DPI_MAX, 786
DPI_MIN, 786
enableChanged, 778
enableMapper, 786
isSetting, 786
MPerfWidget, 773
MPerfWidget, 773
on_aSnapBox_clicked, 779
on_copyButton_clicked, 779
on_indicBox_clicked, 780
on_lHeightBox_activated, 780
on_spinBox_valueChanged, 781
on_xyBox_clicked, 781
perf, 786
profile, 786
setPerf, 782
sliderXMapper, 786
sliderXMoved, 783
sliderYMapper, 786
sliderYMoved, 784
stages, 787
ui, 787
mPerfWidget
Ui::KbWidget, 594
Ui_KbWidget, 1106
macReader
RebindWidget, 993
macroAction
KeyAction, 618
macroBox
MacroReaderThread, 723
Ui::KPerfWidget, 692
Ui_KPerfWidget, 1124
macroColorOff
Ui::KPerfWidget, 692
Ui_KPerfWidget, 1124
macroColorOn
Ui::KPerfWidget, 692
Ui_KPerfWidget, 1124
macroContent
KeyAction, 619
macroDelay
Kb, 281
macroDisplay
KeyAction, 619
macroFullLine
KeyAction, 620
macroLine
KeyAction, 621
macroNumber
Kb, 303
MacroReaderThread, 723
macroPath
Kb, 304
MacroReaderThread, 723
MacroReader, 715
∼MacroReader, 718
MacroReader, 718
macroReaderThread, 719
MacroReader, 718
startWorkInAThread, 718
MacroReaderThread, 719
macroBox, 723
macroNumber, 723
macroPath, 723
MacroReaderThread, 721
macroText, 723
MacroReaderThread, 721
readMacro, 722
run, 722
macroReaderThread
MacroReader, 719
macroTab
Ui::RebindWidget, 952
Ui_RebindWidget, 1182
macroText
MacroReaderThread, 723
macroTiming
KeyAction, 621
main
ckb-anim.h, 1230
main.cpp, 1303
main.cpp
CommandLineBackground, 1302
CommandLineClose, 1302
CommandLineError, 1302
CommandLineHelpRequested, 1302
CommandLineOK, 1302
CommandLineVersionRequested, 1302
main.cpp
appShare, 1302
CommandLineParseResults, 1302
isRunning, 1302
main, 1303
parseCommandLine, 1305
pidActive, 1306
SHMEM_SIZE, 1301
SHMEM_SIZE_V015, 1301
MainWindow, 727
∼MainWindow, 731
addDevice, 732
checkFwUpdates, 732
cleanup, 733
closeAction, 741
closeEvent, 734
iconClicked, 734
kbWidgets, 741
MainWindow, 730

mainWindow, 741
MainWindow, 730
quitApp, 735
removeDevice, 736
restoreAction, 741
settingsWidget, 741
SettingsWidget, 1011
showFwUpdateNotification, 736
showWindow, 737
stateChange, 737
timerTick, 738
toggleTrayIcon, 739
trayIcon, 741
trayIconMenu, 741
ui, 741
updateVersion, 740
mainWindow
MainWindow, 741
mainwindow.cpp
appShare, 1307
configLabel, 1307
makeIcon
GradientDialog, 215
makeStops
GradientDialogWidget, 226
map
KbAnim, 319, 320
KbBind, 376, 377
KbLight, 438
KeyMap, 646
KeyWidget, 658, 659
map_last
kbperf.cpp, 1271
matches
Kb, 282
mb2Box
Ui::RebindWidget, 952
Ui_RebindWidget, 1182
mb2Button
Ui::RebindWidget, 952
Ui_RebindWidget, 1182
mbBox
Ui::RebindWidget, 953
Ui_RebindWidget, 1183
mbButton
Ui::RebindWidget, 953
Ui_RebindWidget, 1183
mdAdd
QuaZip, 824
mdAppend
QuaZip, 824
mdCreate
QuaZip, 824
mdNotOpen
QuaZip, 824
mdUnzip
QuaZip, 824
media.h
MUTED, 1309
UNKNOWN, 1309
UNMUTED, 1309
media.h
ENUM_C, 1309
ENUM_END_C, 1309
EXTERN_C, 1309
getMuteState, 1309
muteState, 1309
media_linux.cpp
getMuteState, 1311
muteProcess, 1311
media_mac.m
disableAppNap, 1312
getMuteState, 1312
mediaBox
Ui::RebindWidget, 953
Ui_RebindWidget, 1183
mediaButton
Ui::RebindWidget, 953
Ui_RebindWidget, 1183
mediaKeys
RebindWidget, 993
method
QuaZipFileInfo, 897
QuaZipFileInfo64, 904
minX
AnimScript, 83
minY
AnimScript, 83
moc_animadddialog.cpp
QT_MOC_LITERAL, 1510
qt_meta_data_AnimAddDialog, 1510
qt_meta_stringdata_AnimAddDialog, 1511
moc_animscript.cpp
QT_MOC_LITERAL, 1513
qt_meta_data_AnimScript, 1513
qt_meta_stringdata_AnimScript, 1514
moc_animsettingdialog.cpp
QT_MOC_LITERAL, 1515
qt_meta_data_AnimSettingDialog, 1516
qt_meta_stringdata_AnimSettingDialog, 1516
moc_ckbsettingswriter.cpp
QT_MOC_LITERAL, 1518
qt_meta_data_CkbSettingsWriter, 1518
qt_meta_stringdata_CkbSettingsWriter, 1519
moc_colorbutton.cpp
QT_MOC_LITERAL, 1520
qt_meta_data_ColorButton, 1521
qt_meta_stringdata_ColorButton, 1521
moc_extrasettingswidget.cpp
QT_MOC_LITERAL, 1523
qt_meta_data_ExtraSettingsWidget, 1523
qt_meta_stringdata_ExtraSettingsWidget, 1523
moc_fwupgradedialog.cpp
QT_MOC_LITERAL, 1526
qt_meta_data_FwUpgradeDialog, 1526
qt_meta_stringdata_FwUpgradeDialog, 1527

moc_gradientbutton.cpp
QT_MOC_LITERAL, 1529
qt_meta_data_GradientButton, 1529
qt_meta_stringdata_GradientButton, 1530
moc_gradientdialog.cpp
QT_MOC_LITERAL, 1531
qt_meta_data_GradientDialog, 1532
qt_meta_stringdata_GradientDialog, 1532
moc_gradientdialogwidget.cpp
QT_MOC_LITERAL, 1534
qt_meta_data_GradientDialogWidget, 1534
qt_meta_stringdata_GradientDialogWidget, 1535
moc_kb.cpp
QT_MOC_LITERAL, 1537
qt_meta_data_Kb, 1537
qt_meta_stringdata_Kb, 1537
moc_kbanim.cpp
QT_MOC_LITERAL, 1539
qt_meta_data_KbAnim, 1539
qt_meta_stringdata_KbAnim, 1540
moc_kbanimwidget.cpp
QT_MOC_LITERAL, 1542
qt_meta_data_KbAnimWidget, 1542
qt_meta_stringdata_KbAnimWidget, 1542
moc_kbbind.cpp
QT_MOC_LITERAL, 1544
qt_meta_data_KbBind, 1544
qt_meta_stringdata_KbBind, 1544
moc_kbbindwidget.cpp
QT_MOC_LITERAL, 1546
qt_meta_data_KbBindWidget, 1547
qt_meta_stringdata_KbBindWidget, 1547
moc_kbfirmware.cpp
QT_MOC_LITERAL, 1549
qt_meta_data_KbFirmware, 1549
qt_meta_stringdata_KbFirmware, 1550
moc_kblight.cpp
QT_MOC_LITERAL, 1552
qt_meta_data_KbLight, 1552
qt_meta_stringdata_KbLight, 1553
moc_kblightwidget.cpp
QT_MOC_LITERAL, 1555
qt_meta_data_KbLightWidget, 1555
qt_meta_stringdata_KbLightWidget, 1555
moc_kbmanager.cpp
QT_MOC_LITERAL, 1557
qt_meta_data_KbManager, 1557
qt_meta_stringdata_KbManager, 1557
moc_kbmode.cpp
QT_MOC_LITERAL, 1559
qt_meta_data_KbMode, 1560
qt_meta_stringdata_KbMode, 1560
moc_kbperf.cpp
QT_MOC_LITERAL, 1562
qt_meta_data_KbPerf, 1562
qt_meta_stringdata_KbPerf, 1563
moc_kbprofile.cpp
QT_MOC_LITERAL, 1564
qt_meta_data_KbProfile, 1565
qt_meta_stringdata_KbProfile, 1565
moc_kbprofiledialog.cpp
QT_MOC_LITERAL, 1567
qt_meta_data_KbProfileDialog, 1567
qt_meta_stringdata_KbProfileDialog, 1568
moc_kbwidget.cpp
QT_MOC_LITERAL, 1570
qt_meta_data_KbWidget, 1570
qt_meta_stringdata_KbWidget, 1570
moc_keyaction.cpp
QT_MOC_LITERAL, 1572
qt_meta_data_KeyAction, 1572
qt_meta_stringdata_KeyAction, 1573
moc_keywidget.cpp
QT_MOC_LITERAL, 1574
qt_meta_data_KeyWidget, 1575
qt_meta_stringdata_KeyWidget, 1575
moc_kperfwidget.cpp
QT_MOC_LITERAL, 1577
qt_meta_data_KPerfWidget, 1577
qt_meta_stringdata_KPerfWidget, 1578
moc_layoutdialog.cpp
QT_MOC_LITERAL, 1580
qt_meta_data_LayoutDialog, 1580
qt_meta_stringdata_LayoutDialog, 1581
moc_macroreader.cpp
QT_MOC_LITERAL, 1583
qt_meta_data_MacroReader, 1583
qt_meta_data_MacroReaderThread, 1584
qt_meta_stringdata_MacroReader, 1584
qt_meta_stringdata_MacroReaderThread, 1584
moc_mainwindow.cpp
QT_MOC_LITERAL, 1586
qt_meta_data_MainWindow, 1586
qt_meta_stringdata_MainWindow, 1586
moc_modeselectdialog.cpp
QT_MOC_LITERAL, 1588
qt_meta_data_ModeSelectDialog, 1588
qt_meta_stringdata_ModeSelectDialog, 1589
moc_mperfwidget.cpp
QT_MOC_LITERAL, 1590
qt_meta_data_MPerfWidget, 1591
qt_meta_stringdata_MPerfWidget, 1591
moc_quagzipfile.cpp
QT_MOC_LITERAL, 1593
qt_meta_data_QuaGzipFile, 1593
qt_meta_stringdata_QuaGzipFile, 1594
moc_quaziodevice.cpp
QT_MOC_LITERAL, 1595
qt_meta_data_QuaZIODevice, 1596
qt_meta_stringdata_QuaZIODevice, 1596
moc_quazipfile.cpp
QT_MOC_LITERAL, 1597
qt_meta_data_QuaZipFile, 1598
qt_meta_stringdata_QuaZipFile, 1598
moc_rebindwidget.cpp
QT_MOC_LITERAL, 1600

qt_meta_data_RebindWidget, 1600
qt_meta_stringdata_RebindWidget, 1600
moc_rlistwidget.cpp
QT_MOC_LITERAL, 1602
qt_meta_data_RListWidget, 1602
qt_meta_stringdata_RListWidget, 1602
moc_settingswidget.cpp
QT_MOC_LITERAL, 1604
qt_meta_data_SettingsWidget, 1605
qt_meta_stringdata_SettingsWidget, 1605
modBox
Ui::RebindWidget, 953
Ui_RebindWidget, 1183
modButton
Ui::RebindWidget, 953
Ui_RebindWidget, 1183
modKeys
RebindWidget, 993
settingswidget.cpp, 1616
modNames
settingswidget.cpp, 1617
Mode
KbAnim, 308
QuaZip, 824
mode
KbAnim, 320
QuaZipPrivate, 926
mode2Raw
KPerfWidget, 701
modeAction
KeyAction, 622
modeBox
Ui::KPerfWidget, 692
Ui::RebindWidget, 953
Ui_KPerfWidget, 1124
Ui_RebindWidget, 1183
modeButton
Ui::RebindWidget, 954
Ui_RebindWidget, 1183
modeChanged
Kb, 282
KbWidget, 568
modeColorOff
Ui::KPerfWidget, 692
Ui_KPerfWidget, 1124
modeColorOn
Ui::KPerfWidget, 692
Ui_KPerfWidget, 1124
modeCount
KbProfile, 541
modeIcon
KbWidget, 570
ModeList
KbProfile, 534
modeList
Ui::ModeSelectDialog, 745
Ui_ModeSelectDialog, 1138
modeParent
KbBind, 377
KbPerf, 518
modeRenamed
Kb, 283
ModeSelectDialog, 746
~ModeSelectDialog, 748
_modeList, 749
ModeSelectDialog, 748
ModeSelectDialog, 748
on_selAllButton_clicked, 748
on_selNoneButton_clicked, 748
selection, 749
ui, 749
modeUpdate
KbWidget, 572
modeWrapBox
Ui::RebindWidget, 954
Ui_RebindWidget, 1184
Model
KeyMap, 631
model
Kb, 282
KeyMap, 646
modelHeight
KeyMap, 646
modelWidth
KeyMap, 647
modes
KbProfile, 541, 542
modesList
Ui::KbWidget, 594
Ui_KbWidget, 1105
modesList_reordered
KbWidget, 571
modified
UsbId, 1205
modifiedString
UsbId, 1204
monoRgb
kblight.cpp, 1264
keywidget.cpp, 1293
monochrome
Kb, 304
KeyWidget, 659, 660
mouseAccel
Kb, 283
mouseCurrentX
KeyWidget, 673
mouseCurrentY
KeyWidget, 673
mouseDownMode
KeyWidget, 673
mouseDownX
KeyWidget, 674
mouseDownY
KeyWidget, 674
mouseExtKeys
RebindWidget, 993

mouseKeys
RebindWidget, 993
mouseMoveEvent
GradientDialogWidget, 227
KeyWidget, 660
mousePressEvent
GradientDialogWidget, 228
KeyWidget, 661
mouseReleaseEvent
GradientDialogWidget, 228
KeyWidget, 662
mouseTab
Ui::RebindWidget, 954
Ui_RebindWidget, 1184
move
KbProfile, 542
moveCurrent
GradientDialogWidget, 229
mperfwidget.cpp
DPI_BASE, 1316
dpiExp, 1315
dpiLog, 1315
dpiRound, 1316
SET_END, 1315
SET_START, 1315
xyLinkPath, 1316
Multiply
KbAnim, 308
muteBox
Ui::KPerfWidget, 693
Ui_KPerfWidget, 1124
muteColorNA
Ui::KPerfWidget, 693
Ui_KPerfWidget, 1124
muteColorOff
Ui::KPerfWidget, 693
Ui_KPerfWidget, 1124
muteColorOn
Ui::KPerfWidget, 693
Ui_KPerfWidget, 1125
muteNAColor
KbPerf, 530
muteProcess
media_linux.cpp, 1311
muteState
media.h, 1309

NO
KbFirmware, 411
KeyMap, 631
NO_LAYOUT
KeyMap, 631
NO_MODEL
KeyMap, 631
NONE
KbPerf, 501
KeyWidget, 655
NORMAL
KPerfWidget, 699
KbPerf, 501
KeyAction, 602
NUM
KbPerf, 501
N_LAYOUTS
keymap.cpp, 1282
N_MODELS
keymap.cpp, 1283
NEW_FLAG
KbProfileDialog, 558
KbWidget, 585
NS
keymap.cpp, 1283
name
AnimScript, 72
AnimSettingDialog, 108
GradientDialog::Preset, 788
KbAnim, 320, 321
KbMode, 491
KbProfile, 543
KbWidget, 572
Key, 598
KeyMap, 647
QuaZipFileInfo, 897
QuaZipFileInfo64, 904
QuaZipNewInfo, 918
nameBox
Ui::KbAnimWidget, 340
Ui_KbAnimWidget, 1078
nameFilters
QuaZipDir, 866
needsSave
Kb, 284
KbAnim, 321
KbBind, 377
KbLight, 439
KbMode, 492
KbPerf, 519
KbProfile, 543
networkManager
KbFirmware, 419
newDuration
AnimSettingDialog, 108
newGuid
UsbId, 1204
newId
KbAnim, 322
KbMode, 492
KbProfile, 544
newLabel
Ui::FwUpgradeDialog, 193
Ui_FwUpgradeDialog, 1062
newLayout
KbBindWidget, 400
newMode
Kb, 284, 285
newModified
UsbId, 1204

newProfile
Kb, 285, 286
newSelection
KbBindWidget, 401
KbLightWidget, 463
KeyWidget, 674
noAction
KbBind, 378
KeyAction, 622
noAnimLabel
Ui::KbAnimWidget, 341
Ui_KbAnimWidget, 1078
noReorder
KbAnimWidget, 359
noSelPage
Ui::KbAnimWidget, 341
Ui_KbAnimWidget, 1078
Normal
KbAnim, 308
notifyNumber
Kb, 304
notifyPath
Kb, 304
notifyPathMutex
kb.cpp, 1253
notifyPaths
kb.cpp, 1253
numBox
Ui::KPerfWidget, 693
Ui::RebindWidget, 954
Ui_KPerfWidget, 1125
Ui_RebindWidget, 1184
numButton
Ui::RebindWidget, 954
Ui_RebindWidget, 1184
numColorOff
Ui::KPerfWidget, 693
Ui_KPerfWidget, 1125
numColorOn
Ui::KPerfWidget, 693
Ui_KPerfWidget, 1125
numKeys
RebindWidget, 993

OFF
KbPerf, 501
ON
KbPerf, 501
OF
ioapi.h, 1326
ONE_DAY
animscript.cpp, 1209
OTHER
KbPerf, 531
on_aSnapBox_clicked
MPerfWidget, 779
on_actionButton_clicked
FwUpgradeDialog, 185
on_altBox_activated
SettingsWidget, 1004
on_animBox_activated
AnimAddDialog, 44
on_animBox_currentIndexChanged
RebindWidget, 968
on_animButton_clicked
KbLightWidget, 464
RebindWidget, 968
on_animList_currentItemChanged
KbAnimWidget, 348
on_animList_customContextMenuRequested
KbAnimWidget, 349
on_animList_itemChanged
KbAnimWidget, 350
on_animScanButton_clicked
ExtraSettingsWidget, 173
on_applyButton_clicked
RebindWidget, 969
on_autoFWBox_clicked
SettingsWidget, 1005
on_bgButton_clicked
KbLightWidget, 465
on_blendBox_activated
KbAnimWidget, 350
on_brightnessBox_activated
KbLightWidget, 465
on_brightnessBox_clicked
ExtraSettingsWidget, 174
on_btnClearMacro_clicked
RebindWidget, 969
on_btnStartMacro_clicked
RebindWidget, 970
on_btnStopMacro_clicked
RebindWidget, 970
on_cancelButton_clicked
FwUpgradeDialog, 186
RebindWidget, 971
on_capsBox_activated
SettingsWidget, 1005
on_copyButton_clicked
KbBindWidget, 402
KPerfWidget, 702
MPerfWidget, 779
on_ctrlBox_activated
SettingsWidget, 1005
on_delayBox_clicked
ExtraSettingsWidget, 174
on_delayBox_valueChanged
AnimSettingDialog, 109
on_deleteButton_clicked
KbAnimWidget, 351
on_ditherBox_clicked
ExtraSettingsWidget, 174
on_dpiBox_currentIndexChanged
RebindWidget, 972
on_dpiButton_clicked
RebindWidget, 973
on_extraButton_clicked

SettingsWidget, 1006
on_fnBox_currentIndexChanged
RebindWidget, 973
on_fnButton_clicked
RebindWidget, 973
on_fpsBox_valueChanged
ExtraSettingsWidget, 175
on_fwUpdButton_clicked
KbWidget, 572
on_hwSaveButton_clicked
KbWidget, 574
on_indicBox_clicked
MPerfWidget, 780
on_intensityBox_valueChanged
KPerfWidget, 703
on_keyButton_clicked
KbAnimWidget, 351
on_kpDelayBox_valueChanged
AnimSettingDialog, 110
on_kpReleaseBox_stateChanged
AnimSettingDialog, 110
on_kpRepeatBox_valueChanged
AnimSettingDialog, 111
on_lHeightBox_activated
MPerfWidget, 780
on_layoutBox_activated
SettingsWidget, 1006
on_lightBox_currentIndexChanged
RebindWidget, 973
on_lightButton_clicked
RebindWidget, 974
on_lockBox_currentIndexChanged
RebindWidget, 974
on_lockButton_clicked
RebindWidget, 974
on_loginItemBox_clicked
SettingsWidget, 1007
on_mAccelBox_clicked
ExtraSettingsWidget, 175
on_mb2Box_currentIndexChanged
RebindWidget, 975
on_mb2Button_clicked
RebindWidget, 975
on_mbBox_currentIndexChanged
RebindWidget, 975
on_mbButton_clicked
RebindWidget, 976
on_mediaBox_currentIndexChanged
RebindWidget, 976
on_mediaButton_clicked
RebindWidget, 976
on_modBox_currentIndexChanged
RebindWidget, 976
on_modButton_clicked
RebindWidget, 977
on_modeBox_currentIndexChanged
RebindWidget, 977
on_modeButton_clicked
RebindWidget, 977
on_modesList_currentItemChanged
KbWidget, 575
on_modesList_customContextMenuRequested
KbWidget, 576
on_modesList_itemChanged
KbWidget, 577
on_modesList_itemClicked
KbWidget, 578
on_nameBox_textEdited
KbAnimWidget, 352
on_numBox_currentIndexChanged
RebindWidget, 978
on_numButton_clicked
RebindWidget, 978
on_opacityBox_valueChanged
KbAnimWidget, 353
on_presetBox_activated
AnimAddDialog, 45
on_presetDelete_clicked
GradientDialog, 216
on_presetList_currentItemChanged
GradientDialog, 216
on_presetName_textEdited
GradientDialog, 217
on_presetSave_clicked
GradientDialog, 217
on_previewBox_clicked
AnimAddDialog, 46
on_profileBox_activated
KbWidget, 579
on_profileList_currentItemChanged
KbProfileDialog, 552
on_profileList_customContextMenuRequested
KbProfileDialog, 552
on_profileList_itemChanged
KbProfileDialog, 554
on_profileList_itemClicked
KbProfileDialog, 555
on_programKpBox_textChanged
RebindWidget, 978
on_programKpButton_clicked
RebindWidget, 979
on_programKpSIBox_clicked
RebindWidget, 979
on_programKrBox_textChanged
RebindWidget, 979
on_programKrButton_clicked
RebindWidget, 980
on_programKrSIBox_clicked
RebindWidget, 980
on_propertyButton_clicked
KbAnimWidget, 353
on_pteMacroBox_textChanged
RebindWidget, 980
on_pushButton_clicked
SettingsWidget, 1007
on_rb_delay_asTyped_toggled

RebindWidget, 981
on_rb_delay_default_toggled
RebindWidget, 981
on_rb_delay_no_toggled
RebindWidget, 982
on_repeatBox_valueChanged
AnimSettingDialog, 111
on_resetButton_clicked
KbBindWidget, 403
RebindWidget, 982
on_sAccelBox_clicked
ExtraSettingsWidget, 176
on_sSpeedBox_valueChanged
ExtraSettingsWidget, 176
on_selAllButton_clicked
ModeSelectDialog, 748
on_selNoneButton_clicked
ModeSelectDialog, 748
on_shiftBox_activated
SettingsWidget, 1007
on_showAnimBox_clicked
KbLightWidget, 466
on_spinBox_valueChanged
MPerfWidget, 781
on_stopOpacity_valueChanged
GradientDialog, 218
on_stopPos_valueChanged
GradientDialog, 218
on_tabWidget_currentChanged
KbWidget, 579
on_trayBox_clicked
ExtraSettingsWidget, 177
on_typingBox_currentIndexChanged
RebindWidget, 982
on_typingButton_clicked
RebindWidget, 983
on_unbindButton_clicked
RebindWidget, 983
on_wheelBox_currentIndexChanged
RebindWidget, 983
on_wheelButton_clicked
RebindWidget, 984
on_winBox_activated
SettingsWidget, 1008
on_xyBox_clicked
MPerfWidget, 781
once
AutoRun, 121
opacity
KbAnim, 322
opacityBox
Ui::KbAnimWidget, 341
Ui_KbAnimWidget, 1078
open
KbLight, 439
QuaGzipFile, 811, 812
QuaZIODevice, 818
QuaZip, 843
QuaZipFile, 884–886
operator bool
Key, 596
operator const QHash< QString, Key > &
KeyMap, 648
operator QString
KeyAction, 623
operator=
ColorMap, 156
KbPerf, 519
KeyAction, 623
QuaGzipFile, 812
QuaZip, 846
QuaZipDir, 867
QuaZipFile, 888
operator==
QuaZipDir, 867
orderChanged
RListWidget, 998
osxLabel
Ui::ExtraSettingsWidget, 167
Ui_ExtraSettingsWidget, 1054
osxLine
Ui::ExtraSettingsWidget, 168
Ui_ExtraSettingsWidget, 1054

p
QuaZip, 853
QuaZipFile, 894
PL
KeyMap, 631
PATCH_COUNT
keymap.cpp, 1283
PROGRAM_PR_INDEF
KeyAction, 627
PROGRAM_PR_KPSTOP
KeyAction, 627
PROGRAM_PR_KRSTOP
KeyAction, 627
PROGRAM_PR_MULTI
KeyAction, 628
PROGRAM_RE_INDEF
KeyAction, 628
PROGRAM_RE_KPSTOP
KeyAction, 628
PROGRAM_RE_MULTI
KeyAction, 628
paintEvent
GradientDialogWidget, 230
KeyWidget, 663
param
AnimScript, 72
paramIterator
AnimScript, 74
parameter
KbAnim, 322, 323
parameters
AnimScript, 73
parseCommandLine

main.cpp, 1305
parseVersionString
KbManager, 479
patch
keymap.cpp, 1283
patchANSI
keymap.cpp, 1286
patchDE
keymap.cpp, 1289
patchDK
keymap.cpp, 1289
patchDvorak
keymap.cpp, 1289
patchES
keymap.cpp, 1289
patchEU
keymap.cpp, 1290
patchFR
keymap.cpp, 1290
patchISO
keymap.cpp, 1287
patchIT
keymap.cpp, 1290
patchMX
keymap.cpp, 1290
patchNO
keymap.cpp, 1290
patchSE
keymap.cpp, 1291
path
AnimScript, 74
QuaZipDir, 867
perf
KbBind, 379
KbMode, 493
KPerfWidget, 707
MPerfWidget, 786
permissionsFromExternalAttr
quazipfileinfo.cpp, 1363
pickColor
ColorButton, 146
pickGradient
GradientButton, 197
pidActive
main.cpp, 1306
pollLabel
Ui::KbWidget, 594
Ui_KbWidget, 1106
pollLabel2
Ui::KbWidget, 594
Ui_KbWidget, 1106
pollUpdates
ExtraSettingsWidget, 177
SettingsWidget, 1008
pollrate
Kb, 304
popDpi
KbPerf, 520
pos
QIODevice_descriptor, 791
QuaZipFile, 888
positions
KeyMap, 648
preProgram
KeyAction, 627
prefsPath
gradientdialog.cpp, 1250
Kb, 304
Preset
GradientDialog::Preset, 788
preset
AnimScript, 74
presetBox
Ui::AnimAddDialog, 51
Ui_AnimAddDialog, 1031
presetDelete
Ui::GradientDialog, 206
Ui_GradientDialog, 1068
presetList
Ui::GradientDialog, 207
Ui_GradientDialog, 1068
presetName
Ui::GradientDialog, 207
Ui_GradientDialog, 1069
presetSave
Ui::GradientDialog, 207
Ui_GradientDialog, 1069
PresetValue
AnimScript, 57
presets
AnimScript, 75
GradientDialog, 220
prevMode
Kb, 304
prevProfile
Kb, 304
previewAnim
KbLight, 440
previewBox
Ui::AnimAddDialog, 51
Ui_AnimAddDialog, 1031
previousItems
RListWidget, 1000
printParams
AnimScript, 75
printRGB
KbLight, 441
printurl
ckb-anim.h, 1232
process
AnimScript, 83
processDownload
KbFirmware, 417
profile
KbBindWidget, 407
KPerfWidget, 707

MPerfWidget, 786
RebindWidget, 993
profileAdded
Kb, 287
profileBox
Ui::KbWidget, 594
Ui_KbWidget, 1106
profileChanged
Kb, 287
KbWidget, 580
profileList
Ui::KbProfileDialog, 562
Ui_KbProfileDialog, 1097
profileList_reordered
KbProfileDialog, 555
profileRenamed
Kb, 287
profiles
Kb, 288
progTipLabel
Ui::RebindWidget, 956
Ui_RebindWidget, 1185
programAction
KeyAction, 623
programInfo
KeyAction, 623
programKpBox
Ui::RebindWidget, 954
Ui_RebindWidget, 1184
programKpButton
Ui::RebindWidget, 954
Ui_RebindWidget, 1184
programKpExtra
Ui::RebindWidget, 954
Ui_RebindWidget, 1184
programKpModeBox
Ui::RebindWidget, 955
Ui_RebindWidget, 1184
programKpSIBox
Ui::RebindWidget, 955
Ui_RebindWidget, 1185
programKrBox
Ui::RebindWidget, 955
Ui_RebindWidget, 1185
programKrButton
Ui::RebindWidget, 955
Ui_RebindWidget, 1185
programKrExtra
Ui::RebindWidget, 955
Ui_RebindWidget, 1185
programKrModeBox
Ui::RebindWidget, 955
Ui_RebindWidget, 1185
programKrSIBox
Ui::RebindWidget, 955
Ui_RebindWidget, 1185
programTab
Ui::RebindWidget, 955
Ui_RebindWidget, 1185
progressBar
Ui::FwUpgradeDialog, 194
Ui_FwUpgradeDialog, 1062
propertyButton
Ui::KbAnimWidget, 341
Ui_KbAnimWidget, 1078
pteMacroBox
Ui::RebindWidget, 956
Ui_RebindWidget, 1185
pteMacroComment
Ui::RebindWidget, 956
Ui_RebindWidget, 1186
pteMacroText
Ui::RebindWidget, 956
Ui_RebindWidget, 1186
pushButton
Ui::SettingsWidget, 1022
Ui_SettingsWidget, 1199
pushDpi
KbPerf, 520, 521
pushSniper
KbPerf, 522
pushedDpis
KbPerf, 531
pwd
CkbSettings, 131, 132

q
QuaZipFilePrivate, 909
QuaZipPrivate, 927
qCleanupResources_binary
qrc_binary.cpp, 1606
qCleanupResources_image
qrc_image.cpp, 1609
qCleanupResources_text
qrc_text.cpp, 1611
QColorMap
colormap.h, 1243
QColorMapIterator
colormap.h, 1243
QDialog, 789
QIODevice, 790
QIODevice_descriptor, 791
pos, 791
QIODevice_descriptor, 791
QIODevice_descriptor, 791
qInitResources_binary
qrc_binary.cpp, 1606
qInitResources_image
qrc_image.cpp, 1609
qInitResources_text
qrc_text.cpp, 1612
QListWidget, 792
QMainWindow, 793
QMutableColorMapIterator
colormap.h, 1243
QObject, 794
QPushButton, 795

qRegisterResourceData
qrc_binary.cpp, 1607
qrc_image.cpp, 1610
qrc_text.cpp, 1612
QT_MOC_LITERAL
moc_animadddialog.cpp, 1510
moc_animscript.cpp, 1513
moc_animsettingdialog.cpp, 1515
moc_ckbsettingswriter.cpp, 1518
moc_colorbutton.cpp, 1520
moc_extrasettingswidget.cpp, 1523
moc_fwupgradedialog.cpp, 1526
moc_gradientbutton.cpp, 1529
moc_gradientdialog.cpp, 1531
moc_gradientdialogwidget.cpp, 1534
moc_kb.cpp, 1537
moc_kbanim.cpp, 1539
moc_kbanimwidget.cpp, 1542
moc_kbbind.cpp, 1544
moc_kbbindwidget.cpp, 1546
moc_kbfirmware.cpp, 1549
moc_kblight.cpp, 1552
moc_kblightwidget.cpp, 1555
moc_kbmanager.cpp, 1557
moc_kbmode.cpp, 1559
moc_kbperf.cpp, 1562
moc_kbprofile.cpp, 1564
moc_kbprofiledialog.cpp, 1567
moc_kbwidget.cpp, 1570
moc_keyaction.cpp, 1572
moc_keywidget.cpp, 1574
moc_kperfwidget.cpp, 1577
moc_layoutdialog.cpp, 1580
moc_macroreader.cpp, 1583
moc_mainwindow.cpp, 1586
moc_modeselectdialog.cpp, 1588
moc_mperfwidget.cpp, 1590
moc_quagzipfile.cpp, 1593
moc_quaziodevice.cpp, 1595
moc_quazipfile.cpp, 1597
moc_rebindwidget.cpp, 1600
moc_rlistwidget.cpp, 1602
moc_settingswidget.cpp, 1604
QThread, 796
QUAZIO_INBUFSIZE
quaziodevice.cpp, 1351
QUAZIO_OUTBUFSIZE
quaziodevice.cpp, 1351
QUAZIP_EXPORT
quazip_global.h, 1356
qUnregisterResourceData
qrc_binary.cpp, 1607
qrc_image.cpp, 1610
qrc_text.cpp, 1612
QWidget, 927
qioapi.cpp
call_zopen64, 1333
call_zseek64, 1333
call_ztell64, 1333
fill_qiodevice64_filefunc, 1334
fill_qiodevice_filefunc, 1335
fill_zlib_filefunc64_32_def_from_filefunc32, 1336
qiodevice64_seek_file_func, 1337
qiodevice64_tell_file_func, 1338
qiodevice_close_file_func, 1338
qiodevice_error_file_func, 1339
qiodevice_fakeclose_file_func, 1339
qiodevice_open_file_func, 1340
qiodevice_read_file_func, 1341
qiodevice_seek_file_func, 1341
qiodevice_tell_file_func, 1342
qiodevice_write_file_func, 1342
SEEK_CUR, 1333
SEEK_END, 1333
SEEK_SET, 1333
qiodevice64_seek_file_func
qioapi.cpp, 1337
qiodevice64_tell_file_func
qioapi.cpp, 1338
qiodevice_close_file_func
qioapi.cpp, 1338
qiodevice_error_file_func
qioapi.cpp, 1339
qiodevice_fakeclose_file_func
qioapi.cpp, 1339
qiodevice_open_file_func
qioapi.cpp, 1340
qiodevice_read_file_func
qioapi.cpp, 1341
qiodevice_seek_file_func
qioapi.cpp, 1341
qiodevice_tell_file_func
qioapi.cpp, 1342
qiodevice_write_file_func
qioapi.cpp, 1342
qrc_binary.cpp
qCleanupResources_binary, 1606
qInitResources_binary, 1606
qRegisterResourceData, 1607
qUnregisterResourceData, 1607
qt_resource_data, 1608
qt_resource_name, 1608
qt_resource_struct, 1608
qrc_image.cpp
qCleanupResources_image, 1609
qInitResources_image, 1609
qRegisterResourceData, 1610
qUnregisterResourceData, 1610
qt_resource_data, 1610
qt_resource_name, 1610
qt_resource_struct, 1611
qrc_text.cpp
qCleanupResources_text, 1611
qInitResources_text, 1612
qRegisterResourceData, 1612
qUnregisterResourceData, 1612

qt_resource_data, 1613
qt_resource_name, 1613
qt_resource_struct, 1613
qs_strcmp
colormap.cpp, 1241
qt_meta_stringdata_AnimAddDialog_t, 1509
qt_meta_stringdata_AnimScript_t, 1512
qt_meta_stringdata_AnimSettingDialog_t, 1515
qt_meta_stringdata_CkbSettingsWriter_t, 1517
qt_meta_stringdata_ColorButton_t, 1520
qt_meta_stringdata_ExtraSettingsWidget_t, 1522
qt_meta_stringdata_FwUpgradeDialog_t, 1525
qt_meta_stringdata_GradientButton_t, 1528
qt_meta_stringdata_GradientDialog_t, 1531
qt_meta_stringdata_GradientDialogWidget_t, 1533
qt_meta_stringdata_KPerfWidget_t, 1576
qt_meta_stringdata_Kb_t, 1536
qt_meta_stringdata_KbAnim_t, 1538
qt_meta_stringdata_KbAnimWidget_t, 1541
qt_meta_stringdata_KbBind_t, 1543
qt_meta_stringdata_KbBindWidget_t, 1546
qt_meta_stringdata_KbFirmware_t, 1548
qt_meta_stringdata_KbLight_t, 1551
qt_meta_stringdata_KbLightWidget_t, 1554
qt_meta_stringdata_KbManager_t, 1556
qt_meta_stringdata_KbMode_t, 1559
qt_meta_stringdata_KbPerf_t, 1561
qt_meta_stringdata_KbProfile_t, 1564
qt_meta_stringdata_KbProfileDialog_t, 1566
qt_meta_stringdata_KbWidget_t, 1569
qt_meta_stringdata_KeyAction_t, 1571
qt_meta_stringdata_KeyWidget_t, 1574
qt_meta_stringdata_LayoutDialog_t, 1579
qt_meta_stringdata_MPerfWidget_t, 1590
qt_meta_stringdata_MacroReader_t, 1582
qt_meta_stringdata_MacroReaderThread_t, 1582
qt_meta_stringdata_MainWindow_t, 1586
qt_meta_stringdata_ModeSelectDialog_t, 1587
qt_meta_stringdata_QuaGzipFile_t, 1592
qt_meta_stringdata_QuaZIODevice_t, 1595
qt_meta_stringdata_QuaZipFile_t, 1597
qt_meta_stringdata_RListWidget_t, 1601
qt_meta_stringdata_RebindWidget_t, 1599
qt_meta_stringdata_SettingsWidget_t, 1604
qt_meta_data_AnimAddDialog
moc_animadddialog.cpp, 1510
qt_meta_data_AnimScript
moc_animscript.cpp, 1513
qt_meta_data_AnimSettingDialog
moc_animsettingdialog.cpp, 1516
qt_meta_data_CkbSettingsWriter
moc_ckbsettingswriter.cpp, 1518
qt_meta_data_ColorButton
moc_colorbutton.cpp, 1521
qt_meta_data_ExtraSettingsWidget
moc_extrasettingswidget.cpp, 1523
qt_meta_data_FwUpgradeDialog
moc_fwupgradedialog.cpp, 1526
qt_meta_data_GradientButton
moc_gradientbutton.cpp, 1529
qt_meta_data_GradientDialog
moc_gradientdialog.cpp, 1532
qt_meta_data_GradientDialogWidget
moc_gradientdialogwidget.cpp, 1534
qt_meta_data_KPerfWidget
moc_kperfwidget.cpp, 1577
qt_meta_data_Kb
moc_kb.cpp, 1537
qt_meta_data_KbAnim
moc_kbanim.cpp, 1539
qt_meta_data_KbAnimWidget
moc_kbanimwidget.cpp, 1542
qt_meta_data_KbBind
moc_kbbind.cpp, 1544
qt_meta_data_KbBindWidget
moc_kbbindwidget.cpp, 1547
qt_meta_data_KbFirmware
moc_kbfirmware.cpp, 1549
qt_meta_data_KbLight
moc_kblight.cpp, 1552
qt_meta_data_KbLightWidget
moc_kblightwidget.cpp, 1555
qt_meta_data_KbManager
moc_kbmanager.cpp, 1557
qt_meta_data_KbMode
moc_kbmode.cpp, 1560
qt_meta_data_KbPerf
moc_kbperf.cpp, 1562
qt_meta_data_KbProfile
moc_kbprofile.cpp, 1565
qt_meta_data_KbProfileDialog
moc_kbprofiledialog.cpp, 1567
qt_meta_data_KbWidget
moc_kbwidget.cpp, 1570
qt_meta_data_KeyAction
moc_keyaction.cpp, 1572
qt_meta_data_KeyWidget
moc_keywidget.cpp, 1575
qt_meta_data_LayoutDialog
moc_layoutdialog.cpp, 1580
qt_meta_data_MPerfWidget
moc_mperfwidget.cpp, 1591
qt_meta_data_MacroReader
moc_macroreader.cpp, 1583
qt_meta_data_MacroReaderThread
moc_macroreader.cpp, 1584
qt_meta_data_MainWindow
moc_mainwindow.cpp, 1586
qt_meta_data_ModeSelectDialog
moc_modeselectdialog.cpp, 1588
qt_meta_data_QuaGzipFile
moc_quagzipfile.cpp, 1593
qt_meta_data_QuaZIODevice
moc_quaziodevice.cpp, 1596
qt_meta_data_QuaZipFile
moc_quazipfile.cpp, 1598

qt_meta_data_RListWidget
moc_rlistwidget.cpp, 1602
qt_meta_data_RebindWidget
moc_rebindwidget.cpp, 1600
qt_meta_data_SettingsWidget
moc_settingswidget.cpp, 1605
qt_meta_stringdata_AnimAddDialog
moc_animadddialog.cpp, 1511
qt_meta_stringdata_AnimScript
moc_animscript.cpp, 1514
qt_meta_stringdata_AnimSettingDialog
moc_animsettingdialog.cpp, 1516
qt_meta_stringdata_CkbSettingsWriter
moc_ckbsettingswriter.cpp, 1519
qt_meta_stringdata_ColorButton
moc_colorbutton.cpp, 1521
qt_meta_stringdata_ExtraSettingsWidget
moc_extrasettingswidget.cpp, 1523
qt_meta_stringdata_FwUpgradeDialog
moc_fwupgradedialog.cpp, 1527
qt_meta_stringdata_GradientButton
moc_gradientbutton.cpp, 1530
qt_meta_stringdata_GradientDialog
moc_gradientdialog.cpp, 1532
qt_meta_stringdata_GradientDialogWidget
moc_gradientdialogwidget.cpp, 1535
qt_meta_stringdata_KPerfWidget
moc_kperfwidget.cpp, 1578
qt_meta_stringdata_Kb
moc_kb.cpp, 1537
qt_meta_stringdata_KbAnim
moc_kbanim.cpp, 1540
qt_meta_stringdata_KbAnimWidget
moc_kbanimwidget.cpp, 1542
qt_meta_stringdata_KbBind
moc_kbbind.cpp, 1544
qt_meta_stringdata_KbBindWidget
moc_kbbindwidget.cpp, 1547
qt_meta_stringdata_KbFirmware
moc_kbfirmware.cpp, 1550
qt_meta_stringdata_KbLight
moc_kblight.cpp, 1553
qt_meta_stringdata_KbLightWidget
moc_kblightwidget.cpp, 1555
qt_meta_stringdata_KbManager
moc_kbmanager.cpp, 1557
qt_meta_stringdata_KbMode
moc_kbmode.cpp, 1560
qt_meta_stringdata_KbPerf
moc_kbperf.cpp, 1563
qt_meta_stringdata_KbProfile
moc_kbprofile.cpp, 1565
qt_meta_stringdata_KbProfileDialog
moc_kbprofiledialog.cpp, 1568
qt_meta_stringdata_KbWidget
moc_kbwidget.cpp, 1570
qt_meta_stringdata_KeyAction
moc_keyaction.cpp, 1573
qt_meta_stringdata_KeyWidget
moc_keywidget.cpp, 1575
qt_meta_stringdata_LayoutDialog
moc_layoutdialog.cpp, 1581
qt_meta_stringdata_MPerfWidget
moc_mperfwidget.cpp, 1591
qt_meta_stringdata_MacroReader
moc_macroreader.cpp, 1584
qt_meta_stringdata_MacroReaderThread
moc_macroreader.cpp, 1584
qt_meta_stringdata_MainWindow
moc_mainwindow.cpp, 1586
qt_meta_stringdata_ModeSelectDialog
moc_modeselectdialog.cpp, 1589
qt_meta_stringdata_QuaGzipFile
moc_quagzipfile.cpp, 1594
qt_meta_stringdata_QuaZIODevice
moc_quaziodevice.cpp, 1596
qt_meta_stringdata_QuaZipFile
moc_quazipfile.cpp, 1598
qt_meta_stringdata_RListWidget
moc_rlistwidget.cpp, 1602
qt_meta_stringdata_RebindWidget
moc_rebindwidget.cpp, 1600
qt_meta_stringdata_SettingsWidget
moc_settingswidget.cpp, 1605
qt_resource_data
qrc_binary.cpp, 1608
qrc_image.cpp, 1610
qrc_text.cpp, 1613
qt_resource_name
qrc_binary.cpp, 1608
qrc_image.cpp, 1610
qrc_text.cpp, 1613
qt_resource_struct
qrc_binary.cpp, 1608
qrc_image.cpp, 1611
qrc_text.cpp, 1613
QuaZip
csDefault, 824
csInsensitive, 824
csSensitive, 824
MAX_FILE_NAME_LENGTH, 824
mdAdd, 824
mdAppend, 824
mdCreate, 824
mdNotOpen, 824
mdUnzip, 824
QuaAdler32, 797
calculate, 799
checksum, 800
QuaAdler32, 799
QuaAdler32, 799
reset, 799
update, 800
value, 800
QuaChecksum32, 800
calculate, 802

reset, 802
update, 802
value, 802
QuaCrc32, 803
calculate, 805
checksum, 806
QuaCrc32, 805
QuaCrc32, 805
reset, 805
update, 806
value, 806
QuaGzipFile, 806
~QuaGzipFile, 810
close, 810
d, 813
flush, 811
getFileName, 811
isSequential, 811
open, 811, 812
operator=, 812
QuaGzipFile, 809, 810
QuaGzipFile, 809, 810
readData, 812
setFileName, 812
writeData, 812
QuaZIODevice, 813
~QuaZIODevice, 816
close, 816
d, 820
flush, 817
getIoDevice, 818
isSequential, 818
open, 818
QuaZIODevice, 816
QuaZIODevice, 816
readData, 819
writeData, 820
QuaZip, 821
~QuaZip, 825
CaseSensitivity, 824
close, 826
Constants, 824
convertCaseSensitivity, 827
getComment, 828
getCommentCodec, 828
getCurrentFileInfo, 829, 830
getCurrentFileName, 831
getEntriesCount, 832
getFileInfoList, 833
getFileInfoList64, 833
getFileNameCodec, 834
getFileNameList, 834
getIoDevice, 835
getMode, 835
getUnzFile, 836
getZipError, 837
getZipFile, 838
getZipName, 838
goToFirstFile, 839
goToNextFile, 840
hasCurrentFile, 841
isAutoClose, 841
isDataDescriptorWritingEnabled, 841
isOpen, 842
isZip64Enabled, 842
Mode, 824
open, 843
operator=, 846
p, 853
QuaZip, 825
QuaZipPrivate, 853
QuaZip, 825
QuaZipPrivate, 925
setAutoClose, 846
setComment, 847
setCommentCodec, 847
setCurrentFile, 847
setDataDescriptorWritingEnabled, 849
setDefaultFileNameCodec, 850
setFileNameCodec, 851
setIoDevice, 851
setZip64Enabled, 852
setZipName, 852
QuaZip_getFileInfo
quazip.cpp, 1353, 1354
QuaZipDir, 853
~QuaZipDir, 856
caseSensitivity, 857
cd, 857
cdUp, 859
count, 859
d, 870
dirName, 860
entryInfoList, 860, 861
entryInfoList64, 861, 862
entryList, 862, 863
exists, 863, 864
filePath, 865
filter, 865
isRoot, 866
nameFilters, 866
operator=, 867
operator==, 867
path, 867
QuaZipDir, 856
QuaZipDir, 856
relativeFilePath, 868
setCaseSensitivity, 868
setFilter, 869
setNameFilters, 869
setPath, 869
setSorting, 870
sorting, 870
QuaZipDir_convertInfoList
quazipdir.cpp, 1357, 1358
QuaZipDir_getFileInfo

quazipdir.cpp, 1358
QuaZipFile, 871
~QuaZipFile, 876
atEnd, 876
bytesAvailable, 877
close, 877
csize, 878
getActualFileName, 879
getCaseSensitivity, 880
getFileInfo, 880, 881
getFileName, 882
getZip, 882
getZipError, 882
getZipName, 883
isRaw, 883
isSequential, 884
open, 884–886
operator=, 888
p, 894
pos, 888
QuaZipFile, 874, 875
QuaZipFilePrivate, 893
QuaZipFile, 874, 875
QuaZipFilePrivate, 908
readData, 889
setFileName, 890
setZip, 890
setZipName, 891
size, 891
usize, 892
writeData, 893
QuaZipFileInfo, 894
comment, 896
compressedSize, 896
crc, 896
dateTime, 896
diskNumberStart, 896
externalAttr, 896
extra, 896
flags, 896
getPermissions, 895
internalAttr, 897
method, 897
name, 897
uncompressedSize, 897
versionCreated, 897
versionNeeded, 897
QuaZipFileInfo64, 897
comment, 903
compressedSize, 903
crc, 903
dateTime, 903
diskNumberStart, 903
externalAttr, 903
extra, 904
flags, 904
getNTFSaTime, 899
getNTFScTime, 900
getNTFSmTime, 900
getPermissions, 901
internalAttr, 904
isEncrypted, 902
method, 904
name, 904
toQuaZipFileInfo, 902
uncompressedSize, 904
versionCreated, 904
versionNeeded, 904
QuaZipFilePrivate, 905
~QuaZipFilePrivate, 907
caseSensitivity, 908
crc, 908
fileName, 908
internal, 908
q, 909
QuaZipFile, 908
QuaZipFilePrivate, 906, 907
QuaZipFile, 893
QuaZipFilePrivate, 906, 907
raw, 909
resetZipError, 907
setZipError, 907
uncompressedSize, 909
writePos, 909
zip, 909
zipError, 909
QuaZipNewInfo, 910
comment, 917
dateTime, 917
externalAttr, 917
extraGlobal, 918
extraLocal, 918
internalAttr, 918
name, 918
QuaZipNewInfo, 911, 912
QuaZipNewInfo, 911, 912
setFileDateTime, 913
setFileNTFSTimes, 916
setFileNTFSaTime, 913
setFileNTFScTime, 914
setFileNTFSmTime, 915
setFilePermissions, 916
setPermissions, 917
uncompressedSize, 918
QuaZipNewInfo_init
quazipnewinfo.cpp, 1365
QuaZipNewInfo_setPermissions
quazipnewinfo.cpp, 1366
QuaZipPrivate, 918
addCurrentFileToDirectoryMap, 921
autoClose, 925
clearDirectoryMap, 922
comment, 925
commentCodec, 925
dataDescriptorWritingEnabled, 925
defaultFileNameCodec, 926

directoryCaseInsensitive, 926
directoryCaseSensitive, 926
fileNameCodec, 926
getDefaultFileNameCodec, 923
getFileInfoList, 923
goToFirstUnmappedFile, 924
hasCurrentFile_f, 926
ioDevice, 926
lastMappedDirectoryEntry, 926
mode, 926
q, 927
QuaZip, 925
QuaZipPrivate, 920, 921
QuaZip, 853
QuaZipPrivate, 920, 921
zip64, 927
zipError, 927
zipName, 927
quaziodevice.cpp
QUAZIO_INBUFSIZE, 1351
QUAZIO_OUTBUFSIZE, 1351
quazip.cpp
QuaZip_getFileInfo, 1353, 1354
quazip.h
UNZ_OPENERROR, 1355
quazip_global.h
QUAZIP_EXPORT, 1356
UNUSED, 1357
quazipdir.cpp
QuaZipDir_convertInfoList, 1357, 1358
QuaZipDir_getFileInfo, 1358
quazipfileinfo.cpp
getNTFSTime, 1361
permissionsFromExternalAttr, 1363
quazipnewinfo.cpp
QuaZipNewInfo_init, 1365
QuaZipNewInfo_setPermissions, 1366
setNTFSTime, 1366
quitApp
MainWindow, 735

RGB
KPerfWidget, 699
README.md, 1207
RListWidget, 995
change, 997
currentData, 1000
DATA_ROLE, 1000
dragged, 1000
enter, 997
orderChanged, 998
previousItems, 1000
RListWidget, 997
reorderTimer, 1000
rescanItems, 998
RListWidget, 997
timerTick, 999
ROADMAP.md, 1207
raw
QuaZipFilePrivate, 909
raw2Mode
KPerfWidget, 703
rb_delay_asTyped
Ui::RebindWidget, 956
Ui_RebindWidget, 1186
rb_delay_default
Ui::RebindWidget, 956
Ui_RebindWidget, 1186
rb_delay_no
Ui::RebindWidget, 956
Ui_RebindWidget, 1186
rbWidget
Ui::KbBindWidget, 395
Ui_KbBindWidget, 1084
reInit
KbAnim, 324
readAnyFrame
AnimScript, 83
readData
QuaGzipFile, 812
QuaZIODevice, 819
QuaZipFile, 889
readFrame
AnimScript, 83
readMacro
MacroReaderThread, 722
readNotify
Kb, 289
readProcess
AnimScript, 76
RebindWidget, 959
~RebindWidget, 964
applyChanges, 964
bind, 992
convertMacroBox, 966
fnKeys, 993
helpStatus, 967
macReader, 993
mediaKeys, 993
modKeys, 993
mouseExtKeys, 993
mouseKeys, 993
numKeys, 993
on_animBox_currentIndexChanged, 968
on_animButton_clicked, 968
on_applyButton_clicked, 969
on_btnClearMacro_clicked, 969
on_btnStartMacro_clicked, 970
on_btnStopMacro_clicked, 970
on_cancelButton_clicked, 971
on_dpiBox_currentIndexChanged, 972
on_dpiButton_clicked, 973
on_fnBox_currentIndexChanged, 973
on_fnButton_clicked, 973
on_lightBox_currentIndexChanged, 973
on_lightButton_clicked, 974
on_lockBox_currentIndexChanged, 974

on_lockButton_clicked, 974
on_mb2Box_currentIndexChanged, 975
on_mb2Button_clicked, 975
on_mbBox_currentIndexChanged, 975
on_mbButton_clicked, 976
on_mediaBox_currentIndexChanged, 976
on_mediaButton_clicked, 976
on_modBox_currentIndexChanged, 976
on_modButton_clicked, 977
on_modeBox_currentIndexChanged, 977
on_modeButton_clicked, 977
on_numBox_currentIndexChanged, 978
on_numButton_clicked, 978
on_programKpBox_textChanged, 978
on_programKpButton_clicked, 979
on_programKpSIBox_clicked, 979
on_programKrBox_textChanged, 979
on_programKrButton_clicked, 980
on_programKrSIBox_clicked, 980
on_pteMacroBox_textChanged, 980
on_rb_delay_asTyped_toggled, 981
on_rb_delay_default_toggled, 981
on_rb_delay_no_toggled, 982
on_resetButton_clicked, 982
on_typingBox_currentIndexChanged, 982
on_typingButton_clicked, 983
on_unbindButton_clicked, 983
on_wheelBox_currentIndexChanged, 983
on_wheelButton_clicked, 984
profile, 993
RebindWidget, 963
RebindWidget, 963
selection, 993
setBind, 984
setBox, 986
setCorrectRadioButton, 988
setSelection, 989
TAB_ANIM, 994
TAB_KB, 994
TAB_MACRO, 994
TAB_MOUSE, 994
TAB_PROGRAM, 994
TAB_SPECIAL, 994
typingKeys, 994
ui, 994
wheelKeys, 995
rebindwidget.cpp
DPI_CUST_IDX, 1507
DPI_OFFSET, 1507
rebuildBaseMap
KbLight, 442
refreshList
KbAnimWidget, 354
relProgram
KeyAction, 628
relativeFilePath
QuaZipDir, 868
remove
CkbSettings, 133
removeAll
KbProfile, 545
removeCache
CkbSettings, 137
removeDev
FwUpgradeDialog, 186
removeDevice
MainWindow, 736
removeFile
JlCompress, 253
reorderAnims
KbAnimWidget, 355
reorderTimer
RListWidget, 1000
repeatBox
Ui::AnimSettingDialog, 95
Ui_AnimSettingDialog, 1042
repeatKey
KbAnim, 332
repeatLabel
Ui::AnimSettingDialog, 95
Ui_AnimSettingDialog, 1042
repeatLabel_2
Ui::AnimSettingDialog, 95
Ui_AnimSettingDialog, 1042
repeatMsec
AnimScript, 83
KbAnim, 332
repeatTime
KbAnim, 332
repopulate
KbProfileDialog, 556
rescanItems
RListWidget, 998
reset
QuaAdler32, 799
QuaChecksum32, 802
QuaCrc32, 805
resetAction
KbBind, 380
resetButton
Ui::KbBindWidget, 395
Ui::RebindWidget, 957
Ui_KbBindWidget, 1085
Ui_RebindWidget, 1186
resetIndicators
KbLight, 443
resetParams
KbAnim, 324
resetZipError
QuaZipFilePrivate, 907
restartAnimation
KbLight, 443
restoreAction
MainWindow, 741
retranslateUi
Ui::AnimAddDialog, 48

Ui::AnimSettingDialog, 86
Ui::ExtraSettingsWidget, 160
Ui::FwUpgradeDialog, 190
Ui::GradientDialog, 202
Ui::KbAnimWidget, 334
Ui::KbBindWidget, 391
Ui::KbLightWidget, 451
Ui::KbProfileDialog, 560
Ui::KbWidget, 587
Ui::KPerfWidget, 678
Ui::LayoutDialog, 709
Ui::MainWindow, 725
Ui::ModeSelectDialog, 743
Ui::MPerfWidget, 753
Ui::RebindWidget, 931
Ui::SettingsWidget, 1014
Ui_AnimAddDialog, 1028
Ui_AnimSettingDialog, 1034
Ui_ExtraSettingsWidget, 1047
Ui_FwUpgradeDialog, 1058
Ui_GradientDialog, 1064
Ui_KbAnimWidget, 1072
Ui_KbBindWidget, 1081
Ui_KbLightWidget, 1087
Ui_KbProfileDialog, 1095
Ui_KbWidget, 1099
Ui_KPerfWidget, 1110
Ui_LayoutDialog, 1128
Ui_MainWindow, 1133
Ui_ModeSelectDialog, 1136
Ui_MPerfWidget, 1142
Ui_RebindWidget, 1162
Ui_SettingsWidget, 1191

retrigger
AnimScript, 77

rgbMode
KeyWidget, 668, 669

right
settingswidget.cpp, 1616

run
CkbSettingsWriter, 139
Kb, 293
MacroReaderThread, 722

runningPushIdx
KbPerf, 531

SABRE
KeyMap, 632

SCIMITAR
KeyMap, 632

SCROLL
KbPerf, 501

SE
KeyMap, 631

SET
KeyWidget, 655

SPECIAL
KeyAction, 602

STRAFE
KeyMap, 632

SUBTRACT
KeyWidget, 655

SABRE_HEIGHT
keymap.cpp, 1283

SABRE_WIDTH
keymap.cpp, 1283

sAccelBox
Ui::ExtraSettingsWidget, 168
Ui_ExtraSettingsWidget, 1054

sAuthorLabel
Ui::AnimSettingDialog, 95
Ui_AnimSettingDialog, 1042

SCIM_HEIGHT
keymap.cpp, 1283

SCIM_WIDTH
keymap.cpp, 1283

sDescLabel
Ui::AnimSettingDialog, 95
Ui_AnimSettingDialog, 1042

SEEK_CUR
qioapi.cpp, 1333
zip.c, 1448

SEEK_END
qioapi.cpp, 1333
zip.c, 1448

SEEK_SET
qioapi.cpp, 1333
zip.c, 1448

SET_END
mperfwidget.cpp, 1315

SET_START
mperfwidget.cpp, 1315

SGroup, 1024
~SGroup, 1026
_settings, 1026
SGroup, 1026
SGroup, 1026

SHMEM_SIZE
main.cpp, 1301

SHMEM_SIZE_V015
main.cpp, 1301

SIZECENTRALDIRITEM
unzip.c, 1375

SIZECENTRALHEADER
zip.c, 1448

SIZEDATA_INDATABLOCK
zip.c, 1448

SIZEZIPLOCALHEADER
unzip.c, 1375

sLicenseLabel
Ui::AnimSettingDialog, 96
Ui_AnimSettingDialog, 1043

SNIPER
KbPerf, 531

sNameLabel
Ui::AnimSettingDialog, 96
Ui_AnimSettingDialog, 1043

sSpeedBox
Ui::ExtraSettingsWidget, 168
Ui_ExtraSettingsWidget, 1055
sSpeedWidget
Ui::ExtraSettingsWidget, 168
Ui_ExtraSettingsWidget, 1055
sToL
kblight.cpp, 1265
sVerLabel
Ui::AnimSettingDialog, 96
Ui_AnimSettingDialog, 1043
sYearLabel
Ui::AnimSettingDialog, 96
Ui_AnimSettingDialog, 1043
sabOverlay
keywidget.cpp, 1294
SabreKeys
keymap.cpp, 1291
save
Kb, 294
KbAnim, 325
KbBind, 381
KbLight, 444
KbMode, 493
KbPerf, 523
KbProfile, 546
saveBlob
FwUpgradeDialog, 186
saveGlobalRemap
KbBind, 382
savePath
FwUpgradeDialog, 187
scan
AnimScript, 78
scanKeyboards
KbManager, 479
scanTimer
KbManager, 481
ScimKeys
keymap.cpp, 1291
scimOverlay
keywidget.cpp, 1294
script
KbAnim, 326
scriptName
KbAnim, 326
scripts
AnimAddDialog, 46
AnimScript, 83
scrollBox
Ui::KPerfWidget, 693
Ui_KPerfWidget, 1125
scrollColorOff
Ui::KPerfWidget, 693
Ui_KPerfWidget, 1125
scrollColorOn
Ui::KPerfWidget, 694
Ui_KPerfWidget, 1125
scrollSpeed
Kb, 295
selAllButton
Ui::ModeSelectDialog, 745
Ui_ModeSelectDialog, 1138
selLabel
Ui::KbLightWidget, 457
Ui_KbLightWidget, 1093
selNoneButton
Ui::ModeSelectDialog, 746
Ui_ModeSelectDialog, 1139
selectAll
KeyWidget, 669
selectLabel
Ui::KbBindWidget, 395
Ui_KbBindWidget, 1085
selected
GradientDialogWidget, 236
LayoutDialog, 715
selectedKeys
KbAnimWidget, 359
selectedOffset
GradientDialogWidget, 236
selectedPos
GradientDialogWidget, 236
selectedStop
GradientDialogWidget, 231
selection
KeyWidget, 674
ModeSelectDialog, 749
RebindWidget, 993
selectionChanged
KeyWidget, 670
selectionColors
GradientDialogWidget, 232
selectionStack
Ui::KbAnimWidget, 341
Ui_KbAnimWidget, 1078
serialLabel
Ui::KbWidget, 594
Ui_KbWidget, 1106
set
CkbSettings, 133
setAction
KbBind, 383
setAnimation
KeyWidget, 670
setAnimationToSelection
KeyWidget, 671
setAutoClose
QuaZip, 846
setBind
KbBindWidget, 404
RebindWidget, 984
setBox
RebindWidget, 986
setCaseSensitivity
QuaZipDir, 868

setComment
QuaZip, 847
setCommentCodec
QuaZip, 847
setCorrectRadioButton
RebindWidget, 988
setCurrent
KbAnimWidget, 356
setCurrentColor
GradientDialogWidget, 232
setCurrentFile
QuaZip, 847
setCurrentMode
Kb, 296, 297
setCurrentProfile
Kb, 298
setDataDescriptorWritingEnabled
QuaZip, 849
setDefaultFileNameCodec
QuaZip, 850
setDuration
AnimScript, 78
setFileDateTime
QuaZipNewInfo, 913
setFileNTFSTimes
QuaZipNewInfo, 916
setFileNTFSaTime
QuaZipNewInfo, 913
setFileNTFScTime
QuaZipNewInfo, 914
setFileNTFSmTime
QuaZipNewInfo, 915
setFileName
QuaGzipFile, 812
QuaZipFile, 890
setFileNameCodec
QuaZip, 851
setFilePermissions
QuaZipNewInfo, 916
setFilter
QuaZipDir, 869
setGlobalRemap
KbBind, 384
setIndicator
KbLight, 445
KbPerf, 524
setIoDevice
QuaZip, 851
setLabel
ColorButton, 146, 147
setLight
KbAnimWidget, 357
KbLightWidget, 466
setMonochrome
KbLightWidget, 467
setNTFSTime
quazipnewinfo.cpp, 1366
setNameFilters
QuaZipDir, 869
setNeedsSave
KbMode, 494
KbProfile, 547
setNeedsUpdate
KbBind, 385
KbMode, 495
KbPerf, 524
KbProfile, 547
setPath
QuaZipDir, 869
setPerf
KPerfWidget, 704
MPerfWidget, 782
setPermissions
QuaZipNewInfo, 917
setPreset
GradientDialog, 218
setSelectedKeys
KbAnimWidget, 358
setSelection
KeyWidget, 671
RebindWidget, 989
setSorting
QuaZipDir, 870
setStatus
SettingsWidget, 1008
setStops
GradientDialogWidget, 233
setValue
CkbSettings, 134
setVersion
SettingsWidget, 1009
setZip
QuaZipFile, 890
setZip64Enabled
QuaZip, 852
setZipError
QuaZipFilePrivate, 907
setZipName
QuaZip, 852
QuaZipFile, 891
settingPath
autorun.cpp, 1214
settingTab
Ui::AnimSettingDialog, 95
Ui_AnimSettingDialog, 1043
settingWidgets
AnimSettingDialog, 117
settingsCacheMutex
ckbsettings.cpp, 1236
ckbsettingswriter.cpp, 1239
settingsGrid
Ui::AnimSettingDialog, 95
Ui_AnimSettingDialog, 1042
settingsMutex
ckbsettings.cpp, 1236
ckbsettingswriter.cpp, 1239

settingsUpdated
KbPerf, 525
SettingsWidget, 1000
~SettingsWidget, 1004
extra, 1011
MainWindow, 1011
on_altBox_activated, 1004
on_autoFWBox_clicked, 1005
on_capsBox_activated, 1005
on_ctrlBox_activated, 1005
on_extraButton_clicked, 1006
on_layoutBox_activated, 1006
on_loginItemBox_clicked, 1007
on_pushButton_clicked, 1007
on_shiftBox_activated, 1007
on_winBox_activated, 1008
pollUpdates, 1008
setStatus, 1008
setVersion, 1009
SettingsWidget, 1003
SettingsWidget, 1003
showLayoutDialog, 1009
ui, 1011
updateModifiers, 1010
settingsWidget
MainWindow, 741
settingswidget.cpp
devpath, 1616
modKeys, 1616
modNames, 1617
right, 1616
setupUi
Ui::AnimAddDialog, 49
Ui::AnimSettingDialog, 87
Ui::ExtraSettingsWidget, 161
Ui::FwUpgradeDialog, 190
Ui::GradientDialog, 203
Ui::KbAnimWidget, 335
Ui::KbBindWidget, 391
Ui::KbLightWidget, 452
Ui::KbProfileDialog, 561
Ui::KbWidget, 588
Ui::KPerfWidget, 679
Ui::LayoutDialog, 709
Ui::MainWindow, 725
Ui::ModeSelectDialog, 744
Ui::MPerfWidget, 754
Ui::RebindWidget, 934
Ui::SettingsWidget, 1015
Ui_AnimAddDialog, 1028
Ui_AnimSettingDialog, 1035
Ui_ExtraSettingsWidget, 1048
Ui_FwUpgradeDialog, 1058
Ui_GradientDialog, 1065
Ui_KbAnimWidget, 1072
Ui_KbBindWidget, 1081
Ui_KbLightWidget, 1088
Ui_KbProfileDialog, 1095
Ui_KbWidget, 1100
Ui_KPerfWidget, 1111
Ui_LayoutDialog, 1128
Ui_MainWindow, 1133
Ui_ModeSelectDialog, 1137
Ui_MPerfWidget, 1143
Ui_RebindWidget, 1164
Ui_SettingsWidget, 1192
shareDimming
KbLight, 445, 446
shiftBox
Ui::SettingsWidget, 1022
Ui_SettingsWidget, 1199
shiftLabel
Ui::SettingsWidget, 1023
Ui_SettingsWidget, 1199
showAnimBox
Ui::KbLightWidget, 457
Ui_KbLightWidget, 1093
showFirstTab
KbWidget, 581
showFwUpdate
KbWidget, 581
showFwUpdateNotification
MainWindow, 736
showLastTab
KbWidget, 582
showLayoutDialog
SettingsWidget, 1009
showPreview
AnimAddDialog, 46
showWindow
MainWindow, 737
sidelightToggled
KeyWidget, 672
size
QuaZipFile, 891
sliderXMapper
MPerfWidget, 786
sliderXMoved
MPerfWidget, 783
sliderYMapper
MPerfWidget, 786
sliderYMoved
MPerfWidget, 784
sniperDpi
KbPerf, 525, 526
sniperValue
KeyAction, 628
sorting
QuaZipDir, 870
specialInfo
KeyAction, 624
spinBox
Ui::MPerfWidget, 766
Ui_MPerfWidget, 1155
src/ckb/animadddialog.cpp, 1207
src/ckb/animadddialog.h, 1207

src/ckb/animscript.cpp, 1208
src/ckb/animscript.h, 1210
src/ckb/animsettingdialog.cpp, 1211
src/ckb/animsettingdialog.h, 1213
src/ckb/autorun.cpp, 1213
src/ckb/autorun.h, 1214
src/ckb/ckb-anim.h, 1215
src/ckb/ckbsettings.cpp, 1234
src/ckb/ckbsettings.h, 1236
src/ckb/ckbsettingswriter.cpp, 1237
src/ckb/ckbsettingswriter.h, 1239
src/ckb/colorbutton.cpp, 1239
src/ckb/colorbutton.h, 1240
src/ckb/colormap.cpp, 1241
src/ckb/colormap.h, 1242
src/ckb/extrasettingswidget.cpp, 1243
src/ckb/extrasettingswidget.h, 1244
src/ckb/fwupgradedialog.cpp, 1244
src/ckb/fwupgradedialog.h, 1247
src/ckb/gradientbutton.cpp, 1248
src/ckb/gradientbutton.h, 1249
src/ckb/gradientdialog.cpp, 1250
src/ckb/gradientdialog.h, 1250
src/ckb/gradientdialogwidget.cpp, 1251
src/ckb/gradientdialogwidget.h, 1251
src/ckb/kb.cpp, 1252
src/ckb/kb.h, 1253
src/ckb/kbanim.cpp, 1254
src/ckb/kbanim.h, 1256
src/ckb/kbanimwidget.cpp, 1257
src/ckb/kbanimwidget.h, 1257
src/ckb/kbbind.cpp, 1258
src/ckb/kbbind.h, 1259
src/ckb/kbbindwidget.cpp, 1260
src/ckb/kbbindwidget.h, 1260
src/ckb/kbfirmware.cpp, 1261
src/ckb/kbfirmware.h, 1262
src/ckb/kblight.cpp, 1263
src/ckb/kblight.h, 1266
src/ckb/kblightwidget.cpp, 1267
src/ckb/kblightwidget.h, 1267
src/ckb/kbmanager.cpp, 1268
src/ckb/kbmanager.h, 1269
src/ckb/kbmode.cpp, 1270
src/ckb/kbmode.h, 1270
src/ckb/kbperf.cpp, 1271
src/ckb/kbperf.h, 1271
src/ckb/kbprofile.cpp, 1272
src/ckb/kbprofile.h, 1273
src/ckb/kbprofiledialog.cpp, 1273
src/ckb/kbprofiledialog.h, 1274
src/ckb/kbwidget.cpp, 1275
src/ckb/kbwidget.h, 1275
src/ckb/keyaction.cpp, 1276
src/ckb/keyaction.h, 1277
src/ckb/keymap.cpp, 1278
src/ckb/keymap.h, 1292
src/ckb/keywidget.cpp, 1292
src/ckb/keywidget.h, 1294
src/ckb/kperfwidget.cpp, 1295
src/ckb/kperfwidget.h, 1296
src/ckb/layoutdialog.cpp, 1298
src/ckb/layoutdialog.h, 1298
src/ckb/macroreader.cpp, 1299
src/ckb/macroreader.h, 1299
src/ckb/main.cpp, 1300
src/ckb/mainwindow.cpp, 1307
src/ckb/mainwindow.h, 1307
src/ckb/media.h, 1308
src/ckb/media_linux.cpp, 1310
src/ckb/media_mac.m, 1311
src/ckb/modeselectdialog.cpp, 1313
src/ckb/modeselectdialog.h, 1313
src/ckb/mperfwidget.cpp, 1314
src/ckb/mperfwidget.h, 1317
src/ckb/quazip/JlCompress.cpp, 1329
src/ckb/quazip/JlCompress.h, 1331
src/ckb/quazip/crypt.h, 1319
src/ckb/quazip/ioapi.h, 1322
src/ckb/quazip/qioapi.cpp, 1331
src/ckb/quazip/quaadler32.cpp, 1343
src/ckb/quazip/quaadler32.h, 1344
src/ckb/quazip/quachecksum32.h, 1345
src/ckb/quazip/quacrc32.cpp, 1346
src/ckb/quazip/quacrc32.h, 1347
src/ckb/quazip/quagzipfile.cpp, 1348
src/ckb/quazip/quagzipfile.h, 1349
src/ckb/quazip/quaziodevice.cpp, 1350
src/ckb/quazip/quaziodevice.h, 1351
src/ckb/quazip/quazip.cpp, 1352
src/ckb/quazip/quazip.h, 1354
src/ckb/quazip/quazip_global.h, 1355
src/ckb/quazip/quazipdir.cpp, 1357
src/ckb/quazip/quazipdir.h, 1359
src/ckb/quazip/quazipfile.cpp, 1359
src/ckb/quazip/quazipfile.h, 1360
src/ckb/quazip/quazipfileinfo.cpp, 1361
src/ckb/quazip/quazipfileinfo.h, 1363
src/ckb/quazip/quazipnewinfo.cpp, 1364
src/ckb/quazip/quazipnewinfo.h, 1368
src/ckb/quazip/unzip.c, 1369
src/ckb/quazip/unzip.h, 1420
src/ckb/quazip/zip.c, 1440
src/ckb/quazip/zip.h, 1496
src/ckb/rebindwidget.cpp, 1507
src/ckb/rebindwidget.h, 1507
src/ckb/release/moc_animadddialog.cpp, 1508
src/ckb/release/moc_animscript.cpp, 1511
src/ckb/release/moc_animsettingdialog.cpp, 1514
src/ckb/release/moc_ckbsettingswriter.cpp, 1517
src/ckb/release/moc_colorbutton.cpp, 1519
src/ckb/release/moc_extrasettingswidget.cpp, 1521
src/ckb/release/moc_fwupgradedialog.cpp, 1524
src/ckb/release/moc_gradientbutton.cpp, 1527
src/ckb/release/moc_gradientdialog.cpp, 1530
src/ckb/release/moc_gradientdialogwidget.cpp, 1533

src/ckb/release/moc_kb.cpp, 1535
src/ckb/release/moc_kbanim.cpp, 1538
src/ckb/release/moc_kbanimwidget.cpp, 1540
src/ckb/release/moc_kbbind.cpp, 1543
src/ckb/release/moc_kbbindwidget.cpp, 1545
src/ckb/release/moc_kbfirmware.cpp, 1547
src/ckb/release/moc_kblight.cpp, 1550
src/ckb/release/moc_kblightwidget.cpp, 1553
src/ckb/release/moc_kbmanager.cpp, 1556
src/ckb/release/moc_kbmode.cpp, 1558
src/ckb/release/moc_kbperf.cpp, 1560
src/ckb/release/moc_kbprofile.cpp, 1563
src/ckb/release/moc_kbprofiledialog.cpp, 1565
src/ckb/release/moc_kbwidget.cpp, 1569
src/ckb/release/moc_keyaction.cpp, 1571
src/ckb/release/moc_keywidget.cpp, 1573
src/ckb/release/moc_kperfwidget.cpp, 1575
src/ckb/release/moc_layoutdialog.cpp, 1578
src/ckb/release/moc_macroreader.cpp, 1581
src/ckb/release/moc_mainwindow.cpp, 1585
src/ckb/release/moc_modeselectdialog.cpp, 1587
src/ckb/release/moc_mperfwidget.cpp, 1589
src/ckb/release/moc_quagzipfile.cpp, 1592
src/ckb/release/moc_quaziodevice.cpp, 1594
src/ckb/release/moc_quazipfile.cpp, 1596
src/ckb/release/moc_rebindwidget.cpp, 1598
src/ckb/release/moc_rlistwidget.cpp, 1601
src/ckb/release/moc_settingswidget.cpp, 1603
src/ckb/release/qrc_binary.cpp, 1605
src/ckb/release/qrc_image.cpp, 1608
src/ckb/release/qrc_text.cpp, 1611
src/ckb/rlistwidget.cpp, 1614
src/ckb/rlistwidget.h, 1614
src/ckb/settingswidget.cpp, 1615
src/ckb/settingswidget.h, 1617
src/ckb/ui_animadddialog.h, 1618
src/ckb/ui_animsettingdialog.h, 1619
src/ckb/ui_extrasettingswidget.h, 1619
src/ckb/ui_fwupgradedialog.h, 1620
src/ckb/ui_gradientdialog.h, 1621
src/ckb/ui_kbanimwidget.h, 1622
src/ckb/ui_kbbindwidget.h, 1623
src/ckb/ui_kblightwidget.h, 1624
src/ckb/ui_kbprofiledialog.h, 1625
src/ckb/ui_kbwidget.h, 1626
src/ckb/ui_kperfwidget.h, 1627
src/ckb/ui_layoutdialog.h, 1628
src/ckb/ui_mainwindow.h, 1629
src/ckb/ui_modeselectdialog.h, 1630
src/ckb/ui_mperfwidget.h, 1631
src/ckb/ui_rebindwidget.h, 1632
src/ckb/ui_settingswidget.h, 1633
stages
    MPerfWidget, 787
standardMaps
    keymap.cpp, 1291
startWorkInAThread
    MacroReader, 718
stateChange
    MainWindow, 737
statusLabel
    Ui::FwUpgradeDialog, 194
    Ui_FwUpgradeDialog, 1062
stop
    AnimScript, 79
    KbAnim, 327
    KbManager, 481
stopBox
    Ui::GradientDialog, 207
    Ui_GradientDialog, 1069
stopCheck
    AnimSettingDialog, 117
stopColor
    Ui::GradientDialog, 207
    Ui_GradientDialog, 1069
stopCount
    GradientDialogWidget, 234
stopOpacity
    Ui::GradientDialog, 207
    Ui_GradientDialog, 1069
stopPos
    Ui::GradientDialog, 207
    Ui_GradientDialog, 1069
stopPreview
    KbLight, 446
stopRect
    GradientDialogWidget, 234
stopTime
    KbAnim, 332
stopped
    AnimScript, 83
stops
    GradientDialogWidget, 235
storageName
    Key, 597
strLayout
    KeyMap, 649
strModel
    KeyMap, 649
strcmpcasenosensitive_internal
    unzip.c, 1376
Subtract
    KbAnim, 308

TOGGLE
    KeyWidget, 655
TAB_ANIM
    RebindWidget, 994
TAB_KB
    RebindWidget, 994
TAB_MACRO
    RebindWidget, 994
TAB_MOUSE
    RebindWidget, 994
TAB_PROGRAM
    RebindWidget, 994
TAB_SPECIAL

RebindWidget, 994
TRUE
ckb-anim.h, 1225
TRYFREE
unzip.c, 1375
zip.c, 1448
tabWidget
Ui::AnimSettingDialog, 96
Ui::KbWidget, 594
Ui::MainWindow, 727
Ui::RebindWidget, 957
Ui_AnimSettingDialog, 1043
Ui_KbWidget, 1106
Ui_MainWindow, 1135
Ui_RebindWidget, 1186
tableDownload
KbFirmware, 420
tableName
kbfirmware.cpp, 1262
timeGrid
Ui::AnimSettingDialog, 96
Ui_AnimSettingDialog, 1043
timeTab
Ui::AnimSettingDialog, 96
Ui_AnimSettingDialog, 1043
timerTick
MainWindow, 738
RListWidget, 999
tm_unz_s, 1422
tm_zip_s, 1498
tm_unz
unzip.h, 1430
tm_zip
zip.h, 1502
toQuaZipFileInfo
QuaZipFileInfo64, 902
toStorage
KeyMap, 650
toString
GradientButton, 198
toggleSidelight
KbLightWidget, 468
toggleTrayIcon
MainWindow, 739
trayBox
Ui::ExtraSettingsWidget, 168
Ui_ExtraSettingsWidget, 1055
trayIcon
MainWindow, 741
trayIconMenu
MainWindow, 741
trigger
KbAnim, 328
txtBuffer
Ui::RebindWidget, 957
Ui_RebindWidget, 1186
Type
KeyAction, 602
type
KeyAction, 624
typingBox
Ui::RebindWidget, 957
Ui_RebindWidget, 1187
typingButton
Ui::RebindWidget, 957
Ui_RebindWidget, 1187
typingKeys
RebindWidget, 994

UNBOUND
KeyAction, 602
UNKNOWN
KbFirmware, 411
media.h, 1309
UNMUTED
media.h, 1309
US
KeyMap, 631
US_DVORAK
KeyMap, 631
UNUSED
quazip_global.h, 1357
UNZ_AUTO_CLOSE
unzip.h, 1428
UNZ_BADZIPFILE
unzip.h, 1428
UNZ_BUFSIZE
unzip.c, 1375
UNZ_CRCERROR
unzip.h, 1428
UNZ_DEFAULT_FLAGS
unzip.h, 1428
UNZ_EOF
unzip.h, 1429
UNZ_ERRNO
unzip.h, 1429
UNZ_INTERNALERROR
unzip.h, 1429
UNZ_MAXFILENAMEINZIP
unzip.c, 1375
UNZ_OK
unzip.h, 1429
UNZ_OPENERROR
quazip.h, 1355
UNZ_PARAMERROR
unzip.h, 1429
Ui, 39
ui
AnimAddDialog, 47
AnimSettingDialog, 117
ExtraSettingsWidget, 178
FwUpgradeDialog, 188
GradientDialog, 221
KbAnimWidget, 359
KbBindWidget, 408
KbLightWidget, 470
KbProfileDialog, 558

KbWidget, 585
KPerfWidget, 707
LayoutDialog, 715
MainWindow, 741
ModeSelectDialog, 749
MPerfWidget, 787
RebindWidget, 994
SettingsWidget, 1011
Ui::AnimAddDialog, 47
animBox, 50
buttonBox, 51
gridLayout, 51
horizontalLayout, 51
horizontalSpacer, 51
horizontalSpacer_2, 51
label, 51
label_2, 51
presetBox, 51
previewBox, 51
retranslateUi, 48
setupUi, 49
verticalSpacer_2, 52
verticalSpacer_3, 52
Ui::AnimSettingDialog, 84
animName, 91
buttonBox, 91
delayBox, 91
gridLayout, 91
gridLayout_2, 92
horizontalSpacer, 92
horizontalSpacer_2, 92
horizontalSpacer_3, 92
horizontalSpacer_4, 92
horizontalSpacer_5, 92
horizontalSpacer_6, 92
infoTab, 92
kpDelayBox, 92
kpModeStopBox, 93
kpReleaseBox, 93
kpRepeatBox, 93
kpRepeatLabel, 93
kpRepeatLabel_2, 93
label, 93
label_10, 93
label_11, 93
label_12, 93
label_13, 94
label_2, 94
label_3, 94
label_4, 94
label_5, 94
label_6, 94
label_7, 94
label_8, 94
label_9, 94
line, 95
line_2, 95
repeatBox, 95
repeatLabel, 95
repeatLabel_2, 95
retranslateUi, 86
sAuthorLabel, 95
sDescLabel, 95
sLicenseLabel, 96
sNameLabel, 96
sVerLabel, 96
sYearLabel, 96
settingTab, 95
settingsGrid, 95
setupUi, 87
tabWidget, 96
timeGrid, 96
timeTab, 96
verticalSpacer, 96
verticalSpacer_2, 96
verticalSpacer_3, 97
Ui::ExtraSettingsWidget, 157
animCountLabel, 165
animPathLabel, 165
animScanButton, 165
brightnessBox, 165
buttonBox, 165
delayBox, 165
ditherBox, 165
fpsBox, 165
fpsWarnLabel, 165
gridLayout, 166
horizontalLayout, 166
horizontalLayout_2, 166
horizontalSpacer, 166
horizontalSpacer_2, 166
horizontalSpacer_3, 166
label, 166
label_10, 166
label_11, 166
label_2, 167
label_3, 167
label_5, 167
label_6, 167
line, 167
line_2, 167
line_3, 167
mAccelBox, 167
osxLabel, 167
osxLine, 168
retranslateUi, 160
sAccelBox, 168
sSpeedBox, 168
sSpeedWidget, 168
setupUi, 161
trayBox, 168
verticalSpacer, 168
verticalSpacer_10, 168
verticalSpacer_11, 168
verticalSpacer_2, 169
verticalSpacer_3, 169

verticalSpacer_4, 169
verticalSpacer_5, 169
verticalSpacer_6, 169
verticalSpacer_7, 169
verticalSpacer_8, 169
verticalSpacer_9, 169
Ui::FwUpgradeDialog, 188
actionButton, 192
cancelButton, 192
curLabel, 192
devLabel, 192
gridLayout, 193
gridLayout_2, 193
horizontalSpacer, 193
horizontalSpacer_2, 193
horizontalSpacer_3, 193
horizontalSpacer_4, 193
label_2, 193
label_4, 193
newLabel, 193
progressBar, 194
retranslateUi, 190
setupUi, 190
statusLabel, 194
Ui::GradientDialog, 200
buttonBox, 205
gridLayout, 205
gridLayout_2, 205
gridLayout_3, 205
groupBox_2, 206
horizontalLayout, 206
horizontalLayout_2, 206
horizontalSpacer, 206
horizontalSpacer_2, 206
horizontalSpacer_3, 206
label, 206
label_2, 206
presetDelete, 206
presetList, 207
presetName, 207
presetSave, 207
retranslateUi, 202
setupUi, 203
stopBox, 207
stopColor, 207
stopOpacity, 207
stopPos, 207
verticalSpacer, 207
verticalSpacer_2, 208
widget, 208
Ui::KPerfWidget, 674
capsBox, 686
capsColorOff, 686
capsColorOn, 686
copyButton, 686
gridLayout, 686
horizontalLayout, 686
horizontalLayout_2, 686
horizontalSpacer, 686
horizontalSpacer_2, 687
horizontalSpacer_3, 687
horizontalSpacer_4, 687
horizontalSpacer_5, 687
horizontalSpacer_6, 687
horizontalSpacer_7, 687
horizontalSpacer_8, 687
intensityBox, 687
k95Label1, 687
k95Label2, 688
k95Label3, 688
k95Label4, 688
k95Label5, 688
k95Label6, 688
k95Line, 688
k95Spacer, 688
label, 688
label_10, 688
label_11, 689
label_12, 689
label_14, 689
label_15, 689
label_16, 689
label_17, 689
label_18, 689
label_19, 689
label_2, 689
label_20, 690
label_21, 690
label_22, 690
label_23, 690
label_24, 690
label_3, 690
label_4, 690
label_5, 690
label_6, 690
label_7, 691
label_8, 691
lightBox, 691
lightColor1, 691
lightColor2, 691
lightColor3, 691
line, 691
line_2, 691
line_3, 691
lockBox, 692
lockColorOff, 692
lockColorOn, 692
macroBox, 692
macroColorOff, 692
macroColorOn, 692
modeBox, 692
modeColorOff, 692
modeColorOn, 692
muteBox, 693
muteColorNA, 693
muteColorOff, 693

muteColorOn, 693
numBox, 693
numColorOff, 693
numColorOn, 693
retranslateUi, 678
scrollBox, 693
scrollColorOff, 693
scrollColorOn, 694
setupUi, 679
verticalSpacer, 694
verticalSpacer_2, 694
verticalSpacer_3, 694
verticalSpacer_4, 694
Ui::KbAnimWidget, 332
aCopyLabel, 338
aMissingLabel, 338
aMissingPage, 338
aNameLabel, 338
aVerLabel, 339
animList, 338
animPage, 338
blendBox, 339
deleteButton, 339
gridLayout, 339
gridLayout_2, 339
gridLayout_3, 339
gridLayout_4, 339
horizontalLayout, 339
horizontalSpacer, 339
horizontalSpacer_2, 340
horizontalSpacer_3, 340
horizontalSpacer_4, 340
horizontalSpacer_5, 340
keyButton, 340
label_5, 340
label_6, 340
label_7, 340
nameBox, 340
noAnimLabel, 341
noSelPage, 341
opacityBox, 341
propertyButton, 341
retranslateUi, 334
selectionStack, 341
setupUi, 335
verticalLayout, 341
verticalSpacer, 341
verticalSpacer_2, 341
verticalSpacer_3, 341
Ui::KbBindWidget, 389
copyButton, 394
gridLayout, 394
gridLayout_2, 394
horizontalLayout_2, 394
horizontalSpacer, 394
horizontalSpacer_2, 394
keyWidget, 395
label, 395
label_2, 395
line, 395
line_2, 395
rbWidget, 395
resetButton, 395
retranslateUi, 391
selectLabel, 395
setupUi, 391
verticalLayout, 395
verticalSpacer, 396
widget, 396
Ui::KbLightWidget, 449
animButton, 455
animWidget, 455
bgButton, 455
brightnessBox, 455
gridLayout, 455
gridLayout_2, 455
gridLayout_4, 455
horizontalLayout, 456
horizontalLayout_2, 456
horizontalLayout_3, 456
horizontalSpacer_3, 456
horizontalSpacer_4, 456
horizontalSpacer_5, 456
horizontalSpacer_6, 456
keyWidget, 456
label, 456
label_2, 457
label_3, 457
line, 457
line_2, 457
retranslateUi, 451
selLabel, 457
setupUi, 452
showAnimBox, 457
verticalLayout, 457
verticalSpacer_2, 457
verticalSpacer_3, 457
widget, 458
Ui::KbProfileDialog, 558
buttonBox, 562
gridLayout, 562
horizontalSpacer, 562
horizontalSpacer_2, 562
profileList, 562
retranslateUi, 560
setupUi, 561
Ui::KbWidget, 585
bindTab, 591
bindWidget, 591
devTab, 591
fwLabel, 591
fwUpdButton, 591
fwUpdLabel, 592
fwUpdLayout, 592
gridLayout, 592
gridLayout_2, 592

gridLayout_3, 592
gridLayout_4, 592
gridLayout_5, 592
gridLayout_7, 592
horizontalSpacer_2, 592
horizontalSpacer_3, 593
hwSaveButton, 593
kPerfTab, 593
kPerfWidget, 593
label_3, 593
label_4, 593
label_9, 593
lightTab, 593
lightWidget, 593
mPerfTab, 594
mPerfWidget, 594
modesList, 594
pollLabel, 594
pollLabel2, 594
profileBox, 594
retranslateUi, 587
serialLabel, 594
setupUi, 588
tabWidget, 594
verticalSpacer, 594
Ui::LayoutDialog, 707
buttonBox, 711
comboBox, 711
gridLayout, 711
horizontalSpacer, 711
horizontalSpacer_2, 711
label, 711
label_2, 712
retranslateUi, 709
setupUi, 709
verticalSpacer, 712
verticalSpacer_2, 712
verticalSpacer_3, 712
verticalSpacer_4, 712
Ui::MPerfWidget, 750
aSnapBox, 761
copyButton, 761
eBox1, 761
eBox2, 761
eBox3, 762
eBox4, 762
eBox5, 762
gridLayout, 762
horizontalLayout, 762
horizontalLayout_2, 762
horizontalLayout_4, 762
horizontalSpacer, 762
horizontalSpacer_2, 762
horizontalSpacer_3, 763
horizontalSpacer_4, 763
horizontalSpacer_5, 763
horizontalSpacer_6, 763
horizontalSpacer_7, 763
iButton0, 763
iButton1, 763
iButton2, 763
iButton3, 763
iButton4, 764
iButton5, 764
iButtonO, 764
indicBox, 764
lHeightBox, 766
label, 764
label_11, 764
label_12, 764
label_13, 764
label_14, 764
label_15, 765
label_2, 765
label_25, 765
label_3, 765
label_4, 765
label_5, 765
label_6, 765
label_7, 765
label_8, 765
line, 766
line_2, 766
line_3, 766
retranslateUi, 753
setupUi, 754
spinBox, 766
verticalLayout, 766
verticalSpacer, 766
verticalSpacer_2, 766
verticalSpacer_3, 766
xBox0, 767
xBox1, 767
xBox2, 767
xBox3, 767
xBox4, 767
xBox5, 767
xSlider0, 767
xSlider1, 767
xSlider2, 767
xSlider3, 768
xSlider4, 768
xSlider5, 768
xyBox, 768
yBox0, 768
yBox1, 768
yBox2, 768
yBox3, 768
yBox4, 768
yBox5, 769
ySlider0, 769
ySlider1, 769
ySlider2, 769
ySlider3, 769
ySlider4, 769
ySlider5, 769

Ui::MainWindow, 723
actionAbout, 726
actionExit, 726
centralWidget, 726
gridLayout, 727
retranslateUi, 725
setupUi, 725
tabWidget, 727
Ui::ModeSelectDialog, 742
buttonBox, 745
gridLayout, 745
label, 745
modeList, 745
retranslateUi, 743
selAllButton, 745
selNoneButton, 746
setupUi, 744
Ui::RebindWidget, 928
actionTab, 944
animBox, 944
animButton, 944
animKrBox, 944
animOnceBox, 945
animTab, 945
applyButton, 945
btnClearMacro, 945
btnStartMacro, 945
btnStopMacro, 945
cancelButton, 945
delayButtons, 945
dpiBox, 946
dpiButton, 946
dpiCustLabel, 946
dpiCustXBox, 946
dpiCustYBox, 946
dpiWarning, 946
fnBox, 946
fnButton, 946
gridLayout, 947
gridLayout_10, 947
gridLayout_2, 947
gridLayout_3, 947
gridLayout_4, 947
gridLayout_5, 947
gridLayout_8, 947
groupBox_2, 947
groupBox_3, 947
groupBox_4, 947
horizontalLayout, 948
horizontalLayout_2, 948
horizontalLayout_3, 948
horizontalSpacer, 948
horizontalSpacer_10, 948
horizontalSpacer_11, 948
horizontalSpacer_12, 948
horizontalSpacer_13, 948
horizontalSpacer_14, 948
horizontalSpacer_15, 949
horizontalSpacer_16, 949
horizontalSpacer_17, 949
horizontalSpacer_18, 949
horizontalSpacer_19, 949
horizontalSpacer_2, 949
horizontalSpacer_20, 949
horizontalSpacer_21, 949
horizontalSpacer_22, 949
horizontalSpacer_23, 950
horizontalSpacer_24, 950
horizontalSpacer_25, 950
horizontalSpacer_26, 950
horizontalSpacer_3, 950
horizontalSpacer_4, 950
horizontalSpacer_5, 950
horizontalSpacer_6, 950
horizontalSpacer_7, 950
horizontalSpacer_8, 951
horizontalSpacer_9, 951
keyTab, 951
label, 951
layoutWidget, 951
layoutWidget1, 951
layoutWidget2, 951
layoutWidget_2, 951
lbl_macro, 951
lightBox, 952
lightButton, 952
lightWrapBox, 952
lockBox, 952
lockButton, 952
macroTab, 952
mb2Box, 952
mb2Button, 952
mbBox, 953
mbButton, 953
mediaBox, 953
mediaButton, 953
modBox, 953
modButton, 953
modeBox, 953
modeButton, 954
modeWrapBox, 954
mouseTab, 954
numBox, 954
numButton, 954
progTipLabel, 956
programKpBox, 954
programKpButton, 954
programKpExtra, 954
programKpModeBox, 955
programKpSIBox, 955
programKrBox, 955
programKrButton, 955
programKrExtra, 955
programKrModeBox, 955
programKrSIBox, 955
programTab, 955

pteMacroBox, 956
pteMacroComment, 956
pteMacroText, 956
rb_delay_asTyped, 956
rb_delay_default, 956
rb_delay_no, 956
resetButton, 957
retranslateUi, 931
setupUi, 934
tabWidget, 957
txtBuffer, 957
typingBox, 957
typingButton, 957
unbindButton, 957
verticalLayout, 957
verticalLayout_2, 957
verticalSpacer, 957
verticalSpacer_10, 958
verticalSpacer_11, 958
verticalSpacer_2, 958
verticalSpacer_3, 958
verticalSpacer_4, 958
verticalSpacer_5, 958
verticalSpacer_6, 958
verticalSpacer_7, 958
verticalSpacer_8, 958
wheelBox, 959
wheelButton, 959
Ui::SettingsWidget, 1012
altBox, 1019
altLabel, 1019
autoFWBox, 1019
capsBox, 1019
capsLabel, 1019
ctrlBox, 1020
ctrlLabel, 1020
devicesLabel, 1020
extraButton, 1020
gridLayout, 1020
gridLayout_3, 1020
gridLayout_5, 1020
horizontalLayout, 1020
horizontalLayout_2, 1020
horizontalSpacer, 1021
horizontalSpacer_10, 1021
horizontalSpacer_2, 1021
horizontalSpacer_7, 1021
horizontalSpacer_9, 1021
label, 1021
label_2, 1021
label_3, 1021
label_5, 1021
label_6, 1022
label_8, 1022
layoutBox, 1022
line, 1022
line_2, 1022
line_3, 1022
loginItemBox, 1022
pushButton, 1022
retranslateUi, 1014
setupUi, 1015
shiftBox, 1022
shiftLabel, 1023
versionLabel, 1023
verticalSpacer, 1023
verticalSpacer_10, 1023
verticalSpacer_2, 1023
verticalSpacer_3, 1023
verticalSpacer_4, 1023
verticalSpacer_5, 1023
verticalSpacer_6, 1023
verticalSpacer_7, 1024
verticalSpacer_8, 1024
winBox, 1024
winLabel, 1024
Ui_AnimAddDialog, 1027
animBox, 1030
buttonBox, 1030
gridLayout, 1030
horizontalLayout, 1030
horizontalSpacer, 1030
horizontalSpacer_2, 1030
label, 1031
label_2, 1031
presetBox, 1031
previewBox, 1031
retranslateUi, 1028
setupUi, 1028
verticalSpacer_2, 1031
verticalSpacer_3, 1031
Ui_AnimSettingDialog, 1031
animName, 1038
buttonBox, 1038
delayBox, 1039
gridLayout, 1039
gridLayout_2, 1039
horizontalSpacer, 1039
horizontalSpacer_2, 1039
horizontalSpacer_3, 1039
horizontalSpacer_4, 1039
horizontalSpacer_5, 1039
horizontalSpacer_6, 1039
infoTab, 1039
kpDelayBox, 1040
kpModeStopBox, 1040
kpReleaseBox, 1040
kpRepeatBox, 1040
kpRepeatLabel, 1040
kpRepeatLabel_2, 1040
label, 1040
label_10, 1040
label_11, 1040
label_12, 1041
label_13, 1041
label_2, 1041

label_3, 1041
label_4, 1041
label_5, 1041
label_6, 1041
label_7, 1041
label_8, 1041
label_9, 1042
line, 1042
line_2, 1042
repeatBox, 1042
repeatLabel, 1042
repeatLabel_2, 1042
retranslateUi, 1034
sAuthorLabel, 1042
sDescLabel, 1042
sLicenseLabel, 1043
sNameLabel, 1043
sVerLabel, 1043
sYearLabel, 1043
settingTab, 1043
settingsGrid, 1042
setupUi, 1035
tabWidget, 1043
timeGrid, 1043
timeTab, 1043
verticalSpacer, 1043
verticalSpacer_2, 1044
verticalSpacer_3, 1044
Ui_ExtraSettingsWidget, 1044
animCountLabel, 1051
animPathLabel, 1051
animScanButton, 1052
brightnessBox, 1052
buttonBox, 1052
delayBox, 1052
ditherBox, 1052
fpsBox, 1052
fpsWarnLabel, 1052
gridLayout, 1052
horizontalLayout, 1052
horizontalLayout_2, 1053
horizontalSpacer, 1053
horizontalSpacer_2, 1053
horizontalSpacer_3, 1053
label, 1053
label_10, 1053
label_11, 1053
label_2, 1053
label_3, 1053
label_5, 1054
label_6, 1054
line, 1054
line_2, 1054
line_3, 1054
mAccelBox, 1054
osxLabel, 1054
osxLine, 1054
retranslateUi, 1047
sAccelBox, 1054
sSpeedBox, 1055
sSpeedWidget, 1055
setupUi, 1048
trayBox, 1055
verticalSpacer, 1055
verticalSpacer_10, 1055
verticalSpacer_11, 1055
verticalSpacer_2, 1055
verticalSpacer_3, 1055
verticalSpacer_4, 1055
verticalSpacer_5, 1056
verticalSpacer_6, 1056
verticalSpacer_7, 1056
verticalSpacer_8, 1056
verticalSpacer_9, 1056
Ui_FwUpgradeDialog, 1056
actionButton, 1060
cancelButton, 1061
curLabel, 1061
devLabel, 1061
gridLayout, 1061
gridLayout_2, 1061
horizontalSpacer, 1061
horizontalSpacer_2, 1061
horizontalSpacer_3, 1061
horizontalSpacer_4, 1061
label_2, 1062
label_4, 1062
newLabel, 1062
progressBar, 1062
retranslateUi, 1058
setupUi, 1058
statusLabel, 1062
Ui_GradientDialog, 1062
buttonBox, 1067
gridLayout, 1067
gridLayout_2, 1067
gridLayout_3, 1067
groupBox_2, 1068
horizontalLayout, 1068
horizontalLayout_2, 1068
horizontalSpacer, 1068
horizontalSpacer_2, 1068
horizontalSpacer_3, 1068
label, 1068
label_2, 1068
presetDelete, 1068
presetList, 1068
presetName, 1069
presetSave, 1069
retranslateUi, 1064
setupUi, 1065
stopBox, 1069
stopColor, 1069
stopOpacity, 1069
stopPos, 1069
verticalSpacer, 1069

verticalSpacer_2, 1069
widget, 1069
Ui_KPerfWidget, 1107
capsBox, 1117
capsColorOff, 1117
capsColorOn, 1118
copyButton, 1118
gridLayout, 1118
horizontalLayout, 1118
horizontalLayout_2, 1118
horizontalSpacer, 1118
horizontalSpacer_2, 1118
horizontalSpacer_3, 1118
horizontalSpacer_4, 1118
horizontalSpacer_5, 1119
horizontalSpacer_6, 1119
horizontalSpacer_7, 1119
horizontalSpacer_8, 1119
intensityBox, 1119
k95Label1, 1119
k95Label2, 1119
k95Label3, 1119
k95Label4, 1119
k95Label5, 1120
k95Label6, 1120
k95Line, 1120
k95Spacer, 1120
label, 1120
label_10, 1120
label_11, 1120
label_12, 1120
label_14, 1120
label_15, 1121
label_16, 1121
label_17, 1121
label_18, 1121
label_19, 1121
label_2, 1121
label_20, 1121
label_21, 1121
label_22, 1121
label_23, 1122
label_24, 1122
label_3, 1122
label_4, 1122
label_5, 1122
label_6, 1122
label_7, 1122
label_8, 1122
lightBox, 1122
lightColor1, 1123
lightColor2, 1123
lightColor3, 1123
line, 1123
line_2, 1123
line_3, 1123
lockBox, 1123
lockColorOff, 1123
lockColorOn, 1123
macroBox, 1124
macroColorOff, 1124
macroColorOn, 1124
modeBox, 1124
modeColorOff, 1124
modeColorOn, 1124
muteBox, 1124
muteColorNA, 1124
muteColorOff, 1124
muteColorOn, 1125
numBox, 1125
numColorOff, 1125
numColorOn, 1125
retranslateUi, 1110
scrollBox, 1125
scrollColorOff, 1125
scrollColorOn, 1125
setupUi, 1111
verticalSpacer, 1125
verticalSpacer_2, 1125
verticalSpacer_3, 1126
verticalSpacer_4, 1126
Ui_KbAnimWidget, 1070
aCopyLabel, 1075
aMissingLabel, 1075
aMissingPage, 1075
aNameLabel, 1075
aVerLabel, 1076
animList, 1075
animPage, 1076
blendBox, 1076
deleteButton, 1076
gridLayout, 1076
gridLayout_2, 1076
gridLayout_3, 1076
gridLayout_4, 1076
horizontalLayout, 1076
horizontalSpacer, 1077
horizontalSpacer_2, 1077
horizontalSpacer_3, 1077
horizontalSpacer_4, 1077
horizontalSpacer_5, 1077
keyButton, 1077
label_5, 1077
label_6, 1077
label_7, 1077
nameBox, 1078
noAnimLabel, 1078
noSelPage, 1078
opacityBox, 1078
propertyButton, 1078
retranslateUi, 1072
selectionStack, 1078
setupUi, 1072
verticalLayout, 1078
verticalSpacer, 1078
verticalSpacer_2, 1078

verticalSpacer_3, 1079
Ui_KbBindWidget, 1079
copyButton, 1083
gridLayout, 1083
gridLayout_2, 1083
horizontalLayout_2, 1084
horizontalSpacer, 1084
horizontalSpacer_2, 1084
keyWidget, 1084
label, 1084
label_2, 1084
line, 1084
line_2, 1084
rbWidget, 1084
resetButton, 1085
retranslateUi, 1081
selectLabel, 1085
setupUi, 1081
verticalLayout, 1085
verticalSpacer, 1085
widget, 1085
Ui_KbLightWidget, 1085
animButton, 1090
animWidget, 1091
bgButton, 1091
brightnessBox, 1091
gridLayout, 1091
gridLayout_2, 1091
gridLayout_4, 1091
horizontalLayout, 1091
horizontalLayout_2, 1091
horizontalLayout_3, 1091
horizontalSpacer_3, 1091
horizontalSpacer_4, 1092
horizontalSpacer_5, 1092
horizontalSpacer_6, 1092
keyWidget, 1092
label, 1092
label_2, 1092
label_3, 1092
line, 1092
line_2, 1092
retranslateUi, 1087
selLabel, 1093
setupUi, 1088
showAnimBox, 1093
verticalLayout, 1093
verticalSpacer_2, 1093
verticalSpacer_3, 1093
widget, 1093
Ui_KbProfileDialog, 1093
buttonBox, 1096
gridLayout, 1096
horizontalSpacer, 1097
horizontalSpacer_2, 1097
profileList, 1097
retranslateUi, 1095
setupUi, 1095
Ui_KbWidget, 1097
bindTab, 1103
bindWidget, 1103
devTab, 1103
fwLabel, 1103
fwUpdButton, 1103
fwUpdLabel, 1103
fwUpdLayout, 1104
gridLayout, 1104
gridLayout_2, 1104
gridLayout_3, 1104
gridLayout_4, 1104
gridLayout_5, 1104
gridLayout_7, 1104
horizontalSpacer_2, 1104
horizontalSpacer_3, 1104
hwSaveButton, 1105
kPerfTab, 1105
kPerfWidget, 1105
label_3, 1105
label_4, 1105
label_9, 1105
lightTab, 1105
lightWidget, 1105
mPerfTab, 1106
mPerfWidget, 1106
modesList, 1105
pollLabel, 1106
pollLabel2, 1106
profileBox, 1106
retranslateUi, 1099
serialLabel, 1106
setupUi, 1100
tabWidget, 1106
verticalSpacer, 1106
Ui_LayoutDialog, 1126
buttonBox, 1130
comboBox, 1130
gridLayout, 1130
horizontalSpacer, 1130
horizontalSpacer_2, 1130
label, 1130
label_2, 1131
retranslateUi, 1128
setupUi, 1128
verticalSpacer, 1131
verticalSpacer_2, 1131
verticalSpacer_3, 1131
verticalSpacer_4, 1131
Ui_MPerfWidget, 1139
aSnapBox, 1150
copyButton, 1150
eBox1, 1150
eBox2, 1150
eBox3, 1150
eBox4, 1150
eBox5, 1151
gridLayout, 1151

horizontalLayout, 1151
horizontalLayout_2, 1151
horizontalLayout_4, 1151
horizontalSpacer, 1151
horizontalSpacer_2, 1151
horizontalSpacer_3, 1151
horizontalSpacer_4, 1151
horizontalSpacer_5, 1152
horizontalSpacer_6, 1152
horizontalSpacer_7, 1152
iButton0, 1152
iButton1, 1152
iButton2, 1152
iButton3, 1152
iButton4, 1152
iButton5, 1152
iButtonO, 1153
indicBox, 1153
lHeightBox, 1154
label, 1153
label_11, 1153
label_12, 1153
label_13, 1153
label_14, 1153
label_15, 1153
label_2, 1153
label_25, 1154
label_3, 1154
label_4, 1154
label_5, 1154
label_6, 1154
label_7, 1154
label_8, 1154
line, 1154
line_2, 1155
line_3, 1155
retranslateUi, 1142
setupUi, 1143
spinBox, 1155
verticalLayout, 1155
verticalSpacer, 1155
verticalSpacer_2, 1155
verticalSpacer_3, 1155
xBox0, 1155
xBox1, 1155
xBox2, 1156
xBox3, 1156
xBox4, 1156
xBox5, 1156
xSlider0, 1156
xSlider1, 1156
xSlider2, 1156
xSlider3, 1156
xSlider4, 1156
xSlider5, 1157
xyBox, 1157
yBox0, 1157
yBox1, 1157
yBox2, 1157
yBox3, 1157
yBox4, 1157
yBox5, 1157
ySlider0, 1157
ySlider1, 1158
ySlider2, 1158
ySlider3, 1158
ySlider4, 1158
ySlider5, 1158
Ui_MainWindow, 1131
actionAbout, 1134
actionExit, 1134
centralWidget, 1134
gridLayout, 1134
retranslateUi, 1133
setupUi, 1133
tabWidget, 1135
Ui_ModeSelectDialog, 1135
buttonBox, 1138
gridLayout, 1138
label, 1138
modeList, 1138
retranslateUi, 1136
selAllButton, 1138
selNoneButton, 1139
setupUi, 1137
Ui_RebindWidget, 1158
actionTab, 1174
animBox, 1174
animButton, 1174
animKrBox, 1174
animOnceBox, 1175
animTab, 1175
applyButton, 1175
btnClearMacro, 1175
btnStartMacro, 1175
btnStopMacro, 1175
cancelButton, 1175
delayButtons, 1175
dpiBox, 1175
dpiButton, 1176
dpiCustLabel, 1176
dpiCustXBox, 1176
dpiCustYBox, 1176
dpiWarning, 1176
fnBox, 1176
fnButton, 1176
gridLayout, 1176
gridLayout_10, 1177
gridLayout_2, 1177
gridLayout_3, 1177
gridLayout_4, 1177
gridLayout_5, 1177
gridLayout_8, 1177
groupBox_2, 1177
groupBox_3, 1177
groupBox_4, 1177

horizontalLayout, 1178
horizontalLayout_2, 1178
horizontalLayout_3, 1178
horizontalSpacer, 1178
horizontalSpacer_10, 1178
horizontalSpacer_11, 1178
horizontalSpacer_12, 1178
horizontalSpacer_13, 1178
horizontalSpacer_14, 1178
horizontalSpacer_15, 1179
horizontalSpacer_16, 1179
horizontalSpacer_17, 1179
horizontalSpacer_18, 1179
horizontalSpacer_19, 1179
horizontalSpacer_2, 1179
horizontalSpacer_20, 1179
horizontalSpacer_21, 1179
horizontalSpacer_22, 1179
horizontalSpacer_23, 1180
horizontalSpacer_24, 1180
horizontalSpacer_25, 1180
horizontalSpacer_26, 1180
horizontalSpacer_3, 1180
horizontalSpacer_4, 1180
horizontalSpacer_5, 1180
horizontalSpacer_6, 1180
horizontalSpacer_7, 1180
horizontalSpacer_8, 1181
horizontalSpacer_9, 1181
keyTab, 1181
label, 1181
layoutWidget, 1181
layoutWidget1, 1181
layoutWidget2, 1181
layoutWidget_2, 1181
lbl_macro, 1181
lightBox, 1182
lightButton, 1182
lightWrapBox, 1182
lockBox, 1182
lockButton, 1182
macroTab, 1182
mb2Box, 1182
mb2Button, 1182
mbBox, 1183
mbButton, 1183
mediaBox, 1183
mediaButton, 1183
modBox, 1183
modButton, 1183
modeBox, 1183
modeButton, 1183
modeWrapBox, 1184
mouseTab, 1184
numBox, 1184
numButton, 1184
progTipLabel, 1185
programKpBox, 1184
programKpButton, 1184
programKpExtra, 1184
programKpModeBox, 1184
programKpSIBox, 1185
programKrBox, 1185
programKrButton, 1185
programKrExtra, 1185
programKrModeBox, 1185
programKrSIBox, 1185
programTab, 1185
pteMacroBox, 1185
pteMacroComment, 1186
pteMacroText, 1186
rb_delay_asTyped, 1186
rb_delay_default, 1186
rb_delay_no, 1186
resetButton, 1186
retranslateUi, 1162
setupUi, 1164
tabWidget, 1186
txtBuffer, 1186
typingBox, 1187
typingButton, 1187
unbindButton, 1187
verticalLayout, 1187
verticalLayout_2, 1187
verticalSpacer, 1187
verticalSpacer_10, 1187
verticalSpacer_11, 1187
verticalSpacer_2, 1187
verticalSpacer_3, 1188
verticalSpacer_4, 1188
verticalSpacer_5, 1188
verticalSpacer_6, 1188
verticalSpacer_7, 1188
verticalSpacer_8, 1188
wheelBox, 1188
wheelButton, 1188
Ui_SettingsWidget, 1189
altBox, 1196
altLabel, 1196
autoFWBox, 1196
capsBox, 1196
capsLabel, 1196
ctrlBox, 1196
ctrlLabel, 1196
devicesLabel, 1196
extraButton, 1197
gridLayout, 1197
gridLayout_3, 1197
gridLayout_5, 1197
horizontalLayout, 1197
horizontalLayout_2, 1197
horizontalSpacer, 1197
horizontalSpacer_10, 1197
horizontalSpacer_2, 1197
horizontalSpacer_7, 1198
horizontalSpacer_9, 1198

label, 1198
label_2, 1198
label_3, 1198
label_5, 1198
label_6, 1198
label_8, 1198
layoutBox, 1198
line, 1199
line_2, 1199
line_3, 1199
loginItemBox, 1199
pushButton, 1199
retranslateUi, 1191
setupUi, 1192
shiftBox, 1199
shiftLabel, 1199
versionLabel, 1199
verticalSpacer, 1199
verticalSpacer_10, 1200
verticalSpacer_2, 1200
verticalSpacer_3, 1200
verticalSpacer_4, 1200
verticalSpacer_5, 1200
verticalSpacer_6, 1200
verticalSpacer_7, 1200
verticalSpacer_8, 1200
winBox, 1200
winLabel, 1201
uiUpdated
KPerfWidget, 705
unbindButton
Ui::RebindWidget, 957
Ui_RebindWidget, 1187
uncompressedSize
QuaZipFileInfo, 897
QuaZipFileInfo64, 904
QuaZipFilePrivate, 909
QuaZipNewInfo, 918
unz64_file_pos_s, 1427
unz64_s, 1373
unz64_file_pos
unzip.h, 1430
unz64local_CheckCurrentFileCoherencyHeader
unzip.c, 1376
unz64local_DosDateToTmuDate
unzip.c, 1378
unz64local_GetCurrentFileInfoInternal
unzip.c, 1379
unz64local_SearchCentralDir
unzip.c, 1386
unz64local_SearchCentralDir64
unzip.c, 1387
unz64local_getByte
unzip.c, 1379
unz64local_getLong
unzip.c, 1383
unz64local_getLong64
unzip.c, 1384
unz64local_getShort
unzip.c, 1385
unz_file_info64_internal_s, 1372
unz_file_info64_s, 1424
unz_file_info_s, 1425
unz_file_pos_s, 1427
unz_global_info64_s, 1422
unz_global_info_s, 1423
unz_copyright
unzip.c, 1419
unz_file_info
unzip.h, 1430
unz_file_info64
unzip.h, 1430
unz_file_info64_internal
unzip.c, 1376
unz_file_pos
unzip.h, 1430
unz_global_info
unzip.h, 1430
unz_global_info64
unzip.h, 1430
unzClearFlags
unzip.c, 1389
unzip.h, 1431
unzClose
unzip.c, 1390
unzCloseCurrentFile
unzip.c, 1391
unzFile
unzip.h, 1430
unzGetCurrentFileInfo
unzip.c, 1392
unzGetCurrentFileInfo64
unzip.c, 1393
unzGetCurrentFileZStreamPos64
unzip.c, 1394
unzGetFilePos
unzip.c, 1394
unzip.h, 1431
unzGetFilePos64
unzip.c, 1395
unzip.h, 1432
unzGetGlobalComment
unzip.c, 1395
unzGetGlobalInfo
unzip.c, 1396
unzGetGlobalInfo64
unzip.c, 1396
unzGetLocalExtrafield
unzip.c, 1397
unzGetOffset
unzip.c, 1397
unzip.h, 1432
unzGetOffset64
unzip.c, 1398
unzip.h, 1433
unzGoToFilePos

unzip.c, 1398
unzip.h, 1433
unzGoToFilePos64
unzip.c, 1399
unzip.h, 1434
unzGoToFirstFile
unzip.c, 1400
unzGoToNextFile
unzip.c, 1401
unzLocateFile
unzip.c, 1402
unzOpen
unzip.c, 1403
unzOpen2
unzip.c, 1403
unzOpen2_64
unzip.c, 1404
unzOpen64
unzip.c, 1405
unzOpenCurrentFile
unzip.c, 1405
unzOpenCurrentFile2
unzip.c, 1406
unzOpenCurrentFile3
unzip.c, 1406
unzOpenCurrentFilePassword
unzip.c, 1409
unzOpenInternal
unzip.c, 1410
unzip.h, 1435
unzReadCurrentFile
unzip.c, 1413
unzSetFlags
unzip.c, 1416
unzip.h, 1438
unzSetOffset
unzip.c, 1417
unzip.h, 1439
unzSetOffset64
unzip.c, 1417
unzip.h, 1439
unzStringFileNameCompare
unzip.c, 1418
unzeof
unzip.c, 1392
unzip.c
_Z_OF, 1376
ALLOC, 1374
BUFREADCOMMENT, 1375
local, 1375
SIZECENTRALDIRITEM, 1375
SIZEZIPLOCALHEADER, 1375
strcmpcasenosensitive_internal, 1376
TRYFREE, 1375
UNZ_BUFSIZE, 1375
UNZ_MAXFILENAMEINZIP, 1375
unz64local_CheckCurrentFileCoherencyHeader, 1376
unz64local_DosDateToTmuDate, 1378
unz64local_GetCurrentFileInfoInternal, 1379
unz64local_SearchCentralDir, 1386
unz64local_SearchCentralDir64, 1387
unz64local_getByte, 1379
unz64local_getLong, 1383
unz64local_getLong64, 1384
unz64local_getShort, 1385
unz_copyright, 1419
unz_file_info64_internal, 1376
unzClearFlags, 1389
unzClose, 1390
unzCloseCurrentFile, 1391
unzGetCurrentFileInfo, 1392
unzGetCurrentFileInfo64, 1393
unzGetCurrentFileZStreamPos64, 1394
unzGetFilePos, 1394
unzGetFilePos64, 1395
unzGetGlobalComment, 1395
unzGetGlobalInfo, 1396
unzGetGlobalInfo64, 1396
unzGetLocalExtrafield, 1397
unzGetOffset, 1397
unzGetOffset64, 1398
unzGoToFilePos, 1398
unzGoToFilePos64, 1399
unzGoToFirstFile, 1400
unzGoToNextFile, 1401
unzLocateFile, 1402
unzOpen, 1403
unzOpen2, 1403
unzOpen2_64, 1404
unzOpen64, 1405
unzOpenCurrentFile, 1405
unzOpenCurrentFile2, 1406
unzOpenCurrentFile3, 1406
unzOpenCurrentFilePassword, 1409
unzOpenInternal, 1410
unzReadCurrentFile, 1413
unzSetFlags, 1416
unzSetOffset, 1417
unzSetOffset64, 1417
unzStringFileNameCompare, 1418
unzeof, 1392
unztell, 1418
unztell64, 1419
z_crc_t, 1376
unzip.h
_Z_OF, 1430, 1431
tm_unz, 1430
UNZ_AUTO_CLOSE, 1428
UNZ_BADZIPFILE, 1428
UNZ_CRCERROR, 1428
UNZ_DEFAULT_FLAGS, 1428
UNZ_EOF, 1429
UNZ_ERRNO, 1429
UNZ_INTERNALERROR, 1429
UNZ_OK, 1429

UNZ_PARAMERROR, 1429
unz64_file_pos, 1430
unz_file_info, 1430
unz_file_info64, 1430
unz_file_pos, 1430
unz_global_info, 1430
unz_global_info64, 1430
unzClearFlags, 1431
unzFile, 1430
unzGetFilePos, 1431
unzGetFilePos64, 1432
unzGetOffset, 1432
unzGetOffset64, 1433
unzGoToFilePos, 1433
unzGoToFilePos64, 1434
unzOpenInternal, 1435
unzSetFlags, 1438
unzSetOffset, 1439
unzSetOffset64, 1439
Z_BZIP2ED, 1429
unztell
unzip.c, 1418
unztell64
unzip.c, 1419
update
KbBind, 385
KbPerf, 527
QuaAdler32, 800
QuaChecksum32, 802
QuaCrc32, 806
update_keys
crypt.h, 1321
updateBind
KbBindWidget, 405
updateFwButton
KbWidget, 582
updateImage
ColorButton, 147
GradientButton, 199
updateLayout
Kb, 299
updateLight
KbLightWidget, 469
updateMapper
AnimSettingDialog, 117
KPerfWidget, 707
updateModifiers
SettingsWidget, 1010
updateParam
AnimSettingDialog, 112
updateParams
KbAnim, 329
updatePresets
GradientDialog, 219
updateProfileList
KbWidget, 583
updateSelDisplay
KbBindWidget, 406
updateStops
AnimSettingDialog, 115
updateVersion
MainWindow, 740
updated
KbBind, 387
KbLight, 447
KbMode, 495
url
KbFirmware::FW, 179
urlParam
animscript.cpp, 1209
urldecode
ckb-anim.h, 1233
UsbId, 1201
guid, 1205
guidString, 1202, 1203
hwModified, 1205
hwModifiedString, 1203
modified, 1205
modifiedString, 1204
newGuid, 1204
newModified, 1204
UsbId, 1202
UsbId, 1202
usbModel
Kb, 304
usbSerial
Kb, 305
usize
QuaZipFile, 892

VERSIONMADEBY
zip.c, 1448
value
CkbSettings, 135
KeyAction, 625
QuaAdler32, 800
QuaChecksum32, 802
QuaCrc32, 806
verifyFw
fwupgradedialog.cpp, 1246
version
AnimScript, 80
versionCreated
QuaZipFileInfo, 897
QuaZipFileInfo64, 904
versionForBoard
KbFirmware, 418
versionLabel
Ui::SettingsWidget, 1023
Ui_SettingsWidget, 1199
versionNeeded
QuaZipFileInfo, 897
QuaZipFileInfo64, 904
versionUpdated
KbManager, 482
verticalLayout
Ui::KbAnimWidget, 341

Ui::KbBindWidget, 395
Ui::KbLightWidget, 457
Ui::MPerfWidget, 766
Ui::RebindWidget, 957
Ui_KbAnimWidget, 1078
Ui_KbBindWidget, 1085
Ui_KbLightWidget, 1093
Ui_MPerfWidget, 1155
Ui_RebindWidget, 1187
verticalLayout_2
Ui::RebindWidget, 957
Ui_RebindWidget, 1187
verticalSpacer
Ui::AnimSettingDialog, 96
Ui::ExtraSettingsWidget, 168
Ui::GradientDialog, 207
Ui::KbAnimWidget, 341
Ui::KbBindWidget, 396
Ui::KbWidget, 594
Ui::KPerfWidget, 694
Ui::LayoutDialog, 712
Ui::MPerfWidget, 766
Ui::RebindWidget, 957
Ui::SettingsWidget, 1023
Ui_AnimSettingDialog, 1043
Ui_ExtraSettingsWidget, 1055
Ui_GradientDialog, 1069
Ui_KbAnimWidget, 1078
Ui_KbBindWidget, 1085
Ui_KbWidget, 1106
Ui_KPerfWidget, 1125
Ui_LayoutDialog, 1131
Ui_MPerfWidget, 1155
Ui_RebindWidget, 1187
Ui_SettingsWidget, 1199
verticalSpacer_10
Ui::ExtraSettingsWidget, 168
Ui::RebindWidget, 958
Ui::SettingsWidget, 1023
Ui_ExtraSettingsWidget, 1055
Ui_RebindWidget, 1187
Ui_SettingsWidget, 1200
verticalSpacer_11
Ui::ExtraSettingsWidget, 168
Ui::RebindWidget, 958
Ui_ExtraSettingsWidget, 1055
Ui_RebindWidget, 1187
verticalSpacer_2
Ui::AnimAddDialog, 52
Ui::AnimSettingDialog, 96
Ui::ExtraSettingsWidget, 169
Ui::GradientDialog, 208
Ui::KbAnimWidget, 341
Ui::KbLightWidget, 457
Ui::KPerfWidget, 694
Ui::LayoutDialog, 712
Ui::MPerfWidget, 766
Ui::RebindWidget, 958
Ui::SettingsWidget, 1023
Ui_AnimAddDialog, 1031
Ui_AnimSettingDialog, 1044
Ui_ExtraSettingsWidget, 1055
Ui_GradientDialog, 1069
Ui_KbAnimWidget, 1078
Ui_KbLightWidget, 1093
Ui_KPerfWidget, 1125
Ui_LayoutDialog, 1131
Ui_MPerfWidget, 1155
Ui_RebindWidget, 1187
Ui_SettingsWidget, 1200
verticalSpacer_3
Ui::AnimAddDialog, 52
Ui::AnimSettingDialog, 97
Ui::ExtraSettingsWidget, 169
Ui::KbAnimWidget, 341
Ui::KbLightWidget, 457
Ui::KPerfWidget, 694
Ui::LayoutDialog, 712
Ui::MPerfWidget, 766
Ui::RebindWidget, 958
Ui::SettingsWidget, 1023
Ui_AnimAddDialog, 1031
Ui_AnimSettingDialog, 1044
Ui_ExtraSettingsWidget, 1055
Ui_KbAnimWidget, 1079
Ui_KbLightWidget, 1093
Ui_KPerfWidget, 1126
Ui_LayoutDialog, 1131
Ui_MPerfWidget, 1155
Ui_RebindWidget, 1188
Ui_SettingsWidget, 1200
verticalSpacer_4
Ui::ExtraSettingsWidget, 169
Ui::KPerfWidget, 694
Ui::LayoutDialog, 712
Ui::RebindWidget, 958
Ui::SettingsWidget, 1023
Ui_ExtraSettingsWidget, 1055
Ui_KPerfWidget, 1126
Ui_LayoutDialog, 1131
Ui_RebindWidget, 1188
Ui_SettingsWidget, 1200
verticalSpacer_5
Ui::ExtraSettingsWidget, 169
Ui::RebindWidget, 958
Ui::SettingsWidget, 1023
Ui_ExtraSettingsWidget, 1056
Ui_RebindWidget, 1188
Ui_SettingsWidget, 1200
verticalSpacer_6
Ui::ExtraSettingsWidget, 169
Ui::RebindWidget, 958
Ui::SettingsWidget, 1023
Ui_ExtraSettingsWidget, 1056
Ui_RebindWidget, 1188
Ui_SettingsWidget, 1200

verticalSpacer_7
Ui::ExtraSettingsWidget, 169
Ui::RebindWidget, 958
Ui::SettingsWidget, 1024
Ui_ExtraSettingsWidget, 1056
Ui_RebindWidget, 1188
Ui_SettingsWidget, 1200
verticalSpacer_8
Ui::ExtraSettingsWidget, 169
Ui::RebindWidget, 958
Ui::SettingsWidget, 1024
Ui_ExtraSettingsWidget, 1056
Ui_RebindWidget, 1188
Ui_SettingsWidget, 1200
verticalSpacer_9
Ui::ExtraSettingsWidget, 169
Ui_ExtraSettingsWidget, 1056

wheelBox
Ui::RebindWidget, 959
Ui_RebindWidget, 1188
wheelButton
Ui::RebindWidget, 959
Ui_RebindWidget, 1188
wheelKeys
RebindWidget, 995
widget
Ui::GradientDialog, 208
Ui::KbBindWidget, 396
Ui::KbLightWidget, 458
Ui_GradientDialog, 1069
Ui_KbBindWidget, 1085
Ui_KbLightWidget, 1093
width
Key, 598
KeyMap, 650
winBox
Ui::SettingsWidget, 1024
Ui_SettingsWidget, 1200
winLabel
Ui::SettingsWidget, 1024
Ui_SettingsWidget, 1201
winLock
KbBind, 387
Write_EndOfCentralDirectoryRecord
zip.c, 1456
Write_GlobalComment
zip.c, 1457
Write_LocalFileHeader
zip.c, 1458
Write_Zip64EndOfCentralDirectoryLocator
zip.c, 1460
Write_Zip64EndOfCentralDirectoryRecord
zip.c, 1461
writeCache
CkbSettings, 137
writeData
QuaGzipFile, 812
QuaZIODevice, 820
QuaZipFile, 893
writePos
QuaZipFilePrivate, 909
writeProfileHeader
Kb, 300

x
Key, 598
xBox0
Ui::MPerfWidget, 767
Ui_MPerfWidget, 1155
xBox1
Ui::MPerfWidget, 767
Ui_MPerfWidget, 1155
xBox2
Ui::MPerfWidget, 767
Ui_MPerfWidget, 1156
xBox3
Ui::MPerfWidget, 767
Ui_MPerfWidget, 1156
xBox4
Ui::MPerfWidget, 767
Ui_MPerfWidget, 1156
xBox5
Ui::MPerfWidget, 767
Ui_MPerfWidget, 1156
xSlider0
Ui::MPerfWidget, 767
Ui_MPerfWidget, 1156
xSlider1
Ui::MPerfWidget, 767
Ui_MPerfWidget, 1156
xSlider2
Ui::MPerfWidget, 767
Ui_MPerfWidget, 1156
xSlider3
Ui::MPerfWidget, 768
Ui_MPerfWidget, 1156
xSlider4
Ui::MPerfWidget, 768
Ui_MPerfWidget, 1156
xSlider5
Ui::MPerfWidget, 768
Ui_MPerfWidget, 1157
xyBox
Ui::MPerfWidget, 768
Ui_MPerfWidget, 1157
xyLinkPath
mperfwidget.cpp, 1316

y
Key, 598
YES
KbFirmware, 411
yBox0
Ui::MPerfWidget, 768
Ui_MPerfWidget, 1157
yBox1
Ui::MPerfWidget, 768

Ui_MPerfWidget, 1157
yBox2
Ui::MPerfWidget, 768
Ui_MPerfWidget, 1157
yBox3
Ui::MPerfWidget, 768
Ui_MPerfWidget, 1157
yBox4
Ui::MPerfWidget, 768
Ui_MPerfWidget, 1157
yBox5
Ui::MPerfWidget, 769
Ui_MPerfWidget, 1157
ySlider0
Ui::MPerfWidget, 769
Ui_MPerfWidget, 1157
ySlider1
Ui::MPerfWidget, 769
Ui_MPerfWidget, 1158
ySlider2
Ui::MPerfWidget, 769
Ui_MPerfWidget, 1158
ySlider3
Ui::MPerfWidget, 769
Ui_MPerfWidget, 1158
ySlider4
Ui::MPerfWidget, 769
Ui_MPerfWidget, 1158
ySlider5
Ui::MPerfWidget, 769
Ui_MPerfWidget, 1158
year
AnimScript, 80

Z_BUFSIZE
zip.c, 1448
Z_BZIP2ED
unzip.h, 1429
zip.h, 1501
Z_MAXFILENAMEINZIP
zip.c, 1448
z_crc_t
unzip.c, 1376
zip.c, 1449
ZCALLBACK
ioapi.h, 1326
ZCLOSE64
ioapi.h, 1326
ZERROR64
ioapi.h, 1326
ZFAKECLOSE64
ioapi.h, 1326
ZIP64ENDHEADERMAGIC
zip.c, 1448
ZIP64ENDLOCHEADERMAGIC
zip.c, 1449
ZIP_AUTO_CLOSE
zip.h, 1501
ZIP_BADZIPFILE
zip.h, 1501
ZIP_DEFAULT_FLAGS
zip.h, 1501
ZIP_EOF
zip.h, 1501
ZIP_ERRNO
zip.h, 1501
ZIP_INTERNALERROR
zip.h, 1501
ZIP_OK
zip.h, 1501
ZIP_PARAMERROR
zip.h, 1502
ZIP_SEQUENTIAL
zip.h, 1502
ZOPEN64
ioapi.h, 1327
ZPOS64_T
ioapi.h, 1328
ZREAD64
ioapi.h, 1327
ZSEEK64
ioapi.h, 1327
ZTELL64
ioapi.h, 1328
ZWRITE64
ioapi.h, 1328
zdecode
crypt.h, 1320
zencode
crypt.h, 1320
zip
QuaZipFilePrivate, 909
zip.c
_Z_OF, 1449
ALLOC, 1446
add_data_in_datablock, 1449
allocate_new_datablock, 1450
BUFREADCOMMENT, 1447
CENTRALHEADERMAGIC, 1447
DESCRIPTORHEADERMAGIC, 1447
ENDHEADERMAGIC, 1447
free_datablock, 1451
free_linkedlist, 1451
init_linkedlist, 1452
LOCALHEADERMAGIC, 1447
linkedlist_data, 1449
linkedlist_datablock_internal, 1449
LoadCentralDirectoryRecord, 1453
local, 1447
MAKEULONG64, 1447
SEEK_CUR, 1448
SEEK_END, 1448
SEEK_SET, 1448
SIZECENTRALHEADER, 1448
SIZEDATA_INDATABLOCK, 1448
TRYFREE, 1448
VERSIONMADEBY, 1448

Write_EndOfCentralDirectoryRecord, 1456
Write_GlobalComment, 1457
Write_LocalFileHeader, 1458
Write_Zip64EndOfCentralDirectoryLocator, 1460
Write_Zip64EndOfCentralDirectoryRecord, 1461
Z_BUFSIZE, 1448
Z_MAXFILENAMEINZIP, 1448
z_crc_t, 1449
ZIP64ENDHEADERMAGIC, 1448
ZIP64ENDLOCHEADERMAGIC, 1449
zip64FlushWriteBuffer, 1462
zip64local_SearchCentralDir, 1468
zip64local_SearchCentralDir64, 1469
zip64local_TmzDateToDosDate, 1471
zip64local_getByte, 1463
zip64local_getLong, 1464
zip64local_getLong64, 1465
zip64local_getShort, 1466
zip64local_putValue, 1467
zip64local_putValue_inmemory, 1468
zip_copyright, 1496
zipClearFlags, 1472
zipClose, 1472
zipCloseFileInZip, 1474
zipCloseFileInZipRaw, 1475
zipCloseFileInZipRaw64, 1475
zipOpen, 1480
zipOpen2, 1480
zipOpen2_64, 1481
zipOpen3, 1482
zipOpen64, 1484
zipOpenNewFileInZip, 1485
zipOpenNewFileInZip2, 1485
zipOpenNewFileInZip2_64, 1486
zipOpenNewFileInZip3, 1486
zipOpenNewFileInZip3_64, 1487
zipOpenNewFileInZip4, 1487
zipOpenNewFileInZip4_64, 1488
zipOpenNewFileInZip64, 1492
zipRemoveExtraInfoBlock, 1492
zipSetFlags, 1493
zipWriteInFileInZip, 1494

zip.h
_Z_OF, 1502, 1503
DEF_MEM_LEVEL, 1501
tm_zip, 1502
Z_BZIP2ED, 1501
ZIP_AUTO_CLOSE, 1501
ZIP_BADZIPFILE, 1501
ZIP_DEFAULT_FLAGS, 1501
ZIP_EOF, 1501
ZIP_ERRNO, 1501
ZIP_INTERNALERROR, 1501
ZIP_OK, 1501
ZIP_PARAMERROR, 1502
ZIP_SEQUENTIAL, 1502
zipClearFlags, 1503
zipFile, 1502
zipOpen3, 1504
zipSetFlags, 1506
zipcharpc, 1502

zip64
QuaZipPrivate, 927
zip64_internal, 1446
zip64FlushWriteBuffer
zip.c, 1462
zip64local_SearchCentralDir
zip.c, 1468
zip64local_SearchCentralDir64
zip.c, 1469
zip64local_TmzDateToDosDate
zip.c, 1471
zip64local_getByte
zip.c, 1463
zip64local_getLong
zip.c, 1464
zip64local_getLong64
zip.c, 1465
zip64local_getShort
zip.c, 1466
zip64local_putValue
zip.c, 1467
zip64local_putValue_inmemory
zip.c, 1468
zip_fileinfo, 1499
zip_copyright
zip.c, 1496
zipClearFlags
zip.c, 1472
zip.h, 1503
zipClose
zip.c, 1472
zipCloseFileInZip
zip.c, 1474
zipCloseFileInZipRaw
zip.c, 1475
zipCloseFileInZipRaw64
zip.c, 1475
zipError
QuaZipFilePrivate, 909
QuaZipPrivate, 927
zipFile
zip.h, 1502
zipName
QuaZipPrivate, 927
zipOpen
zip.c, 1480
zipOpen2
zip.c, 1480
zipOpen2_64
zip.c, 1481
zipOpen3
zip.c, 1482
zip.h, 1504
zipOpen64
zip.c, 1484

zipOpenNewFileInZip
zip.c, 1485
zipOpenNewFileInZip2
zip.c, 1485
zipOpenNewFileInZip2_64
zip.c, 1486
zipOpenNewFileInZip3
zip.c, 1486
zipOpenNewFileInZip3_64
zip.c, 1487
zipOpenNewFileInZip4
zip.c, 1487
zipOpenNewFileInZip4_64
zip.c, 1488
zipOpenNewFileInZip64
zip.c, 1492
zipRemoveExtraInfoBlock
zip.c, 1492
zipSetFlags
zip.c, 1493
zip.h, 1506
zipWriteInFileInZip
zip.c, 1494
zipcharpc
zip.h, 1502
zlib_filefunc64_32_def_s, 1325
zlib_filefunc64_def_s, 1324
zlib_filefunc_def_s, 1324
zlib_filefunc64_32_def
ioapi.h, 1328
zlib_filefunc64_def
ioapi.h, 1328
zlib_filefunc_def
ioapi.h, 1328